



**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**DRAFT**  
pr **ETS 300 395-3**

March 1996

---

Source: ETSI TC-RES

Reference: DE/RES-06002-3

ICS: 33.020, 33.060.50

**Key words:** TETRA, CODEC

**Radio Equipment and Systems (RES);  
Trans-European Trunked Radio (TETRA);  
Speech codec for full-rate traffic channel;  
Part 3: Specific operating features**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

\*

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.



## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	7
3 Definitions, symbols and abbreviations .....	8
3.1 Definitions .....	8
3.2 Symbols .....	8
3.3 Abbreviations .....	8
4 Speech encoder .....	8
4.1 Encoder homing function .....	10
4.1.1 Definition of encoder homing frame .....	10
4.1.2 Encoder homing .....	10
4.2 Speech importance function .....	10
4.3 Comfort noise function .....	10
4.4 Frame stealing function .....	10
4.5 Test mode functions .....	11
4.6 Encryption interface .....	11
5 Speech decoder .....	11
5.1 Encryption interface .....	12
5.2 Decoder homing function .....	12
5.2.1 Definition of decoder homing frame .....	12
5.2.2 Decoder homing .....	12
5.3 Missing frame generation .....	12
5.4 Missing frame substitution .....	13
5.5 Test mode functions .....	13
6 Signalling Data Block Format .....	13
Annex A (informative): Implementation of optional features .....	15
A.1 Speech importance calculation .....	15
A.2 Voice Activity Detection (VAD) .....	15
A.3 Discontinuous Transmission (DTX) .....	15
A.4 CNF computation .....	15
A.5 Missing Frame Generation (MFG) .....	15
A.5.1 Error concealment .....	15
A.5.2 Comfort noise generation .....	15
A.6 Setting BFI .....	16
A.7 U-plane frame stealing .....	16
A.8 Receiver muting .....	16
A.9 Response to U-plane signalling .....	16
History .....	17

Blank page

## Foreword

This draft European Telecommunication Standard (ETS) has been produced by the Radio Equipment System (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Public Enquiry phase of the ETSI standards approval procedure.

<b>Proposed transposition dates</b>	
Date of latest announcement of this ETS (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Blank page

## 1 Scope

This ETS describes all the functions associated with the TETRA speech codec, excepted the specification of the codec by itself which is entirely defined in ETS 300 395-2 [2].

Clause 4 of this ETS provides a description of the functions associated with the speech encoder, while clause 5 is its counterpart for the speech decoder.

Clause 6 describes the contents and the format of the signalling data block included in a stolen frame when used for transferring information relevant to the codec in a U-plane signalling message.

In addition, annex A (informative) provides indications and preferred solutions for the implementation of optional features.

## 2 Normative references

This European Telecommunication Standard incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this European Telecommunications Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 395-1 (1995): "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA) system; Speech codec for full-rate traffic channel; Part 1: General description of speech functions".
- [2] ETS 300 395-2 (1995): "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA) system; Speech codec for full-rate traffic channel; Part 2: TETRA codec".
- [3] ETS 300 392-2 (1995): "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA) system; Voice plus Data; Part 2: Air Interface".
- [4] ETS 300 392-7 (1995): "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA) system; Voice plus Data; Part 7: Security".

### **3 Definitions, symbols and abbreviations**

#### **3.1 Definitions**

Refer to ETS 300 392-2 [3], clause 3 for common TETRA definitions.

#### **3.2 Symbols**

For the purpose of this ETS, the following symbol applies :

HEX                                  Hexadecimal representation of a number

#### **3.3 Abbreviations**

For the purpose of this ETS, the following abbreviations apply :


BFI	Bad Frame Indicator
CNF	Comfort Noise Frame
DTX	Discontinuous Transmission
LTP	Long Term Predictor
MAC	Medium Access Control
PCM	Pulse Coded Modulation
RMS	Root Mean Square
VAD	Voice Activity Detector

Refer to ETS 300 392-2 [3] clause 3 for common TETRA abbreviations.

### **4 Speech encoder**

A diagram of the speech encoder and associated functions is given in figure 1. A more general overview is given in ETS 300 395-1 [1]. The speech encoder is defined in ETS 300 395-2 [2] and the other functions form the speech encoder control unit. The speech encoder control unit shall have access to all the internal data and functions of the speech encoder (including the input speech).



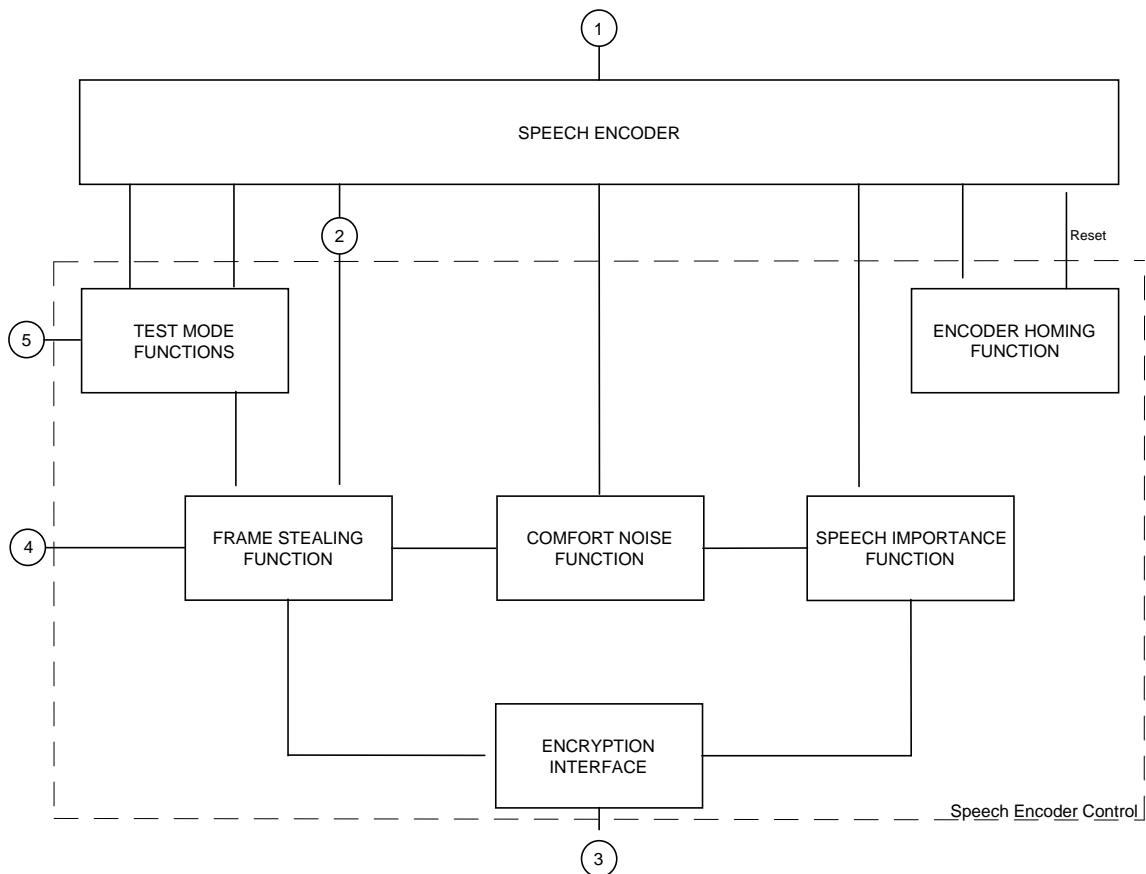

- 1) 16-bit uniform PCM, 8 000 samples/s
- 2) Encoded speech frame 30 ms, 137 bits/frame
- 3) Encoded speech frame in "TMD\_UNITDATA\_request" message
- 4) Stolen indication in "TMD\_REPORT\_indication" message
- 5) Test mode control

**Figure 1: Overview of speech encoder specific operating features**

The speech encoder ETS 300 395-2 [2] shall receive speech in the form of 16-bit uniform PCM at a rate of 8 000 samples per second.

The coded data corresponding to each 30 ms speech frame shall be output from the speech encoder control unit via the encryption interface to the encryption unit (or directly to the MAC if encryption is not used). The interfaces with the encryption unit, namely interface points 3 and 4 in figure 1, shall be as defined in ETS 300 392-7 [4], clause 6. Message "TMD\_UNITDATA\_request" is the means of conveying half-slots from the U-plane to the MAC, while "TMD\_REPORT\_indication" enables the MAC to pass control information to the U-plane.

Comfort noise parameters may be generated and their presence in the coded speech data shall be indicated by a U-plane signalling message conveyed using the frame stealing mechanism.

A speech importance indication shall be provided.

The presence of a homing sequence in the input speech shall be recognised and the encoder reset to a defined state.

All functions necessary to support conformance testing shall be implemented.

An appropriate U\_device destination address shall be set for each half slot of coded speech data to allow correct routing at the receiver.

## 4.1 Encoder homing function

### 4.1.1 Definition of encoder homing frame

The encoder homing frame shall consist of 240 identical samples (corresponding to a 30 ms speech frame), each 16 bits long with the value 0008 HEX.

### 4.1.2 Encoder homing

Whenever the speech encoder receives at its input an encoder homing frame exactly aligned with its internal speech frame segmentation, the following events shall take place:

- Step 1: the speech encoder performs its normal operation and produces a speech parameter frame at its output which is in general unknown;
- Step 2: the speech encoder shall be reset and placed in its home state by executing the reset functions `Init_Coder_Tetra( )` and `Init-Pre_Process( )` defined in ETS 300 395-2 [2];
- Step 3: the speech encoder is now in its home state and any further consecutive encoder homing frames shall result in an output speech parameter frame identical to the decoder homing frame.

Applying a sequence of N encoder homing frames to the speech encoder input shall cause at least N-1 decoder homing frames at the output of the speech encoder control unit.

## 4.2 Speech importance function

This function shall compute an importance parameter for each speech frame. This may be done on the basis of the likely degradation in speech quality which would result from stealing that frame. The importance parameter shall take one of the values: NO\_IMPORTANCE, LOW, MEDIUM, or HIGH. Even in the case of speech frames marked "NO\_IMPORTANCE" there may be some benefit in terms of speech quality from transmission to the end user.

## 4.3 Comfort noise function

This function may compute speech parameters which can be used for comfort noise generation at the receiver.

A Comfort Noise Frame (CNF) shall have the same format as a normal speech frame.

The comfort noise function may also determine when a CNF should be transmitted.

If Discontinuous Transmission (DTX) is employed on an uplink, then at least a CNF, or some other data, should be transmitted frequently enough that the receiving base station does not drop the connection.

## 4.4 Frame stealing function

When instructed to do so by the comfort noise function this function should replace the contents of the next available second half-slot by the CNF, insert the U-plane signalling message "CNF\_SPEECH" or "CNF\_SPEECH\_OFF" in the first half slot of the subsequent slot and set the stolen\_indication to "U\_STOLEN". The contents of the message "TMD\_REPORT\_indication" shall be used to determine whether the current half slot is the first or second.

U-plane frame stealing shall be disabled when required by test mode functions.

The frame stealing function may set the appropriate value for the half\_slot\_position parameter based on the contents of the message "TMD\_REPORT\_indication".

#### 4.5 Test mode functions

The test mode control input to the speech encoder control shall determine when the codec conformance test mode is active.

When the codec conformance test mode is active, the following shall apply :

- the frame stealing function shall not carry out U-plane frame stealing;
- the frame stealing function shall pass the encoded speech data to the encryption interface without any modification;
- the speech importance function shall indicate HIGH importance for all input speech data;
- encryption shall be disabled.


#### 4.6 Encryption interface

This function assembles the parameters for the message "TMD\_UNITDATA\_request" for passing to the encryption unit (or directly to the MAC if encryption is not used).

The parameters of this message shall each be set to one of their allowed values.

### 5 Speech decoder

A diagram of the speech decoder and associated functions is given in figure 2. A more general overview is given in ETS 300 395-1 [1]. The speech decoder is defined in ETS 300 395-2 [2] and the other functions form the speech decoder control unit. The speech decoder control unit shall have access to all the internal data and functions of the speech decoder.

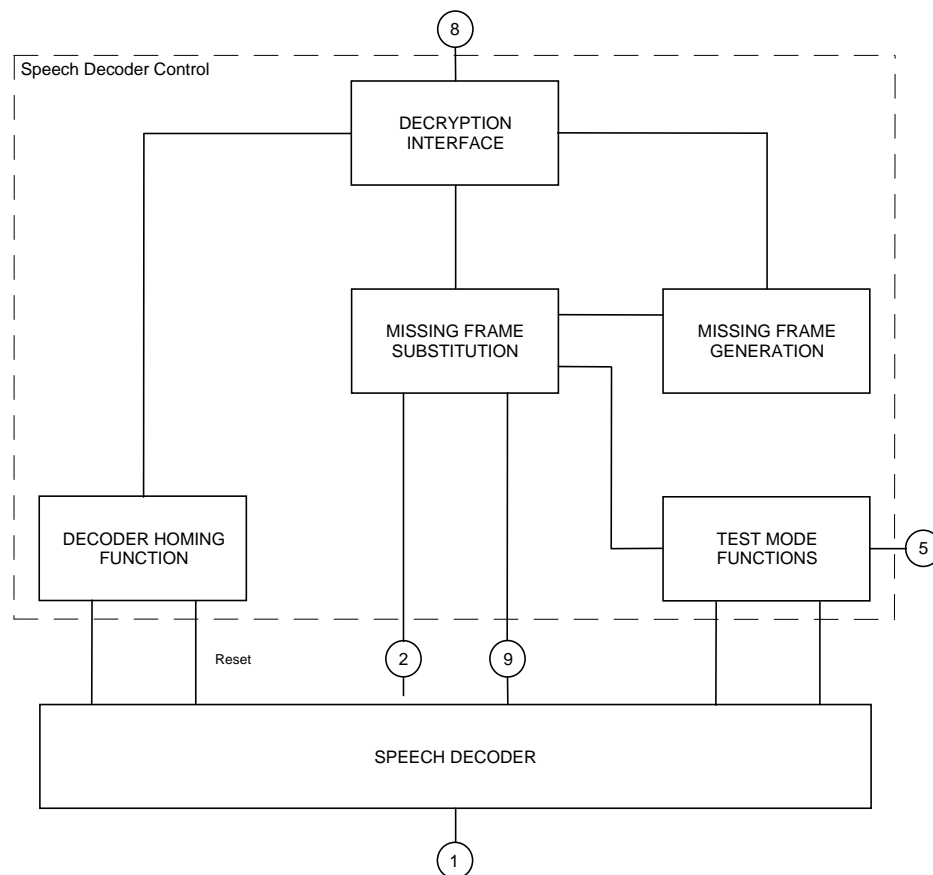

- 1) 16-bit uniform PCM, 8 000 samples/s
- 2) Encoded speech frame 30 ms, 137 bits/frame
- 5) Test mode control

- 8) Encoded speech frame in "TMD\_UNITDATA\_indication" message
- 9) Bad frame indicator

**Figure 2: Overview of speech decoder specific operating features**

The interfaces from the encryption unit (or MAC) to the speech decoder control unit, namely interface point 8 in figure 2 shall be as defined in ETS 300 392-7 [4], clause 6. Message "TMD\_UNITDATA\_indication" is used to convey half-slots from the MAC to the U-plane. The coded data corresponding to each 30 ms speech frame shall be received from the encryption unit via the encryption interface.

Each received half\_slot will have a U\_device destination address to allow routing to appropriate device at the receiver.

The speech decoder ETS 300 395-2 [2] shall output synthesised speech in the form of 16-bit uniform PCM at a rate of 8 000 samples per second.

### 5.1 Encryption interface

This function receives the parameters in the message "TMD\_UNITDATA\_indication" from the encryption unit (or directly from the MAC if encryption is not used).

### 5.2 Decoder homing function

#### 5.2.1 Definition of decoder homing frame

The decoder homing frame is a fixed set of parameters as described in table 1. It is the natural response of the speech encoder, starting from its home state, to an encoder homing frame. This condition occurs if at least two encoder homing frames are input to the encoder consecutively. As for any 30 ms speech frame, the decoder homing frame is an encoded block of 137 bits. Table 1 shall be read as follows : bit 1 appears on line 1 column 1, bit 2 on line 1 column 2 and bit 137 on the last line, last column. Only for the convenience of the reader, those 137 bits are split by strings of 10 in table 1.

**Table 1: Values of the 137 bits in the decoder homing frame (bit 1 in upper left side)**

1011111101	1100111101	0100110000	1101110100	1111001110	000000011
1111001110	0001100000	0000010011	1001111000	1000000001	1100101000
0110001111	1001001				

#### 5.2.2 Decoder homing

Whenever the speech decoder control unit receives at its input a decoder homing frame, then the following events shall take place:

- Step 1 : the speech decoder performs its normal operation and produces a speech frame at its output which is in general unknown, except if the speech decoder was in its home state at the start of the frame, the resulting speech frame is replaced by the encoder homing frame;
- Step 2 : the speech decoder is reset, placing it in its home state, by executing the reset function `Init_Decod_Tetra()` defined in ETS 300 395-2 [2].

Applying a sequence of N decoder homing frames to the input of the speech decoder control unit shall cause at least N-1 encoder homing frames at the output of the speech decoder.

### 5.3 Missing frame generation

This function may generate half slots of coded speech data to replace those missing due to failure of the radio link, frame stealing, or DTX.

If comfort noise is generated using the data in a CNF, successive values of the codebook index, sign and shift shall be randomised.

#### 5.4 Missing frame substitution

This function may replace missing half slots of information by those produced by the Missing Frame Generation (MFG) function.

Encoded speech frames shall be passed to the speech decoder at an average rate of one every 30 ms.

The Bad Frame Indicator (BFI) shall not be set if the half\_slot\_condition is "GOOD" and the stolen indication is "NOT\_STOLEN" in the "TMD\_UNITDATA\_indication".

#### 5.5 Test mode functions

The test mode control input to the speech decoder control shall determine when the codec conformance test mode is active.

When the codec conformance test mode is active, the following shall apply :

- decryption shall be disabled;
- the missing frame substitution function shall not replace any missing half slots, unless the stolen indication is "C\_STOLEN" or "U\_STOLEN" or the half\_slot\_condition is "BAD" or "NULL", in which case the BFI shall also be set.

NOTE: If frame stealing occurs or bad frames are received during the codec conformance test, then the test will almost certainly fail.

### 6 Signalling Data Block Format

As described in ETS 300 392-7 [4], subclause 6.3, in the messages "TMD\_UNITDATA\_indication" and "TMD\_UNITDATA\_request", the presence of half slot stolen by the U-plane is indicated by the stolen indication "U\_STOLEN". In this case the format of stolen half slot is as defined in ETS 300 392-7 [4], subclause 6.2.5, table **Error! Bookmark not defined.**, knowing that the stealing channel STCH/E allows 121 bits of data.

**Table 2: Stolen half slot format**

Information Element	Element Length
Half Slot Stolen by Encryption unit (HSSE)	1
Stolen Half Slot Identifier (SHSI)	1
Signalling data block	119

If the half slot is not stolen by the encryption unit (HSSE is 0) and is not an encryption synchronisation frame (SHSI is 1), the format of the signalling data block is as defined in table 3.

**Table 3: Signalling data block format**

Information Element	Element Length
Signalling message	6
Signalling data	113

The coding of the signalling message information element (64 values allowed) shall be as follows :

Table 4: Information element coding

Value	Message Name	Description
0	NULL	No message
1	SPEECH_ON	Active speech commences in next half slot
2	SPEECH_OFF	End of active speech
3	CNF_SPEECH	Second half slot in previous slot contains CNF, but subsequent half slots may contain active speech
4	CNF_SPEECH_OFF	Second half slot in previous slot contains CNF and marks end of current period of active speech
5	MUTE	Mute speech decoder output
6	UNMUTE	Un-mute speech decoder output
7-31	Reserved	For definition within TETRA standard
32-63	User defined	For use by manufacturers/system implementers

As indicated in table 4 above, the MUTE message is intended to mute the speech codec output. On receipt of the MUTE message, and to avoid the possibility of permanently and erroneously de-activating the codec, the speech decoder output shall be muted for a maximum of 100 speech frames (corresponding to 3 seconds) after the last MUTE message.

## **Annex A (informative): Implementation of optional features**

### **A.1 Speech importance calculation**

The speech frame importance is intended to indicate the degradation in quality likely to be caused by stealing that speech frame. Therefore the degradation due to frame stealing can be minimised by preferentially stealing frames of lower importance.

As an example, the speech importance could be related directly to the RMS energy of the input speech.

If means are not provided for calculation of importance all speech frames could be labelled with importance "HIGH".

### **A.2 Voice Activity Detection (VAD)**

VAD may be implemented by the speech importance function. Active speech could correspond to all speech frames labelled with other than "NO\_IMPORTANCE".

### **A.3 Discontinuous Transmission (DTX)**

DTX may be implemented within the MAC or other part of the transmission system. For example, speech frames marked "NO\_IMPORTANCE" need not be transmitted over the air interface.

Gaps in the transmission can be filled at the receiver by inserting comfort noise.

As an example, a CNF could be placed at the end of a period of active speech. This would be indicated by the U-plane signalling messages "CNF\_SPEECH" or "CNF\_SPEECH\_OFF" and the subsequent half slots marked "NO\_IMPORTANCE" until the start of the next period of active speech.

### **A.4 CNF computation**

For best subjective speech quality the CNF parameters should be estimated using periods of no input speech activity.

To minimise possible disturbing periodic noises, it may for example, be desirable to transmit the smallest possible energy value for the LTP parameter.

### **A.5 Missing Frame Generation (MFG)**

#### **A.5.1 Error concealment**

The speech decoder carries out error concealment action if the Bad Frame Indicator (BFI) is set at its input, but implementation of improved error concealment may be possible within the speech decoder control unit.

As an example, appropriate replacement data could be calculated for half slots marked "BAD" or "NULL", and in this case the BFI could then be set to "GOOD".

#### **A.5.2 Comfort noise generation**

Comfort noise can be generated using a recently received CNF. In this case successive values of the speech parameters codebook index, sign and shift shall be randomised.

If a half slot containing a CNF is marked "BAD", then the previous good CNF may be used.

If a CNF is not available at the receiver, then comfort noise parameters may be computed in some other way, for example by estimation from received speech parameters or using a pre-defined CNF.

## **A.6 Setting BFI**

In the missing frame substitution function the BFI should be set if error concealment action by the speech decoder is appropriate.

For example the BFI could be set if the stolen\_indication is "C\_STOLEN" or "U\_STOLEN", or the half\_slot\_condition is "BAD" or "NULL".

## **A.7 U-plane frame stealing**

In general frame stealing will degrade the speech quality and should therefore be used as infrequently as possible. A rate of less than one frame per second is desirable.

Since it may be possible that the speech encoder can be informed that U-plane frame stealing has occurred before the next speech frame is processed it may be possible for the encoder to take some action to minimise the degradation in speech quality at the receiver.

## **A.8 Receiver muting**

The speech decoder may be muted by substituting its input data for coded frames corresponding to silence.

## **A.9 Response to U-plane signalling**

The action to be carried out on receipt of signalling messages and data is optional. However, ignoring signalling messages is likely to reduce the perceived communications quality.



**History**

<b>Document history</b>	
March 1996	Public Enquiry PE 103: 1996-03-04 to 1996-06-28