



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 395-4

May 1997

Source: ETSI TC-RES

Reference: DE/RES-06002-5

ICS: 33.020

Key words: TETRA, CODEC

**Radio Equipment and Systems (RES);
Trans-European Trunked Radio (TETRA);
Speech codec for full-rate traffic channel;
Part 4: Codec conformance testing**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

Contents

| | |
|--|----|
| Foreword | 5 |
| 1 Scope | 7 |
| 2 Normative references | 7 |
| 3 Definitions and abbreviations | 7 |
| 3.1 Definitions | 7 |
| 3.2 Abbreviations | 7 |
| 4 General..... | 8 |
| 5 Radio test configuration, test signals and test modes..... | 8 |
| 6 TCH/S Channel Codec..... | 9 |
| 6.1 Objectives | 9 |
| 6.2 Conformance test methodology..... | 9 |
| 6.3 Test decoding mode | 9 |
| 6.3.1 General..... | 9 |
| 6.3.2 TCH/S reference sensitivity performance | 9 |
| 6.3.3 Methods of measurement for TCH/S testing..... | 10 |
| 7 TCH/S speech codec | 11 |
| 7.1 Objectives | 11 |
| 7.2 Conformance test methodology..... | 11 |
| 7.3 Option 1: air interface configuration | 12 |
| 7.3.1 Definition and applicability | 12 |
| 7.3.2 Conformance requirement and purpose | 12 |
| 7.3.3 Method of test..... | 13 |
| 7.3.3.1 Initial conditions | 13 |
| 7.3.3.2 Procedure | 13 |
| 7.3.3.3 Air-interface requirements | 13 |
| 7.3.3.4 Test requirements..... | 14 |
| 7.4 Option 2: baseband configuration..... | 14 |
| 7.4.1 Definition and applicability | 14 |
| 7.4.2 Conformance requirement and purpose | 14 |
| 7.4.3 Method of test..... | 15 |
| 7.4.3.1 Initial conditions | 15 |
| 7.4.3.2 Procedure | 15 |
| 7.4.3.3 Test requirements..... | 15 |
| Annex A (normative): TCH/S test cases and conditions for BS and MS receivers | 16 |
| Annex B (normative): Codec conformance test vector sequences | 18 |
| Annex C (informative): Codec reference test vector sequences..... | 19 |
| History..... | 20 |

Blank page

Foreword

This European Telecommunication Standard (ETS) has been produced by the Radio Equipment and System (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS consists of four parts as follows:

Part 1: "General description of speech functions";

Part 2: "TETRA codec";

Part 3: "Specific operating features";

Part 4: "Codec conformance testing".

| Transposition dates | |
|---|------------------|
| Date of adoption: | 2 May 1997 |
| Date of latest announcement of this ETS (doa): | 31 August 1997 |
| Date of latest publication of new National Standard or endorsement of this ETS (dop/e): | 28 February 1998 |
| Date of withdrawal of any conflicting National Standard (dow): | 28 February 1998 |

Blank page

1 Scope

The objective of this European Telecommunication Standard (ETS) is to define the conformance bounds for the TETRA speech and channel codec as deployed in the TETRA Speech Traffic Channel (TCH/S) channel type used in the TETRA Voice plus Data (V+D) equipment.

For the speech part of the TCH/S codec, the conformance testing (clause 7 of this ETS) consists of a bit-exact test where the reference is pre-computed and fixed.

For the TCH/S channel encoding a bit exact conformance test is also defined (see subclause 6.4).

For the TCH/S channel decoding, a non-bit exact test is employed with the specifications designed such that a sufficient quality of performance is met by the TETRA equipment (see subclause 6.3).

2 Normative references

This ETS incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 392-2 (1995): "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA); Voice plus Data; Part 2: Air Interface".
- [2] ETS 300 394-1 (1995): "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA); Conformance testing specification; Part 1: Radio".
- [3] ETS 300 395-2 (1995): "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA); Speech codec for full rate traffic channel; Part 2: TETRA codec".
- [4] ETS 300 395-3 (1995): "Radio Equipment and Services (RES); Trans-European Trunked Radio (TETRA); Speech codec for full-rate traffic channel; Part 3: Specific operating features".
- [5] ETS 300 607 (1994): "European Digital Cellular Telecommunications System (Phase 2); Mobile Station (MS) conformance specification (GSM 11.10)".
- [6] CCITT Recommendation O.153: "Basic parameters for the measurement of error performance at bit rate below the primary rate".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this ETS, the definitions given in the following ETSs apply:

- ETS 300 392 part 2 [1], clause 3;
- ETS 300 394 part 1 [2], clause 3.

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

| | |
|-------|---|
| ACELP | Algebraic Code Excited Linear Predictive |
| BER | Bit Error Rate |
| dBm | Decibels relative to one milliWatt |
| MER | Message Erasure Rate |
| PUEM | Probability of Undetected Erroneous Message |
| PCM | Pulse Coded Modulation |

| | |
|-------|----------------------------------|
| TE | Terminal Equipment |
| TSS | TETRA System Simulator |
| VAD | Voice Activity Detector |
| STCH | STealing CHannel |
| TCH/S | Full Rate Speech Traffic CHannel |

See ETS 300 394 part 1 [2], clause 3, for conformance testing abbreviations.

4 General

The conformance testing of the TCH/S channel shall be conducted in identical or similar methodology as specified in ETS 300 394-1 [2]. However, as ETS 300 394-1 [2] is specified for both the TETRA V+D and TETRA Packet Data Optimized (PDO), only the TETRA V+D part of ETS 300 394-1 [2] shall be applicable to this ETS. Therefore, all references to ETS 300 394-1 [2] clauses shall refer to the TETRA V+D sections only. For the purpose of this ETS, the following where applicable shall apply:

- presentation of equipment for testing purposes shall be as specified in ETS 300 394-1 [2], subclause 4.1;
- facilities and information required for testing shall be as specified in ETS 300 394-1 [2], subclause 4.1.1;
- choice of radio frequency channels to be tested shall be as specified in ETS 300 394-1 [2], subclause 4.1.2;
- interpretation of the measurement results shall be as specified in ETS 300 394-1 [2], subclause 4.1.3;
- mechanical and electrical design shall be as specified in ETS 300 394-1 [2], subclause 4.2.

5 Radio test configuration, test signals and test modes

In order to perform the conformance testing specified in this ETS, the Terminal Equipment (TE) shall have been tested to, and passed, the relevant specifications as given in ETS 300 394-1 [2]. Thus, all appropriate logical channel types apart from the TCH/S shall have been tested.

In this ETS, the TETRA speech and channel codec as specified in ETS 300 395-2 [3], shall be conformance tested under standard TETRA specified configurations. All unspecified or informative parts of the TETRA speech and channel codec shall be disabled and not tested. For example, sub-systems such as the Voice Activity Detector (VAD) as given in ETS 300 395-3 [4] shall be excluded from the tests in this ETS. If these and other speech related sub-systems are standardized in future phases of TETRA then a separate conformance test may be generated to test these new additions.

In this ETS, only the standard un-encrypted TCH/S shall be tested. Thus the TE's encryption capability, if implemented by the TE, shall be disabled for the duration of the tests specified in this ETS. Similarly, all parts related to the STealing CHannel (STCH) and the eventually associated half slot containing encoded speech shall not be tested and shall not be activated in the test.

The test signal T1 shall be as specified in ETS 300 394-1 [2], subclause 5.3.2.

In accordance to ETS 300 394-1 [2], the channel type tested under this ETS shall be designated as channel type 15 and 16 for TCH/S. For Mobile Station (MS) testing, on frame 1 to 17, table 1 shall apply. For Base Station (BS) testing, on frame 1 to 17, table 2 shall apply.

Table 1: Channel type for MS testing

| Channel type | Burst type | Block 1 | Block 2 | Broadcast block |
|--------------|------------|---------|---------|----------------------------------|
| 15 | normal | TCH/S | | Access Assignment Channel (AACH) |

Table 2: Channel type for BS testing

| Channel type | Burst type | Sub slot 1 | Sub slot 2 |
|--------------|------------|------------|------------|
| 16 | normal | TCH/S | |

6 TCH/S Channel Codec

6.1 Objectives

The objective of this clause is to specify and present performance limits for the TCH/S channel encoding and decoding sub-system. The TCH/S channel encoder is specified in bit exact terms and is given in ETS 300 395-2 [3], clause 5, and all TE shall operate according to it. The TCH/S channel decoder is specified in non-bit exact terms and is given in ETS 300 395-2 [3], clause 6, while an informative example implementation is given in ETS 300 395-2 [3], annex A. The performance of the TCH/S channel decoder is specified in this clause.

6.2 Conformance test methodology

The presentation of the conformance testing procedures for the TCH/S shall be the same as for the other logical channel types as specified in ETS 300 394-1 [2]. Therefore, as described in ETS 300 394-1 [2], all conformance test data between the TETRA System Simulator (TSS) and the TE shall be via two ports, namely the antenna port and the test connector.

The type tests described in this ETS shall be performed under normal test conditions as specified in ETS 300 394-1 [2], subclauses 6.2 and 6.2.1.

6.3 Test decoding mode

For the TCH/S channel decoding test mode, the TE under test shall perform the test in a similar manner as other channel coded channels as specified in ETS 300 394-1 [2], subclause 5.2.1.

6.3.1 General

The test set up, procedures and measurement methods detailed in ETS 300 394-1 [2] shall be used in testing TETRA V+D equipment TCH/S performance.

The required minimum number of samples and test limit error rates used in the following TCH/S receiver test are defined such that:

- a) the probability of passing a bad unit is lower than 0,3 %;
- b) the probability of passing a good unit, operating on the limit of performance, is at least 99,5 %.

The Bit Error Ratio/Message Erasure Rate (BER/MER) test limits adopted have been selected in order not to pass a unit with a sensitivity performance 1 dB worse than that of an unit which just meets the specification.

NOTE: The above definition does not apply to Probability of Undetected Erroneous Message (PUEM) measurements.

6.3.2 TCH/S reference sensitivity performance

The minimum required reference sensitivity performance for V+D equipment is specified in ETS 300 392-2 [1] according to test condition, propagation condition and receiver class.

The maximum dynamic and static reference sensitivity levels for a BS receiver under normal test conditions shall not exceed the signal levels shown in table 3.

Table 3: BS receiver minimum reference sensitivity

| Test condition | Dynamic reference sensitivity | Static reference sensitivity |
|----------------|-------------------------------|------------------------------|
| Normal | -106 dBm | -115 dBm |

The maximum dynamic and static reference sensitivity levels for a MS receiver under normal test conditions shall not exceed the signal levels shown in table 4.

Table 4: MS receiver minimum reference sensitivity

| Test condition | Dynamic reference sensitivity | Static reference sensitivity |
|----------------|-------------------------------|------------------------------|
| Normal | -103 dBm | -112 dBm |

The TCH/S cases to be tested and the corresponding limit values for BER and MER are given in annex A, tables A.1 to A.5.

All MS equipment shall achieve a PUEM on TCH/S class 2 bits of < 0,01 % measured in static channel conditions. The test cases, number of required samples and test limit values are given in annex A, table A.6.

All TCH/S receiver tests shall be carried out under normal conditions only.

6.3.3 Methods of measurement for TCH/S testing

The test system, test conditions and test configuration used in TCH/S testing are detailed in ETS 300 394-1 [2], clauses 4 and 5 with the following exceptions:

- unlike other protected logical channels, the TCH/S channel splits the data bits from the TETRA speech codec into three classes of bits, the lowest priority designated class 0, medium priority designated class 1, and highest priority designated class 2. The assignment of the bits of the TETRA speech parameters to its sensitivity classification shall be as given in ETS 300 395-2 [3], subclause 5.4.1, table 4;
- in the case of BS V+D receiver testing the test system shall transmit in T1 time-slot 1 on frames 1 to 17 an uplink channel type 16 burst (see table 5).

Table 5: TCH/S uplink channel type

| Channel type | Burst type | Subslot 1 + Subslot 2 |
|--------------|------------|-----------------------|
| 16 | Normal | TCH/S |

- in the case of MS V+D receiver testing the test system shall transmit in T1 timeslot 1 on frames 1 to 17 a downlink channel type 15 burst (see table 6).

Table 6: TCH/S downlink channel type

| Channel type | Burst type | Block 1 + Block 2 |
|--------------|------------|-------------------|
| 15 | Normal | TCH/S |

The equipment shall be connected to the test system via its antenna connector.

The test procedures detailed in ETS 300 394-1 [2], subclauses 9.3.1, 9.3.2 and 9.3.3 for sensitivity performance and PUEM performance shall be adopted for TCH/S testing.

The TSS shall incorporate some mechanism for preserving frame synchronization between the transmitted and decoded data so that the error rates for each class of bits can be correctly determined.

In summary, the following procedure is adopted for channel decoding testing:

- establish test receive mode for the TE under test;
- transmit test sequence (7,2 kbit/s) from TSS to TE via the antenna port using the TCH/S type;
- the TE receives the test sequence and performs channel decoding;
- the TE transmits the decoded information bits in the correct type classification to the TSS via the test port;
- the TSS receives and processes the TE data bits.

The above procedure shall be repeated for all the different conditions as set out in annex A.

7 TCH/S speech codec

7.1 Objectives

The objective of this clause is to specify the test methodology and the conformance requirements for the TETRA speech coding and decoding sub-systems as given by ETS 300 395-2 [3], clause 4 of the TETRA TCH/S channel type. The objective of the test is to present to both the TETRA speech encoder and decoder a pre-defined sequence which when processed shall match exactly with a stored conformance output sequence. The matching shall be performed on a bit-by-bit basis, thus the testing is a bit exact conformance test.

7.2 Conformance test methodology

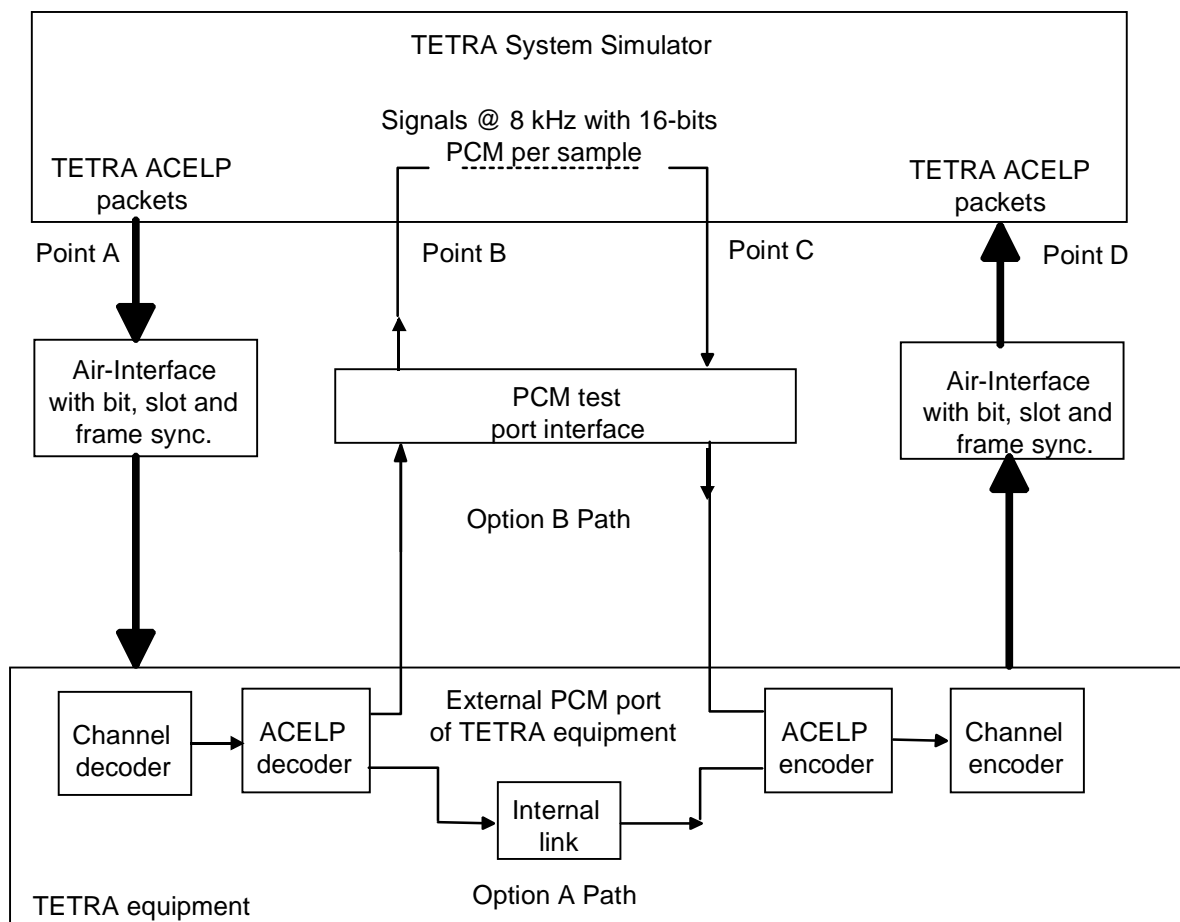


Figure 1: Diagram illustrating the test points for conformance testing the TE's speech codec

In figure 1, the various stages and blocks involved in testing a speech codec are illustrated. As can be seen, the injection of the test sequence can be made at various points in the chain. In order to minimize the cost overhead for testing TE and provide as much flexibility as possible for the different types of TE, two options are available to perform the conformance testing of the TETRA speech coding and decoding. It shall be the responsibility of the TE manufacturer together with the test laboratory to select the most appropriate option. The two options are:

Option A) the injection of the test data shall be from Point A (see figure 1) and the reception of the resultant processed data shall be at Point D going via the internal link path. Therefore this option shall test both the decoder and the encoder together.

NOTE 1: This option is a purely air interface method, and is most suitable for TE capable of operating in full-duplex mode or in fast half-duplex mode (i.e. able to switch between RX and TX within one TETRA frame).

An alternative arrangement for the air interface method is that the internal link (figure 1) is replaced with an external link between two pieces of TETRA equipment. In this way, the output of the decoder of one piece of equipment is fed via an external Pulse Coded Modulation (PCM) port and link to the encoder of the second piece of equipment. The interface to the TSS is still the air interface.

Option B) the test data shall be injected from Point A (see figure 1) and the resultant processed data shall be received at Point B thus testing the decoder. The received data, having been effectively buffered, shall then be re-injected into the TE from Point C and the resultant processed data shall be received at Point D, thus testing the encoder. Therefore, an extra PCM data port shall be required for this option.

NOTE 2: This option is a baseband data injection method, and is most suitable for TE only capable of operating in simplex mode, and for TE's not capable of performing fast half-duplex mode.

The test sequences for the TETRA speech codec as specified in ETS 300 395-2 [3], clause 4 are defined and pre-computed. The test sequences are available in IBM/AT MS-DOS format (attached to this ETS). The details for the format and size of the sequences are given in annex B.

The PCM test port as referred to in figure 1, is not specified in this ETS. However, an informative implementation of this port is given by ETS 300 607 [5], subclause 3.6.4 (Digital Audio Interface (DAI)).

As the exact construction and capability of the TSS is unspecified for the TETRA system, this subclause cannot be too specific on the exact interactions between the TSS and the TE. However, whatever is the exact set-up the conformance specified shall be met.

7.3 Option 1: air interface configuration

7.3.1 Definition and applicability

Speech transcoding transforms the TCH/S 7,2 kbit/s bit stream by channel decoding the incoming bit stream from the air interface and performing speech decoding to produce the resultant 16-bit linear PCM. This is followed by speech encoding the 16-bit linear PCM bit stream and channel encoding it to produce the TCH/S 7,2 kbit/s. Therefore, this subclause provides the conformance test of the TETRA speech encoder and speech decoder as specified in ETS 300 395-2 [3].

The requirements and test shall apply to all TE supporting TCH/S and supporting the Option 1 configuration as given in subclause 7.2. The encoder and decoder may reside in different TEs, and be linked via external PCM ports and a link.

7.3.2 Conformance requirement and purpose

Using figure 1 as reference, the pre-defined input bit sequence designated SEQ1_72.IN injected from Point A shall produce the output bit stream at Point D after passing through the TE's processing blocks. The resultant output sequence shall be bit-by-bit exactly the same as the pre-defined output sequence SEQ4_72.OUT.

As an alternative test set-up, the internal link shown in figure 1 may be replaced by an external link between two TEs. In this way, the decoder from one TE feeds the encoder of the second.

7.3.3 Method of test

7.3.3.1 Initial conditions

Encryption and frame stealing mechanisms shall be de-activated.

7.3.3.2 Procedure

- a) The TSS shall establish the air interface bit, slot and frame synchronization with the TE (or TEs if the internal link is replaced by an external link between two TEs) under test.
- b) The TSS shall communicate with the TE, or TEs, to set the TE, or TEs, into speech codec conformance test mode on Option 1.
- c) The homing sequence SEQ2_72.HOM shall be transmitted from the TSS to the TE, or TEs, from Point A to reset the speech decoder and encoder chain.
- d) The test sequence SEQ1_72.IN shall be transmitted from the TSS to the TE from Point A.
- e) The TE shall produce an output sequence TE4_72.OUT. This shall be achieved by:
 - channel decoding SEQ1_72.IN according to ETS 300 395-2 [3], clause 6 to give TE1_46.CHD;
 - speech decoding TE1_46.CHD according to ETS 300 395-2 [3], clause 4 to give TE2_128.PCM;
 - speech encoding TE2_128.PCM according to ETS 300 395-2 [3], clause 4 to give TE3_46.SPE;
 - channel encoding TE3_46.SPE according to ETS 300 395-2 [3], clause 5 to give TE4_72.OUT.

NOTE: The various stages internal to the TE is given here as a guide on how to transcode the input SEQ1_72.IN to TE4_72.OUT. Thus, the contents of the intermediate stages (TE1_46.CHE, TE2_128.PCM, TE3_46.SPE) are not specified in this ETS. However, reference files for these stages are given in annex C.

- f) The TSS shall receive the output sequence TE4_72.OUT at Point D.
- g) The TSS shall compare the received sequence TE4_72.OUT against the pre-defined reference sequence SEQ4_72.OUT.
- h) If the internal link in figure 1 is replaced by an external link between two TEs, then the two TEs should be exchanged, and parts a) to g) repeated. Exchanging the TEs ensures that the encoder and decoder of both TEs are tested.


7.3.3.3 Air-interface requirements

As the sequences SEQ1_72.IN and TE4_72.OUT are transmitted and received via the air-interface, it is important to ensure that the reception and subsequent transmission times are aligned correctly to allow for the TETRA slot and frame 18 format buffering requirements. If the TE is capable of operating in full duplex operation, then the TE will perform receive, process and transmit procedures for every frame.

However, for half-duplex TE, then a slightly modified communication is required between the TSS and the TE. This is illustrated in figure 2.

Essentially, both the TSS and TE shall operate in half-duplex mode where transmit and receive modes are interchanged on a TETRA frame by frame basis. The one exception to normal half-duplex mode is that the decoded samples from subclause 7.3.3.2 stage e) shall not be treated as separate packets, but the

TE shall concatenate them to form the continuous stream of samples TE2_128.PCM for the ACELP encoding process. Similarly, the TSS shall concatenate the received streams from Point D to form a continuous stream of packets to form the sequences TE4_72.OUT.

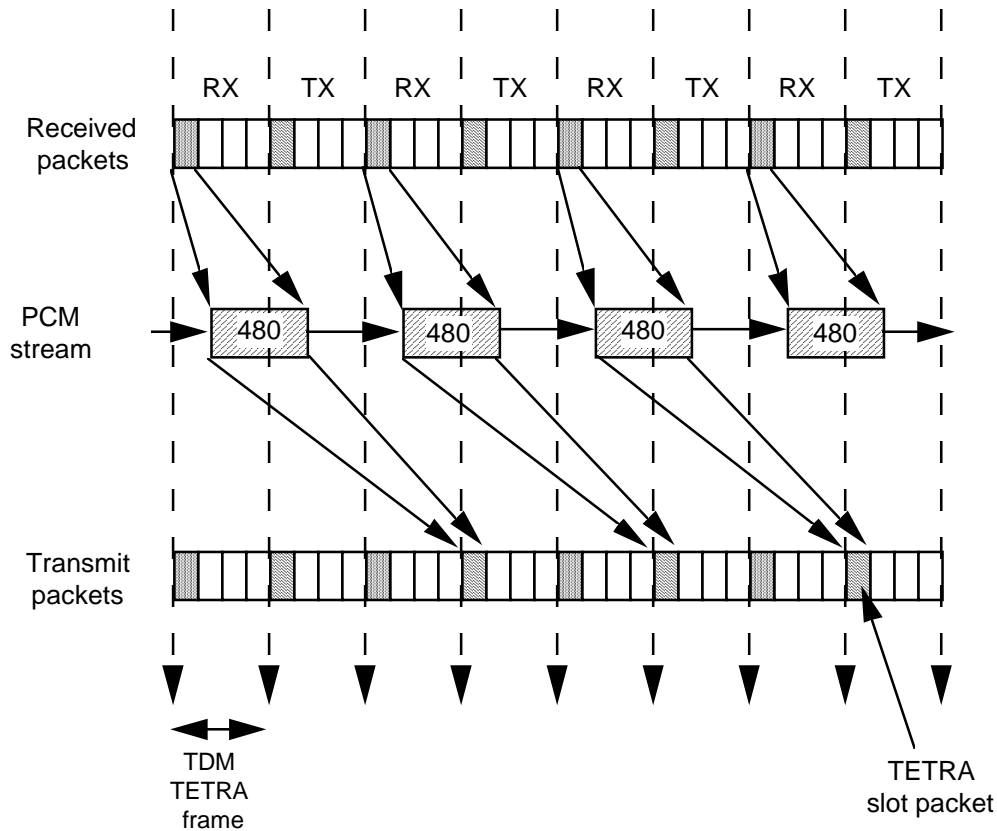

NOTE: The decoded PCM samples are by definition a consecutive sequence, thus the samples from RX(N) will be joined to samples from RX(N+1).

Figure 2: Diagram illustrating configuration for the TX/RX over the air for TETRA codec conformance testing in the case of half-duplex operation TEs using Option 1 air interface configuration

7.3.3.4 Test requirements

In order to pass the TETRA codec conformance test, the bit stream output from the TE under test, TE4_72.OUT shall be bit by bit exactly the same as the sequence given by the file SEQ4_72.OUT.

7.4 Option 2: baseband configuration

7.4.1 Definition and applicability

Speech decoding transforms the TCH/S 7,2 kbit/s bit stream by channel decoding the incoming bit stream from the air interface and performing speech decoding to produce the resultant 16-bit linear PCM. This PCM is transmitted to, and stored by, the TSS. Speech encoding transforms the stored 16-bit linear PCM bit stream by speech and channel encoding it to produce the TCH/S 7,2 kbit/s. Therefore, this subclause defines conformance tests for the TETRA speech encoder and speech decoder as specified in ETS 300 395-2 [3] in separation.

The requirements and tests shall apply to all TE supporting TCH/S and supporting the Option 2 configuration as given in subclause 7.2.

7.4.2 Conformance requirement and purpose

Using figure 1 as reference, the pre-defined input bit sequence designated SEQ1_72.IN injected from Point A shall produce the output PCM bit stream at Point B after passing through the TE's speech

decoding processing blocks. The resultant output sequence shall be stored and re-injected into the TE via Point C. The TE shall process the stream through its speech and channel encoding processing blocks to produce the resultant output stream which shall be received by the TSS at Point D. The resultant output sequence shall be bit-by-bit exactly the same as the pre-defined output sequence SEQ4_72.OUT.

7.4.3 Method of test

7.4.3.1 Initial conditions

Encryption and frame stealing mechanisms shall be de-activated.

7.4.3.2 Procedure

- a) The TSS shall establish the air-interface bit, slot and frame synchronization with the TE under test. The TSS shall also establish the PCM port bit and frame synchronization with the TE under test.
- b) The TSS shall communicate with the TE to set the TE into speech codec conformance test mode on Option 2.
- c) The homing sequence SEQ2_72.HOM shall be transmitted from the TSS to the TE from Point A to reset the speech decoder.
- d) The test sequence SEQ1_72.IN shall be transmitted from the TSS to the TE from Point A.
- e) The TE shall produce an output sequence TE2_128.PCM and received by the TSS at Point B. This shall be achieved by:
 - channel decoding SEQ1_72.IN according to ETS 300 395-2 [3], clause 6 to give TE1_46.CHD;
 - speech decoding TE1_46.CHD according to ETS 300 395-2 [3], clause 4 to give TE2_128.PCM.
- f) The TSS shall receive and store the TE sequence TE2_128.PCM.

NOTE 1: The above up to stage f) effectively tests the TETRA speech decoder.
- g) The homing sequence SEQ3_128.HOM shall be transmitted from the TSS to the TE from Point C to reset the speech encoder.
- h) The stored sequence TE2_128.PCM shall be transmitted from the TSS to the TE from Point C.
- i) The TE shall produce an output sequence TE4_72.OUT. This shall be achieved by:
 - speech encoding TE2_128.PCM according to ETS 300 395-2 [3], clause 4 to give TE3_46.SPE.
 - channel encoding TE3_46.SPE according to ETS 300 395-2 [3], clause 5 to give TE4_72.OUT.

NOTE 2: The stages from g) to i) effectively tests the TETRA speech encoder.
- j) The TSS shall receive the output sequence TE4_72.OUT at Point D.
- k) The TSS shall compare the received sequence TE4_72.OUT against the pre-defined reference sequence SEQ4_72.OUT.

7.4.3.3 Test requirements

In order to pass the TETRA codec conformance test, the bit stream output from the TE under test, TE4_72.OUT shall be bit-by-bit exactly the same as the sequence given by the file SEQ4_72.OUT.

Annex A (normative): TCH/S test cases and conditions for BS and MS receivers

This annex contains receiver test tables for Tetra BS and MS for V+D equipment supporting speech traffic channels TCH/S. The tables list test type, channel type, test limits, minimum sample size and signal levels.

NOTE: In the following tables, a sample is defined as:

- a bit in case of BER measurements;
- a message (i.e. a slot) in case of MER measurements.

Test specifications and limits identified with symbol "B" indicate a BER measurement while those identified with symbol "M" are MER measurements. Test tables for PUEM measurements are given at the end of the annex.

Table A.1: Test conditions for MS receiver V+D, class A

| Test type | Channel type | Prop. Condition | Signal level (dBm) | Codec bit class | Spec. BER "B" or MER "M" (%) | Test limit BER "B" or MER "M" (%) | Min. samples |
|-------------|--------------|-----------------|--------------------|-----------------|------------------------------|-----------------------------------|--------------|
| Sensitivity | 15 | Static | -112 | class 0 | 3,5 ^B | 4,27 ^B | 30 000 |
| Sensitivity | 15 | Static | -112 | class 1 | 0,15 ^B | 0,23 ^B | 30 000 |
| Sensitivity | 15 | Static | -112 | class 2 | 0,018 ^M | 0,045 ^M | 30 000 |
| Sensitivity | 15 | HT200 | -103 | class 2 | 2,6 ^M | 2,9 ^M | 11 000 |

Table A.2: Test conditions for MS receiver V+D, class B

| Test type | Channel type | Prop. Condition | Signal level (dBm) | Codec bit class | Spec. BER "B" or MER "M" (%) | Test limit BER "B" or MER "M" (%) | Min. samples |
|-------------|--------------|-----------------|--------------------|-----------------|------------------------------|-----------------------------------|--------------|
| Sensitivity | 15 | Static | -112 | class 0 | 4 ^B | 4,88 ^B | 30 000 |
| Sensitivity | 15 | Static | -112 | class 1 | 0,15 ^B | 0,23 ^B | 30 000 |
| Sensitivity | 15 | Static | -112 | class 2 | 0,018 ^M | 0,045 ^M | 30 000 |
| Sensitivity | 15 | TU50 | -103 | class 2 | 2,2 ^M | 2,5 ^M | 11 000 |

Table A.3: Test conditions for MS receiver V+D, class E

| Test type | Channel type | Prop. Condition | Signal level (dBm) | Codec bit class | Spec. BER "B" or MER "M" (%) | Test limit BER "B" or MER "M" (%) | Min. samples |
|-------------|--------------|-----------------|--------------------|-----------------|------------------------------|-----------------------------------|--------------|
| Sensitivity | 15 | Static | -112 | class 0 | 3,5 ^B | 4,27 ^B | 30 000 |
| Sensitivity | 15 | Static | -112 | class 1 | 0,15 ^B | 0,23 ^B | 30 000 |
| Sensitivity | 15 | Static | -112 | class 2 | 0,018 ^M | 0,045 ^M | 30 000 |
| Sensitivity | 15 | EQ200 | -103 | class 2 | 6,8 ^M | 7,6 ^M | 5 600 |

Table A.4: Test conditions for BS receiver V+D, class A

| Test type | Channel type | Prop. Condition | Signal level (dBm) | Codec bit class | Spec. BER "B" or MER "M" (%) | Test limit BER "B" or MER "M" (%) | Min. samples |
|-------------|--------------|-----------------|--------------------|-----------------|------------------------------|-----------------------------------|--------------|
| Sensitivity | 16 | Static | -115 | class 0 | 3 ^B | 3,66 ^B | 30 000 |
| Sensitivity | 16 | Static | -115 | class 1 | 0,15 ^B | 0,23 ^B | 30 000 |
| Sensitivity | 16 | Static | -115 | class 2 | 0,012 ^M | 0,045 ^M | 30 000 |
| Sensitivity | 16 | HT200 | -106 | class 2 | 2,7 ^M | 3,0 ^M | 9 500 |

Table A.5: Test conditions for BS receiver V+D, class B

| Test type | Channel type | Prop. Condition | Signal level (dBm) | Codec bit class | Spec. BER "B" or MER "M" (%) | Test limit BER "B" or MER "M" (%) | Min. samples |
|-------------|--------------|-----------------|--------------------|-----------------|------------------------------|-----------------------------------|--------------|
| Sensitivity | 16 | Static | -115 | class 0 | 4 ^B | 4,88 ^B | 30 000 |
| Sensitivity | 16 | Static | -115 | class 1 | 0,15 ^B | 0,23 ^B | 30 000 |
| Sensitivity | 16 | Static | -115 | class 2 | 0,02 ^M | 0,045 ^M | 30 000 |
| Sensitivity | 16 | TU50 | -106 | class 2 | 2,2 ^M | 2,5 ^M | 11 600 |

Table A.6: PUEM test table

| Equip. type | Channel type | Prop. Condition | Signal level (dBm) | Codec bit class | Spec PUEM (%) | Test limit PUEM (%) | Max. No. Errors | Min. samples |
|-------------|--------------|-----------------|--------------------|-----------------|---------------|---------------------|-----------------|--------------|
| MS | 15 | static | -112 | class 2 | 0,01 | 0,028 | 8 | 30 000 |
| BS | 16 | static | -115 | class 2 | 0,01 | 0,028 | 8 | 30 000 |

Annex B (normative): Codec conformance test vector sequences

The input and output conformance test files for testing the TETRA speech encoder and decoder are supplied as electronic files attached to this ETS.

Table B.1 gives the size and format of the input and output conformance test files for testing the TETRA speech encoder and decoder with the following important notes.

- NOTE 1: For the case of the TCH/S and the un-coded ACELP files each information bit is encoded using a 16-bit word, with only the least significant bit in the word being used and the rest of the word zero filled.
- NOTE 2: The standard channel coder output as specified in ETS 300 395-2 [3], clause 8 was designed for testing with an error insertion device which is unsuitable for real practical implementations. Hence, for the conformance testing the true TCH/S output shall be used, i.e. 432 type-4 bits per TETRA slot which corresponds to 60 ms worth of speech.
- NOTE 3: For simulation purposes as well as for error insertion purposes, the output format used in ETS 300 395-2 [3], clause 8 may be of interest. Therefore both formats are provided. The files seq1_an.in, seq4_an.out and seq2_an.hom are versions of seq1_72.in, seq4_72.out and seq2_72.hom compatible with the C code specified in ETS 300 395-2 [3], clause 8. The conversion program fromansi.c converts files seq1_an.in, seq4_an.out and seq2_an.hom to files seq1_72.in, seq4_72.out and seq2_72.hom. The program fromansi.c has to be compiled with the files tetra_op.c and sub_cd.c supplied as part of the bit exact C description (ETS 300 395-2 [3], clause 8). The conversion program toansi.c converts files seq1_72.in, seq4_72.out and seq2_72.hom to files seq1_an.in, seq4_an.out and seq2_an.hom. The program toansi.c should be compiled with the files tetra_op.c and sub_cc.c supplied as part of the bit exact C description (ETS 300 395-2 [3], clause 8).

Table B.1: File size and format for conformance test files

| File name | Format | Size / bytes |
|--------------|--|--------------|
| seq1_72.in | TCH/S | 2 306 880 |
| seq2_72.hom | TCH/S | 1 728 |
| seq3_128.hom | 8 kHz with 16-bits per sample according to ETS 300 395-2 [3], clause 8 | 2 400 |
| seq4_72.out | TCH/S | 2 306 880 |

Annex C (informative): Codec reference test vector sequences

Table C.1 provides, as a reference, files to facilitate the implementation of the TE and TSS by TETRA manufacturers.

The files are supplied as electronic files attached to this ETS.

Table C.1: File size and format for reference test files

| File name | Format | Size / bytes |
|------------------|--|---------------------|
| te1_46.chd | ACELP (137+1) bits per 30 ms according to ETS 300 395-2 [3], clause 8 | 1 473 840 |
| te2_128.pcm | 8 kHz with 16-bits per sample according to ETS 300 395-2 [3], clause 8 | 2 563 200 |
| te3_46.spe | ACELP (137+1) bits per 30 ms according to ETS 300 395-2 [3], clause 8 | 1 473 840 |

NOTE: For the case of the uncoded ACELP files each information bit is encoded using a 16-bit word, with only the least significant bit in the word being used and the rest of the word zero filled.

History

| Document history | | | |
|------------------|----------------|---------|--------------------------|
| May 1996 | Public Enquiry | PE 106: | 1996-05-20 to 1996-09-13 |
| February 1997 | Vote | V 9717: | 1997-02-25 to 1997-04-25 |
| May 1997 | First Edition | | |
| | | | |
| | | | |