



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 545

March 1995

Source: ETSI TC-SMG

Reference: DE/SMG-030384P

ICS: 33.060.30

Key words: European digital cellular telecommunications system, Global System for Mobile communications (GSM)

**European digital cellular telecommunications system (Phase 2);
Multi Party (MPTY) supplementary services - Stage 2
(GSM 03.84)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1995. All rights reserved.

Contents

Foreword	5
0 General	7
0.1 Scope	7
0.2 Normative references	7
0.3 Definitions and abbreviations	7
1 Multi party service (MPTY)	8
1.1 Functions and information flows	8
1.2 Information stored in the HLR	25
1.3 State transition model	25
1.4 Transfer of information from HLR to VLR	25
1.5 Information stored in the VLR	25
1.6 Handover	25
1.7 Simultaneous use of multi party operations	25
History	26

Blank page

Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee (TC) of the European Telecommunications Standards Institute (ETSI).

This ETS defines the stage 2 of the Multi Party (MPTY) supplementary services for the European digital cellular telecommunications system (Phase 2).

This ETS corresponds to GSM Technical Specification (GSM-TS) GSM 03.84 version 4.4.1.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE rules.

Reference is made within this ETS to GSM-TSs (NOTE).

NOTE: TC-SMG has produced documents which give the technical specifications for the implementation of the European digital cellular telecommunications system. Historically, these documents have been identified as GSM Technical Specifications (GSM-TSs). These TSs may have subsequently become I-ETSs (Phase 1), or ETSs (Phase 2), whilst others may become ETSI Technical Reports (ETRs). GSM-TSs are, for editorial reasons, still referred to in current GSM ETSs.

Blank page

0 General

0.1 Scope

This specification gives the stage 2 description of the multi party supplementary services.

Only one multi party supplementary service has been defined, this is the multi party service (MPTY), and is described in section 1.

0.2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 100): "European digital cellular telecommunications system (Phase 2); "Abbreviations and acronyms".
- [2] GSM 03.11 (ETS 300 529): "European digital cellular telecommunications system (Phase 2); Technical realization of supplementary services".
- [3] GSM 03.83 (ETS 300 544): "European digital cellular telecommunications system (Phase 2); Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 2".

0.3 Definitions and abbreviations

Abbreviations used in this specification are listed in GSM 01.04.

1 Multi party service (MPTY)

1.1 Functions and information flows

The following Mobile Additional Function has been identified for multi party service:

MAF026

Multi party service related authorizations examination

The ability of a PLMN component to determine the authorizations relating to multi party service. See figure 2.1.

Location: VLR

The overall SDL-diagram of multi party service is shown in figure 1.2.

This overall SDL-diagram represents the network as a whole. The overall SDL-diagram shows the status of the service as perceived by the served mobile subscriber, as well as the status as perceived by any of the other parties. Beside this, the overall SDL-diagram shows the actions to be taken by the network and the information provided by the network to the users.

Within the authorization examinations diagram, the messages shown to and from the left are to and from the VLR.

Within the overall SDL diagram, messages to and from the served mobile subscriber are indicated to and from the left, whereas messages to and from remote parties are indicated to and from the right.

The information flow for multi party service is shown in figure 1.3.

In the information flow it is assumed that the served subscriber is a mobile subscriber and that the other parties are all fixed ISDN subscribers. For the purposes of the information flow diagrams it is assumed that there are only two remote parties. Where there are more than two remote parties, signals to any party connected to the MPTY bridge shall apply to all other parties connected to the MPTY bridge, except where a single remote party is to be selected for a private communication.

As a consequence of this assumption, after the MPTY is split (to establish a private communication) it only contains one remote party. However, the end state for disconnection of or by that remaining remote party is shown as A-B ACTIVE / MPTY HELD. This is to indicate that the disconnection by a single remote party will not necessarily cause the MPTY call to be released. This will only happen when that remote party is the only remaining party in the MPTY call.

Party A is the subscriber controlling the MPTY call (served mobile subscriber). Party B is the first remote party called. Party C is the second remote party called.

Remote parties are disconnected by the generic disconnect/release procedure. Any scenario requiring disconnection of remote parties shown in the SDL diagrams but not explicitly shown in the flow diagrams shall follow the procedure shown in the flow diagrams for similar scenarios.

Functions to be performed by the fixed ISDN (for example hold authorizations examination) are not shown in the information flow; only the functions to be performed by the PLMN are shown.

It is assumed that the multi party bridge is located in the MSC.

In the SDL-diagrams a two dimensional state in conjunction with call hold is used: (active,hold request).

- The first dimension is a normal basic call state "active".
- The second dimension is "hold request" (abbreviated hold req) meaning that a request has been made for the hold function.

To avoid having two calls on hold at the same time the reception of the retrieve request is supervised by timer T as defined in TS GSM 03.83.

Note that while the multi party is on hold, the remote parties can continue to communicate with each other.

Figure 1.1

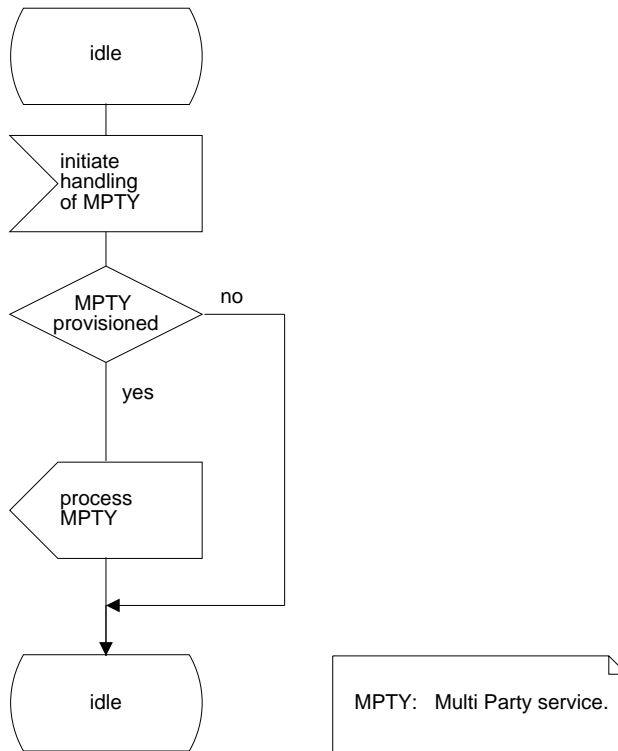


Figure 1.1: MAF026 Multi party service related authorisations examination (VLR)

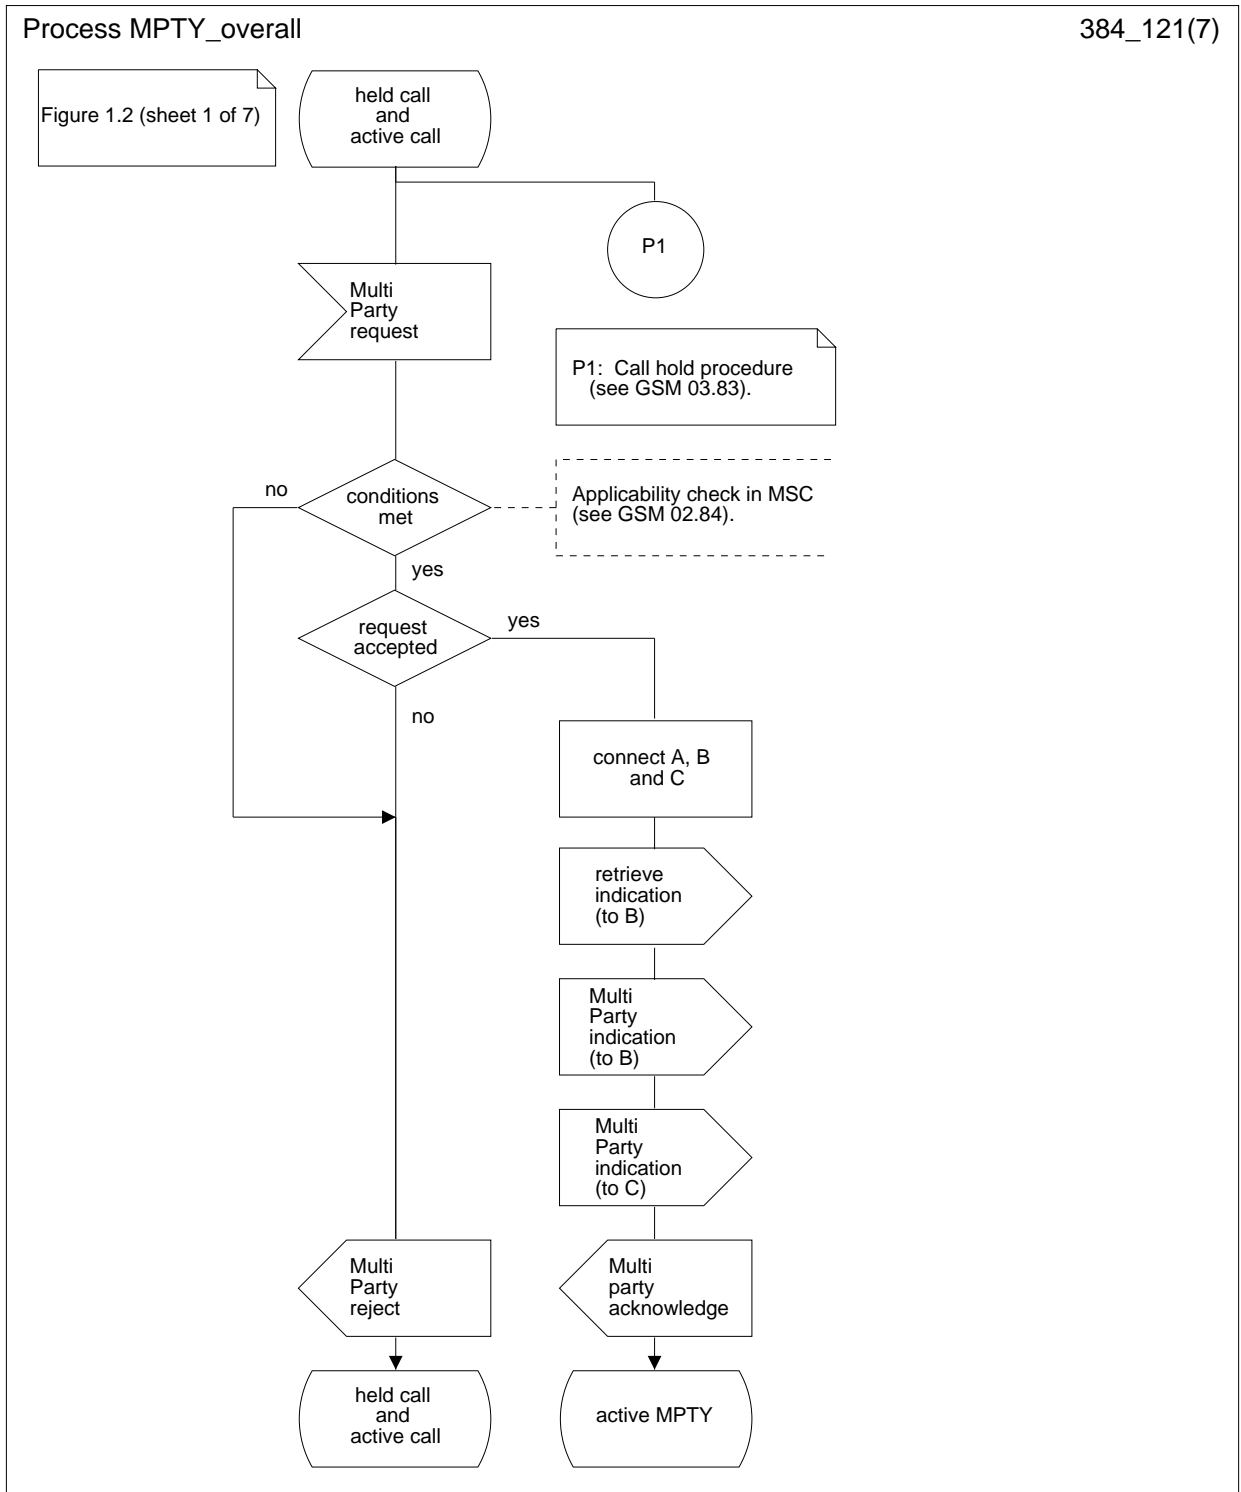


Figure 1.2 (sheet 1 of 7): Overall SDL diagram of Multi party service

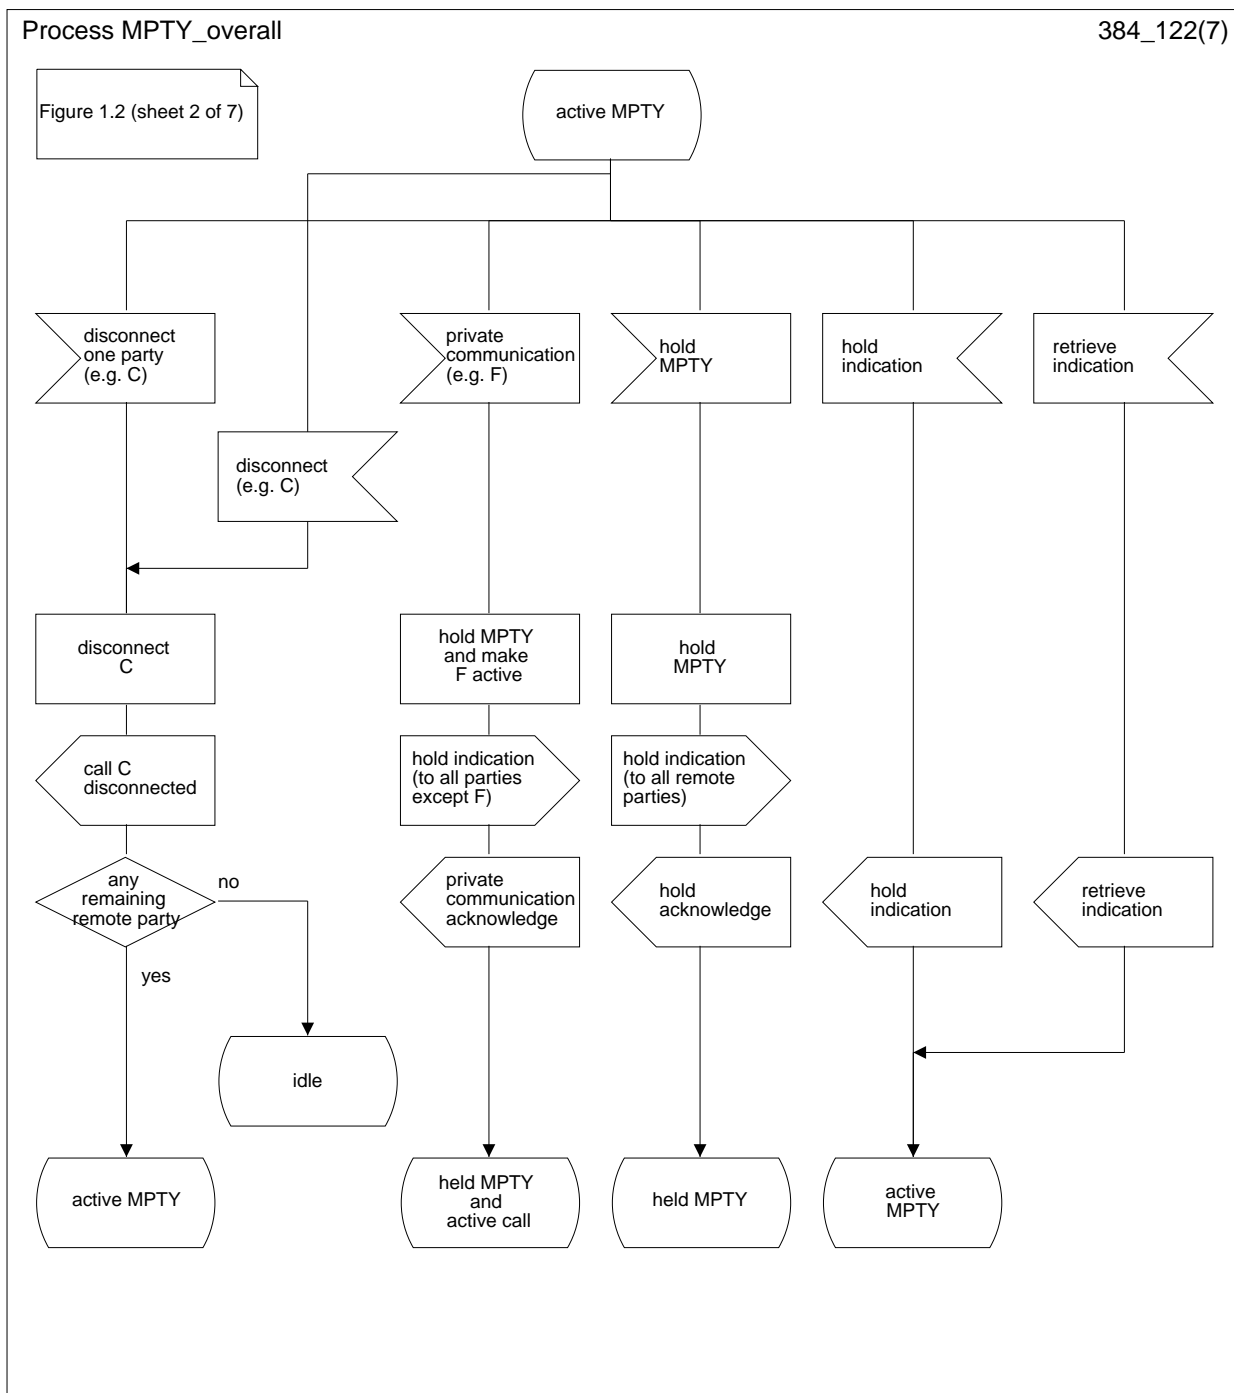


Figure 1.2 (sheet 2 of 7): Overall SDL diagram of Multi party service

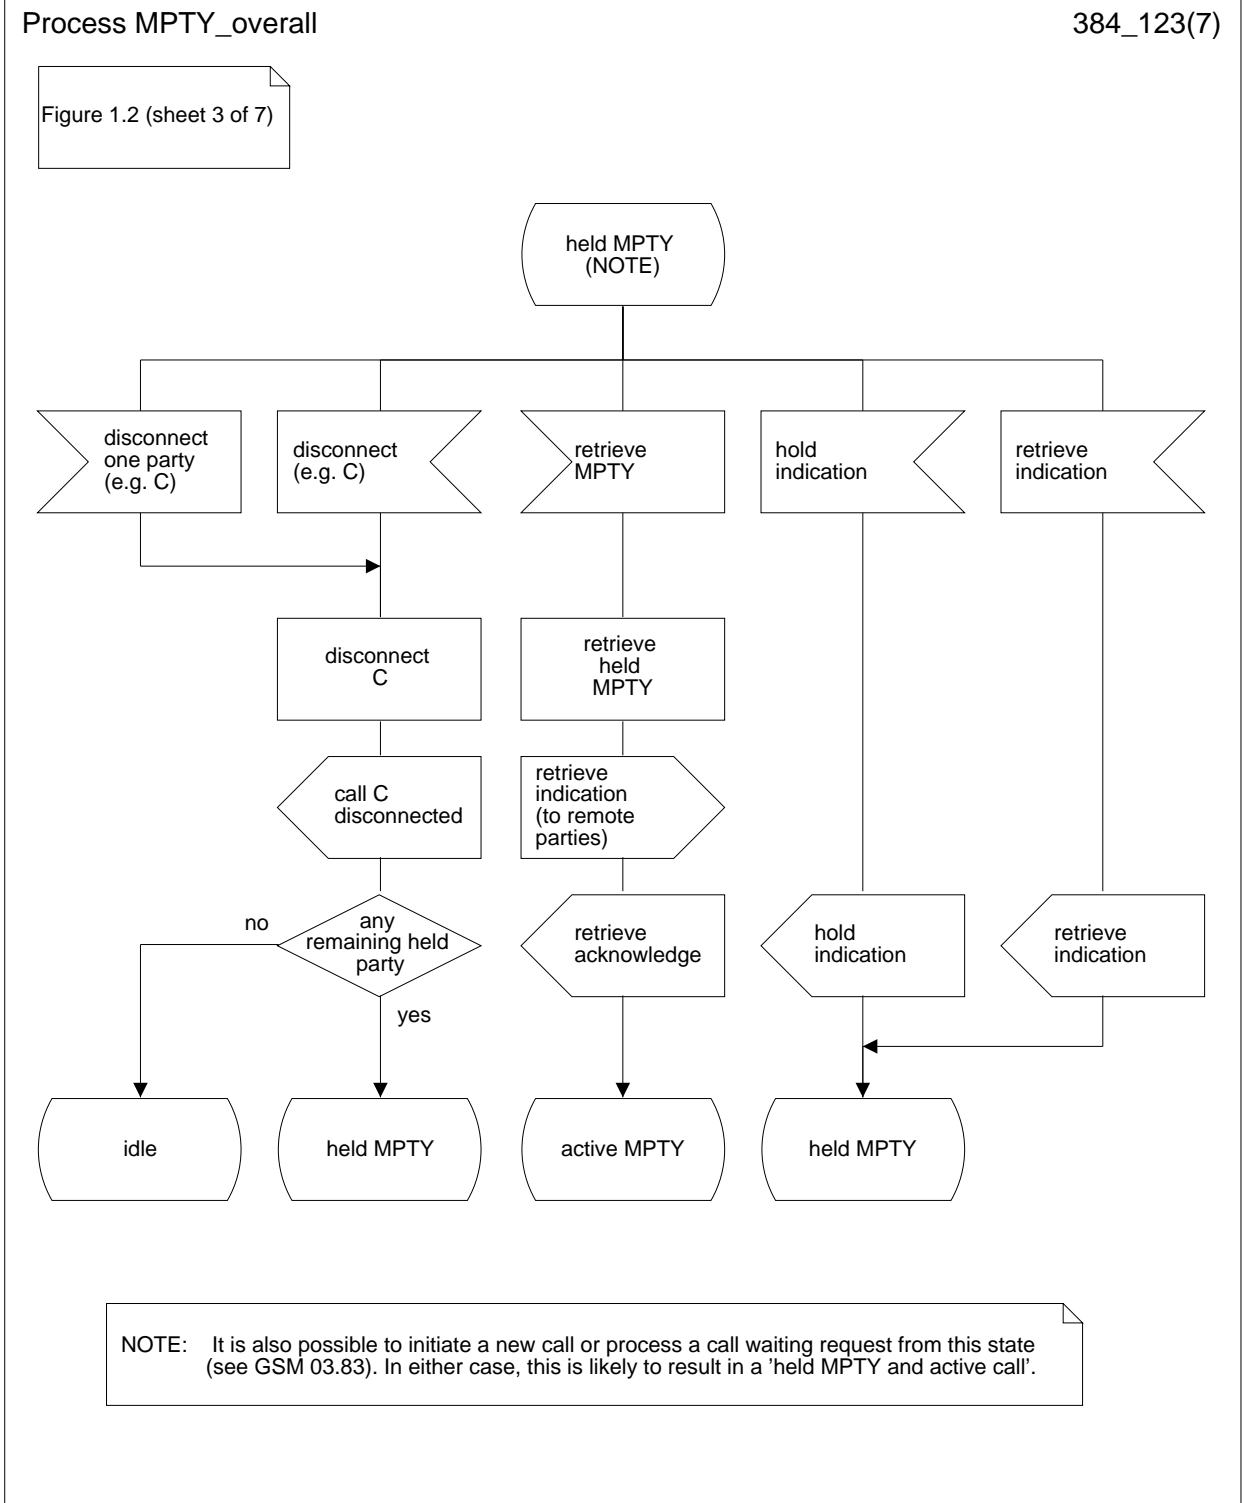


Figure 1.2 (sheet 3 of 7): Overall SDL diagram of Multi party service

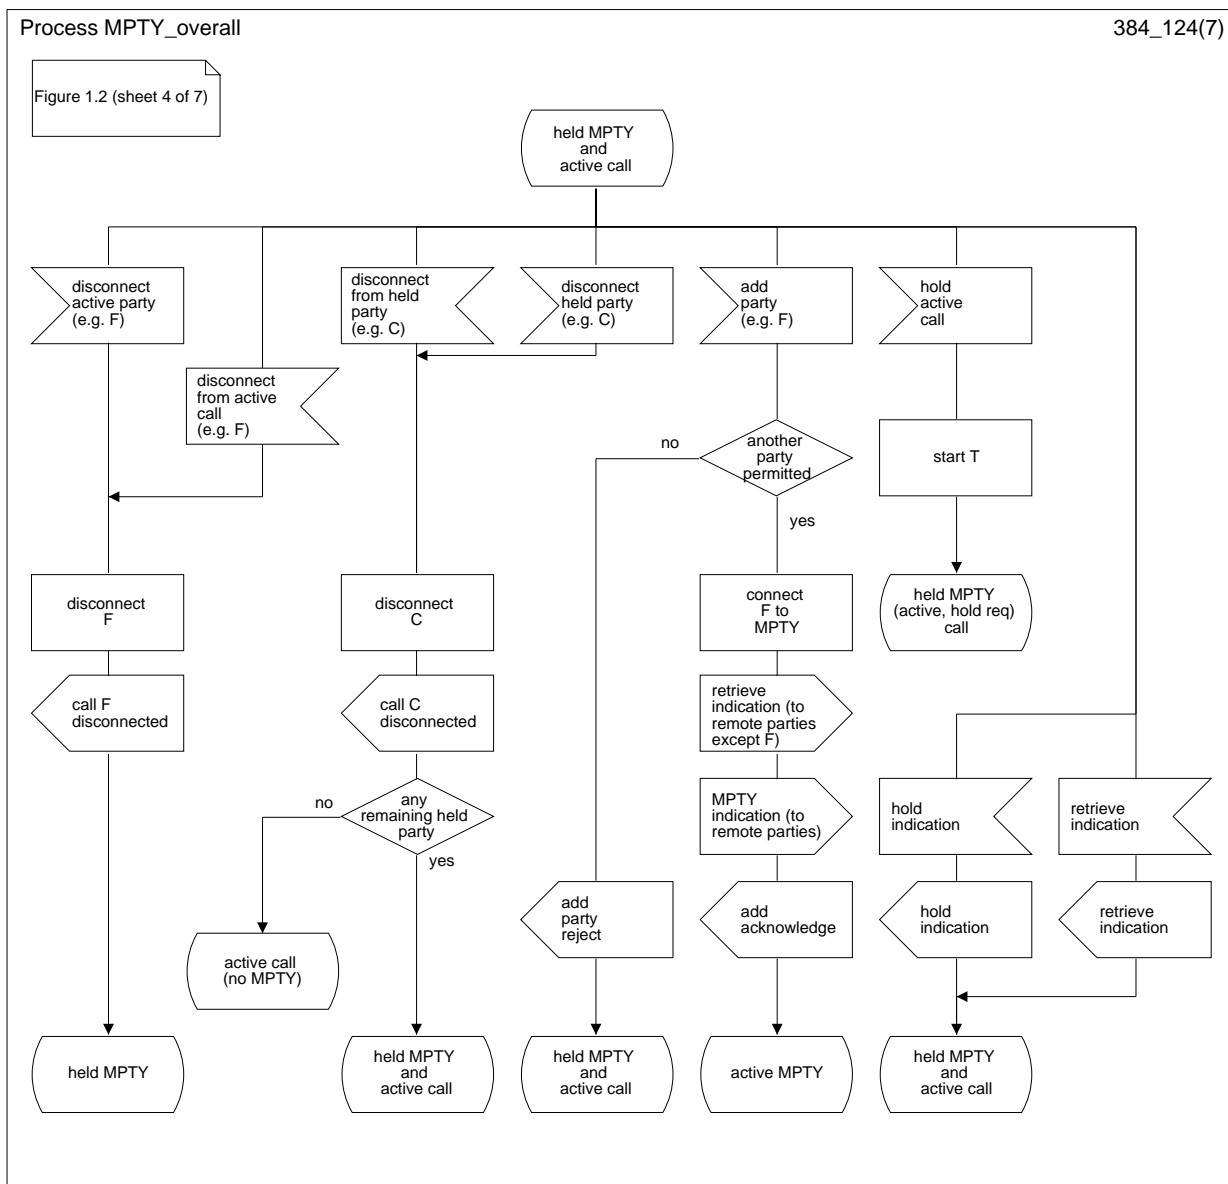


Figure 1.2 (sheet 4 of 7): Overall SDL diagram of Multi party service

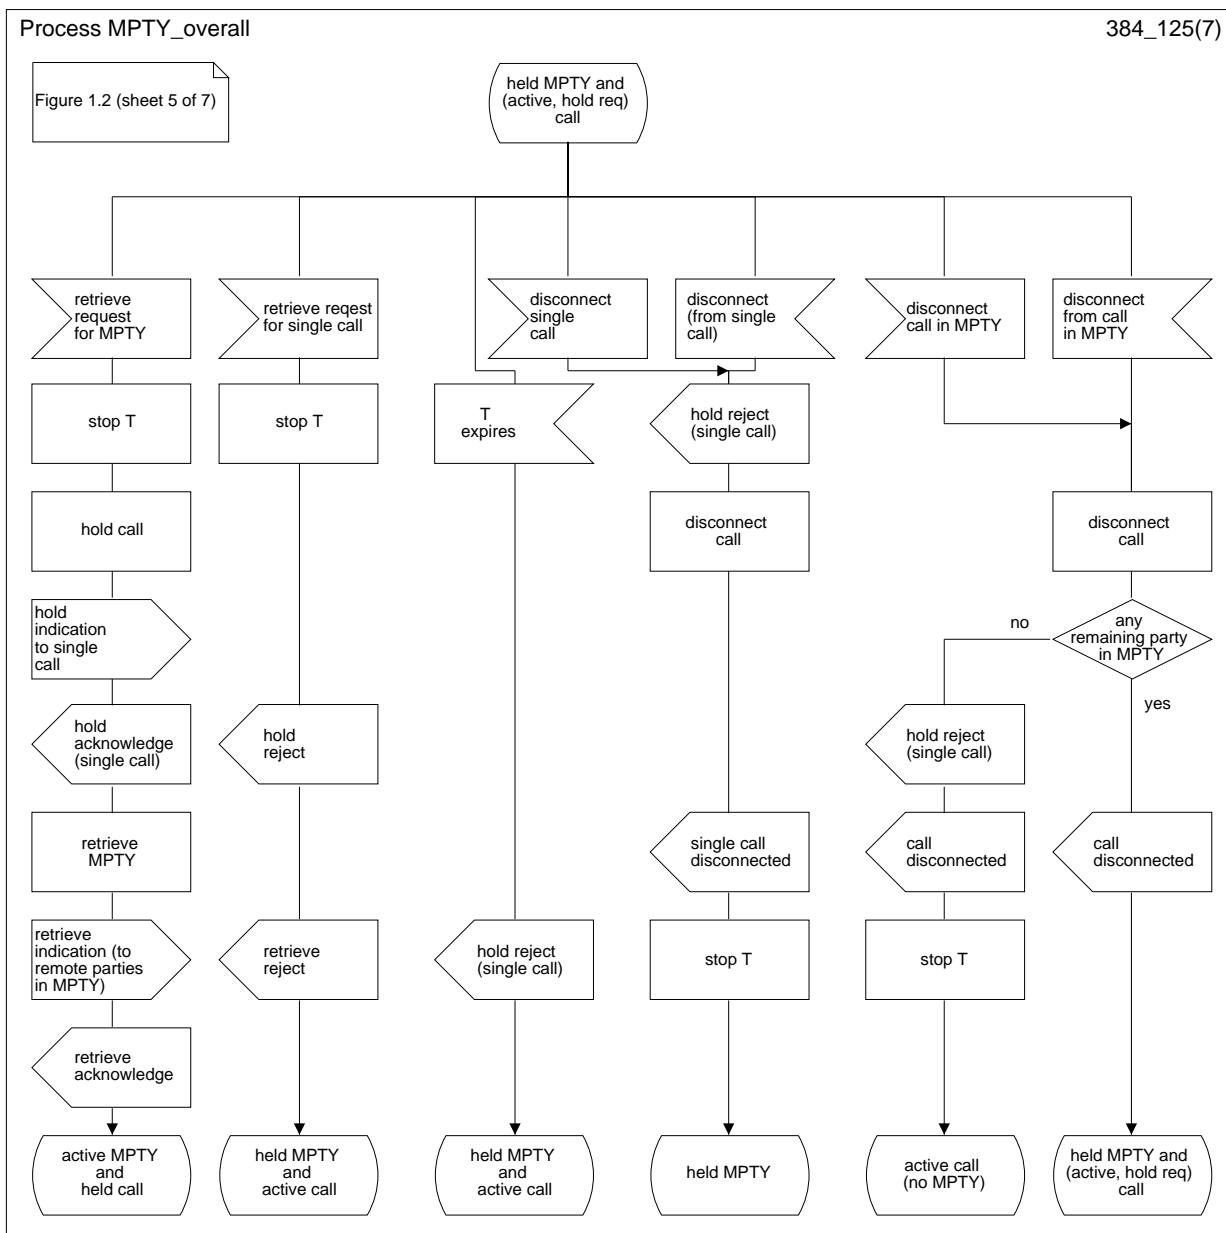


Figure 1.2 (sheet 5 of 7): Overall SDL diagram of Multi party service

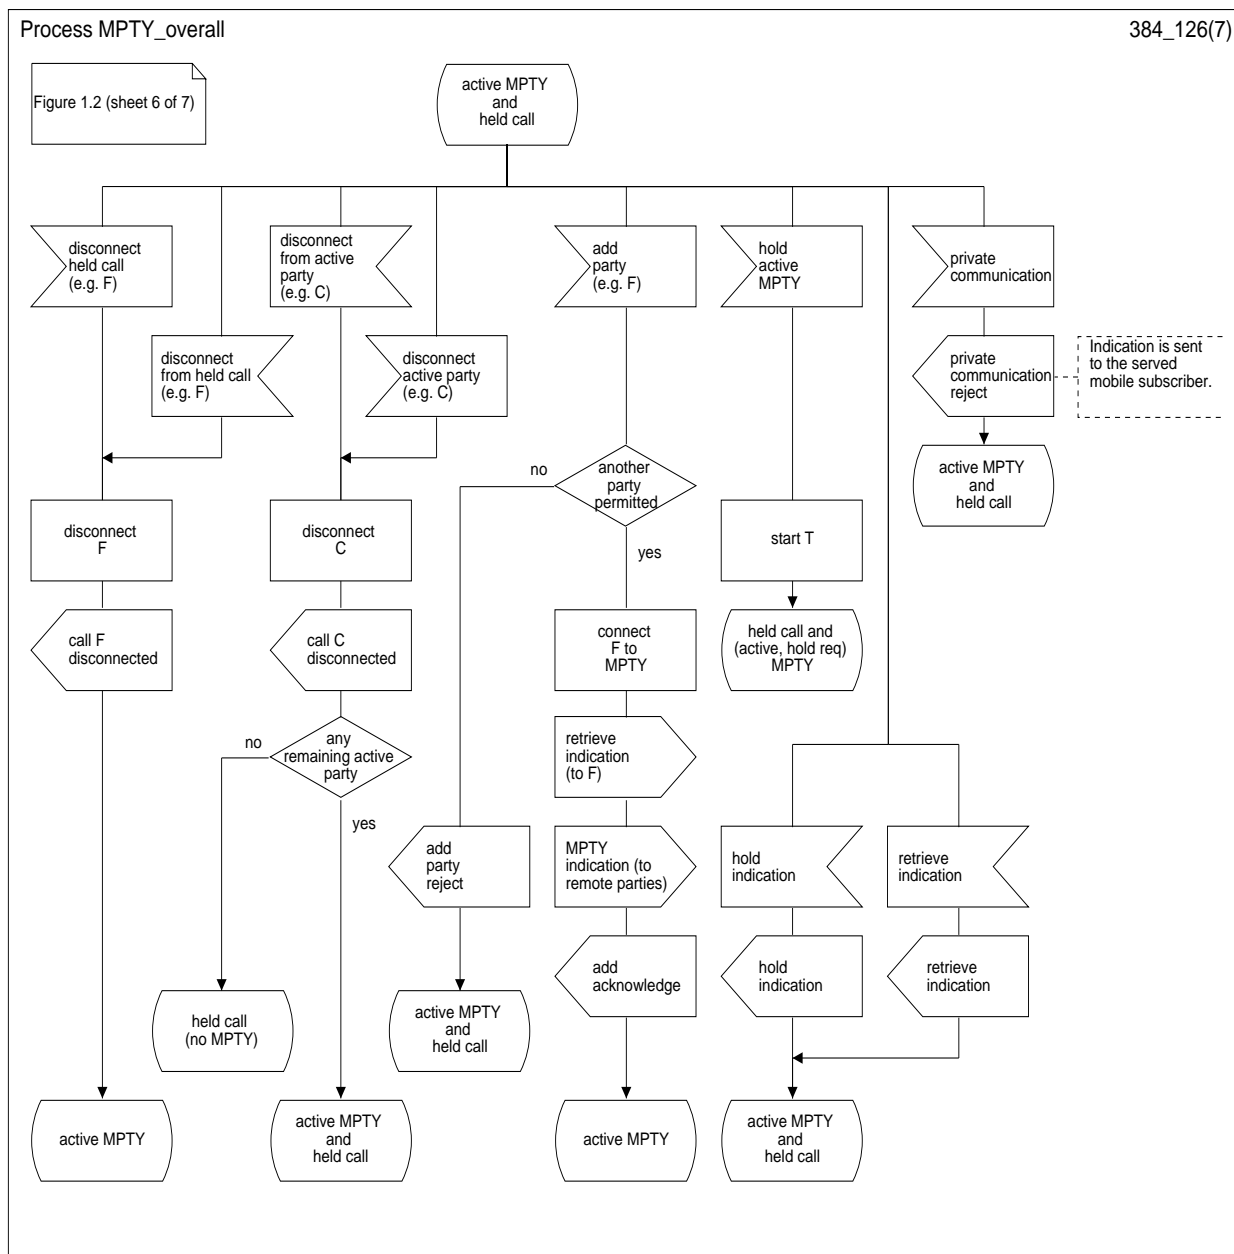


Figure 1.2 (sheet 6 of 7): Overall SDL diagram of Multi party service

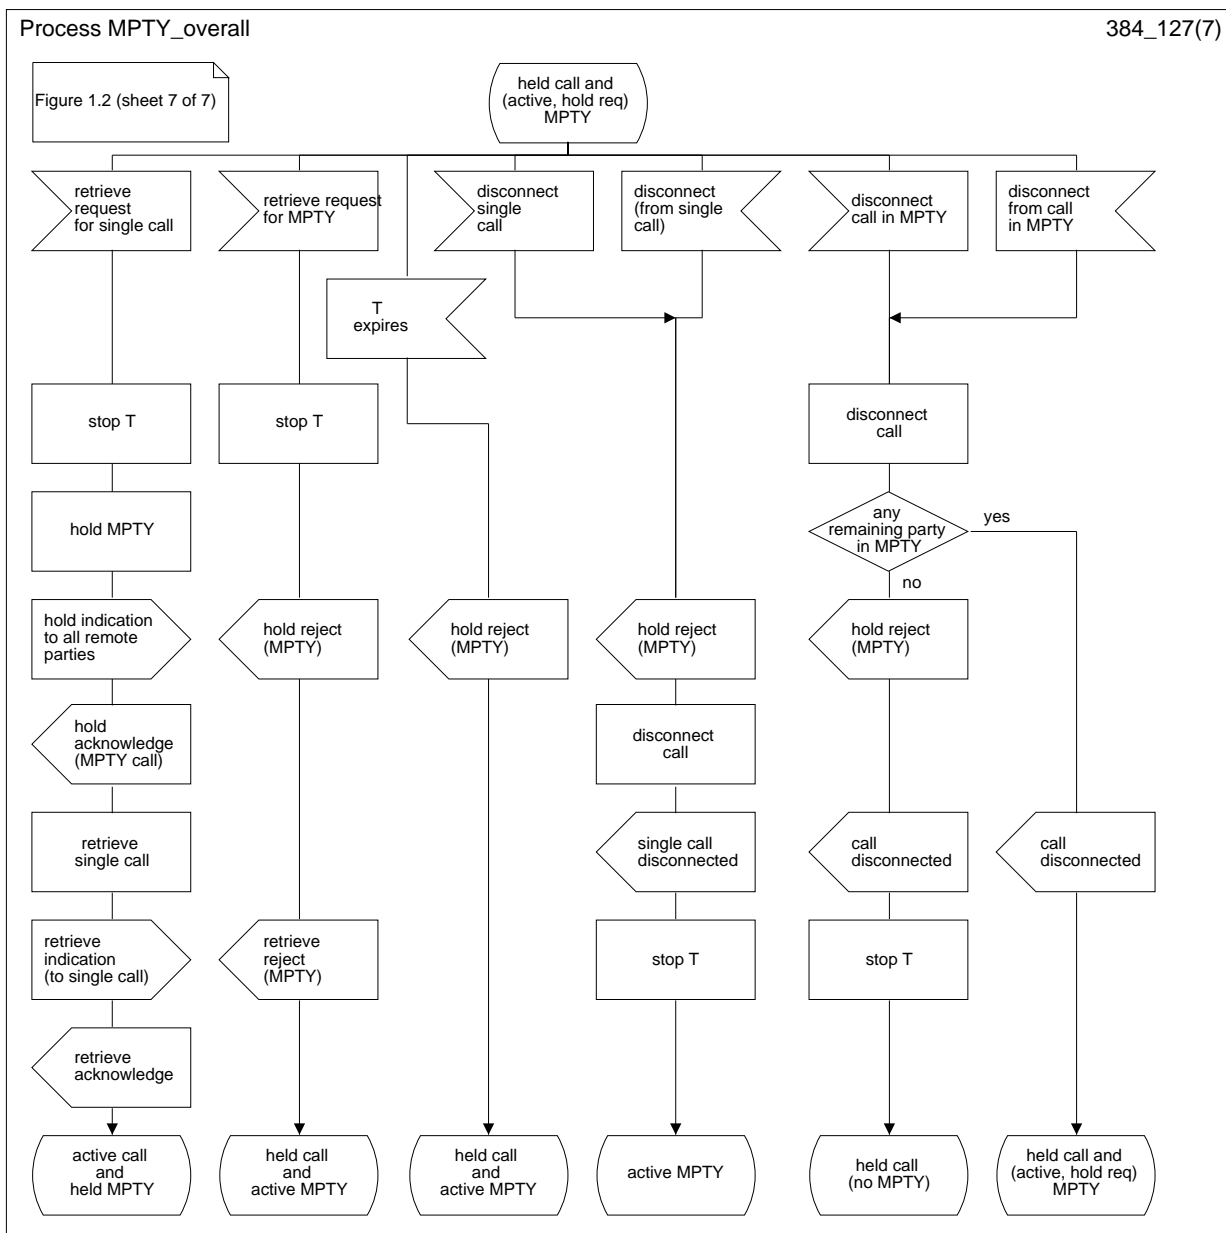


Figure 1.2 (sheet 7 of 7): Overall SDL diagram of Multi party service

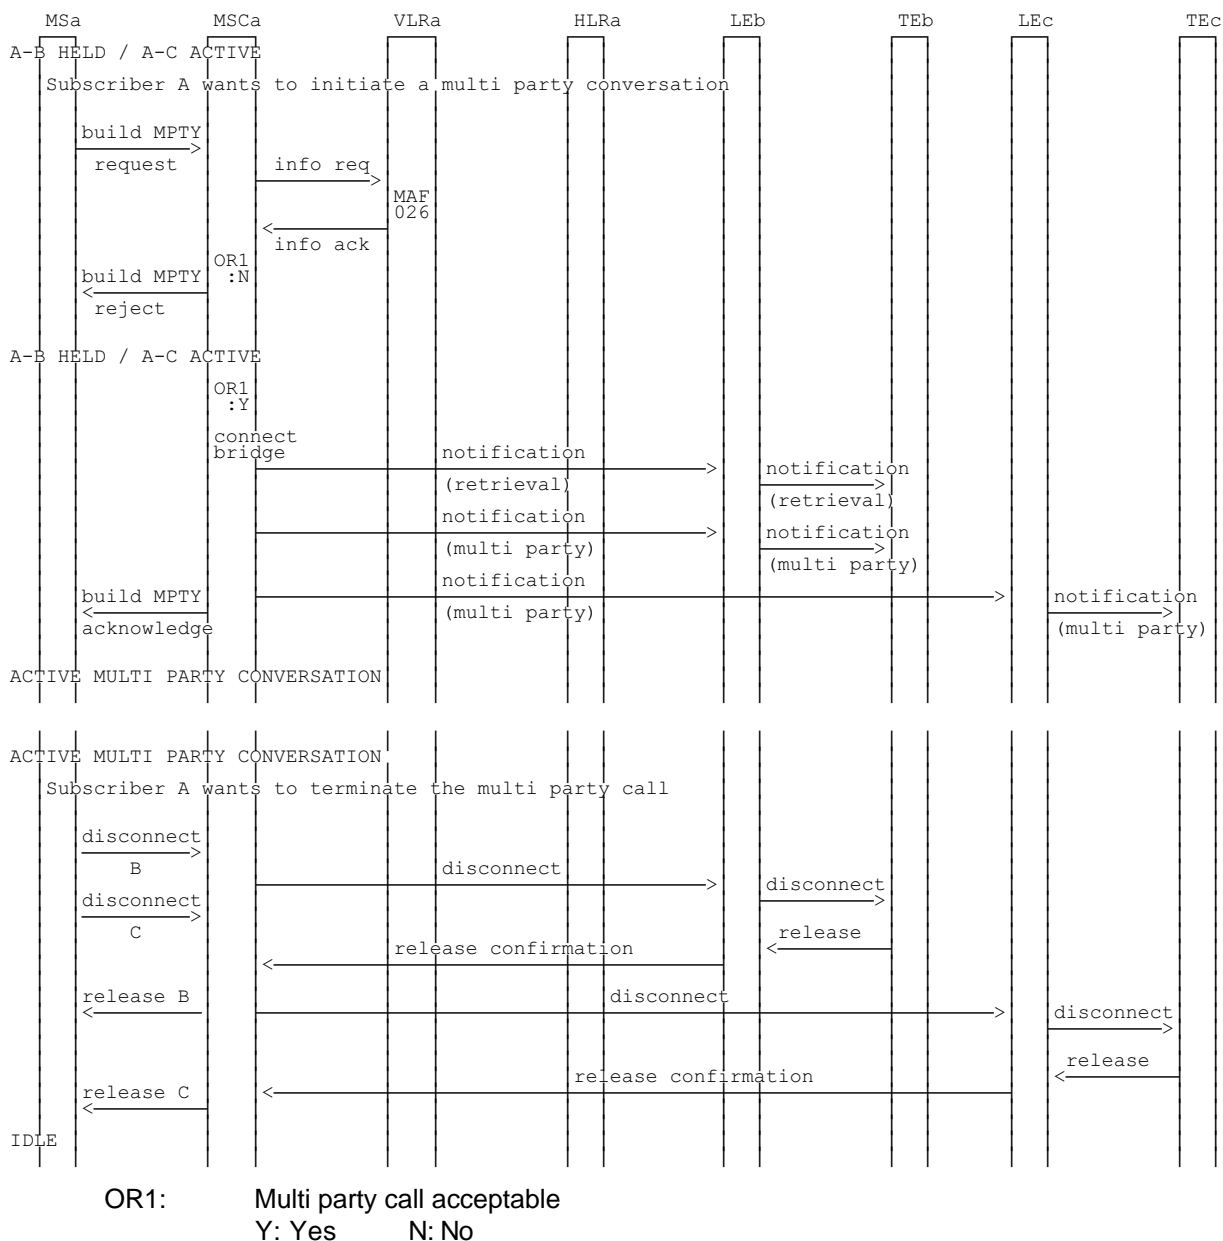


Figure 1.3 (sheet 1 of 7): Information flow for multi party service

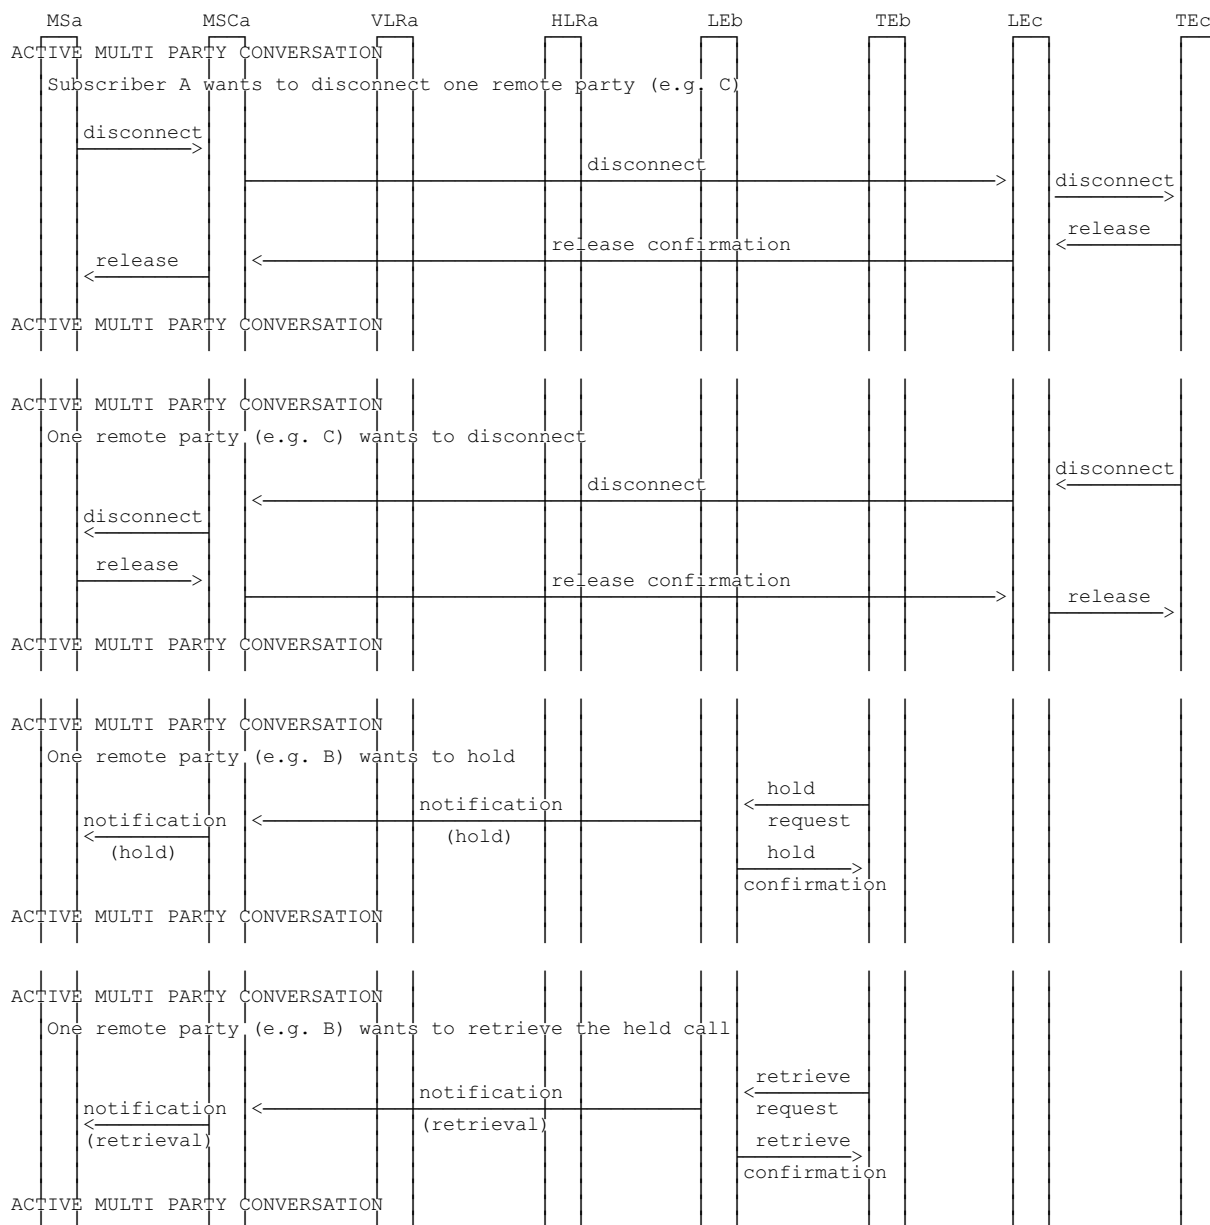


Figure 1.3 (sheet 2 of 7): Information flow for multi party service

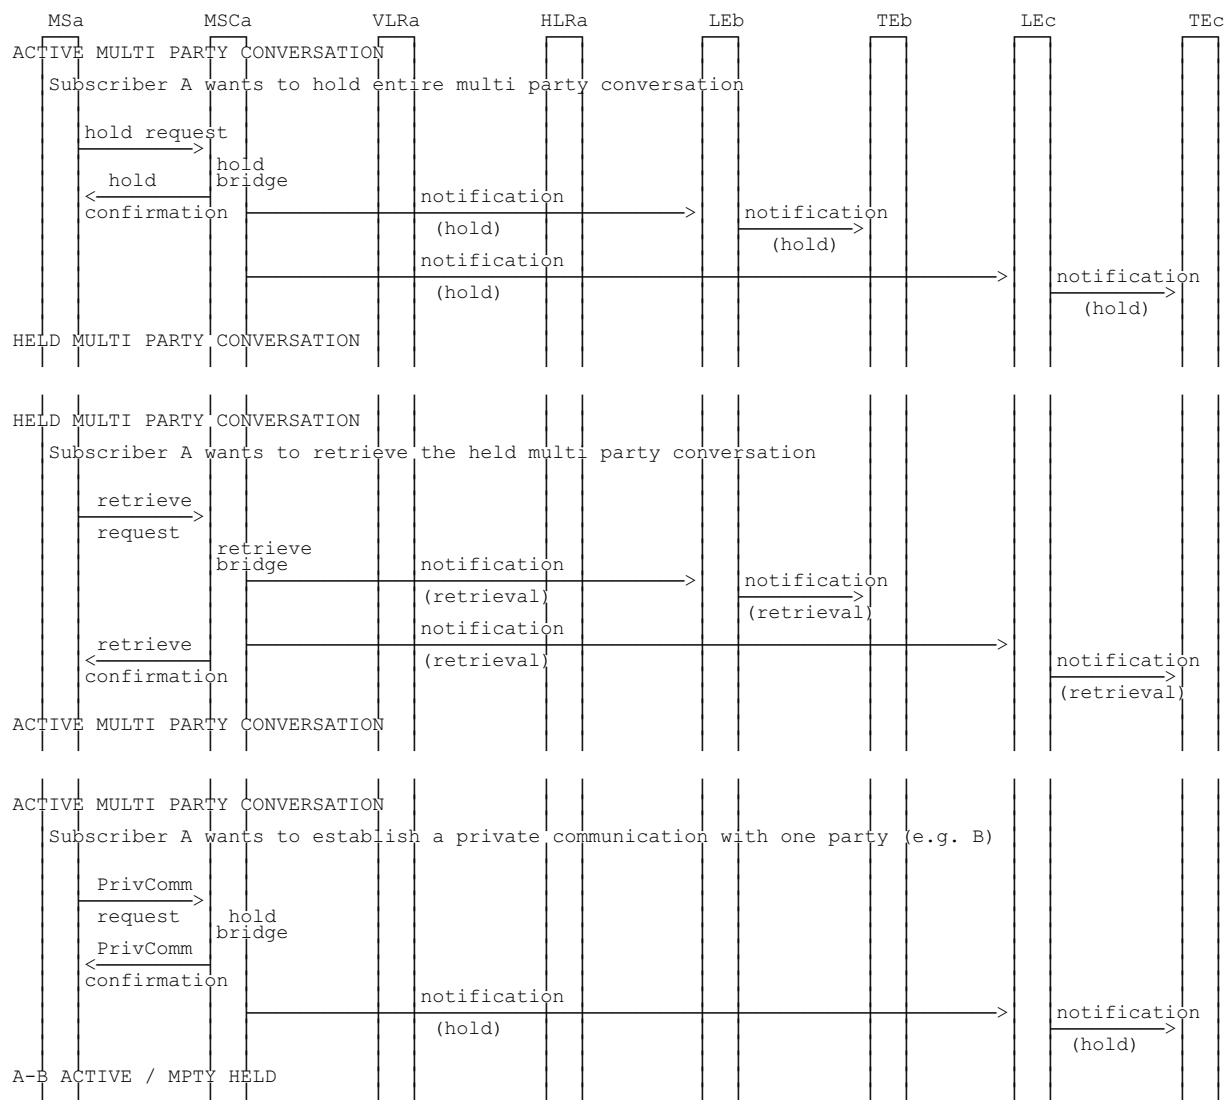


Figure 1.3 (sheet 3 of 7): Information flow for multi party service

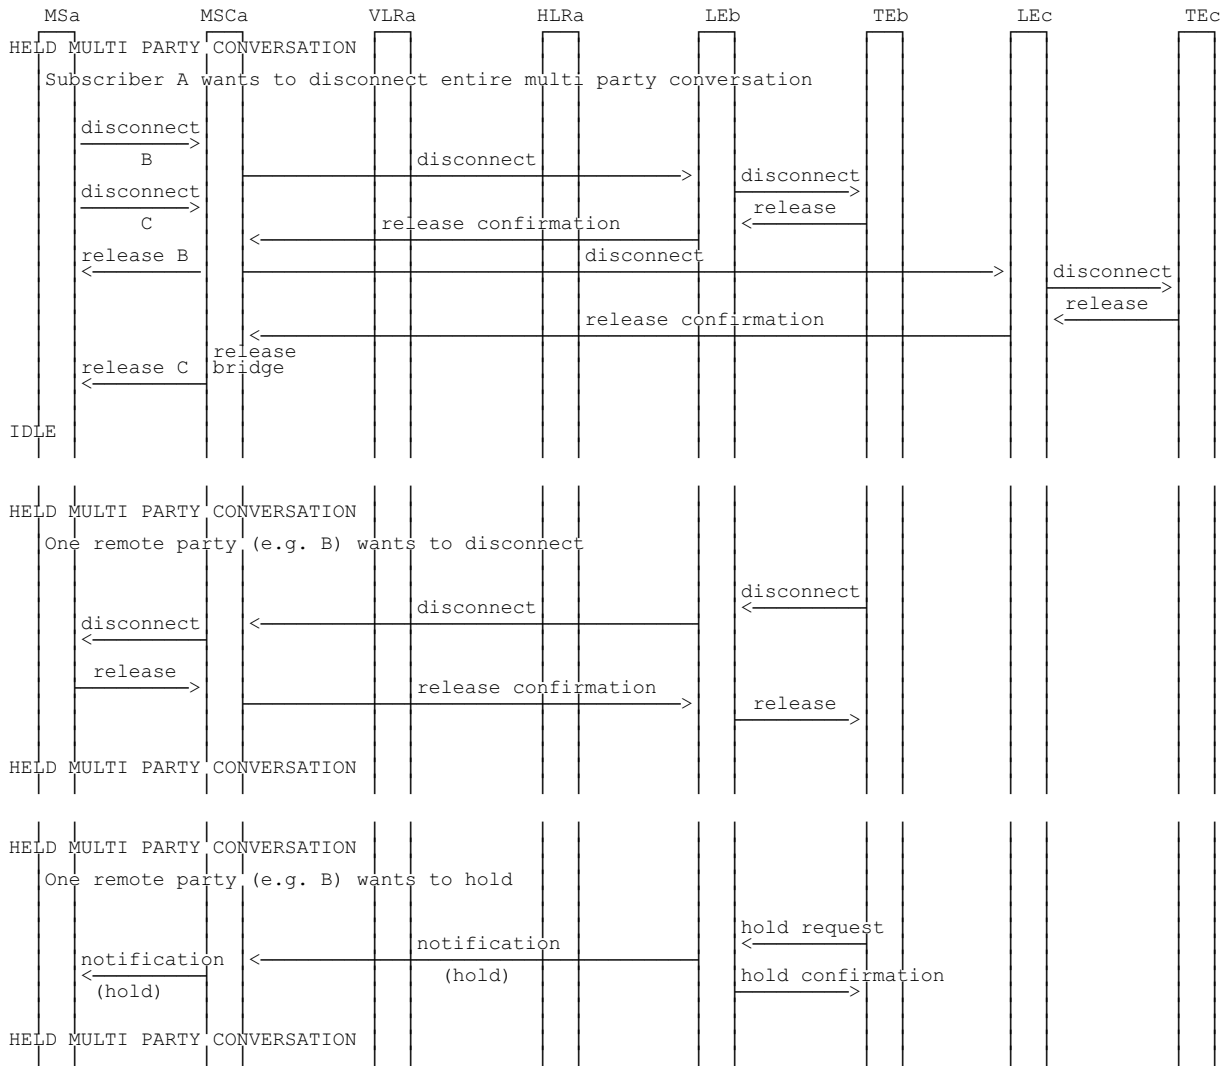


Figure 1.3 (sheet 4 of 7): Information flow for multi party service


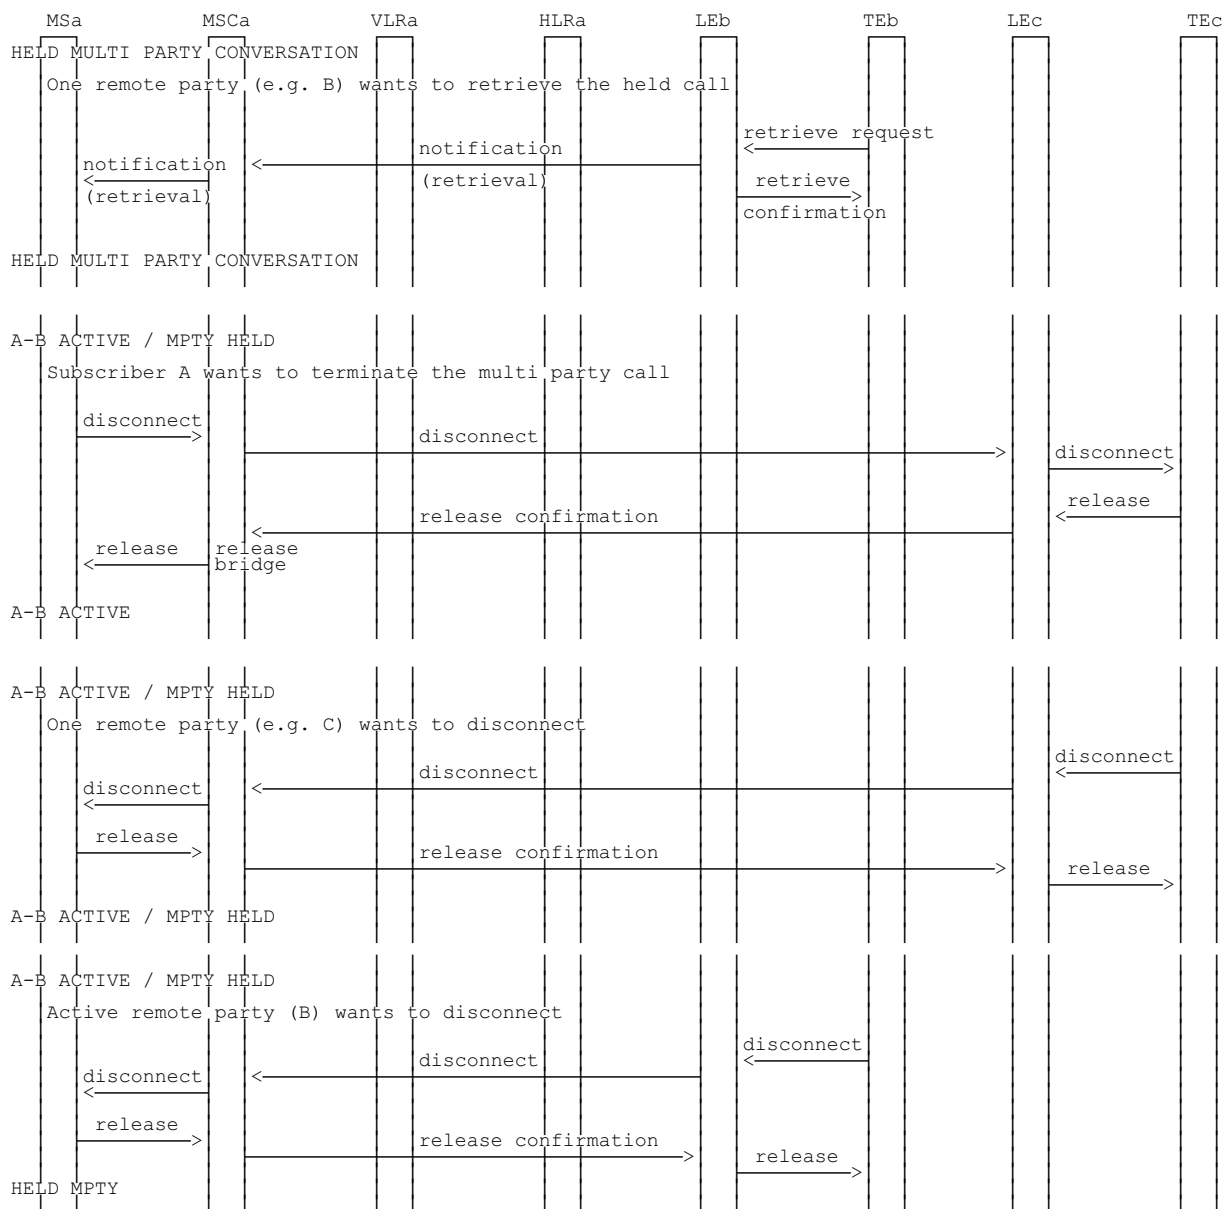


Figure 1.3 (sheet 5 of 7): Information flow for multi party service

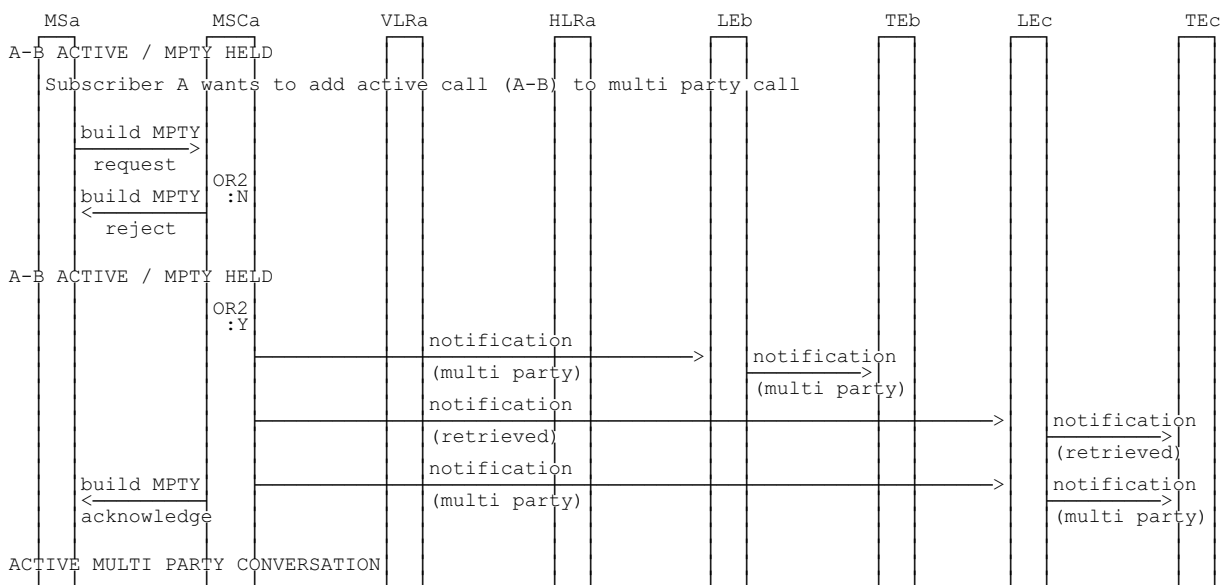

OR2: Extra remote party allowed within maximum number?
 Y: Yes N: No

Figure 1.3 (sheet 6 of 7): Information flow for multi party service

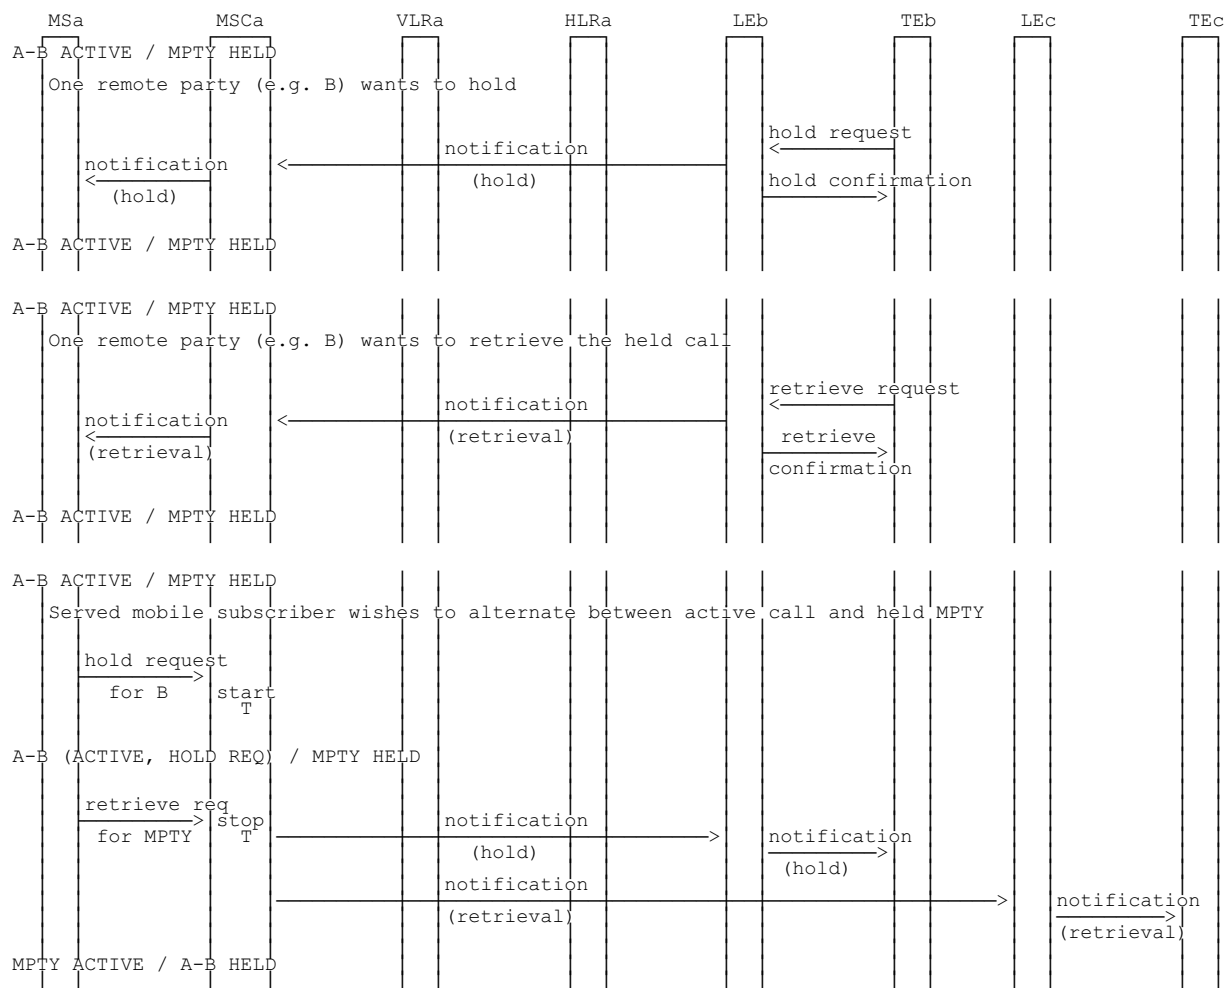


Figure 1.3 (sheet 7 of 7): Information flow for multi party service

1.2 Information stored in the HLR

The following logical states are applicable for MPTY (refer to TS GSM 03.11 for an explanation of the notation):

Provisioning State	Registration State	Activation State	HLR Induction State
(Not Provisioned,	Not Applicable,	Not Active,	Not Induced)
(Provisioned,	Not Applicable,	Active and Operative,	Not Induced)

The HLR shall store the logical state of MPTY (which shall be one of the valid states listed above) on a per subscriber basis.

1.3 State transition model

The following figure shows the successful cases of transition between the applicable logical states of MPTY. The state changes are caused by actions of the service provider.

Note that error cases are not shown in the diagram as they normally do not cause a state change. Additionally, some successful requests may not cause a state change. Hence they are not shown in the diagram.

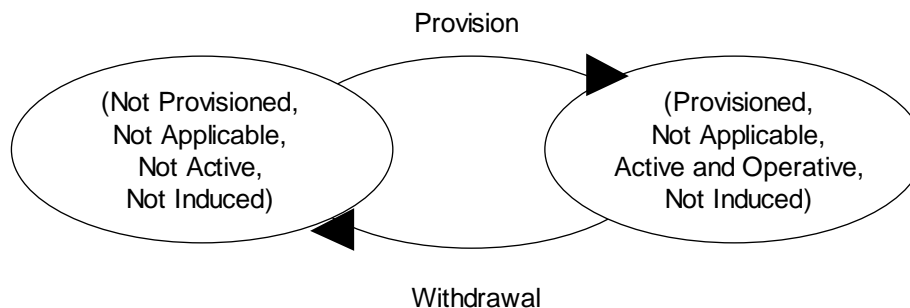


Figure 1.4: State transition model for MPTY

1.4 Transfer of information from HLR to VLR

If the provisioning state for MPTY is "Provisioned" then, when the subscriber registers on a VLR, the HLR shall send that VLR information about the logical state of MPTY.

If the logical state of MPTY is changed while a subscriber is registered on a VLR then the HLR shall inform the VLR of the new logical state of MPTY.

1.5 Information stored in the VLR

For MPTY the VLR shall store the service state information received from the HLR.

1.6 Handover

Handover will have no impact on the control procedures and the operation of the service.

1.7 Simultaneous use of multi party operations

The operations BuildMPTY, SplitMPTY, HoldMPTY and RetrieveMPTY interact with each other, and cannot be applied simultaneously. Once the mobile station has initiated one of these operations, it shall not initiate another multi party operation until the first operation has been acknowledged by the network, or the MS locally determines (due to timer expiry) that the first operation has failed.

History

Document history	
March 1995	First edition
October 1995	Converted into Adobe Acrobat Portable Document Format (PDF)