



EUROPEAN
TELECOMMUNICATION
STANDARD

DRAFT
pr **ETS 300 719-2**

August 1996

Source: TC-RES

Reference: DE/RES-04005-2

ICS: 33.060.20 33.060.50

Key words: Paging, private, radio

**Radio Equipment and Systems (RES);
Private wide area paging service;
Part 2: Functional characteristics and access protocol
for private wide-area paging systems
on shared channels**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Contents

Foreword	5
Introduction	6
1 Scope	7
2 Normative references	7
3 Definitions and abbreviations	7
3.1 Definitions	7
3.1.1 General definitions	7
3.1.2 Functional definitions.....	7
3.2 Abbreviations	8
3.3 Symbols	8
4 Functional characteristics.....	8
4.1 General	8
4.2 Correlation of system parameters.....	8
4.3 Declaration.....	9
5 Access protocol.....	9
5.1 General	9
5.2 Principles	9
5.3 Procedure	9
5.3.1 Carrier sensing	9
5.3.2 Observation time	10
5.3.3 Initiation of the transmitter	10
5.3.4 Duration of the RF channel occupancy	10
5.4 System Identification Code (SIC).....	10
5.4.1 Format of the identification signal.....	10
5.4.2 Contents of the SIC message words.....	11
5.4.3 Modulation scheme for the SIC.....	11
Annex A (informative): Examples of sharing situations.....	12
Annex B (informative): System implementation information	14
B.1 Correlation of system parameters	14
B.2 System roll-out	15
B.3 Timing diagram	15
Annex C (informative): Bibliography.....	16
History.....	17

Blank page

Foreword

This draft European Telecommunication Standard (ETS) has been produced by the Radio Equipment and Systems (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Public Enquiry phase of the ETSI standards approval procedure.

This ETS consists of two parts as follows:

Part 1: "Technical characteristics for private wide-area paging systems";

Part 2: "Functional characteristics and access protocol for private wide-area paging systems on shared channels".

Provisions for ElectroMagnetic Compatibility (EMC) are defined in the relevant EMC standard.

This ETS contains text concerning type approval of the equipment to which it relates. This text should be considered only as guidance and does not make this ETS mandatory in its status as a standard. However, this ETS can be referenced, wholly or in part, for mandatory application by decisions of regulatory bodies.

Proposed transposition dates	
Date of latest announcement of this ETS (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Introduction

Private Wide-Area Paging (PWAP) systems are paging systems working independently from each other and having overlapping coverage areas, e.g. industrial zones of a city. Potential customers may include emergency services, hospitals and manufacturing industry that may be located at various sites within the covered area.

These systems may use time sharing in order to increase the number of virtual available channels. The time sharing specified in this standard is based on a free-running system with dynamic channel access, that requires minimum overhead and provides for maximum available net-air time.

This access protocol applies to single frequency simplex operation where the carrier sense mechanism is available for use according to this protocol. It features dynamic channel access by applying CSMA/CA techniques This access protocol is applicable for:

- multiple users who do not share a common central control facility, but do share a common single radio channel, for the independent transmission of paging-messages;
- multiple users who do not share a common central control facility, but do share a common single radio channel, for the independent transmission of analogue speech and / or paging messages, and where speech-transmissions do not have any priority over the transmission of (non-speech) paging-messages.

This ETS does not include performance characteristics that may be required by the user or requirements for interfacing equipment.

The conditions for licensing as well as conditions for interfacing to Public Switched Telephone Network (PSTN) are determined by the appropriate authorities.

1 Scope

This ETS specifies the access protocol and functional characteristics for Private Wide-Area Paging (PWAP) systems. Such systems are characterised by one-way data and speech transmissions on radio channels shared by different users. This ETS gives freedom for the use of any bit rate, any type of modulation or any type of protocol which fulfils the normative parameters of this ETS in order to access a shared radio channel.

In this ETS the operational aspects of the private wide-area paging service have been included.

2 Normative references

This ETS incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETR 027: "Radio Equipment and Systems (RES); Methods of measurement for mobile radio equipment".
- [2] ETR 028: "Radio Equipment and Systems (RES); Uncertainties in the measurement of mobile radio equipment characteristics".
- [3] ETS 300 471: "Radio Equipment and Systems (RES); Land mobile service; Access protocol, occupation rules and corresponding technical characteristics of radio equipment for the transmission of data on shared channels".
- [4] prETS 300 719-1 (1996): "Radio Equipment and Systems (RES); Private wide-area paging system; Part 1: Air interface specification".
- [5] ITU-R Recommendation 584: "Standard codes and formats for international radio paging".

3 Definitions and abbreviations

3.1 Definitions

For the purpose of this ETS, the following definitions apply:

3.1.1 General definitions

base station receiver: A receiver fitted with an antenna socket and intended for use in a fixed location. This can be a stand-alone device or part of a transceiver.

bit: Binary digit.

block: The smallest quantity of information that is sent over the radio channel. A constant number of useful bits are always sent together with the corresponding redundancy bits.

packet: One block or a contiguous stream of blocks sent by one transmitter to one particular receiver or one particular group of receivers.

3.1.2 Functional definitions

access: To gain occupancy of the Radio Frequency (RF) channel.

carrier sense delay:

cycle time (t_c): The length of time between subsequent transmissions of the same system at full load.

transmission time slot interval (t_t): The duration of channel occupancy of a paging system (subclause 5.3.4).

opening delay:

ordinal number: An integer assigned to each system to establish a sequence.

system: A service provider of private wide area paging.

3.2 Abbreviations

For the purpose of this ETS, the following abbreviations apply:

EMC	ElectroMagnetic Compatibility
emf	Electro-motive force
CSMA/CA	Carrier Sense Multiple Access/Collision Avoidance
POCSAG	Post Office Code Standardisation Advisory Group
PSTN	Public Switched Telephone Network
PWAP	Private Wide-Area Paging
RF	Radio Frequency
RSSI	Received Signal Strength Indication
SIC	System Identification Code

3.3 Symbols

n	number of systems
t_c	cycle time
t_i	observation interval
t_o	maximum observation time
t_t	transmission time slot interval

4 Functional characteristics

4.1 General

The private wide-area paging system is a privately owned and operated paging system to serve an area within and beyond the boundary of the site. The intended free field range of a system is approximately 10 km (to comprise a city and its near surroundings). The radio channel may be either shared by several systems or dedicated to a single system.

The radio part of a private wide-area paging system as defined in this ETS is made up exclusively from equipment that has been approved according to ETS 300 719-1 [4]. Other equipment that may be connected to it shall fulfil the standards applicable to that equipment (if any).

Any coding or modulation scheme may be applied in any part of the protocol except the System Identification Code (SIC), subclause 5.4.

4.2 Correlation of system parameters

Since the system parameters number of systems (n), transmission time slot interval (t_t) and cycle time (t_c) are interdependent, different choices should be offered on different RF frequencies. For alerting purposes short transmission time slot intervals (t_t) and short cycle times (t_c) are useful whereas for the transmission of messages long transmission time slot intervals (t_t) and therefore longer cycle times (t_c) may be allocated.

4.3 Declaration

An applicant shall confirm that the equipment meets the requirements of the access protocol by means of a signed declaration included in the application form for tests.

The measurements of the receiver carrier sense delay and opening delay shall be performed in an accredited test laboratory.

5 Access protocol

5.1 General

This access protocol shall be used for each occupation of the RF channel with automatic channel access.

The access protocol provides for equal sharing of the channel by all systems. The actual channel occupancy depends on the system's traffic demand and a fixed sequence.

5.2 Principles

The protocol is controlled by the transmission of System Identification Codes (SIC). The protocol is self-synchronising and does not use an external time reference.

The equipment shall determine its right to initiate a transmission from the observation of the channel and the evaluation of a previously transmitted System Identification Code (SIC). If the channel is idle the system shall introduce its transmission by sending out its own SIC. The equipment shall not access the channel as long as the latter is occupied.

5.3 Procedure

The access protocol shall be used for each occupancy of the shared RF channel. Each paging system shall determine the sequence of transmissions from the evaluation of previous transmissions on the same channel. In order to correctly evaluate the authorisation to transmit, the succession shall be indicated by an ordinal number, which is part of the System Identification Code (SIC). Every transmission shall be terminated by the SIC. In order to access the channel an observation time (t_o) is introduced, the duration of which is determined by the channel loading.

Time slots shall be numbered in sequence. This may be done by formal administration or automatically.

The duration (t_i) of the transmission shall be limited to the transmission time slot. Each paging system shall determine its turn to access the channel by means of analysing the ordinal number of the system which is about to finish. If its own ordinal number follows directly in series, it is then entitled to start a transmission. If the paging system's own ordinal number does not follow directly, it shall wait for as many observation intervals (t_i), as indicated by one less than the difference between its own ordinal number and the number of the terminating system. In either case the channel can then be seized for the duration of one transmission time slot.

At low traffic, the channel may have transmission gaps which are longer than the maximum observation time (t_o). In this case a new transmission shall be started by transmitting the SIC with the ordinal number of the system included. To cope with the accidental simultaneous access of another system (collision) the transmitter shall then be powered down to start the actual transmission of data only in the time interval (t_i) indicated by the systems ordinal number and provided the channel is detected as free up to that time. Whenever the observation time (t_o) is triggered by transmitting a SIC, any system with a lower ordinal number shall have priority to access the channel. See also figure A.1 and figure A.2.

5.3.1 Carrier sensing

The carrier sense shall be able to detect RF signals with different types of modulation (e.g. F3E, G3E, F1D, F2D, G1D). The threshold level for the carrier sense during the observation time (subclause 5.3.2) shall not exceed 6 μ V emf.

5.3.2 Observation time

The observation time (t_o) shall start at the end of the previous transmission. It will also start at power on. The observation time (t_o) is subdivided into as many observation intervals (t_i) as there are systems (n) sharing the channel. The duration of one observation interval (t_i) shall be 70 ms.

NOTE: This is double the transmitter attack time according to ETS 300 719-1 [4].

Therefore the maximum observation time t_o is given by:

$$t_o = n \times t_i$$

5.3.3 Initiation of the transmitter

If a system is the next in turn to access the channel, then the transmission can be initiated. If the paging system's own ordinal number does not follow directly, it shall wait for as many observation intervals (t_i), as indicated by one less than the difference between its own ordinal number and the number of the terminating system.

The time which elapses from the middle of the respective observation interval to the point where the transmitter carrier power has reached a level of 1 dB below the steady state power shall be less than or equal to the transmitter attack time prETS 300 719-1 [4] subclause 7.6.

5.3.4 Duration of the RF channel occupancy

The time interval during which analogue signals (speech) or packets of data can be sent by a system is t_t . Equipment designed to comply with this protocol shall provide for the following ranges and step sizes:

$$t_t = 6 \text{ s}, \dots, 20 \text{ s}; \text{ step size } 1 \text{ s}$$

The transmission time available to each system on any given channel is to be determined by the licensing authority.

5.4 System Identification Code (SIC)

Since the transmission of the information may use a proprietary protocol, therefore the code and the modulation scheme of the SIC is specified. For paging purposes the Radio Paging Code 1 (RPC1) has been specified by ITU-R Recommendation 584 [5]. Therefore this code has been chosen for the SIC. The SIC terminates each transmission.

5.4.1 Format of the identification signal

The system identification code (SIC) shall be transmitted in one block consisting of three Post Office Code Standardisation Advisory Group (POCSAG) codewords (1 address and 2 message codewords) as shown in figure 1.

If the bit rate and modulation of the paging data and of the SIC are not be the same, the block shall be preceded by "bit sync". In this case, bit synchronisation is required because the auto-correlation properties of the "sync word" are calculated with respect to their corresponding "bit sync".

If bit rate and modulation of the paging data and of the SIC are the same, "bit sync" shall not be transmitted.

bit sync.	sync. word	idle word	addr. word	msg. word	msg. word
Bit sync.	32 bit 1/0... sequence				
Sync. word	Sync. Word (32 bit) (0111.1011.1111.1111.1110.0011.1011.1010)				
Address word	32 bit POCSAG Address Code word (2 082 448)				
Message word 1, 2	2 × 32 bit POCSAG Message Codewords				

Figure 1: Format of the System Identification Code (SIC)

The address code word is the same for all the systems sharing the channel. It allows for the evaluation of the following two message words with 2 × 20 information bits. The address code word identifies the type of service as Private Wide Area Paging (PWAP).

5.4.2 Contents of the SIC message words

The message words are available for transmitting information corresponding to system or licensing authority needs according to the categories in table 1.

Table 1

Category	Identifier	No. of bits
Licensee number	Lnb	16 in msg. word 1
Regional licensing office	LOF	4 in msg. word 1
Area Code	AC	8 in msg. word 2
Individual system identification	SID	8 in msg. word 2
Ordinal Number	ON	4 in msg. word 2

The bits according to these categories are to be assembled in the above given sequence as in POCSAG coding conventions. The maximum total number of useful bits is 40. All categories should be coded in binary as numeric characters (and will be presented in 4 bit nibbles).

5.4.3 Modulation scheme for the SIC


The parameters of the system identification code are given in table 2.

Table 2

Parameter	Value
Type of modulation	Direct 2 level FSK
Transmission rate	1 200 bit/s
Deviation (channel spacing)	± 2,0 kHz (10,0 kHz)
Deviation (channel spacing)	± 2,5 kHz (12,5 kHz)
Deviation (channel spacing)	± 4,0 kHz (20,0 kHz)
Deviation (channel spacing)	± 4,5 kHz (25,0 kHz)

Annex A (informative): Examples of sharing situations


traffic load on all systems

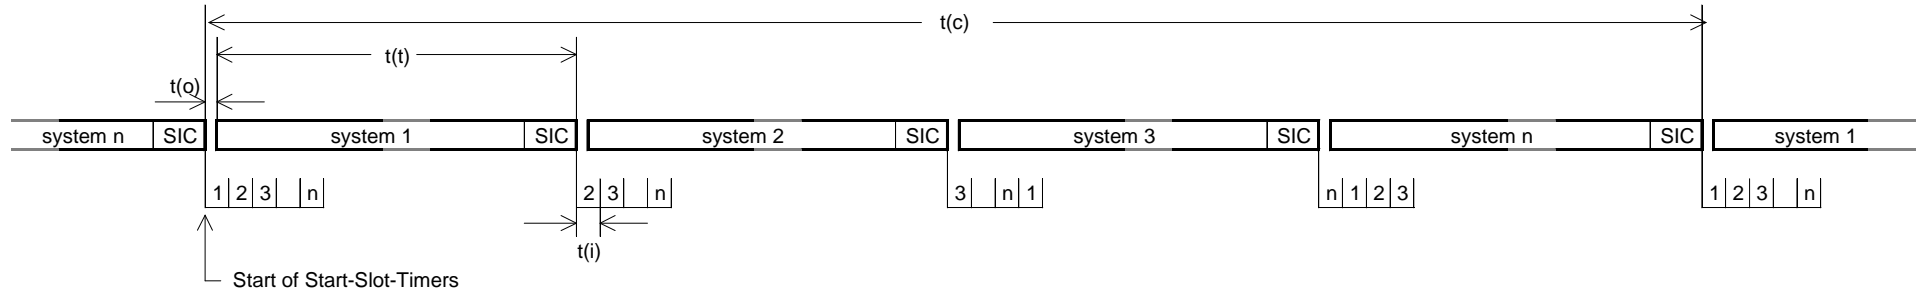


- SIC System Identification Code
- $t(c)$ cycle time (dependent upon traffic demand, variable)
- $t(i)$ observation interval
- $t(o)$ observation time
- $t(t)$ duration of the RF channel occupancy

Figure A.1: Channel access with load on all systems


traffic load on all systems (n=4)

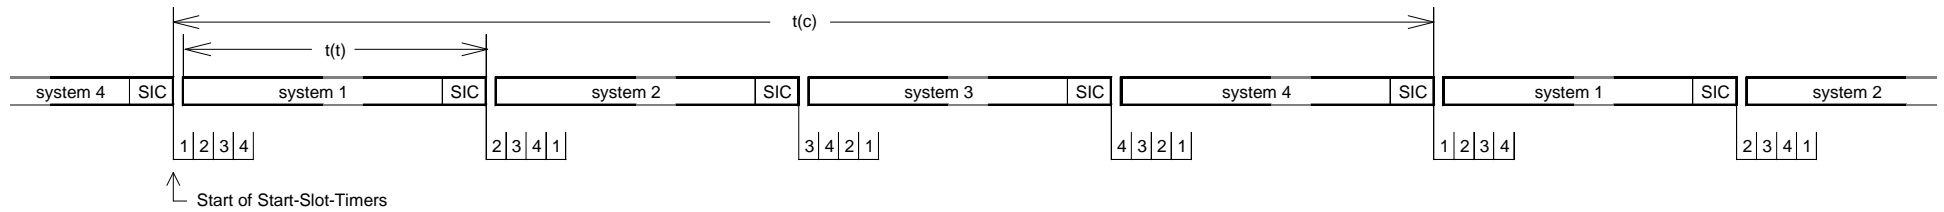

traffic load on some of the systems (n=4)

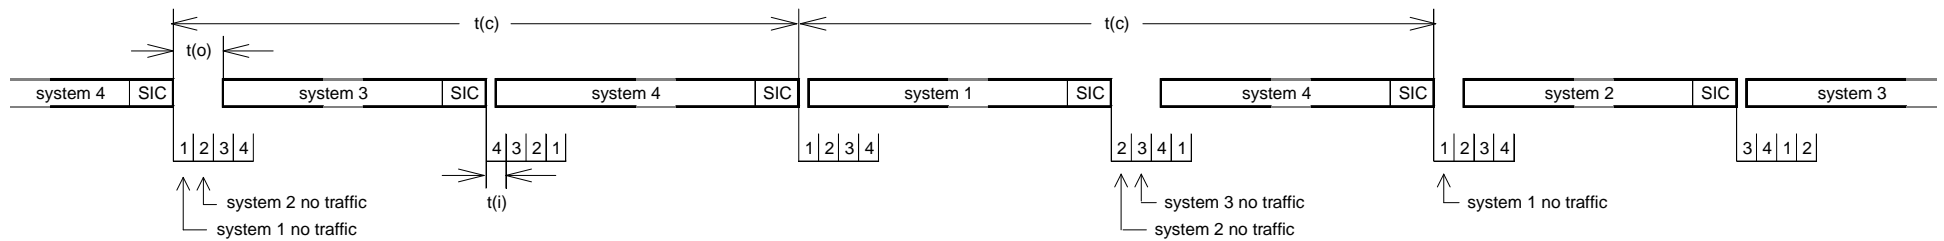

traffic load on some of the systems (n=4)

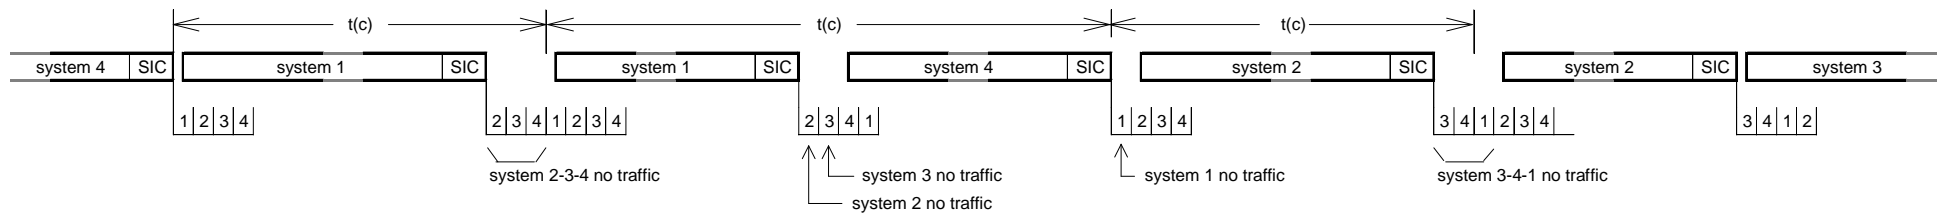

- SIC System Identification Code
- t(c) cycle time (dependent upon traffic demand, variable time)
- t(i) observation interval
- t(o) observation time
- t(t) Duration of the RF channel occupancy

Figure A.2: Channel access with differently loaded systems

B.2 System roll-out

In order to establish new systems adaptively on a channel the following features are provided for:

- the maximum number n of systems to be allocated on the channel is included in the SIC;
- a "channel occupancy completed/not completed" indication included is in the SIC;
- an area code is included in the SIC;
- every system transmits its SIC at least once within a given period of time (e.g. 5 minutes);
- the base station receiver is equipped with a Received Signal Strength Indication (RSSI) facility to measure the field strength of adjacent and far away systems;

If these features are implemented, systems are only linked to the channel when:

- the programmed area code matches that of the systems operating on the channel;
- "channel occupancy not completed" is detected;
- a minimum field strength of far away systems is not exceeded; and
- the ordinal number of already transmitting systems is smaller than the maximum number n .

The maximum number n of systems to be allocated on the channel is programmed in the base station according to the provisions given for a specific channel. As soon as any adjacent system detects the system with the ordinal number n (the last system), a "channel occupancy completed" indication is included in the SIC to prevent the occupancy of the channel by further systems. Additionally, the number "n" system is only allowed to access the channel with "channel occupancy completed" included in the SIC. Before using the channel for the first time the new system searches for far away systems by detecting the SICs transmitted within a specific period of time (e.g. five minutes). If the field strength of a far-away system, which is characterised by a different area code, supersedes a certain threshold, the channel is not accessed. In this case two areas are overlapping at this site and therefore a different frequency has to be chosen.

B.3 Timing diagram

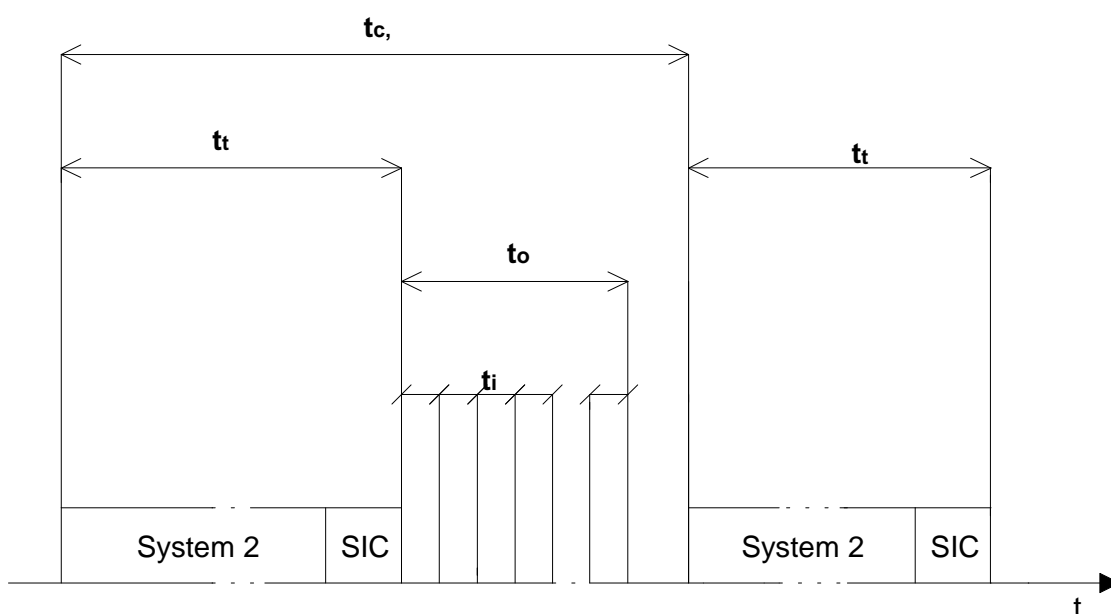


Figure B.1

Annex C (informative): Bibliography

- CEPT Recommendation T/R 20-05: "Low power personal paging systems".
- ESPA publication 4.2.7: "Proposal for a standard for Private Extended Range paging".

History

Document history	
August 1996	Public Enquiry PE 112: 1996-08-19 to 1996-12-13