



**I**NTERIM  
**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**FINAL DRAFT**  
pr I-ETS 300 768

April 1997

---

Source: ETSI TC-BTC

Reference: DI/BTC-01037

ICS: 33.020

**Key words:** CTM, mobility, PISN, supplementary service, stage 1

**Private Integrated Services Network (PISN);  
Cordless Terminal Mobility (CTM);  
Authentication;  
Service description**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.



## Contents

|   |    |
|---|----|
| Foreword .....  | 5  |
| 1 Scope .....   | 7  |
| 2 Conformance.....  | 7  |
| 3 Normative references.....   | 7  |
| 4 Definitions.....  | 8  |
| 5 Abbreviations.....  | 8  |
| 6 SS-CTAT.....  | 9  |
| 6.1 Description.....  | 9  |
| 6.1.1 General description .....   | 9  |
| 6.1.2 Qualifications on applicability to telecommunication services ..... | 9  |
| 6.2 Procedures.....   | 9  |
| 6.2.1 Provision and withdrawal.....                                       | 9  |
| 6.2.2 Normal procedures.....  | 9  |
| 6.2.2.1 Activation, deactivation, registration and interrogation .....    | 9  |
| 6.2.2.2 Invocation and operation .....                                    | 9  |
| 6.2.3 Exceptional procedures.....   | 9  |
| 6.2.3.1 Activation, deactivation, registration and interrogation .....    | 9  |
| 6.2.3.2 Invocation and operation .....                                    | 9  |
| 6.3 Interactions with other supplementary services and ANFs.....          | 9  |
| 6.3.1 Number identification services, (SS-CLIP, SS-COLP, SS-CLIR).....    | 9  |
| 6.3.2 Name identification services, (SS-CNIP, SS-CONP, SS-CNIR) .....     | 10 |
| 6.3.3 Call diversion services, (SS-CFU, SS-CFB, SS-CFNR, SS-CD) .....     | 10 |
| 6.3.4 Call transfer, SS-CT .....  | 10 |
| 6.3.5 Path replacement, ANF-PR.....                                       | 10 |
| 6.3.6 Call completion services (SS-CCBS, SS-CCNR).....                    | 10 |
| 6.3.7 Do not disturb services (SS-DND, SS-DNDO).....                      | 10 |
| 6.3.8 Call offer, SS-CO.....  | 10 |
| 6.3.9 Call intrusion, SS-CI .....   | 10 |
| 6.3.10 CTM Incoming call routing, ANF-CTMI .....                          | 10 |
| 6.3.11 CTM Outgoing call identification, ANF-CTMO .....                   | 10 |
| 6.3.12 Authentication of a PISN, SS-CTAN .....                            | 10 |
| 6.3.13 CTM Location handling, (SS-CTLR, ANF-CTSP) .....                   | 10 |
| 6.4 Inter working considerations .....                                    | 10 |
| 6.5 Overall SDL.....  | 11 |
| 7 SS-CTAN.....  | 12 |
| 7.1 Description.....  | 12 |
| 7.1.1 General description .....   | 12 |
| 7.1.2 Qualifications on applicability to telecommunication services ..... | 12 |
| 7.2 Procedures.....   | 12 |
| 7.2.1 Provision and withdrawal.....                                       | 12 |
| 7.2.2 Normal procedures.....  | 12 |
| 7.2.2.1 Activation, deactivation, registration and interrogation .....    | 12 |
| 7.2.2.2 Invocation and operation .....                                    | 12 |
| 7.2.3 Exceptional procedures.....   | 12 |
| 7.2.3.1 Activation, deactivation, registration and interrogation .....    | 12 |
| 7.2.3.2 Invocation and operation .....                                    | 12 |
| 7.3 Interactions with other supplementary services and ANFs.....          | 13 |
| 7.3.1 Number identification services, (SS-CLIP, SS-COLP, SS-CLIR).....    | 13 |
| 7.3.2 Name identification services, (SS-CNIP, SS-CONP, SS-CNIR) .....     | 13 |
| 7.3.3 Call diversion services, (SS-CFU, SS-CFB, SS-CFNR, SS-CD) .....     | 13 |

|        |  |    |
|--------|--|----|
| 7.3.4  | Call transfer, SS-CT.....                          | 13 |
| 7.3.5  | Path replacement, ANF-PR .....                     | 13 |
| 7.3.6  | Call completion services, (SS-CCBS, SS-CCNR) ..... | 13 |
| 7.3.7  | Do not disturb services, (SS-DND, SS-DNDO) .....   | 13 |
| 7.3.8  | Call offer, SS-CO .....                            | 13 |
| 7.3.9  | Call intrusion, SS-CI .....                        | 13 |
| 7.3.10 | CTM Incoming call routing, ANF-CTMI.....           | 13 |
| 7.3.11 | CTM Outgoing call identification, ANF-CTMO.....    | 13 |
| 7.3.12 | Authentication of a CTM user SS-CTAT.....          | 13 |
| 7.3.13 | CTM Location handling, (SS-CTLR, ANF-CTSP).....    | 13 |
| 7.4    | Inter working considerations .....                 | 13 |
| 7.5    | Overall SDL.....                                   | 14 |
|        | History.....                                       | 15 |

## Foreword

This final draft Interim European Telecommunication Standard (I-ETS) has been produced by the Business TeleCommunications (BTC) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted to for the Voting phase of the ETSI standards approval procedure.

An ETSI standard may be given I-ETS status either because it is regarded as a provisional solution ahead of a more advanced standard, or because it is immature and requires a "trial period". The life of an I-ETS is limited to three years after which it can be converted into an ETS, have its life extended for a further two years, be replaced by a new version, or be withdrawn.

| <b>Proposed announcement date</b>                |                                 |
|--|---------------------------------|
| Date of latest announcement of this I-ETS (doa): | 3 months after ETSI publication |

Blank page

## 1 Scope

This Interim European Telecommunication Standard (I-ETS) describes the stage one of the Authentication services for Private Integrated Services Networks (PISNs). It comprises two related but distinct service descriptions. The first is a supplementary service allowing a PISN to authenticate a Cordless Terminal Mobility (CTM) user. It is called Supplementary Service - Cordless Terminal Authentication of the Terminal (SS-CTAT). The second is a service whereby a CTM user may authenticate the PISN. It is called Supplementary Service - Cordless Terminal Authentication of the Network (SS-CTAN). Stage 1 is an overall service description from the user's point of view, but does not deal with the details of the human interface itself (see CCITT Recommendation I.130 [4]).

Authentication of a CTM user (SS-CTAT) is a supplementary service that enables a PISN, as a security measure, to validate the identity provided by the CTM user.

Authentication of the PISN (SS-CTAN) is a supplementary service that enables a served CTM user, as a security measure, to validate the identity of the PISN.

The mechanisms used in these services are based on the challenge and response method of authentication.

Service specifications are produced in three stages according to the method described in ETS 300 387 [1]. This I-ETS contains the stage 1 specification of the authentication supplementary services.

The purpose of the stage 1 specification is to guide and constrain the work at stage 2 and stage 3. Where the text indicates the status of a requirement (i.e. as strict command or prohibition or as authorization leaving freedom as a capability or possibility) this shall be reflected in the text of the relevant stage 2 and stage 3 standards.

This I-ETS applies to CTM only within a single PISN.

## 2 Conformance

Conformance to this I-ETS is met by conforming to the stage three standards with the field of application appropriate to the equipment being implemented. Therefore no method of testing is provided for this I-ETS.

## 3 Normative references

This I-ETS incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of any of these publications apply to this I-ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 387 (1994): "Private Telecommunication Network (PTN) - Method for the specification of basic and supplementary services".
- [2] ETS 300 171 (1992): "Private Telecommunication Network (PTN) - Specification, functional model and information flows - Control aspects of circuit mode basic services".
- [3] CCITT Recommendation Z.100 (1988): "Functional Specification and Description Language (SDL)".
- [4] CCITT Recommendation I.130 (1988): "Method for the characterization of telecommunication services supported by an ISDN and network capabilities of an ISDN".
- [5] CCITT Recommendation I.210 (1988): "Principles of telecommunication services supported by an ISDN and means to describe them".

- [6] ETS 300 415 (1996): "Private Integrated Services Network (PISN) - Terms and Definitions".
- [7] ETS 300 691 (1996): "Private Integrated Services Network (PISN) - Cordless Terminal Mobility (CTM); Location handling services; Service description".

## 4 Definitions

For the purposes of this I-ETS, the following definitions apply:

**additional network feature:** A capability over and above that of a basic service, provided by a PISN, but not directly to a PISN user.

**authentication:** See ETS 300 415 [6].

**cordless terminal mobility:** See ETS 300 691 [7].

**cordless terminal mobility user:** For the purpose of this I-ETS a CTM user is defined as the user being authenticated by SS-CTAT or the authenticating user of SS-CTAN.

**PISN authority:** The body or its representative responsible for arranging the service with the service provider.

**PISN user:** See ETS 300 691 [7].

**supplementary service:** See CCITT Recommendation I.210 [5] paragraph 2.4.

## 5 Abbreviations

For the purposes of this I-ETS, the following abbreviations apply:

|          |   |
|----------|---|
| ANF      | Additional Network Feature  |
| ANF-CTMI | ANF-CTM Incoming call handling                                    |
| ANF-CTMO | ANF-CTM Outgoing call handling                                    |
| ANF-CTSP | ANF-Cordless Terminal Roaming                                     |
| ANF-PRCT | ANF-Path Replacement for Cordless Terminal                        |
| ANF-PR   | ANF-Path Replacement  |
| CTM      | Cordless Terminal Mobility  |
| PISN     | Private Integrated Service Network                                |
| SDLSS    | Specification and Description Language for Supplementary Service  |
| SS-CCBS  | Supplementary Service-Call Completion Busy Subscriber             |
| SS-CCNR  | Supplementary Service-Call Completion No Reply                    |
| SS-CD    | Supplementary Service-Call Diversion                              |
| SS-CFB   | Supplementary Service-Call Forwarding Busy                        |
| SS-CFNR  | Supplementary Service-Call Forwarding No Reply                    |
| SS-CFU   | Supplementary Service-Call Forwarding Unconditional               |
| SS-CI    | Supplementary Service-Call Intrusion                              |
| SS-CTAT  | Supplementary Service-Authentication of a CTM user by the network |
| SS-CTAN  | Supplementary Service-Authentication of a Network by the CTM user |
| SS-CLIP  | Supplementary Service-Call Line Identification Presentation       |
| SS-CLIR  | Supplementary Service-Call Line Identification Restriction        |
| SS-CNIP  | Supplementary Service-Call Name Identification Presentation       |
| SS-CNIR  | Supplementary Service-Call Name Identification Restriction        |
| SS-CO    | Supplementary Service-Call Offer                                  |
| SS-COLP  | Supplementary Service-COnnected Line identification Presentation  |
| SS-CONP  | Supplementary Service-COnnected Name identification Presentation  |
| SS-CT    | Supplementary Service-Call Transfer                               |
| SS-CTLR  | Supplementary Service-Cordless Terminal Line Registration         |
| SS-DND   | Supplementary Service-Do Not Disturb                              |
| SS-DNDO  | Supplementary Service-Do Not Disturb Override                     |



## **6 SS-CTAT**

### **6.1 Description**

#### **6.1.1 General description**

SS-CTAT enables the PISN, as a security measure, to validate the identity provided by the CTM user.

#### **6.1.2 Qualifications on applicability to telecommunication services**

This supplementary service is applicable to all basic services as defined in ETS 300 171 [2].

### **6.2 Procedures**

#### **6.2.1 Provision and withdrawal**

SS-CTAT shall be provided and withdrawn by arrangement with the PISN authority.

#### **6.2.2 Normal procedures**

##### **6.2.2.1 Activation, deactivation, registration and interrogation**

SS-CTAT shall be activated on provision and deactivated on withdrawal.

Registration and interrogation are not applicable to this supplementary service.

##### **6.2.2.2 Invocation and operation**

SS-CTAT may be invoked at any time.

The operation of SS-CTAT is based on the "challenge and response" method of authentication. Upon invocation of this service, the PISN sends specific information (challenge) to the CTM user and awaits a response. The response from the CTM user is used by the PISN to determine result (success or failure) and the PISN may take any action as appropriate.

#### **6.2.3 Exceptional procedures**

##### **6.2.3.1 Activation, deactivation, registration and interrogation**

Not applicable.

##### **6.2.3.2 Invocation and operation**

If SS-CTAT fails for any of the following reasons, the PISN may withdraw or limit the service to the CTM user.

Possible reasons for failure are:

- incorrect authentication parameters;
- CT not accessible.

### **6.3 Interactions with other supplementary services and ANFs**

The following interactions shall apply.

#### **6.3.1 Number identification services, (SS-CLIP, SS-COLP, SS-CLIR)**

No interaction.

**6.3.2 Name identification services, (SS-CNIP, SS-CONP, SS-CNIR)**

No interaction.

**6.3.3 Call diversion services, (SS-CFU, SS-CFB, SS-CFNR, SS-CD)**

No interaction.

**6.3.4 Call transfer, SS-CT**

No interaction.

**6.3.5 Path replacement, ANF-PR**

No interaction.

**6.3.6 Call completion services (SS-CCBS, SS-CCNR)**

No interaction.

**6.3.7 Do not disturb services (SS-DND, SS-DNDO)**

No interaction.

**6.3.8 Call offer, SS-CO**

No interaction.

**6.3.9 Call intrusion, SS-CI**

No interaction.

**6.3.10 CTM Incoming call routing, ANF-CTMI**

No interaction.

**6.3.11 CTM Outgoing call identification, ANF-CTMO**

No interaction.

**6.3.12 Authentication of a PISN, SS-CTAN**

No interaction.

**6.3.13 CTM Location handling, (SS-CTLR, ANF-CTSP)**

No interaction.

**6.4 Inter working considerations**

Not applicable.

### 6.5 Overall SDL

Figure 1 contains the dynamic description of SS-CTAT in SDL format CCITT Recommendation Z.100 [3]. The SDL process represents the behaviour of the PISN in providing SS-CTAT.

Input signal from the left and output signals to the left represent internal stimuli within the PISN. Input signals from the right represent primitives from the CTM user. Output signals to the right represent primitives to the CTM user.

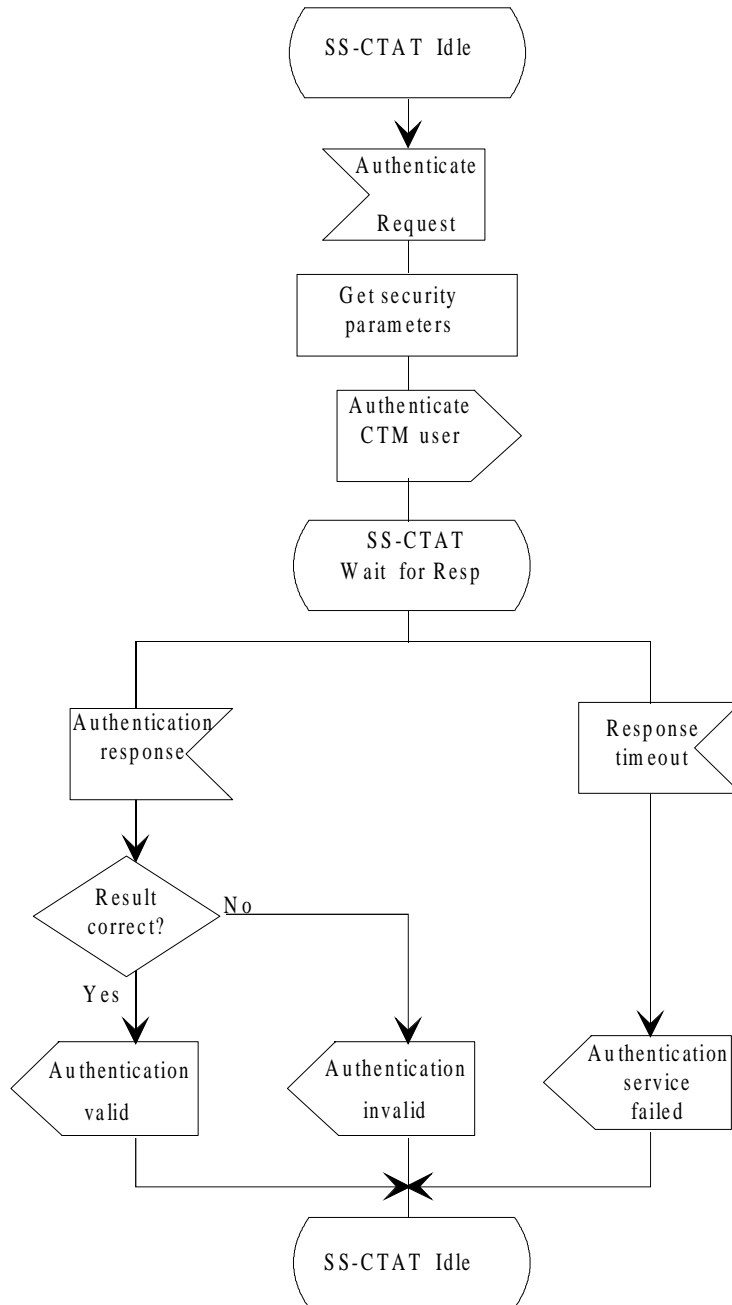


Figure 1: SS-CTAT, overall SDL

## **7 SS-CTAN**

### **7.1 Description**

#### **7.1.1 General description**

SS-CTAN enables the CTM user, as a security measure, to validate the identity of the PISN, prior to accepting certain instructions from it.

In the case where authentication fails, the CTM user shall be informed. The CTM user can then take any action as appropriate. e.g. release the call.

#### **7.1.2 Qualifications on applicability to telecommunication services**

This supplementary service is applicable to all basic services as defined in ETS 300 171 [2].

### **7.2 Procedures**

#### **7.2.1 Provision and withdrawal**

SS-CTAN shall be provided to and withdrawn from a CTM user by arrangement with the PISN authority.

#### **7.2.2 Normal procedures**

##### **7.2.2.1 Activation, deactivation, registration and interrogation**

SS-CTAN shall be activated on provision and deactivated on withdrawal.

Registration and interrogation are not applicable to this supplementary service.

##### **7.2.2.2 Invocation and operation**

SS-CTAN may be invoked by the CTM user, before accepting certain instructions from the PISN.

The operation of SS-CTAN is based on the "challenge and response" method of authentication. Upon invocation of this service, the CTM user sends specific information (challenge) to the PISN and awaits a response. The response from the PISN shall contain sufficient information for the CTM user to determine the result. If the response is not the expected response, the CTM user may take any action as appropriate.

##### **7.2.3 Exceptional procedures**

###### **7.2.3.1 Activation, deactivation, registration and interrogation**

Not applicable.

###### **7.2.3.2 Invocation and operation**

If SS-CTAN fails the CTM user shall be informed.

Possible reasons for failure are:

- incorrect authentication parameters;
- not authorized to use SS-CTAN;
- SS-CTAN not available.

### **7.3 Interactions with other supplementary services and ANFs**

The following interactions shall apply.

#### **7.3.1 Number identification services, (SS-CLIP, SS-COLP, SS-CLIR)**

No interaction.

#### **7.3.2 Name identification services, (SS-CNIP, SS-CONP, SS-CNIR)**

No interaction.

#### **7.3.3 Call diversion services, (SS-CFU, SS-CFB, SS-CFNR, SS-CD)**

No interaction.

#### **7.3.4 Call transfer, SS-CT**

No interaction.

#### **7.3.5 Path replacement, ANF-PR**

No interaction.

#### **7.3.6 Call completion services, (SS-CCBS, SS-CCNR)**

No interaction.

#### **7.3.7 Do not disturb services, (SS-DND, SS-DNDO)**

No interaction.

#### **7.3.8 Call offer, SS-CO**

No interaction.

#### **7.3.9 Call intrusion, SS-CI**

No interaction.

#### **7.3.10 CTM Incoming call routing, ANF-CTMI**

No interaction.

#### **7.3.11 CTM Outgoing call identification, ANF-CTMO**

No interaction.

#### **7.3.12 Authentication of a CTM user SS-CTAT**

No interaction.

#### **7.3.13 CTM Location handling, (SS-CTLR, ANF-CTSP)**

No interaction.

### **7.4 Inter working considerations**

Not applicable.

## 7.5 Overall SDL

Figure 2 contains the dynamic description of SS-CTAN in SDL format CCITT Recommendation Z.100 [3]. The SDL process represents the behaviour of the PISN in providing SS-CTAN.

Input signals from the right represent primitives from the CTM user's current access. Output signals to the right represent primitives to the CTM user's current access.

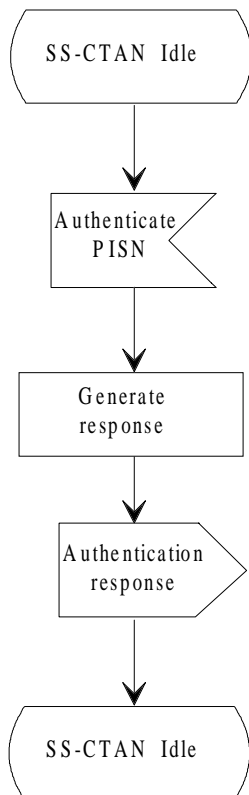


Figure 2: SS-CTAN, overall SDL

## History

| Document history |                |         |                          |
|------------------|----------------|---------|--------------------------|
| September 1996   | Public Enquiry | PE 114: | 1996-09-23 to 1997-01-17 |
| April 1997       | Vote           | V 9726: | 1997-04-29 to 1997-06-27 |
|                  |                |         |                          |
|                  |                |         |                          |
|                  |                |         |                          |