



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 956

May 1997

Source: ETSI TC-SMG

Reference: DE/SMG-030488Q

ICS: 33.020

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



**Digital cellular telecommunications system;
Call Barring (CB) supplementary services - Stage 3
(GSM 04.88 version 5.0.1)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

Contents

Foreword	5
0 Scope	7
0.1 Normative references	7
0.2 Abbreviations	9
0.3 Cross phase compatibility	9
1 Barring of outgoing calls	10
1.1 Normal operation	10
1.2 Registration	10
1.3 Activation	11
1.4 Deactivation	12
1.5 Interrogation	13
1.6 Invocation and erasure	13
1.7 Cross phase compatibility	13
1.7.1 Network only supports phase 1 control of SS by the subscriber	13
1.7.2 MS only supports protocol version 1 control of SS by the subscriber	13
2 Barring of incoming calls	14
2.1 Normal operation	14
2.2 Registration	14
2.3 Activation	15
2.4 Deactivation	16
2.5 Interrogation	17
2.6 Invocation and erasure	17
2.7 Cross phase compatibility	17
2.7.1 Network only supports phase 1 control of SS by the subscriber	17
2.7.2 MS only supports protocol version 1 control of SS by the subscriber	17
Annex A (informative): Status of GSM 04.88	18
History	19

Blank page

Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee (TC) of the European Telecommunications Standards Institute (ETSI).

This ETS specifies the procedures used at the radio interface for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of call barring supplementary services within the digital cellular telecommunications system.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE Rules.

Transposition dates	
Date of adoption:	18 April 1997
Date of latest announcement of this ETS (doa):	31 August 1997
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	28 February 1998
Date of withdrawal of any conflicting National Standard (dow):	28 February 1998

Blank page

0 Scope

This European Telecommunication Standard (ETS) specifies the procedures used at the radio interface (reference point Um as defined in GSM 04.02) for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of call barring supplementary services. Provision and withdrawal of supplementary services is an administrative matter between the mobile subscriber and the service provider and cause no signalling on the radio interface.

In GSM 04.10 the general aspects of the specification of supplementary services at the layer 3 radio interface are given.

GSM 04.80 specifies the formats and coding for the supplementary services.

Definitions and descriptions of supplementary services are given in GSM 02.04, GSM 02.8x and GSM 02.9x-series.

Technical realization of supplementary services is described in GSM 03.11, GSM 03.8x and GSM 03.9x-series.

The procedures for Call Control, Mobility Management and Radio Resource management at the layer 3 radio interface are defined in GSM 04.07 and GSM 04.08.

The following supplementary services belong to the call restriction supplementary services and are described in this ETS:

- Barring of outgoing calls (clause 1):
 - Barring of all outgoing calls (BAOC) (Barring program 1);
 - Barring of outgoing international calls (BOIC) (Barring program 2);
 - Barring of outgoing international calls EXCEPT those directed to the home PLMN country (BOIC-exHC) (Barring program 3).

- Barring of incoming calls (clause 2):
 - Barring of all incoming calls (BAIC) (Barring program 1);
 - Barring of incoming calls when roaming outside the home PLMN country (BIC-Roam) (Barring program 2).

0.1 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 350): "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 02.04 (ETS 300 918): "Digital cellular telecommunications system (Phase 2+); General on supplementary services".
- [3] GSM 02.81: "Digital cellular telecommunications system; Line identification Supplementary Services - Stage 1".
- [4] GSM 02.82: "Digital cellular telecommunications system (Phase 2+); Call Forwarding (CF) supplementary services - Stage 1".
- [5] GSM 02.83: "Digital cellular telecommunications system; Call Waiting (CW) and Call Hold (HOLD) Supplementary Services - Stage 1".
- [6] GSM 02.84: "Digital cellular telecommunications system; Multi Party (MPTY) Supplementary Services - Stage 1".

- [7] GSM 02.85: "Digital cellular telecommunications system; Closed User Group (CUG) Supplementary Services - Stage 1".
- [8] GSM 02.86: "Digital cellular telecommunications system; Advice of Charge (AoC) Supplementary Services - Stage 1".
- [9] GSM 02.88: "Digital cellular telecommunications system; Call Barring (CB) Supplementary Services - Stage 1".
- [10] GSM 02.90: "Digital cellular telecommunications system (Phase 2+); Unstructured Supplementary Service Data (USSD) - Stage 1".
- [11] GSM 02.91: "Digital cellular telecommunications system (Phase 2+); Explicit Call Transfer (ECT)".
- [11] GSM 03.11 (ETS 300 928): "Digital cellular telecommunications system; Technical realization of supplementary services".
- [12] GSM 03.81: "Digital cellular telecommunications system; Line identification supplementary services - Stage 2".
- [13] GSM 03.82: "Digital cellular telecommunications system; Call Forwarding (CF) supplementary services - Stage 2".
- [14] GSM 03.83: "Digital cellular telecommunications system; Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 2".
- [15] GSM 03.84: "Digital cellular telecommunications system; Multi Party (MPTY) supplementary services - Stage 2".
- [16] GSM 03.85: "Digital cellular telecommunications system; Closed User Group (CUG) supplementary services - Stage 2".
- [17] GSM 03.86 (ETS 300 935): "Digital cellular telecommunications system; Advice of Charge (AoC) supplementary services - Stage 2".
- [18] GSM 03.88: "Digital cellular telecommunications system; Call Barring (CB) supplementary services - Stage 2".
- [19] GSM 03.90: "Digital cellular telecommunications system; Unstructured Supplementary Service Data (USSD) - Stage 2".
- [21] GSM 03.91: "Digital cellular telecommunications system (Phase 2+); Explicit Call Transfer (ECT) supplementary service - Stage 2".
- [20] GSM 04.02: "Digital cellular telecommunications system (Phase 2+); GSM Public Land Mobile Network (PLMN) access reference configuration".
- [21] GSM 04.07 (ETS 300 939): "Digital cellular telecommunications system (Phase 2+); Mobile radio interface signalling layer 3; General aspects".
- [22] GSM 04.08 (ETS 300 940): "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification".
- [23] GSM 04.10 (ETS 300 941): "Digital cellular telecommunications system; Mobile radio interface layer 3 Supplementary services specification; General aspects".
- [24] GSM 04.80 (ETS 300 950): "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 supplementary services specification; Formats and coding".

0.2 Abbreviations

Abbreviations used in this ETS are listed in GSM 01.04.

0.3 Cross phase compatibility

For the following supplementary services, a number of changes exist between this ETS and the protocol version 1 specification:


- Barring of outgoing calls;
- Barring of incoming calls.

The main body of this ETS assumes that all network entities comply with this version of the service. In each case an additional subclauses 1.7 and 2.7 defines the additional requirements for when one or more network entities or the MS complies with the protocol version 1 specifications for the supplementary service procedures.

1 Barring of outgoing calls

1.1 Normal operation

When a barring program relating to outgoing calls is active and operative for a basic service, each call set up related to that basic service and not allowed by the barring program will be refused by the network. In this case a NotifySS operation containing the SS-Status indicating that a barring program relating to outgoing calls is currently active and operative will be sent to the served mobile subscriber (see figure 1.1).

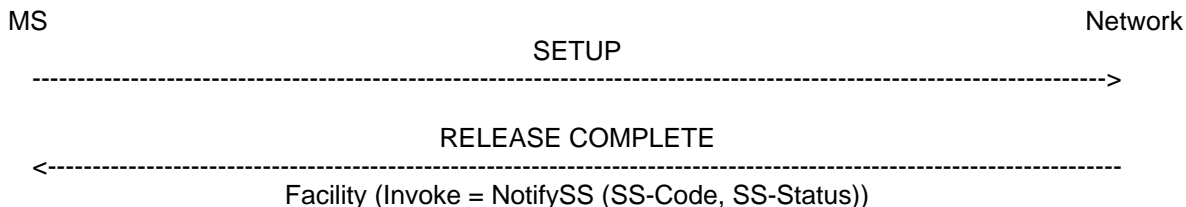

NOTE: The SS-Code will be the common code for outgoing barring services.

Figure 1.1: Notification to the served mobile subscriber that barring of outgoing calls is active

When a barring program is active (operative or quiescent), the ability of the served mobile subscriber to set up emergency calls is not affected, irrespective of the basic service to which the barring program applies.

When a barring program relating to outgoing calls is active (operative or quiescent), the ability of the served mobile subscriber to receive calls is not affected.

1.2 Registration

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by subscriber using password", the subscriber has to register a call barring password at provision time. Furthermore the served mobile subscriber can change the call barring password by a registration procedure at any time.

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by service provider", an attempt to register a new call barring password will be denied.

The procedure to register a new password is specified in GSM 04.10.

1.3 Activation

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by subscriber using password", the supplementary service is activated for a basic service if the subscriber has requested so by means of an activation procedure for that basic service. If the subscriber does not indicate a specific basic service, the activation applies to all basic services. The subscriber may use the call barring password at activation (see figure 1.2).

If the activation is successful, the service will be activated. The network will then send a return result indicating acceptance of the request. The result is formatted according to the options shown below:


- The result includes the Basic Service group Code(s) to which the service is activated. The result may also contain an SS-Code and SS-Status parameter. If the MS does not send an SS Version Indicator in the invocation request then these parameters shall be presented in the result. If the MS does send an SS Version Indicator in the invocation request then these parameters are optional in the result. If the SS-Status is included the network shall set it to reflect the state of the service. If the SS-Code is included then it shall contain the SS-Code of the service which has been activated. The MS shall ignore the contents of the SS-Code and SS-Status parameters if they are received.

Note that the use of SS-Code and SS-Status is to provide backwards compatibility with phase 1.

- If the request did not include a BasicServiceCode, and the activation was successful for all basic services, the network may send an empty return result to the MS. This option applies whether or not an SS Version Indicator is received from the MS.

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by service provider", an attempt to activate the service will be denied and the served mobile subscriber receives an error indication (see figure 1.3).

Error values are specified in GSM 04.80.

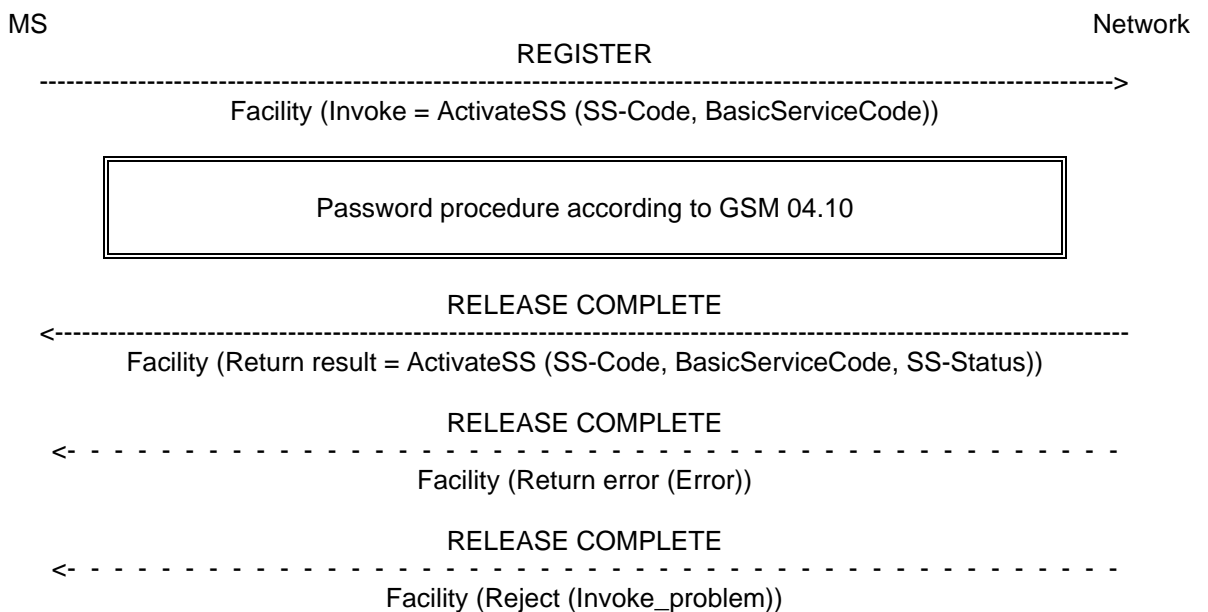

NOTE: The SS-Code will be one of the specific outgoing barring codes. If BasicServiceCode is not included it applies to all basic services. The SS-Code and SS-Status may not be included in the result in all cases (see text).

Figure 1.2: Activation of a barring program

1.4 Deactivation

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by subscriber using password", the supplementary service is deactivated for a basic service if the subscriber has requested deactivation by means of a deactivation procedure for that basic service. The subscriber may use the call barring password at deactivation (see figure 1.3).

The deactivation request of a barring program may specify the basic service. If the subscriber does not indicate a specific basic service, the deactivation applies to all basic services(see figure 1.3).


If the deactivation is successful, the service will be deactivated. The network will then send a return result indicating acceptance of the request. The result is formatted according to the options shown below:

- The result includes the Basic Service group Code(s) to which the service is deactivated. The result may also contain an SS-Code and SS-Status parameter. If the MS does not send an SS Version Indicator in the invocation request then these parameters shall be presented in the result. If the MS does send an SS Version Indicator in the invocation request then these parameters are optional in the result. If the SS-Status is included the network shall set it to reflect the state of the service. If the SS-Code is included then it shall contain the SS-Code of the service which has been deactivated. The MS shall ignore the contents of the SS-Code and SS-Status parameters if they are received.

Note that the use of SS-Code and SS-Status is to provide backwards compatibility with phase 1.

- If the request did not include a BasicServiceCode, and the deactivation was successful for all basic services, the network may send an empty return result to the MS. This option applies whether or not an SS Version Indicator is received from the MS.

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by service provider", an attempt to deactivate the supplementary service will be denied and the served mobile subscriber receives an error indication (see figure 1.3). Error values are specified in GSM 04.80.

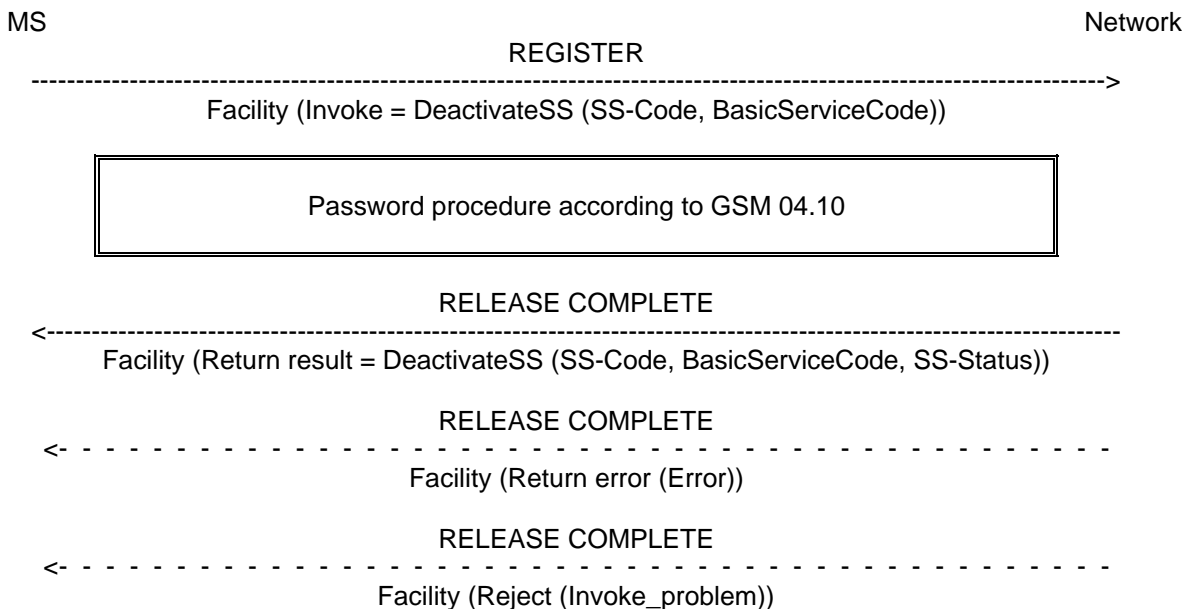


NOTE: The SS-Code may be one of the specific outgoing barring codes, the common code for the outgoing barring services, or the SS-Code for all call barring services. If BasicServiceCode is not included it applies to all basic services. The SS-Code and SS-Status may not be included in the result in all cases (see text).

Figure 1.3: Deactivation of barring of outgoing calls

1.5 Interrogation

The interrogation procedure enables the mobile subscriber to obtain information about data stored in the PLMN. After having requested this procedure the network shall return a list of all basic service groups for which the service is active (see figure 1.4).

If there is no basic service group for which the service is active, an SS-Status will be returned indicating that the service is "deactivated".

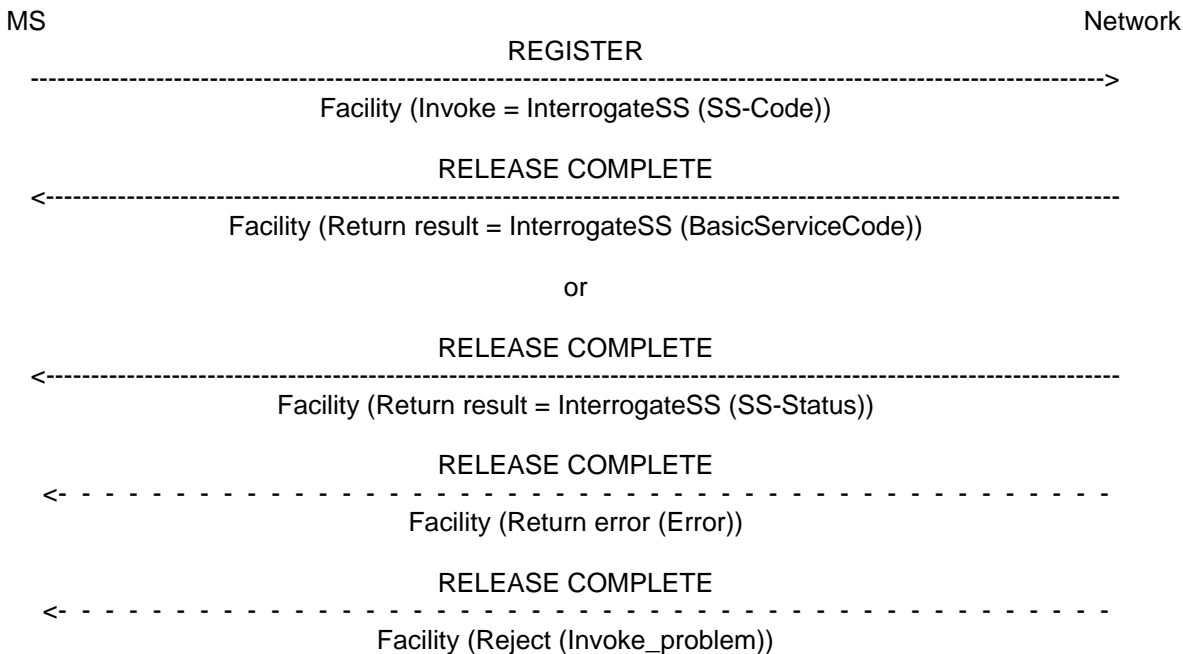

NOTE: The SS-Code may be one of the specific outgoing barring codes.

Figure 1.4: Interrogation of a barring program

1.6 Invocation and erasure

Invocation and erasure are not applicable to barring programs.

1.7 Cross phase compatibility

1.7.1 Network only supports phase 1 control of SS by the subscriber

In this case there is no relevant cross phase compatibility problem.


1.7.2 MS only supports protocol version 1 control of SS by the subscriber

In this case there is no relevant cross phase compatibility problem.

2 Barring of incoming calls

2.1 Normal operation

When a barring program relating to incoming calls is active and operative for a basic service, each incoming call set-up related to that basic service and not allowed by the barring program will be refused by the network. In this case a NotifySS operation containing the SS-Status indicating that a barring program relating to incoming calls is currently active and operative will be sent to the calling mobile subscriber in a clearing message (see figure 2.1).

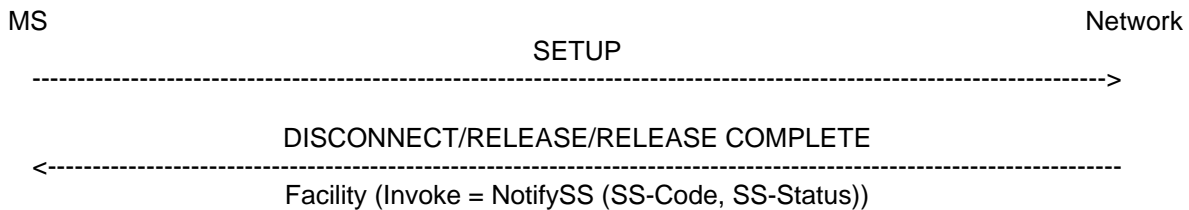

NOTE: The SS-Code will be the common code for incoming barring services.

Figure 2.1: Notification to the calling mobile subscriber that at the called subscriber side barring is active

When barring of incoming calls is active (operative or quiescent), the ability of the served mobile subscriber to originate calls is not affected.

2.2 Registration

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by subscriber using password", the subscriber has to register a call barring password at provision time. Furthermore the served mobile subscriber can change the call barring password by a registration procedure at any time.

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by service provider", an attempt to register a new call barring password will be denied.

The procedure to register a new password is specified in GSM 04.10.

2.3 Activation

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by subscriber using password", the supplementary service is activated for a basic service if the subscriber has requested so by means of an activation procedure for that basic service. If the subscriber does not indicate a specific basic service, the activation applies to all basic services. The subscriber may use the call barring password at activation (see figure 2.2).

If the activation is successful, the service will be activated. The network will then send a return result indicating acceptance of the request. The result is formatted according to the options shown below:


- The result includes the Basic Service group Code(s) to which the service is activated. The result may also contain an SS-Code and SS-Status parameter. If the MS does not send an SS Version Indicator in the invocation request then these parameters shall be presented in the result. If the MS does send an SS Version Indicator in the invocation request then these parameters are optional in the result. If the SS-Status is included the network shall set it to reflect the state of the service. If the SS-Code is included then it shall contain the SS-Code of the service which has been activated. The MS shall ignore the contents of the SS-Code and SS-Status parameters if they are received.

Note that the use of SS-Code and SS-Status is to provide backwards compatibility with phase 1.

- If the request did not include a BasicServiceCode, and the activation was successful for all basic services, the network may send an empty return result to the MS. This option applies whether or not an SS Version Indicator is received from the MS.

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by service provider", an attempt to activate the service will be denied and the served mobile subscriber receives an error indication (see figure 2.2).

Error values are specified in GSM 04.80.

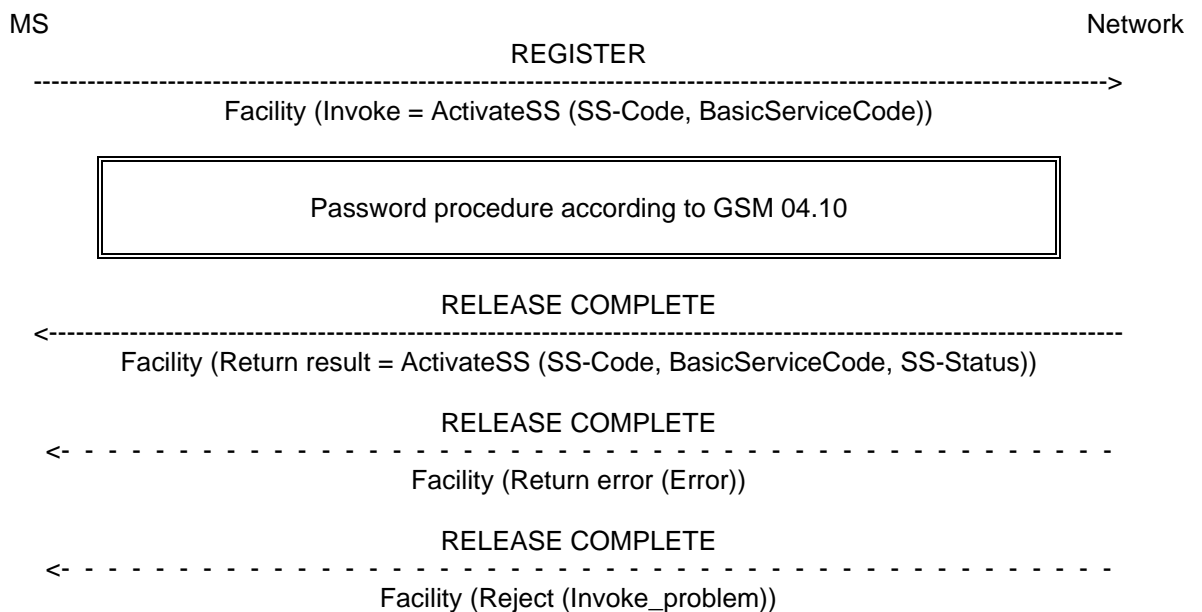

NOTE: The SS-Code will be one of the specific incoming barring codes. If BasicServiceCode is not included it applies to all basic services. The SS-Code and SS-Status may not be included in the result in all cases (see text).

Figure 2.2: Activation of a barring program

2.4 Deactivation

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by subscriber using password", the supplementary service is deactivated for a basic service if the subscriber has requested deactivation by means of a deactivation procedure for that basic service. The subscriber may use the call barring password at deactivation (see figure 2.3).

If the deactivation is successful, the service will be deactivated. The network will then send a return result indicating acceptance of the request. The result is formatted according to the options shown below:


- The result includes the Basic Service group Code(s) to which the service is deactivated. The result may also contain an SS-Code and SS-Status parameter. If the MS does not send an SS Version Indicator in the invocation request then these parameters shall be presented in the result. If the MS does send an SS Version Indicator in the invocation request then these parameters are optional in the result. If the SS-Status is included the network shall set it to reflect the state of the service. If the SS-Code is included then it shall contain the SS-Code of the service which has been deactivated. The MS shall ignore the contents of the SS-Code and SS-Status parameters if they are received.

Note that the use of SS-Code and SS-Status is to provide backwards compatibility with phase 1.

- If the request did not include a BasicServiceCode, and the deactivation was successful for all basic services, the network may send an empty return result to the MS. This option applies whether or not an SS Version Indicator is received from the MS.

If the served mobile subscriber at provision time has selected the subscription option "control of barring service: by service provider", an attempt to deactivate the supplementary service will be denied and the served mobile subscriber receives an error indication (see figure 2.3).

Error values are specified in GSM 04.80.

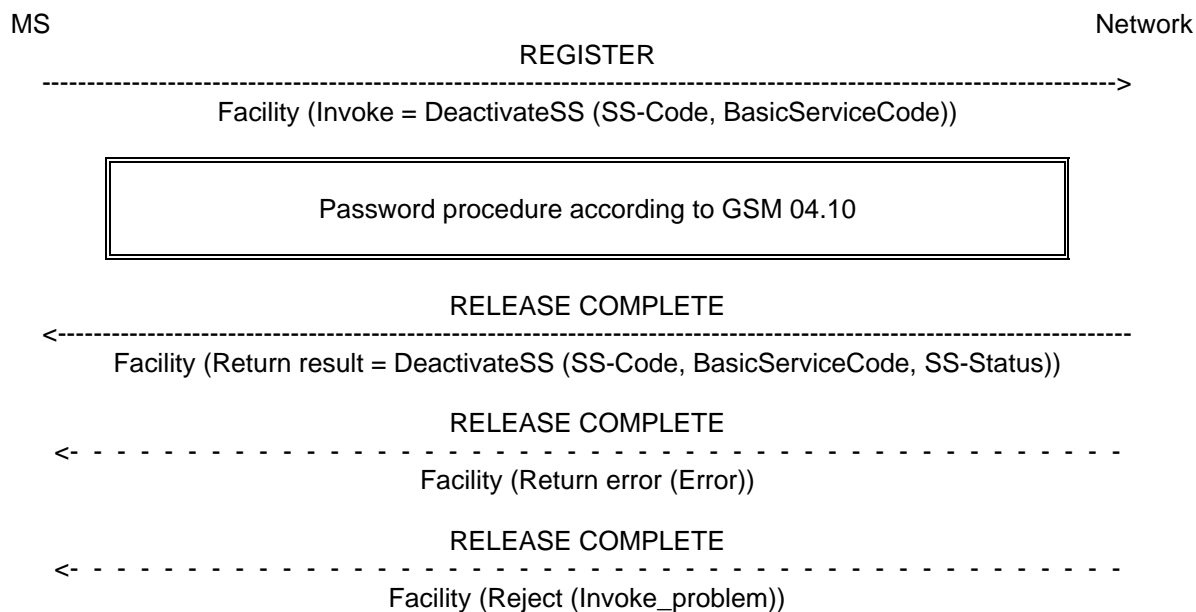


NOTE: The SS-Code may be one of the specific incoming barring codes, the common code for the incoming barring services, or the SS-Code for all call barring services. If BasicServiceCode is not included it applies to all basic services. The SS-Code and SS-Status may not be included in the result in all cases (see text).

Figure 2.3: Deactivation of barring of incoming calls

2.5 Interrogation

The interrogation procedure enables the mobile subscriber to obtain information about the data stored in the PLMN. After having requested this procedure the network shall return a list of all basic service groups for which the service is active (see figure 2.4).

If there is no basic service group for which the service is active, an SS-Status will be returned indicating that the service is "deactivated".

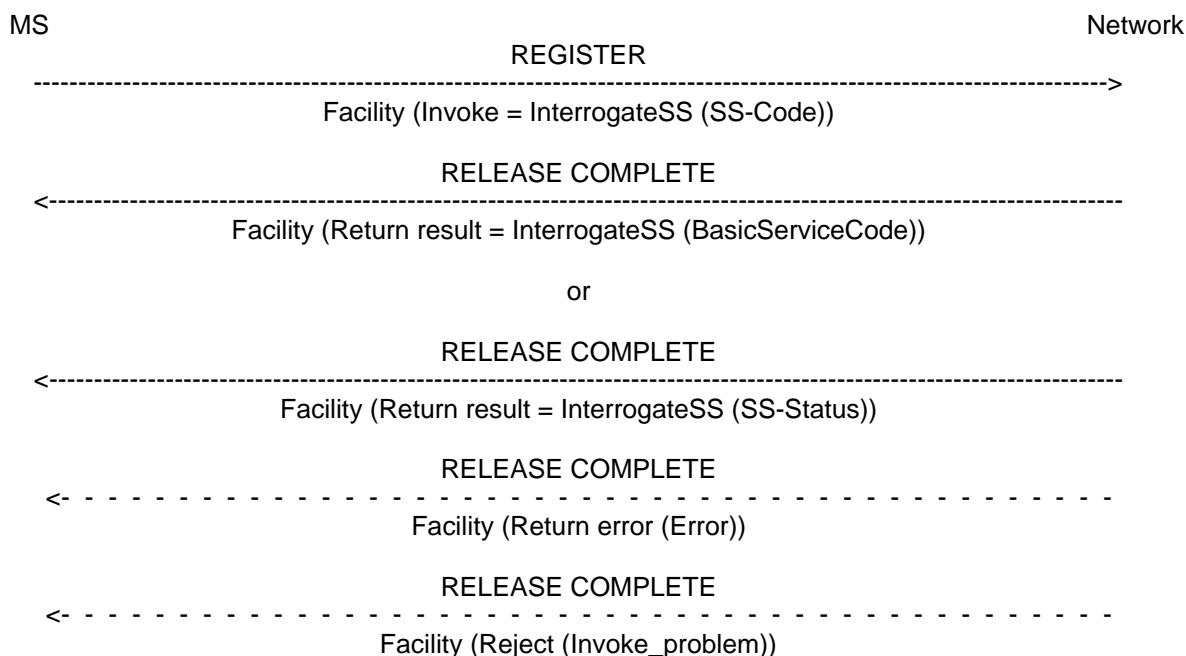

NOTE: The SS-Code may be one of the specific incoming barring codes.

Figure 2.4: Interrogation of a barring program

2.6 Invocation and erasure

Invocation and erasure are not applicable to barring programs.

2.7 Cross phase compatibility

2.7.1 Network only supports phase 1 control of SS by the subscriber

In this case there is no relevant cross phase compatibility problem.

2.7.2 MS only supports protocol version 1 control of SS by the subscriber

The NotifySS operation containing the SS-Status indicating that a barring program relating to incoming calls is currently active and operative shall be sent to the calling subscriber only in the RELEASE COMPLETE message, if the MS only supports phase 1.

Annex A (informative): Status of GSM 04.88

Status of Technical Specification GSM 04.88		
Date	Version	Remarks
Release 92	version 3.1.3	Last common phase 1/phase 2 version (I-ETS 300 029 = version 3.1.1)
June 1991	version 4.0.0	CR 04.88-15 rev 1 (category D) approved by GSM#31
Jan 1992	version 4.1.0	CR 04.88-16 (category C) approved by SMG#01
April 1992	version 4.2.0	CR 04.88-19 rev 2 (category B) approved by SMG#02 CR 04.88-20 (category D)
June 1992	version 4.3.0	CR 04.88-21 rev 1 (category C) approved by SMG#03
January 1993	version 4.4.0	CR 04.88-24 rev 1 (category C) approved by SMG#05 CR 04.88-26 rev 1 (category C) CR 04.88-27 (category C)
April 1993	version 4.5.0	CR 04.88-22 rev 2 (category B) approved by SMG#06 CR 04.88-28 rev 1 (category C) CR 04.88-29 rev 1 (category C) TS frozen for phase 2 by SMG#06
June 1993	version 4.6.0	CR 04.88-30 (category D) approved by SMG#07 CR 04.88-31 rev 2 (category F) CR 04.88-32 (category F)
October 1993	version 4.6.1	TS changed to draft prETS 300 571
October 1994	version 4.6.2	TS changed to final draft prETS 300 571
January 1995	version 4.6.3	TS changed to ETS 300 571 first edition
February 1996	version 4.7.0	CR 04.88-A001 (category F) approved by SMG#17
August 1996	version 4.7.1	TS changed to ETS 300 571 second edition
December 1996	version 5.0.0	GTS converted to draft prETS 300 956 for Release 96
May 1997	version 5.0.1	ETS 300 956 first edition
Text and figures: WinWord 6.0 Stylesheet: etsiw_60.dot		

History

Document history	
December 1996	Unified Approval Procedure UAP 61: 1996-12-16 to 1997-04-11
May 1997	First Edition