

**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**DRAFT**  
pr **ETS 300 959**

January 2000

Second Edition

---

Source: SMG

Reference: RE/SMG-020504QR1

ICS: 33.020

**Key words:** Digital cellular telecommunications system, Global System for Mobile communications (GSM)



**Digital cellular telecommunications system;  
Modulation  
(GSM 05.04 version 5.1.0 Release 1996)**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**Internet:** [secretariat@etsi.fr](mailto:secretariat@etsi.fr) - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000. All rights reserved.



## Contents

Intellectual Property Rights .....	5
Foreword.....	5
1 Scope .....	7
1.1 Normative references .....	7
1.2 Abbreviations .....	7
2 Modulation format.....	7
2.1 Modulating bit rate.....	7
2.2 Start and stop of the burst.....	7
2.3 Differential encoding .....	8
2.4 Filtering .....	8
2.5 Output phase .....	9
2.6 Modulation.....	9
Annex A (informative): Change control history.....	10
History.....	11

Blank page

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Foreword

This draft European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the One-step Approval Procedure phase of the ETSI standards approval procedure.

This ETS specifies the modulation format used within the digital cellular telecommunications system. This ETS corresponds to GSM 05.04 Phase 2 version 4.0.3. This ETS is a GSM technical specification version 5 and is part of the 1996 release of the GSM Technical Specifications.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE rules.

<b>Proposed transposition dates</b>	
Date of latest announcement of this ETS (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Blank page

## 1 Scope

The modulator receives the bits from the encryption unit, see GSM 05.01 [1], and produces an RF signal. The filtering of the Radio Frequency (RF) signal necessary to obtain the spectral purity is not defined, neither are the tolerances associated with the theoretical filter requirements specified. These are contained in GSM 05.05 [4].

### 1.1 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 350): "Digital cellular telecommunication system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 05.01: "Digital cellular telecommunication system (Phase 2+); Physical layer on the radio path General description".
- [3] GSM 05.02 (ETS 300 908): "Digital cellular telecommunication system (Phase 2+); Multiplexing and multiple access on the radio path".
- [4] GSM 05.05 (ETS 300 910): "Digital cellular telecommunication system (Phase 2+); Radio transmission and reception".

### 1.2 Abbreviations

Abbreviations used in this specification are listed in GSM 01.04 [1].


## 2 Modulation format

### 2.1 Modulating bit rate

The modulating bit rate is  $1/T = 1\ 625/6$  kbit/s (i.e. approximately 270,833 kbit/s).

### 2.2 Start and stop of the burst

Before the first bit of the bursts as defined in GSM 05.02 [3] enters the modulator, the modulator has an internal state as if a modulating bit stream consisting of consecutive ones ( $d_i = 1$ ) had entered the differential encoder. Also after the last bit of the time slot, the modulator has an internal state as if a modulating bit stream consisting of consecutive ones ( $d_i = 1$ ) had continued to enter the differential encoder. These bits are called dummy bits and define the start and the stop of the active and the useful part of the burst as illustrated in figure 1. Nothing is specified about the actual phase of the modulator output signal outside the useful part of the burst.

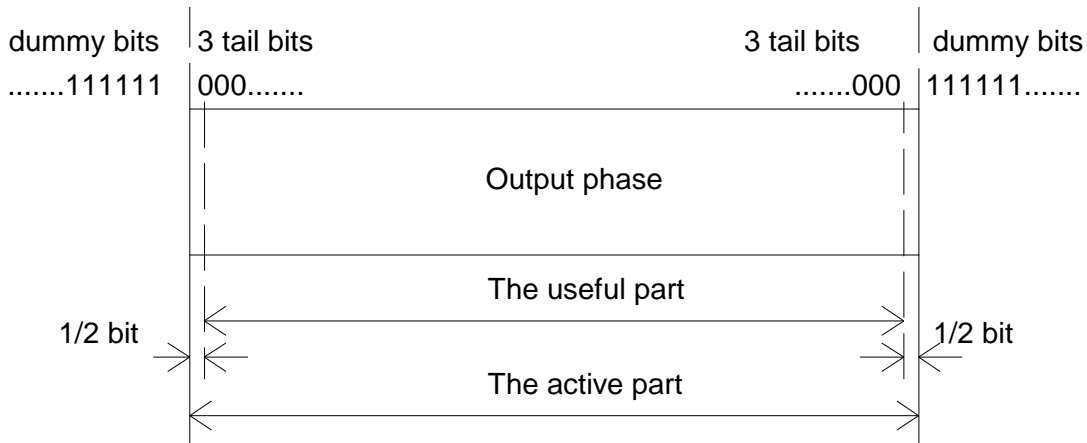

**Figure 1: Relation between active part of burst, tail bits and dummy bits. For the normal burst the useful part lasts for 147 modulating bits**

### 2.3 Differential encoding

Each data value  $d_i = [0,1]$  is differentially encoded. The output of the differential encoder is:

$$\hat{d}_i = d_i \oplus d_{i-1} \quad (d_i \in \{0,1\})$$

where  $\oplus$  denotes modulo 2 addition.

The modulating data value  $\alpha_i$  input to the modulator is:

$$\alpha_i = 1 - 2\hat{d}_i \quad (\alpha_i \in \{-1, +1\})$$

### 2.4 Filtering

The modulating data values  $\alpha_i$  as represented by Dirac pulses excite a linear filter with impulse response defined by:

$$g(t) = h(t) * \text{rect}\left(\frac{t}{T}\right)$$

where the function  $\text{rect}(x)$  is defined by:

$$\text{rect}\left(\frac{t}{T}\right) = \frac{1}{T} \quad \text{for } |t| < \frac{T}{2}$$

$$\text{rect}\left(\frac{t}{T}\right) = 0 \quad \text{otherwise}$$

and \* means convolution.  $h(t)$  is defined by:

$$h(t) = \frac{\exp\left(\frac{-t^2}{2\delta^2 T^2}\right)}{\sqrt{(2\pi)} \cdot \delta T}$$

where  $\delta = \frac{\sqrt{\ln(2)}}{2\pi BT}$  and  $BT = 0.3$



where  $B$  is the 3 dB bandwidth of the filter with impulse response  $h(t)$ , and  $T$  is the duration of one input data bit. This theoretical filter is associated with tolerances defined in GSM 05.05 [4].

## 2.5 Output phase

The phase of the modulated signal is:

$$\varphi(t') = \sum_i \alpha_i \pi h \int_{-\infty}^{t'-iT} g(u) du$$

where the modulating index  $h$  is 1/2 (maximum phase change in radians is  $\pi/2$  per data interval).

The time reference  $t' = 0$  is the start of the active part of the burst as shown in figure 1. This is also the start of the bit period of bit number 0 (the first tail bit) as defined in GSM 05.02 [2].

## 2.6 Modulation

The modulated RF carrier, except for start and stop of the TDMA burst may therefore be expressed as:

$$x(t') = \sqrt{\frac{2E_c}{T}} \cdot \cos(2\pi f_0 t' + \varphi(t') + \varphi_0)$$

where  $E_c$  is the energy per modulating bit,  $f_0$  is the centre frequency and  $\varphi_0$  is a random phase and is constant during one burst.

**Annex A (informative):**

**Change control history**

<b>SPEC</b>	<b>SMG</b>	<b>CR</b>	<b>PHA</b>	<b>VERS</b>	<b>NEW_VE</b>	<b>SUBJECT</b>
05.04	s30b	A003	R96	5.0.1	5.1.0	Correction of mistake for range alpha-sub-i in Clause 2.3

**History**

<b>Document history</b>	
December 1996	Unified Approval Procedure (First Edition) UAP 60: 1996-12-02 to 1997-03-28
May 1997	First Edition
January 2000	One-step Approval Procedure (Second Edition) OAP 200020: 2000-01-19 to 2000-05-19