

# ETSI TR 126 911 V5.1.0 (2003-03)

---

*Technical Report*

**Digital cellular telecommunications system (Phase 2+);  
Universal Mobile Telecommunications System (UMTS);  
Codec for Circuit switched Multimedia Telephony Service;  
Terminal Implementor's Guide  
(3GPP TR 26.911 version 5.1.0 Release 5)**

---



---

Reference

RTR/TSGS-0426911v510

---

Keywords

GSM, UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

[editor@etsi.org](mailto:editor@etsi.org)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2003.  
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup> and **UMTS**<sup>TM</sup> are Trade Marks of ETSI registered for the benefit of its Members.  
**TIPHON**<sup>TM</sup> and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.  
**3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

All published ETSI deliverables shall include information which directs the reader to the above source of information.

---

## Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp> .

---

# Contents

Intellectual Property Rights .....	2
Foreword.....	2
Foreword.....	4
1 Scope .....	5
2 References .....	5
3 Definitions, symbols and abbreviations .....	6
3.1 Definitions .....	6
3.2 Symbols.....	6
3.3 Abbreviations .....	6
4 General .....	7
5 Multiplex Protocol.....	7
5.1 H.223 Multiplex Transmission Bit Order.....	7
6 Control Protocol .....	8
6.1 Usage of DRAWING_ORDER-information for MPEG-4 video objects.....	8
7 Video Codec .....	8
7.1 General Recommendations .....	9
7.2 H.263 .....	9
7.3 Other Video Codecs .....	9
8 Audio Codec.....	10
8.1 AMR Codec.....	10
8.2 Other Audio Codecs .....	10
9 Data Protocols .....	11
10 Terminal Procedures.....	11
11 Interoperation with Other Terminals .....	11
11.1 Audio Codecs .....	11
12 DTE-DCE Interface.....	11
13 Optional Enhancements.....	11
14 Multipoint Considerations.....	11
15 Other Recommendations .....	11
<b>Annex A (informative): Change history .....</b>	<b>12</b>
History .....	13

---

## Foreword

This Technical Report has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document provides non-mandatory recommendations for the use of the different codec implementation options for the circuit switched multimedia telephony service which is based on ITU-T Recommendation H.324 [7], and Annex C of ITU-T Recommendation H.324 [7] in particular. These recommendations address issues specific to the 3G operating environment, including guaranteeing sufficient error resilience and interworking between terminals.

The contents of the present document are provided for information to assist in high quality implementation of multimedia telephony terminals. All references to "terminals" in this report are to terminals supporting the Circuit Switched Multimedia Telephony Service as described in [7-9].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] ITU-T Recommendation H.223 (1996): "Multiplexing protocol for low bit rate multimedia communication".
- [2] ITU-T Recommendation H.223 – Annex A (1998): "Multiplexing protocol for low bit rate multimedia mobile communication over low error-prone channels".
- [3] ITU-T Recommendation H.223 – Annex B (1998): "Multiplexing protocol for low bit rate multimedia mobile communication over moderate error-prone channels".
- [4] ITU-T Recommendation H.223 – Annex C (1998): "Multiplexing protocol for low bit rate multimedia mobile communication over highly error-prone channels".
- [5] ITU-T Recommendation H.245 (2000): "Control protocol for multimedia communication"
- [6] ITU-T Recommendation H.261 (1993): "Video codec for audiovisual services at px64 kbit/s"
- [7] ITU-T Recommendation H.324 (1998): "Terminal for low bitrate multimedia communication"
- [8] ITU-T Recommendation G.723.1 (1996): "Dual rate speech coder for multimedia communications transmitting at 5.3 and 6.3 kbit/s".
- [9] ITU-T Recommendation H.263 (1998): "Video coding for low bit rate communication"
- [10] 3GPP TS 26.110: "Codec for Circuit Switched Multimedia Telephony Service: General Description".
- [11] 3GPP TS 26.111: "Codec for Circuit Switched Multimedia Telephony Service, Modifications to H.324".
- [12] 3GPP TS 26.112: "Codec for Circuit Switched Multimedia Telephony Service; General description".
- [13] 3GPP TR 26.912: "Codec for Circuit Switched Multimedia Telephony Service; Quantitative performance evaluation of H.324 Annex C over 3G".
- [14] International Standard ISO/IEC 14496-2: "Information technology - Coding of audio-visual objects - Part 2: Visual".

- [15] ISO/IEC JTC1/SC29/WG11 MPEG 99/N2724: "MPEG-4 Applications", March 1999.
- [16] ITU-T Recommendation V.80: "In-band DCE control and synchronous data modes for asynchronous DTE".
- [17] 3rd Generation Partnership Project (3GPP), 3GPP TS 25.301, Radio Interface Protocol Architecture.

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**3G-324M terminal:** multimedia telephony terminal conforming to 3GPP TS 26.110 [10] and targeted for use in 3G mobile networks

**3G-324M codec:** implementation of ITU-T Recommendation H.324 [7] and all its elements adapted to the 3G environment (known as 3G-324M) is seen as a "codec" consisting of an encoder and a decoder

**3G-324M encoder:** encoder part of the 3G-324M codec

**3G-324M decoder:** decoder part of the 3G-324M codec

### 3.2 Symbols

(void)

### 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

<b>AL1,2,3:</b>	ITU-T Recommendation H.223 [2] Adaptation layers 1, 2 and 3 (see [1])
<b>AL-SDU:</b>	Adaptation Layer Service Data Unit (see [1])
<b>AMR:</b>	Adaptive Multi-Rate (Audio Codec)
<b>CIF:</b>	Common Intermediate Format (a picture format for Video Codec)
<b>CRC:</b>	Cyclic Redundancy Check
<b>DCE:</b>	Data Circuit-terminating Equipment
<b>DTE:</b>	Data Terminal Equipment
<b>GOB:</b>	Group of blocks (a sub-part of a video picture)
<b>GSM:</b>	Global System for Mobile communications
<b>GSTN:</b>	General Switched Telephone Network
<b>ISDN:</b>	Integrated Services Digital Network
<b>ITU-T:</b>	International Telecommunication Union – Telecommunication Standardization Sector
<b>MUX-PDU:</b>	Multiplex Packet Data Unit (see [1])
<b>PSC:</b>	Picture start code (synchronization field for Video Codec)
<b>QCIF:</b>	Quarter CIF (a picture format for Video Codec)
<b>RVLC:</b>	Reversible Variable Length Code (see [11])
<b>SQCIF:</b>	Sub QCIF (a picture format for Video Codec)
<b>T401:</b>	Acknowledgement timer used by ITU-T Recommendation H.245 [5] implementations
<b>VOP:</b>	Video Object Plane (see [11])

---

## 4 General

The following clauses give implementation recommendations for different parts of the 3G-324M codec. The clause division loosely follows the structure of ITU-T Recommendation H.324 [7].

Most of the recommendations in the present document assume that both transmitting and receiving terminals operate within the 3G system and conform to 3G-324M specifications in [7-9]. Clause 11 additionally includes recommendations relevant for interoperability between 3G-324M terminals and other terminals.

The recommendations are primarily targeted for such aspects of the codec implementation which have a significant effect on the quality perceived by the user at the other end of the connection which usually implies emphasizing encoder recommendations over decoder recommendations, although this division cannot be made in all cases. It should be recognized that the ITU-T Recommendation H.324 [7] specification leaves substantial amount of freedom for terminal implementations and no definite quality guarantee can be given even if all recommendations in the present document are followed.

---

## 5 Multiplex Protocol

Multiplexing of video, audio, data, and control information is based on the ITU-T Recommendation H.223 [1]. The following general guidelines are recommended to be followed in the implementation of ITU-T Recommendation H.223 [1].

MUX-PDU size should be limited to be smaller than in typical GSTN use. Specific values depend on the bit-rate and channel characteristics, but suitable upper limits for MUX-PDU size are often in the range of 100-200 octets.

Encoders are recommended to support the boolean ITU-T Recommendation H.245 [5] *maxMUXPDUSizeCapability* (clause 7.2.2.4 of [2] Version 3) to indicate that they are able to restrict the size of the MUX-PDUs that they transmit. Decoders are recommended to utilize the *maxH223MUXPDUsize* ITU-T Recommendation H.245 [5] command (clause 7.11.5 of [2] Version 3) to restrict the size of the MUX-PDUs, sent by the encoder, to a maximum of the specified number of octets.

ITU-T Recommendation H.324 [7] mandates that ITU-T Recommendation H.263 [9] encoders shall align picture start codes (PSC) with the start of an AL-SDU (see [4], clause 6.6.1). It is here further recommended that AL-SDUs that do not start with a PSC should start with a GOB header to improve error resilience.

No more than 1-3 audio frames should be included in one MUX-PDU to avoid excessive delay.

Use of the optional retransmission procedure for video when using Adaptation Layer Type 3 (AL3) is not recommended due to delay considerations. This recommendation implies that receiving terminals should not send retransmission requests. It is recommended that terminals support video also using Adaptation Layer Type 2 (AL2) where retransmission is not possible and overhead is slightly smaller.


The ITU-T Recommendation H.223 [1] abort procedures should not be used (see ITU-T Recommendation H.223 [1] clauses 6.4.3, 7.2.3, 7.3.4, and 7.4.4).

### 5.1 H.223 Multiplex Transmission Bit Order

H.223 multiplex transmission bit order is defined in H.223 [1] Sec 3.2.2 as LSB first. This first bit is transparently mapped to the first bit of "higher layer PDU" depicted in 5.3.5 of TS25.301 [17], and vice versa.

An example is given by the following figure:



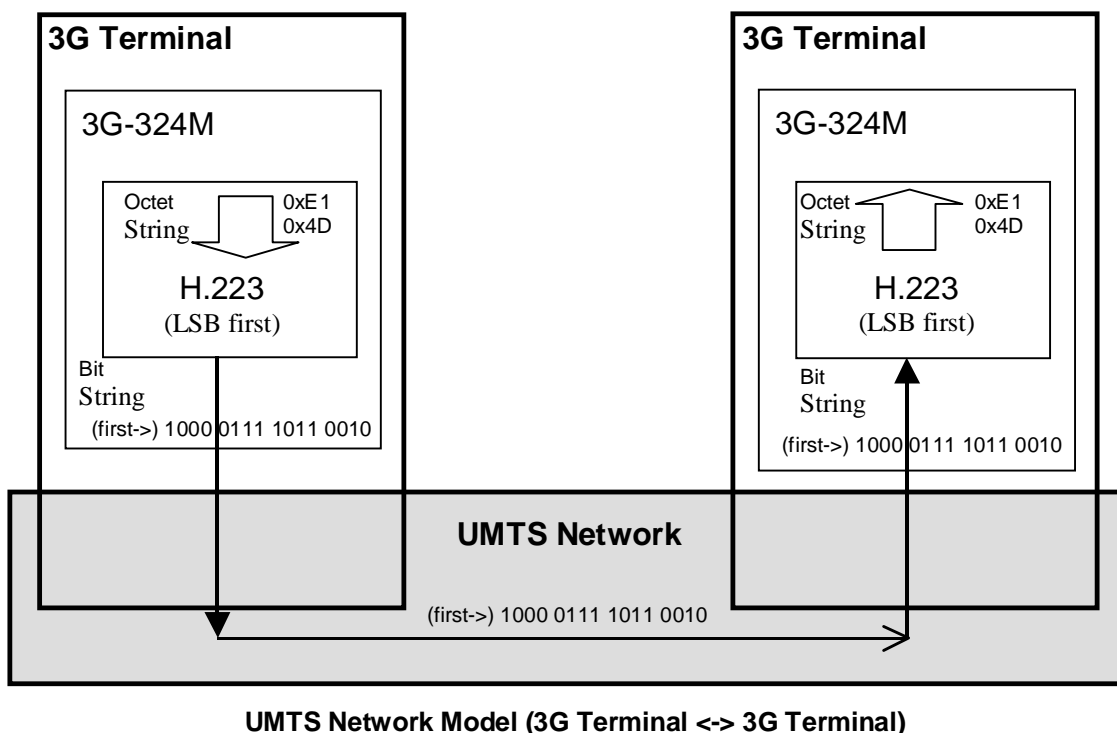

## 6 Control Protocol

It is recommended that terminals support the latest possible version of ITU-T Recommendation H.245 [5]. Capability to support latest improvements in ITU-T Recommendation H.324 [7] are usually dependent on supporting the corresponding signalling in ITU-T Recommendation H.245. [5] Most of the recommendations in the present document require support for at least ITU-T Recommendation H.245 [5] Version 3 and some require even newer versions.

Recommendations for the control protocol are not limited to this clause of the present document. Other clauses of the present document give recommendations for the different parts of the terminal often implying corresponding support from ITU-T Recommendation H.245 [5]. These recommendations are not replicated in this clause, but they should still be interpreted as recommendations for the ITU-T Recommendation H.245 [5] control protocol implementation.

The end-to-end transmission delay in the 3G system is expected to be somewhat higher than in GSTN. This will need to be considered for timer settings in connection with the ITU-T Recommendation H.245 [5] implementation. For that reason, ITU-T Recommendation H.324 [7] Annex C (and hence also 3G-324M) mandates the use of ITU-T Recommendation H.324 [7] Annex E for initializing the timer T401. The following additional guidelines for initializing and updating the timer T401 should be considered: ffs

### 6.1 Usage of DRAWING\_ORDER-information for MPEG-4 video objects

3G-324M decoders should ignore any drawing order information as signalled by ITU-T Recommendation H.245 [5] drawingOrder Capability, see table E.5 in ITU-T Recommendation H.245 [5], if the MPEG-4 simple profile level 1 is used.

## 7 Video Codec

This clause gives recommendations for the video codec implementations within 3G-324M terminals. Clause 7.1 is applicable to the use of any mandatory or optional video codec. Clause 7.2 includes specific recommendations for using the ITU-T Recommendation H.263 [9] codec. Clause 7.3 gives specific recommendations for the use of MPEG-4 and other possible optional video codecs.

## 7.1 General Recommendations

Regardless of which specific video codec standard is used, all video decoder implementations should include basic error concealment techniques. These techniques may include replacing erroneous parts of the decoded video frame with interpolated picture material from previous decoded frames or from spatially different locations of the erroneous frame. The decoder should aim to prevent the display of substantially corrupted parts of the picture. In any case, it is recommended that the terminal should tolerate *every* possible bitstream without catastrophic behaviour (such as the need for a user-initiated reset of the terminal).

3G-324M encoders and decoders are recommended to support the 1:1 pixel format (square format) . Encoders should signal this capability using ITU-T Recommendation H.245 [5] capability exchange and the appropriate header fields in video codecs so that unnecessary pixel shape conversions can be avoided.

## 7.2 H.263

Several of the optional annexes of ITU-T Recommendation H.263 [9] are useful for improving the compression efficiency and error resilience of the codec. The annexes below form a balanced set of tools with respect to error robustness, compression efficiency, quality, and complexity. It is recommended that an ITU-T Recommendation H.263 [9] video decoder should support the following annexes. The main feature of each annex is also mentioned:

- Annex I (Advanced Intra Coding), improves error resilience and compression efficiency.
- Annex J (Deblocking Filter), improves compression efficiency.
- Annex K (Slice Structure Mode, without RS submodule), improves error resilience.
- Annex T (Modified Quantizer), improves compression efficiency.

Non-empty GOB headers should be used frequently to improve error resilience (see [6], Clause 5.2).

ITU-T Recommendation H.263 [9] encoders in 3G-324M terminals should respond to all videoFastUpdate commands received via the ITU-T Recommendation H.245 [5] control channel (i.e., videoFastUpdatePicture, videoFastUpdateGOB, and videoFastUpdateMB presented in clause 7.11.5 of [2] Version 3). Using this feedback information to make a focused picture update can significantly improve the error performance of the codec. 3G-324M decoders are correspondingly recommended to transmit videoFastUpdate commands when the received picture is detected to be significantly corrupted due to transmission errors.

It is recommended that ITU-T Recommendation H.263 [9] decoders take advantage of the GOB and slice header GOB Frame ID (GFID) field in recovering corrupted picture header data (see Clauses 5.2.5 and K.2 of ITU-T Recommendation H.263 [9] recommendation version 2). For this purpose it is recommended that ITU-T Recommendation H.263 [9] encoders should not use the Rounding Type (RTYPE) bit of the extended picture header as described in Clause 5.1.4.3 of [1]. The RTYPE bit should always be set to 0 since it otherwise effectively prevents the use of the GFID field for picture header recovery.

## 7.3 Other Video Codecs

It is recommended that all 3G-324M terminals additionally support the ISO/IEC 14496-2 [14] (MPEG-4 Visual) video codec [11]. The explanatory text below gives justification and further detail for this recommendation.

One of the main target environments for MPEG-4 Visual is mobile use. For this purpose the following error resilient techniques have been adopted in MPEG-4 Visual: Resynch Marker, Header Extension Code, Data Partitioning, and Reversible Variable Length Code. With these techniques MPEG-4 Visual codec can be used over errorprone channels enabling highly efficient low delay multimedia communication services for 3G networks. Support for MPEG-4 Visual potentially provides capabilities for communicating with heterogeneous networks without transcoding, or reusing pictures/video from 3G multimedia telephony service by different applications and vice versa.

MPEG-4 Visual and ITU-T Recommendation H.263 [9] have substantial technical similarities. MPEG-4 Visual also includes support for the ITU-T Recommendation H.263 [9] baseline codec.

Because of multi-functionality of MPEG-4 Visual, subsets of different tools have been defined in order to allow effective implementations of the standard. These subsets, called "Profiles", limit the tool set which shall be

implemented. For each of these Profiles one or more Levels have been set to restrict the computational complexity of implementations. It is here recommended that the Simple Visual Profile @ Level 0 is supported to achieve adequate error resilience for transmission error and low complexity simultaneously. No other Profiles are recommended to be supported. Higher Levels for the Simple Visual Profile may be supported depending on the terminal capabilities.

MPEG-4 Visual accepts various sizes of input picture within the capability specified from the Profile and Level. Picture size of QCIF for Level 1 should be used for the sake of interoperability.

All of the error resilience tools in Simple Visual Profile are recommended to be activated.

Resync Marker is a tool which increases the opportunities for the decoder to resynchronize with the bitstream and after loss of synchronization due to errors in the bitstream, thus enabling normal decoder operation to continue. The encoder should insert Resync Marker in the bitstream, in order to enable the decoder to search for the Resync Marker in addition to the Start Code.

Header Extension Code (HEC) enables independent decoding of each video packet. One or more than one video packet in a VOP should have HEC in order for the decoder to utilize information derived from HEC, to avoid discarding a whole VOP when the VOP header could not be received.

Data Partitioning is a tool that separates the information within a video packet to improve the degree of error localization and concealment. When the decoder detect errors in a video packet, the decoder may not discard whole the packet if themotion information or the I-VOP DC coefficients are decoded correctly. The decoder may reconstruct the corresponding part of the picture utilizing the above motion information or DC coefficients. The encoder should use Data Partitioning syntax in order to enable the decoder the above operation.

Reversible Variable Length Code (RVLC) is a tool which reduce the number of discarded bits.. RVLC decoding operation as described in clause E.1.4 of Annex E in [11] may be performed. The encoder should utilize RVLC to enable the decoder to perform such operation.

In addition to these tools, Intra Refresh should be inserted in order to prevent inter-frame propagation of errors. Adaptive Intra Refresh (AIR) described in clause E.1.5 in Annex E of [11] should be used in conjunction with cyclic Intra Refresh.

One Video Packet of MPEG-4 Visual should be mapped to one AL-SDU of ITU-T Recommendation H.223 [1] Adaptive Layer.

When an incoming bi-directional openLogicalChannel request has unsuitable reverse parameters for the local encoder, e.g., unsuitable MPEG-4 decoderConfigurationInformation, the terminal should reject the request. The cause field of openLogicalChannelReject should be set to value unsuitableReverseChannelParameters. A new openLogicalChannel request should be sent to the other end, now using the forward channel parameters of the rejected request as reverse channel parameters, and specifying new preferred forward channel parameters.

All MPEG-4 encoders should accept and respond to ITU-T Recommendation H.245 [5] videoTemporalSpatialTradeOff commands. Support for temporal-spatial trade-off cannot be signaled for MPEG-4 encoders, but the encoders should provide that support by default. MPEG-4 decoders are encouraged to utilize the videoTemporalSpatialTradeOff command. The specific response to the TemporalSpatialTradeOff command by MPEG-4 encoders is not defined and it is up to the implementation to decide how to respond to the command.

---

## 8 Audio Codec

### 8.1 AMR Codec

FFS. This clause will include guidance on how to utilize the different modes of the AMR codec.

### 8.2 Other Audio Codecs

FFS.

---

## 9 Data Protocols

FFS.

---

## 10 Terminal Procedures

FFS.

---

## 11 Interoperation with Other Terminals

### 11.1 Audio Codecs

It is recommended that terminals additionally support the ITU-T Recommendation G.723.1 [8] audio codec [5] when it is expected that interoperability with GSTN is needed, because it cannot be guaranteed that ITU-T Recommendation H.324 [7] terminals developed for GSTN use will support the AMR codec.

---

## 12 DTE-DCE Interface

It is recommended to use procedures defined in ITU-T Recommendation V.80 [16] in the DTE-DCE interface in case of non-integrated videophone terminal implementations with separate DTE and DCE devices. Due to the requirements of 3G-324M, the transparent synchronous access mode is the only relevant submode.

---

## 13 Optional Enhancements

FFS.

---

## 14 Multipoint Considerations

FFS.

---

## 15 Other Recommendations

FFS.

---

## Annex A (informative): Change history

Change history							
Date	TSG SA#	TSG Doc.	CR	Rev	Subject/Comment	Old	New
12-2000	10	SP-000579	007		Annex K submodes of ITU-T Recommendation H.263 [9] video codec for 3G-ITU-T Recommendation H.324 [7] specification	3.2.1	4.0.0
03-2001	11	SP-010109	010	1	ITU-T Recommendation V.80 [16] support for 3G terminals	4.0.0	4.1.0
06-2002	16				Version for Release 5		5.0.0
03-2003	19	SP-030093	013		Clarification of bit-order handling for 3G-324M terminals	5.0.0	5.1.0

---

# History

<b>Document history</b>		
V5.0.0	June 2002	Publication
V5.1.0	March 2003	Publication