

ETSI TR 136 927 V12.0.0 (2014-09)



**LTE;
Evolved Universal Terrestrial Radio Access (E-UTRA);
Potential solutions for energy saving for E-UTRAN
(3GPP TR 36.927 version 12.0.0 Release 12)**



Reference

RTR/TSGR-0336927vc00

Keywords

LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**may not**", "**need**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

| | |
|---|-----------|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Modal verbs terminology..... | 2 |
| Foreword..... | 4 |
| Introduction | 5 |
| 1 Scope | 6 |
| 2 References | 7 |
| 3 Definitions, symbols and abbreviations | 8 |
| 3.1 Definitions | 8 |
| 3.2 Symbols..... | 8 |
| 3.3 Abbreviations | 8 |
| 4 General | 9 |
| 5 Inter-RAT energy saving | 10 |
| 5.1 Study on inter-RAT scenario 1 | 10 |
| 5.1.1 Description of scenario 1 | 10 |
| 5.1.2 Energy saving procedures | 10 |
| 5.1.2.1 OAM-based solution for E-UTRAN cell entering or waking up from dormant mode..... | 10 |
| 5.1.2.2 Signalling based solution for E-UTRAN cell entering or waking up from dormant mode..... | 11 |
| 5.1.2.3 How to exit dormant mode efficiently?..... | 11 |
| 5.1.3 Evaluations and comparisons..... | 12 |
| 5.1.4 Conclusions..... | 13 |
| 6 Inter-eNB energy saving | 14 |
| 6.1 Study on inter-eNB scenario 1 | 14 |
| 6.1.1 Description of scenario 1 | 14 |
| 6.1.2 Energy Saving Procedures | 14 |
| 6.1.2.1 Baseline Rel-9 mechanisms | 14 |
| 6.1.2.2 How to exit dormant mode efficiently | 14 |
| 6.1.3 Evaluations and comparisons..... | 15 |
| 6.1.4 Conclusions..... | 16 |
| 6.2 Study on inter-eNB scenario 2 | 17 |
| 6.2.1 Description of scenario 2 | 17 |
| 6.2.2 Energy saving procedures | 17 |
| 6.2.2.1 OAM-based solution for E-UTRAN cell entering or waking up from dormant mode..... | 17 |
| 6.2.2.2 Signalling based solution for E-UTRAN cell entering or waking up from dormant mode..... | 18 |
| 6.2.2.3 Hybrid O&M and signalling based solution for E-UTRAN cell entering or waking up from dormant mode | 18 |
| 6.2.3 Evaluations and comparisons..... | 18 |
| 6.2.4 Conclusions..... | 19 |
| 7 Intra-eNB energy saving | 20 |
| 7.1 Intra-eNB Scenario..... | 20 |
| 7.2 Potential solutions and Evaluations..... | 20 |
| 7.2.1 Configuring MBSFN subframes within the range supported according to current specification limitation..... | 20 |
| 7.2.2 Configuring DwPTS in subframe 1 and 6 to the minimum length | 20 |
| Annex A (informative): Evaluation Criteria | 21 |
| Annex B (informative): Change History | 22 |
| History | 23 |

Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

At present, sustainable development is a long-term commitment for all people in the world. This means not only development but also innovation. People should do their best to handle the resource shortage and environment deterioration. Therefore, how to improve the power efficiency and realize the power saving becomes a significant issue.

In the telecom area, most mobile network operators aim at decreasing the power consumption without too much impact on their network. In this case, the greenhouse emissions are reduced, while the OPEX of operators is saved.

Thus, the power efficiency in the infrastructure and terminal becomes an essential part of the cost-related requirements in network, and there is a strong need to investigate possible network energy saving solutions.

1 Scope

The present document is the technical report for the study item on Network Energy Saving for E-UTRAN, which was approved at TSG RAN#47. The objective of the SI is to first identify the relevant scenarios and then study and present the solutions that are applicable to EUTRAN energy saving. Furthermore, initial evaluation should be performed for each solution.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] RP-100674: "Network Energy Saving for E-UTRAN ", CMCC.
- [3] 3GPP TS 36.214: "Physical layer; Measurements ".
- [4] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access (E-UTRAN); Overall description; Stage 2".
- [5] 3GPP TS 36.331: "E-UTRA; RRC; Protocol specification Release 10".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

3.2 Symbols

For the purposes of the present document, the following symbols apply:

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

| | |
|---------|--|
| eNB | enhanced NodeB |
| EPC | Evolved Packet Core |
| E-UTRAN | Evolved UTRAN |
| ES | Energy Savings |
| ESM | Energy Savings Management |
| FFS | For Further Specification |
| IoT | Interference over Thermal |
| LTE | Long Term Evolution |
| OAM | Operations, Administration, Maintenance |
| OPEX | Operating Expenses |
| RAN | Radio Access Network |
| SON | Self-Organizing Networks |
| TRX | Transceiver |
| UMTS | Universal Mobile Telecommunications System |
| UTRAN | Universal Terrestrial Radio Access Network |

4 General

The objective of this study item is to identify potential solutions for energy saving in E-UTRAN and perform initial evaluation of the proposed solutions, so that a subset of them can be used as the basis for further investigation and standardization.

The following use cases will be considered in this study item as defined in RP-100674 [2]:

- Intra-eNB energy saving
- Inter-eNB energy saving
- Inter-RAT energy saving

Energy saving solutions identified in this study item should be justified by valid scenario(s), and based on cell/network load situation. Impacts on legacy and new terminals when introducing an energy saving solution should be carefully considered. The scope of the study item shall be as follows:

- User accessibility should be guaranteed when a cell transfers to energy saving mode
- Backward compatibility and the ability to provide energy saving for Rel-10 network deployment that serves a number of legacy UEs
- Solutions shall not impact the Uu physical layer
- The solutions should not impact negatively the UE power consumption

Note that energy saving for HeNB is out of the scope of this study item.

5 Inter-RAT energy saving

5.1 Study on inter-RAT scenario 1

5.1.1 Description of scenario 1

Networks may consist of LTE cells deployed as capacity enhancement, overlaying existing and optimized 2G/3G network.

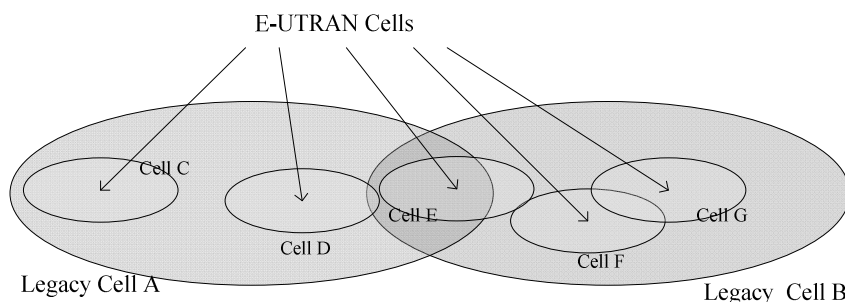


Figure 5.1.1-1. Inter-RAT energy saving scenario 1

Figure 5.1.1.1 shows scenario 1 in which E-UTRAN Cell C, D, E, F and G are totally covered by the same legacy RAT Cell A and B (e.g. UMTS or GSM). Cell A/B has been deployed to provide basic coverage of the services in the area, while other E-UTRAN cells boost the capacity.

The E-UTRAN cells are only deployed for capacity enhancement at some hot spots, therefore, the continuity of LTE coverage could not be guaranteed. The legacy network provides the basic coverage, for UEs with multi-mode capability.

The energy saving solutions for this scenario should only be considered in case the E-UTRAN is jointly deployed with legacy RAT (e.g. UMTS or GSM). It is up to operator's policy whether service for LTE-only capable devices needs to be maintained.

If all cells have the same multiple PLMNs in a network sharing scenario, there are no issues with the solutions to scenario 1. Limitations related to other network sharing scenarios are not included within this Study Item.

5.1.2 Energy saving procedures

To achieve energy savings in this inter-RAT energy savings scenario, two fundamental approaches, which differ in how capacity-booster E-UTRAN cells enter or wake up from dormant mode, can be used. These approaches are:

1. OAM-based approach
2. Signalling-based approach

Furthermore, the energy saving policy may prefer not to switch off the E-UTRAN cells that are in an overlapping area between two or more basic coverage cells (handover region).

5.1.2.1 OAM-based solution for E-UTRAN cell entering or waking up from dormant mode

The approach is based on the complete set or a subset of following principles:

- E-UTRAN cells enters or leaves dormant mode based on centralized OAM decisions, which are made based on statistical information obtained from coverage and/or GERAN/UTRAN/E-UTRAN cells, e.g. load information, traffic QCI, etc The OAM decisions can be pre-configured or directly signalled to the EUTRAN cells.
- If an E-UTRAN cell enters or leaves dormant mode, its intra/inter-RAT neighbour nodes should be informed either via OAM or signalling.

5.1.2.2 Signalling based solution for E-UTRAN cell entering or waking up from dormant mode

The approach is based on the complete set or a subset of following principles:

- E-UTRAN cells may decide to enter dormant mode autonomously or based on information exchanging with the UTRAN/GERAN coverage cell.
- Switch off decisions/requests will be based on information locally available in the EUTRAN node, including load information of both the coverage and E-UTRAN cells.
- Switch-on may be performed based upon requests from one or more neighbour inter-RAT nodes, or based on internal EUTRAN node policies (periodic switch on, max switch off time, etc.).
- Intra-RAT and Inter-RAT neighbour nodes should be informed after on/off decision is made.
- To perform energy saving more efficiently, some energy saving parameters may be exchanged between inter-RAT neighbour cells if required, e.g. traffic thresholds, time duration, power consumption and so on.

5.1.2.3 How to exit dormant mode efficiently?

Solution A: No assistance

When some E-UTRAN cells are in dormant mode and the load increases on the UTRAN/GERAN coverage cells, the UTRAN/GERAN coverage cells may not know the most appropriate E-UTRAN cells to wake-up. The overloaded coverage cells may request wake-up of one or more of the neighbouring dormant E-UTRAN cells. The final decision to leave dormant mode is however taken by the E-UTRAN cell based on information locally available.

Some possible enhancements to optimize switch on decisions are reported below, whereby the actual 'switch on' decision algorithm implementation could be based on one or several of these enhancements:

Solution B: OAM predefined "low-load periods" policies

When the coverage UTRAN/GERAN cell detects high load, it uses a proprietary algorithm to decide which E-UTRAN cells should be activated.

The algorithm could rely on pre-defined "low-load periods" policies for each neighbour E-UTRAN cell. The "low-load periods" information can first be derived from OAM based performance counters, and then the decision implemented in the coverage cell.

Solution C: IoT measurements

When the coverage UTRAN/GERAN cell detects high load, it can request some dormant E-UTRAN cells to switch on their listening capability to perform and report Interference over Thermal (IoT) measurements as defined in TS 36.214 [3].

Solution D: UEs measurements

When the coverage UTRAN/GERAN cell detects high load, it can request some dormant E-UTRAN cells to transmit the pilot signal (e.g. reference signal in LTE) for at least a short time interval i.e. the so-called "probing" interval. After this interval, all or some E-UTRAN cells will return to dormant mode. The UEs covered by the coverage cell will be configured to perform Reference Signal (RS) measurements from the E-UTRAN cells during this interval and send feedback (the same approach as defined for mobility purposes in TS 36.331 [5] could be used). Based on the measurement results, the UTRAN/GERAN coverage cell will then determine which E-UTRAN cells should be switched on.

Solution E: Positioning information

When the coverage UTRAN/GERAN cell detects high load, it can use a combination of UEs locations, cell locations, and cell radii/transmit powers in deciding which E-UTRAN cells should be switched on (e.g. cells that cover the UEs).

Furthermore, a timer value can be included in the activation request message sent from the UTRAN/GERAN coverage cell to the selected E-UTRAN cells. At the expiry of this timer, each cell verifies if the condition required for staying on has been met, and if not, it autonomously switches off again.

5.1.3 Evaluations and comparisons

In this section of the TR, the described cell switching procedures for Energy Saving are evaluated and compared. In addition, all enhancements for signalling-based cell switching approach are also evaluated.

| Criteria | Cell switch on/off based on centralized OAM decisions | Cell switch on/off based on signalling across RATs; assistance for switch on decisions base on: | | | | |
|-------------------------|--|---|--|---|--|---|
| | | No assistance | OAM Predefined "low load periods" policies | IoT measurements | UE measurements | Positioning information |
| Feasibility | Feasible | Feasible | Feasible | Feasible | Feasible. | Feasible |
| Applicability | Applicable | Applicable | Applicable | Applicable | Applicable | Applicable |
| Backward compatibility | Yes | Yes | Yes | Yes | Yes | Yes |
| Complexity (*Note 1) | Medium: - Common O&M or synchronised O&M between RATs is required. - complexity also depends on the requested level of information to be provided from the RAN to O&M. | Medium: - Additional network signalling is needed for activate and deactivate unnecessary cells. | Medium: - OAM sync is not needed. - Statistics information is needed. | High: - IoT measurements of legacy RAT is needed in the hotspot cell in ES mode. | High: - Creation of a new cell state (probing phase) for neighbour relation handling | Medium: - need to collect position information for significant number of UEs. |
| Potential ES gain | OAM based solution is relatively static | In the worst case some neighbouring sleeping eNBs may be turned on even if these eNBs are not useful. | It has the risk of statistic information is unable to reflect the real conditions. | Possibly limited accuracy of IoT measurement and thresholds may reduce the efficiency of the method. Accuracy could be increased at the cost of complexity | The most useful cells could be selected, at the cost of introduction of an intermediate probing state where the cell is not fully functioning and cannot accept handover. Energy consumption during the probing phase may reduce its gain. | Since UE positions and link budgets are not fully correlated, the method may therefore have a limited efficiency. Additional gain could be obtained at the cost of complexity |

| | | | | | | |
|----------------------|----------------------------------|--|--|--|--|---|
| Specification impact | No impact on RAN specifications. | Inter-RAT signalling for cell switching on/off | Inter-RAT signalling for cell switching on/off | -Inter-RAT signalling for cell switching on/off - IoT measurements reporting may be added for accuracy. | Inter-RAT signalling for cell switching on/off and probing trigger | Inter-RAT signalling for cell switching on/off |
| OAM impact | High | Low | Medium | Low | Low | Medium because location and coverage information is needed. |
| eNB impact | Not foreseen | Low | Low | High, because additional UL receiver | Medium, new "probing" cell state. | Low |
| UE impact | Not foreseen. | Not foreseen. | Not foreseen. | Not foreseen. | Negligible, additional measurements will be required during probing phase. | None to low depending on the positioning mechanism |

*Note1: OAM Sync means OAM for different RAT should be synchronized.

5.1.4 Conclusions

Both OAM-based approach and Signalling-based approach are feasible, applicable and backward compatible for improving energy efficiency in inter-RAT scenario.

Enhancement solutions on how to exit dormant mode efficiently are feasible, applicable and backward compatible.

6 Inter-eNB energy saving

6.1 Study on inter-eNB scenario 1

6.1.1 Description of scenario 1

When operators deploy the LTE network, one possible application scenario of energy saving is described hereafter.

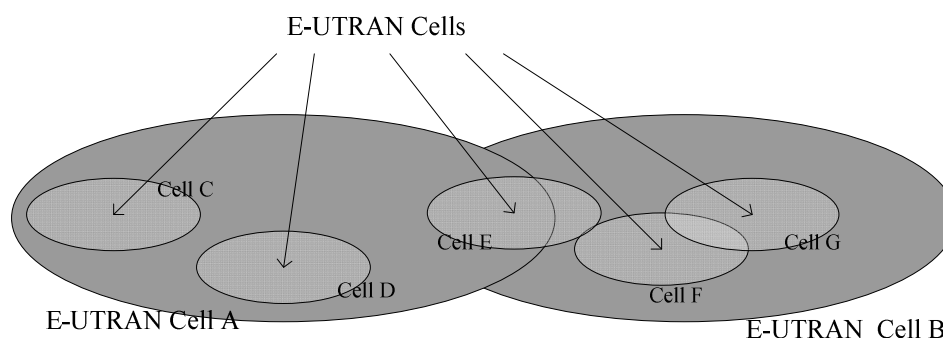


Figure 6.1.1-1. Inter-eNB scenario 1 for energy saving

Figure 6.1.1-1 shows scenario 1 in which E-UTRAN Cell C, D, E, F and G are covered by the E-UTRAN Cell A and B. Here, Cell A and B have been deployed to provide basic coverage, while the other E-UTRAN cells boost the capacity. When some cells providing additional capacity are no longer needed, they may be switched off for energy optimization. In this case, both the continuity of LTE coverage and service QoS is guaranteed.

If all cells have the same multiple PLMNs in a network sharing scenario, there are no issues with the solutions to scenario 1. Limitations related to other network sharing scenarios are not included within this Study Item.

In general, inter-eNB energy saving mechanisms should preserve the basic coverage in the network.

6.1.2 Energy Saving Procedures

6.1.2.1 Baseline Rel-9 mechanisms

A signalling-based mechanism to achieve energy savings in the inter-eNB scenario 1 has already been specified in Rel-9 as captured in TS 36.300 [4].

In the following some proposed enhancements to the Rel-9 solution are discussed.

6.1.2.2 How to exit dormant mode efficiently

When some E-UTRAN hotspot cells are not active and the load increases on the E-UTRAN, the E-UTRAN coverage cells may not know the most appropriate E-UTRAN cells to wake-up. The overloaded coverage cells may request wake-up of one or more of the neighbouring dormant E-UTRAN cells. The final decision to leave dormant mode is however taken by the E-UTRAN cell based on information locally available.

Some possible enhancements to optimize switch on decisions are reported below, whereby the actual 'switch on' decision algorithm implementation could be based on one or several of these enhancements:

Solution A: OAM predefined "low-load periods" policy

When the coverage cell detects high load, it uses a proprietary algorithm to decide which hotspot cells should be activated. The algorithm could rely on pre-defined "low-load periods" for each neighbour hotspot cell. The "low-load periods" information can first be derived from OAM based performance counters, and then configured in the coverage cell.

Solution B: IoT measurement

When the coverage cell detects high load, it can request some dormant hotspot cells to switch on their listening capability to perform and report Interference over Thermal (IoT) measurements as defined in TS 36.214 [3].

Solution C: UEs measurement

When the Coverage cell detects high load, it can request some dormant hotspot cells to transmit the pilot signal (e.g. reference signal in LTE) for at least a short time interval i.e. the so-called "probing" interval. After this interval, all or some hotspot cells will return to dormant mode. The UEs covered by the coverage cell will be configured to perform Reference Signal (RS) measurements from the hotspot cells during this interval and send the feedback (the same approach as defined for mobility purposes in TS 36.331 [5] could be reused). Based on the measurement results, the coverage cell will then determine which hotspot cells should be switched on.

Solution D: Positioning information

When the coverage cell detects high load, it can use a combination of UE locations, cell locations, and cell radii/transmit powers in deciding which hotspot cells should be switched on (e.g. cells that cover the UEs). Furthermore, a timer value can be included in the activation request message sent from the coverage cell to the selected hotspot cells. At the expiry of this timer, each cell verifies if the condition required for staying on has been met, and if not, it autonomously turn off cells again.

6.1.3 Evaluations and comparisons

In this part, all enhancements for cell exiting dormant mode will be evaluated here. Information beneficial for energy saving, e.g. traffic thresholds, time duration, power consumption, may be used if available.

| Criteria | Baseline Rel-9 | Switching on based on predefined low-load periods | Switching on based on IoT measurement | Switching on based on UE measurement | Switching on based on positioning |
|------------------------|---|---|---|---|--|
| Feasibility | Feasible | Feasible | Feasible | Feasible | Feasible |
| Applicability | Applicable | Applicable | Applicable | Applicable | Applicable |
| Backward compatibility | Yes | Yes | Yes | Yes | Yes |
| Complexity | Low: – Additional network signalling is needed for activate and deactivate unnecessary cells. | Low: - Specific configuration information is required and will need to be updated. | Medium: - IoT measurements and signalling is needed between hotspot cells in energy saving mode and coverage cell. | Medium: - interference issue during probing phase for intra frequency case- Creation of a new cell state (probing phase) for neighbour relation handling | Medium: - need to collect position information for significant number of UEs. |
| Potential ES gain | In the worst case some neighbouring sleeping eNBs may be turned on even if these eNBs are not useful. | It has the risk of statistic information is unable to reflect the real conditions. | Possibly limited accuracy of IoT measurement and thresholds may reduce the efficiency of the method. Accuracy could be increased at the cost of complexity | The most useful cells could be selected, at the cost of introduction of an intermediate probing state where the cell is not fully functioning and cannot accept | Since UE positions and link budgets are not fully correlated, the method may therefore have a limited efficiency. Additional gain |

| | | | | | |
|----------------------|-------------------------|---------------|--|---|--|
| | | | | handover. Energy consumption during the probing phase may reduce its gain. | could be obtained at the cost of complexity |
| Specification impact | Covered by R9 solution. | None | X2 signalling for reporting IoT measurements | X2 signalling for probing trigger messages | S1 signalling for UE positioning retrieval |
| OAM impact | Covered by R9 solution. | Low | Low | Low | Medium (need for detailed coverage information). |
| eNB impact | Covered by R9 solution. | Low | Medium, additional UL receiver for inter-frequencies | Medium, new "probing" cell state. | Medium, location client in the eNB |
| UE impact | Not foreseen. | Not foreseen. | Not foreseen. | Not foreseen for intra-frequency case, Negligible for inter-frequency case | None to low depending on the positioning mechanism |

6.1.4 Conclusions

Release 9 inter-eNB energy saving solution is feasible, applicable and backward compatible for improving energy efficiency.

Enhancement solutions on how to exit dormant mode efficiently are feasible, applicable and backward compatible.

6.2 Study on inter-eNB scenario 2

6.2.1 Description of scenario 2

When operators deploy the LTE network, one possible application scenario for energy saving is described hereafter.

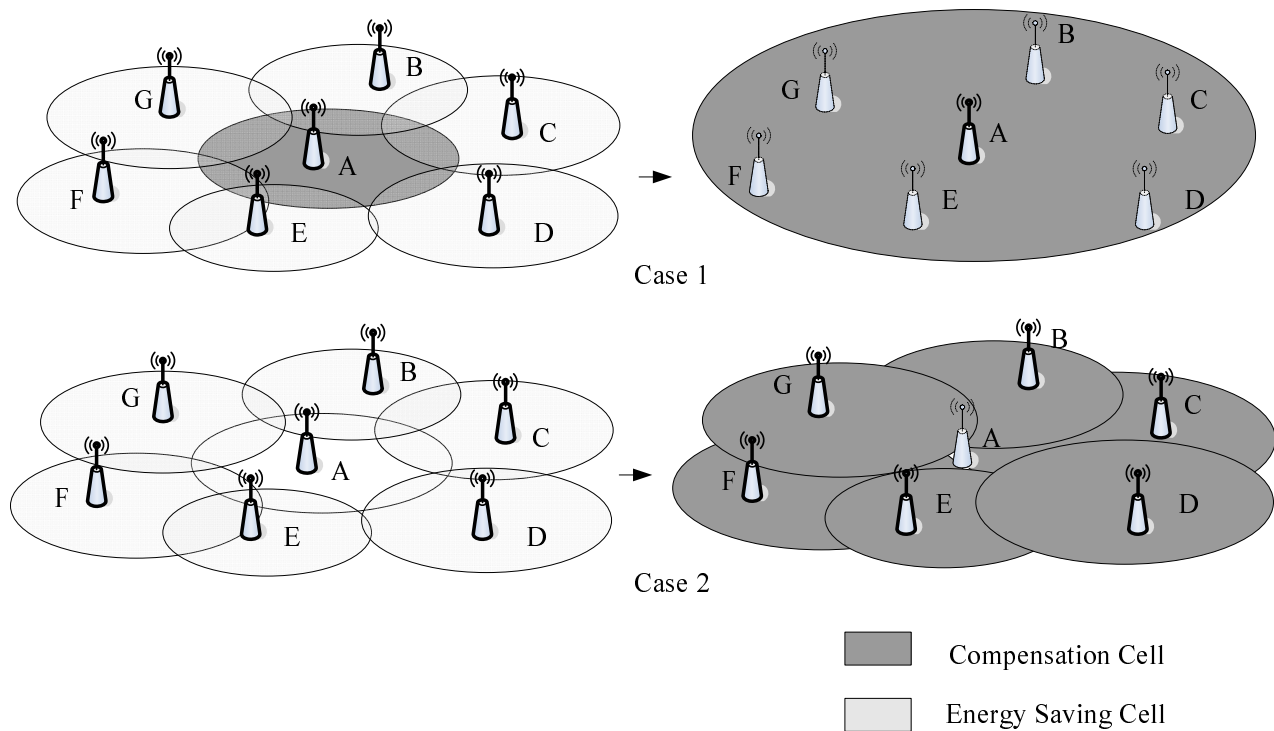


Figure 6.2.1-1. Inter-eNB scenario 2 for energy saving

As shown in Figure 6.2.1-1, this scenario involves two cases. For both cases, single layer coverage of E-UTRAN cells is deployed. At off-peak time, energy saving cells may enter dormant mode, while the basic coverage is provided by one cell (case 1) or by several compensation cells (case 2). In general, the continuity of LTE coverage is guaranteed while the QoS of some services may be impacted.

6.2.2 Energy saving procedures

When load level and distribution fluctuates some cells may be switched off, but in order to guarantee continuous coverage, others must be kept on or even reconfigured to cover up for those that are in dormant mode. To achieve energy savings in this inter-eNB scenario, two fundamental approaches differing in how hotspots E-UTRAN cells enters or leaves dormant mode can be used. These approaches are:

1. OAM-based approach
2. Signalling-based approach
3. Hybrid OAM and signalling-based approach

6.2.2.1 OAM-based solution for E-UTRAN cell entering or waking up from dormant mode

In this existing solution, all cells are preconfigured as potential compensation cells and energy saving cells. The decision to enter or leave dormant mode is made based on the proprietary algorithm in each cell configured by OAM. The neighbour nodes should be informed either by the OAM or by the signalling.

6.2.2.2 Signalling based solution for E-UTRAN cell entering or waking up from dormant mode

In this method, the cells are aware of whether they are compensation cell or energy saving cell based on OAM or proprietary information which is knowledge by itself, e.g. UE measurements, interference status, load information etc. When the energy saving cell decides to enter dormant mode autonomously or based on information exchanged with the compensation cell, it will initialise communication with the corresponding compensation cells, and the coverage related information may be included into the request message. The final decision is made at the compensation cell and the feedback may be needed. Furthermore, similar cell switching on procedure specified in Rel-9 as captured in TS 36.300 [4] could be reused.

6.2.2.3 Hybrid O&M and signalling based solution for E-UTRAN cell entering or waking up from dormant mode

In this solution, the cells are preconfigured as potential compensation cells or energy saving cells by OAM, and also OAM communicates to all cells, the values of some parameters that determine the behaviour of switching on/off mechanisms.

Note: Hybrid approach behavior depends entirely on the combination of OAM-based and Signaling-based solution and the parameters applied, being the behavior of cell switching on/off for OAM controlled and signaling exchange mechanisms shown in the evaluation table. Therefore Hybrid mode will not be compared against OAM or signaling based solution in the evaluation table.

6.2.3 Evaluations and comparisons

Rel-9 solution is not applicable in this scenario.

| Criteria | Cell switching on/off based on OAM decisions (existing) | Cell switching on/off based on signalling exchange |
|------------------------|---|---|
| Feasibility | Feasible | Feasible |
| Applicability | Applicable | Applicable |
| Backward compatibility | Yes | ES-capable cells don't use Rel.9 autonomous switch off to avoid coverage holes Impact on ANR/HO parameter setting |
| Complexity | High, because the OAM should coordinate the cell switching on/off | High. A certain coordination and synchronization of cell reconfigurations is needed to avoid creating coverage holes, or excessive interference levels during transitions |
| Potential ES gain | Long term statistics may lead to a conservative approach | More flexible compensation schemes. In addition the mechanism could improve network robustness by permitting compensation in case of cell outage. |
| Specification impact | None | Signalling between multiple cells is needed, as well as definition of compensation mechanisms providing interoperability. Enhancement on ANR/HO parameter setting |
| OAM impact | High. OAM has to define compensation cell and its candidate energy saving cells, and how to switch on/off | Low |
| eNB impact | Low, some functionalities are required for guarantee UE's coverage, e.g. ICIC | High, eNB must be able to adapt coverage (power / tilt / azimuth). Compensation coordination function has to be implemented in compensation nodes. More limited |

| | | |
|-----------|---------------|-----------------------------|
| | | impact on ES-capable cells. |
| UE impact | Not foreseen. | Not foreseen. |

6.2.4 Conclusions

Both OAM-based approach and Signalling-based approach, as well as hybrid approaches, are feasible, applicable and backward compatible for improving energy efficiency in inter-eNB scenario 2.

7 Intra-eNB energy saving

7.1 Intra-eNB Scenario

A single cell can operate in energy saving mode when the resource utilization is sufficiently low. In this case, the reduction of energy consumption will be mainly based on traffic monitoring with regard to QoS and coverage assurance. Since a large part of power of eNB is consumed by the power amplifier, energy saving solutions for a single cell mainly aim at reducing power consumption of the power amplifier.

7.2 Potential solutions and Evaluations

7.2.1 Configuring MBSFN subframes within the range supported according to current specification limitation

MBSFN subframes have less common reference signals (CRS) than normal subframes, and hence configuring as much as possible MBSFN subframes allows reduced eNB transmission time. According to current specification, at most 5 and 6 MBSFN subframes can be configured per radio frame for TDD and FDD, respectively.

1) Potential gain

To utilize the currently possible MBSFN subframes is an efficient way for energy efficient network operation in LTE and has potential to give energy savings in the order of 30-50% in typical traffic scenarios compared to operation without MBSFN subframes.

2) Potential risk

There is no impact on coverage and backward compatibility identified.

3) Possible impact on the specification

This solution already can be supported without any further impact on the specification.

7.2.2 Configuring DwPTS in subframe 1 and 6 to the minimum length

For TDD, the special subframe consists of three parts, i.e. DwPTS, Guard Period and UpPTS. The length of each part is configurable. Subframe 1 and 6 are configured as the special subframes for downlink-to-uplink switch-point periodicity of 5ms, and subframe 1 is configured as the special subframe for downlink-to-uplink switch-point periodicity of 10ms. To configure the DwPTS of subframe 1 and 6 (if applicable) to the minimum length (3 OFDM symbols) can result in a subframe similar to an MBSFN subframe.

1) Potential gain

From eNB transmission time point of view, the difference between MBSFN subframe and the special subframe with minimum length of DwPTS only lies in that for the latter, one more OFDM symbol (the 3rd one) is used to transmit primary synchronization signal. Hence, the energy saving gains achieved by this solution is very similar to configuring subframe 1/6 as MBSFN subframes.

2) Potential risk

From coverage and backward compatibility aspects, there is no risk identified.

3) Possible impact on the specification

This solution belongs to an implementation issue and no impact on the specification is foreseen.

Annex A (informative): Evaluation Criteria

| Criteria | Description |
|------------------------|--|
| Feasibility | Candidate solutions should be easily implemented with existing technology and/or realistic changes to the standards. If the solution breaks this criterion, it is out of the scope of the energy saving discussion. |
| Applicability | Verification against the scope of the SI as added in the TR (see section 4). If the solution breaks this criterion, it is out of the scope of the energy saving discussion. |
| Backward compatibility | In Release-9, RAN3 has already specified an inter-eNB energy saving for E-UTRAN based on the cross-eNB signalling exchange. New solutions should be backward compatible with Release-9 energy saving solution in TS 36.300 [4]. If the solution breaks this criterion, it is out of the scope of the energy saving discussion. |
| Complexity | Candidate solutions should not be too complex when implemented in practice. This criterion evaluates on how many messages exchanging or calculation is needed for the solutions. The frequency of appliance could be considered here. |
| Potential ES gain | The potential gain of candidate solutions for saving the energy should be evaluated. Qualitative indication of ES gain may be added relative to the following possible reference points : a) Current options for Inter-RAT/eNB ES solutions b) Other proposed ES solutions in the TR (Inter-RAT or Inter-eNB) |
| Specification impact | The specification impact should be evaluated. The description of the impact could be added. |
| OAM impact | The OAM impact should be evaluated. The description of the impact could be added. The operation effort could be considered. |
| eNB impact | The impact on eNB implementation should be evaluated. The description of the impact could be added. |
| UE impact | The UE impact and requirement of optional UE feature should be evaluated. The description of the impact could be added. |

Annex B (informative): Change History

| Change history | | | | | | |
|----------------|-------|------------------------|------|-----|--|--------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | New |
| 2010-09-03 | RAN3 | R3-102526 | | | R3-102526 includes the inter-RAT energy saving scenario and potential solutions; includes one rule for inter-eNB solutions; updates the TR skeleton with adding the intra-eNB part. | |
| 2010-10-25 | RAN3 | R3-103106 | | | R3-103106 includes Introduction, Reference and Definitions, symbols and abbreviations part; includes the sentence 'The solutions for this scenario should only be considered in case there are no LTE-only capable devices'; includes further description for solution 3; includes further enhancement for issues addressed. | |
| 2010-11-22 | RAN3 | R3-103779 | | | R3-103779 includes network sharing consideration; includes some solutions for correct cell to be switched on; includes some solutions for deactivation request and coordination; furthermore, the intra-eNB energy saving solutions proposed by RAN2 are included. | |
| 2011-01-23 | RAN3 | R3-110389 | | | R3-110389 includes the inter-eNB solutions for inter-eNB scenario 2; includes the evaluation table for all solutions for different scenarios respectively. | |
| 2011-02-25 | RAN3 | R3-111057 R3-111069 | | | R3-111069 includes restructured TR and some updated description on scenarios and solutions. R3-111057 includes the initial evaluation table in the TR. | |
| 2011-05-13 | RAN3 | R3-111753 | | | R3-111753 modifications: (1) Applied all changes in R3-111342 (2) Resolved FFS on inter-PLMN issue in section 5.1.1 and 6.1.1. (3) Removed *note 2 in Inter-RAT evaluation table, removed *note 1 in inter-eNB evaluation tables (both cases). (4) Applied conclusion 1~6 to the places they should be. 'applicable' and 'Backward compatible' are added. (5) Removed 'high', 'medium' or 'low' in the ES gain row in all 3 tables, with some rewording and update. (6) Added 'Hybrid' approach to inter-eNB case 2. | |
| 2011-06 | 52 | RP-110720 | | | Approved at RAN#52 | 10.0.0 |
| 2011-09 | 53 | RP-111194 | 0001 | | Removal of UE capability restriction for inter-RAT energy saving following SA1's decision | 10.1.0 |
| 2012-09 | | | | | Update to Rel-11 version (MCC) | 11.0.0 |
| 2014-09 | | | | | Update to Rel-12 version (MCC) | 12.0.0 |

History

| Document history | | |
|-------------------------|----------------|-------------|
| V12.0.0 | September 2014 | Publication |
| | | |
| | | |
| | | |
| | | |