



**LTE;  
Overall description of LTE-based 5G broadcast  
(3GPP TR 36.976 version 19.0.0 Release 19)**



---

**Reference**

---

RTR/TSGR-0136976vj00

---

---

**Keywords**

---

LTE

---

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

---

The present document can be downloaded from the  
[ETSI Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,  
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to  
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our  
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

**Notice of disclaimer & limitation of liability**

---

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

---

# Modal verbs terminology

In the present document "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

---

# Contents

|                                                           |           |
|-----------------------------------------------------------|-----------|
| Intellectual Property Rights .....                        | 2         |
| Legal Notice .....                                        | 2         |
| Modal verbs terminology.....                              | 2         |
| Foreword.....                                             | 4         |
| 1 Scope .....                                             | 6         |
| 2 References .....                                        | 6         |
| 3 Definitions, symbols and abbreviations .....            | 7         |
| 3.1 Definitions .....                                     | 7         |
| 3.2 Symbols.....                                          | 7         |
| 3.3 Abbreviations .....                                   | 7         |
| 4 Introduction .....                                      | 7         |
| 4.1 General .....                                         | 7         |
| 4.2 Use cases and requirements.....                       | 8         |
| 4.3 Enhancements targeting LTE terrestrial broadcast..... | 9         |
| 5 Architecture.....                                       | 9         |
| 6 Protocol aspects.....                                   | 10        |
| 6.1 Frame structure and numerologies .....                | 10        |
| 6.2 MBMS Transmission .....                               | 11        |
| 6.3 MAC Layer .....                                       | 11        |
| 6.4 RLC layer .....                                       | 11        |
| 6.5 RRC layer.....                                        | 11        |
| 7 ROM aspects .....                                       | 12        |
| 7.1 General .....                                         | 12        |
| 7.2 Physical layer procedures.....                        | 12        |
| 7.3 Idle mode procedures .....                            | 12        |
| 7.4 RRM requirements .....                                | 12        |
| <b>Appendix: Upper layer aspects.....</b>                 | <b>13</b> |
| <b>Annex A: Change history .....</b>                      | <b>14</b> |
| History .....                                             | 15        |

---

# Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, certain modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

NOTE 1: The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

NOTE 2: The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

NOTE 3: The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

NOTE 4: The constructions "can" and "cannot" shall not to be used as substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

NOTE 5: The constructions "is" and "is not" do not indicate requirements.

---

# 1 Scope

The present document provides an overview and overall description of the LTE-based 5G terrestrial broadcast comprising:

- a service delivering Free To Air content [2];
- a radio network comprising only MBMS-dedicated cells or FeMBMS/Unicast-mixed cells [3] as transmitters; and
- Receive Only Mode (ROM) devices and UEs supporting FeMBMS [4] as receivers.

Details of the radio interface protocols and procedures are specified in companion specifications of the 36 series.

This document is a 'living' document, i.e. it is permanently updated and presented to TSG-RAN meetings.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 22.101: "Service aspects; Service principles".
- [3] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN)".
- [4] 3GPP TS 23.246: "Multimedia Broadcast/Multicast Service (MBMS); Architecture and functional description".
- [5] 3GPP TS 26.346: "Multimedia Broadcast/Multicast Service (MBMS); Protocols and codecs".
- [6] 3GPP TS 36.331: "Radio Resource Control (RRC) Protocol".
- [7] 3GPP TS 24.116: "Stage 3 aspects of system architecture enhancements for TV services".
- [8] 3GPP TS 36.211: "E-UTRA; Physical Channels and Modulation".
- [9] 3GPP TR 36.776: "Study on LTE-based 5G terrestrial broadcast".
- [10] 3GPP TR 38.913: "Study on scenarios and requirements for next generation access technologies".
- [11] 3GPP TR 36.440: "General aspects and principles for interfaces supporting Multimedia Broadcast Multicast Service (MBMS) within E-UTRAN".
- [12] 3GPP TS 24.117: "TV service configuration Management Object (MO)".
- [13] 3GPP TS 36.213: "E-UTRA; Physical layer procedures".
- [14] 3GPP TS 36.304: "E-UTRA; Procedures in idle mode".
- [15] 3GPP TS 36.133: "E-UTRA; Requirements for support of radio resource management".
- [16] 3GPP TS 36.321: "E-UTRA; MAC protocol specification".

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

### 3.2 Symbols

For the purposes of the present document, the following symbols apply:

<symbol>            <Explanation>

### 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

|        |                                              |
|--------|----------------------------------------------|
| CAS    | Cell acquisition subframe                    |
| CFI    | Control format indicator                     |
| DRX    | Discontinuous reception                      |
| eMBMS  | Evolved MBMS                                 |
| FeMBMS | Further enhanced MBMS                        |
| HPHT   | High power high tower                        |
| ISD    | Inter-site distance                          |
| LPLT   | Low power low tower                          |
| MBMS   | Multimedia Broadcast/Multicast System        |
| MBSFN  | Multicast/Broadcast Single Frequency Network |
| MCCCH  | Multicast Control Channel                    |
| MPMT   | Medium power medium tower                    |
| MTCH   | Multicast Traffic Channel                    |
| NAS    | Non-access stratum                           |
| PBCH   | Physical Broadcast Channel                   |
| PCFICH | Physical Control Format Indicator Channel    |
| PDCCH  | Physical Downlink Control Channel            |
| PDSCH  | Physical Downlink Shared Channel             |
| PMCH   | Physical Multicast Channel                   |
| PSS    | Primary synchronization signal               |
| ROM    | Receive only mode                            |
| RRC    | Radio Resource Control                       |
| RRM    | Radio resource management                    |
| SSS    | Secondary synchronization signal             |
| TV     | Television                                   |

## 4 Introduction

### 4.1 General

The main aspects of the LTE-based 5G terrestrial broadcast described in this specification are:

- radio network comprising only MBMS-dedicated cells or FeMBMS/Unicast-mixed cells [3] as transmitters; and
- ROM devices and UEs supporting FeMBMS [4] as receivers.

NOTE: ROM devices support only ROM service [5]. ROM service uses one of the reserved TMGI values [7].

MBMS-dedicated cells support only MBMS transmission and do not support uplink transmission. MBSFN subframes of a MBMS-dedicated cell do not have a control region and can therefore be 100% allocated to MBMS. Non-MBSFN subframes, also called Cell Acquisition Subframes (CAS), which contain the control region, are used for transmission of the system acquisition signals (PSS/SSS), PDCCCH, and system information on PBCH and PDSCH. CAS are transmitted with a periodicity of 40ms and use subframes with  $\Delta f = 15$  kHz. PBCH of a MBMS-dedicated cell uses a different scrambling sequence initialization than PBCH of a non-MBMS-dedicated cell, which prevents UEs that do not support MBMS-dedicated cell from camping on it. For more information about MBMS-dedicated cell see TS 36.300 [3].

Multicast data is transmitted over PMCH. PMCH supports SFN transmission, where multiple eNBs synchronously transmit the same waveform. Multiple numerologies are supported for PMCH (see Clause 6.1), tailored for different scenarios (e.g. support of different mobility and ISD). A single cell can belong to multiple (up to 8) SFN areas, where different SFN areas may have different numerologies. The PMCH carries the MCCH and MTCH logical channels. The MCCH provides scheduling information for multicast data over the MTCH. The MTCH contains user plane data. MCCH scheduling information is provided in system information.

ROM devices support MBMS reception but do not support uplink transmission. ROM devices may not have USIM. As such, ROM devices do not support two-way signalling procedures with the network, including connection establishment procedures and security procedures. ROM devices only support the idle mode. Not all idle mode procedures are supported, as described in clause 7.3. For more details on ROM devices see clause 7, TS 36.300 [3] clause 15.11, TS 23.246 [4] Annex D and TS 24.116 [7] clause 4.

NOTE 1: As a matter of implementation, a cellular device can host a ROM device and a traditional UE capable of unicast. Such device is further described in TS 36.246 [4] Annex E and called *ROM device with independent unicast*. The co-hosted UE is connected to a different cell from the MBMS-dedicated cell serving the co-hosted ROM device. If the co-hosted UE and ROM device share baseband resources, the co-hosted UE can use *MBMSInterestIndication* signalling procedure, specified in TS 36.331 [6], to inform the serving RAN about the baseband resources occupied by the co-hosted ROM device and therefore not available for unicast.

NOTE 2: There may be awareness at the application layer of the ROM device with independent unicast. How this awareness is created is outside of the scope of specifications.

## 4.2 Use cases and requirements

In Release 14, the use cases and scenarios for eMBMS services based on LTE have been expanded to include terrestrial broadcasting (the feature also referred to as "EnTV"). This included new requirements:

- network dedicated to TV broadcast via eMBMS;
- SFN deployments with ISD significantly larger than a typical ISD associated with typical cellular deployments;
- support for ROM device.

NOTE: At the upper layers, the requirements included the support for Free to Air service [2] and for eMBMS network sharing [4].

In Release 16, a gap analysis documented in TR 36.776 [9] compared the Release 14 LTE terrestrial broadcasting capabilities with the requirements for 5G dedicated broadcast networks in TR 38.913 [10]. As a result of this analysis, the following two requirements were deemed unfulfilled by Release 14 LTE eMBMS:

1. Support for service over large geographic area, including SFN with ISD > 100km;
2. Support for mobility scenarios including speeds of up to 250 km/h.

In relation to the first requirement, the new ISD of 125 km, referred to as HPHT network, with omni-directional transmitters was defined. The following two ISD were also included in the evaluation:

- 15 km, referred to as LPLT network with sectorized cells;
- 50 km, referred to as MPMT network with omni-directional transmitters.

The first requirement is associated with receivers with high-gain rooftop directional antennas, low mobility and a predominantly line-of-sight channel.

The second requirement is associated with receivers in cars, with external omni-directional antennas.

In addition to the above two requirements, a third requirement was added related to improving the CAS reception for both large ISD and high mobility scenarios.

## 4.3 Enhancements targeting LTE terrestrial broadcast

In Release 14, the following key RAN enhancements were made to the specifications to enable LTE terrestrial broadcast:

- MBMS-dedicated cell [3];
- MBSFN subframes using  $\Delta f = 1.25$  kHz [8], with a cyclic prefix duration of 200 $\mu$ s and a symbol duration of 1ms;
- New information blocks on PBCH and PDSCH of CAS [3], [6]:
  - *MIB-MBMS* is transmitted with a 40ms periodicity and updated every 160 ms; and
  - *SIB1-MBMS* is transmitted with an 80ms periodicity and updated every 160 ms, containing information relevant for receiving MBMS service and, optionally, the scheduling of other system information blocks;
- *MBMSInterestIndication* RRC signalling procedure (see clause 4.1).

NOTE: For upper layer enhancements, see TS 23.246 [4] Annex D and E, TS 24.116 [7], TS 24.117 [12] and TS 26.346 [5] (ROM service aspects).

In Release 16, the following RAN enhancements were made to address the use cases described in clause 4.2:

- MBSFN subframes using  $\Delta f = 0.37$  kHz, with a cyclic prefix duration of 300 $\mu$ s and a symbol duration of 3ms, for the support of large ISD;
- MBSFN subframes using  $\Delta f = 2.5$  kHz, with a cyclic prefix duration of 100 $\mu$ s and a symbol duration of 0.5ms, for the support of high mobility;
- The following enhancements on the CAS:
  - PDCCH enhancements:
    - CFI indication in MIB [6] to avoid the need to decode PCFICH; and
    - New aggregation level 16;
  - Repetition of PBCH to increase its robustness.

In Release 17, the following RAN enhancement was introduced to enable deployment of LTE-based 5G terrestrial broadcast in broadcast UHF spectrum, where the channelization is 6/7/8MHz (depending on the geography):

- PMCH bandwidth of 30, 35 and 40 PRBs (corresponding to 6/7/8MHz), applicable for CAS bandwidth of 15 or 25 PRBs (corresponding to 3 and 5MHz).

---

## 5 Architecture

The network architecture for LTE-based 5G terrestrial broadcast is described in TS 36.300 [3] clause 15.1.1, with the exception that only:

- ROM reception via MBMS-dedicated cell; or
- MBMS reception via FeMBMS/Unicast-mixed cell

is supported.

RAN interfaces for LTE-based 5G terrestrial broadcast are described in TS 36.300 [3] clause 15.1.1 and in TS 36.440 [11]. In case of a MBMS-dedicated cell, the counting procedure is not supported by the eNB.


User plane and control plane protocol stack for LTE-based 5G terrestrial broadcast is described in TS 36.300 [3] clause 15.1.2 and clause 15.1.3, respectively.

NOTE: For upper layer architecture, see TS 23.246 [4].


## 6 Protocol aspects

### 6.1 Frame structure and numerologies

Only frame structure type 1 is supported. All numerologies specified in TS 36.211 [8] are supported. For subframes using  $\Delta f$  other than 0.370 kHz, the frame structure is according to Figure 6.1-1. For transmissions using  $\Delta f = 0.370$  kHz, the frame structure is shown in Figure 6.1-2.

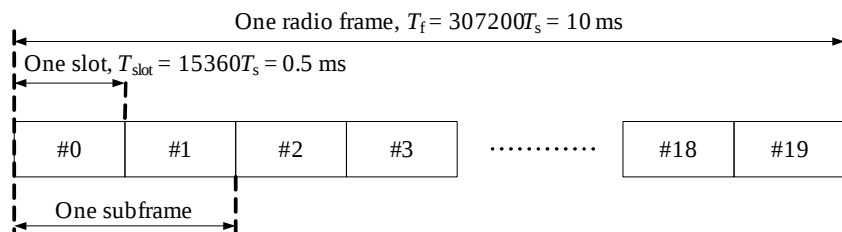

**Figure 6.1-1: Frame structure type 1 for subframes not using  $\Delta f = 0.370$  kHz For  $\Delta f = 1.25$  kHz, one subframe contains a single slot with a duration of 1ms.**

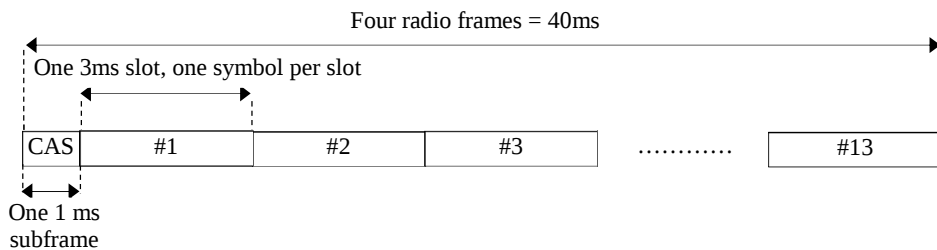

**Figure 6.1-2: Frame structure type 1 for transmissions using  $\Delta f = 0.370$  kHz. The CAS is a non-MBSFN subframe, and is configured with 15 kHz subcarrier spacing**

Table 6.1 summarizes the supported numerologies for MBMS transmission over PMCH. The theoretical equalization interval is obtained as the maximum channel delay spread that can be estimated from the pilot pattern, and is equal to the Symbol duration (excluding CP) divided by the frequency separation (in number of subcarriers) between two consecutive pilot tones.

**Table 6.1: Summary of supported numerologies for MBMS transmission over PMCH**

| Subcarrier spacing                                                                                                                                    | Symbol duration (excluding CP) | Cyclic prefix length | Time separation between pilots in the same subcarrier, in number of OFDM symbols | Frequency separation between pilots, in number of subcarriers (after de-stagger) | Theoretical equalization interval |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------|
| 15 kHz                                                                                                                                                | 66.6 $\mu$ s                   | 16.6 $\mu$ s         | 8 (NOTE)                                                                         | 1                                                                                | 66.6 $\mu$ s                      |
| 7.5 kHz                                                                                                                                               | 133.3 $\mu$ s                  | 33.3 $\mu$ s         | 4 (NOTE)                                                                         | 2                                                                                | 66.6 $\mu$ s                      |
| 2.5 kHz                                                                                                                                               | 400 $\mu$ s                    | 100 $\mu$ s          | 2                                                                                | 2                                                                                | 200 $\mu$ s                       |
| 1.25 kHz                                                                                                                                              | 800 $\mu$ s                    | 200 $\mu$ s          | 2                                                                                | 3                                                                                | 266.67 $\mu$ s                    |
| 0.370 kHz                                                                                                                                             | 2700 $\mu$ s                   | 300 $\mu$ s          | 2 or 4                                                                           | 3                                                                                | 900 $\mu$ s                       |
| NOTE: For 15 and 7.5kHz, this denotes the separation within one subframe of one of the staggers. See TS 36.211 [8] Figures 6.10.2.2-1 and 6.10.2.2-3. |                                |                      |                                                                                  |                                                                                  |                                   |

## 6.2 MBMS Transmission

MBMS transmission is performed according to TS 36.300 [3] clause 15.3.3.

MCCH configuration and scheduling is performed according to TS 36.300 [3] clause 15.3.5 and TS 36.331 [6] clause 5.8.1. In case of a MBMS-dedicated cell, the MBMS counting configuration is not supported.

MCCH information acquisition is performed according to TS 36.300 [3] clause 15.3.5 and TS 36.331 [6] clause 5.8.2. In case of a MBMS-dedicated cell, only RRC\_IDLE is supported.

## 6.3 MAC Layer

MAC layer supports only:

- BCH reception for BCCH;
- DL-SCH reception for BCCH; and
- MCH reception for MCCH/MTCH.

BCH reception and DL-SCH reception in the MAC layer use transparent MAC [16], i.e. single MAC PDU per TTI with no headers. HARQ entity uses the dedicated broadcast HARQ process, defined in [16].

MCH reception in the MAC layer is specified in TS 36.321 [16] clause 5.12 and in TS 36.300 [3] clause 15.3.3.

## 6.4 RLC layer

BCCH uses the RLC-TM mode.

MTCH and MCCH use the RLC-UM mode. RLC operation for MTCH and MCCH is described in TS 36.300 [3] clause 15.3.3.

## 6.5 RRC layer

RRC layer supports only:

- System information reception (see TS 36.331 [6] clause 5.2) in MBMS-dedicated cell; and
- MBMS reception (see TS 36.331 [6] clause 5.8) in MBMS-dedicated cell and in FeMBMS/Unicast-mixed cell.

For system information reception, the following applies:

- only *BCCH-BCH-Message-MBMS* and *BCCH-DL-SCH-Message-MBMS* message class is supported;
- acquisition of system information messages is performed according to TS 36.331 [6] clause 5.2.3b.

For MBMS reception, the following applies:

- MBMS counting procedure and MBMS interest indication procedure are not supported.

---

## 7 ROM aspects

### 7.1 General

Since a ROM device does not support uplink transmission or two-way signalling procedures, and does not comprise USIM, it cannot support all the physical layer procedures of the conventional UE. By the same token, only a subset of idle mode procedures and RRM requirements applicable to a conventional UE will be supported. The following clauses provide an overview of the physical layer and idle mode procedures and the RRM requirements applicable to a ROM device.

### 7.2 Physical layer procedures

ROM device only supports the following physical layer procedures specified in TS 36.213 [13]:

- Cell search;
- Timing synchronization;
- PDSCH procedures;
- PDCCH assignment procedure;
- PMCH procedures; and
- Assumptions independent on physical channels (clause 12) related to MBMS-dedicated cell.

### 7.3 Idle mode procedures

ROM device only supports the following idle mode procedures specified in TS 36.304 [14]:

- Cell selection; and
- Cell reselection.

PLMN prioritization for cell reselection is specified in TS 36.304 [14] clause 5.2.4.1.

NOTE: NAS layer PLMN selection does not apply to ROM device. PLMN selection for ROM device is specified in TS 24.116 [7].

ROM device does not support DRX.

### 7.4 RRM requirements

ROM device only supports the following requirements specified in TS 36.133 [15]:

- Cell selection; and
- Cell reselection, except for:
  - IRAT reselection;
  - paging-related requirements; and
  - CSG cell-related requirements.

---

## Appendix: Upper layer aspects

LTE-based 5G terrestrial broadcast supports *transparent delivery*, which allows for broadcasting of IP-based services for which the media codecs and application protocols are defined outside 3GPP (see clause 8B, TS 26.346 [5]).

Broadcast service announcement and session management are defined in clause 4.4.3, TS 23.246 [4].

ROM devices are defined in clause 7, TS 36.300 [3] clause 15.11, TS 23.246 [4] Annex D and TS 24.116 [7] clause 4.

## Annex A:

### Change history

| Change history |            |             |      |     |     |                                                                                                                   |             |
|----------------|------------|-------------|------|-----|-----|-------------------------------------------------------------------------------------------------------------------|-------------|
| Date           | Meeting    | TDoc        | CR   | Rev | Cat | Subject/Comment                                                                                                   | New version |
| 2019-08        | RAN1#97    | R1- 1908844 |      |     |     | Skeleton TR                                                                                                       | 0.0.1       |
| 2019-11        | RAN1#99    | R1-1913483  |      |     |     | Added technical content to all clauses. Incorporated technical and editorial the comments received in the meeting | 0.1.0       |
| 2019-11        | RAN1#99    | R1-1913542  |      |     |     | Endorsed with minor changes agreed in RAN1#99                                                                     | 0.2.0       |
| 2019-12        | RAN#86     | RP-192688   |      |     |     | Clean version as v1.0.0 for presentation to plenary                                                               | 1.0.0       |
| 2020-02        | RAN1#100-e | R1-2000713  |      |     |     | Incorporated additional technical and editorial changes                                                           | 1.1.0       |
| 2020-02        | RAN1#100-e | R1-2001230  |      |     |     | Incorporated comments during email discussion                                                                     | 2.0.0       |
| 2020-03        | RAN#87e    | RP-200167   |      |     |     | Clean version based on 2.0.0 for RAN approval.                                                                    | 2.1.0       |
| 2020-03        | RAN#87e    |             |      |     |     | TR under change control – MCC clean-up                                                                            | 16.0.0      |
| 2022-03        | RAN#95-e   | RP-220259   | 0001 | -   | B   | Introduction of Rel-17 enhancements                                                                               | 17.0.0      |
| 2024-03        | SA#103     | -           | -    | -   | -   | Update to Rel-18 version (MCC)                                                                                    | 18.0.0      |
| 2025-09        | SA#109     | -           | -    | -   | -   | Update to Rel-19 version (MCC)                                                                                    | 19.0.0      |

---

# History

| Document history |              |             |
|------------------|--------------|-------------|
| V19.0.0          | October 2025 | Publication |
|                  |              |             |
|                  |              |             |
|                  |              |             |
|                  |              |             |