
ETSI TR 183 069 V2.1.1 (2010-04)

Technical Report

Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN);

Business Trunking;

NGCN-NGN Interfaces Implementation Guide

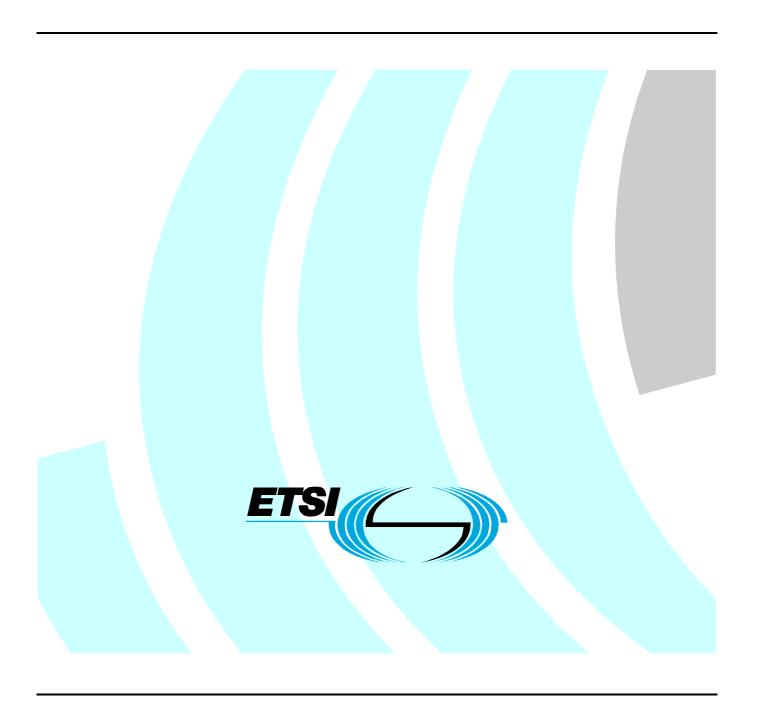

Reference DTR/TISPAN-03195-NGN-R2

Keywords interface, trunking

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **LTE**[™] is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners. **GSM**® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intelle	ectual Property Rights	6
Forew	ord	6
1	Scope	7
	References	
2.1 2.2	Normative references	
2.2	Informative references	/
3	Definitions and abbreviations	12
3.1	Definitions	12
3.2	Abbreviations	12
4	Overview	12
4.1	Business Trunking architecture and protocols	
4.2	Roadmap to relevant specifications	
4.3	Specification methodology	
4.3.1	General	13
4.3.2	Notation for status codes	14
4.4	Major capabilities at the NGCN-NGN interface	
4.4.1	Service capabilities	15
4.4.2	Protocol capabilities	15
4.4.2.1		
4.4.2.2	1	
4.4.2.3		
4.4.2.4	Extensions for registration (subscription based approach only)	16
5	Common guidelines	17
5.1	Reference model for interconnection	17
5.2	Control plane interconnection	17
5.2.1	SIP procedures	17
5.2.1.1		
5.2.1.1		
5.2.1.1	- · · · · · · · · · · · · · · · · · · ·	
5.2.1.1	-	
5.2.1.1		
5.2.1.2	\mathcal{E} 1	
5.2.1.2		
5.2.1.2		
5.2.1.2		
5.2.1.2 5.2.2	1	
5.2.2.1	SIP protocol elements	
5.2.2.1		
5.2.2.3		
5.2.2.4	1	
5.2.2.4		
5.2.2.4		
5.2.2.4		
5.2.2.4		
5.2.2.4		
5.2.2.4		
5.2.2.4		23
5.2.2.4		
5.2.2.4	.9 Route	23
5.2.2.4	.10 Via	23
5.2.2.4		
5.2.2.5	Supported Message bodies	48

5.2.2.6	Event packages	49
5.2.3	SDP protocol	49
5.2.4	Control plane transport	51
5.3	User plane interconnection	51
5.3.1	Media and Codec	51
5.4	Numbering, naming and addressing	52
5.5	IP Version	52
5.6	Security	53
6 S	pecific guidelines for the subscription based approach	53
6.1	Reference model for interconnection	
6.1.1	General	
6.1.2	Functionalities performed by entities at the service layer	
6.1.2.1	P-CSCF, S-CSCF	
6.1.2.2	AS	
6.1.2.3	NGCN	
6.1.3	Functionalities performed by entities at the transport layer	
6.1.3.1	C-BGF	
6.2	Control plane interconnection	
6.2.1	SIP procedures	
6.2.1.1	Outgoing requests from NGCN site	
6.2.1.1.1		
6.2.1.1.2		
6.2.1.1.3	Privacy	54
6.2.1.1.4	Called identifier	54
6.2.1.1.5	SDP offer	54
6.2.1.2	Incoming requests to NGCN site	55
6.2.1.2.1		
6.2.1.2.2		55
6.2.1.2.3	•	
6.2.1.2.4	1	
6.2.1.3	Registration	
6.2.2	SIP protocol elements	
6.2.2.1	General	
6.2.2.2	Methods	
6.2.2.3	Responses	
6.2.2.4	Header fields	
6.2.2.5	Supported message bodies	
6.2.2.6 6.2.3	Event packagesSDP protocol	
6.2.3 6.2.4	Control plane transport	
6.2.4.1	Keep alive mechanism	
6.2.4.2	P-CSCF redundancy	
6.3	User plane interconnection	
6.3.1	Media and Codec	
6.4	Numbering, naming and addressing	
6.5	IP Version.	
6.6	Security	
7 0		
	pecific guidelines for the peering-based approach	
7.1	Reference model for interconnection	
7.1.1	General	
7.1.2	Functionalities performed by entities at the service layer	
7.1.2.1	Interconnection Border Control Function (IBCF)	
7.1.2.2 7.2	NGCN	
	Control plane interconnection	
7.2.1 7.2.1.1	SIP procedures Outgoing requests from NGCN site	
7.2.1.1	Incoming requests to NGCN site	
7.2.1.2	Registration	
7.2.1.3	SIP protocol elements	
7.2.2.1	General	

7.2.2.2	Methods	65
7.2.2.3	Responses	65
7.2.2.4	Header fields	
7.2.2.5	Supported message bodies	68
7.2.2.6	Event packages	68
7.2.3	SDP protocol	68
7.3	User plane interconnection	69
7.3.1	Media and Codec	69
7.4	Numbering, naming and addressing	69
7.5	IP Version	69
Annex A	A (informative): Bibliography	70
History		71

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

1 Scope

The purpose of the present document is to give an implementation guide to the relevant Common IMS specifications and functions used in the interconnection of a Next Generation Corporate Network site (NGCN site) to the NGN.

The present document addresses control plane signalling (usage of SIP and SDP protocols, required SIP headers) as well as other interconnecting aspects like security, numbering/naming/addressing and user plane issues such as transport protocol, media and codecs actually covered in a widespread set of 3GPP and ETSI TISPAN specifications, as seen from the perspective of an NGCN site.

Advice-of-charge aspects are addressed as far as SIP signalling is concerned.

The present document is based on TS 124 229 Release 7 [i.12] as modified by ES 283 003 Release 2 [i.15].

NOTE: Some errors corrected in TS 124 229 Release 8 and 9 are already taken into account in the present document.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at http://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

Not applicable.

2.2 Informative references


The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] IETF RFC 3261 (2002): "SIP: Session Initiation Protocol".
- [i.2] ETSI TS 181 019: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Business Communication Requirements".
- [i.3] ETSI TS 182 025: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Business trunking; Architecture and functional description".

- [i.4] ETSI TS 182 023: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Core and enterprise NGN interaction scenarios; Architecture and functional description".
- [i.5] IETF RFC 2976 (2000): "The SIP INFO Method".
- [i.6] IETF RFC 3262 (2002): "Reliability of Provisional Responses in the Session Initiation Protocol (SIP)".
- [i.7] IETF RFC 3515 (2003): "The Session Initiation Protocol (SIP) Refer Method".
- [i.8] IETF RFC 3311 (2002): "The Session Initiation Protocol (SIP) UPDATE method".
- [i.9] IETF RFC 3265 (2002): "Session Initiation Protocol (SIP) Specific Event Notification".
- [i.10] IETF RFC 3428: "Session Initiation Protocol (SIP) Extension for Instant Messaging".
- [i.11] IETF RFC 3903: "An Event State Publication Extension to the Session Initiation Protocol (SIP)".
- [i.12] ETSI TS 124 229 (Release 7): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Internet Protocol (IP) multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3 (3GPP TS 24.229 Release 7)".
- [i.13] IETF RFC 791 (1981): "DARPA Internet Program Protocol Specification".
- [i.14] IETF RFC 2460 (1998): "Internet Protocol, Version 6 (IPv6) Specification".
- [i.15] ETSI ES 283 003 (V2.y.z): "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); IP Multimedia Call Control Protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP) Stage 3 [3GPP TS 24.229 [Release 7], modified]".
- [i.16] ETSI ES 282 001 (V2.y.z): "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); NGN Functional Architecture".
- [i.17] ETSI TS 123 228: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); IP Multimedia Subsystem (IMS); Stage 2 (3GPP TS 23.228 Release 7)".
- [i.18] IETF RFC 3966 (2004): "The tel URI for Telephone Numbers".
- [i.19] IETF RFC 3860 (2004): "Common Profile for Instant Messaging (CPIM)".
- [i.20] IETF RFC 3859 (2004): "Common Profile for Presence (CPP)".
- [i.21] ETSI TS 183 021 (V2.y.z): "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Endorsement of 3GPP TS 29.162 Interworking between IM CN Sub-system and IP networks".
- [i.22] ECMA TR/96 "NGCN-Identity: "Next Generation Corporate Networks (NGCN) Identification and routing".
- [i.23] IETF RFC 3841 (2004): "Caller Preferences for the Session Initiation Protocol (SIP)".
- [i.24] Draft-ietf-sip-location-conveyance-11 (2008): "Location Conveyance for the Session Initiation Protocol".
- [i.25] IETF RFC 4244 (2005): "An Extension to the Session Initiation Protocol (SIP) for Request History Information".
- [i.26] IETF RFC 3911 (2004): "The Session Initiation Protocol (SIP) "Join" Header".
- [i.27] IETF RFC 4028 (April 2005): "Session Timers in the Session Initiation Protocol (SIP)".
- [i.28] IETF RFC 3455 (2003): "Private Header (P-Header) Extensions to the Session Initiation Protocol (SIP) for the 3rd-Generation Partnership Project (3GPP)".

[i.29]	IETF RFC 3325 (2002): "Private Extensions to the Session Initiation Protocol (SIP) for Network Asserted Identity within Trusted Networks".
[i.30]	IETF RFC 3323 (2002): "A Privacy Mechanism for the Session Initiation Protocol (SIP)".
[i.31]	IETF RFC 3326 (2002): "The Reason Header Field for the Session Initiation Protocol (SIP)".
[i.32]	IETF RFC 3329 (2003): "Security Mechanism Agreement for the Session Initiation Protocol (SIP)".
[i.33]	IETF RFC 3892 (2004): "The Session Initiation Protocol (SIP) Referred-By Mechanism".
[i.34]	Draft-drage-sipping-service-identification-02 (2008): "A Session Initiation Protocol (SIP) Extension for the Identification of Services".
[i.35]	IETF RFC 5002 (2007): "The Session Initiation Protocol (SIP) P-Profile-Key Private Header (P-Header)".
[i.36]	IETF RFC 4457 (2006): "The Session Initiation Protocol (SIP) P-User-Database Private-Header (P-header)".
[i.37]	IETF RFC 3313 (2003): "Private Session Initiation Protocol (SIP) Extensions for Media Authorization".
[i.38]	IETF RFC 5009 (2007): "Private Header (P-Header) Extension to the Session Initiation Protocol (SIP) for Authorization of Early Media".
[i.39]	IETF RFC 3891 (2004): "The Session Initiation Protocol (SIP) "Replaces" Header".
[i.40]	IETF RFC 4412 (2006): "Communications Resource Priority for the Session Initiation Protocol (SIP)".
[i.41]	ISO/IEC 9646-7 (1995): "Information technology Open Systems Interconnection Conformance testing methodology and framework Part 7: Implementation Conformance Statements".
[i.42]	ETSI ES 282 007: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); IP Multimedia Subsystem (IMS); Functional architecture".
[i.43]	IETF RFC 3856 (2004): "A Presence Event Package for the Session Initiation Protocol (SIP)".
[i.44]	IETF RFC 4662 (2006): "A Session Initiation Protocol (SIP) Event Notification Extension for Resource Lists".
[i.45]	IETF RFC 3680 (2004): "A Session Initiation Protocol (SIP) Event Package for Registrations".
[i.46]	Draft-ietf-sipping-gruu-reg-event-09 (2007): "Reg Event Package Extension for GRUUs".
[i.47]	IETF RFC 3857 (2004): "A Watcher Information Event Template Package for the Session Initiation Protocol (SIP)".
[i.48]	Draft-ietf-sip-xcapevent-08 (2009): "A Framework for Session Initiation Protocol User Agent Profile Delivery".
[i.49]	IETF RFC 4575 (2006): "A Session Initiation Protocol (SIP) Event Package for Conference State".
[i.50]	IETF RFC 3842 (2004) "A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP)".
[i.51]	IETF RFC 4354 (2006): "A Session Initiation Protocol (SIP) Event Package and Data Format for Various Settings in Support for the Push-to-Talk over Cellular (PoC) Service".
[i.52]	ETSI TS 133 203: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; 3G security; Access security for IP-based services (3GPP TS 33.203 Release 8)".



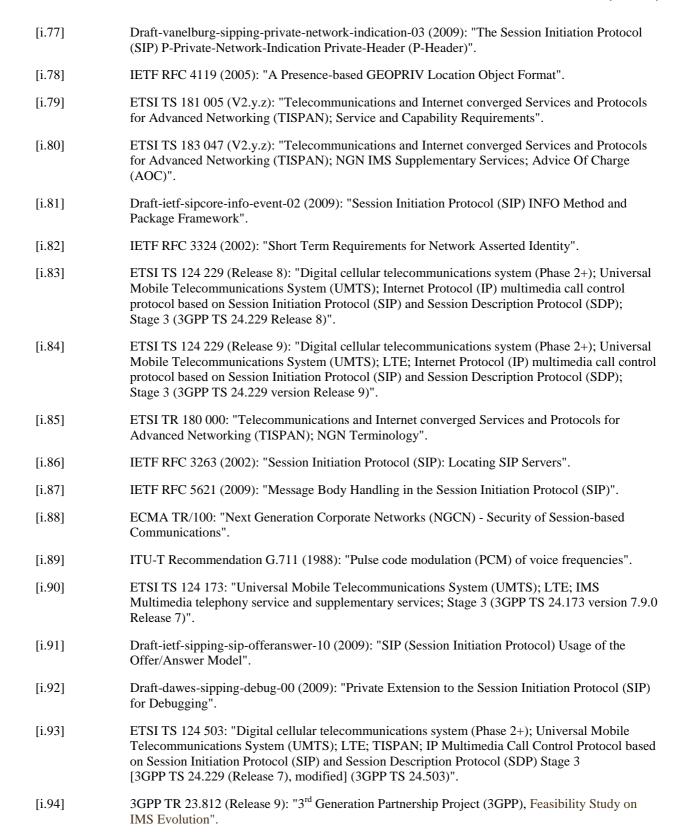

TR-69: "CPE WAN Management Protocol v1.1".

TR-104: "DSLHomeTM Provisioning Parameters for VoIP CPE".

[i.95]

[i.96]

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 180 000 [i.85], TS 181 019 [i.2], TS 182 025 [i.3] and the following apply:

NGCN Attachment Point: SIP entity inside the NGCN with a direct SIP interface to the NGN

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 180 000 [i.85], TS 181 019 [i.2] and TS 182 025 [i.3] apply.

4 Overview

4.1 Business Trunking architecture and protocols

Business trunking refers to an architecture where corporate networks appear to the NGN as an NGCN.

TS 182 025 [i.3] and TS 181 019 [i.2] provide architecture and functional requirements for business trunking making use of IMS and foresee two main interconnection models: the subscription based approach, where the entry point to the IMS is the P-CSCF, and the peering based approach, where the entry point to the IMS is the IBCF.

In both arrangement scenarios, aiming to support business trunking, protocol interconnection has to occur between NGCN and NGN:

- at a control plane level, in order that IMS procedures can be supported;
- at a user plane level, where media streams are exchanged.

The management of IP multimedia sessions is achieved using SIP. The transport mechanism for both SIP session signalling and media is UDP or TCP over IPv4 (RFC 791 [i.13]) or IPv6 (RFC 2460 [i.14]); for signalling optionally also TLS over TCP.

The protocol behaviour of the NGN functional entities involved in the signalling plane interconnection (IBCF, P-CSCF) is specified in TS 124 229 [i.12], taking into account the modifications specified in ES 283 003 [i.15].

The protocol behaviour of the NGCN is also expected to follow TS 124 229 [i.12], taking into account the modifications specified in ES 283 003 [i.15], subject to the applicable interconnection scenario:

- for the subscription-based approach the behaviour is based on the rules for a UE;
- for the peering-based approach the NGCN site appears to the NGN as if it were an IBCF complying with the requirements identified in TS 124 229 [i.12], clause 4.1 for this functional entity.

The present document presents guidelines for NGCNs connecting to an NGN for the purpose of business trunking.

NOTE: A given NGCN can have multiple business trunking arrangements with the same NGN or with different NGNs, some using the subscription-based approach and others using the peering-based approach.

4.2 Roadmap to relevant specifications

The following specifications are relevant for the implementation of the NGCN-NGN interface:

- TS 181 019 [i.2] provides Business Communication Requirements.
- TS 182 023 [i.4] provides architecture and functional description of Core and enterprise NGN interaction scenarios.
- TS 182 025 [i.3] gives architecture and functional description of Business trunking.
- TS 124 229 [i.12] defines a call control protocol for use in the IP Multimedia (IM) Core Network (CN) subsystem based on the Session Initiation Protocol (SIP), and the associated Session Description Protocol (SDP).
- ES 283 003 [i.15] provides the ETSI TISPAN endorsement of TS 124 229 [i.12] in line with the requirements of TISPAN NGN.

4.3 Specification methodology

4.3.1 General

Clauses 5, 6 and 7 of the present document describe the various aspects of an NGN-NGCN interconnection, including a description of SIP and SDP procedures, and the SIP methods and header fields to be supported, in the form of a series of tables and description.

Aspects common to both the subscription-based and the peering-based scenario are described in clause 5. Considerations for a particular scenario are covered in clauses 6 and 7 respectively.

The tables summarize key aspects of IMS SIP used in business trunking and are aligned with similar tables available in Annex A of TS 124 229 [i.12] as modified by ES 283 003 [i.15]. Each of the tables in the present document include two "Status" columns, one for the sending side, one for the receiving side. The status entries represent the requirements on an NGCN acting as sender / as receiver of a SIP message. The present document is an informative document and as such does not specify any changes to SIP described in TS 124 229 [i.12] as modified by ES 283 003 [i.15].

- NOTE 1: ES 283 003 [i.15] refers to TS 124 503 [i.93] which at the time of publication of the present document was still under development. The present document anticipates some changes that may be required to these baseline specifications in order to fully align with business trunking requirements and protocol impacts described in TS 182 025 [i.3]. Such anticipated changes are made clear through the use of notes.
- NOTE 2: The present document in some cases selects options from the baseline specifications. As an example, if the "status" column in the baseline specification indicates a condition for supporting a particular header field and that condition is always met by the implementation of the interface to an NGCN site then the "profile status" column for this header field is marked "mandatory" rather than "optional" or "conditionally mandatory" in the present document. Similarly if the "status" column in the baseline specification indicates that support of a particular header field is optional and the implementation of the interface to an NGCN site always require it then the "profile status" column for this header field is marked "mandatory" rather than "optional".

The notation for status codes is explained in clause 4.3.2.

There are cases where the status of a method or a header field depends on capabilities supported at the NGCN-NGN interface. In such a case, the status indicated in the tables depends on the status of the respective capability, as described in clause 4.4.

4.3.2 Notation for status codes

The following notations, defined in ISO/IEC 9646-7 [i.41], are used for the status column:

- m mandatory the capability is required to be supported.
- o optional the capability may be supported or not.
- n/a not applicable in the given context, it is impossible to use the capability.
- x prohibited (excluded) there is a requirement not to use this capability in the given context.
- o.i qualified optional for mutually exclusive or selectable options from a set. "i" is an integer, which identifies a unique group of related optional items and the logic of their selection, which is defined immediately following the table.
- ci conditional the requirement on the capability ("m", "o", "x" or "n/a") depends on the support of other optional or conditional items. "i" is an integer identifying a unique conditional status expression which is defined immediately following the table.

In the status columns of tables within subsequent sections, status codes m, o, c, x and n/a have the following meanings, as specified in the base standards, with the following qualifications:

- Conformance requirements are indicated in static terms, meaning that a behaviour indicated as mandatory shall be observed when the implementation is placed in conditions in which the conformance requirements of the reference specification compel it to do so. For instance, if the support for a header field in a sent message is indicated as mandatory, it does not mean that the NGCN shall always include that header field when sending the message concerned, but that the NGCN shall include that header field in the message concerned in circumstances specified in the reference specification.
- If support for a particular behaviour is required, there is no requirement for every SIP-capable entity within the NGCN to support that behaviour, but at least one element involved shall support that behaviour. For instance, if the support for a header field in a sent message is indicated as mandatory, it does not mean that all NGCN entities involved in handling the message to be sent shall support inclusion of that header field, but at least one NGCN entity shall be able to insert that header field such that it appears in the resulting message sent to the NGN.
- When appearing in a column relating to sending by an NGCN, the notation 'm' means that an NGCN shall support this capability when sending a message.
- When appearing in a column relating to receiving by an NGCN, the notation 'm' means that an NGCN shall support this capability when present in a received message.
- The notation 'o' means that the capability may or may not be supported by an NGCN, this being an implementation choice.
- When appearing in a column relating to sending by an NGCN, the notation 'n/a' means that there is no requirement for an NGCN to support this capability when sending a message.
- When appearing in a column relating to receiving by an NGCN, the notation 'n/a' means that there is no requirement for an NGCN to support this capability when present in a received message.
- When appearing in a column relating to sending by an NGCN, the notation 'x' means that an NGCN shall not use this capability when sending a message.
- When appearing in a column relating to receiving by an NGCN, the notation 'x' means that an NGCN shall ignore this capability when present in a received message.

NOTE: The current specifications 24.229 Release 8 and beyond 24.503 do not allow the usage of the GRUU for a complex UE.

4.4 Major capabilities at the NGCN-NGN interface

4.4.1 Service capabilities

Table 4.1 describes the Service Capabilities supported by NGCN at the NGCN-NGN interface.

Table 4.1: Major capabilities supported by NGCN at the NGCN-NGN interface

Item	Does the implementation support	Reference	Status
1	Advice of Charge as a Client	TS 182 025 [i.3], clause 6.1.12	О
2	Multimedia telephony service	TS 124 173 [i.90]	О

4.4.2 Protocol capabilities

4.4.2.1 General

The NGCN is expected to support the following SIP capabilities under the stated circumstances.

4.4.2.2 Basic requirements

- Session control: The support of INVITE initiated dialogs is mandatory if media sessions are supported across the NGCN NGN interface where media can be any mix of audio, video, and application data. In subscription-based approach both UAC and UAS side procedures are applicable; in peering-based approach proxy procedures may apply as well.
- **Registration, client side:** Mandatory when working in subscription mode, not applicable in peering mode.
- **Event notification framework:** SUBSCRIBE/NOTIFY support is mandatory if any SIP event package is supported. Depending on the package the NGCN will act as subscriber or as notifier.
- Event state publication: Support of the PUBLISH method is optional.
- Messaging: Support of the MESSAGE method is mandatory if instant messages are supported. There is no specific use case specified in TS 182 025 [i.3] that requires an NGCN to send the MESSAGE method. See table 5.1 for details on the support of the MESSAGE method on sending and receiving sides. In TS 123 228 [i.17] it is only specified for a UE to support Messaging, that implies that it is mandatory in the case of Subscription based approach.
- UA-UA Authentication (Digest) (see [i.1], clause 22.2): mandatory for REPLACES or JOIN else optional.
- UA-Proxy Authentication (Digest) (see [i.1], clause 20.28, 22.3): optional.

4.4.2.3 Extensions for session control

The following bullets list a number of SIP extensions and their status for the NGCN-NGN interface. The list is not exhaustive but contains all items relevant to the NGCN-NGN interface.

- **Fixes for non-INVITE transactions** (see [i.61]): mandatory.
- **Fork-loop fixes** (see [i.53]): mandatory if forking in NGCN is possible else not applicable.
- Reliable provisional responses (PRACK) (see [i.6]): mandatory if using session preconditions else optional.
- **INFO method** (see [i.5]): optional; required for AoC.
- **REFER method, Referred-by header field** (see [i.7], [i.33]): both optional.
- **UPDATE method** (see [i.8]): optional.

- **Session Preconditions (for QoS)** (see [i.54], [i.55]): mandatory if initiating a session requiring resource reservation else optional.
- Symmetric response routing (see [i.58]): optional.
- Caller preferences (see [i.23]): optional.
- Callee capabilities (see [i.59]): optional.
- **Replaces** (see [i.39]): optional.
- **Join** (see [i.26]): optional.
- **P-Asserted-Identity** (see [i.29]): mandatory.
- **Privacy** (see [i.30]): mandatory (privacy value 'id').
- **P-Called-Party-ID** (see [i.28]): optional; not applicable for peering mode.
- **P-Access-Network-Info** (see [i.28]): mandatory for GPRS, 3GPP2, I-WLAN and DOCSIS IP-CAN access types and optional for the others.
- **Session timer** (see [i.27]): optional.
- UA-UA and UA-Proxy Authentication (Digest) (see [i.1]): both optional.
- **History-Info and privacy of history info** (see [i.25]): optional.
- **GRUUs** (see [i.63]): optional.
- **ICE** (see [i.72]): optional.
- **SIP Outbound** (see [i.65]): optional.
- Location conveyance (see [i.24]): optional.
- **Service URNs (e.g. 'sos')** (see [i.62]): mandatory.
- Private Network Traffic (see [i.77]): optional.
- **Authorization of Early Media** (see [i.38]): optional.
- **Identification of communication services extension (P-Preferred-Service)** (see [i.34]): optional in the subscription-based approach, not applicable in the peering based approach.

4.4.2.4 Extensions for registration (subscription based approach only)

The following bullets list a number of SIP extensions and their status for the NGCN-NGN interface. The list is not exhaustive but contains all items relevant to the NGCN-NGN interface.

- **UA-Registrar Authentication** (see [i.1]): mandatory.
- Session initiation protocol extension header field for registering non-adjacent contacts (Path header field) (see [i.56]): mandatory. The support of the extension is indicated in the Supported header field sent by the NGCN. It is up to the NGCN whether it uses the Path header field received in the 200 OK response.
- **Reg-event package** (see [i.45]): mandatory.

Subscription to the reg-event package provided by the NGN enables the NGN with the following capabilities:

- informing the NGCN about the implicitly registered public user identities;
- informing the NGCN about the registration state of all explicitly and implicitly registered public user identities;

- forcing the NGCN at any time to perform re-registration after a NGN determined time (network initiated re-registration);
- network initiated de-registration of one or more registered public user identities of the NGCN.
- NOTE 1: TS 124 229 [i.12] mandates the support of the 'reg' event package. In particular the last two capabilities above are needed by the NGN operator e.g. in cases when the network wants to re-authenticate the user (network initiated re-registration) or when the S-CSCF needs to shut down for maintenance purposes and the user should register newly at a different S-CSCF (network initiated de-registration).
- Session initiation protocol extension header field for service route discovery during registration (Service-Route header field) (see [i.57]): mandatory. If the UE does not set the content of the Service-Route received during the last successful registration or re-registration, in a Route header field of an outgoing SIP Request, the P-CSCF may reject this request.
- The P-Associated-URI header extension (P-Associated-URI header field) (see [i.29]): mandatory.
- NOTE 2: TS 124 229 [i.12] mandates the support of the P-Associated-URI header field to enable the NGN to provide to the UE the implicitly registered public user identities. There is no requirement in TS 182 025 [i.3] to use this header field inside the NGCN site.
- **Security mechanism agreement** (see [i.32]): mandatory if SIP Digest with TLS or IMS AKA plus IPsec ESP is used to secure the signalling exchange between the UE and the network else optional (see TS 124 229 [i.12], clause 5.1.1.5, TS 133 203 [i.52], clause 6 and TS 133 203 [i.52], annexes N and O).
- **SIP extensions for media authorization** (see [i.37]): mandatory if initiating session and GPRS else n/a.

5 Common guidelines

5.1 Reference model for interconnection

The reference model for interconnection is scenario specific; refer to clause 6.1 for the subscription-based approach and to clause 7.1 for the peering based method of interconnection.

5.2 Control plane interconnection

5.2.1 SIP procedures

5.2.1.1 Outgoing requests from NGCN site

5.2.1.1.1 General

The following clauses provide guidance on the expected NGCN site behaviour when sending a request to the NGN and receiving a response from the NGN. Allowed formats for URIs are listed in clause 5.4, but other formats may possibly be used by agreement between enterprise and NGN.

The terms **trust**, **trusted by** and **trust domain** in the following clauses are used as defined in RFC 3324 [i.82] and relate only to the handling of P-Asserted-Identity and Privacy:id header fields as specified in RFC 3325 [i.29]. RFC 3324 [i.82] defines Spec (T) as the set of specifications and configuration settings that are used to ensure trust.

The trust relationship between NGCN sites and NGN is a matter of an SLA between enterprise and NGN operator. If according to the SLA the NGN and NGCN form part of the same trust domain, the SLA includes a Spec (T) applicable to the interconnection of NGCN and NGN. In this case the NGN trusts the NGCN site and vice versa (as described in RFC 3324 [i.82]). On the other hand the NGCN site may trust the NGN even if the NGCN site is not in the trust domain of the NGN.

NOTE 1: TS 182 025 [i.3] talks about trust only in the context of the NGN trusting the NGCN regarding the SIP header fields P-Asserted-Identity and related Privacy provided by the NGCN in a SIP request or SIP response.

- NOTE 2: According to RFC 3324 [i.82], for an NGCN site outside the trust domain, trusting the NGN implies both secured signalling and knowledge that the peer NGN entity belongs to a recognized trust domain. As a consequence signalling that is not secured is equivalent to not trusting the NGN
- NOTE 3: Trust is required if privacy applies; for identities that are not subject to privacy it is a matter of policy whether they are passed to a non-trusted node.

5.2.1.1.2 Calling and connected identifiers

When sending a request to the NGN the NGCN site can include a calling party identity in the P-Asserted-Identity header field in accordance with RFC 3325 [i.29].

NOTE 1: If included, the asserted identity is in addition to the identity provided by the calling party in the From header field.

The NGCN site can provide two P-Asserted-Identity header fields, one containing a SIP URI and the other containing a TEL URI, in order to provide alias identities for the calling party (see TS 181 019 [i.2]).

The handling of the P-Asserted-Identity header field(s) by the NGN depends on whether the NGN trusts the NGCN or not and on the scenario (subscription based or peering).

NOTE 2: If the NGN trusts the NGCN site it will accept a P-Asserted-Identity received from the NGCN.

A calling identifier in a From or P-Asserted-Identity header field is expected to comply with the formats listed in clause 5.4 where an entity internal to the NGCN site is identified.

The NGCN site may receive a connected party identity in the P-Asserted-Identity header field in a 18x or 2xx final response depending on NGN policy and the trust relationship between NGN and NGCN.

5.2.1.1.3 Privacy

If the NGCN site requires privacy for the calling party identity it will include a Privacy:id header field when sending a request to the NGN.

- NOTE 1: This header field asks the NGN not to send a P-Asserted-Identity to a recipient outside its trust domain.
- NOTE 2: The calling party will also put an anonymous SIP URI into the From header field if privacy is required.

The NGCN site may insert a P-Asserted-Identity header field in addition to Privacy:id if it trusts the NGN. If the NGCN site does not trust the NGN the NGCN site will not include a P-Asserted-Identity for which privacy is required.

5.2.1.1.4 Called identifier

The To header field may contain any URI format. The Request-URI has to be in a format supported by the NGN for the request to be accepted. TS 124 229 [i.12] clause 5.1.2A.1.2 gives information on the format of the Request-URI.

5.2.1.2 Incoming requests to NGCN site

5.2.1.2.1 General

The following clauses provide guidance on the common aspects of expected NGCN site behaviour when receiving a request from the NGN.

The text from clause 5.2.1.1.1 on trust also applies here.

The supported URI formats are listed in clause 5.4.

5.2.1.2.2 Calling identity

The NGCN site can receive a user provided calling identity in the From header field and an asserted calling identity in the P-Asserted-Identity header field. The P-Asserted-Identity can be accompanied by a Privacy:id header field if presentation of this identity is restricted and the NGN trusts the NGCN.

Conditions under which the NGN will send such identities depend on the availability of the information and on privacy requirements as specified in TS 182 025 [i.3] and TS 124 229 [i.12] as modified by ES 283 003 [i.15], and are also subject to an SLA between NGN and NGCN.

5.2.1.2.3 Called identity

The NGCN site may return a called party identity, which may or may not be one of the public user identities allocated to the NGCN site, in form of a P-Asserted-Identity header field in a 18x or 2xx response, as specified in TS 182 025 [i.3].

5.2.1.2.4 Request-URI

For an initial or standalone request the Request-URI will normally contain a public user identity assigned to the NGCN; an exception will be an initial call to a globally routable contact address, e.g. in the case of an emergency call-back.

NOTE: For a mid-dialog request the Request-URI will contain the target URI learned from the respective Contact header field at dialog establishment time or through the most recent target refreshment.

5.2.2 SIP protocol elements

5.2.2.1 General

NOTE: The status of some header fields and parameters described in this clause may not be applicable in case of private network traffic. Further study is required to identify the list of header fields that must be supported to ensure proper handling of private traffic in the IMS.

5.2.2.2 Methods

Table 5.1 provides information on the SIP methods to be supported by the NGCN site for the connection to the NGN.

It is based on tables A.5 and A.163 of TS 124 229 [i.12] as modified by ES 283 003 [i.15] and considering Business Trunking specific requirements as described in TS 182 025 [i.3].

Table 5.1: Supported methods

Item	PDU		Sending		Receiving		
		Ref.	Profile Status	Ref.	Profile Status		
1	ACK request	[i.1] 13	c2	[i.1] 13	c2		
2	BYE request	[i.1] 15.1	c2	[i.1] 15.1	c2		
3	BYE response	[i.1] 15.1	c2	[i.1] 15.1	c2		
4	CANCEL request	[i.1] 9	m (note 3)	[i.1] 9	m (note 3)		
5	CANCEL response	[i.1] 9	m (note 3)	[i.1] 9	m (note 3)		
8	INVITE request	[i.1] 13	c2	[i.1] 13	c2		
9	INVITE response	[i.1] 13	c2	[i.1] 13	c2		
9A	MESSAGE request	[i.10]	M (note 5)	[i.10]	m (note 4)		
9B	MESSAGE response	[i.10]	m (note 4)	[i.10]	m (note 5)		
12	OPTIONS request	[i.5]	m	[i.5]	m		
13	OPTIONS response	[i.5]	m	[i.5]	m		
14	PRACK request	[i.6]	О	[i.6]	0		
15	PRACK response	[i.6]	О	[i.6]	0		
15A	PUBLISH request	[i.11]	o (note 2)	[i.11]	o (note 2)		
15B	PUBLISH response	[i.11]	o (note 2)	[i.11]	o (note 2)		
16	REFER request	[i.7]	o (note 1)	[i.7]	o (note 1)		
17	REFER response	[i.7]	o (note 1)	[i.7]	o (note 1)		
22	UPDATE request	[i.8]	0	[i.8]	О		
23	UPDATE response	[i.8]	0	[i.8]	О		
24	INFO request	[i.5]	c1	[i.5]	c1		
24		[i.5]	c1	[i.5]	c1		
c1:	IF 4.1/1 THEN m ELSE o -						
c2:	IF the NGCN site supports						
NOTE 1:				call transfer o	or conference, for		
	example, when exposed a						
NOTE 2:			ed to be in conjunction with	h presence, f	for example, when		
	exposed at the NGCN-NGN interface.						
NOTE 3:							
NOTE 4	the use of the INVITE request which status is conditional. The status should be "c2".						
NOTE 4:	ETS 123 228 [i.17], clause 5.4.9.0 requires AS or S-CSCF to be able to send information to UEs using						
NOTE 5.	SIP based messages.		au vinin au thant am NICCNI aite		ad a MECCACE resource		
NOTE 5:	There is no mandated circumstated it supports IM or up						
	unless it supports IM or un to the NGN.	iess retarget	ing causes a received ME	SOAGE requ	desi to be redirected back		
	to the NGN.						

According to clause 21.5.2 of [i.1] if the NGCN site receives unknown SIP method from the NGN, it answers with a 501 (Not implemented) response.

5.2.2.3 Responses

The NGCN site has to be prepared to send and receive SIP responses listed in TS 124 229 [i.12], annex A, as described in table 5.2.

Table 5.2: Supported response codes

Item	Header	Ref.	Sending	Receiving	Comments
1	100 (Trying)	[i.1] 21.1.1	0	m	
2		[i.1] 21.1.2	0	m	Only applicable for INVITE response.
3	181 (Call Is Being Forwarded)	[i.1] 21.1.3	0	m	Only applicable for INVITE response.
4	182 (Queued)	[i.1] 21.1.4	0	m	Only applicable for INVITE response.
5	183 (Session Progress)	[i.1] 21.1.5	o (see note)	m	Only applicable for INVITE response. The status of this header field on receiving side in TS 124 229 [i.12] is different due to a mistake. This mistake is considered to be "not essential" and is corrected in TS 124 229 Release 9 [i.84].
6 7	200 (OK)	[i.1] 21.2.1	m o4	m a1	
	202 (Accepted)	[i.9] 8.3.1	c1	c1	
8	300 (Multiple Choices)	[i.1] 21.3.1	m	m	
9 10	301 (Moved Permanently) 302 (Moved Temporarily)	[i.1] 21.3.2 [i.1] 21.3.3	m	m	
11	305 (Use Proxy)	[i.1] 21.3.3 [i.1] 21.3.4	m m	m m	Not commonly used by NGCNs.
12	380 (Alternative Service)	[i.1] 21.3.4 [i.1] 21.3.5	m	m	Not commonly used by NGCNs.
13	,				Not commonly used by NGCNs.
14	400 (Bad Request) 401 (Unauthorized)	[i.1] 21.4.1 [i.1] 21.4.2	m	m	
15	402 (Payment Required)	[i.1] 21.4.2 [i.1] 21.4.3	o n/a	m n/a	
16		[i.1] 21.4.3 [i.1] 21.4.4	m	m	
17	,	[i.1] 21.4.5	m	m	
18	405 (Method Not Allowed)	[i.1] 21.4.6	m	m	
19	406 (Not Acceptable)	[i.1] 21.4.7	m	m	
20		[i.1] 21.4.8	0	m	
21		[i.1] 21.4.9	0	m	Optionally sent in an INVITE response.
22		[i.1] 21.4.10	m	m	
22A		[i.11] 11.2.1	c2	c2	
23		[i.1] 21.4.11	m	m	
24		[i.1] 21.4.12	m	m	
25	415 (Unsupported Media Type)	[i.1] 21.4.13	m	m	
26	416 (Unsupported URI Scheme)	[i.1] 21.4.14	m	m	
27		[i.1] 21.4.15	m	m	
28		[i.1] 21.4.16	0	i	
28A		[i.27] 6	c 3	c 3	
29	423 (Interval Too Brief)	[i.1] 21.4.17	c4	c4	
29A	424 (Bad Location Information)	[i.24] 3.3	c 5	c5	
29B	429 (Provide Referrer Identity)	[i.33] 5	c6	c7	
29C	430 (Flow Failed)	[i.65] 11	n/a	c8	ACD assume with a part was assisted that
29D	433 (Anonymity Disallowed)	[i.60] 4	c9	0	ACR currently not required by TS 182 025 [i.3] stage 2.
30		[i.1] 21.4.18	m	m	
31	Exist)	[i.1] 21.4.19	m	m	
32	482 (Loop Detected)	[i.1] 21.4.20	m	m	
33	483 (Too Many Hops)	[i.1] 21.4.21	m	m	
34	484 (Address Incomplete)	[i.1] 21.4.22	0	m	
35	485 (Ambiguous)	[i.1] 21.4.23	0	m	
36	486 (Busy Here)	[i.1] 21.4.24	m	m	
37	487 (Request Terminated)	[i.1] 21.4.25	m	m	
38	488 (Not Acceptable Here)	[i.1] 21.4.26	m o10	m o10	
39	489 (Bad Event)	[i.9] 7.3.2	c10	c10	
40	491 (Request Pending)	[i.1] 21.4.27	m	m	
41		[i.1] 21.4.28	m n/o	m	
41A		[i.32] 2	n/a	c 11	<u> </u>
42	500 (Internal Server Error)	[i.1] 21.5.1	m	m	

Item	Header	Ref.	Sending	Receiving	Comments	
43	501 (Not Implemented)	[i.1] 21.5.2	m	m		
44	502 (Bad Gateway)	[i.1] 21.5.3	0	m		
45	503 (Service Unavailable)	[i.1] 21.5.4	m	m		
46	504 (Server Time-out)	[i.1] 21.5.5	m	m		
47	505 (Version not supported)	[i.1] 21.5.6	m	m		
48	513 (Message Too Large)	[i.1] 21.5.7	m	m		
49	580 (Precondition Failure)	[i.54] 8			The status of this Responde Code is missing in the current specifications (TS 124 229 Release 7 [i.12], Release 8 [i.83] and Release 9 [i.84]).	
50	600 (Busy Everywhere)	[i.1] 21.6.1	m	m		
51	603 (Decline)	[i.1] 21.6.2	c 12	m		
52	604 (Does Not Exist Anywhere)	[i.1] 21.6.3	m)	m		
53	606 (Not Acceptable)	[i.1] 21.6.4	m	m		
c1:	If SUBSCRIBE or REFER then m	else o.				
c2:	If PUBLISH then m else n/a.					
c3:	If session-timer then m else n/a.					
c4:	If REGISTER or SUBSCRIBE ther	n m else n/a.				
c5:	If location-conveyance then m else					
c6:	If REFER and referred-by then o e					
c7:	If REFER and referred-by then me	else n/a.				
c8:	If outbound then m else n/a.					
c9:	If ACR then m else n/a.					
c10:	If SUBSCRIBE or NOTIFY then m else n/a.					
c11:	If security-agreement then m else n/a.					
c12:	If INVITE/replaces then m else o.					
NOTE:	The sending of this response code resource reservation (Session Pre-			g a session	which requires local and/or remote	

5.2.2.4 Header fields

5.2.2.4.1 General

The following clauses list header fields with a specific relevance in a business trunking context. The usage of these header fields follows normal SIP rules, with some additional qualifications as described below.

5.2.2.4.2 Accept

As specified in TS 182 025 [i.3], if the agreement between the NGN and the NGCN specifies that an NGCN site receives advice of charge information, this header field indicates the support of MIME bodies of type "application/vnd.etsi.aoc+xml" defined in TS 183 047 [i.80].

5.2.2.4.3 Allow

As specified in TS 182 025 [i.3], if the agreement between the NGN and the NGCN specifies that an NGCN site receives advice of charge information, this header field indicates the support of the INFO method.

5.2.2.4.4 Contact

In an outgoing dialog initiating or target refresh request this header field contains the target URI within the NGCN (which can be different from the public user identities assigned to the NGCN site) for receiving subsequent mid-dialog requests. This URI may also be suitable for receiving future out-of-dialog requests.

In a 2xx final response to an incoming dialog initiating or target refresh request this header field contains the target URI within the NGCN (which can be different from the public user identities assigned to the NGCN site) for receiving subsequent mid-dialog requests. This URI may also be suitable for receiving future out-of-dialog requests.

5.2.2.4.5 Max-Breadth

As an NGCN site may comprise multiple SIP entities, the Max-Breadth header field can prevent loops by limiting forking within the NGCN site.

5.2.2.4.6 Max-Forwards

As an NGCN site may comprise multiple SIP entities, the Max-Forwards header field can prevent loops by limiting the number of nodes that can forward the request within the NGCN site.

5.2.2.4.7 P-Private-Network-Indication

As stated in TS 182 025 [i.3], the NGN can include a Private-Network-Indicator header field as specified in draft-vanelburg-sipping-private-network-indication [i.77] in an initial request or standalone request to the NGCN site, and the NGCN site can include this header field in an initial request or standalone request to the NGN.

5.2.2.4.8 Record-Route

As an NGCN site may comprise multiple SIP entities, this header field may be populated by entities within the NGCN site

- in a dialog initiating request sent to the NGN;
- in a response to a dialog initiating request received from the NGN.

When internally received by the NGCN attachment point, this header field has to be passed on by the attachment point and the attachment point can also add its own Record-Route header field.

5.2.2.4.9 Route

As an NGCN site may comprise multiple SIP entities, the header field may contain additional URIs addressing nodes within the NGCN site in a request received from the NGN.

NOTE: The NGN may know the route set within the NGCN site from a Record-Route received earlier on the same dialog, through configuration, or from a Path header field received during registration when working in subscription mode.

5.2.2.4.10 Via

As an NGCN site may comprise multiple SIP entities, this header field may be populated by multiple entities within the NGCN site in an outgoing request to the NGN.

5.2.2.4.11 Summary of message headers

The following tables provide information on the SIP header fields to be supported by the NGCN site for the interconnection to the NGN.

As per the procedures specified in RFC 3261 [i.1], the NGCN site shall ignore received unknown SIP header fields and unknown header field parameters and continue processing the request or response where they were contained.

The tables below are based on clause A.2 of TS 124 229 [i.12] as modified by ES 283 003 [i.15] and considering Business Trunking specific requirements as described in TS 182 025 [i.3].

Table 5.3: Supported headers within the ACK request

Item	Header	Ref.	Sending	Receiving	Content / Comment
1	Accept-Contact	[i.23] 9.2	c5	c6	
2	Allow-Events	[i.9] 7.2.2	0	m	
3	Authorization	[i.1] 20.7	c3	c3	
4	Call-ID	[i.1] 20.8	m	m	
6	Content-Disposition	[i.1] 20.11	0	m	
7	Content-Encoding	[i.1] 20.12	0	m	
8	Content-Language	[i.1] 20.13	0	m	
9	Content-Length	[i.1] 20.14	m	m	
10	Content-Type	[i.1] 20.15	m	m	
11	Cseq	[i.1] 20.16	m	m	
12	Date	[i.1] 20.17	0	m	
13	From	[i.1] 20.20	m	m	
13A	Max-Breadth	[i.53] 5.8	0	c1	
14	Max-Forwards	[i.1] 20.22	m	c2	
15	MIME-Version	[i.1] 20.24	0	m	
15A	Privacy	[i.30] 4.2	n/a	n/a	
16	Proxy-Authorization	[i.1] 20.28	c4	n/a	
17	Proxy-Require	[i.1] 20.29	0	m	According to RFC 3261 [i.1] this header field cannot be present in ACK request. TS 124 229 [i.12] is expected to be corrected in future versions.
17A	Reason	[i.31] 2	0	0	
17B	Reject-Contact	[i.23] 9.2	c5	c6	
17C	Request-Disposition	[i.23]] 9.1	c5	c6	
18	Require	[i.1] 20.32	m	m	According to RFC3261 [i.1] this header field cannot be present in ACK request. TS 124 229 [i.12] is expected to be corrected in future versions.
19	Route	[i.1] 20.34	m	c2	
20	Timestamp	[i.1] 20.38	0	m	
21	То	[i.1] 20.39	m	m	
22	User-Agent	[i.1] 20.41	0	0	
23	Via	[i.1] 20.42	m	m	
c1:	IF forking is possible				
c2:					g the attachment point to the NGN)
c3:	IF UA-UA Authentica	tion is used TH	EN m ELSE o		
c4:	IF UA-Proxy Authent	ication is used	THEN m ELSE	О.	
c5:	IF Caller Preferences				
c6:	IF Caller Preferences	extension is su	upported THE	N m ELSE n/a	

Table 5.4: Supported headers within the BYE request

Item	Header	Ref.	Sending	Receiving	Comment		
1	Accept	[i.1] 20.1	0	m			
1A	Accept-Contact	[i.23] 9.2	c7	c8 (see note)			
2	Accept-Encoding	[i.1] 20.2	0	m			
3	Accept-Language	[i.1] 20.3	0	m			
ЗА	Allow	[i.1] 20.5	0	m			
4	Allow-Events	[i.9] 7.2.2	0	m			
5	Authorization	[i.1] 20.7	c3	c3			
6	Call-ID	[i.1] 20.8	m	m			
7	Content-Disposition	[i.1] 20.11	0	m			
8	Content-Encoding	[i.1] 20.12	0	m			
9	Content-Language	[i.1] 20.13	0	m			
10	Content-Length	[i.1] 20.14	m	m			
11	Content-Type	[i.1] 20.15	m	m			
12	Cseq	[i.1] 20.16	m	m			
13	Date	[i.1] 20.17	0	m			
14	From	[i.1] 20.20	m	m			
14A	Geolocation	[i.24] 3.2	0	0			
14B	Max-Breadth	[i.53] 5.8	0	c1			
15	Max-Forwards	[i.1] 20.22	m	c5			
16	MIME-Version	[i.1] 20.24	0	m			
16A	P-Access-Network-Info	[i.28] 4.4	c2	n/a			
16B	P-Asserted-Identity	[i.29] 9.1	c6	О	This header is part of the SLA between the enterprise and the operator (on the support or not of a trusted connection).		
16C	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a	,		
16D	P-Charging-Vector	[i.8] 4.6	n/a	n/a			
16E	P-Preferred-Identity	[i.29] 9.2	n/a	n/a			
16F	Privacy	[i.30] 4.2	0	c12	(See note 2).		
17	Proxy-Authorization	[i.1] 20.28	c4	n/a			
18	Proxy-Require	[i.1] 20.29	0	m	Values equal to those in NVITE request.		
18A	Reason	[i.31] 2	0	0			
19	Record-Route	[i.1] 20.30	n/a	n/a			
19A	Referred-By	[i.33] 3	c9	c10			
19B	Reject-Contact	[i.23] 9.2	c7	c8 (see note 1)			
19C	Request-Disposition	[i.23] 9.1	c7	c8 (see note 1)			
20	Require	[i.1] 20.32	m	m	Values equal to those in INVITE request.		
21	Route	[i.1] 20.34	m	c5			
22	Supported	[i.1] 20.37	m	m			
23	Timestamp	[i.1] 20.38	0	m			
24	То	[i.1] 20.39	m	m			
25	User-Agent	[i.1] 20.41	0	0			
26	Via	[i.1] 20.42	m	m			
c1:							
c2:	IF the access type is				AN IHEN m ELSE o.		
c3:	IF UA-UA Authentication is used THEN m ELSE o.						
c4:	IF SIP digest is used THEN m ELSE o.						
c5:	IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN						
-0:	m ELSE n/a.						
c6:	1 ,						
c7:	!!						
c8:							
c9:	IF Referred-By mechanism is supported THEN m ELSE n/a.						
c10:	·						
c12:							
INOTE	NOTE 1: There is no use case for receiving Accept-Contact, Reject-Contact and Request-Disposition headers in						
NOTE	BYE request. 2: Privacy is for further s	tudy in TQ 10	2 025 [i 2]				
NOTE 2: Privacy is for further study in TS 182 025 [i.3].							

Table 5.5: Supported headers within the 200 OK response to the BYE request

Item	Header	Ref.	Sending	Receiving	Comment			
1	Allow	[i.1] 20.5	0	m				
2	Allow-Events	[i.9] 7.2.2	0	m				
3	Authentication-Info	[i.1] 20.6	0	m				
4	Call-ID	[i.1] 20.8	m	m				
5	Content-Disposition	[i.1] 20.11	0	m				
6	Content-Encoding	[i.1] 20.12	0	m				
7	Content-Language	[i.1] 20.13	0	m				
8	Content-Length	[i.1] 20.14	m	m				
9	Content-Type	[i.1] 20.15	m	m				
10	Cseq	[i.1] 20.16	m	m				
11	Date	[i.1] 20.17	0	0				
12	From	[i.1] 20.20	m	m				
14	MIME-Version	[i.1] 20.24	0	m				
15	P-Access-Network- Info	[i.28] 4.4	c2	c2				
16	P-Asserted-Identity	[i.29] 9.1	n/a	c1				
17	P-Charging- Function-Addresses	[i.28] 4.5	n/a	n/a				
18	P-Charging-Vector	[i.28] 4.6	n/a	n/a				
19	P-Preferred-Identity	[i.30] 9.2	n/a	n/a				
20	Privacy	[i.31] 4.2	0	c3	(See note)			
21	Require	[i.1] 20.32	m	m				
22	Server	[i.1] 20.35	0	0				
23	Supported	[i.1] 20.37	m	m				
24	Timestamp	[i.1] 20.38	m	0				
25	То	[i.1] 20.39	m	m				
26	User-Agent	[i.1] 20.41	0	0				
27	Via	[i.1] 20.42	m	m				
28	Warning	[i.1] 20.43	0	0				
c1: c2: c3:	IF the NGCN site can be deployed in an environment where it is trusted THEN "o" ELSE "n/a". IF the access type is GPRS, 3GPP2, I-WLAN and DOCSIS IP-CAN THEN "m" ELSE "o".							
ω.	3: IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o.							

NOTE: Privacy is for further study.

Table 5.6: Supported headers within the CANCEL request

Item	Header	Ref.	Sending	Receiving	Comment	
1	Accept-Contact	[i.23] 9.2	c3	c4		
5	Authorization	[i.1] 20.7	0	0		
6	Call-ID	[i.1] 20.8	m	m		
8	Content-Length	[i.1] 20.14	m	m		
9	Cseq	[i.1] 20.16	m	m		
10	Date	[i.1] 20.17	0	m		
11	From	[i.1] 20.20	m	m		
11A	Max-Breadth	[i.53] 5.8	0	c2	Upon reception of Max-Breadth header in a CANCEL request, no special behaviour is required (header field is ignored).	
12	Max-Forwards	[i.1] 20.22	m	c2		
14	Privacy	[i.30] 4.2	n/a	n/a	(See note)	
15	Reason	[i.31] 2	0	0		
16	Record-Route	[i.1] 20.30	n/a	n/a		
17	Reject-Contact	[i.23] 9.2	c3	c4		
17A	Request-Disposition	[i.23] 9.1	c3	c4		
18	Route	[i.1] 20.34	m	c2		
19	Supported	[i.1] 20.37	m	m		
20	Timestamp	[i.1] 20.38	0	m		
21	То	[i.1] 20.39	m	m		
22	User-Agent	[i.1] 20.41	0	0		
23	Via	[i.1] 20.42	m	m		
c2: c3: c4:	THEN m ELSE n/a. c3: IF Caller Preferences extension is supported THEN o ELSE n/a.					
NOTE:			-	· · · · · = = · ·		

Table 5.7: Supported headers within the 200 OK response to the CANCEL request

Item	Header	Ref.	Sending	Receiving	Comment
1	Call-ID	[i.1] 20.8	m	m	
2	Content-Length	[i.1] 20.14	m	m	
3	Cseq	[i.1] 20.16	m	m	
4	Date	[i.1] 20.17	0	0	
5	From	[i.1] 20.20	m	m	
6	Privacy	[i.30] 4.2	n/a	n/a	(See note)
7	Record-Route	[i.1] 20.30	n/a	n/a	
8	Supported	[i.1] 20.37	m	m	
9	Timestamp	[i.1] 20.38	m	0	
10	То	[i.1] 20.39	m	m	
11	User-Agent	[i.1] 20.41	0	0	
12	Via	[i.1] 20.42	m	m	
13	Warning	[i.1] 20.43	0	0	
NOTE:	Privacy is for further:	study.			

Table 5.8: Supported headers within the INFO request

Item	Header	Ref.	Sending	Receiving	Comment			
1	Accept	[i.1] 20.1	0	m				
2	Accept-Encoding	[i.1] 20.2	0	m				
3	Accept-Language	[i.1] 20.3	0	m				
4	Allow	[i.1] 20.5	0	m				
5	Allow-Events	[i.9] 7.2.2	0	m				
6	Authorization	[i.1] 20.7	0	0				
7	Call-ID	[i.1] 20.8	m	m				
7A	Call-Info	[i.1] 20.9	0	0				
8	Contact	[i.1] 20.10	n/a	n/a				
9	Content-Disposition	[i.1] 20.11	0	m				
10	Content-Encoding	[i.1] 20.12	0	m				
11	Content-Language	[i.1] 20.13	0	m				
12	Content-Length	[i.1] 20.14	m	m				
13	Content-Type	[i.1] 20.15	m	m				
14	Cseq	[i.1] 20.16	m	m				
15	Date	[i.1] 20.17	0	m				
16	From	[i.1] 20.20	m	m				
17	Geolocation	[i.24] 3.2	0	0				
19	Max-Breadth	[i.53] 5.8	0	c1				
20	Max-Forwards	[i.1] 20.22	m	c2				
21	MIME-Version	[i.1] 20.24	0	m				
23	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a				
24	P-Charging-Vector	[i.28] 4.6	n/a	n/a				
25	P-Debug-ID	[i.92]	o	m	The presence of this header field in ES 283 003 [i.15] Release 2 for the INFO request is probably a mistake which should be corrected in future releases.			
26	Privacy	[i.30] 4.2	0	c6				
27	Proxy-Authorization	[i.1] 20.28	c5	n/a				
28	Proxy-Require	[i.1] 20.29	n/a	n/a				
29	Reason	[i.31] 2	0	0				
30	Record-Route	[i.1] 20.30	n/a	n/a				
31	Referred-By	[i.33] 3	c3	c4				
33	Request-Disposition	[i.23] 9.1	0	0				
34	Require	[i.1] 20.32	m	m				
35	Resource-Priority	[i.40] 3.1	0	0				
36	Route	[i.1] 20.34	m	c2				
39	Subject	[i.1] 20.35	0	0				
40	Supported	[i.1] 20.37	m	m				
41	Timestamp	[i.1] 20.38	0	m				
42	То	[i.1] 20.39	m	m				
43	User-Agent	[i.1] 20.41	0	0				
44	Via	[i.1] 20.42	m	m				
c1:	IF forking is possible b							
c2:	IF there are more than THEN m ELSE n/a.	one SIP entit	y within the N	IGCN (includir	ng the attachment point to the NGN)			
c3:	IF Referred-By mechai							
c4:								
c5: c6:	IF UA-Proxy Authentic	ation is used	THEN m ELS	E o.	s trustedTHEN m ELSE o.			
c5: c6:	IF Referred-By mechanism is supported THEN o ELSE n/a. IF UA-Proxy Authentication is used THEN m ELSE o. IF the NGCN site can be deployed in an environment where it is trustedTHEN m ELSE o.							

NOTE: The Contact header field is present in the INFO request in TS 124 229 [i.12] due to a mistake. This mistake is corrected in TS 124 229 Release 8 [i.83].

Table 5.9: Supported headers within the 200 OK response to the INFO request

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept	[i.1] 20.1	0	m	
2	Accept-Encoding	[i.1] 20.2	0	m	
3	Accept-Language	[i.1] 20.3	0	m	
	Accept-Resource-	[i.40] 3.2	0	0	
4	Priority	F: 41.00 F			
5	Allow	[i.1] 20.5	0	m	
6	Allow-Events	[i.9] 7.2.2	0	m	
7	Authentication-Info	[i.1] 20.6	0	m	
8	Call-ID	[i.1] 20.8	m	m	
9	Call-Info	[i.1] 20.9	0	0	
10	Content-Disposition	[i.1] 20.11	Ο	m	The status of this header field in TS 124 229 [i.12] is different due to a mistake (note 1 in table A.35 is not applicable to INFO request). This mistake is considered to be "not essential" and is corrected in TS 124 229 Release 8 [i.83]
11	Content-Encoding	[i.1] 20.12	o	m	The status of this header field in TS 124 229 [i.12] is different due to a mistake (note 1 in table A.35 is not applicable to INFO request). This mistake is corrected in TS 124 229 Release 8 [i.83]
12	Content-Language	[i.1] 20.13	0	m	The status of this header field in TS 124 229 [i.12] is different due to a mistake (note 1 in table A.35 is not applicable to INFO request). This mistake is corrected in TS 124 229 Release 8 [i.83]
13	Content-Length	[i.1] 20.14	m	m	The status of this header field in TS 124 229 [i.12] is different due to a mistake (note 1 in table A.35 is not applicable to INFO request). This mistake is corrected in TS 124 229 Release 8 [i.83]
14	Content-Type	[i.1] 20.15	m	m	The status of this header field in TS 124 229 [i.12] is different due to a mistake (note 1 in table A.35 is not applicable to INFO request). This mistake is corrected in TS 124 229 Release 8 [i.83]
15	Cseq	[i.1] 20.16	m	m	10 121 220 10.0000 0 [00]
16	Date	[i.1] 20.17	0	m	
17	From	[i.1] 20.20	m	m	
19	MIME-Version	[i.1] 20.24	0	m	
20	Organization	[i.1] 20.25	0	0	
	P-Charging-Function-	[i.28] 4.5	n/a	n/a	
22	Addresses		ļ.,	1	
23	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
25	Privacy	[i.30] 4.2	0	c1	
27	Require	[i.1] 20.32	0	m	
28	Supported	[i.1] 20.37	0	m	
29	Server	[i.1] 20.35	0	О	
30	Timestamp	[i.1] 20.38	m	0	
31	То	[i.1] 20.39	m	m	
32	User-Agent	[i.1] 20.41	0	0	
33	Via	[i.1] 20.42	m	m	
34	Warning	[i.1] 20.43	0	0	
c1:	IF the NGCN site can	<u>be deployed i</u>	n an environn	nent where it is	s trusted THEN m ELSE o.

Table 5.10: Supported headers within the INVITE request

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept	[i.1] 20.1	c1	m	Indicates the support of the
		[]			MIME type for the AOC information:
4.0	Assent Contact	r: 001 0 0	-5	-C	"application/vnd.etsi.aoc+xml".
1A	Accept-Contact	[i.23] 9.2	c5	c6	
2	Accept-Encoding	[i.1] 20.2	0	m	
3	Accept-Language	[i.1] 20.3	0	m	Contains the LIDL of the modic to be
	Alert-Info	[i.1] 20.4	0	0	Contains the URL of the media to be played.
5	Allow	[i.1] 20.5, [i.1] 5.1	c1	m	Indicates the support of the INFO method for the AoC service.
6	Allow-Events	[i.9] 7.2.2	c11	c11	For subscription based approach, the S-CSCF (notifier) indicates at least the
					support of the reg event package (see note 2).
8	Authorization	[i.1] 20.7	0	0	
9	Call-ID	[i.1] 20.8	m	m	
10	Call-Info	[i.1] 20.9	0	0	
11	Contact	[i.1] 20.10	m	m	
12	Content-Disposition	[i.1] 20.11	o	m	
13	Content-Encoding	[i.1] 20.12	0	m	
14	Content-Language	[i.1] 20.13	0	m	
15	Content-Length	[i.1] 20.14	m	m	
16	Content-Type	[i.1] 20.15	m	m	
17	Cseq	[i.1] 20.16	m	m	
18	Date	[i.1] 20.17	0	m	
19	Expires	[i.1] 20.19	0	0	
20	From	[i.1] 20.20	m	m	
20A	Geolocation	[i.24] 3.2	0	0	In case of an emergency call, the NGCN
					site will normally identify it as an emergency call and provide a geolocation in conjunction with such
000	11:	[: OF] 4 4	-40	-40	calls, using the procedures of [i.24].
20B	History-Info	[i.25] 4.1	c13	c13	
21	In-Reply-To	[i.1] 20.21	0	0	
21A 21B	Join Max-Breadth	[i.26] 7.1	c14	c14 c9	
22		[i.53] 5.8	0		
23	Max-Forwards	[i.1] 20.22	m	c10	
	MIME-Version	[i.1] 20.24	0	m	
23A	Min-SE	[i.27] 5	c2	c3	
24	Organization	[i.1] 20.25	0	0	This has don't want of the OLA hatware
24B	P-Asserted-Identity	[i.29] 9.1	c4	o (see note 1)	This header is part of the SLA between the enterprise and the operator (on the support or not of a trusted connection).
24C	P-Asserted-Service	[i.34] 4.1	х	х	
24E	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a	
24F	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
24G	P-Early-Media	[i.38] 8	c7	c7	
25C	P-Profile-Key	[i.35] 5	n/a	n/a	
25D	P-User-Database	[i.36] 4	n/a	n/a	
25E	P-Visited-Network-ID	[i.28] 4.3	x	n/a	
26	Priority	[i.1] 20.26	0	0	
26A	Privacy	[i.30] 4.2	0	c12	
26B	Private-Network- Indicator	[i.77]	0	0	The use of this header is subject to agreement between the operator and the enterprise customer. It should be mandatory in case of private network
					traffic.
27	Proxy-Authorization	[i.1] 20.28	c17	n/a	traffic.
27 28		[i.1] 20.28 [i.1] 20.29	c17 o	n/a c10	traffic. The NGCN is more complex than a UA.
	Proxy-Authorization Proxy-Require Reason				
28	Proxy-Require	[i.1] 20.29	0	c10	

Item	Header	Ref.	Sending	Receiving	Comment
31	Reject-Contact	[i.23] 9.2	c5	c6	
31A	Replaces	[i.39] 6.1	c15	c15	
31B	Reply-To	[i.1] 20.31	0	0	
31B	Request-Disposition	[i.23] 9.1	c5	c6	
32	Require	[i.1] 20.32	m	m	
33	Route	[i.1] 20.34	m	c10	The NGCN is more complex than a UA.
33C	Session-Expires	[i.27] 4	c16	c16	
34	Subject	[i.1] 20.36	0	0	
35	Supported	[i.1] 20.37	m	m	This header may contain the option-tag "100Rel" in the receiving side.
36	Timestamp	[i.1] 20.38	О	m	
37	То	[i.1] 20.39	m	m	
38	User-Agent	[i.1] 20.41	0	0	
39	Via	[i.1] 20.42	m	m	

- c1: IF 4.1/1 is supported OR initiating a session THEN m ELSE o - Advice of Charge (INFO method), initiating a session.
- c2: IF SIP session timer extension is supported THEN o else n/a.
- c3: IF SIP session timer extension is supported THEN m else n/a.
- c4: IF the NGCN site can be deployed in an environment where it is trusted THEN "o" ELSE "n/a".
- c5: IF Caller Preferences extension is supported THEN o else n/a.
- c6: IF Caller Preferences extension is supported THEN m else n/ac9: IF forking is possible beyond the NGCN attachment point THEN m ELSE n/a.
- c7: IF P-Early-Media private header extension is supported THEN m ELSE n/a.
- c8: IF Referred-By mechanism is supported THEN m ELSE n/a.
- c9: IF Referred-By mechanism is supported THEN o ELSE n/a.
- c10: IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN m else n/a.
- c11: IF there is a notifier beyond the NGCN attachment point THEN m ELSE n/a.
- c12: IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o.
- c13: IF History-Info extension is supported THEN m else n/a.
- c14: IF Join extension is supported THEN m else n/a.
- c15: IF SIP "Replaces" header extension is supported THEN m ELSE n/a.
- c16: IF SIP session timer extension is supported THEN m ELSE n/a.
- c17: IF UA-Proxy Authentication is used THEN "m" ELSE "no".
- NOTE 1: The use of this header is subject to Spec T.
- NOTE 2: The status of this header field in TS 124 229 [i.12] is different due to a mistake. This mistake is corrected in TS 124 229 Release 9 [i.84].

Table 5.11: Supported headers within the 200 OK response to the INVITE

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept	[i.1] 20.1	0	m	
2	Accept-Encoding	[i.1] 20.2	0	m	
3	Accept-Language	[i.1] 20.3	0	m	
4	Allow	[i.1] 20.5	m	m	
5	Allow-Events	[i.9] 7.2.2	0	m	
6	Authentication-Info	[i.1] 20.6	О	m	
7	Call-ID	[i.1] 20.8	m	m	
8	Call-Info	[i.1] 20.9	О	О	
9	Contact	[i.1] 20.10	m	m	
10	Content-Disposition	[i.1] 20.11	o	m	
11	Content-Encoding	[i.1] 20.12	0	m	
12	Content-Language	[i.1] 20.13	0	m	
13	Content-Length	[i.1] 20.14	m	m	
14	Content-Type	[i.1] 20.15	m	m	
15	Cseq	[i.1] 20.16	m	m	
16	Date	[i.1] 20.17	0	0	
17	Expires	[i.1] 20.19	0	0	
18	From	[i.1] 20.20	m	m	
20	History-Info	[i.1] 20.20 [i.25] 4.1	c13	c13	
21	MIME-Version	[i.1] 20.24	0	m	
22	Organization	[i.1] 20.24	0	0	
23	P-Answer-State	[i.1] 20.23	n/a	n/a	
24	P-Asserted-Identity	[i.29] 9.1	0	0	
25	P-Charging-Function-	[i.29] 9.1 [i.28] 4.5	n/a	n/a	
	Addresses	-			
26	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
26A	P-Preferred-Identity	[i.29] 9.2	Х	n/a	
29	Privacy	[i.30] 4.2	0	c2	
30	Record-Route	[i.1] 20.30	m	m	
31	Reply-To	[i.1] 20.31	0	0	
32	Require	[i.1] 20.32	m	m	Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in 200 OK response to INVITE.
33	Server	[i.1] 20.35	0	0	
34	Session-Expires	[i.27] 4	c1	c1	
35	Supported	[i.1] 20.37	m	m	
36	Timestamp	[i.1] 20.38	m	0	
37	То	[i.1] 20.39	m	m	
38	User-Agent	[i.1] 20.41	0	0	
39	Via	[i.1] 20.42	m	m	
40	Warning	[i.1] 20.43	0	0	
c1:	IF SIP session timer e	xtension is su	pported THE	N m ELSE n/a	
c2: c13:	IF the NGCN site can IF History-Info extensi				is trusted THEN m ELSE o.

NOTE: Table 5.11 gives hint on the headers' status for all the remaining possible responses to the INVITE request.

Table 5.12: Supported headers within the MESSAGE request

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept-Contact	[i.23] 9.2	c5	c6	
1A	Allow	[i.1] 20.5	0	m	
2	Allow-Events	[i.9] 7.2.2	0	m	
3	Authorization	[i.1] 20.7	0	0	
4	Call-ID	[i.1] 20.8	m	m	
5	Call-Info	[i.1] 20.9	0	0	
6	Content-Disposition	[i.1] 20.11	0	m	
7	Content-Encoding	[i.1] 20.12	0	m	
8	Content-Language	[i.1] 20.13	0	m	
9	Content-Length	[i.1] 20.14	0	m	
10	Content-Type	[i.1] 20.15	m	m	
11	Cseq	[i.1] 20.16	m	m	
12	Date	[i.1] 20.17	0	m	
13	Expires	[i.1] 20.19	0	0	
14	From	[i.1] 20.20	m	m	
14A	Geolocation	[i.24] 3.2	0	0	
14B	History-Info	[i.25] 4.1	c13	c13	
15	In-Reply-To	[i.1] 20.21	0	0	
15A	Max-Breadth	[i.53] 5.8	0	c1	
16	Max-Forwards	[i.1] 20.22	m	c2	
17	MIME-Version	[i.1] 20.24	0	m	
18	Organization	[i.1] 20.25	0	0	
18B	P-Asserted-Identity	[i.29] 9.1	c3	0	When sending this header is part of the SLA
					between the enterprise and the operator (on
					the support or not of a trusted relationship).
18E	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a	
18F	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
18I	P-Profile-Key	[i.35] 5	n/a	n/a	
18J	P-User-Database	[i.36] 4	n/a	n/a	
18K	P-Visited-Network-ID	[i.28] 4.3	х	n/a	
19	Priority	[i.1] 20.26	0	0	
19A	Privacy	[i.30] 4.2	0	c12	
20	Proxy-Authorization	[i.1] 20.28	c7	n/a	
21	Proxy-Require	[i.1] 20.29	n/a	n/a	
21A	Reason	[i.31] 2	0	0	
22	Record-Route	[i.1] 20.30	n/a	n/a	
22A	Referred-By	[i.33] 3	c8	с9	
23	Reject-Contact	[i.23] 9.2	c5	c6	
23A	Reply-To	[i.1] 20.31	0	0	
23B	Request-Disposition	[i.23] 9.1	c5	c6	
24	Require	[i.1] 20.32	0	m	
25	Route	[i.1] 20.34	m	c4	
26	Subject	[i.1] 20.35	0	0	
27	Supported	[i.1] 20.37	m	m	
28	Timestamp	[i.1] 20.38	О	m	
29	То	[i.1] 20.39	m	m	
30	User-Agent	[i.1] 20.41	0	0	
31	Via	[i.1] 20.42		m	
c1:	IF forking is possible b				N m FI SF n/a

c1: IF forking is possible beyond the NGCN attachment point THEN m ELSE n/a.

c2: IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN m ELSE n/a.

c3: IF the NGCN site can be deployed in an environment where it is trusted THEN "o" ELSE "n/a".

c4: IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN m ELSE n/a.

c5: IF Caller Preferences extension is supported THEN o else n/a.

c6: IF Caller Preferences extension is supported THEN m else n/a.

c7: IF UA-Proxy Authentication is used THEN m ELSE o.

c8: IF Referred-By mechanism is supported THEN m ELSE n/a. c9: IF Referred-By mechanism is supported THEN o ELSE n/a.

c12: IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o.

c13: IF History-Info extension is supported THEN m ELSE n/a.

Table 5.13: Supported headers within the 2xx response to the MESSAGE request

Item	Header	Ref.	Sending	Receiving	Comment
1	Allow	[i.1] 20.5	0	m	
2	Allow-Events	[i.9] 7.2.2	0	m	
3	Authentication-Info	[i.1] 20.6	0	m	
4	Call-ID	[i.1] 20.8	m	m	
5	Call-Info	[i.1] 20.9	0	0	
6	Content-Disposition	[i.1] 20.11	Х	n/a	
7	Content-Encoding	[i.1] 20.12	х	n/a	
8	Content-Language	[i.1] 20.13	х	n/a	
9	Content-Length	[i.1] 20.14	Х	n/a	
10	Content-Type	[i.1] 20.15	х	n/a	
11	Cseq	[i.1] 20.16	m	m	
12	Date	[i.1] 20.17	0	m	
13	Expires	[i.1] 20.19	0	0	
14	From	[i.1] 20.20	m	m	
16	History-Info	[i.25] 4.1	c13	c13	
17	MIME-Version	[i.1] 20.24	Х	n/a	
18	Organization	[i.1] 20.25	0	0	
19	P-Asserted-Identity	[i.29] 9.1	0	0	
	P-Charging-Function-	[i.28] 4.5	n/a	n/a	
20	Addresses				
21	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
22	P-Preferred-Identity	[i.29] 9.2	Х	n/a	
23	Privacy	[i.30] 4.2	0	c1	
24	Reply-To	[i.1] 20.31	0	0	
25	Require	[i.1] 20.32	0	m	
26	Server	[i.1] 20.35	0	0	
27	Supported	[i.1] 20.37	0	m	
28	Timestamp	[i.1] 20.38	m	0	
29	То	[i.1] 20.39	m	m	
31	User-Agent	[i.1] 20.41	0	0	
32	Via	[i.1] 20.42	m	m	
33	Warning	[i.1] 20.43	0	0	
c1:	IF the NGCN site can	be deployed i	n an environn	nent where it is ti	rusted THEN m ELSE o.

c13: IF History-Info extension is supported THEN m else n/a.

Table 5.14: Supported headers within the NOTIFY request

Item	Header	Ref.	Sending	Receiving	Comment		
1	Accept	[i.1] 20.1	0	m			
1A	Accept-Contact	[i.23] 9.2	c5	c6			
2	Accept-Encoding	[i.1] 20.2	0	m			
3	Accept-Language	[i.1] 20.3	0	m			
3A	Allow	[i.1] 20.5	0	m			
4	Allow-Events	[i.9] 7.2.2	0	m			
5	Authorization	[i.1] 20.7	0	0			
6	Call-ID	[i.1] 20.8	m	m			
6A	Call-Info	[i.1] 20.9	0				
6B	Contact	[i.1] 20.10	m	m			
7	Content-Disposition	[i.1] 20.11	0	m			
8	Content-Encoding	[i.1] 20.12	0	m			
9	Content-Language	[i.1] 20.13	0	m			
10	Content-Length	[i.1] 20.14	m	m			
11	Content-Type	[i.1] 20.15	m	m			
12	Cseq	[i.1] 20.16	m	m			
13	Date	[i.1] 20.17	0	m			
14	Event	[i.9] 7.2.1	m	m			
15	From	[i.1] 20.20	m	m			
15A	Geolocation	[i.24] 3.2	0	0			
15B	History-Info	[i.25] 4.1	c13	c13			
15C	Max-Breadth	[i.53] 5.8	0	c1			
16	Max-Forwards	[i.1] 20.22	m	c2			
17	MIME-Version	[i.1] 20.24	0	m			
17B	P-Asserted-Identity	[i.29] 9.1	c3	O	When sending this header is part of the SLA between the enterprise and the operator (on the support or not of a trusted relationship).		
17C	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a	,		
17D	P-Charging-Vector	[i.28] 4.6	n/a	n/a			
17E	P-Preferred-Identity	[i.29] 9.2	х	n/a			
17F	Privacy	[i.30] 4.2	0	c12			
18	Proxy-Authorization	[i.1] 20.28	c7	n/a			
19	Proxy-Require	[i.1] 20.29	n/a	n/a			
19A	Reason	[i.31] 2	0	0			
20	Record-Route	[i.1] 20.30	0	m			
20A	Referred-By	[i.33] 3	c8	c9			
20B	Reject-Contact	[i.23] 9.2	c5	c6			
20C	Request-Disposition	[i.23] 9.1	c5	c6			
21	Require	[i.1] 20.32	0	m			
22	Route	[i.1] 20.34	m				
23	Subscription-State	[i.9] 8.2.3	m	m			
24	Supported	[i.1] 20.37	0	m			
25	Timestamp	[i.1] 20.38	0	m			
26	То	[i.1] 20.39	m	m			
27	User-Agent	[i.1] 20.41	0	0			
28	Via	[i.1] 20.42	m	m			
29	Warning	[i.1] 20.43	0	0			
c1:							
c2: c3:	IF forking is possible beyond the NGCN attachment point THEN m ELSE n/a. IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN m else n/a. IF the NGCN site can be deployed in an environment where it is trusted THEN "o" ELSE "n/a".						
c5:	IF Caller Preferences extension is supported THEN o else n/a.						
c6:	IF Caller Preferences						
c7:	IF UA-Proxy Authentic						
c8:	IF Referred-By mecha						
c9:	IF Referred-By mecha						
c12:					s trusted THEN m ELSE o.		
c13:							
	IF History-Info extension is supported THEN m else n/a.						

Table 5.15: Supported headers within the 200 OK response to NOTIFY

Item	Header	Ref.	Sending	Receiving	Comment
1	Allow	[i.1] 20.5	0	m	
2	Allow-Events	[i.9] 7.2.2	0	m	
3	Authentication-Info	[i.1] 20.6	0	m	
4	Call-ID	[i.1] 20.8	m	m	
5	Contact	[i.1] 20.10	0	m	
6	Content-Disposition	[i.1] 20.11	0	m	
7	Content-Encoding	[i.1] 20.12	0	m	
8	Content-Language	[i.1] 20.13	0	m	
9	Content-Length	[i.1] 20.14	m	m	
10	Content-Type	[i.1] 20.15	m	m	
11	Cseq	[i.1] 20.16	m	m	
12	Date	[i.1] 20.17	О	m	
13	From	[i.1] 20.20	m	m	
15	MIME-Version	[i.1] 20.24	О	m	
16	P-Asserted-Identity	[i.29] 9.1	О	О	
	P-Charging-	[i.28] 4.5	n/a	n/a	
17	Function-Addresses				
18	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
19	P-Preferred-Identity	[i.29] 9.2	х	n/a	
20	Privacy	[i.30] 4.2	О	c1	
21	Record-Route	[i.1] 20.30	0	О	
22	Require	[i.1] 20.32	m	m	Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in 200 OK response to NOTIFY.
23	Server	[i.1] 20.35	0	0	
24	Supported	[i.1] 20.37	m	m	
25	Timestamp	[i.1] 20.38	m	О	
26	То	[i.1] 20.39	m	m	
27	User-Agent	[i.1] 20.41	О	О	
28	Via	[i.1] 20.42	m	m	
29	Warning	[i.1] 20.43	О	0	
c1:	IF the NGCN site ca	n be deployed	d in an enviro	nment where i	t is trusted THEN m ELSE o.

Table 5.16: Supported headers within the OPTIONS request

1	Item	Header	Ref.	Sending	Receiving	Comment
A Accept-Contact 1,23 9,2 04 05	1					Comment
Accept-Encoding	1A					
Accept-Language I.1 20.3 m m m	2			m		
A Allow 1 20.5 0 m	3			m	m	
Allow-Events	3A			0	m	
5 Authorization [i.1] 20.7 o o 6 Call-ID [i.1] 20.9 o o 7 Call-Info [i.1] 20.9 o o 8 Contact [i.1] 20.10 o o 9 Content-Encoding [i.1] 20.11 o m 10 Content-Language [i.1] 20.14 m m 11 Content-Language [i.1] 20.14 m m 12 Content-Length [i.1] 20.16 m m 13 Content-Type [i.1] 20.16 m m 14 Cseq [i.1] 20.16 m m 15 Date [i.1] 20.17 o m 16 From [i.2] 4.1 c13 c13 16A Geolocation [i.2] 3.5 o c1 17 Max-Breadth [i.5] 3.5 o c1 18B History-Info [i.2] 4.4 c3 n/a 19B	4	Allow-Events		О	m	
6 Call-ID	5			0	0	
Section Content Cont	6	Call-ID		m	m	
Content-Disposition	7	Call-Info	[i.1] 20.9	0	0	
Content-Encoding	8	Contact	[i.1] 20.10	0	0	
11	9	Content-Disposition	[i.1] 20.11	0	m	
Content-Length	10	Content-Encoding	[i.1] 20.12	0	m	
Content-Type	11	Content-Language		0	m	
14	12			m	m	
15	13	Content-Type		m	m	
From	14	Cseq	[i.1] 20.16	m	m	
16A Geolocation [i.24] 3.2 0 0				0	m	
History-Info [i,25] 4.1 c13 c13 c13 c13 c14 c15						
16C					ļ -	
Max-Forwards	16B					
MIME-Version	16C			0		
19	17			m	c2	
19A				. ~	m	
Info				_		
See note Seween the enterprise and the operator (on the support or not of a trusted connection).	19A		[i.28] 4.4	c3	n/a	
P-Charging-Function-Addresses Function-Addresses Function-Addresse	19B	P-Asserted-Identity	[i.29] 9.1	c6	-	between the enterprise and the operator (on the support or not of a
19F	19E		[i.28] 4.5	n/a	n/a	, , , , , , , , , , , , , , , , , , , ,
19G	19F		[i.28] 4.6	n/a	n/a	
191	19G					
19J	191		[i.35] 5	n/a	n/a	
Privacy [i.30] 4.2 0 c12	19J	P-User-Database	[i.36] 4	n/a	n/a	
Private-Network-Indicator Private-Network-Indicator Proxy-Authorization [i.1] 20.28 c7 n/a Proxy-Require [i.1] 20.29 o c2 The NGCN site is more complex than a UA. Proxy-Require [i.1] 20.30 n/a n/a Reason [i.3] 2 o o c2 Record-Route [i.1] 20.30 n/a n/a Proxy-Require [i.3] 3 c8 c9 Referred-By [i.3] 3 c8 c9 Reject-Contact [i.2] 9.1 c4 c5 Require [i.1] 20.32 m Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in OPTIONS request. Require Route [i.1] 20.34 m C2 Route [i.1] 20.38 o m [i.1] 20.39 m m Route [i.1] 20.39 m m [i.1] 20.39 m m [i.1] 20.39 m m Route [i.1] 20.31 n Route [i.1] 20.31 n Route [i.1] 20.31 n Route [i.1] 20.32 n Route [i.1] 20.33 n Route [i.1] 20.34 n Route [i.1	19K	P-Visited-Network-ID	[i.28] 4.3	х	n/a	
Indicator	19L	Privacy	[i.30] 4.2	0	c12	
Proxy-Require	19M	Indicator				agreement between the operator and the enterprise customer. It should be mandatory in case of private network
A A Beason [i.31] 2 O O						
Record-Route	21	Proxy-Require	[i.1] 20.29	0	c2	
Referred-By	21A					
Reject-Contact [i.23] 9.2 c4 c5	22			n/a		
22C Request-Disposition [i.23] 9.1 c4 c5 23 Require [i.1] 20.32 m m Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in OPTIONS request. 24 Route [i.1] 20.34 m c2 26 Timestamp [i.1] 20.38 o m 27 To [i.1] 20.39 m m 28 User-Agent [i.1] 20.41 o o	22A					
Require [i.1] 20.32 m m M Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in OPTIONS request. Route [i.1] 20.34 m c2 Timestamp [i.1] 20.38 o m To [i.1] 20.39 m m User-Agent [i.1] 20.41 o o	22B					
that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in OPTIONS request. 24 Route [i.1] 20.34 m c2 26 Timestamp [i.1] 20.38 o m 27 To [i.1] 20.39 m m 28 User-Agent [i.1] 20.41 o o	22C			c4	c5	
26 Timestamp [i.1] 20.38 o m 27 To [i.1] 20.39 m m 28 User-Agent [i.1] 20.41 o o	23	Require	[i.1] 20.32	m	m	that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in OPTIONS
27 To [i.1] 20.39 m m 28 User-Agent [i.1] 20.41 o o	24	Route	[i.1] 20.34	m	c2	
28 User-Agent [i.1] 20.41 o o	26			0	m	
28 User-Agent [i.1] 20.41 o o	27	То	[i.1] 20.39	m	m	
29 Via [i.1] 20.42 m m	28	User-Agent		0	0	
	29	Via	[i.1] 20.42	m	m	

Item	Header	Ref.	Sending	Receiving	Comment				
c1:	IF forking is possible beyond the NGCN attachment point THEN m ELSE n/a.								
c2:	IF there are more that NGN) THEN m ELSE		ntity within th	ne NGCN (inclu	uding the attachment point to the				
c3:					P-CAN THEN m ELSE o.				
c4:	IF Caller Preferences	extension is	s supported	THEN o else n	/a.				
c5:	IF Caller Preferences	extension is	s supported	THEN m else r	n/a.				
c6:	IF the NGCN site car	be deploye	d in an envir	onment where	it is trusted THEN o ELSE n/a.				
c7:	IF UA-Proxy Authenti	ication is use	ed THEN m E	ELSE o.					
c8:	IF Referred-By mech	anism is sup	ported THEI	N m ELSE n/a.					
c9:	IF Referred-By mech	anism is sup	ported THEI	N o ELSE n/a.					
c12	IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o.								
c13:	IF History-Info extension is supported THEN m else n/a.								
NOTE:	The use of this heade	er is subject	to Spec T.						

Table 5.17: Supported headers within the 200 OK response to the OPTIONS request

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept	[i.1] 20.1	m	m	
2	Accept-Encoding	[i.1] 20.2	m	m	
3	Accept-Language	[i.1] 20.3	m	m	
4	Allow	[i.1] 20.5	m	m	
5	Allow-Events	[i.9] 7.2.2	0	m	
6	Authentication-Info	[i.1] 20.6	0	m	
7	Call-ID	[i.1] 20.8	m	m	
3	Call-Info	[i.1] 20.9	О	0	
9	Contact	[i.1] 20.10	n/a	n/a	
10	Content-Disposition	[i.1] 20.11	0	m	
11	Content-Encoding	[i.1] 20.12	0	m	
12	Content-Language	[i.1] 20.13	0	m	
13	Content-Length	[i.1] 20.14	m	m	
14	Content-Type	[i.1] 20.15	m	m	
15	Cseq	[i.1] 20.16	m	m	
16	Date	[i.1] 20.17	0	m	
17	From	[i.1] 20.20	m	m	
19	History-Info	[i.25] 4.1	c13	c13	
20	MIME-Version	[i.1] 20.24	0	m	
21	Organization	[i.1] 20.25	0	0	
23	P-Asserted-Identity	[i.29] 9.1	0	0	
24	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a	
25	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
<u>26</u>	P-Preferred-Identity	[i.29] 9.2	0	n/a	
27	Privacy	[i.30] 4.2	0	c1	
28	Require	[i.1] 20.32	m	m	
29	Server	[i.1] 20.35	0	0	
30	Supported	[i.1] 20.37	m	m	
31	Timestamp	[i.1] 20.38	m	0	
32	То	[i.1] 20.39	m	m	
33	User-Agent	[i.1] 20.41	0	0	
34	Via	[i.1] 20.42	m	m	
35	Warning	[i.1] 20.42	0	0	
c1:	IF the NGCN site can be	e deployed in	an environm	ent where it is truste	d THEN m ELSE o.
c13:	IF History-Info extension	n is supported	I THEN m els	e n/a.	

Table 5.18: Supported headers within the PRACK request

Item	Header	Ref.	Sending	Receiving	Comment			
1	Accept	[i.1] 20.1	0	m				
1A	Accept-Contact	[i.23] 9.2	c5	c6				
2	Accept-Encoding	[i.1] 20.2	0	m				
3	Accept-Language	[i.1] 20.3	0	m				
3A	Allow	[i.1] 20.5	0	m				
4	Allow-Events	[i.9] 7.2.2	0	m				
5	Authorization	[i.1] 20.7	c3	c3				
6	Call-ID	[i.1] 20.8	m	m				
7	Content-Disposition	[i.1] 20.11	0	m				
8	Content-Encoding	[i.1] 20.12	0	m				
9	Content-Language	[i.1] 20.13	0	m				
10	Content-Length	[i.1] 20.14	m	m				
11	Content-Type	[i.1] 20.15	m	m				
12	Cseq	[i.1] 20.16	m	m				
13	Date	[i.1] 20.17	0	m				
14	From	[i.1] 20.20	m	m				
14A	Max-Breadth	[i.53] 5.8	0	c1				
15	Max-Forwards	[i.1] 20.22	m	c2				
16	MIME-Version	[i.1] 20.24	0	m				
16B	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a				
16C	P-Charging-Vector	[i.28] 4.6	n/a	n/a				
16D	Privacy	[i.30] 4.2	n/a	n/a				
17	Proxy-Authorization	[i.1] 20.28	c4	n/a				
18	Proxy-Require	[i.1] 20.29	0	m	Values equal to those in INVITE request.			
19	Rack	[i.6] 7.2	m	m				
19A	Reason	[i.31] 2	0	0				
20	Record-Route	[i.1] 20.30	n/a	n/a				
20A	Referred-By	[i.33] 3	c8	c9				
20B	Reject-Contact	[i.23] 9.2	c5	c6				
20C	Request-Disposition	[i.23] 9.1	c5	c6				
21	Require	[i.1] 20.32	m	m	Values equal to those in INVITE request.			
22	Route	[i.1] 20.34	m	c2				
23	Supported	[i.1] 20.37	m	m				
24	Timestamp	[i.1] 20.38	0	m				
25	То	[i.1] 20.39	m	m				
26	User-Agent	[i.1] 20.41	0	0				
27	Via	[i.1] 20.42	m	m				
c1:	IF forking is possible		CN THEN m	ELSE n/a.				
c2:	IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN m ELSE n/a. IF UA-UA Authentication is used THEN m ELSE o.							
c4:	IF UA-Proxy Authentication is used THEN m ELSE o.							
c5:	IF Caller Preferences extension is supported THEN o ELSE n/a. IF Caller Preferences extension is supported THEN m ELSE n/a.							
c6:					d			
c8:	IF Referred By mech							
c9:	IF Referred-By mechanism is supported THEN o ELSE n/a.							

Table 5.19: Supported headers within the 200 OK response to the PRACK request

Item	Header	Ref.	Sending	Receiving	Comment
1	Allow-Events	[i.9] 7.2.2	0	m	
2	Authentication-Info	[i.1] 20.6	0	0	
3	Call-ID	[i.1] 20.8	m	m	
4	Content-Disposition	[i.1] 20.11	0	m	
5	Content-Encoding	[i.1] 20.12	0	m	
6	Content-Language	[i.1] 20.13	0	m	
7	Content-Length	[i.1] 20.14	m	m	
8	Content-Type	[i.1] 20.15	m	m	
9	Cseq	[i.1] 20.16	m	m	
10	Date	[i.1] 20.17	0	m	
11	From	[i.1] 20.20	m	m	
12	MIME-Version	[i.1] 20.24	0	m	
	P-Charging-Function-	[i.28] 4.5	n/a	n/a	
14	Addresses				
15	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
16	P-Early-Media	[i.38] 8	c1	c1	
17	Privacy	[i.30] 4.2	n/a	n/a	
18	Require	[i.1] 20.32	m	m	
19	Server	[i.1] 20.35	0	0	
20	Supported	[i.1] 20.37	m	m	
21	Timestamp	[i.1] 20.38	m	0	
22	То	[i.1] 20.39	m	m	
23	User-Agent	[i.1] 20.41	0	0	
24	Via	[i.1] 20.42	m	m	
25	Warning	[i.1] 20.43	0	0	
c1: II	F P-Early-Media private h	neader extens	ion is supporte	d THEN m ELS	SE n/a.

Table 5.20: Supported headers within the PUBLISH request

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept-Contact	[i.23] 9.2	c4	c5	
2	Allow	[i.1] 20.5	0	m	
3	Allow-Events	[i.1] 7.2.2	0	m	
4	Authorization	[i.1] 20.7	0	0	
5	Call-ID	[i.1] 20.8	m	m	
6	Call-Info	[i.1] 20.9	0	0	
7	Content-Disposition	[i.1] 20.11	0	m	
8	Content-Encoding	[i.1] 20.12	0	m	
9	Content-Language	[i.1] 20.13	0	m	
10	Content-Length	[i.1] 20.14	m	m	
11	Content-Type	[i.1] 20.15	m	m	
12	Cseq	[i.1] 20.16	m	m	
13	Date	[i.1] 20.17	О	m	
14	Event	[i.11] 4, 6	m	m	
15	Expires	[i.1] 20.19,	0	m	
. •		[i.11] 4, 5,			
		6			
16	From	[i.1] 20.20	m	m	
16A	History-Info	[i.1] 20.20	c13	c13	
17	In-Reply-To	[i.1] 20.21	0	0	
17A	Max-Breadth	[i.53] 5.8	0	c1	
18	Max-Forwards	[i.1] 20.22	m	c2	
19	MIME-Version	[i.1] 20.24	0	m	
20	Organization	[i.1] 20.25	0	0	
22	P-Asserted-Identity	[i.29] 9.1	c3	0	
<u>22</u> 24	P-Charging-	[i.28] 4.5	n/a	n/a	
Z 4	Function-Addresses	[1.20] 4.5	11/4	II/a	
25	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
26B	P-Profile-Key	[i.26] 4.6 [i.35] 5	n/a	n/a	
26C	P-User-Database	[i.36] 4			
	P-Visited-Network-ID		n/a	n/a n/a	
27		[i.28] 4.3	X		
28	Priority	[i.1] 20.26	0	o c12	
29	Privacy	[i.30] 4.2	0		
30	Proxy-Authorization	[i.1] 20.28	c7	n/a	
31	Proxy-Require	[i.1] 20.29	n/a	n/a	
32	Reason	[i.31] 2	0	0	
33	Reject-Contact	[i.23] 9.2	c4	c5	
33A	Referred-By	[i.33] 3	c8	с9	
34	Request-Disposition	[i.23] 9.1	c4	c5	
35	Reply-To	[i.1] 20.31	0	0	
36	Require	[i.1] 20.32	0	m	
37	Route	[i.1] 20.34	m	n/a	
40	SIP-If-Match	[i.11]	0	m	
		11.3.2			
41	Subject	[i.1] 20.36	0	0	
42	Supported	[i.1] 20.37, [i.1] 7.1	0	m	
43	Timestamp	[i.1] 20.38	0	m	
44	То	[i.1] 20.39	m	m	
45	User-Agent	[i.1] 20.41	0	0	
				†	
46	lVia	[i.1] 20.42	m	m	

m ELSE n/a.

- c3: IF the NGCN site can be deployed in an environment where it is trusted THEN o ELSE n/a.
- c4: IF Caller Preferences extension is supported THEN o else n/a.
- IF Caller Preferences extension is supported THEN m else n/a. IF UA-Proxy Authentication is used THEN m ELSE o. c5:
- c7:
- IF Referred-By mechanism is supported THEN m ELSE n/a. c8:
- c9: IF Referred-By mechanism is supported THEN o ELSE n/a. IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o. c12:
- IF History-Info extension is supported THEN m else n/a. c13:

Table 5.21: Supported headers within the 2xx response to the PUBLISH request

Item	Header	Ref.	Sending	Receiving	Comment
1	Allow	[i.1] 20.5	0	m	
2	Authentication-Info	[i.1] 20.6	0	m	
3	Call-ID	[i.1] 20.8	m	m	
4	Call-Info	[i.1] 24.9	0	m	
5	Content-Disposition	[i.1] 20.11	0	m	
6	Content-Encoding	[i.1] 20.12	0	m	
7	Content-Language	[i.1] 20.13	0	m	
8	Content-Length	[i.1] 20.14	m	m	
9	Content-Type	[i.1] 20.15	m	m	
10	Cseq	[i.1] 20.16	m	m	
11	Date	[i.1] 20.17	0	m	
	Expires	[i.1] 20.19,	m	m	
12	•	[i.11] 4, 5, 6			
13	From	[i.1] 20.20	m	m	
14	History-Info	[i.25] 4.1	0	0	
15	MIME-Version	[i.1] 20.24	0	m	
16	Organization	[i.1] 20.25	0	0	
18	P-Asserted-Identity	[i.29] 9.1	0	0	
	P-Charging-Function-	[i.28] 4.5	n/a	n/a	
19	Addresses	-			
20	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
21	P-Preferred-Identity	[i.29] 9.2	х	n/a	
22	Privacy	[i.30] 4.2	0	c1	
	Require	[i.1] 20.32	m	m	Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in
23					2xx response to PUBLISH.
24	Server	[i.1] 20.35	0	0	
25	SIP-Etag	[i.11] 11.3.1	m	m	
26	Supported	[i.1] 20.37	m	m	
27	Timestamp	[i.1] 20.38	m	0	
28	То	[i.1] 20.39	m	m	
29	User-Agent	[i.1] 20.41	0	0	
30	Via	[i.1] 20.42	m	m	
31	Warning	[i.1] 20.43	0	0	
c1:	IF the NGCN site can l	be deployed in	n an environm	nent where it i	s trusted THEN m ELSE o.

Table 5.22: Supported headers within the REFER request

Item	Header	Ref.	Sending	Receiving	Comment
0A	Accept	[i.1] 20.1	0	m	
0B	Accept-Contact	[i.23] 9.2	c5	c6	
0C	Accept-Encoding	[i.1] 20.2	0	m	
1	Accept-Language	[i.1] 20.3	0	m	
1A	Allow	[i.1] 20.5	0	m	
2	Allow-Events	[i.9] 7.2.2	0	m	
3	Authorization	[i.1] 20.7	0	0	
4	Call-ID	[i.1] 20.8	m	m	
5	Contact	[i.1] 20.10	m	m	
5A	Content-Disposition	[i.1] 20.11	0	m	
5B	Content-Encoding	[i.1] 20.12	0	m	
5C	Content-Language	[i.1] 20.13	0	m	
6	Content-Length	[i.1] 20.14	m	m	
7	Content-Type	[i.1] 20.15	m	m	
8	Cseq	[i.1] 20.16	m	m	
9	Date	[i.1] 20.17	0	m	
10	Expires	[i.1] 20.19	0	0	
11	From	[i.1] 20.20	m	m	
11A	Geolocation	[i.24] 3.2	0	0	
11B	History-Info	[i.25] 4.1	c13	c13	
11C	Max-Breadth	[i.53] 5.8	0	c1	
12	Max-Forwards	[i.1] 20.22	m	c2	
13	MIME-Version	[i.1] 20.24	0	m	
14	Organization	[i.1] 20.25	0	0	
14B	P-Asserted-Identity	[i.29] 9.1	c3	0	When sending this header is part of the SLA between the enterprise and the operator (on the support or not of a trusted relationship).
14E	P-Charging- Function-Addresses	[i.28] 4.5	n/a	n/a	
14F	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
141	P-Profile-Key	[i.35] 5	n/a	n/a	
14J	P-User-Database	[i.36] 4	n/a	n/a	
14K	P-Visited-Network-ID	[i.28] 4.3	Х	n/a	
14L	Privacy	[i.30] 4.2	0	c12	
15	Proxy-Authorization	[i.1] 20.28	c7	n/a	
16	Proxy-Require	[i.1] 20.29	n/a	n/a	
16A	Reason	[i.31] 2	0	0	
17	Record-Route	[i.1] 20.30	0	m	
18	Refer-To	[i.35] 3	m	m	
18A	Referred-By	[i.33] 3	c8	c8	
18B	Reject-Contact	[i.23] 9.2	c5	c6	
18C	Request-Disposition	[i.23] 9.1	c5	c6	
19	Require	[i.1] 20.32	0	m	
20	Route	[i.1] 20.34	m	c4	
21	Supported	[i.1] 20.37, [i.1] 7.1	0	m	
22	Timestamp	[i.1] 20.38	0	m	
23	То	[i.1] 20.39	m	m	
24	User-Agent	[i.1] 20.41	0	0	
25 c1:	Via	[i.1] 20.42	m	m	
c1:	IF forking is possible	beyond the	NGCN atta	chment point Th	HEN m ELSE n/a.

- IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN c2:
- c3: IF the NGCN site can be deployed in an environment where it is trusted THEN "o" ELSE "n/a".
- IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) THEN c4: m else n/a.
- c5: IF Caller Preferences extension is supported THEN o else n/a.
- IF Caller Preferences extension is supported THEN m else n/a. c6:
- IF UA-Proxy Authentication is used THEN m ELSE oc8: IF Referred-By mechanism is supported THEN m c7: ELSE n/a.
- IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o. c12:
- IF History-Info extension is supported THEN m else n/a. c13:

Table 5.23: Supported headers within the 2xx response to the REFER request

Item	Header	Ref.	Sending	Receiving	Comment
1	Allow	[i.1] 20.5	0	m	
2	Allow-Events	[i.9] 7.2.2	0	m	
3	Authentication-Info	[i.1] 20.6	0	m	
4	Call-ID	[i.1] 20.8	m	m	
5	Contact	[i.1] 20.10	m	m	
6	Content-Disposition	[i.1] 20.11	0	m	
7	Content-Encoding	[i.1] 20.12	0	m	
8	Content-Language	[i.1] 20.13	0	m	
9	Content-Length	[i.1] 20.14	m	m	
10	Content-Type	[i.1] 20.15	m	m	
11	Cseq	[i.1] 20.16	m	m	
12	Date	[i.1] 20.17	0	m	
13	From	[i.1] 20.20	m	m	
15	History-Info	[i.25] 4.1	c13	c13	
16	MIME-Version	[i.1] 20.24	0	m	
17	Organization	[i.1] 20.25	0	0	
18	P-Asserted-Identity	[i.29] 9.1	0	0	
	P-Charging-Function-	[i.28] 4.5	n/a	n/a	
19	Addresses				
20	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
21	P-Preferred-Identity	[i.29] 9.2	Х	n/a	
22	Privacy	[i.30] 4.2	0	c1	
23	Record-Route	[i.1] 20.30	m	m	
0.4	Require	[i.1] 20.32	m	m	Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in
24	0	E: 41 00 0E	_	_	2xx response to REFER.
25 26	Server	[i.1] 20.35	0	0	
	Supported	[i.1] 20.37	m	m	
27	Timestamp	[i.1] 20.38	m	0	
28	To	[i.1] 20.39	m	m	
29	User-Agent	[i.1] 20.41	0	0	
30	Via	[i.1] 20.42	m	m	
31	Warning	[i.1] 20.43	0	0	
c1:					s trusted THEN m ELSE o.
c13:	IF History-Info extensi			ise n/a.	
NOTE:	The use of this header	is subject to	Spec 1.		

Table 5.24: Supported headers within the SUBSCRIBE request

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept	[i.1] 20.1	0	m	
1A	Accept-Contact	[i.23] 9.2	c5	c6	
2	Accept-Encoding	[i.1] 20.2	0	m	
3	Accept-Language	[i.1] 20.3	0	m	
3A	Allow	[i.1] 20.5	0	m	
4	Allow-Events	[i.9] 7.2.2	0	m	
5	Authorization	[i.1] 20.7	0	0	
3	Call-ID	[i.1] 20.8	m	m	
SA .	Contact	[i.1] 20.10	m	m	
7	Content-Disposition	[i.1] 20.11	0	m	
3	Content-Encoding	[i.1] 20.12	0	m	
9	Content-Language	[i.1] 20.13	0	m	
10	Content-Length	[i.1] 20.14	m	m	
11	Content-Type	[i.1] 20.15	m	m	
12	Cseq	[i.1] 20.16	m	m	
13	Date	[i.1] 20.17	0	m	
14	Event	[i.9] 7.2.1	m	m	
15	Expires	[i.1] 20.19	0	m	
16	From	[i.1] 20.20	m	m	
16A	Geolocation	[i.24] 3.2	0	0	
16B	History-Info	[i.25] 4.1	c13	c13	
I6C	Max-Breadth	[i.53] 5.8	0	c1	
17	Max-Forwards	[i.1] 20.22	m	c2	
18	MIME-Version	[i.1] 20.24	0	m	
18A	Organization	[i.1] 20.25	0	0	
18C	P-Asserted-Identity	[i.29] 9.1	c3	O	When sending this header is part of the SLA between the enterprise and the operator (on the support or not of a trusted relationship).
18F	P-Charging- Function-Addresses	[i.28] 4.5	n/a	n/a	
18G	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
18J	P-Profile-Key	[i.35] 5	n/a	n/a	
18K	P-User-Database	[i.36] 4	n/a	n/a	
18L	P-Visited-Network- ID	[i.28] 4.3	х	n/a	
18M	Privacy	[i.30] 4.2	0	c12	
19	Proxy-Authorization	[i.1] 20.28	c7	n/a	
20	Proxy-Require	[i.1] 20.29	n/a	n/a	
20A	Reason	[i.31] 2	0	0	
21	Record-Route	[i.1] 20.30	0	m	
21A	Referred-By	[i.33] 3	c8	с9	
21B	Reject-Contact	[i.23] 9.2	c5	c6	
21C	Request-Disposition	[i.23] 9.1	c5	c6	
22	Require	[i.1] 20.32	0	m	
23	Route	[i.1] 20.34	m	c4	
24	Supported	[i.1] 20.37	0	m	
25	Timestamp	[i.1] 20.38	0	m	
26	То	[i.1] 20.39	m	m	
27	User-Agent	[i.1] 20.41	0	0	
28	Via	[i.1] 20.42	m	m	
:1:			NGCN attacl		

- THEN m ELSE n/a.
- IF the NGCN site can be deployed in an environment where it is trusted THEN o ELSE n/a. c3:
- IF there are more than one SIP entity within the NGCN (including the attachment point to the NGN) c4: THEN m ELSE n/a.
- IF Caller Preferences extension is supported THEN o ELSE n/a. c5:
 - IF Caller Preferences extension is supported THEN m ELSE n/a.
- c6: IF UA-Proxy Authentication is used THEN m ELSE o. c7:
- IF Referred-By mechanism is supported THEN m ELSE n/a. c8:
- IF Referred-By mechanism is supported THEN o ELSE n/a. c9:
- IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o. c12:

Item	Header	Ref.	Sending	Receiving	Comment
c13:	IF History-Info exten	sion is supp	orted THEN m	n ELSE n/a.	

Table 5.25: Supported headers within the 2xx response to SUBSCRIBE

Item	Header	Ref.	Sending	Receiving	Comment
1	Allow	[i.1] 20.5	0	m	
2	Allow-Events	[i.9] 7.2.2	0	m	
3	Authentication-Info	[i.1] 20.6	0	m	
4	Call-ID	[i.1] 20.8	m	m	
5	Contact	[i.1] 20.10	m	m	
6	Content-Disposition	[i.1] 20.11	0	m	
7	Content-Encoding	[i.1] 20.12	0	m	
8	Content-Language	[i.1] 20.13	0	m	
9	Content-Length	[i.1] 20.14	m	m	
10	Content-Type	[i.1] 20.15	m	m	
11	Cseq	[i.1] 20.16	m	m	
12	Date	[i.1] 20.17	0	m	
13	Expires	[i.1] 20.19	m	m	
14	From	[i.1] 20.20	m	m	
16	History-Info	[i.25] 4.1	c13	c13	
17	MIME-Version	[i.1] 20.24	0	m	
18	Organization	[i.1] 20.25	0	0	
20	P-Asserted-Identity	[i.29] 9.1	0	0	
21	P-Charging-Function- Addresses	[i.28] 4.5	n/a	n/a	
<u>21</u> 22	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
<u>22</u> 23	P-Preferred-Identity	[i.20] 4.0 [i.29] 9.2	X	n/a	
<u>23 </u>	Privacy	[i.29] 9.2 [i.30] 4.2	0	c1	
			-		
25	Record-Route	[i.1] 20.30	m	m	Although TC 404 200 F 401 indicates that
26	Require	[i.1] 20.32	m	m	Although TS 124 229 [i.12] indicates that the ability to send this header field is mandatory, there is no business trunking requirement to send this header field in 2xx response to SUBSCRIBE.
27	Server	[i.1] 20.35	0	0	
28	Supported	[i.1] 20.37	m	m	
29	Timestamp	[i.1] 20.38	m	0	
30	То	[i.1] 20.39	m	m	
31	User-Agent	[i.1] 20.41	0	0	
32	Via	[i.1] 20.42	m	m	
33	Warning	[i.1] 20.43	О	0	
c1: c13:	IF the NGCN site can IF History-Info extensi				is trusted THEN m ELSE o.

Table 5.26: Supported headers within the UPDATE request

Item	Header	Ref.	Sending	Receiving	Comment						
1	Accept	[i.1] 20.1	0	m							
1A	Accept-Contact	[i.23] 9.2	c3	c4							
2	Accept-Encoding	[i.1] 20.2	0	m							
3	Accept-Language	[i.1] 20.3	0	m							
4	Allow	[i.1] 20.5	0	m							
5	Allow-Events	[i.9] 7.2.2	0	m							
6	Authorization	[i.1] 20.7	0	0							
7	Call-ID	[i.1] 20.8	m	m							
8	Call-Info	[i.1] 20.9	0	О							
9	Contact	[i.1] 20.10	m	m							
10	Content-Disposition	[i.1] 20.11	0	m							
11	Content-Encoding	[i.1] 20.12	0	m							
12	Content-Language	[i.1] 20.13	0	m							
13	Content-Length	[i.1] 20.14	m	m							
14	Content-Type	[i.1] 20.15	m	m							
15	Cseq	[i.1] 20.16	m	m							
16	Date	[i.1] 20.10	0	m							
17	From	[i.1] 20.17	m	m							
17A	Geolocation	[i.1] 20.20 [i.24] 3.2	0	0							
17B	Max-Breadth	[i.53] 5.8	0	c1							
18	Max-Forwards	[i.1] 20.22	m	c2							
19	MIME-Version	[i.1] 20.22 [i.1] 20.24	0	m							
19A	Min-SE	[i.1] 20.24 [i.27] 5	c5	c5							
20	Organization										
20B	P-Charging-Function-	[i.1] 20.25 [i.28] 4.5	o n/a	o n/a							
200	Addresses	[1.26] 4.5	n/a	n/a							
20C	P-Charging-Vector	[i.28] 4.6	n/a	n/a							
			c7	c7							
20D	P-Early-Media	[i.38] 8	n/a	n/a							
20E 21	Privacy	[i.30] 4.2									
22	Proxy-Authorization	[i.1] 20.28	c6	n/a							
22A	Proxy-Require	[i.1] 20.29	n/a	n/a							
	Reason	[i.31] 2	0	0							
23	Record-Route	[i.1] 20.30	n/a	n/a							
23A	Referred-By	[i.33] 3	c8	c9							
23B	Reject-Contact	[i.23] 9.2	c3	c4							
23C	Request-Disposition	[i.23] 9.1	c3	c4							
24	Require	[i.1] 20.32	0	m							
25	Route	[i.1] 20.34	m	c2							
25C	Session-Expires	[i.27] 4	c10	c10							
26	Supported	[i.1] 20.37	0	m							
27	Timestamp	[i.1] 20.38	0	m							
28	То	[i.1] 20.39	m	m							
29	User-Agent	[i.1] 20.41	0	0							
30	Via	[i.1] 20.42	m	m							
c1:	IF forking is possible b										
c2:		one SIP ent	ity within the N	NGCN (includ	ling the attachment point to the NGN) THEN						
-0-	m ELSE n/a.			-N - F' 05	/-						
c3:	IF Caller Preferences extension is supported THEN o ELSE n/a.										
c4:	IF Caller Preferences										
c5:	IF SIP session timer ex				a.						
c6:	IF UA-Proxy Authentic				L ma						
c7:	IF P-Early-Media priva				m else n/a.						
c8:	IF Referred-By mecha										
c9:					,						
c10:	ir oir session timer ex	XLENSION IS S	upported THE	IN III ELDE N/	IF Referred-By mechanism is supported THEN o ELSE n/a. IF SIP session timer extension is supported THEN m ELSE n/a.						

Table 5.27: Supported headers within the 200 OK response to the UPDATE request

Item	Header	Ref.	Sending	Receiving	Comment				
1	Accept	[i.1] 20.1	0	m					
2	Accept-Encoding	[i.1] 20.2	0	m					
3	Accept-Language	[i.1] 20.3	0	m					
4	Allow	[i.1] 20.5	0	m					
5	Allow-Events	[i.9] 7.2.2	0	m					
6	Authentication-Info	[i.1] 20.6	0	0					
7	Call-ID	[i.1] 20.8	m	m					
8	Call-Info	[i.1] 20.9	0	0					
9	Contact	[i.1] 20.10	m	m					
10	Content-Disposition	[i.1] 20.11	0	m					
11	Content-Encoding	[i.1] 20.12	0	m					
12	Content-Language	[i.1] 20.13	0	m					
13	Content-Length	[i.1] 20.14	m	m					
14	Content-Type	[i.1] 20.15	m	m					
15	Cseq	[i.1] 20.16	m	m					
16	Date	[i.1] 20.17	0	m					
17	From	[i.1] 20.20	m	m					
19	MIME-Version	[i.1] 20.24	0	m					
20	Organization	[i.1] 20.25	0	0					
22	P-Charging-Function-Addresses	[i.28] 4.5	n/a	n/a					
23	P-Charging-Vector	[i.28] 4.6	n/a	n/a					
24	P-Early-Media	[i.38] 8	c1	c1					
25	Privacy	[i.30] 4.2	0	c3					
26	Require	[i.1] 20.31	m	m					
27	Server	[i.1] 20.35	0	0					
28	Session-Expires	[i.27]	c2	c2					
29	Supported	[i.1] 20.37	m	m					
30	Timestamp	[i.1] 20.38	0	0					
31	То	[i.1] 20.39	m	m					
32	User-Agent	[i.1] 20.41	0	0					
33	Via	[i.1] 20.42	m	m					
34	Warning	[i.1] 20.43	0	0					
c1:	IF P-Early-Media private header		supported THE	EN m ELSE n/a	ā.				
c2:	IF SIP session timer extension is	supported Th	HĖN m ELSE	n/a.					
c3:	IF the NGCN site can be deployed in an environment where it is trusted THEN m ELSE o.								

5.2.2.5 Supported Message bodies

According to TS 124 229 [i.12] SIP message body handling follows the rules of RFC 5621 [i.87]; see item 82 of table A.4 (for a UE) and item 92 of table 162 (for a proxy). These rules require that a UE supports 'multipart/mixed' and 'multipart/alternative' body types; for a proxy support is optional (dependent on whether the proxy will examine body contents).

If the NGCN supports conditions under which two or more body parts will have to be included in a single SIP message (for example SDP and location information) it has to be prepared to send and receive a 'multipart/mixed' or 'multipart/alternative' body in appropriate SIP messages.

Besides that the NGCN site is expected to support the message body types listed below:

- application/sdp: mandatory for both receiving and sending side
- application/vnd.etsi.aoc+xml for the Advice of Charge service: as specified in clause 6.1.12 of TS 182 025 [i.3] mandatory for the receiving side if advice of charge is supported, not applicable otherwise.
- application/pidf+xml in accordance with RFC 4119 [i.78] and draft-ietf-sip-location-conveyance [i.24]:
 - mandatory for the sending side if geographical location has to be sent (unless location information is sent by reference) as specified in clause 5.1.6.8 of TS 124 229 [i.12] or if NGCN has to act as a presentity (presence service);

- mandatory for the receiving side if NGCN has to act as a presence watcher or if the NGCN supports location based services.

Further body types may be allowed across the NGN-NGCN interface, e.g. under a service level agreement.

NOTE: Conditions for supporting pidf+xml for basic presence services require further studies as well as the conditions for supporting multipart bodies.

5.2.2.6 Event packages

The NGCN site supported event packages are listed below:

Table 5.28: Supported event packages

Item	Does the implementation support	Ref.	Subscriber	Notifier
2	refer package?	[i.7] 3	О	0
3	presence package?	[i.43] 6	О	0
4	eventlist with underlying presence package?	[i.44], [i.43] 6	0	О
5	presence.winfo template-package?	[i.47] 4	0	О
6	ua-profile package?	[i.48] 3	0	О
7	conference package?	[i.49] 3	0	О
8	message-summary package?	[i.50]	0	0
9	poc-settings package	[i.51]	n/a	n/a

5.2.3 SDP protocol

For the NGCN the provisions of clause 6 of TS 124 229 [i.12] with modifications as described in ES 283 003 [i.15] and TS 182 025 [i.3], for a UE apply with the following qualifications:

- At a minimum the NGCN is expected to support SDP offer / answer exchanges as described in *draft-ietf-sipping-sip-offeranswer* [i.91].
- Reliable provisional responses and the PRACK method are optional, and neither side must depend on SDP carried in a 18x response or a PRACK message.
- If the UPDATE method is supported it can be used for SDP offer/answer exchange before and after the call
 has been answered.
- TS 124 229 [i.12] requires inclusion of a bandwidth parameter for audio and video media lines.
- According to TS 124 229 [i.12] an offer-answer cycle should result in a single codec per media type; if this is not the case a further offer should be issued to eliminate all codecs except the selected one.

The support of SDP extensions is detailed in table 5.29.

Table 5.29: Major capabilities

Item	Does the implementation support capabilities within main protocol extensions	Reference	Status	Comment			
22	integration of resource management and SIP?	[i.54], [i.55]	m	There is an inconsistency in TS 124 229 [i.12]: the capability is mandatory in the table but the procedures describe that the preconditions "should" be supported by a UA which makes the status optional (see clauses 5.1.3.1 and 5.1.4.1 of TS 124 229 [i.12]).			
23	grouping of media lines?	[i.68]	c2				
24	mapping of media streams to resource reservation flows?	[i.69]	c3				
25	SDP bandwidth modifiers for RTCP bandwidth?	[i.70]	o (see note)				
26	TCP-based media transport in the session description protocol?	[i.71]	0				
27	interactive connectivity establishment?	[i.72]	0				
28	session description protocol format for binary floor control protocol streams?	[i.73]	0				
29	extended RTP profile for real-time transport control protocol (RTCP)-based feedback (RTP/AVPF)?	[i.74]	0				
30	SDP capability negotiation?	[i.75]	c1				
c1:	IF 4.1/2 THEN m ELSE o multimedia telep						
c2:	IF 6.30/24 THEN m ELSE o mapping of m						
c3:	IF there are access specific procedures as used in TS 124 229 [i.12] which the NGCN is using THEN m ELSE o.						
NOTE:	For "video" and "audio" media types that utilise RTP/RTCP, if the RTCP bandwidth level for the session is different than the default RTCP bandwidth as specified in RFC 3556 [i.70], then it shall be specified. For other media types, it may be specified.						

NOTE: Current TS 124 229 [i.83] requirements on a UE to support SDP extensions, e.g. grouping, do not seem to imply a corresponding mandatory requirement on an NGCN site.

The following table provide information on the SDP protocol to be supported by the NGCN site for the interconnection to the NGN.

It is based on tables A.317, A.318 and A.319 of TS 124 229 [i.12] as modified by ES 283 003 [i.15] and considering Business Trunking specific requirements as described in TS 182 025 [i.3].

Table 5.30: SDP types

Item	Type	Reference	Sending	Receiving
	Session level description			
1	v= (protocol version)	[i.76] 5.1	m	m
2	o= (owner/creator and session	[i.76] 5.2	m	m
	identifier)			
3	s= (session name)	[i.76] 5.3	m	m
4	i= (session information)	[i.76] 5.4	0	m
5	u= (URI of description)	[i.76] 5.5	n/a	n/a
6	e= (email address)	[i.76] 5.6	n/a	n/a
7	p= (phone number)	[i.76] 5.6	n/a	n/a
8	c= (connection information)	[i.76] 5.7	m.1	m
9	b= (bandwidth information)	[i.76] 5.8	o (see note)	m
	Time description (one or more pe	er description)		
10	t= (time the session is active)	[i.76] 5.9	m	m
11	r= (zero or more repeat times)	[i.76] 5.10	n/a	n/a
	Session level description (contin	ued)		
12	z= (time zone adjustments)	[i.76] 5.11	n/a	n/a
13	k= (encryption key)	[i.76] 5.12	x	n/a
14	a= (zero or more session attribute	[i.76] 5.13	О	m
	lines)			
	Media description (zero or more	per description	n)	
15	m= (media name and transport address)	[i.76] 5.14	m	m
16	i= (media title)	[i.76] 5.4	0	m
17	c= (connection information)	[i.76] 5.7	m.1	m
18	b= (bandwidth information)	[i.76] 5.8	o (see note)	m
19	k= (encryption key)	[i.76] 5.12	x	n/a
20	a= (zero or more media attribute	[i.76] 5.13	0	m
	lines)			
m.1:	At least one of the parameters man			
NOTE:	For "video" and "audio" media type:	s that utilise RT	P/RTCP, it is specified. F	or other media types, it may be
	specified.			

5.2.4 Control plane transport

This depends on the method of interconnection; see clause 6.2.4 for the subscription-based and clause 7.2.4 for the peering-based method.

5.3 User plane interconnection

5.3.1 Media and Codec

5.3.1.1 DTMF

As specified in TS 124 229 [i.12] modified by ES 283 003 [i.15], an NGCN site shall include the MIME subtype "telephone-event" in the media description in the SDP for audio media flows that support both audio codec and DTMF payloads in RTP packets as described in RFC 4733 [i.67].

If the MIME subtype "telephone-event" is not supported by the remote party, the NGCN site should be able to send and receive DTMF in the media flow using a suitable audio codec negotiated in the offer/answer exchange.

5.3.1.2 Codecs

TS 181 005 [i.79] specifies principles for the use of codecs in the NGN. Specifically TS 181 005 [i.79] mandates that the "NGN shall allow end to end negotiation of any codec between NGN entities (terminal, network elements)". Although no direct requirement is placed on entities within the NGCN; by merit of the fact that SIP is used as the protocol for the interconnect it is clear that the NGCN-NGN interconnection interface shall allow end to end negotiation of any codec between NGCN and NGCN/NGN entities.

If the NGCN supports narrow band voice services then, as specified in TS 181 005 [i.79], in order to enable interworking for narrow band voice services for public traffic, the NGCN shall be capable of sending and receiving ITU-T Recommendation G.711 [i.89] coded speech with a packetization size of 20 ms.

5.3.1.3 Modification of media session parameters

As specified in TS 124 229 [i.12] modified by ES 283 003 [i.15], modifications of the characteristics of the media session) can be issued by the NGCN site or by the NGN by sending a re-INVITE request. The ability to support modifications of early dialogs depends on the support of the UPDATE and PRACK methods (see table 5.1).

5.4 Numbering, naming and addressing

The following URI formats in SIP messages apply at the NGCN-NGN interconnection as standardized in TS 124 229 [i.12] as modified by ES 283 003 [i.15] in order to provide business trunking services:

- SIP URI as defined in RFC 3261 [i.1], with the following qualifications:
 - The SIP URI can be either based on an E.164 number or a private number or it can be an e-mail style SIP URI, including device identifiers such as GRUUs.
 - Dial strings are not present on the NGCN-NGN interface.
 - As specified in [i.1], the ";user=phone" parameter is present in SIP URIs in which the user part is a telephone-subscriber string.
 - As specified in [i.1], the ";user=phone" parameter is not present in SIP URIs in which the user part is not a telephone-subscriber string in compliance with the tel URI definition of RFC 3966 [i.18]. According to this requirement, the phone-context parameter is mandatory when the user part of a SIP URI with a ";user=phone" parameter is not a global number.
- Tel URI defined in RFC 3966 [i.18] and according to the requirements defined in ECMA TR/96 [i.22]:
 - In accordance with RFC 3966 [i.18], the phone-context parameter is mandatory when the tel URI contains a private number.

In addition, the following URI formats in SIP Request-URIs may be applied at the NGCN-NGN interconnection as standardized in TS 124 229 [i.12] as modified by ES 283 003 [i.15] for the support of presence and instant messaging:

- IM URI defined in RFC 3860 [i.19];
- PRES URI defined in RFC 3859 [i.20].

Other URI formats may also be supported over the NGCN-NGN interconnection depending on the NGN operator and its customer agreements.

NOTE: The NGN behaviour in case of URIs that do not comply with the specified formats is outside the scope of the present document.

5.5 IP Version

The network elements interconnected on the NGCN-NGN Interconnection may support IPv4 only, IPv6 only or both.

The support of one or both of the IP versions is an option and should be based on bilateral agreement.

The control plane and the user plane may use different IP addresses and different IP versions.

In case IPv4 and IPv6 networks are interconnected, as specified in TS 124 229 [i.12], annex G as modified by ES 283 003 [i.15] and TS 183 021 [i.21], the involved P-CSCF shall apply the IP version interworking procedures for NA(P)-T-PT.

5.6 Security

5.6.1 Authentication

The authentication mechanism used on the NGCN-NGN interconnection should be part of the Service Level Agreement (SLA) between the operator and the enterprise.

It is expected that different mechanisms will apply for the two methods of interconnection; see clause 6.6.1 for the subscription based approach and clause 7.6.1 for the peering-based method.

6 Specific guidelines for the subscription based approach

6.1 Reference model for interconnection

6.1.1 General

The architectural split of the service layer and transport layer (used in the description below) is defined in ES 282 001 [i.16].

Clause 5.2 of TS 182 025 [i.3] describes the architectural requirements for the connection of an Next Generation Corporate Network site (NGCN site) to the NGN using the P-CSCF as an entry point at the service layer.

Clause 8.3 of TS 182 023 [i.4] shows the arrangement of the involved functional entities.

6.1.2 Functionalities performed by entities at the service layer

6.1.2.1 P-CSCF, S-CSCF

According to TS 182 025 [i.3], for the subscription based scenario the P-CSCF is the first contact point for the NGCN site within the IM subsystem (IMS). The NGCN site attaches to the P-CSCF at the Gm reference point.

The S-CSCF provides home server functions for the NGCN site, making use of the UPSF as necessary.

Further definition of the P-CSCF and S-CSCF is provided in TS 123 228 [i.17] as modified by ES 282 007 [i.42].

6.1.2.2 AS

Business trunking may involve a dedicated application server that provides business trunking specific capabilities and may need to access the UPSF for that purpose.

NOTE: If P-CSCF and S-CSCF together provide all business trunking related functions then no AS is needed.

6.1.2.3 NGCN

The NGCN site appears to the NGN like a UE attached to the P-CSCF at the Gm reference point.

6.1.3 Functionalities performed by entities at the transport layer

6.1.3.1 C-BGF

According to TS 182 025 [i.3], the main functional entity that is used at the transport layer to realise subscription-based business trunking and that is involved on the NGN-NGCN interface is the Core Border Gateway Function (C-BGF).

The C-BGF sits at the boundary between an access network and a core network and provides the interface between two IP-transport domains. Further definition of the C-BGF is provided in ES 282 001 [i.16].

6.1.4 Connectivity Access Network

As described in TS 182 025 [i.3], NGCN sites may be connected to any IP-CAN valid for TISPAN NGN. The present document assumes the following types of IP-CANs: xDSL and Ethernet LAN although it may be applicable to other types of IP-CANs.

Clause 9.2.1 of TS 124 229 [i.12] as modified by ES 283 003 [i.15] and TS 182 025 [i.3], clause 7.1.1 specify methods for getting a P-CSCF SIP server domain name or IP address:

- P-CSCF SIP server domain name or IP address is received from the NASS (i.e. the NACF representing a DHCP server). In this case the P-CSCF address/port are found in DHCP Option 120 (for xDSL access).
- P-CSCF address provisioned through an O&M interface.
- P-CSCF SIP server domain name or IP address received using the TR-69 [i.95] CWMP. In this case the P-CSCF address/port are found in the ProxyServer (ProxyServerPort) field or the OuboundProxy (OutboundProxyPort) field defined in TR-104 [i.96].

Additionally, clause 9.2.1. and related access technology specific annexes of TS 124 229 [i.12] as modified by ES 283 003 [i.15] specify methods of obtaining the P-CSCF address for all access technologies.

6.2 Control plane interconnection

6.2.1 SIP procedures

6.2.1.1 Outgoing requests from NGCN site

6.2.1.1.1 General

Procedures for outgoing requests are specified in TS 182 025 [i.3], clause 6.1.4. The following clauses provide further guidance on the expected NGCN site behaviour for the subscription based case in addition to clause 5.2.1.1.

6.2.1.1.2 Calling and connected identifiers

Clause 5.2.1.1.2 applies with the addition that a calling party identity may be sent in a P-Preferred-Identity instead of a P-Asserted-Identity header field in accordance with RFC 3325 [i.29].

NOTE: If the NGN does not trust the NGCN site it will generate its own P-Asserted-Identity header field, which may take an NGCN-provided P-Asserted-Identity or P-Preferred-Identity into account or may be a default identity for the NGCN site. NGN will use a provided PAI or PPI if that matches one of the registered public user identities.

6.2.1.1.3 Privacy

See clause 5.2.1.1.3.

In addition, a Privacy:id header field can also accompany a P-Preferred-Identity header field sent by the NGCN site.

6.2.1.1.4 Called identifier

See clause 5.2.1.1.4.

6.2.1.1.5 SDP offer

NOTE: TS 124 229 [i.12] currently requires a UE to include an SDP offer when submitting an INVITE request. There is an issue with subscription-based business trunking if in certain situations the NGCN site is unable to include an SDP offer in the INVITE request.

6.2.1.2 Incoming requests to NGCN site

6.2.1.2.1 General

Procedures for incoming requests are specified in TS 182 025 [i.3], clause 6.1.5. The following clauses provide further guidance on the expected NGCN site behaviour for the subscription based case in addition to 5.2.1.2.

6.2.1.2.2 Calling identity

See clause 5.2.1.2.2.

6.2.1.2.3 Called identity

See clause 5.2.1.2.3.

6.2.1.2.4 Request-URI

As specified in TS 182 025 [i.3], if a loose-route indicator is configured for the NGCN site the Request-URI of a SIP request received from the NGN will convey the actual destination inside the NGCN (as specified in clause 5.2.1.2.4), and the Route header field will contain the registered contact of the NGCN site.

If no loose-route indicator is configured in the NGCN site profile the Request-URI of a SIP request received from the NGN will contain the registered contact of the NGCN site, and the public user identity of the actual destination inside the NGCN is conveyed in the P-Called-Party-ID header field.

NOTE: The non-loose-route procedure may not be adequate for NGCN URIs that are not assigned public user identities, e.g. private GRUUs. This issue requires further study.

6.2.1.3 Registration

In the subscription based mode the NGCN site will register to the NGN as described in TS 182 025 [i.3] clause 6.1.3, using a public user identity and a private user identity that represent the NGCN site as a whole. As specified in TS 124 229 [i.12] with modifications as described in ES 283 003 [i.15] for UE's, the NGCN site includes a Supported:path header field in the REGISTER request.

When using SIP Digest, in addition to the procedures specified in RFC3261, the initial REGISTER includes an Authorization header field with the private user identity, as specified in TS 124 229 [i.12] clause 5.1.

NOTE 1: This procedure implicitly registers all other public user identities assigned to the NGCN site as individual or wildcarded identities.

NOTE 2: If provisioned in the user profile associated with the NGCN site the loose route indication will be stored by the S-CSCF at registration time.

If present in the REGISTER response the P-Associated-URI header field contains the set of implicitly registered identities.

Successful registration will result in an association between the NGCN site and the P-CSCF used for registration, based on mutual authentication between NGCN site and S-CSCF. The NGCN should be prepared to receive signalling traffic from the NGN over this association and in turn is expected to use this association when sending signalling messages to the NGN. An association may be a security association, a TLS session or a relationship between public user identity and port number (see clause 6.6.1).

As specified in TS 124 229 [i.12] with modifications as described in ES 283 003 [i.15] for UE's, the NGCN site subscribes to the reg-event package in order to get notified of status changes regarding its registration (refer to clause 4.4.2.4).

6.2.2 SIP protocol elements

6.2.2.1 General

See clause 5.2.2.1.

6.2.2.2 Methods

In addition to table 5.1, the methods listed in table 6.1 apply in the context of the subscription based scenario.

Table 6.1: Additional supported methods for subscription based scenario

Item	PDU		Sending		Receiving			
		Ref.	Profile Status	Ref.	Profile Status			
10	NOTIFY request	[i.9]	О	[i.9]	m (see note)			
11	NOTIFY response	[i.9]	m (see note)	[i.9]	О			
18	REGISTER request	[i.1] 10	m	[i.1] 10	х			
19	REGISTER response	[i.1] 10	x	[i.1] 10	m			
20	SUBSCRIBE request	[i.9]	m (see note)	[i.9]	О			
21	SUBSCRIBE response	[i.9]	0	[i.9]	m (see note)			
NOTE:	See clause 4.4.2.4 (reg-event package).							

6.2.2.3 Responses

See clause 5.2.2.3.

6.2.2.4 Header fields

In addition to clause 5.2.2.4, the following header fields apply for the following methods.

Table 6.2: Void

Table 6.3: Supported headers within the BYE request

Item	Header	Ref.	Sending	Receiving	Comment
21A	Security-Client	[i.32] 2.3.1	c2	n/a	
21B	Security-Verify	[i.32] 2.3.1	c3	n/a	
c2:	IF IMS AKA plus IPse	c ESP or SIP	Digest with	TLS is used for	authentication THEN o ELSE n/a
c3:	IF IMS AKA plus IPse	c ESP or SIP	Digest with	TLS is used for	authentication THEN m ELSE n/a

Table 6.4: Void

Table 6.5: Void

Table 6.6: Void

Table 6.7: Supported headers within the INFO request

Item	Header	Ref.	Sending	Receiving	Comment			
22	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
37	Security-Client	[i.32] 2.3.1	c4	n/a				
38	Security-Verify	[i.32] 2.3.1	c5	n/a				
c4:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN o ELSE n/a.							
c5:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN m ELSE n/a.							
c15:	IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.8: Supported headers within the 200 OK response to the INFO request

Item	Header	Ref.	Sending	Receiving	Comment			
21	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15: II	IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.9: Supported headers within the INVITE request

Item	Header	Ref.	Sending	Receiving	Comment		
24A	P-Access-Network-Info	[i.28] 4.4	c1	n/a			
24C	P-Asserted-Service	[i.34] 4.1	n/a	c4			
24D	P-Called-Party-ID	[i.28] 4.2	х	c2			
25	P-Media-Authorization	[i.37] 5.1	n/a	0			
25A	P-Preferred-Identity	[i.29] 9.2	0	n/a			
25B	P-Preferred-Service	[i.34] 4.2	c3	n/a			
33A	Security-Client	[i.32] 2.3.1	c7	n/a			
33B	Security-Verify	[i.32] 2.3.1	c8	n/a			
c1:	IF the access type is G	PRS, 3GPP2,	I-WLAN and	DOCSIS IP-C	CAN AND IF P-Access-Network-Info extension		
	is supported THEN "m	" ELSE "o".					
c2:	IF P-Called-Party-ID ex						
c3:	IF identification of communication services extension is supported THEN o ELSE n/a.						
c4:	IF identification of communication services extension is supported THEN m ELSE n/a.						
c7:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN o ELSE n/a.						
c8:	IF IMS AKA plus IPsec	ESP or SIP D	Digest with TI	LS is used for a	authentication THEN m ELSE n/a.		

Table 6.10: Supported headers within the 200 OK response to the INVITE

Item	Header	Ref.	Sending	Receiving	Comment			
23	P-Access-Network-Info	[i.28] 4.4	c1	n/a				
27	P-Media-Authorization	[i.37] 5.1	n/a		The actual requirement to support this header field should be applicable only in the case of GPRS access type. TS 124 229 [i.12] is expected to be corrected in future releases.			
c1	21 IF GPRS, 3GPP2, I-WLAN and DOCSIS IP-CAN access types are used THEN m ELSE o.							

NOTE: Table 6.10 gives hint on the headers' status for all the remaining possible responses to the INVITE request.

Table 6.11: Supported headers within the MESSAGE request

Item	Header	Ref.	Sending	Receiving	Comment		
18A	P-Access-Network-Info	[i.28] 4.4	c15	n/a			
18C	P-Asserted-Service	[i.34] 4.1	n/a	c3			
18D	P-Called-Party-ID	[i.28] 4.2	х	c1			
18G	P-Preferred-Identity	[i.29] 9.2	0	n/a			
18H	P-Preferred-Service	[i.34] 4.2	c2	n/a			
25A	Security-Client	[i.32] 2.3.1	c6	n/a			
25B	Security-Verify	[i.32] 2.3.1	c7	n/a			
c1:	IF P-Called-Party-ID ext	ension is sup	orted THEN	o ELSE n/a.			
c2:	IF identification of comm	unication ser	vices extension	on is supported	I THEN o ELSE n/a.		
c3:	IF identification of communication services extension is supported THEN m ELSE n/a.						
c6:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN o ELSE n/a.						
c7:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN m ELSE n/a.						
c15:	IF P-Access-Network-In						

Table 6.12: Supported headers within the 2xx response to the MESSAGE request

Item	Header	Ref.	Sending	Receiving	Comment			
12A	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15:	15: IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.13: Supported headers within the NOTIFY request

Item	Header	Ref.	Sending	Receiving	Comment						
17A	P-Access-Network-Info	[i.28] 4.4	c15	n/a							
22A	Security-Client	[i.32] 2.3.1	c4	n/a							
22B	Security-Verify	[i.32] 2.3.1	c5	n/a							
c4:	IF IMS AKA plus IPsec	SP or SIP D	igest with TLS is	s used for auth	nentication THEN o ELSE n/a.						
c5:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN m ELSE n/a.										
c15:	IF P-Access-Network-In	fo extension i	s supported THI	EN m else n/a	IF P-Access-Network-Info extension is supported THEN m else n/a.						

Table 6.14: Supported headers within the 200 OK response to NOTIFY

Item	Header	Ref.	Sending	Receiving	Comment			
1	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15:	15: IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.15: Supported headers within the OPTIONS request

Item	Header	Ref.	Sending	Receiving	Comment		
19C	P-Asserted-Service	[i.34] 4.1	n/a	c6			
19D	P-Called-Party-ID	[i.28] 4.2	х	c1			
19H	P-Preferred-Service	[i.34] 4.2	c2	n/a			
24A	Security-Client	[i.32] 2.3.1	c4	n/a			
24B	Security-Verify	[i.32] 2.3.1	c5	n/a			
25	Supported	[i.1] 20.37	m	m			
c1:	IF P-Called-Party-ID exte	ension is supp	orted THEN	o ELSE n/a.			
c2:	IF identification of comm	unication serv	ices extensio	n is supported T	HEN o ELSE n/a.		
c4:	IF IMS AKA plus IPsec E	SP or SIP Di	gest with TLS	is used for auth	entication THEN o ELSE n/a.		
c5:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN m ELSE n/a.						
c6:	IF identification of comm	unication serv	ices extensio	n is supported T	HEN m ELSE n/a.		

Table 6.16: Supported headers within the 200 OK response to the OPTIONS request

Item	Header	Ref.	Sending	Receiving	Comment			
22	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15:	c15: IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.17: Supported headers within the PRACK request

Item	Header	Ref.	Sending	Receiving	Comment			
16A	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15:	IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.18: Supported headers within the 200 OK response to the PRACK request

Item	Header	Ref.	Sending	Receiving	Comment			
13	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15:	IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.19: Supported headers within the PUBLISH request

Item	Header	Ref.	Sending	Receiving	Comment		
22A	P-Asserted-Service	[i.34] 4.1	n/a	c3			
21	P-Access-Network-Info	[i.28] 4.4	c15	n/a			
23	P-Called-Party-ID	[i.28] 4.2	х	c1			
26	P-Preferred-Identity	[i.29] 9.2	0	n/a			
26A	P-Preferred-Service	[i.34] 4.2	c2	n/a			
38	Security-Client	[i.32] 2.3.1	c5	n/a			
39	Security-Verify	[i.32] 2.3.1	c6	n/a			
c1:	IF P-Called-Party-ID exte						
c2:	IF identification of commu	unication servi	ces extension	n is supported Ti	HEN o ELSE n/a.		
c3:	IF identification of commu						
c5:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN o ELSE n/a.						
c6:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN m ELSE n/a.						
c15:	IF P-Access-Network-Info	extension is	supported Th	HEN m else n/a.			

Table 6.20: Supported headers within the 2xx response to the PUBLISH request

Item	Header	Ref.	Sending	Receiving	Comment			
17	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15:	IF P-Access-Network-Info extension is supported THEN m else n/a.							

Table 6.21: Supported headers within the REFER request

Item	Header	Ref.	Sending	Receiving	Comment		
14A	P-Access-Network-Info	[i.28] 4.4	c15	n/a			
14C	P-Asserted-Service	[i.34] 4.1	n/a	c3			
14D	P-Called-Party-ID	[i.28] 4.2	х	c1			
14G	P-Preferred-Identity	[i.29] 9.2	0	n/a			
14H	P-Preferred-Service	[i.34] 4.2	c2	n/a			
20A	Security-Client	[i.32] 2.3.1	c6	n/a			
20B	Security-Verify	[i.32] 2.3.1	c7	n/a			
c1	IF P-Called-Party-ID exte	nsion is supp	orted THEN o	ELSE n/a.			
c2:	IF identification of commu	ınication serv	rices extensio	n is supported	THEN o ELSE n/a.		
c3:	IF identification of commu	ınication serv	rices extension	n is supported	THEN m ELSE n/a.		
c6:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN o ELSE n/a.						
c7:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN m ELSE n/a.						
c15:	IF P-Access-Network-Info	extension is	supported Th	HEN m else n/	a.		

Table 6.22: Supported headers within the 2xx response to the REFER request

Item	Header	Ref.	Sending	Receiving	Comment			
10A	P-Access-Network-Info	[i.28] 4.4	c15	n/a				
c15:								

Table 6.23: Supported headers within the REGISTER request

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept	[i.1] 20.1	0	n/a	
2	Accept-Encoding	[i.1] 20.2	0	n/a	
3	Accept-Language	[i.1] 20.3	0	n/a	
3A	Allow	[i.1] 20.5	0	n/a	
4	Allow-Events	[i.9] 7.2.2	0	n/a	
5	Authorization	[i.1] 20.7	m	n/a	
6	Call-ID	[i.1] 20.8	m	n/a	
7	Call-Info	[i.1] 20.9	0	n/a	
8	Contact	[i.1] 20.10	m	n/a	
9	Content-Disposition	[i.1] 20.11	0	n/a	
10	Content-Encoding	[i.1] 20.12	0	n/a	
11	Content-Language	[i.1] 20.13	0	n/a	
12	Content-Length	[i.1] 20.14	m	n/a	
13	Content-Type	[i.1] 20.15	m	n/a	
14	Cseq	[i.1] 20.16	m	n/a	
15	Date	[i.1] 20.17	o	n/a	
16	Expires	[i.1] 20.19	0	n/a	
17	From	[i.1] 20.20	m	n/a	
17A	Geolocation	[i.24] 3.2	0	n/a	
17B	History-Info	[i.25] 4.1	0	n/a	
17C	Max-Breadth	[i.53] 5.8	n/a	n/a	
18	Max-Forwards	[i.1] 20.22	m	n/a	
19	MIME-Version	[i.1] 20.24	0	n/a	
20	Organization	[i.1] 20.25	0	n/a	
20A	P-Access-Network-	[i.28] 4.4	c15	n/a	
	Info				
20B	P-Charging-	[i.28] 4.5	n/a	n/a	
	Function-Addresses				
20C	P-Charging-Vector	[i.28] 4.6	n/a	n/a	
20D	P-User-Database	[i.36] 4	n/a	n/a	
20E	P-Visited-Network-ID	[i.28] 4.3	х	n/a	
20FE	Path	[i.56] 4	х	n/a	
20GF	Privacy	[i.30] 4.2	n/a	n/a	
21	Proxy-Authorization	[i.1] 20.28	0	n/a	
22	Proxy-Require	[i.1] 20.29	0	n/a	
22A	Reason	[i.31] 2	0	n/a	
22B	Referred-By	[i.33] 3	n/a	n/a	
22C	Request-Disposition	[i.23] 9.1	n/a	n/a	
23	Require	[i.1] 20.32	0	n/a	
24	Route	[i.1] 20.34	n/a	n/a	
24A	Security-Client	[i.32] 2.3.1	c1	n/a	
24B	Security-Verify	[i.32] 2.3.1	c1	n/a	
25	Supported	[i.1] 20.37	m	n/a	Contains the option-tag "path" and if
					GRUU is supported the option-tag
					"gruu".
26	Timestamp	[i.1] 20.38	0	n/a	
27	То	[i.1] 20.39	m	n/a	
28	User-Agent	[i.1] 20.41	0	n/a	
29	Via	[i.1] 20.42	m	n/a	
c1:	IF IMS AKA plus IPse	ec ESP or SIF	Digest with	TLS is suppor	ted as security mechanism THEN m
l	ELSE n/a.				
c15:	IF P-Access-Network	c-Info extension	n is supporte	ed THEN m els	se n/a.

Table 6.24: Supported headers within the 200 OK response to the REGISTER

Item	Header	Ref.	Sending	Receiving	Comment
1	Accept	[i.1] 20.1	n/a	m	
2	Accept-Encoding	[i.1] 20.2	n/a	m	
3	Accept-Language	[i.1] 20.3	n/a	m	
4	Allow	[i.1] 20.5	n/a	m	
5	Allow-Events	[i.9] 7.2.2	n/a	m	
	Authentication-	[i.1] 20.6	n/a	m	
6	Info				
7	Call-ID	[i.1] 20.8	n/a	m	
8	Call-Info	[i.1] 20.9	n/a	0	
9	Contact	[i.1] 20.10	n/a	m	
	Content-	[i.1] 20.11	n/a	m	
10	Disposition				
11	Content-Encoding	[i.1] 20.12	n/a	m	
	Content-	[i.1] 20.13	n/a	m	
12	Language				
13	Content-Length	[i.1] 20.14	n/a	m	
14	Content-Type	[i.1] 20.15	n/a	m	
15	Cseq	[i.1] 20.16	n/a	m	
16	Date	[i.1] 20.17	n/a	m	
17	Flow-Timer	[i.65] 11	n/a	0	
18	From	[i.1] 20.20	n/a	m	
19	Geolocation	[i.24] 3.2	n/a	n/a	
20	History-Info	[i.25] 4.1	n/a	0	
21	MIME-Version	[i.1] 20.24	n/a	m	
22	Organization	[i.1] 20.25	n/a	0	
	P-Access-	[i.28] 4.4	n/a	n/a	
23	Network-Info				
24	P-Associated-URI	[i.28] 4.1	n/a	m	See clause 4.4.2.4.
25	Path	[i.56] 4	n/a	0	
	P-Charging-	[i.28] 4.5	n/a	n/a	
	Function-				
26	Addresses				
	P-Charging-	[i.28] 4.6	n/a	n/a	
27	Vector			1.	
28	Privacy	[i.30] 4.2	n/a	n/a	
29	Require	[i.1] 20.32	n/a	m	
30	Server	[i.1] 20.35	n/a	0	
31	Service-Route	[i.37] 5	n/a	m	See clause 4.4.2.4.
32	Supported	[i.1] 20.37	n/a	m	
33	Timestamp	[i.1] 20.38	n/a	m	
34	То	[i.1] 20.39	n/a	m	
35	User-Agent	[i.1] 20.41	n/a	0	
36	Via	[i.1] 20.42	n/a	m	
37	Warning	[i.1] 20.43	n/a	0	

Table 6.25: Supported headers within the SUBSCRIBE request

Item	Header	Ref.	Sending	Receiving	Comment				
18B	P-Access-Network-Info	[i.28] 4.4	c15	n/a					
18D	P-Asserted-Service	[i.28] 4.1	n/a	c3					
18E	P-Called-Party-ID	[i.28] 4.2	х	c1					
18H	P-Preferred-Identity	[i.29] 9.2	0	n/a					
181	P-Preferred-Service	[i.34] 4.2	c2	n/a					
23A	Security-Client	[i.32] 2.3.1	c6	n/a					
23B	Security-Verify	[i.32] 2.3.1	c7	n/a					
c1:	IF P-Called-Party-ID exte	nsion is suppor	ted THEN o E	LSE n/a.					
c2:	IF identification of commu	unication service	es extension is	s supported TI	HEN o ELSE n/a.				
c3:	IF identification of commu	unication service	es extension is	s supported TI	HEN m ELSE n/a.				
c6:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN o ELSE n/a.								
c7:	IF IMS AKA plus IPsec E	SP or SIP Dige:	st with TLS is	used for authe	entication THEN m ELSE n/a.				
c15:	IF P-Access-Network-Info	extension is s	upported THE	N m ELSE n/a	l.				

Table 6.26: Supported headers within the 2xx response to SUBSCRIBE

Item	Header	Ref.	Sending	Receiving	Comment
19	P-Access-Network-Info	[i.28] 4.4	c15	n/a	
c15:	IF P-Access-Network-Infe	o extension is s	upported THEI	N m ELSE n/a.	

Table 6.27: Supported headers within the UPDATE request

Item	Header	Ref.	Sending	Receiving	Comment					
20A	P-Access-Network-Info	[i.28] 4.4	c15	n/a						
25A	Security-Client	[i.32] 2.3.1	c4	n/a						
25B	Security-Verify	[i.32] 2.3.1	c5	n/a						
c4:	, , , , , , , , , , , , , , , , , , , ,									
c5:	IF IMS AKA plus IPsec ESP or SIP Digest with TLS is used for authentication THEN m ELSE n/a.									
c15:	IF P-Access-Network-Inf	o extension is s	upported THE	N m else n/a.						

Table 6.28: Supported headers within the 200 OK response to the UPDATE request

Item	Header	Ref.	Sending	Receiving	Comment
21	P-Access-Network-Info	[i.28] 4.4	c15	n/a	
c15:	IF P-Access-Network-Inf	o extension is s	upported THE	N m else n/a.	

6.2.2.5 Supported message bodies

See clause 5.2.2.5.

6.2.2.6 Event packages

In addition to clause 5.2.2.6 the event packages in the following table apply:

Table 6.29: Supported event packages

Item	Does the implementation support	Ref.	Subscriber	Notifier
1	reg event package?	[i.45]	M (see note)	n/a
1A	reg event package extension for GRUUs?	[i.46]	0	n/a
NOTE:	See clause 4.4.2.4.			

6.2.3 SDP protocol

See clause 5.2.3.

6.2.4 Control plane transport

The control plane transport of the NGCN-NGN Interconnection interface in the subscription based approach complies with the provisions in clause 4.2A of TS 124 229 [i.12] as modified by ES 283 003 [i.15] applicable to a UE and a P-CSCF with modifications as described in the following clauses.

A security gateway may exist with IPv4 and IPv6 interfaces between the NGCN and the NGN.

NOTE: Need statement concerning behaviour when two SIP entities within an NGCN site are both capable of registering through the P-CSCF, either on a cold or hot standby basis or on a load sharing basis.

6.2.4.1 Keep alive mechanism

ES 283 003 [i.15] provides two solutions to keep a connection alive, depending on the NAT traversal mechanism (Latching-based as defined in TS 124 229 [i.12], annex F or SIP Outbound-based as defined in annex K) used.

When using the latching-based NAT traversal mechanism, as defined in TS 124 229 [i.12], annex F as modified by ES 283 003 [i.15], clause F.4.2 provides two solutions for keeping the signalling connection alive:

- short registration timers (see note 1 in ES 283 003 [i.15], clause F.4.2); and
- SIP outbound keep-alive as a stand-alone mechanism (see note 2 in ES 283 003 [i.15], clause F.4.2).

When using SIP outbound, as specified in TS 124 229 [i.12], annex K, the SIP-outbound keep-alive mechanism applies.

NOTE: Use of alternative mechanisms (e.g. OPTIONS method) is outside the scope of the present document.

6.2.4.2 P-CSCF redundancy

Clause 6.1.4 describes several methods enabling an NGCN site to obtain the IP address or the SIP server domain name of the P-CSCF. If a SIP server domain name of the P-CSCF is obtained, RFC 3263 [i.86] procedures as specified in TS 124 229 [i.12], clause E.2.2.1 can be applied to obtain from the DNS the IP address of the P-CSCF, including backup addresses for use in case of failure of the preferred choice.

NOTE 1: 3GPP TR 23.812 [i.94] may provide solutions for including load status information in the DNS (e.g. setting the weight field in SRV records based on the actual server load). However this will not affect the NGCN-NGN interface but rather the DNS behaviour.

NOTE 2: Business Trunking specific redundancy mechanisms are for further study in TS 182 025 (Release 2) [i.3].

6.3 User plane interconnection

6.3.1 Media and Codec

6.3.1.1 DTMF

See clause 5.3.1.1.

6.3.1.2 Codecs

See clause 5.3.1.2.

6.3.1.3 Modification of media session parameters

See clause 5.3.1.3.

6.4 Numbering, naming and addressing

See clause 5.4.

6.5 IP Version

See clause 5.5.

6.6 Security

6.6.1 Authentication

The NGCN site can connect to the NGN using one of the following authentication mechanisms between NGN and NGCN site as specified in TS 124 229 [i.12], clause 5.1.1.5:

• IMS AKA with IPSec;

- SIP digest over TLS;
- SIP digest without TLS.

NOTE: When SIP Digest is used without TLS, the NGCN site may need to provide authentication credentials in all requests, as specified in TS 133 203 [i.52] annex N, unless a check on the source address/port of the messages sent by the NGCN site is considered sufficiently secure by the NGN.

Which of these authentication mechanisms are applicable is part of an SLA between NGN and NGCN.

An NGCN has to support at least one of the above mechanisms and should allow configuration of the authentication mechanism to be used if it supports more than one. For the mechanisms TLS and IMS AKA support of the security agreement extension of SIP is mandatory.

Irrespective of the mechanism used, the NGCN site is authenticated as a whole as part of the registration process. If TLS or IMS AKA is in use, non-REGISTER requests from the NGCN are implicitly authenticated by being sent within the security context established between NGN and NGCN during registration, but non-REGISTER requests may be challenged by the NGN if SIP Digest without TLS is in use. Individual NGCN entities beyond the NGCN attachment point are never subject to being challenged by the NGN.

In addition, if allowed by the SLA, implicit authentication may also be used. This does not require any specific action from the NGCN site and relies on the NASS bundled authentication procedure at the NGN side.

NOTE: The authentication mechanism discussed above is different from NGCN-internal authentication mechanisms between entities inside the NGCN; refer to draft ECMA-TR/100 [i.88] for more information. NGCN-specific authentication information may traverse the NGN if exchanged between NGCN sites connected by the NGN.

7 Specific guidelines for the peering-based approach

7.1 Reference model for interconnection

7.1.1 General

7.1.2 Functionalities performed by entities at the service layer

7.1.2.1 Interconnection Border Control Function (IBCF)

According to TS 182 025 [i.3], for the peering based scenario the IBCF is the contact point for the NGCN site within the IM subsystem (IMS). The NGCN site attaches to the IBCF at the Ic reference point.

Further definition of the IBCF is provided in TS 123 228 [i.17] as modified by ES 282 007 [i.42].

7.1.2.2 NGCN

The NGCN site appears to the NGN like an IBCF attached to the (NGN's) IBCF at the Ic reference point.

7.2 Control plane interconnection

7.2.1 SIP procedures

7.2.1.1 Outgoing requests from NGCN site

Procedures for outgoing requests are specified in TS 182 025 [i.3], clause 6.2.4 for the peering based case. The peering based scenario has no further requirements in addition to 5.2.1.1.

NOTE: If the NGN does not trust the NGCN site it will remove a P-Asserted-Identity header field provided by the NGCN site, i.e. the message will proceed without a P-Asserted-Identity.

7.2.1.2 Incoming requests to NGCN site

Procedures for incoming requests are specified in TS 182 025 [i.3], clause 6.2.5 for the peering based case. The peering based scenario has no further requirements in addition to 5.2.1.2.

7.2.1.3 Registration

Not applicable.

7.2.2 SIP protocol elements

7.2.2.1 General

7.2.2.2 Methods

See clause 5.2.2.2.

In addition to table 5.1, the methods listed in table 7.1 apply in the context of the peering based scenario.

Table 7.1: Supported methods

Item	PDU		Sending	Receiving		
		Ref.	Profile Status	Ref.	Profile Status	
10	NOTIFY request	[i.9]	О	[i.9]	О	
11	NOTIFY response	[i.9]	О	[i.9]	О	
20	SUBSCRIBE request	[i.9]	О	[i.9]	О	
21	SUBSCRIBE response	[i.9]	0	[i.9]	0	

7.2.2.3 Responses

See clause 5.2.2.3.

7.2.2.4 Header fields

In addition to 5.2.2.4, the following header fields apply for the following methods.

Table 7.2: Void

Table 7.3: Supported headers within the BYE request

Item	Header	Ref.	Sending	Receiving	Comment
21A	Security-Client	[i.32] 2.3.1	n/a	n/a	
21B	Security-Verify	[i.32] 2.3.1	n/a	n/a	

Table 7.4: Void

Table 7.5: Void

Table 7.6: Void

Table 7.7: Supported headers within the INFO request (peering based approach)

Item	Header	Ref.	Sending	Receiving	Comment
22	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
37	Security-Client	[i.32] 2.3.1	n/a	n/a	
38	Security-Verify	[i.32] 2.3.1	n/a	n/a	

Table 7.8: Supported headers within the 200 OK response to the INFO request

Item	Header	Ref.	Sending	Receiving	Comment
21	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.9: Supported headers within the INVITE request

Item	Header	Ref		Sending	Receiving	Comment			
24A	P-Access-Network-Info	[i.28] 4.	.4	n/a	n/a				
24C	P-Asserted-Service	[i.34] 4.	.1	n/a	n/a				
24D	P-Called-Party-ID	[i.28] 4.	.2	X	n/a				
25	P-Media-Authorization	[i.37] 5.	.1	n/a	n/a				
25A	P-Preferred-Identity	[i.29] 9.	.2	n/a	n/a				
25B	P-Preferred-Service	[i.34] 4.	.2	n/a	n/a				
33A	Security-Client	[i.32] 2.	.3.1	n/a	n/a				
33B	Security-Verify	[i.32] 2.	.3.1	n/a	n/a				
NOTE:	The use of this header is subject to Spec T.								

Table 7.10: Supported headers within the 200 OK response to the INVITE request

Item	Header	Ref.	Sending	Receiving	Comment
23	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
27	P-Media-Authorization	[i.37] 5.1	х	n/a	

Table 7.11: Supported headers within the MESSAGE request

Item	Header	Ref.	Sending	Receiving	Comment
18A	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
18C	P-Asserted-Service	[i.34] 4.1	n/a	n/a	
18D	P-Called-Party-ID	[i.28] 4.2	х	n/a	
18G	P-Preferred-Identity	[i.29] 9.2	n/a	n/a	
18H	P-Preferred-Service	[i.34] 4.2	n/a	n/a	
25A	Security-Client	[i.32] 2.3.1	n/a	n/a	
25B	Security-Verify	[i.32] 2.3.1	n/a	n/a	

Table 7.12: Supported headers within the 2xx response to the MESSAGE request

Item	Header	Ref.	Sending	Receiving	Comment
12A	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.13: Supported headers within the NOTIFY request

Item	Header	Ref.	Sending	Receiving	Comment
17A	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
22A	Security-Client	[i.32] 2.3.1	n/a	n/a	
22B	Security-Verify	[i.32] 2.3.1	n/a	n/a	

Table 7.14: Supported headers within the 200 OK response to NOTIFY

Item	Header	Ref.	Sending	Receiving	Comment
1	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.15: Supported headers within the OPTIONS request

Item	Header	Ref.	Sending	Receiving	Comment				
19C	P-Asserted-Service	[i.34] 4.1	n/a	n/a					
19D	P-Called-Party-ID	[i.28] 4.2	х	n/a					
19H	P-Preferred-Service	[i.34] 4.2	n/a	n/a					
24A	Security-Client	[i.32] 2.3.1	n/a	n/a					
24B	Security-Verify	[i.32] 2.3.1	n/a	n/a					
25	Supported	[i.1] 20.37	0	m					
NOTE:	NOTE: The use of this header is subject to Spec T.								

Table 7.16: Supported headers within the 200 OK response to the OPTIONS request

Item	Header	Ref.	Sending	Receiving	Comment
22	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.17: Supported headers within the PRACK request

Item	Header	Ref.	Sending	Receiving	Comment
16A	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.18: Supported headers within the 200 OK response to the PRACK request

Item	Header	Ref.	Sending	Receiving	Comment
13	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.19: Supported headers within the PUBLISH request

Item	Header	Ref.	Sending	Receiving	Comment
22A	P-Asserted-Service	[i.34] 4.1	n/a	n/a	
21	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
23	P-Called-Party-ID	[i.28] 4.2	х	n/a	
26	P-Preferred-Identity	[i.29] 9.2	n/a	n/a	
26A	P-Preferred-Service	[i.34] 4.2	n/a	n/a	
38	Security-Client	[i.32] 2.3.1	n/a	n/a	
39	Security-Verify	[i.32] 2.3.1	n/a	n/a	

Table 7.20: Supported headers within the 2xx response to the PUBLISH request

Item	Header	Ref.	Sending	Receiving	Comment
17	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.21: Supported headers within the REFER request

Item	Header	Ref.	Sending	Receiving	Comment
14A	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
14C	P-Asserted-Service	[i.34] 4.1	n/a	n/a	
14D	P-Called-Party-ID	[i.28] 4.2	х	n/a	
14G	P-Preferred-Identity	[i.29] 9.2	х	n/a	
14H	P-Preferred-Service	[i.34] 4.2	n/a	n/a	
20A	Security-Client	[i.32] 2.3.1	n/a	n/a	
20B	Security-Verify	[i.32] 2.3.1	n/a		

Table 7.22: Supported headers within the 2xx response to the REFER request

Item	Header	Ref.	Sending	Receiving	Comment
10A	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.23: Supported headers within the SUBSCRIBE request

Item	Header	Ref.	Sending	Receiving	Comment
18B	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
18D	P-Asserted-Service	[i.28] 4.1	n/a	n/a	
18E	P-Called-Party-ID	[i.28] 4.2	х	n/a	
18H	P-Preferred-Identity	[i.29] 9.2	n/a	n/a	
18I	P-Preferred-Service	[i.34] 4.2	n/a	n/a	
23A	Security-Client	[i.32] 2.3.1	n/a	n/a	
23B	Security-Verify	[i.32] 2.3.1	n/a	n/a	

Table 7.24: Supported headers within the 2xx response to SUBSCRIBE

Item	Header	Ref.	Sending	Receiving	Comment
19	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

Table 7.25: Supported headers within the UPDATE request

Item	Header	Ref.	Sending	Receiving	Comment
20A	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	
25A	Security-Client	[i.32] 2.3.1	n/a	n/a	
25B	Security-Verify	[i.32] 2.3.1	n/a	n/a	

Table 7.26: Supported headers within the 200 OK response to the UPDATE request

Item	Header	Ref.	Sending	Receiving	Comment
21	P-Access-Network-Info	[i.28] 4.4	n/a	n/a	

7.2.2.5 Supported message bodies

See clause 5.2.2.5.

7.2.2.6 Event packages

See clause 5.2.2.6.

7.2.3 SDP protocol

See clause 5.2.3.

7.3 User plane interconnection

7.3.1 Media and Codec

7.3.1.1 DTMF

See clause 5.3.1.1.

7.3.1.2 Codecs

See clause 5.3.1.2.

7.3.1.3 Modification of media session parameters

See clause 5.3.1.3.

7.4 Numbering, naming and addressing

See clause 5.4.

7.5 IP Version

See clause 5.5.

Annex A (informative): Bibliography

- IETF RFC 3841 (2004): "Caller Preferences for the Session Initiation Protocol (SIP)".
- IETF RFC 3856 (2004): "A Presence Event Package for the Session Initiation Protocol (SIP)".
- IETF RFC 4662 (2006): "A Session Initiation Protocol (SIP) Event Notification Extension for Resource Lists".
- IETF RFC 3680 (2004): "A Session Initiation Protocol (SIP) Event Package for Registrations".
- Draft-mahy-iptel-cpc-06 (2007): "CPC tel URI".
- Draft-ietf-sipcore-info-event-02 (2009): "Session Initiation Protocol (SIP) INFO Method and Package Framework".

History

Document history			
V2.1.1	April 2010	Publication	