

ETSI TS 102 005 V1.1.1 (2005-03)

Technical Specification

Digital Video Broadcasting (DVB); Specification for the use of video and audio coding in DVB services delivered directly over IP

European Broadcasting Union



Union Européenne de Radio-Télévision



Reference

DTS/JTC-DVB-124

Keywords

audio, broadcasting, digital, DVB, MPEG, TV,
video

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.

© European Broadcasting Union 2005.

All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	5
Foreword.....	5
Introduction	5
1 Scope	7
2 References	7
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	8
4 Systems layer.....	9
4.1 Transport over IP Networks	9
4.2 RTP payload formats.....	9
4.2.1 RTP packetization of H.264/AVC	9
4.2.2 RTP packetization of High Efficiency AAC.....	9
5 Video	9
5.1 Profile and Level	10
5.2 Frame Rate	10
5.3 Aspect Ratio	11
5.4 Luminance resolution	11
5.5 Chromaticity.....	11
5.6 Chroma	11
5.7 Parameter Constraints.....	11
6 Audio.....	12
6.1 Audio mode	12
6.2 Profiles	12
6.3 Bit rate	12
6.4 Sampling frequency.....	12
6.5 Dynamic Range Control	13
6.6 Matrix Downmix	13
Annex A (informative): Description of the Implementation Guidelines.....	14
A.1 Introduction	14
A.2 Systems.....	14
A.2.1 Protocol Stack	14
A.2.2 Transport of High Efficiency AAC audio	15
A.2.3 Transport of H.264/AVC video.....	16
A.2.4 Synchronization of content delivered over IP	16
A.2.5 Synchronization with content delivered over MPEG-2 TS	17
A.2.6 Service discovery	17
A.2.7 Linking to applications	17
A.2.8 Capability exchange	17
A.3 Video	17
A.3.1 Video overview	17
A.3.2 Network Abstraction Layer	18
A.3.3 Video Coding Layer	18
A.3.4 Explanation of H.264/AVC Profiles and Levels	20
A.3.5 Summary of key tools and parameter ranges for Capability A to E IRDs.....	22
A.3.6 Other Video Parameters	22
A.4 Audio.....	23
A.4.1 MPEG-4 High Efficiency AAC (HE AAC)	23
A.4.2 HE AAC Levels and Main Parameters for DVB.....	24

A.4.3	Methods for signalling of SBR.....	25
A.5	Future Work	26
History	27

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by Joint Technical Committee (JTC) Broadcast of the European Broadcasting Union (EBU), Comité Européen de Normalisation ELECTrotechnique (CENELEC) and the European Telecommunications Standards Institute (ETSI).

Introduction

The present document specifies the use of H.264/AVC as specified in ITU-T Recommendation H.264 and ISO/IEC 14496-10 [1], and High Efficiency AAC as specified in ISO/IEC 14496-3 [2] and in ISO/IEC 14496-3/AMD-1 [3].

The present document does not address guidelines for the use of Video and Audio Coding in Broadcasting Applications based on the MPEG-2 Transport Stream as defined in TS 101 154 [9]. For the transport of an MPEG-2 TS in RTP packets over IP, RFC 2250 [8] shall be used. The present document addresses the use of Video and Audio Coding in DVB services delivered directly over IP without involving MPEG-2 Transport Stream.

For delivery of H.264/AVC and High Efficiency AAC encoded content over IP, the following hierarchical classification of IP-IRDs is defined:

- **Capability A IP-IRDs** are capable of decoding bitstreams conforming to Baseline Profile at Level 1b with `constraint_set1_flag` being equal to 1 as specified in [1].
- **Capability B IP-IRDs** are capable of decoding bitstreams conforming to Baseline Profile at Level 1.2 with `constraint_set1_flag` being equal to 1 as specified in [1].
- **Capability C IP-IRDs** are capable of decoding bitstreams conforming to Baseline Profile at Level 2 with `constraint_set1_flag` being equal to 1 as specified in [1].
- **Capability D IP-IRDs** are capable of decoding bitstreams conforming to Main profile at level 3 as specified in [1].
- **Capability E IP-IRDs** are capable of decoding bitstreams conforming to Main profile at level 4 as specified in [1].

An IP-IRD of one of the capability classes above shall meet the minimum functionality, as specified in the present document, for decoding of H.264/AVC and High Efficiency AAC delivered over an IP network. The specification of this minimum functionality in no way prohibits IP-IRD manufacturers from including additional features, and should not be interpreted as stipulating any form of upper limit to the performance.

Where an IP-IRD feature described in the present document is mandatory, the word "shall" is used and the text is in *italic*; all other features are optional. The guidelines presented for IP-IRDs observe the following principles:

- IP-IRDs allow for future compatible extensions to the bit-stream syntax;
- all "reserved", "unspecified", and "private" bits in H.264/AVC, High Efficiency AAC and IP protocols shall be ignored by IP-IRDs not designed to make use of them.

The rules of operation for the encoders are features and constraints which the encoding system should adhere to in order to ensure that the transmissions can be correctly decoded. These constraints may be mandatory or optional. Where a feature or constraint is mandatory, the word "shall" is used and the text is *italic*; all other features are optional.

Clauses 4 to 6 provide the Digital Video Broadcasting (DVB) guidelines for the systems, video, and audio layer, respectively. For information, some of the key features are summarized below, but clauses 4 to 6 should be consulted for all definitions:

Systems:

- H.264/AVC and High Efficiency AAC encoded data is delivered over IP in RTP packets.

Video:

- Capability A, B, and C IP-IRDs support the H.264/AVC Baseline Profile with *constraint_set1_flag* equal to 1.
- Capability D and E IP-IRDs support the H.264/AVC Main Profile.
- IP-IRDs labelled with a particular capability Y are also capable of decoding and displaying pictures that can be decoded by IP-IRDs labelled with a particular capability X with X being an earlier letter than Y in the alphabet. For instance, Capability D IP-IRDs are capable of decoding bitstreams conforming to Main Profile at level 3 of H.264/AVC and below. Additionally, Capability D IP-IRDs are capable of decoding bitstreams that are also decodable by IP-IRDs with capabilities A, B, or C.

Audio:

- Use of the MPEG-4 Audio High Efficiency AAC Profile.
- Sampling rates between 8 kHz and 48 kHz are supported by IP-IRDs.
- IP-IRDs support mono, 2-channel stereo; support of multi-channel is optional.

See annex A for a description of these Implementation Guidelines.

1 Scope

The present document provides implementation guidelines for the use of H.264/AVC and High Efficiency AAC for DVB compliant delivery in RTP packets over IP networks. Guidelines are given for the decoding of H.264/AVC and High Efficiency AAC in IP-IRDs, as well as rules of operation that encoders should apply to ensure that transmissions can be correctly decoded. These guidelines and rules may be mandatory, recommended or optional.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] ITU-T Recommendation H.264 (2003): "Advanced video coding for generic audiovisual services" and ISO/IEC 14496-10 (2004): "Information technology - Coding of audio-visual objects - Part 10: Advanced Video Coding".
- [2] ISO/IEC 14496-3 (2001): "Information technology - Coding of audio-visual objects - Part 3: Audio".
- [3] ISO/IEC 14496-3 AMD-1 (2003): "Bandwidth Extension".
- [4] IETF RFC 3550: "RTP, A Transport Protocol for Real Time Applications".
- [5] IETF RFC 3016: "RTP Payload Format for MPEG-4 Audio/Visual Streams".
- [6] IETF RFC 3640: "RTP Payload Format for Transport of MPEG-4 Elementary Streams".
- [7] IETF RFC 3984: "RTP Payload Format for H.264 Video".
- [8] IETF RFC 2250: "RTP Payload Format for MPEG1/MPEG2 Video".
- [9] ETSI TS 101 154: "Digital Video Broadcasting (DVB); Implementation guidelines for the use of Video and Audio Coding in Broadcasting Applications based on the MPEG-2 Transport Stream".
- [10] EBU Recommendation R68: "Alignment level in digital audio production equipment and in digital audio recorders".
- [11] ETSI TS 126 234: "Universal Mobile Telecommunications System (UMTS); Transparent end-to-end streaming service; Protocols and codecs (3GPP TS 26.234 Release 5)".
- [12] ITU-R Recommendation BT.709: "Parameter values for the HDTV* standards for production and international programme exchange".
- [13] ETSI TS 102 154: "Digital Video Broadcasting (DVB); Implementation guidelines for the use of Video and Audio Coding in Contribution and Primary Distribution Applications based on the MPEG-2 Transport Stream".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

IP-IRD: Integrated Receiver-Decoder for DVB services delivered over IP

Capability A IP-IRD: IP-IRD that is capable of decoding and displaying pictures using H.264/AVC encoded bitstreams conforming to Baseline Profile at processing and memory limits less than or equal to those of Level 1b with a modified MaxBR value being equal to 128 and with a modified MaxCPB value being equal to 350 and with constraint_set1_flag being equal to 1

Capability B IP-IRD: IP-IRD that is capable of decoding and displaying pictures using H.264/AVC encoded bitstreams conforming to Baseline Profile at processing and memory limits less than or equal to those of Levels 1b to 1.2 with constraint_set1_flag being equal to 1

Capability C IP-IRD: IP-IRD that is capable of decoding and displaying pictures from H.264/AVC encoded bitstreams conforming to Baseline Profile at processing and memory limits less than or equal to those of Levels 1b to 2 with constraint_set1_flag being equal to 1

Capability D IP-IRD: IP-IRD that is capable of decoding and displaying pictures from H.264/AVC encoded bitstreams conforming to Main Profile at processing and memory limits less than or equal to those of Levels 1b to 3

Capability E IP-IRD: IP-IRD that is capable of decoding and displaying pictures from H.264/AVC encoded bitstreams conforming to Main Profile at processing and memory limits less than or equal to those of Levels 1b to 4

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AAC LC	Advanced Audio Coding Low Complexity
AAC	Advanced Audio Coding
AOT	Audio Object Type
ASO	arbitrary slice ordering
CABAC	context-adaptive binary arithmetic coding
CIF	Common Interchange Format
DRC	Dynamic Range Control
DVB	Digital Video Broadcasting
FMO	flexible macroblock ordering
H.264/AVC	H.264/Advanced Video Coding
HDTV	High Definition Television
HE AAC	High Efficiency Advanced Audio Coding
HE	High Efficiency
IP	Internet Protocol
IRD	Integrated Receiver-Decoder
LATM	Lowoverhead Audio Transport Multiplex
LC	Low Complexity
MPEG	Moving Pictures Experts Group (ISO/IEC JTC 1/SC 29/WG 11)
NAL	Network Abstraction Layer
NTP	Network Time Protocol
QCIF	Quarter Common Interchange Format
QMF	Quadrature Mirror Filter
RTP	Real Time Protocol
SBR	Spectral Band Replication
TCP	Transmission Control Protocol
UDP	User Datagram Protocol
VCEG	Video Coding Experts Group (ITU-T SG16 Q.6: Video Coding)
VCL	Video Coding Layer
VUI	Video Usability Information

4 Systems layer

4.1 Transport over IP Networks

When H.264/AVC and High Efficiency AAC data are transported over IP networks, RTP, a Transport Protocol for Real-Time Applications as defined in RFC 3550 [4], shall be used. This clause describes the guidelines and requirements for transport of H.264/AVC and High Efficiency AAC in RTP packets for delivery over IP networks and for decoding of such RTP packets in the IP-IRD.

While the general RTP specification is defined in RFC 3550 [4], RTP payload formats are codec specific and defined in separate RFCs. In clause 4.2 guidelines and requirements for transport of H.264/AVC and High Efficiency AAC in RTP packets are defined. Clause 4.3 discusses some issues related to RTP usage.

The IP-IRD design should be made under the assumption that any legal structure as permitted RTP packets may occur, even if presently reserved or unused. *To allow full upward compatibility with future enhanced versions, a DVB IP-IRD shall be able to skip over data structures which are currently "reserved", or which correspond to functions not implemented by the IP-IRD. For example, an IP-IRD shall allow the presence of unknown MIME format parameters for RFC payloads, while ignoring its meaning.*

4.2 RTP payload formats

For transport over IP networks, H.264/AVC data and High Efficiency AAC data are contained in RTP packets as defined in RFC 3550 [4]. The specific formats of the RTP packets are defined in clause 4.2.1 for H.264/AVC and in clause 4.2.2 for High Efficiency AAC.

4.2.1 RTP packetization of H.264/AVC

For transport over IP, the H.264/AVC data is packetized in RTP packets using RFC 3984 [7].

Encoding: When transporting H.264/AVC video over IP, RFC 3984 [7] shall be used.

Decoding: Each IP-IRD shall be able to receive and decode RTP packets with H.264/AVC data as defined in RFC 3984 [7].

4.2.2 RTP packetization of High Efficiency AAC

Encoding: When transporting High Efficiency AAC audio over IP, either RFC 3016 [5] or RFC 3640 [6] shall be used.

Decoding: Each IP-IRD shall support both RFC 3016 [5] and RFC 3640 [6] to receive and decode High Efficiency AAC data contained in RTP packets.

5 Video

This clause describes the guidelines for H.264/AVC video encoding and for decoding of H.264/AVC data in the IP-IRD. The bitstreams resulting from H.264/AVC encoding shall conform to the corresponding profile specification in [1]. The IP-IRD shall allow any legal structure as permitted by the specifications in [1] in the encoded video stream even if presently "reserved" or "unused".

To allow full compliance to the specifications in [1] and upward compatibility with future enhanced versions, an IP-IRD shall be able to skip over data structures which are currently "reserved", or which correspond to functions not implemented by the IP-IRD.

5.1 Profile and Level

Encoding: *Capability A Bitstreams shall comply with the restrictions described in ITU-T Recommendation H.264 | ISO/IEC 14496-10 [1] for Level 1b of the Baseline Profile with constraint_set1_flag being equal to 1. In addition, in applications where decoders support the Main or the High Profile, the bitstream may optionally comply with these profiles.*

Capability B Bitstreams shall comply with the restrictions described in ITU-T Recommendation H.264 | ISO/IEC 14496-10 [1] for Level 1.2 of the Baseline Profile with constraint_set1_flag being equal to 1. In addition, in applications where decoders support the Main or the High Profile, the bitstream may optionally comply with these profiles.

Capability C Bitstreams shall comply with the restrictions described in ITU-T Recommendation H.264 | ISO/IEC 14496-10 [1] for Level 2 of the Baseline Profile with constraint_set1_flag being equal to 1. In addition, in applications where decoders support the Main or the High Profile, the bitstream may optionally comply with these profiles.

Capability D Bitstreams shall comply with the restrictions described in ITU-T Recommendation H.264 | ISO/IEC 14496-10 [1] for Level 3 of the Main Profile. In addition, in applications where decoders support the High Profile, the bitstream may optionally comply with the High Profile.

Capability E Bitstreams shall comply with the restrictions described in ITU-T Recommendation H.264 | ISO/IEC 14496-10 [1] for Level 4 of the High Profile.

Decoding: *Capability A IP-IRDS shall be capable of decoding and displaying pictures using Capability A Bitstreams. Support of the Main Profile and other profiles beyond Baseline Profile with constraint_set1_flag equal to 1 is optional. Support of levels beyond Level 1b is optional.*

Capability B IP-IRDS shall be capable of decoding and displaying pictures using Capability A or B Bitstreams. Support of the Main Profile and other profiles beyond Baseline Profile with constraint_set1_flag equal to 1 is optional. Support of levels beyond Level 1.2 is optional.

Capability C IP-IRDS shall be capable of decoding and displaying pictures using Capability A, B or C Bitstreams. Support of the Main Profile and other profiles beyond Baseline Profile with constraint_set1_flag equal to 1 is optional. Support of levels beyond Level 2 is optional.

Capability D IP-IRDS shall be capable of decoding and displaying pictures using Capability A, B, C or D Bitstreams. Support of the High Profile and other profiles beyond Main Profile is optional. Support of levels beyond Level 3 is optional.

Capability E IP-IRDS shall be capable of decoding and displaying pictures using Capability A, B, C, D or E Bitstreams. Support of profiles beyond High Profile is optional. Support of levels beyond Level 4 is optional.

If an IP-IRD encounters an extension which it cannot decode, it shall discard the following data until the next start code prefix (to allow backward compatible extensions to be added in the future)

5.2 Frame Rate

Encoding: To encode video, each frame rate allowed by the applied H.264/AVC Profile and Level may be used. The maximum time distance between two pictures should not exceed 0,7 s.

Decoding: *Each IP-IRD shall support each frame rate allowed by the H.264/AVC Profile and Level that is applied for decoding in the IP-IRD. This includes variable frame rate.*

5.3 Aspect Ratio

Encoding: To encode video, each sample and picture aspect ratio allowed by the applied H.264/AVC Profile and Level may be used. It is recommended to avoid very large or very small picture aspect ratios and that those picture aspect ratios specified in [9] are being used.

Decoding: *Each IP-IRD shall support each sample and picture aspect ratio permitted by the applied H.264/AVC Profile and Level.*

5.4 Luminance resolution

Encoding: To encode video, each luminance resolution allowed by the applied H.264/AVC Profile and Level may be used.

Decoding: *Each IP-IRD shall support each luminance resolution permitted by the relevant H.264/AVC Profile and Level.*

5.5 Chromaticity

Encoding: It is recommended to specify the chromaticity coordinates of the colour primaries of the source using the syntax elements `colour_primaries`, `transfer_characteristics`, and `matrix_coefficients` in the VUI. ITU-R Recommendation BT.709 [12] is recommended as the preferred colour primaries and transfer characteristics.

Decoding: Each IRD shall be capable to decode any allowed values of `colour_primaries`, `transfer_characteristics`, and `matrix_coefficients`. It is recommended that appropriate processing be included for the display of pictures.

5.6 Chroma

Encoding: It is recommended to specify the chroma locations using the syntax elements `chroma_sample_loc_type_top_field` and `chroma_sample_loc_type_bottom_field` in the VUI. It is recommended to use chroma sample type 0.

Decoding: *Each IRD shall be capable to decode any allowed values of `chroma_sample_loc_type_top_field` and `chroma_sample_loc_type_bottom_field`.* It is recommended that appropriate processing be included for the display of pictures.

5.7 Parameter Constraints

Encoding: For broadcast applications it is recommended that sequence and picture parameter sets are sent together with a random access point (e.g. an IDR picture) to be encoded at least once every 500 milliseconds. For multicast or streaming applications a maximum interval of 5 s between random access points should not be exceeded. When changing sequence or picture parameter sets, it is recommended to use different values for `seq_parameter_set_id` or `pic_parameter_set_id` as the previous active ones.

NOTE 1: Increasing the frequency of sequence and picture parameter sets and IDR pictures will reduce channel hopping time but will reduce the efficiency of the video compression.

NOTE 2: Having a regular interval between IDR pictures may improve trick mode performance, but may reduce the efficiency of the video compression.

6 Audio

This clause describes the guidelines for encoding with the MPEG-4 AAC profile or MPEG-4 High Efficiency Audio Profile in DVB IP Network bit-streams, and for decoding this bit-stream in the IP-IRD.

The recommended level for reference tones for transmission is 18 dB below clipping level, in accordance with EBU Recommendation R68 [10].

For High Efficiency AAC, the audio encoding shall conform to the requirements defined in ISO/IEC 14496-3 [2] and ISO/IEC 14496-3/AMD-1 [3] for the MPEG-4 Audio High Efficiency Profile.

The IP-IRD design should be made under the assumption that any legal structure as permitted by ISO/IEC 14496-3 [2] or ISO/IEC 14496-3/AMD-1 [3] may occur in the broadcast stream even if presently reserved or unused. *To allow full compliance to ISO/IEC 14496-3 [2] and upward compatibility with future enhanced versions, a DVB IP-IRD shall be able to skip over data structures which are currently "reserved", or which correspond to functions not implemented by the IP-IRD. For example, an IP-IRD which is not designed to make use of the extension payload shall skip over that portion of the bit-stream.*

The following clauses are based on ISO/IEC 14496-3 [2] (MPEG-4 audio) and ISO/IEC 14496-3/AMD-1 [3] (Bandwidth Extension).

6.1 Audio mode

Encoding: The audio shall be encoded in mono or 2-channel-stereo according to the functionality defined in the High Efficiency AAC Profile Level 2 or in multi-channel according to the functionality defined in the High Efficiency AAC Profile Level 4, as specified in ISO/IEC 14496-3 [2] and ISO/IEC 14496-3/AMD-1 [3]. A simulcast of a mono/stereo signal together with the multi-channel signal is optional.

Decoding: *Each IP-IRD shall be capable of decoding in mono or 2-channel-stereo of the functionality defined in the High Efficiency AAC Profile Level 2, as specified in ISO/IEC 14496-3 [2] and ISO/IEC 14496-3/AMD-1 [3].* The support of multi-channel decoding in an IP-IRD is optional.

6.2 Profiles

Encoding: The encoder shall use either the AAC Profile or the High Efficiency AAC Profile. Use of the High Efficiency AAC Profile is recommended.

Decoding: *IP-IRDs shall be capable of decoding the High Efficiency AAC Profile.*

6.3 Bit rate

Encoding: Audio may be encoded at any bit rate allowed by the applied profile and selected Level.

Decoding: *Each IP-IRD shall support any bit rate allowed by the High Efficiency AAC Profile and selected Level.*

6.4 Sampling frequency

Encoding: Any of the audio sampling rates of the High Efficiency AAC Profile Level 2 may be used for mono and 2-channel stereo and of the High Efficiency AAC Profile Level 4 for multichannel audio.

Decoding: *Each IP-IRD shall support each audio sampling rate permitted by the High Efficiency AAC Profile Level 2 for mono and 2-channel stereo and of the High Efficiency AAC Profile Level 4 for multichannel audio.*

6.5 Dynamic Range Control

Encoding: The encoder may use the MPEG-4 AAC Dynamic Range Control (DRC) tool.

Decoding: *Each IP-IRD shall support the MPEG-4 AAC Dynamic Range Control (DRC) tool.*

6.6 Matrix Downmix

Decoding: *Each IP-IRD shall support the matrix downmix as defined in MPEG-4.*

Annex A (informative): Description of the Implementation Guidelines

A.1 Introduction

These guidelines specify how advanced audio and video compression algorithms may be used for DVB services delivered over IP. A wide range of potential applications are covered, ranging from low-resolution services delivered to small portable receivers all the way up to HDTV services.

These guidelines apply to all DVB services directly over IP without the use of an intermediate MPEG-2 Transport Stream. An example of this type of DVB service is DVB-H, using multi-protocol encapsulation. The corresponding guidelines for audio-visual coding for DVB services which use an MPEG-2 Transport Stream are given in TS 101 154 [9] for distribution services and in TS 102 154 [13] for contribution services. Examples of Transport Stream based DVB service are the familiar DVB-S, DVB-C and DVB-T transmissions.

The 'systems layer' of these guidelines addresses issues related to transport and synchronization of advanced audio and video. The systems layer is based on the use of RTP, a generic Transport Protocol for Real-Time Applications as defined in RFC 3550 [4]. Use of RTP requires the definition of payload formats that are specific for each content format, and so the system layer defines which RTP payload formats to use for transport of advanced audio and video, as well as applicable constraints for that. Further information on the systems layer is given in clause A.2.


The video coding uses the H.264/AVC standard. The work began in ITU-T SG16 Q.6 (VCEG) under the working name H.26L in 1999. VCEG and MPEG then agreed in 2001 to form a Joint Video Team to finalize the standard. Within ITU-T the standard is published as H.264, whilst in ISO/IEC it is published as Part 10 of the MPEG-4 specification, 14496-10. The first version was standardized in Spring 2003 and an extension was standardized in Autumn 2004. As with all ITU-T and ISO/IEC algorithms since H.261 and MPEG-1, the architecture is based on a motion-compensated block transform. Like MPEG-1 and MPEG-2, H.264/AVC has intra-coded pictures, predictively coded pictures and bi-directionally coded pictures (known as I-, P- and B-frames in MPEG-1 and MPEG-2). However, H.264/AVC has smaller, dynamically selected block sizes to allow the encoder to represent both large and small moving objects more efficiently. It also provides multiple reference frames to allow the encoder to find the best match over several frames and it supports greater precision in the representation of motion vectors. The variable-length coding used to compress the picture and motion information is context-adaptive to give greater efficiency. For further information on the video codec see clause A.3.

The advanced audio coding uses the MPEG-4 High Efficiency AAC Profile. This is derived from the MPEG-2 Advanced Audio Coding (AAC), first published in 1997. MPEG-4 AAC is closely based on MPEG-2 AAC but includes some further enhancements such as perceptual noise substitution to give better performance at low bit rates. The new MPEG-4 High Efficiency AAC Profile adds spectral band replication, to allow more efficient representation of high-frequency information by using the lower harmonic as a reference. For further information on the audio codec see clause A.4.

A.2 Systems

A.2.1 Protocol Stack

For delivery of DVB Services over IP-based networks a protocol stack is defined in a suite of DVB specifications. The systems part of the guidelines defined in the present document addresses only the part of the protocol stack that is related to the transport and synchronization of HE AAC audio and H.264/AVC video. This part of the DVB-IP protocol stack is given in figure A.1. For completeness, RTCP and RTSP are also included, as they are relevant for RTP usage, though there are no specific guidelines for RTCP and RTSP defined in the present document.

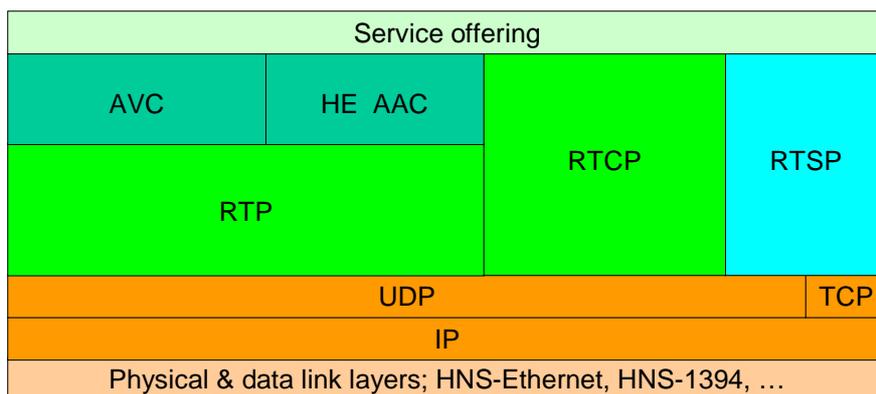

NOTE: Guidelines for RTCP and RTSP usage are beyond the scope of the present document.

Figure A.1: The part of the DVB-IP protocol stack relevant for the transport of advanced audio and video

A.2.2 Transport of High Efficiency AAC audio

The transport of HE AAC audio and H.264/AVC video is based on RTP, a generic Transport Protocol for Real-Time Applications as defined in RFC 3550 [4]. RFC 3550 [4] defines the elements of the RTP transport protocol that are independent of the data that is transported, while separate RFCs define how to use RTP for transport of specific data such as audio and video coded. Both for HE AAC audio and for H.264/AVC video RTP payload formats are (being) defined.

To transport HE AAC, both RFC 3016 [5] and RFC 3640 [6] can be used. RFC 3016 offers compatibility with AAC services that comply with Release 5 of 3GPP specification for Packet Switched Streaming Services [11]. Note that these 3GPP services use AAC only and not the High Efficiency extension with SBR. RFC 3016 [5] allows for the carriage of multiple AAC frames in one RTP packet by applying the Low overhead Audio Transport Multiplex (LATM) framing structure within the RTP payload, as defined in ISO/IEC 14496-3 [2]. RFC 3016 [5] does also allow for carriage of HE AAC, but the presence of SBR data can only be signalled implicitly, that is a decoder can only detect carriage of HE AAC data by identifying SBR data when parsing the extension payload of AAC frames. Higher level signalling is not possible with RFC 3016 [5].

Next to RFC 3016 [5], also RFC 3640 [6] can be used to transport HE AAC. RFC 3640 [6] provides a "generic" solution for transport of MPEG-4 data. RFC 3640 [6] supports both, implicit signalling (similarly as with RFC 3016 [5]) as well as explicit signalling by means of conveying the AudioSpecificConfig() as the required MIME parameter "config", as defined in RFC 3640 [6]. The framing structure defined in RFC 3640 [6] does support carriage of multiple AAC frames in one RTP packet with optional interleaving to improve error resiliency in packet loss. For example, if each RTP packet carries three AAC frames, then with interleaving the RTP packets may carry the AAC frames as given in figure A.2.

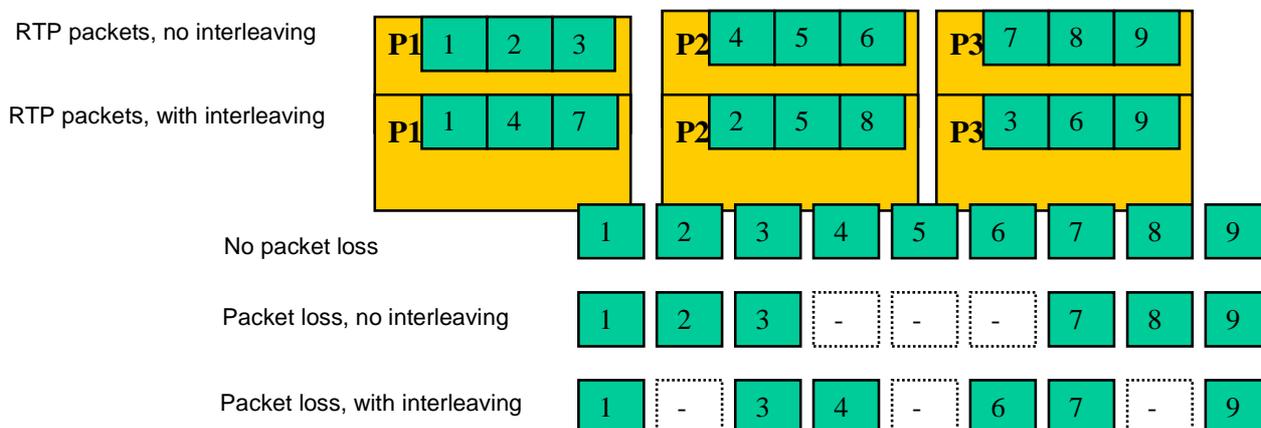


Figure A.2: Interleaving of AAC frames

Without interleaving, then RTP packet P1 carries the AAC frames 1, 2 and 3, while packet P2 and P3 carry the frames 4, 5 and 6 and the frames 7, 8 and 9, respectively. When P2 gets lost, then AAC frames 4, 5 and 6 get lost, and hence the decoder needs to reconstruct three missing AAC frames that are contiguous. In this example, interleaving is applied so that P1 carries 1, 4 and 7, P2 carries 2, 5 and 8, and P3 carries 3, 6 and 9. When P2 gets lost in this case, again three frames get lost, but due to the interleaving, the frames that are immediately adjacent to each lost frame are received and can be used by the decoder to reconstruct the lost frames, thereby exploiting the typical temporal redundancy between adjacent frames to improve the perceptual performance of the receiver.

A.2.3 Transport of H.264/AVC video

To transport H.264/VC video data, RFC 3984 [7] is used. The H.264/AVC specification [1] distinguishes conceptually between a Video Coding Layer (VCL), and a Network Abstraction Layer (NAL). The VCL contains the video features of the codec (transform, quantization, motion compensation, loop filter, etc.). The NAL layer formats the VCL data into Network Abstraction Layer units (NAL units) suitable for transport across the applied network or storage medium. A NAL unit consists of a one-byte header and the payload; the header indicates the type of the NAL unit and other information, such as the (potential) presence of bit errors or syntax violations in the NAL unit payload, and information regarding the relative importance of the NAL unit for the decoding process. RFC 3984 [7] specifies how to carry NAL units in RTP packets.

A.2.4 Synchronization of content delivered over IP

RTP also provides tools for synchronization. For that purpose, an RTP time stamp is present in the RTP header; the RTP time stamps are used to determine the presentation time of the audio and video access units. The method to synchronize content transported in RTP packets is described RFC 3550 [4]. By means of figure A.3 a simplified summary is given below:

- a) RTP time stamps convey the sampling instant of access units at the encoder. The RTP time stamp is expressed in units of a clock, which is required to increase monotonically and linearly. The frequency of this clock is specified for each payload format, either explicitly or by default. Often, but not necessarily, this clock is the sampling clock. In figure A.3, $TSa(i)$ and $TSv(j)$ are RTP time stamps that are used to present the access units at the correct timing at the receiver; this requires that the receiver reconstructs the video clock and audio clock with the same mutual offset in time as at the sender.
- b) When transporting RTP packets, the RTCP Control Protocol, also defined in RFC 3550 [4], is used for purposes such as monitoring and control. RTCP data is carried in RTCP packets. There are several RTCP packet types, one of which is the Sender Report (SR) RTCP packet type. Each RTCP SR packet contains an RTP time stamp and an NTP time stamp; both time stamps correspond to the same instant in time. However, the RTP time stamp is expressed in the same units as RTP time stamps in data packets, while the NTP time stamp is expressed in 'wallclock' time; see section 4 of RFC 3550 [4]. In figure A.3, $NTPa(k)$ and $NTPv(n)$ are the NTP time stamps of the audio and video RTCP packets. $At(k)$ and $Vt(n)$ are the values of the audio and video clock at the same instant in time as $NTPa(k)$ and $NTPv(n)$, respectively. Each $SR(k)$ for audio provides $NTPa(k)$ as NTP time stamp and $At(k)$ as RTP time stamp. Similarly, each $SR(n)$ for video provides $NTPv(n)$ as the NTP time stamps and $Vt(n)$ as RTP time stamp.

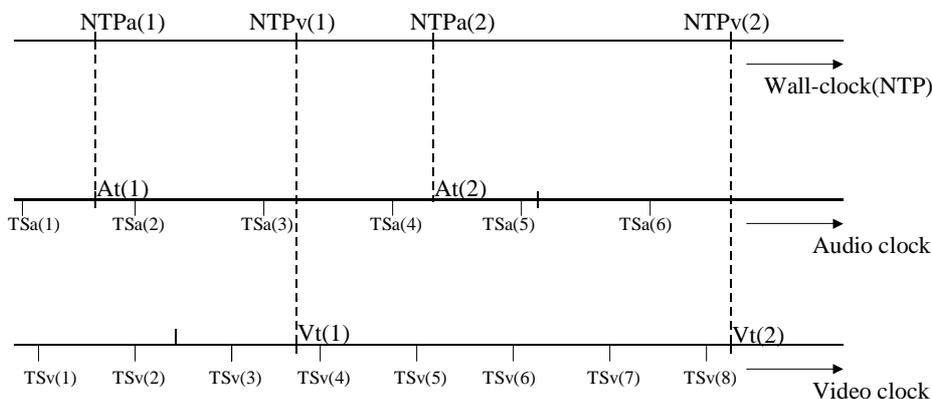


Figure A.3: RTP tools for synchronization

- c) Synchronized playback of streams is only possible if the streams use the same wall-clock to encode NTP values in SR packets. If the same wall-clock is used, receivers can achieve synchronization by using the correspondence between RTP and NTP time stamps. To synchronize an audio and a video stream, one needs to receive an RTCP SR packet relating to the audio stream, and an RTCP SR packet relating to the video stream. These SR packets provide a pair of NTP timestamps and their corresponding RTP timestamps that is used to align the media. For example, in figure A.3, $[NTP_v(k) - NTP_a(n)]$ represents the offset in time between $Vt(k)$ and $At(n)$, expressed in wallclock time.
- d) The time between sending subsequent RTCP SR packets may vary; the default RTCP timing rules suggest to send an RTCP SR packet every 5 s. This means that upon entering a streaming session there may be an initial delay - on average a 2,5 s duration if the default RTCP timing rules are used - when the receiver does not yet have the necessary information to perform inter-stream synchronization.

A.2.5 Synchronization with content delivered over MPEG-2 TS

Applications may require synchronization of audiovisual content delivered over IP with content delivered over an MPEG-2 TS. For example, a broadcaster may wish to provide audio in another language as part of a broadcast program, but using transport over IP instead of transporting this additional audio stream over the same MPEG-2 TS as the broadcast program.

Synchronization of a stream delivered over IP with a broadcast program requires that the receiver knows the timing relationship between the RTP time stamps of the stream that is delivered over IP and the MPEG-2 time stamps of the broadcast program. It is beyond the scope of the present document how to convey such timing relationship.

A.2.6 Service discovery

For discovery of DVB services over IP it is referred to the IPI specification for low and mid level (PSI / SI equivalent) functionality and to the GBS specification for higher level (SI / metadata related, except structures and containers) functionality.

A.2.7 Linking to applications

Audio and video delivered over IP can be presented in an MHP application by means of including appropriate URLs.

A.2.8 Capability exchange

By means of capability exchange protocols the sender and receiver can communicate whether the receiver has A, B, C, D or E IP-IRD capabilities for H.264/AVC decoding. In addition, it can also be communicated whether the receiver has multi-channel or only mono/stereo capabilities for High Efficiency AAC decoding. For capability exchange protocols it is referred to the IPI specification.

A.3 Video

A.3.1 Video overview

The part of the H.264/AVC standard referenced in the present document specifies the coding of video (in 4:2:0 chroma format) that contains either progressive or interlaced frames, which may be mixed together in the same sequence. Generally, a frame of video contains two interleaved fields, the top and the bottom field. The two fields of an interlaced frame, which are separated in time by a field period (half the time of a frame period), may be coded separately as two fields or together as a frame. A progressive frame should always be coded as a single frame; however, it can still be considered to consist of two fields at the same instant of time. H.264/AVC covers a Video Coding Layer (VCL), which is designed to efficiently represent the video content, and a Network Abstraction Layer (NAL), which formats the VCL representation of the video and provides header information in a manner appropriate for conveyance by a variety of transport layers or storage media. The structure of H.264/AVC video encoder is shown in figure A.4.

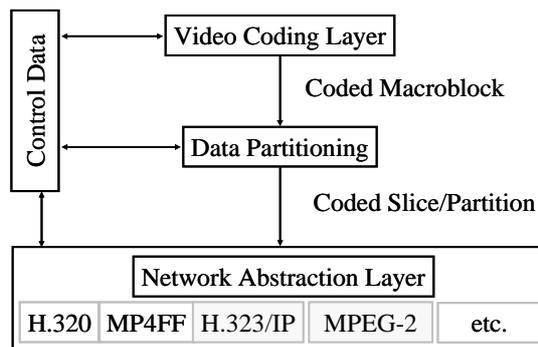


Figure A.4: Structure of H.264/AVC video encoder

A.3.2 Network Abstraction Layer

The Video Coding Layer (VCL), which is described below, is specified to efficiently represent the content of the video data. The Network Abstraction Layer (NAL) is specified to format that data and provide header information in a manner appropriate for conveyance by the transport layers or storage media. All data are contained in NAL units, each of which contains an integer number of bytes. A NAL unit specifies a generic format for use in both packet-oriented and bitstream systems. The format of NAL units for both packet-oriented transport and bitstream is identical except that each NAL unit can be preceded by a start code prefix in a bitstream-oriented transport layer. The NAL facilitates the ability to map H.264/AVC VCL data to transport layers such as

- RTP/IP for any kind of real-time wire-line and wireless Internet services (conversational and streaming);
- File formats, e.g. ISO MP4 for storage and MMS;
- H.32X for wireline and wireless conversational services;
- MPEG-2 systems for broadcasting services, etc.

The full degree of customization of the video content to fit the needs of each particular application was outside the scope of the H.264/AVC standardization effort, but the design of the NAL anticipates a variety of such mappings.

One key concept of the NAL is parameter sets. A parameter set is supposed to contain information that is expected to rarely change over time. There are two types of parameter sets:

- sequence parameter sets, which apply to a series of consecutive coded video pictures; and
- picture parameter sets, which apply to the decoding of one or more individual pictures

The sequence and picture parameter set mechanism decouples the transmission of infrequently changing information from the transmission of coded representations of the values of the samples in the video pictures. Each VCL NAL unit contains an identifier that refers to the content of the relevant picture parameter set, and each picture parameter set contains an identifier that refers to the content of the relevant sequence parameter set. In this manner, a small amount of data (the identifier) can be used to refer to a larger amount of information (the parameter set) without repeating that information within each VCL NAL unit.

A.3.3 Video Coding Layer

The video coding layer of H.264/AVC is similar in spirit to other standards such as MPEG-2 Video. It consists of a hybrid of temporal and spatial prediction in conjunction with transform coding. Figure A.5 shows a block diagram of the video coding layer for a macroblock, which consists of a 16×16 luma block and two 8×8 chroma blocks.

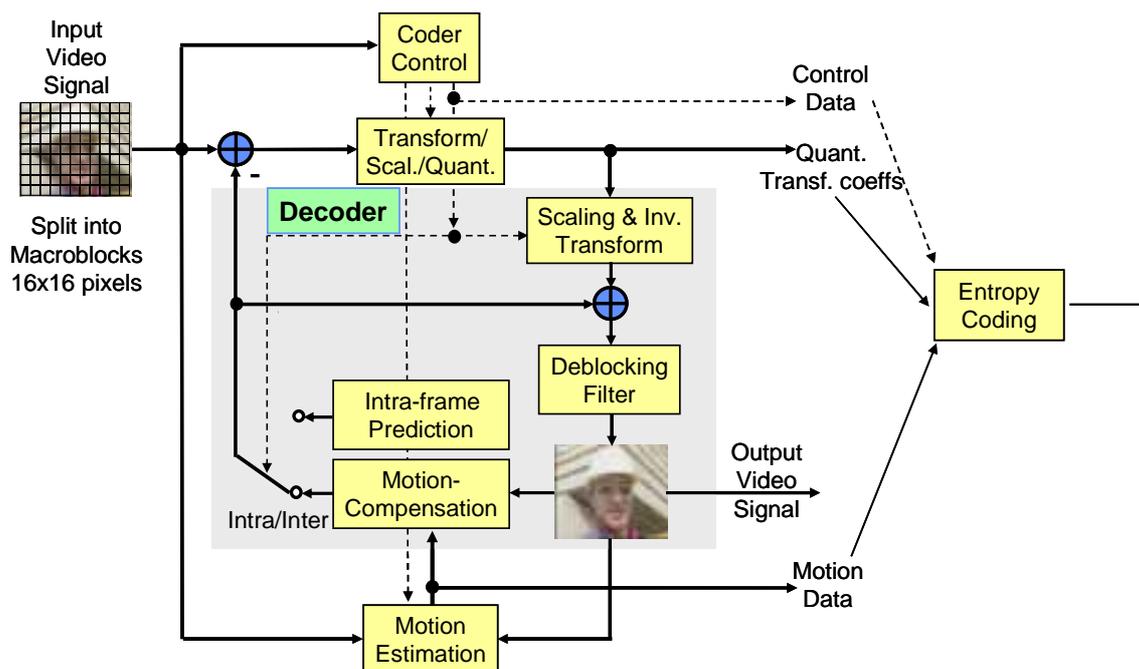


Figure A.5: Basic coding structure for H.264/AVC for a macroblock

In summary, the picture is split into macroblocks. The first picture of a sequence or a random access point is typically coded in Intra, i.e., without using other information than the information contained in the picture itself. Each sample of a luma or chroma block of a macroblock in such an Intra frame is predicted using spatially neighbouring samples of previously coded blocks. The encoding process is to choose which and how neighbouring samples are used for Intra prediction which is simultaneously conducted at encoder and decoder using the transmitted Intra prediction side information.

For all remaining pictures of a sequence or between random access points, typically Inter coding is utilized. Inter coding employs prediction (motion compensation) from other previously decoded pictures. The encoding process for Inter prediction (motion estimation) consists of choosing motion data comprising the reference picture and a spatial displacement that is applied to all samples of the macroblock. The motion data which are transmitted as side information are used by encoder and decoder to simultaneously provide the inter prediction signal.

The residual of the prediction (either Intra or Inter) which is the difference between the original and the predicted macroblock is transformed. The transform coefficients are scaled and quantized. The quantized transform coefficients are entropy coded and transmitted together with the side information for either Intra-frame or Inter-frame prediction.

The encoder contains the decoder to conduct prediction for the next blocks or next picture. Therefore, the quantized transform coefficients are inverse scaled and inverse transformed in the same way as at the decoder side resulting in the decoded prediction residual. The decoded prediction residual is added to the prediction. The result of that addition is fed into a deblocking filter which provides the decoded video as its output.

The new features of H.264/AVC compared to MPEG-2 Video are listed as follows: variable block-size motion compensation with small block sizes from 16×16 luma samples down to 4×4 luma samples per block, quarter-sample-accurate motion compensation, motion vectors pointing over picture boundaries, multiple reference picture motion compensation, decoupling of referencing order from display order, decoupling of picture representation methods from picture referencing capability, weighted prediction, improved "skipped" and "direct" motion inference, directional spatial prediction for intra coding, in-the-loop deblocking filtering, 4×4 block-size transform, hierarchical block transform, short word-length/exact-match inverse transform, context-adaptive binary arithmetic entropy coding, flexible slice size, flexible macroblock ordering (FMO), arbitrary slice ordering (ASO), redundant pictures, data partitioning, SP/SI synchronization/switching pictures.

A.3.4 Explanation of H.264/AVC Profiles and Levels

Profiles and levels specify conformance points. These conformance points are designed to facilitate interoperability between various applications of the standard that have similar functional requirements. A *profile* defines a set of coding tools or algorithms that can be used in generating a conforming bit-stream, whereas a *level* places constraints on certain key parameters of the bitstream. All decoders conforming to a specific profile must support all features in that profile. Encoders are not required to make use of any particular set of features supported in a profile but have to provide conforming bitstreams, i.e. bitstreams that can be decoded by conforming decoders.

The first versions of H.264/AVC was published in May 2003 by ITU-T as Recommendation H.264 and by ISO/IEC as 14496-10. Three Profiles define sub-sets of the syntax and semantics:

- Baseline Profile
- Extended Profile
- Main Profile

The Fidelity Range Extensions Amendment of H.264/AVC, agreed in July 2004, added some additional tools and defined four new Profiles (of which only the first is relevant for the present document):

- High Profile
- High 10 Profile
- High 4:2:2 Profile
- High 4:4:4 Profile

The relationship between High Profile and the original three Profiles, in terms of the major tools from the toolbox that may be used, is illustrated by figure A.6.

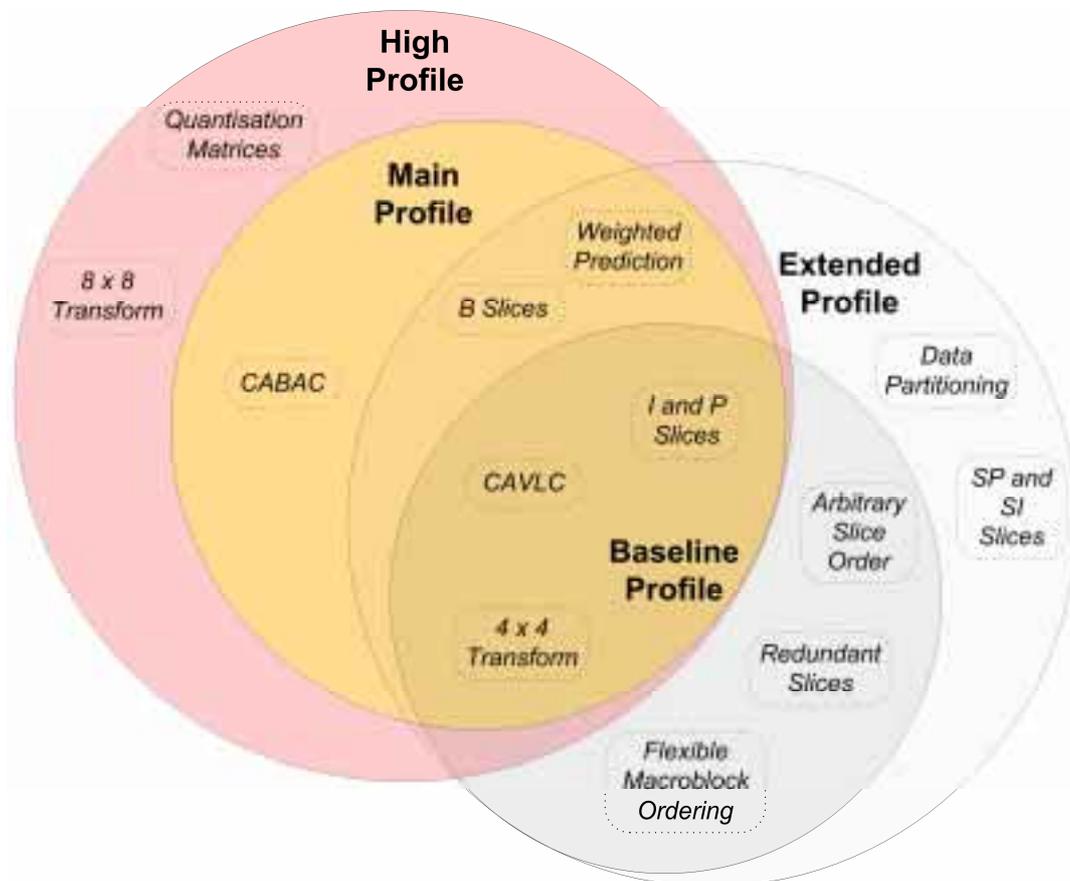


Figure A.6: Relationship between High Profile and the three Original Profiles

The present document only uses Baseline, Main, and High Profile. These contain the following features:

Baseline Profile:

The Baseline Profile contains the following restricted set of coding features.

- I and P Slices: Intra coding of macroblocks through the use of I slices; P slices add the option of Inter coding using one temporal prediction signal
- 4×4 Transform: The prediction residual is transformed and quantized using 4×4 blocks.
- CAVLC: The symbols of the coder (e.g. quantized transform coefficients, intra predictors, motion vectors) are entropy-coded using a variable length code.
- FMO: This feature of Baseline allowing arbitrary sampling of the Macroblocks within a slice is not used in this specification. The main reason is to achieve decodability by Main or High profile decoders, which is signalled by `constrained_set1_flag` being equal to 1.
- ASO: This feature of Baseline allowing arbitrary order of slices within a picture is not used in this specification. The main reason is to achieve decodability by Main or High profile decoders, which is signalled by `constrained_set1_flag` being equal to 1.
- Redundant Slices: This feature of Baseline allowing transmission of redundant slices that approximates the primary slice is not used in this specification. The main reason is to achieve decodability by Main or High profile decoders, which is signalled by `constrained_set1_flag` being equal to 1.

Main Profile:

Except for FMO, ASO, and Redundant Slices, Main Profile contains all features of Baseline Profile and the following additional ones.

- B Slices: Enhanced Inter coding using up to two temporal prediction signals that are superimposed for the predicted block.
- Weighted Prediction: Allowing the temporal prediction signal in P and B slices to be weighted by a factor.
- CABAC: An alternative entropy coding to CAVLC providing higher coding efficiency at higher complexity, which is based on context-adaptive binary arithmetic coding.

High Profile:

High Profile contains all features of Main Profile and the following additional ones.

- 8×8 Transform: In addition to the 4×4 Transform, the encoder can choose to code the prediction residual using a, 8×8 Transform.
- Quantization Matrix: The encoder can choose to apply weights to the transform coefficients, which provides a weighted fidelity of reproduction for these.

A.3.5 Summary of key tools and parameter ranges for Capability A to E IRDs

The following table summarizes the assignment of profiles and levels to the five IP-IRDs that are specified in the present document.

Capability	Mandatory Profile	Optional Profile	Additional Constraint on Profile	Level	Max frame size [macroblocks]	Max frame @ max frame size [f/s]	Max bit rate [kbit/s]
A	Baseline	Main or High	constraint_set1_flag = 1	1b	99 (QCIF = 176 × 144)	15	128
B	Baseline	Main or High	constraint_set1_flag = 1	1.2	396 (CIF = 352 × 288)	15,2	384
C	Baseline	Main or High	constraint_set1_flag = 1	2	396 (CIF = 352 × 288)	30	2 000
D	Main	High	none	3	1 620 (625 SD = 720 × 576)	25	10 000
E	High	-	none	4	8 192 (2 × 1KHD = 2 048 × 1 024)	15	20 000

The following should be noted.

IP-IRDs with Capability A, B, and C specify the Baseline profile with the additional constraint that constraint_set1_flag shall be set equal to 1 making these bitstreams also decodable by Main or High profile decoders. The reason for this additional constraint is that our investigations have shown that the features that are contained in Baseline but are not contained in Main profile (FMO, ASO, and redundant pictures) and are disabled by setting constraint_set1_flag equal to 1 do not provide any benefit at the packet error rates envisioned to be typical for the applications in which the present document will be used. IP-IRDs with capability D shall be conforming to Main profile without any additional constraints. IP-IRDs with capability E shall be conforming to Main profile without any additional constraints.

Because of the additional constraint and the requirements in H.264/AVC, IP-IRDs labelled with a particular capability Y are capable of decoding and displaying pictures that can be decoded by IP-IRDs labelled with a particular capability X with X being an earlier letter than Y in the alphabet. For instance, Capability D IP-IRDs are capable of decoding bitstreams conforming to Main Profile at level 3 of H.264/AVC and below. Additionally, Capability D IP-IRDs are capable of decoding bitstreams that are also decodable by IP-IRDs with capabilities A, B, or C.

In addition to the mandatory requirements on IP-IRDs and Bitstreams, the optional use of the following Bitstreams is allowed given that the IP-IRD is capable of decoding it. For Capability A, B, and C Bitstreams, encoders may optionally generate Main or High Profile bitstreams. For Capability D Bitstreams, encoders may optionally generate High Profile bitstreams.

Each level specifies a maximum number of macroblocks per second that can be processed by a corresponding decoder (not explicitly listed in the table). Additionally, the maximum number of macroblocks per frame is restricted as well. For example, for the Capability D IP-IRD, the maximum number of macroblocks per frame is given as 1,620 corresponding to a 625SD picture (level 3 of H.264/AVC). Together with the maximum number of macroblocks per second that can be processed which are given as 40,500, the maximum frame rate is given as 25 frames per second. Please note that this also permits the processing of 525SD pictures at 30 frames per second.

A.3.6 Other Video Parameters

The present document is supposed to cover a large variety of applications. Therefore, we do not specify parameters such as frame rate, aspect ratio, chromaticity, chroma, and random access points as restrictively as they are specified in TS 101 154 [9].

For parameters such as frame rate and aspect ratio, the constraints as specified in H.264/AVC are sufficient and need no further adjustment. It is only recommended to avoid extreme values.

For parameters such as chromaticity and chroma, it is recommended to utilize the parameters that are specified in the VUI of H.264/AVC which is part of the sequence parameter set.

Random access points are provided through so-called instantaneous decoding refresh (IDR) pictures. In our recommendations, we distinguish broadcast and other applications. For broadcast applications it is recommended that sequence and picture parameter sets are sent together with a random access point (e.g. an IDR picture) to be encoded at least once every 500 milliseconds. For multicast or streaming applications a maximum interval of 5 s between random access points should not be exceeded.

A.4 Audio

A.4.1 MPEG-4 High Efficiency AAC (HE AAC)

The principle problem of traditional perceptual audio codecs at low bit rates is, that they would need more bits to encode the whole spectrum accurately than available. The results are either coding artefacts or the transmission of a reduced bandwidth audio signal. To resolve this problem, MPEG decided to add a bandwidth extension technology as a new tool to the MPEG-4 audio toolbox. With SBR the higher frequency components of the audio signal are reconstructed at the decoder based on transposition and additional helper information. This method allows an accurate reproduction of the higher frequency components with a much higher coding efficiency compared to a traditional perceptual audio codec. Within MPEG the resulting audio codec is called MPEG-4 High Efficiency AAC (HE AAC) and is the combination of the MPEG-4 Audio Object Types AAC-Low Complexity (LC) and Spectral Band Replication (SBR). It is not a replacement for AAC, but rather a superset which extends the reach of high-quality MPEG-4 Audio to much lower bitrates. High Efficiency AAC decoders will decode both, plain AAC and the enhanced AAC plus SBR. The result is a backward compatible extension of the standard.

The basic idea behind SBR is the observation that usually a strong correlation between the characteristics of the high frequency range of a signal (further referred to as 'highband') and the characteristics of the low frequency range (further referred to as "lowband") of the same signal is present. Thus, a good approximation of the representation of the original input signal highband can be achieved by a transposition from the lowband to the highband. In addition to the transposition, the reconstruction of the highband incorporates shaping of the spectral envelope. This process is controlled by transmission of the highband spectral envelope of the original input signal. Additional guidance information for the transposing process is sent from the encoder, which controls means, such as inverse filtering, noise and sine addition. This transmitted side information is further referred to as SBR data.

Figure A.7 shows a block diagram of a HE AAC Encoder. The AAC encoder is operated at half the input sampling frequency of the input audio signal, while the SBR encoder operates on the full sampling frequency. SBR data is embedded into the AAC bitstream by means of the `extension_payload()` element. Two types of SBR extension data can be signalled through the `extension_type` field of the `extension_payload()`. For compatibility reasons with existing AAC only decoders, two different methods for signalling the existence of an SBR payload can be selected. Both methods are described below.

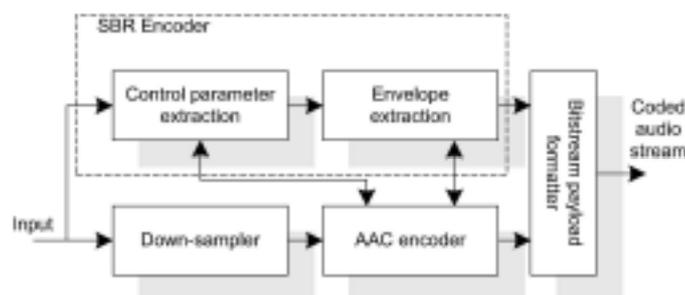


Figure A.7: HE AAC Encoder

The HE AAC decoder is depicted in Figure A.8. The coded audio stream is fed into a demultiplexing unit prior to the AAC decoder and the SBR decoder. The AAC decoder reproduces the lower frequency part of the audio spectrum. The time domain output signal from the underlying AAC decoder at the sampling rate fs_{AAC} is first fed into a 32 channel Quadrature Mirror Filter (QMF) analysis filterbank. Secondly, the high frequency generator module recreates the highband by patching QMF subbands from the existing low band to the high band. Furthermore, inverse filtering is applied on a per QMF subband basis, based on the control data obtained from the bitstream. The envelope adjuster modifies the spectral envelope of the regenerated highband, and adds additional components such as noise and sinusoids, all according to the control data in the bitstream. Finally a 64 channel QMF synthesis filterbank is applied to retain a time-domain output signal at twice the sampling rate, i.e. $fs_{out} = fs_{SBR} = 2 \times fs_{AAC}$.

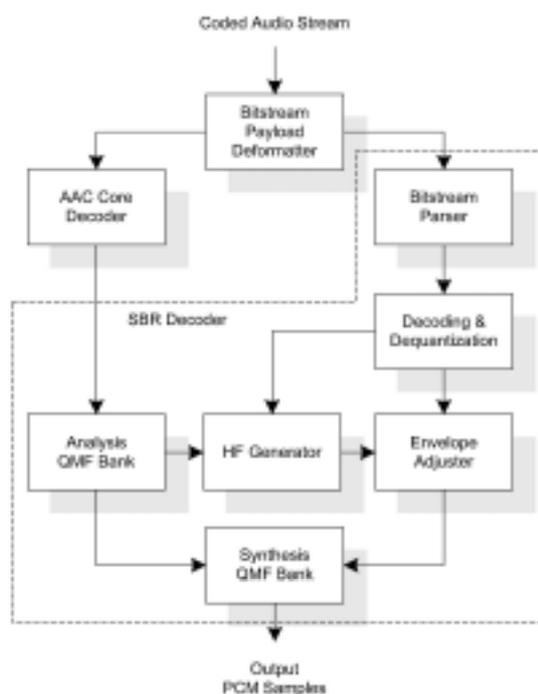


Figure A.8: HE AAC Decoder

A.4.2 HE AAC Levels and Main Parameters for DVB

MPEG-4 provides a huge toolset for the coding of audio objects. In order to allow effective implementations of the standard, subsets of this toolset have been identified that can be used for specific applications. The function of these subsets, called "Profiles," is to limit the toolset a conforming decoder must implement. For each of these Profiles, one or more Levels have been specified, thus restricting the computational complexity.

The High Efficiency AAC Profile is introduced as a superset of the AAC Profile. Besides the Audio Object Type (AOT) AAC LC (which is present in the AAC Profile), it includes the AOT SBR. Levels are introduced within these Profiles in such a way, that a decoder supporting the High Efficiency AAC Profile at a given level can decode an AAC Profile stream at the same or lower level.

Table A.1: Levels within the HE AAC Profile

Level	Max. channels/object	Max. AAC sampling rate, SBR not present [kHz]	Max. AAC sampling rate, SBR present [kHz]	Max. SBR sampling rate, [kHz] (in/out)
1	NA	NA	NA	NA
2	2	48	24	24/48
3	2	48	48 (see note 1)	48/48
4	5	48 (see note 2)	24/48 (see note 1)	48/48
5	5	96	48	48/96

NOTE 1: For level 3 and level 4 decoders, it is mandatory to operate SBR in a downsampled mode if the sampling rate of the AAC core is higher than 24 kHz. Hence, if SBR operates on a 48 kHz AAC signal, the internal sampling rate of SBR will be 96 kHz, however, the output signal will be downsampled by SBR to 48 kHz.

NOTE 2: For one or two channels the maximum AAC sampling rate, with SBR present, is 48 kHz. For more than two channels the maximum AAC sampling rate, with SBR present, is 24 kHz.

For DVB the level 2 for mono and stereo as well as the level 4 multichannel audio signals are supported. The Low Frequency Enhancement channel of a 5.1 audio signal is included in the level 4 definition of the number of channels.

A.4.3 Methods for signalling of SBR

Several ways how to signal the presence of SBR data are possible:

- 1) **implicit signalling:** if SBR extension elements (EXT_SBR_DATA or EXT_SBR_DATA_CRC) are detected in the bitstream, this implicitly means that SBR data is present. This mode provides backward compatibility with AAC-only decoders since a non-SBR aware AAC only decoder would simply skip the SBR data. On the other hand this signalling method may introduce challenges when operating the decoder in a complex system such as an embedded device, since in order to determine the output sampling rate the decoder would need to parse the payload at least partially in order to detect SBR (as explained above the output sampling rate, resp. the sampling rate of SBR is twice the sampling rate of AAC, i.e. the sampling rate associated with the AAC LC AOT).
- 2) **explicit signalling:** the presence of SBR data is signalled by means of the AOT SBR in the AudioSpecificConfig(). This permits to convey configuration data specific to the SBR decoder, which includes separate specifications of the sampling rates for the SBR and AAC decoders. These specifications are also used to implicitly signal the down sampling mode. If the sampling rates for the SBR and AAC decoders are identical, the down-sampled SBR tool is used. Two types of explicit signalling are available:
 - **hierarchical signalling:** if the first AOT is signalled as SBR, a second AOT is signalled which indicates the underlying AOT, e.g. AAC LC. This is a non backward compatible signalling method.
 - **backward compatible signalling:** the extensionAOT is signalled at the end of the AudioSpecificConfig(). This signalling method can only be used in systems that convey the length of the AudioSpecificConfig(). Because of this restriction, backward compatible explicit signalling can for example not be used with LATM configurations.

Since backward compatible signalling of SBR is usually not required in the context of DVB services over IP, it is recommended to use explicit hierarchical signalling of SBR.

Which signalling options are available depends on the applied tool for transport of HE AAC audio:

- With RFC 3016 [5] only implicit signalling is possible.
- With RFC 3640 [6] both explicit and implicit signalling are possible.

A.5 Future Work

In common with TS 101 154 [9] and TS 102 154 [13], these guidelines are a living document, subject to periodic revision. The intention is to develop revisions in a largely backwards compatible manner, so that no changes to the mandatory functionality of a previously defined IRD are made between one edition and the next.

One specific issue is the possibility of extending the guidelines to include even higher resolution content, such as 1080 p 60 Hz. If this is done, it is likely that Level 4.2 of H.264/AVC would be chosen.

History

Document history		
V1.1.1	March 2005	Publication