

**Lawful Interception (LI);
Handover Interface and
Service-Specific Details (SSD) for IP delivery;
Part 2: Service-specific details for E-mail services**



Reference

RTS/LI-00043-2

Keywords

email, handover, interface, IP, Lawful
Interception, security, traffic

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2007.
All rights reserved.

DECTTM, **PLUGTESTSTM** and **UMTSTM** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	6
Foreword.....	6
Introduction	6
1 Scope	7
2 References	7
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	8
4 General	9
4.1 E-mail services	9
5 System model	9
5.1 Reference network topology.....	9
5.2 Reference scenarios	10
5.2.1 E-mail send failure.....	10
5.2.2 E-mail send success	11
5.2.3 E-mail download detail	12
5.2.4 E-mail send detail	13
6 E-mail events.....	14
6.1 Introduction	14
6.2 E-mail send event	14
6.2.1 Introduction.....	14
6.2.2 E-mail send captured content.....	15
6.2.3 E-mail send IRI.....	15
6.3 E-mail receive event.....	16
6.3.1 Introduction.....	16
6.3.2 E-mail receive captured content.....	16
6.3.3 E-mail receive IRI.....	16
6.4 E-mail download event.....	17
6.4.1 Introduction.....	17
6.4.2 E-mail download captured content	17
6.4.3 E-mail download IRI	17
7 E-mail attributes	18
7.1 E-mail protocol ID.....	18
7.2 E-mail address	18
7.3 E-mail recipient list	18
7.4 E-mail sender.....	18
7.5 Total recipient count.....	18
7.6 Message ID.....	18
7.7 Status	19
7.8 Server and client port	19
7.9 Server and client octets sent	19
7.10 AAAInformation	19
Annex A (normative): SMTP	20
A.1 SMTP introduction.....	20
A.2 SMTP HI2 events	20
A.2.1 E-mail login event	20
A.2.2 E-mail send event	20
A.2.3 E-mail receive event	20
A.3 SMTP HI2 attributes	21

A.4	SMTP HI2 event-record mapping	21
Annex B (normative):	POP3	22
B.1	POP3 introduction	22
B.2	POP3 HI2 events	22
B.2.1	E-mail login event	22
B.2.2	E-mail download event.....	22
B.2.3	E-mail partial download event.....	22
B.3	POP3 HI2 attributes	23
B.4	POP3 HI2 event-record mapping	23
Annex C (normative):	IMAP4.....	24
C.1	IMAP4 introduction	24
C.2	IMAP4 HI2 event-record mapping.....	24
C.3	IMAP4 HI3 delivery of call content.....	25
C.4	IMAP4 Interception example	25
Annex D (normative):	E-mail ASN.1.....	27
Annex E (informative):	E-mail LI requirements.....	30
E.1	HI2 requirements.....	30
E.2	HI3 requirements.....	31
E.3	General requirements	32
E.4	Requirements mapping.....	32
Annex F (informative):	SMTP characteristics	33
F.1	SMTP service characteristics	33
F.2	SMTP protocol characteristics	33
Annex G (informative):	POP3 characteristics.....	34
G.1	POP3 service characteristics	34
G.2	POP3 protocol characteristics	34
Annex H (informative):	Discussion of webmail interception	35
H.1	Webmail network topology	35
H.2	Webmail protocols	35
H.3	Webmail interception	36
Annex I (informative):	Discussion for Driving HI2 of HI3.....	37
I.1	Introduction	37
I.2	Discussion	37
I.2.1	Introduction	37
I.2.2	IP packets	38
I.2.3	TCP packets.....	38
I.2.4	SMTP packets	38
I.2.5	E-mail messages	38
I.3	Conclusion.....	39
Annex J (informative):	Bibliography.....	40

Annex K (informative):	Change Request History.....	41
History		42

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Lawful Interception (LI).

The present document is part 2 of a multi-part deliverable. Full details of the entire series can be found in part 1 [3].

Introduction

The present document describes what information is required for the handover of intercepted IP-based E-mail traffic from a Communications Service Provider to an LEMF. The present document covers a stage 2 description of the data, but does not specify any functionality within the scope of TS 102 232-1 [3].

The ITU-T Recommendation I.130 [6] method for characterizing a service will be used as a general framework for the present document. The modified concept of a "stage 1" will be called the "attributes" of the interface. The attributes of the interface are the sum total of all the constituent attributes that an interface may need to communicate. The modified concept of a "stage 2" will be called the "events" of the interface. The events of the interface define the rules of the relationships between the attributes that are required to arrange the disjoint attributes into meaningful information for an E-mail service interaction.

The present document is intended to be general enough to be used in a variety of E-mail services. It should be recognized that a side effect of this approach is some IRI fields identified may be difficult to extract or non-existent depending on the E-mail service being intercepted. In such cases it may be completely reasonable that the delivered IRI contain empty fields or fields with the value 0.

1 Scope

The present document contains a stage 1 like description of the interception information in relation to the process of sending and receiving E-mail. The present document also contains a stage 2 like description of when Intercept Related Information (IRI) and Content of Communication (CC) shall be sent, and what information it shall contain.

It is recognized that "Instant Messenger" and "Chat" applications are another way of exchanging electronic text messages. While the present document may be applicable to such applications it is in no way a goal of the present document to address these methods of electronic text messaging.

The definition of handover transport and encoding of HI2 and HI3 is outside the scope of the present document. Refer to TS 102 232-1 [3].

The present document is designed to be used where appropriate in conjunction with other deliverables that define the service specific IRI data formats. The present document aligns with 3GPP TS 33.108 [5], TS 101 671 [4], TS 101 331 [1] and TR 101 944.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

- [1] ETSI TS 101 331: "Lawful Interception (LI); Requirements of Law Enforcement Agencies".
- [2] Void.
- [3] ETSI TS 102 232-1: "Lawful Interception (LI); Handover Interface and Service-Specific Details (SSD) for IP delivery; Part 1: Handover specification for IP delivery".
- [4] ETSI TS 101 671: "Lawful Interception (LI); Handover interface for the lawful interception of telecommunications traffic".

NOTE: Periodically TS 101 671 is published as ES 201 671. A reference to the latest version of the TS as above reflects the latest stable content from ETSI/TC LI.

- [5] ETSI TS 133 108: "Universal Mobile Telecommunications System (UMTS); 3G security; Handover interface for Lawful Interception (LI) (3GPP TS 33.108)".
- [6] ITU-T Recommendation I.130: "Method for the characterization of telecommunication services supported by an ISDN and network capabilities of an ISDN".
- [7] IETF RFC 0822: "Standard for the format of ARPA Internet text messages".
- [8] IETF RFC 1939: "Post Office Protocol - Version 3".
- [9] IETF RFC 2821: "Simple Mail Transfer Protocol".
- [10] IETF RFC 3501: "Internet Message Access Protocol - Version 4 rev1".

- [11] ITU-T Recommendation X.680/ISO/IEC 8824-1: "Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
- [12] ISO 3166-1: "Codes for the representation of names of countries and their subdivisions - Part 1: Country codes".
- [13] IETF RFC 2554: "SMTP Service Extension for Authentication".
- [14] Void.
- [15] IETF RFC 3493: "Basic Socket Interface Extensions for IPv6".
- [16] IETF RFC 2222: "Simple Authentication and Security Layer (SASL)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

E-mail Address: ARPANET E-mail address

NOTE: As described in RFC 0822 [7], clause 6.

IMAP4: protocol used to manipulate mailbox parameters on a server

NOTE: Described in RFC 3501 [10].

mailbox: destination point of E-mail messages

POP3: widely used protocol for downloading E-mails from a server to a client

NOTE: Described in RFC 1939 [8].

recipient: E-mail address of a destination mailbox for an E-mail being transmitted

NOTE 1: Each E-mail may contain one or more recipients.

NOTE 2: In this definition there is no distinction made between E-mail addresses on a "To:" line and E-mail addresses on a "Cc:" or "Bcc:" line. They are all "recipients" of the E-mail.

sender: E-mail address of the mailbox that originated an E-mail being transmitted

NOTE: Each E-mail contains only one sender.

SMTP: widely used protocol for transferring E-mails between computers

NOTE: Described in RFC 2821 [9].

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

APOP	POP3 authentication message
ASN.1	Abstract Syntax Notation One
BER	Basic Encoding Rules
CC	Content of Communication
CPE	Customer Premises Equipment
CSP	Communication Service Provider
HI2	Handover Interface port 2 (for Intercept Related Information)
HI3	Handover Interface port 3 (for Content of Communication)
HTTP	Hyper Text Transfer Protocol

IMAP4	Internet Message Access Protocol version 4
IP	Internet Protocol
IRI	Intercept Related Information
ISDN	Integrated Services Digital Network
ISP	Internet Service Provider
LEA	Law Enforcement Agency
LEMF	Law Enforcement Monitoring Facility
MF	Mediation Function
MTA	Mail Transfer Agents
NWO	NetWork Operator
OID	Object IDentifier
POP3	Post Office Protocol version 3
PPP	Point to Point Protocol
PSTN	Public Switched Telecommunication Network
RETR	POP3 RETRIeve message
SMTP	Simple Mail Transfer Protocol
SP	Service Provider
TCP	Transmission Control Protocol
UID	Unique IDentifier

4 General

4.1 E-mail services

E-mail services are those services which offer the capability to transmit or receive ARPANET text messages. The following description is taken from RFC 0822 [7]:

"In this context, messages are viewed as having an envelope and contents. The envelope contains whatever information is needed to accomplish transmission and delivery. The contents compose the object to be delivered to the recipient".

E-mail service, in general, can be divided into two categories: those services which allow a computer to transfer a message to another computer; and those services which allow users to manipulate their mailbox by doing such things as downloading messages from the mailbox and deleting messages from the mailbox. Both of these categories of E-mail services can be of interest to Law Enforcement Agencies (LEAs) and are therefore within the scope of the present document.

NOTE: When using IP-packet delivery, control level packets that are associated with the targeted E-mail may be delivered as content. Control level packets are those packets that are used by the E-mail transfer protocol to set-up the E-mail communication and to terminate the E-mail communication and are outside of the traditional RFC 0822 [7] formatted E-mail. This allows for different interception solutions without burdening the Mediation Function (MF) with the responsibility of "cleaning" up said differences in input.

5 System model

5.1 Reference network topology

The network topology shown in figure 1 is intended to represent the many relationships that may exist between the entities involved in E-mail communications. Actual scenarios using this diagram are enumerated in clause 5.2. The following should be considered when viewing figure 1:

- The term "Mail Server" is used to represent a logical entity that relays mail for its mail clients, receives and (temporarily) stores mail for its mail clients, and allows mail clients access to the aforementioned stored mail and the ability to delete it from the mail server.
- The term "Mail Client" is used to represent a logical entity that either injects mail into the network or removes mail from the network or reads mail from the network.

- Mail Client and Mail Server numbers are used to indicate what entities share a client-server relationship, so Mail Client1 is a client of Mail Server1, etc.
- A Mail Server may communicate with any other Mail Server within figure 1.

NOTE: Web access to mail is commonly used; web mail is addressed in annex H.

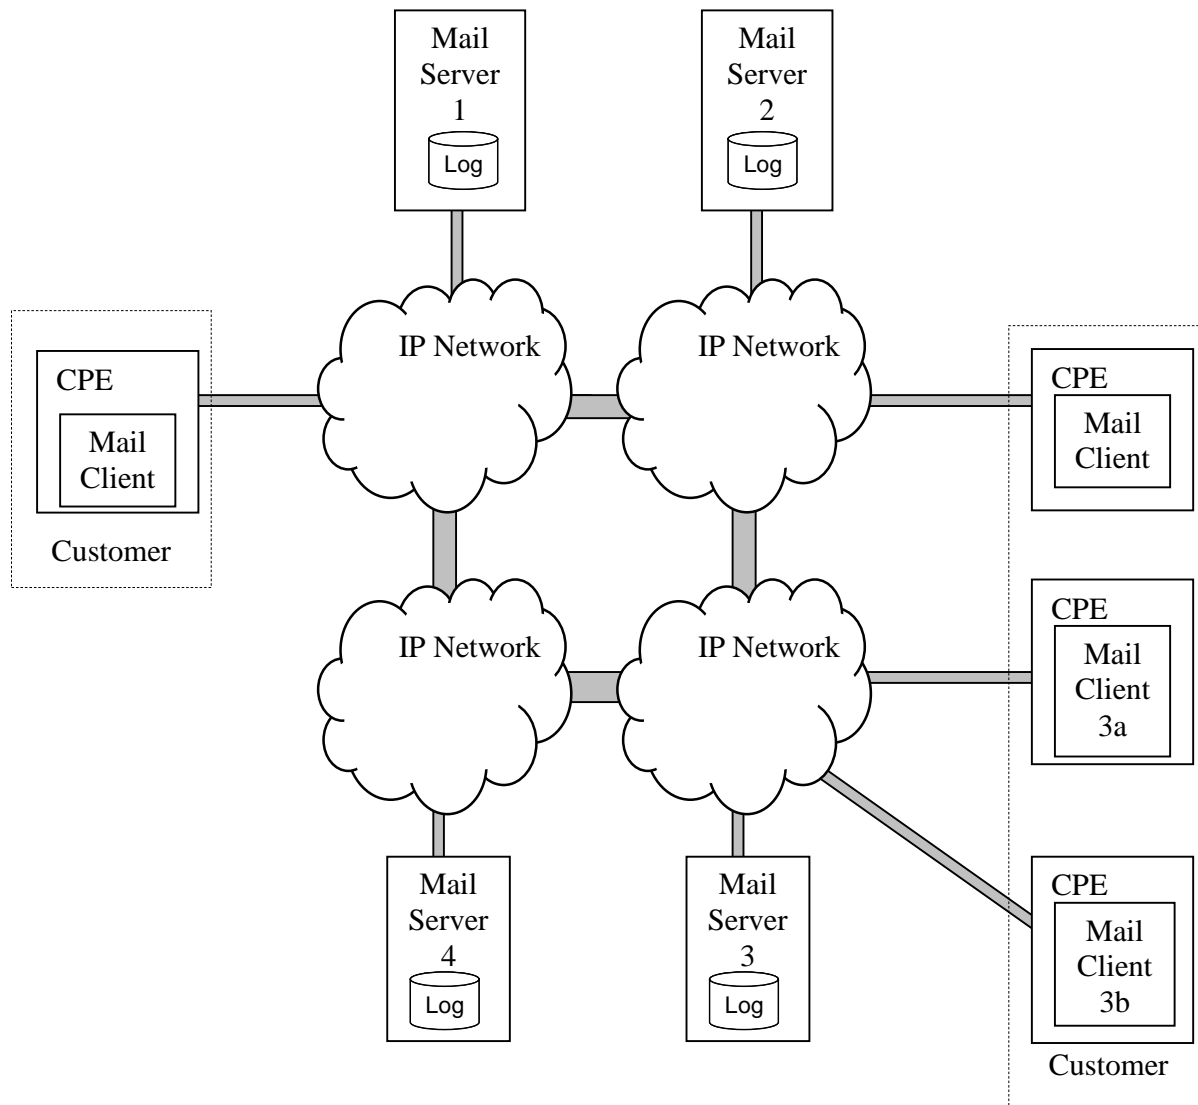


Figure 1: Reference network topology

5.2 Reference scenarios

5.2.1 E-mail send failure

It may occur that E-mails sent into the Internet do not reach their intended target. The most common reason for this would seem to be a mistaken E-mail address, but could also be problems contacting the receiving mail server or other server issues. Note that a failure reply message is not always generated and if a failure reply message is generated, it is generated by the Mail Server that first experiences problems transferring the mail message.

- Client3a sends an E-mail to nobody@MailServer4.com and gives the E-mail to the clients' server, Mail Server3.
- Mail Server3 fills in part of the E-mail envelope and routes the E-mail to Mail Server4.
- Mail Server4 replies to Mail Server3 that the recipient is unknown.

- d) Mail Server3 creates a "reply" message to Mail Client3a stating that the recipient was unknown, and either pushes that message to the client or stores it in the clients' mailbox for later retrieval.

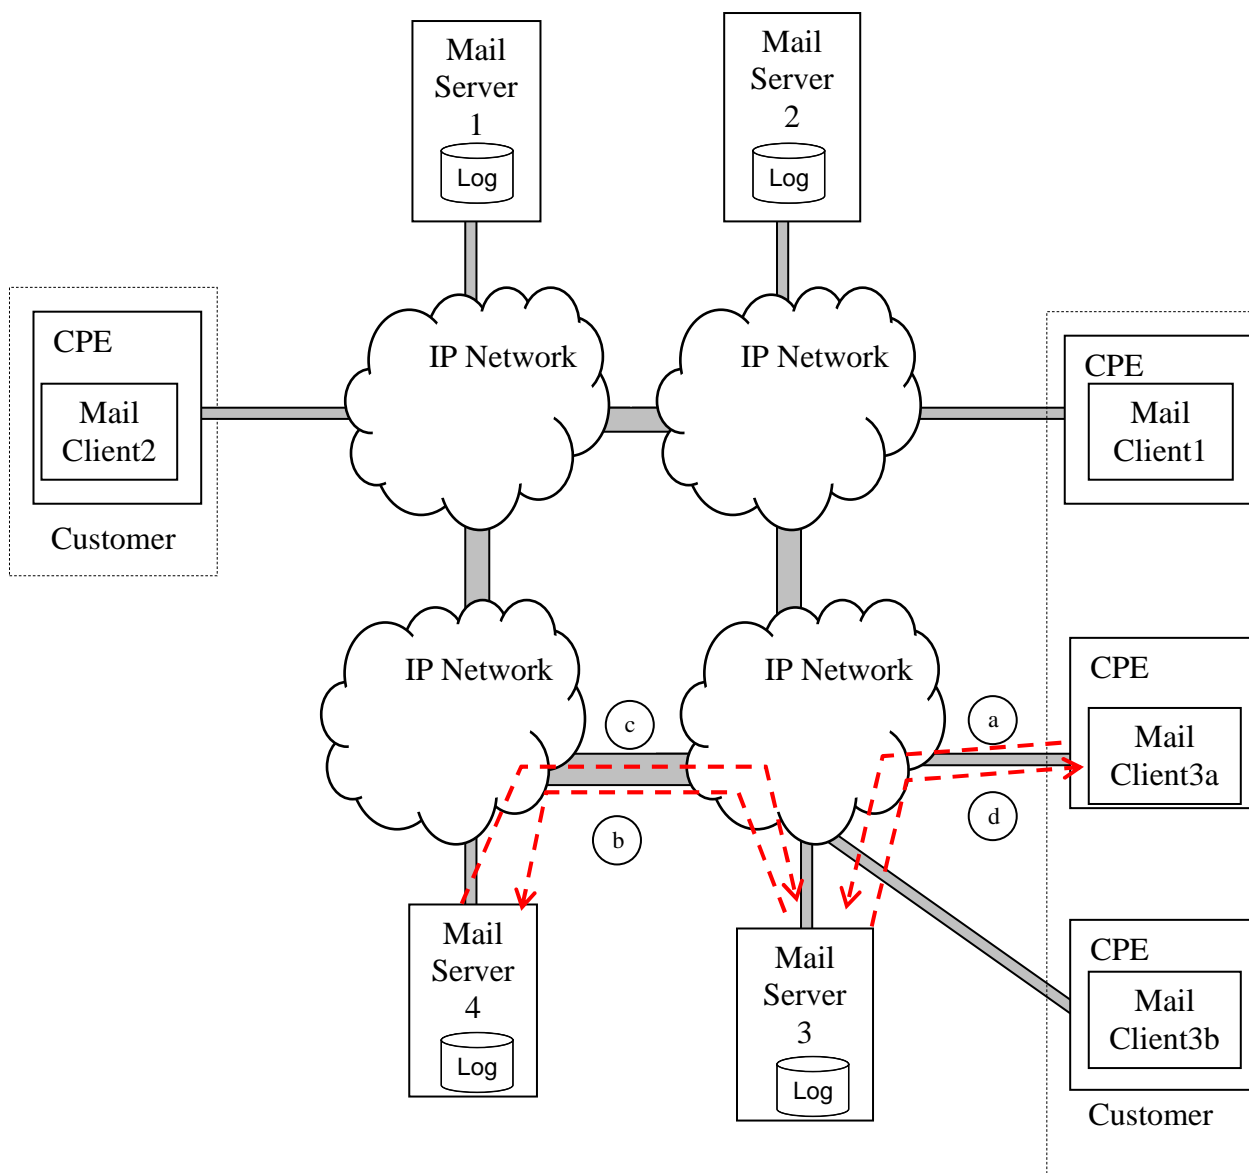


Figure 2: E-mail send failure

5.2.2 E-mail send success

This scenario represents what is likely to be the most common case of an E-mail send. While it is unclear how many E-mails go directly from a clients E-mail server to the destination E-mail server, it is clear that routing of E-mails through Mail Transfer Agents (MTA) is not uncommon and as such is the scenario represented here. The direct routing scenario is a subset where the middle mail server is removed. Note also that the client sending the E-mail is not on the same administrative network as its mail server.

- Client1 sends an E-mail to client3b@MailServer3.com and gives the E-mail to the clients' server, Mail Server1.
- Mail Server1 fills in part of the E-mail envelope and forwards the mail to Mail Server4 for forwarding.
- Mail Server4 attaches its information to the E-mail envelope and forwards the mail to Mail Server3.
- Mail Server3 either pushes the message to the Mail Client3b or stores it in the clients' mailbox for later retrieval.

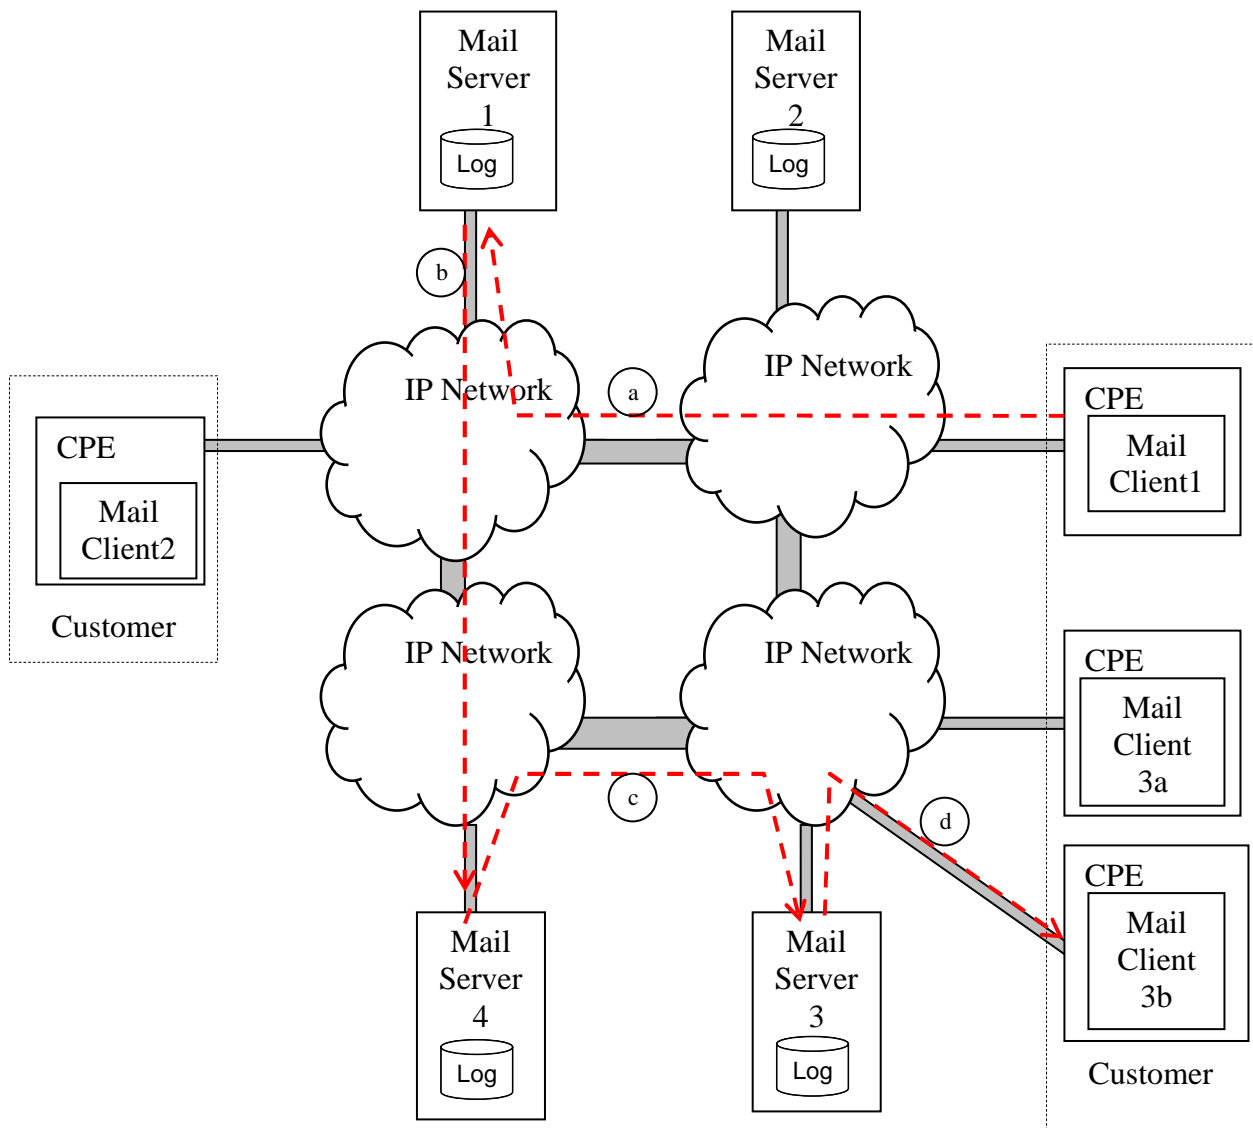


Figure 3: E-mail send success

5.2.3 E-mail download detail

This scenario enumerates the processes that must take place in any E-mail download process. It is assumed that some set of E-mail is already resident on the Mail Server3 in the mailbox for Mail Client3a.

- a) Mail Client3a sends login credentials. This may take several messages or may be accomplished in a single message depending on the mailbox access protocol. What is protocol invariant is that this login process will contain some form of authentication process.
- b) Mail Server3 sends an "authentication success" message to indicate to the client that the login process is complete. At this stage Mail Server3 may push down mailbox state to the client, or may wait for the client to request mailbox state. Using POP3, however, Mail Server3 will not push down messages until they have been explicitly requested by the client.
- c) Mail Client3a may request a message or a set of messages to be downloaded, however this step may be bypassed in some protocols.
- d) Mail Server3 downloads the requested messages to Mail Client3a.
- e) After the mail has been downloaded the server may delete the message as the result of a request.

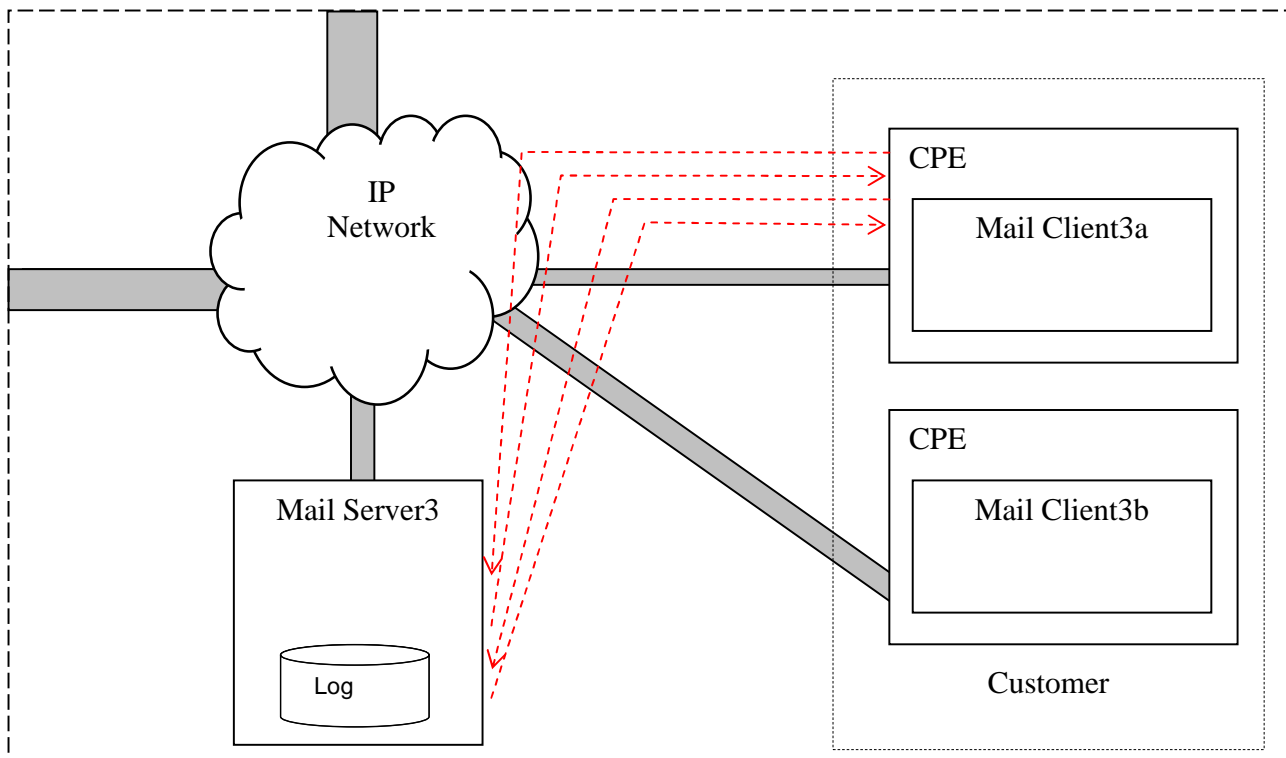


Figure 4: E-mail download detail

5.2.4 E-mail send detail

This scenario enumerates the processes that must take place in any E-mail send process. In the scenario the relationship between Mail Server3 and Mail Client3a is such that the mail is first sent to Mail Server3, which then forwards the mail. While this process seems universally true it need not be true. Mail Client 3a could send the mail to the terminating mail server.

- Mail Client3a sends introduction. This may take several messages or may be accomplished in a single message depending on the mailbox access protocol. The authentication features and capabilities is protocol dependent and authentication may be used in some protocols and not in others.
- Mail Server3 sends a "login success" message to indicate to the client that the login process is complete.
- Mail Client3a initiates a send by including the sender E-mail address, the list of recipient E-mail addresses, and the text body of the message.
- Mail Server3 sends a response indicating that the mail has been successfully received. At this point Mail Server3 begins the process of determining the correct mail servers for each of the recipients, updating the mail text to include information in the envelope, and forwarding the mail.

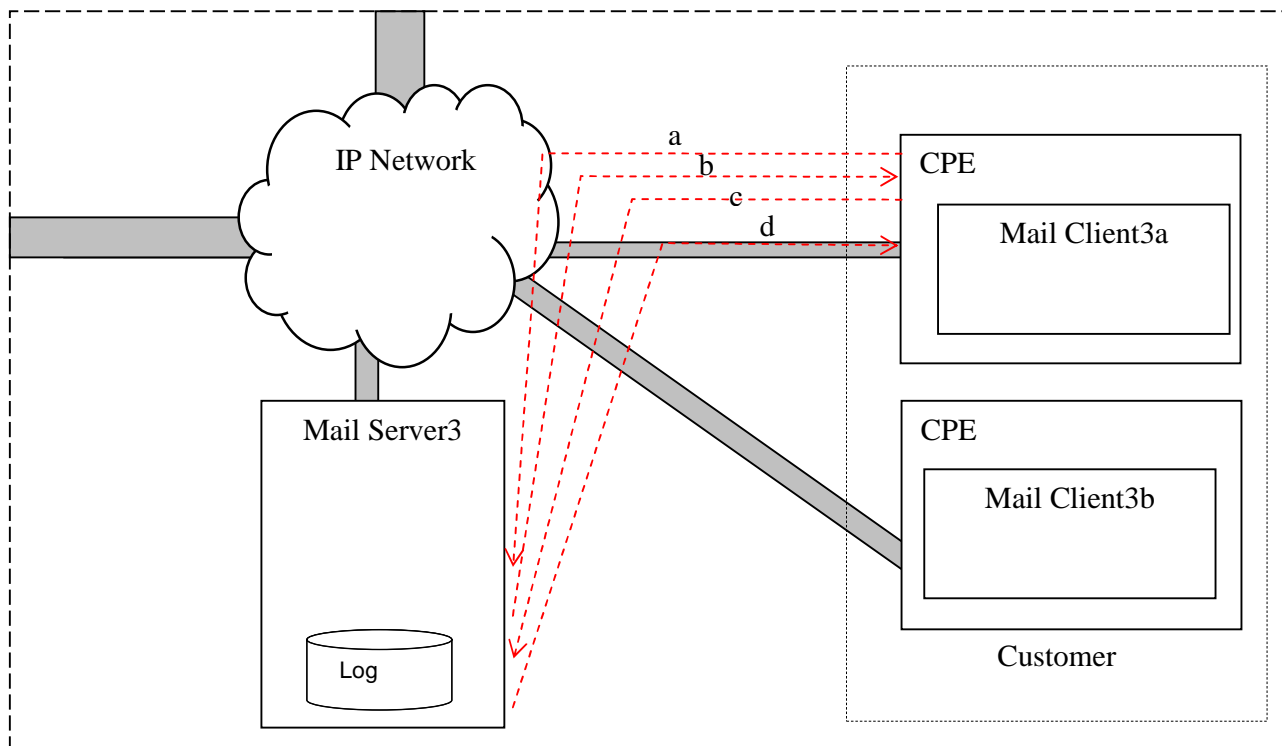


Figure 5: E-mail send detail

6 E-mail events

6.1 Introduction

This clause contains the high level definition of the content and the IRI messages associated with different E-mail communication "events". An "E-mail communication event" is a way of expressing different points in an E-mail transfer where a target may become active. All E-mail communication events are represented by one or more IRI records and potentially content. Clause 6 does not specify how the information is encoded but specifies what information shall be encoded.

This clause only lays out which fields shall be present in each event and what requirement is fulfilled by the field. The definition of each field is either in another document or in clause 7.

6.2 E-mail send event

6.2.1 Introduction

The E-mail send event is represented in clauses 5.2.2 and 5.2.4. This event is represented by a set of IRI and content associated with an E-mail being sent by a target. Each E-mail sent during a session between an E-mail client and an E-mail server must be considered a separate E-mail send event.

There is currently no IRI specified specifically for E-mail send "attempts", and no indication of E-mail send "success" or "failure". E-mail failures often occur a few servers down from where the initial E-mail is sent, and notification of said failure is optional and difficult to automatically correlate when it does occur.

This set of IRI fulfils requirement [E.1.1].

6.2.2 E-mail send captured content

The target may have been matched for an E-mail send by the E-mail address of the sender, login name of the sender, or the IP address. Due to the wide array of intercept options and possible E-mail protocols the captured content maybe just the equivalent of the RFC 0822 [7] E-mail envelope and text or, at the other extreme, the captured content may be the whole E-mail session. What must be present is the RFC 0822 [7] E-mail envelope and text for E-mails sent by the target.

This clause fulfils requirement [E.2.1] and [E.2.2].

6.2.3 E-mail send IRI

The following information may be present in E-mail Send IRI. The availability of this information will depend on the implementation and national regulations.

Table 1: E-mail send IRI information

Field name	Requirement fulfilled	Where defined
Server IP	[E.1.7]	TS 101 671 [4], IP address
Client IP	[E.1.7]	TS 101 671 [4], IP address
Server Port	[E.1.7]	Clause 7
Client Port	[E.1.7]	Clause 7
E-mail Protocol ID	[E.1.10]	Clause 7
E-mail Sender	[E.1.3]	Clause 7
E-mail Recipient List	[E.1.3]	Clause 7
Total Recipient Count	[E.1.5]	Clause 7
Server Octets Sent	[E.1.7]	Clause 7
Client Octets Sent	[E.1.7]	Clause 7
Message ID	[E.1.12]	Clause 7
Status	[E.1.11]	Clause 7
AAAIInformation	[E.1.13]	Clause 7

Note that in this case, both Octets Sent fields are indicators of the amount of communication occurring. Due, however, to differing laws and interception capabilities it is not specified exactly what these byte counts are, only that they accurately represent the amount of information being transferred by the target. That is to say, these byte counts can not be the byte count of an entire E-mail session in which many E-mails are sent but only one of those E-mails was sent by the target entity as the numbers would no longer be representative of the amount of information being transferred by the target. Similarly these byte counts can not be taken to be a one-to-one match of the number of bytes in an E-mail as they may include the control traffic to set-up the E-mail or may include some filing system overhead.

Finally it is worth noting that if the intercept capability is not done based on a protocol but instead based on information on a file system, the Server Octets Sent could be 0 if that accurately represents that the server sent little or no information back to the client.

In case authenticated SMTP, as defined in RFC 2554 [13], is used, the AAAIInformation contains the username, the authentication method, the challenge and response string and the result. As defined in requirements [E.1.13] and [E.2.3], this information must be available in the case of application layer interception. In the case of IP packet interception, it must be sent as part of HI3 in IP packet format, in which case there is no explicit mapping onto an ASN.1 structure.

6.3 E-mail receive event

6.3.1 Introduction

The E-mail receive event is best represented in clause 5.2.3 and represents a set of IRI and content associated with an E-mail being received by a target mailbox. Each E-mail received during a session between an E-mail client and an E-mail server must be considered a separate E-mail receive event.

There is currently no IRI defined for E-mail receive "attempts", and no indication of E-mail receive "success" or "failure". The reason for this decision is because it is deemed an excessive burden on all the parties involved in an intercept for the amount of information that can be obtained.

This set of IRI fulfils requirement [E.1.2].

6.3.2 E-mail receive captured content

The target may have been matched for an E-mail receive by the E-mail address of the recipient, login name of the recipient, or the IP address of the client. Due to the wide array of intercept options and possible E-mail protocols the captured content maybe just the equivalent of the RFC 0822 [7] E-mail envelope and text, or, at the other extreme, the captured content may be the whole E-mail session. What must be present is the RFC 0822 [7] E-mail envelope and text for E-mails received by the target.

This clause fulfils requirement [E.2.1] and [E.2.2].

6.3.3 E-mail receive IRI

The following information may be present in E-mail receive IRI. The availability of this information will depend on the implementation and national regulations.

Table 2: E-mail receive IRI information

Field name	Requirement fulfilled	Where defined
Server IP	[E.1.7]	TS 101 671 [4], IP address
Client IP	[E.1.7]	TS 101 671 [4], IP address
Server Port	[E.1.7]	Clause 7
Client Port	[E.1.7]	Clause 7
E-mail Protocol ID	[E.1.10]	Clause 7
E-mail Sender	[E.1.3]	Clause 7
E-mail Recipient List	[E.1.3]	Clause 7
Total Recipient Count	[E.1.5]	Clause 7
Server Octets Sent	[E.1.7]	Clause 7
Client Octets Sent	[E.1.7]	Clause 7
Message ID	[E.1.12]	Clause 7
Status	[E.1.11]	Clause 7

Note that in this case both Octets Sent fields are indicators of the amount of communication occurring. However, due to differing laws and interception capabilities it is not specified exactly what these byte counts are, only that they accurately represent the amount of information being transferred to the target. For instance, these byte counts may not be the byte count of an entire E-mail session in which many E-mails are transferred but only one of those E-mails was destined to the target entity. In that case the session byte count would no longer be representative of the amount of information being transferred to the target. Similarly these byte counts could not be taken to be a one-to-one match of the number of bytes in an E-mail as they may include the control traffic to set-up the E-mail or may include some filing system overhead.

Finally it is worth noting that if the intercept capability is not done based on a protocol but instead based on information on a file system, the Client Octets Sent could be 0 if that accurately represents that the client sent little or no information back to the server.

6.4 E-mail download event

6.4.1 Introduction

The E-mail Download Event is best represented in clause 5.2.3 and represents a set of IRI and content associated with an E-mail being downloaded from a target mailbox. Each E-mail downloaded during a session between an E-mail client and an E-mail server must be considered a separate E-mail Download Event. In the case where not the full E-mail content is downloaded by the user, but just the header and some lines at the top of the E-mail, this must be signalled by using the "E-mail partial download" event in stead of the regular "E-mail download" event.

There is currently no IRI defined for E-mail download "attempts". The reason for this decision is because it is deemed an excessive burden on all the parties involved in an intercept for the amount of information that can be obtained.

This set of IRI fulfils requirement [E.1.2].

6.4.2 E-mail download captured content

The target may have been matched for an E-mail Download by the E-mail address of the recipient, login name of the recipient, or the IP address of the client. Due to the wide array of intercept options and possible E-mail protocols the captured content maybe just the equivalent of the RFC 0822 [7] E-mail envelope and text, or, at the other extreme, the captured content may be the whole E-mail session. In the case of an E-mail partial download, the captured content will contain the part of the E-mail that was downloaded by the user. What must be present is the RFC 0822 [7] E-mail envelope and text for E-mails received by the target.

This clause fulfils requirements [E.2.1] and [E.2.2].

6.4.3 E-mail download IRI

The following information may be present in E-mail Download IRI. The availability of this information will depend on the implementation and national regulations.

Table 3: E-mail download IRI information

Field name	Requirement fulfilled	Where defined
Server IP	[E.1.7]	TS 101 671 [4], IP address
Client IP	[E.1.7]	TS 101 671 [4], IP address
Server Port	[E.1.7]	Clause 7
Client Port	[E.1.7]	Clause 7
E-mail Protocol ID	[E.1.10]	Clause 7
E-mail Sender	[E.1.3]	Clause 7
E-mail Recipient List	[E.1.3]	Clause 7
Total Recipient Count	[E.1.5]	Clause 7
Server Octets Sent	[E.1.7]	Clause 7
Client Octets Sent	[E.1.7]	Clause 7
Message ID	[E.1.12]	Clause 7
Status	[E.1.11]	Clause 7
AAAIInformation	[E.1.13]	Clause 7

In case POP3, as defined in RFC 3493 [15], is used, the AAAIInformation contains the username, the password and the result. As defined in requirements [E.1.13] and [E.2.3], this information must be available in the case of application layer interception. In the case of IP packet interception, it must be sent as part of HI3 in IP packet format, in which case there is no explicit mapping onto an ASN.1 structure.

7 E-mail attributes

The availability of the information described in this clause will depend on the implementation and national regulations.

7.1 E-mail protocol ID

This attribute can be used to identify the E-mail application or protocol that was used at the point of interception to transfer the E-mail. This should identify which appendix should be looked at for encoding rules. A full enumeration of this attribute is provided in annex D, however a brief list should help provide an example for the definition. This attribute shall contain values including, but not limited to:

- SMTP;
- POP3;
- IMAP.

7.2 E-mail address

All E-mail address attributes are text strings that indicate an E-mail address in the form that it was intercepted in. E-mail addresses may be fully qualified, however many points of interception will not provide fully qualified E-mail addresses.

The above definition of an E-mail Address fulfils requirement [E.1.4].

7.3 E-mail recipient list

This is a list of one or more E-mail address of the intended recipients of an E-mail. Note that this list may not be complete and only contains those recipient addresses that can be intercepted by the interception equipment. SMTP can be used as an example, where only a proper sub-set of the recipients can be seen within the protocol itself.

NOTE: The amount of information which can be retrieved from the SMTP protocol depends on the choice of where the interception equipment is placed in the network.

7.4 E-mail sender

This is a single E-mail address representing the intercepted address of the sender of a targeted E-mail.

7.5 Total recipient count

This attribute is an integer representing the total number of recipients that the interception equipment noticed, even if all those recipients could not be explicitly enumerated in the E-mail Recipient List.

7.6 Message ID

This attribute is used, when available, to relay a message identifier with a message. Applications which communicate primarily through message IDs may use this attribute to relay this information to the LEMF. When present, this attribute and its exact meanings will be highly dependent on the E-mail application and will be specified in the application specific appendix.

7.7 Status

This attribute identifies the status of the communication with values of UNKNOWN, FAILED, and SUCCESS. SUCCESS should be used to indicate status when it is clear that the message reached its destination. The destination should be thought of as the terminating point of the action.

Table 4: E-mail events and termination points

E-mail Event	Termination Point
E-mail Send	Recipient Mailbox Received
E-mail Download	Download succeeded
E mail Partial Download	Partial Download succeeded
E-mail Receive	Recipient Mailbox Received

When the termination point is not understood by the intercept equipment, or the termination point is not monitored by the intercept equipment and the application operation was not determined to be a failure, then the value of UNKNOWN should be used to indicate status.

When the application operation was determined to be a failure (i.e. an error code or some other means) then the value of FAILED should be used to indicate status.

7.8 Server and client port

These attributes identify the Layer 4 port used for communication of the E-mail. How the "server" and the "client" are distinguished is identified in the appendices on a per E-mail application basis.

7.9 Server and client octets sent

These attributes indicate the number of octets sent by the client and server during the communication of the E-mail. How the "server" and the "client" are distinguished is identified in the appendices on a per E-mail application basis. As specified above, both of the octet sent numbers need only accurately represent the amount of information being transferred and should not be considered exact counts of bytes sent at any particular protocol layer.

7.10 AAAInformation

This structure contains the various attributes related to authentication in either the POP3 or SMTP protocol. Whether the values may be present is depending on national legislation.

Annex A (normative): SMTP

A.1 SMTP introduction

SMTP can generally be viewed as a means for sending E-mail from one computer to another. The computer which sent the E-mail may not be the original source of the E-mail, and the computer which received the E-mail may not be the ultimate destination.

Clause A.2 indicates which events can be expected when an interception point is either SMTP or at an SMTP server.

Clause A.3 indicates which protocol units one could expect to fill the event attributes.

A.2 SMTP HI2 events

A.2.1 E-mail login event

An SMTP login success event should be generated after the SMTP client has sent the SMTP hello message and the SMTP server has responded with a response indicating success as defined in RFC 2821 [9].

An SMTP login failure event should be generated after the SMTP client has sent the SMTP hello message and the SMTP server has responded with a response indicating failure as defined in RFC 2821 [9].

NOTE: SMTP logins are not well authenticated.

A.2.2 E-mail send event

An SMTP send event should be generated after the SMTP client has sent DATA command and the server has responded with a response indicating a successful send as defined in RFC 2821 [9].

No event should be generated on an unsuccessful send (for further study).

A.2.3 E-mail receive event

An SMTP receive event should be generated after the SMTP client has sent DATA command and the server has responded with a response indicating a successful transfer as defined in RFC 2821 [9].

No event should be generated on an unsuccessful receive (for further study).

NOTE: The difference in an E-mail Receive Event and an E-mail Send Event, for SMTP, is a matter of semantics but may have legal ramifications.

A.3 SMTP HI2 attributes

Table A.1 shows the attributes that need to be filled by the events specified in clause A.2 and the protocol data that should be used to fill these attributes.

Table A.1: SMTP E-mail attributes

Field name	Contents
Server IP	IP Header, Destination IP of HELO or MAIL FROM message
Client IP	IP Header, Source IP of HELO or MAIL FROM message
Server Port	TCP Header, destination port of HELO or MAIL FROM message
Client Port	TCP Header, source port of HELO or MAIL FROM message
E-mail Protocol ID	SMTP
E-mail Sender	E-mail address specified in MAIL FROM message
E-mail Recipient List	Each address should be from a RCPT TO message that has been accepted by the server for this E-mail
Total Recipient Count	Count of the number of RCPT TO messages that received a positive response from the server
Server Octets Sent	Octet count of the number of bytes sent by the server for the duration of the E-mail send operation. Note that the exact process for determining the number of bytes reported will be highly dependent on the interception equipment deployed and so is not specified here. What is important is that one can get a "feel" for the amount of information the server is exchanging with the client
Client Octets Sent	Octet count of the number of bytes sent by the client for the duration of the E-mail send operation. Note that the exact process for determining the number of bytes reported will be highly dependent on the interception equipment deployed and so is not specified here. What is important is that one can get a "feel" for the amount of information contained in the E-mail sent by the client
Message ID	This is the message ID or the Resent-Message-ID as specified in the RFC 0822 [7] E-mail header attribute "Message-ID" or "Resent-Message-ID"

A.4 SMTP HI2 event-record mapping

Table A.2 shows the events sent are mapped to the HI2 record type that the event will be sent under.

Table A.2: SMTP E-mail event records

SMTP events	Subject	HI2 record
SMTP log on	Client	Begin
SMTP log on attempt	Client	Report
E-mail send successful	Client	Continue/Report
E-mail send unsuccessful	Client	Continue/Report
SMTP log off	Client	End

Annex B (normative): POP3

B.1 POP3 introduction

POP3 can generally be viewed as a means for remotely manipulating E-mail stored on a server in a mailbox. No "send" facility is provided via POP3.

Clause B.2 indicates which events can be expected when an interception point is either POP3 or a POP3 server.

Clause B.3 indicates which protocol units one could expect to fill the event attributes.

B.2 POP3 HI2 events

B.2.1 E-mail login event

A POP3 login success event should be generated after the POP3 client has sent the POP3 password or APOP message and the POP3 server has responded with an OK response indicating success, as defined in RFC 1939 [8].

A POP3 login failure event should be generated after the POP3 client has sent the POP3 password or APOP message and the POP3 server has responded with a ERR response indicating failure, as defined in RFC 1939 [8].

B.2.2 E-mail download event

A POP3 download event should be generated after the POP3 client has sent RETR command and the server has responded the entire E-mail indicating a successful download, as defined in RFC 1939 [8].

No event should be generated on an unsuccessful download (for further study).

B.2.3 E-mail partial download event

A POP3 partial download event should be generated after the POP3 client has sent TOP command and the server has responded the partial E-mail indicating a successful download, as defined in RFC 1939 [8].

No event should be generated on an unsuccessful download (for further study).

B.3 POP3 HI2 attributes

Table B.1 shows the attributes that need to be filled by the events specified in clause B.2 and the protocol data that should be used to fill these attributes.

Table B.1: POP3 E-mail attributes

Field name	Contents
Server IP	IP Header, Destination IP of password or APOP message
Client IP	IP Header, Source IP of password or APOP message
Server Port	TCP Header, destination port of password or APOP message
Client Port	TCP Header, source port of password or APOP message
E-mail Protocol ID	POP3
E-mail Sender	E-mail address specified in "From:" line in RFC 0822 [7] compliant E-mail message. It should be well understood that this field may be difficult to extract and is not used by the service therefore it may easily be faked
E-mail Recipient List	Only one address will be present here, and it will be the mailbox address used to login
Total Recipient Count	Always one, given the above definition of E-mail Recipient List
Server Octets Sent	Octet count of the number of bytes sent by the server for the duration of the E-mail download operation. Note that the exact process for determining the number of bytes reported will be highly dependent on the interception equipment deployed and so is not specified here. What is important is that one can get a "feel" for the amount of information contained in the E-mail sent by the server
Client Octets Sent	Octet count of the number of bytes sent by the client for the duration of the E-mail download operation. Note that the exact process for determining the number of bytes reported will be highly dependent on the interception equipment deployed and so is not specified here. What is important is that one can get a "feel" for the amount of information contained in the E-mail downloaded by the client. This value may be 0 if that accurately represents the amount of information being sent by the client was little or non-existent
Message ID	This is the message ID or the Resent-Message-ID as specified in the RFC 0822 [7] E-mail header attribute "Message-ID" or "Resent-Message-ID"

B.4 POP3 HI2 event-record mapping

Table B.2 shows the events sent are mapped to the HI2 record type that the event will be sent under.

Table B.2: POP3 E-mail event records

POP3 event	Subject	HI2 Record
POP3 log on attempt	Client	Report
POP3 log on failure	Client	Report
POP3 log on	Client	Begin
E-mail download	Client	Continue/Report
E mail partial download	Client	Continue/Report
Modifying Supplementary Service	Client	Continue
Forward on incoming mail	Client	Report
Reply on incoming mail	Client	Report
POP3 log off	Client	End

Annex C (normative): IMAP4

C.1 IMAP4 introduction

IMAP version 4 (IMAP4) RFC 2821 [9] can generally be viewed as a means for remotely manipulating E-mail stored on a server in a mailbox and the mailboxes itself. Extending the capabilities of POP3, IMAP4 provides means to create, change and delete folders of the mailbox. The APPEND command provides a "send"-like facility. IMAP4 connections consist of the establishment of a client/server network connection, an initial greeting from the server, and client/server interactions. These client/server interactions consist of a client command, server data, and a server completion result response.

The LI-relevant IMAP interactions shall be represented by one or more IRI records. The complete data of all interactions shall be delivered as call content if requested.

Clause C.2 indicates which events can be expected when intercepting IMAP4 communication session(s) and provides a table mapping the LI-relevant IMAP4 commands to corresponding IRI messages.

Clause C.3 details the delivery of CC.

Clause C.4 contains an example of IMAP4 communication session and related LI events.

C.2 IMAP4 HI2 event-record mapping

Table C.2 shows the events sent are mapped to the HI2 record type that the event will be sent under.

Table C.1 details the mapping of LI-relevant IMAP4 commands and corresponding IRI events. For every execution of one of the listed commands, an IRI message of the specified type shall be sent to the LEA.

Table C.1: IMAP4 and related LI events

IMAP4 Command	Description	ASN.1 E-mail-Event	iRIType
LOGIN	login client using cleartext username+password	e-mail-logon	Begin
AUTHENTICATE	authenticate client according to RFC 2222 [16] SASL	e-mail-logon	Begin
FETCH	retrieve message(s) according to specified criteria	e-mail-download	Report
	retrieve parts of message(s) according to specified criteria	e-mail-partial-download	Report
APPEND	append argument as last mail in mailbox	e-mail-upload	Report
UID FETCH	do COPY, FETCH or STORE on message(s) based on specified UID, instead of message sequence number	e-mail-download	Report
	do COPY, FETCH or STORE on part of message(s) based on specified UID, instead of message sequence number	e-mail-partial-download	Report
LOGOUT	close session	e-mail-logoff	End

NOTE 1: The UID command supports the IMAP commands FETCH, COPY and STORE on the message with the specified UID. From a LI perspective, only UID FETCH contains IRI relevant information.

NOTE 2: RFC 3501 [10] IMAP4 states "A non-existent UID is ignored without any error message generated. Thus, it is possible for a UID FETCH command to return an OK without any data." In this case, an IRI record with E-mail-Status "successful" could be generated even though no message with the specified UID exists.

IRI messages shall be sent directly after the IMAP4 interaction has been completed.

For all commands, the success of the IMAP4 command shall be indicated using the ASN.1 field E-mail-Status in the same IRI message according to table C.2.

Table C.2: Mapping of IMAP4 response and ASN.1 E-mail-Status field

IMAP 4 Response	Value of ASN.1 E-mail-Status
OK	successful
NO	failed

C.3 IMAP4 HI3 delivery of call content

The nature of IMAP4 as a message access and mailbox (folder) manipulation protocol leads to CC containing not only information directly related to E-mails, but additional information also, e.g. folder manipulation and mail status flags. Call content (CC) shall contain the complete data of all IMAP4 sessions initiated by a target. Sessions extend from LOGIN or AUTHENTICATE to LOGOUT commands. LOGIN, AUTHENTICATE and LOGOUT itself are included.

IMAP4 provides the possibility to extend individual sessions to long periods of time (theoretically up to weeks), making it impractical to deliver CC only after the session is closed. To keep the delay between original communication and delivery of CC to an amount acceptable to LEAs, delivery of CC shall be initiated at least after every finished IMAP4 interaction.

C.4 IMAP4 Interception example

(C: Client/Target, S: Server/Provider, I: Intercept operation)

```
[01] C: (Client connects to IMAP server)
[02] S: * OK IMAP4rev1 Service Ready
[03] C: a001 login mrc secret
[XX] I: Create Session [allocate CIN]
[04] S: a001 OK LOGIN completed
[XX] I: Send email-logon event with E-mail-Status OK
[XX] I: Send CC for message 3-4
[05] C: a002 select inbox
[06] S: * 18 EXISTS
[07] S: * FLAGS (\Answered \Flagged \Deleted \Seen \Draft)
[08] S: * 2 RECENT
[09] S: * OK [UNSEEN 17] Message 17 is the first unseen message
[10] S: * OK [UIDVALIDITY 3857529045] UIDs valid
[11] S: a002 OK [READ-WRITE] SELECT completed
[XX] I: Send CC for message 5-11
[12] C: a003 fetch 12 full
[13] S: * 12 FETCH (FLAGS (\Seen) INTERNALDATE "17-Jul-1996 02:44:25 -0700"
RFC822.SIZE 4286 ENVELOPE ("Wed, 17 Jul 1996 02:23:25 -0700 (PDT)"
"IMAP4rev1 WG mtg summary and minutes"
(("Terry Gray" NIL "gray" "cac.washington.edu"))
(("Terry Gray" NIL "gray" "cac.washington.edu"))
(("Terry Gray" NIL "gray" "cac.washington.edu"))
((NIL NIL "imap" "cac.washington.edu"))
((NIL NIL "minutes" "CNRI.Reston.VA.US")
("John Klensin" NIL "KLENSIN" "INFOODS.MIT.EDU")) NIL NIL
"")
BODY ("TEXT" "PLAIN" ("CHARSET" "US-ASCII") NIL NIL "7BIT" 3028 92))
[14] S: a003 OK FETCH completed
[XX] I: Send email-partial-download
[XX] I: Send CC for message 12-14
[15] C: a004 fetch 12 body[header]
[16] S: * 12 FETCH (BODY[HEADER] {350}
[17] S: Date: Wed, 17 Jul 1996 02:23:25 -0700 (PDT)
[18] S: From: Terry Gray
[19] S: Subject: IMAP4rev1 WG mtg summary and minutes
[20] S: To: imap@cac.washington.edu
```

[21] S: cc: minutes@CNRI.Reston.VA.US, John Klensin
[22] S: Message-Id:
[23] S: MIME-Version: 1.0
[24] S: Content-Type: TEXT/PLAIN; CHARSET=US-ASCII
[25] S:
[26] S:)
[27] S: a004 OK FETCH completed
[XX] I: Send email-partial-download
[XX] I: Send CC for message 15-27
[28] C: a005 store 12 +flags \deleted
[29] S: * 12 FETCH (FLAGS (\Seen \Deleted))
[30] S: a005 OK +FLAGS completed
[XX] I: Send CC for message 28-30
[31] C: a006 logout
[32] S: * BYE IMAP4rev1 server terminating connection
[33] S: a006 OK LOGOUT completed
[XX] I: Send email-logoff
[XX] I: Send CC for message 31-33
[XX] I: Close Session [release CIN]

Annex D (normative): E-mail ASN.1

The ASN.1 (ITU-T Recommendation X.680 [11]) module that represents the information in the present document and meets all stated requirements is shown below. TR 102 503 (see Bibliography) gives an overview of the relevant Object Identifiers (OID) used in ASN.1 modules of the Lawful Intercept specifications and points to the specification where the modules can be found.

```
-- =====
-- Description of the Email PDU
-- =====
```

```
EmailPDU
{itu-t(0) identified-organization(4) etsi(0) securityDomain(2) lawfulIntercept(2) li-ps(5) email(2)
version3(3)}
```

```
DEFINITIONS IMPLICIT TAGS ::=
BEGIN
```

```
IMPORTS

-- from TS 101 671 [4]
IPAddress
    FROM HI2Operations
    {itu-t(0) identified-organization(4) etsi(0) securityDomain(2) lawfulIntercept(2) hi2(1)
version10(10)};
```

```
-- =====
-- Object Identifier Definition
-- =====

emailIRIObjId RELATIVE-OID ::= {li-ps(5) email(2) version3(3) iRI(1)}
emailCCObjId RELATIVE-OID  ::= {li-ps(5) email(2) version1(1) cC(2)}
-- definitions are relative to
-- {itu-t(0) identified-organization(4) etsi(0) securityDomain(2) lawfulIntercept(2)}
```

```
-- =====
-- Email Communications Contents
-- =====
```

```
EmailCC ::= SEQUENCE
-- EmailCC is the PDU sent for each "piece" of E-mail captured content
{
    emailCCObjId      [0] RELATIVE-OID,
    email-Format      [1] Email-Format,
    content           [2] OCTET STRING
    -- Network byte order
}
```

```
Email-Format ::= ENUMERATED
{
    ip-packet(1),
    -- When this is the email format, the content will contain the bytes of the IP packet from
    -- the IP header through to the end of the IP packet
    -- Meets requirement E.2.7.
    application(2)
    -- Only the IP stack Layer 4 payload, (i.e. no IP or TCP headers)
    -- Meets requirement E.2.8
}
```

```
-- =====
-- Intercept-related information for Email
-- =====
```

```
EmailIRI ::= SEQUENCE
-- EmailIRI is the PDU sent for each "piece" of E-mail IRI
{
  emailIRIObjId [0] RELATIVE-OID,
  eventType [1] E-mail-Event,
  client-Address [2] IPAddress OPTIONAL,
  -- Provided if available
  server-Address [3] IPAddress OPTIONAL,
  -- Provided if available
  client-Port [4] INTEGER OPTIONAL,
  -- Provided if available
  server-Port [5] INTEGER OPTIONAL,
  -- Provided if available
  server-Octets-Sent [6] INTEGER,
  client-Octets-Sent [7] INTEGER,
  protocol-ID [8] E-mail-Protocol,
  e-mail-Sender [9] UTF8String (SIZE (0..255)) OPTIONAL,
  -- Not available in some cases; if a value is available, it must be provided
  e-mail-Recipients [10] E-mail-Address-List OPTIONAL,
  -- Not available in some cases; if a value is available, it must be provided
  status [11] E-mail-Status,
  total-Recipient-Count [12] INTEGER (0..4294967295) OPTIONAL,
  message-ID [13] OCTET STRING OPTIONAL,
  -- Network byte order
  nationalParameter [14] OCTET STRING OPTIONAL,
  -- Completely defined on a national basis, including byte ordering
  ...,
  national-EM-ASN1parameters [15] National-EM-ASN1parameters OPTIONAL,
  -- Completely defined on a national basis
  aaaInformation [16] AAAInformation OPTIONAL
}
```

```
E-mail-Status ::= ENUMERATED
{
  status-unknown(1),
  operation-failed(2),
  operation-succeeded(3)
}
```

```
E-mail-Event ::= ENUMERATED
{
  e-mail-send(1),
  e-mail-receive(2),
  e-mail-download(3),
  ...,
  e-mail-logon-attempt(4),
  e-mail-logon(5),
  e-mail-logon-failure(6),
  e-mail-logoff(7),
  e-mail-partial-download(8)
}
```

```
E-mail-Protocol ::= ENUMERATED
{
  smtp(1),
  pop3(2),
  undefined(255),
  -- The protocol is not known or not representable by the current enumeration
  ...
}
```

```
E-mail-Address-List ::= SEQUENCE (SIZE (0..1023)) OF UTF8String(SIZE (0..255))
```

```

National-EM-ASN1parameters ::= SEQUENCE
{
    countryCode      [1] PrintableString (SIZE (2)),
        -- Country Code according to ISO 3166-1 [12],
        -- the country to which the parameters inserted after the extension marker apply
    ...
        -- In case a given country wants to use additional national parameters according to its law,
        -- these national parameters should be defined using the ASN.1 syntax and added after the
        -- extension marker (...)
}

```

```

AAAInformation ::= CHOICE
-- The AAAInformation field allows for POP3 and authenticated SMTP AAA information
{
    pop3AAAInformation      [0] POP3AAAInformation,
    asmtppaaaInformation    [1] ASMTTPAAAInformation,
    ...
}

```

```

POP3AAAInformation ::= SEQUENCE
-- The POP3AAAInformation field contains the POP3 username & optionally the password
{
    username                [0] UTF8String (SIZE (0..64)),
    password                 [1] UTF8String (SIZE (0..64)) OPTIONAL,
    aaAResult                [2] AAAResult OPTIONAL,
    ...
}

```

```

ASMTTPAAAInformation ::= SEQUENCE
-- The ASMTTPAAAInformation field contains the SMTP username and
-- optionally the authentication fields
{
    username                [0] UTF8String (SIZE (0..64)),
    authMethod              [1] AAAauthMethod OPTIONAL,
        -- The hashing method used, i.e. CRAM-MD5, DIGEST-MD5, etc
    challenge               [2] OCTET STRING OPTIONAL,
        -- A BASE64 encoded challenge send by the SMTP server
    response                [3] OCTET STRING OPTIONAL,
        -- A BASE64 encoded hashed response returned by the client
    aaAResult               [4] AAAResult OPTIONAL,
    ...
}

```

```

AAAResult ::= ENUMERATED
{
    resultUnknown(1),
    aAAFailed(2),
    aAASucceeded(3),
    ...
}

```

```

AAAauthMethod ::= ENUMERATED
{
    undefinedAuthMethod(1),
    cramMD5(2),
    digestMD5(3),
    ...
}

```

END -- end of EmailPDU

Annex E (informative): E-mail LI requirements

E.1 HI2 requirements

- [E.1.1] The HI2 interface shall support the ability to deliver IRI record(s), without delivering the contents of the message, when a target has sent E-mail.

NOTE 1: How an E-mail send is determined and intercepted is outside of the scope of the present document, however, that E-mail was sent and to whom it was sent is interesting to law enforcement. Likewise the information needed to intercept that an E-mail was sent and to whom it was sent can be determined in many ways including, but limited to, well defined interception points, laws, or combinations of IP interception and more conventional intelligence.

- [E.1.2] The HI2 interface shall support the ability to deliver IRI record(s), without delivering the contents of the message, when a target has downloaded E-mail.

NOTE 2: How an E-mail receive is determined and intercepted is outside of the scope of the present document, however, that an E-mail was received and from whom it was sent is interesting to law enforcement. Likewise the information needed to intercept that an E-mail was received and from whom it was sent can be determined in many ways including, but limited to, well defined interception points, laws, or combinations of IP interception and more conventional intelligence.

- [E.1.3] The HI2 interface shall support the ability to deliver both the sender E-mail address and recipient E-mail addresses of E-mail as part of the "send" and "receive" events.

NOTE 3: Neither sender nor recipient E-mail addresses are required because of differences in national laws or points of interception may not allow this information to be extracted. That being said, because of differences in national laws or points of interception, both of these pieces of information may be available, therefore the ability to transfer both addresses is supported.

- [E.1.4] When HI2 is able to deliver an E-mail address, either sender or receiver, the MF shall not be required to modify the address presentation. For example, if no domain name was present at intercept time, for example, the MF is not required to determine the domain name and append it.

NOTE 4: Many reasons for this, including data integrity and cost, can be used.

- [E.1.5] The HI2 interface shall support a means of indicating how many recipient addresses could not be sent with the "send" or "receive" events due to limitations.

NOTE 5: The pathological example is an SMTP intercept with a trillion RCPT TOs. Since there is no expectation that the intercept device or the MF have unlimited resources we recognize that there is the possibility that some resource on some device in the chain may not be able to handle the number of RCPT TOs, and provide for a means to notify the LEA that we hit this condition.

- [E.1.6] The RFC 0822 [7] E-mail message envelope fields of dates, source, and destination may be considered IRI. These fields are defined in RFC 0822 [7].

NOTE 6: These fields clearly mark data that is traditionally passed via a control channel, and therefore should be treated as IRI.

[E.1.7] The E-mail HI2 end record shall contain the following information, when present and available from the layer 3 and layer 4 protocols:

- participating server and client addresses;
- participating server and client ports (i.e. TCP port);
- bytes sent by the server and client.

NOTE 7: This information should be the control information that provides the LEA with an indication of the quantity of communication occurring.

[E.1.8] E-mail HI2 shall be encoded using ASN.1 and BER.

NOTE 8: This makes the data collectors' job easier as there is not separate encoding and does not impose any additional burden on the MF as it will have to extract the requisite information anyway and will have to support BER anyway.

[E.1.9] The HI2 interface shall support the ability to deliver IRI record(s), without delivering the contents of any messages or passwords, when an attempt has been made to log into the target E-mail account. This record shall also contain the results of the logon attempt.

NOTE 9: This has been required by LEAs.

[E.1.10] The HI2 interface shall support a means of indicating what E-mail application service was intercepted.

NOTE 10: This information can be helpful to the LEA for investigative purposes.

[E.1.11] The HI2 interface shall support a means of indicating the success or failure of an E-mail interaction to the degree that such information is available.

[E.1.12] The HI2 interface shall support the ability to deliver the Message-ID.

NOTE 11: The Message-ID supports the identification in E-mail log-files.

[E.1.13] The authentication data resulting from either sending or downloading E-mail, must be part of IRI in the case of application layer intercept. In the case of IP-packet interception, requirement [E.2.3] applies.

NOTE 12: The choice between options is depending on implementation and subject to agreement between LEA and CSP.

E.2 HI3 requirements

[E.2.1] HI3 delivery of E-mail content shall include the entire E-mail message body. See RFC 0822 [7] for a definition of the body.

NOTE 1: Anything less would be incomplete data.

[E.2.2] HI3 delivery of E-mail content shall include the entire E-mail envelope, when applicable. See RFC 0822 [7] for a definition of the envelope.

NOTE 2: The RFC 0822 [7] envelope can be used by collectors to display the E-mail in a meaningful format. Likewise this is the only place that the envelope can be seen in its entirety. The value of the above two is considered worth the cost of potentially duplicating HI2 data.

[E.2.3] In the case of IP packet interception, the authentication data resulting from either sending or downloading E-mail, must be sent as part of HI3, in the form of the IP packets exchanged in the authentication. In the case of application layer interception, requirement [E.1.13] applies.

NOTE 3: The choice between options is depending on implementation and subject to agreement between LEA and provider.

[E.2.4] The RFC 0822 [7] E-mail message body shall be considered content.

NOTE 4: This is a positive way to express "E-mail message bodies will not go over HI2".

- [E.2.5] All RFC 0822 [7] E-mail message envelope fields that are declared optional in RFC 0822 [7] shall be considered content.

NOTE 5: This is a positive way to express that optional fields do not go over HI2. The reason optional fields do not go over HI2 is that some clearly contain content, like the Subject and Comment fields, and the non-optional ones contain sufficient control information to make meaningful IRI. This distinction is easy to specify and does not appear to suffer any loss of functionality.

- [E.2.6] The E-mail HI3 shall contain a field that will indicate what application appendix has been used for the encoding of the CC.

NOTE 6: Different levels of information and perhaps even slightly different formats can be expected based on the E-mail application intercepted. These differences are spelled out explicitly in the appendices to the present document. This requirement is to indicate which application appendix to use when interpreting the received CC.

- [E.2.7] E-mail HI3 shall support the ability to send content in the same manner as an IP only content is sent i.e. transfer the constituent IP level packets of the E-mail, including TCP acknowledgements. For the remainder of these requirements this shall be called "IP-packet" delivery.

NOTE 7: For evidentiary reasons, some LEAs may require wire level communications as HI3.

- [E.2.8] E-mail HI3 shall support the ability to send content in the format of the set of commands and data that constitute the E-mail; e.g. the payload of TCP packets in which the E-mail was transported. For the remainder of these requirements this shall be called "application" delivery.

NOTE 8: As described in annex I, this type of HI3 can be derived from intercepting the TCP stream as well as from E-mail application level intercepts. In complex E-mail environments, the HI3 format allows for a hybrid interception approach to produce the same HI3 format throughout.

E.3 General requirements

- [E.3.1] The target list (i.e. the list of people who are targets) is typically at least as sensitive as the results of interception and should be protected to appropriate national security standards.

E.4 Requirements mapping

Table E.1: Mapping

Requirement number	Clause number
[E.1.1]	6.2.1
[E.1.2]	6.3.1, 6.4.1
[E.1.3]	6.2.3, 6.3.3, 6.4.3
[E.1.4]	7.2
[E.1.5]	6.2.3, 6.3.3, 6.4.3
[E.1.6]	B.3
[E.1.7]	6.2.3, 6.3.3, 6.4.3
[E.1.8]	annex D
[E.1.9]	annex D
[E.1.10]	6.2.3, 6.3.3, 6.4.3
[E.1.11]	6.2.3, 6.3.3, 6.4.3
[E.1.12]	6.2.3, 6.3.3, 6.4.3
[E.1.13]	6.2.3, 6.3.3, 6.4.3
[E.2.1]	6.2.2, 6.3.2, 6.4.2
[E.2.2]	6.2.2, 6.3.2, 6.4.2
[E.2.3]	6.2.3, 6.3.3, 6.4.3
[E.2.4]	6.2.3, 6.3.3, 6.4.3 (via abstentia)
[E.2.5]	6.2.3, 6.3.3, 6.4.3 (via abstentia)
[E.2.6]	annex D
[E.2.7]	annex D
[E.2.8]	annex D

Annex F (informative): SMTP characteristics

F.1 SMTP service characteristics

The fundamental service characteristic of an SMTP service is that it is a method of pushing E-mails from one host computer to another. The remaining text below is based on ideas expressed in RFC 2821 [9].

The SMTP service can be divided by participants in two: the SMTP-client and the SMTP-server. Note that the SMTP-server need not be the ultimate destination of any of the E-mail, as is described for an SMTP relay function. Unfortunately RFC 2821 [9] does not provide a concise description of these two participants so one will be provided here.

The SMTP-client is the initiator of all actions while the SMTP-server has the final say as to the validity of these actions. The SMTP-client initiates an SMTP connection, logs onto the server (with no authentication), and proceeds to send as many E-mail messages as the SMTP-client currently has to send to the SMTP-server before quitting the session. The important concept to note is that a single SMTP session can transfer many E-mail messages in it, each message potentially from a different source E-mail address.

The SMTP-server accepts connections and accepts or rejects each action a client attempts to initiate with the server. No SMTP action by the client can be considered valid or complete without the server accepting the action.

The SMTP service can be divided by functionality into four: SMTP origination; SMTP delivery; SMTP relay; and SMTP gateway. For the purposes of the present document, however, the SMTP gateway service will be viewed as an SMTP delivery service because both services effectively remove the E-mail from SMTP and put it into another form. The enumeration of each of these functionalities can be found in RFC 2821 [9], clause 2.3.8.

Note that in none of the SMTP service functionalities does SMTP deal with the notion of a mailbox. SMTP deals exclusively with the notion of transferring E-mail messages where the domain portion of the SMTP mailbox name is used for routing of the E-mail.

F.2 SMTP protocol characteristics

The SMTP protocol characteristics are enumerated sufficiently in RFC 2821 [9], clauses 3.1 to 3.3. The following characteristics are important to note.

The SMTP login is un-authenticated and often unverified. There is no natural or guaranteed association between the login identity and any of the E-mails sent since multiple E-mails can be sent during a session and each E-mail sent individually specifies the sender with all recipients.

The addresses that accompany the SMTP RCPT TO action are used for routing the E-mail to the destination mailboxes. These addresses, therefore, can be reasonably relied on to be an accurate indicator of the intended recipients of the E-mail.

There is no limit on the number of RCPT TO actions per E-mail message.

The address that accompanies the SMTP MAIL FROM action is used to route replies to the E-mail. This address, therefore, may be spoofed with no loss of sending functionality (i.e. the E-mail can still get to the intended recipient).

There is only one MAIL FROM action per E-mail message.

The addresses specified in the MAIL FROM action and the RCPT TO actions are fully qualified addresses (i.e. mailbox name and domain name).

Annex G (informative): POP3 characteristics

G.1 POP3 service characteristics

The fundamental service characteristic of a POP3 service is that it permits a workstation to dynamically access a mailbox on a server host in a useful fashion. Usually, this means that the POP3 protocol is used to allow a workstation to retrieve mail that the server is holding for it. POP3 is not intended to provide extensive manipulation operations of mail on the server (RFC 1939 [8]).

A normal POP3 service offers gross level queries on the status of the mailbox such as number of messages, size of messages, etc. The main functionality of the POP3 service, as it is used today, is the ability to download E-mail messages and delete E-mail messages from the mailbox.

There is no POP3 service that offers the ability of injecting an E-mail into the Internet or uploading E-mail to the mailbox. In general SMTP or IMAP4 are used for these functionalities.

G.2 POP3 protocol characteristics

The POP3 protocol characteristics are enumerated sufficiently in RFC 1939 [8] clause 3, and in detail in RFC 1939 [8] clauses 4 to 6. The following characteristics are important to note.

The POP3 login name must identify the mailbox to be accessed however there is no standard as to how the mailbox identity is presented. Practically speaking most POP3 logins contain the mailbox name, sans domain name, or the fully qualified E-mail address, however, this is not guaranteed by the protocol.

The senders E-mail address is not interpreted by the POP3 protocol. The senders address is, however, generally contained within the E-mail envelope of a properly formatted RFC 0822 [7] message under the "From" field. Nominally the "From" address is filled in by the MAIL FROM address used in SMTP, however there is no guarantee of this.

All POP3 operations on a mailbox specify messages via integer values, often indicative of the temporal ordering of messages within the mailbox. The only time useful intercept content is provided without a priori knowledge of the state of the mailbox is in response to retrieval commands RETR and TOP.

Annex H (informative): Discussion of webmail interception

H.1 Webmail network topology

A Webmail service is typically offered as part of an ISP service package. It allows for accessing an E-mail service from any Internet enabled computer via a web page, using a plain browser. The added value of a Webmail service is that it does not require specific configuration of an E-mail client and it allows for accessing E-mail from within a network that is connected to the Internet through a very restrictive firewall; most firewalls allow for HTTP traffic.

Although not always appreciated by the original ISP / E-mail provider, a third party can also offer Webmail services based on the E-mail infrastructure of the ISP, by accessing the ISP's POP3 server via the Internet. Therefore, figure H.1 depicts two types of Webmail servers; one within the own ISP's infrastructure and one inside a third party's infrastructure.

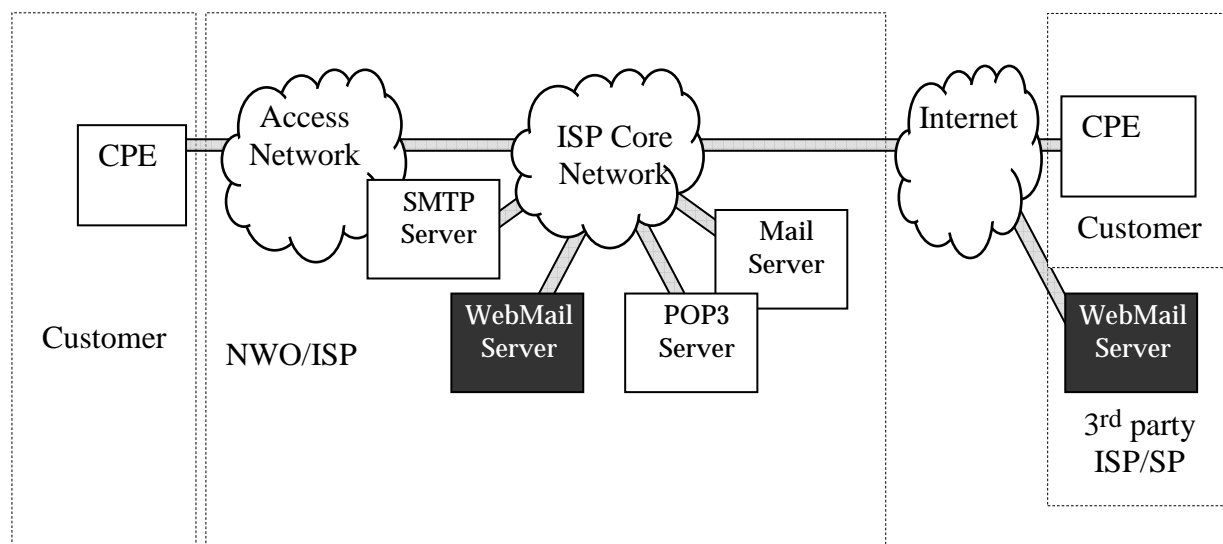


Figure H.1: Webmail network topology

The Webmail service can be used by customers logged-on via one of the ISP's access networks, but is more commonly used directly from the Internet.

H.2 Webmail protocols

As depicted in figure H.2, the Webmail server is positioned as an application server that abstracts the regular E-mail protocols for sending (SMTP) and receiving (POP3) E-mail from the customer by means of a Web application. Typically, the Webmail server accesses the same SMTP and POP3 server(s) in the ISP infrastructure as customers with regular E-mail clients do.

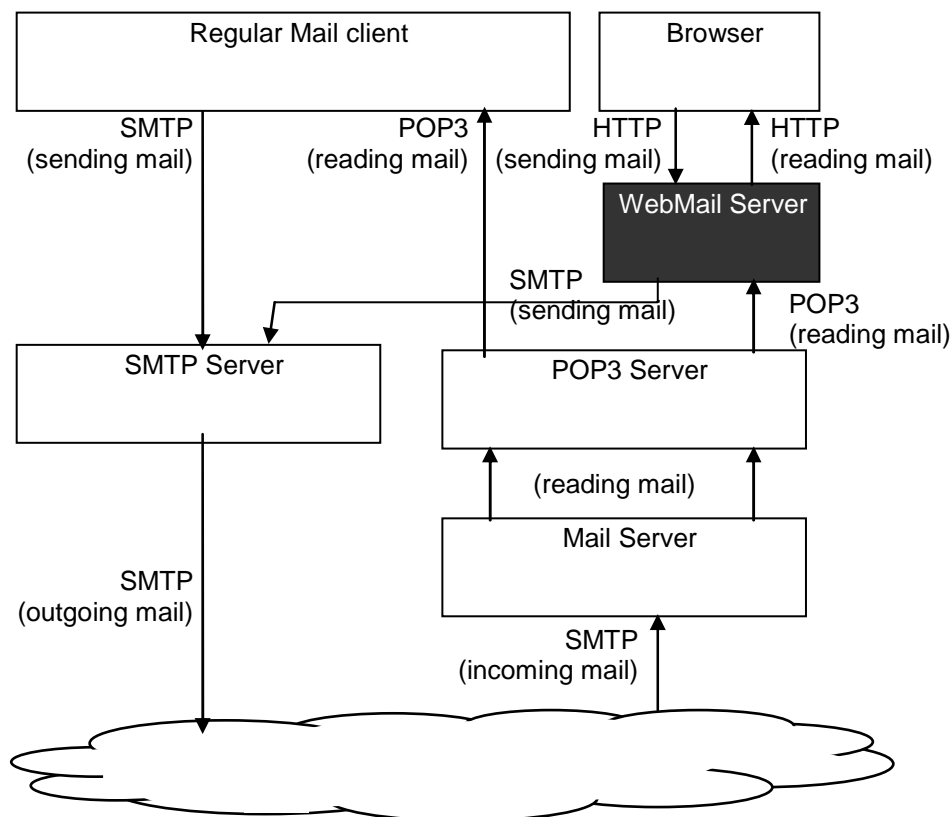


Figure H.2: Webmail protocols

H.3 Webmail interception

The HTTP messages that are exchanged between the Webmail application and the browser are not standardized, i.e. they are fully application dependant, and are therefore subject to potentially many and/or unannounced changes. Additionally, the customer may use a Webmail application from another provider, with obviously yet another implementation and therefore other HTTP messages being exchanged. Therefore, an approach that captures and interprets a HTTP based Webmail protocol will imply implementation and maintainability issues.

Alternative to implementing Webmail protocol interpretation, the SMTP and POP3 interception devices designed regular E-mail interception at the SMTP and POP3 level can be used for intercepting Webmail activity. One issue with this approach is that the IP address from which the customer accesses the Webmail application cannot be easily derived from the captured SMTP/POP3 traffic because this will typically contain the IP address of the Webmail server. Thus, in order to capture the customer's IP address, additional correlation between captured SMTP/POP3 traffic and the HTTP traffic or the web server log files will be required.

In any case, due to the volatility and uncontrolled nature of the Webmail protocols, whatever interception may be possible specifically for Webmail, the expectation should be that E-mail IRI will not be extracted. The advice is to not attempt to define E-mail IRI (or E-mail content) explicitly to accommodate Webmail.

Annex I (informative): Discussion for Driving HI2 of HI3

I.1 Introduction

This clause presents a number of possibilities for intercepting E-mail and shows possible consequences for the HI3 format of the intercepted E-mail message. It is included as in informative annex at this point in time to help generate requirements and focus discussion.

Starting point:

- E-mail messages will be send / received by mail-servers using SMTP over TCP/IP.
- E-mail traffic can be intercepted on various layers in the E-mail transmission protocol.
- In order to intercept an E-mail, the Mail address(es) in the E-mail require inspection.
- In order to check the Mail address(es), processing of the intercepted data may be required.

I.2 Discussion

I.2.1 Introduction

Figure I.1 shows an example protocol stack for transmitting E-mail messages.

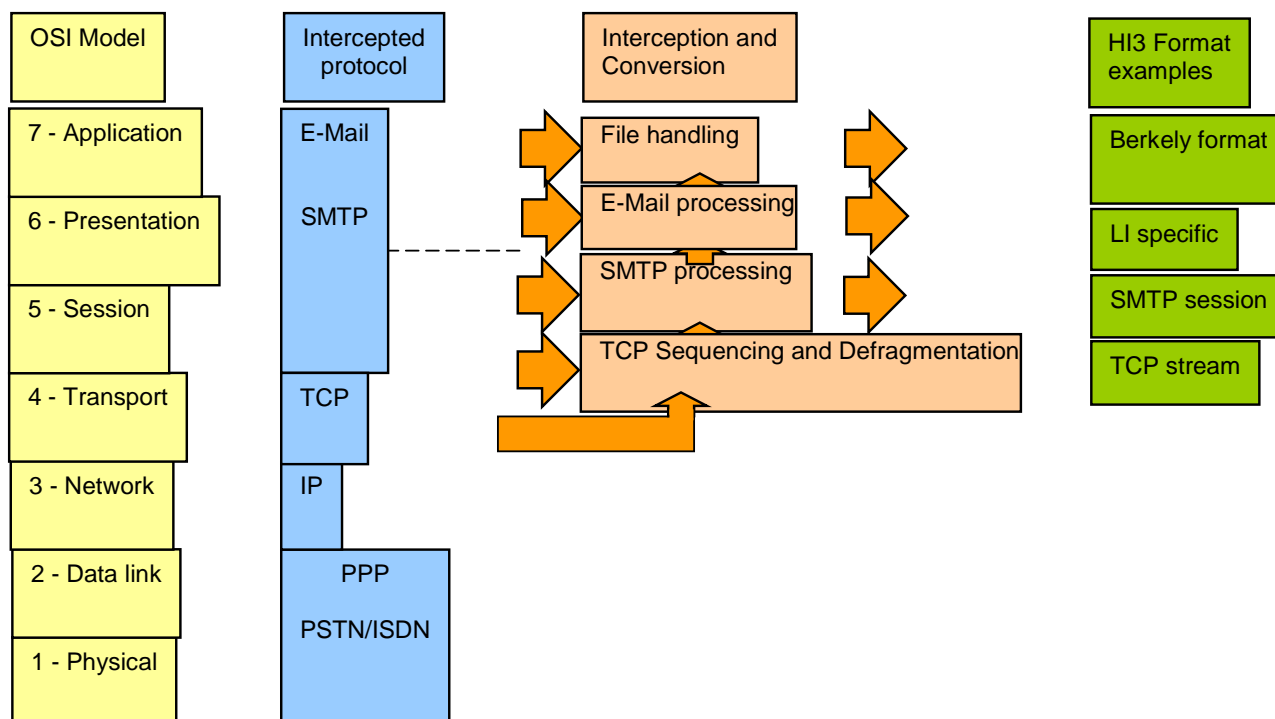


Figure I.1: Discussion diagram

In the following clauses, interception on each of the protocol layers is discussed.

1.2.2 IP packets

Data source: Layer 3 network filter

HI3 Output: N/A

An E-mail message cannot be intercepted by just copying the stream of IP datagrams that may contain E-mail. The problem here is the identification of the right E-mail message, that is, to inspect the message for the target's E-mail address (or even detecting the presence of SMTP traffic in the IP datagrams). Therefore, IP datagrams are only useful as input to further processing, i.e. TCP Sequencing and Reassembly.

1.2.3 TCP packets

Data source: Layer 3/4 network filter

HI3 Output: TCP packets

E-mail messages can be intercepted by inspecting the TCP stream from or to the E-mail server (inspect all port 25 traffic for a given IP address). However, in order to reliably inspect the TCP payload for the occurrence of the target's E-mail address and in order to allow for reconstruction of the E-mail payload in case of a hit, the TCP packets must be re-sequenced and possibly defragmented. If the raw TCP packets were to be inspected as they came in, the occurrence of "out-of-sequence" packets or fragmented TCP packets could prohibit successful identification of the target's E-mail address. Additionally, some interpretation of the SMTP encoding must be performed, in order to not accidentally intercept an E-mail that contains, for example, the target's E-mail address as part of the content. This approach allows delivery of all TCP frames that make up the SMTP session that transmitted the E-mail message. A downside of this approach is that the extraction of HI2 information in relation to the intercepted E-mail is not straightforward.

1.2.4 SMTP packets

Data source: TCP sequencing and defragmentation process; or
Copy forward from E-mail server (SMTP)

HI3 Output: ASCII or raw TCP representation of the SMTP session

More reliable detection of the target's E-mail address and more straightforward extraction of HI2 information can be achieved by processing the SMTP session itself. This requires implementation of an SMTP state machine, similar to that of the receiving end of an E-mail server, but less sophisticated. Data is either received from a TCP sequencing and reassembly process or by means of a CopyForward from an E-mail server (see note). In this approach, all attributes of the E-mail message are available and the HI3 can consist of either an ASCII representation of the SMTP session or of the TCP packets that contain the SMTP session.

NOTE: In latter case, it is also possible to implement interception functionality in the E-mail server itself, so that it can identify a target's E-mail messages and only forward those messages that require interception to the interception platform. The downside of the approach is the need for target information in an operational platform and the possibility of accidental disclosure of the interception (for example due to delivery failure notification in case the interception platform is down).

1.2.5 E-mail messages

Data source: SMTP reassembly process; or
Proprietary interface on the E-mail server

Output: Specific representation of the E-mail message

If the LEA does not allow for sending the data of the SMTP session as HI3 for an intercepted E-mail, further processing of the SMTP data into some specific representation of the E-mail message is required. This format can be LI specific or standardized, e.g. the Berkely format. The latter format could also be copied directly from the E-mail server.

I.3 Conclusion

The approach used for intercepting E-mail has a lot of impact on the HI3 format. Therefore, the various approaches to intercepting E-mail must be discussed, before one or more HI3 formats can be selected.

Annex J (informative): Bibliography

ETSI TR 101 944: "Telecommunications security; Lawful Interception (LI); Issues on IP Interception".

ETSI TR 102 503: "Lawful Interception (LI); ASN.1 Object Identifiers in Lawful Interception Specifications".

Annex K (informative): Change Request History

Status of Technical Specification TS 102 232-2 Service-specific details for E-mail services		
Date	Version	Remarks
January 2004	1.1.1	First publication of TS 102 233 after ETSI/TC LI#04 (14-16 October 2003, Moscow) approval. version 1.1.1 prepared by Jon Sjoberg (Top Layer) (rapporteur)
March 2004	1.2.1	Included Change Request: TS102233CR001r1 (cat B) Introduction of an ASN.1 type for national ASN.1 coded parameters in the ASN.1 module This CR was approved by TC LI#05 (23-25 March 2004, Oxford); version 1.2.1 prepared by Peter van der Arend (KPN) (chairman TC LI)
May 2006	1.3.1	Included Change Request: TS102233CR002r1 (cat B) partial download of e-mail TS102233CR003r1 (cat B) Send username and password in HI2 These CRs were approved by TC LI#12 (9-11 May 2006, Limassol); version 1.3.1 prepared by Mark Lastdrager (Pine Digital Security) (rapporteur)
September 2006	2.1.1	Included Change Request: TS102233CR004 (cat B) IMAP interception TS102233CR005 (cat D) Updates of notes These CRs were approved TC LI#13 (6-8 September 2006, Stockholm); TS 102 233 is converted to part 02 of the multi part specification TS 102 232. version 2.1.1 prepared by Peter van der Arend (KPN) (chairman TC LI)
April 2007	2.2.1	Included Change Request: TS102233-02CR006 (cat F) Message ID for SMTP part of the specification TS102233-02CR007r1 (cat F) Message ID for POP3 part of the specification These CRs were approved TC LI#15, 23-25 April 2007;Riga; version 2.2.1 prepared by Peter van der Arend (KPN) (chairman TC LI)
Rapporteur of the present document is Mark Lastdrager		

History

Document history		
V1.1.1	February 2004	Publication as TS 102 233
V1.2.1	May 2004	Publication as TS 102 233
V1.3.1	September 2006	Publication as TS 102 233
V2.1.1	December 2006	Publication
V2.2.1	May 2007	Publication