
ETSITS 102 587-1 V1.1.1 (2007-04)

Technical Specification

Electromagnetic compatibility and Radio spectrum Matters (ERM); Conformance testing for the Peer-to-Peer Digital Private Mobile Radio; Part 1: Protocol Implementation Conformance Statement (PICS) proforma

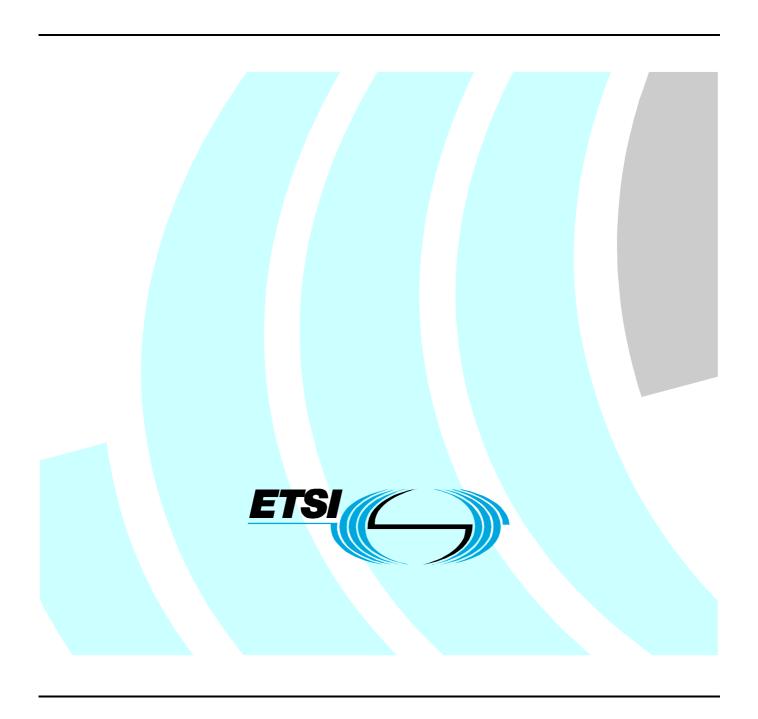

Reference

DTS/ERM-TGDMR-066-1

Keywords digital, mobile, PICS, radio, testing

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2007. All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**TM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**TM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intelle	ectual Property Rights	4
Forev	vord	4
Introd	luction	4
1	Scope	5
2	References	5
3 3.1 3.2	Definitions and abbreviations	5
4	Conformance to this PICS proforma specification.	6
Anne	ex A (normative): Protocol ICS proforma for TS 102 490	7
A.1.1 A.1.2 A.1.3	Guidance for completing the PICS proforma Purposes and structure Abbreviations and conventions Instructions for completing the PICS proforma	7 7 7
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6	Identification of the implementation Date of the statement Implementation Under Test (IUT) identification System Under Test (SUT) identification Product supplier Client (if different from product supplier) ICS contact person	9 10 10 11
A.3	Identification of the protocol	12
A.4	Global statement of conformance	12
A.5	Entity	12
A.6	ISF	12
A.7	CSF	14
A.8 A.8.1 A.8.2 A.8.3	MS features Features Frames Timers	18 19
Histor	rv	20

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document is part 1 of a multi-part deliverable covering the Electromagnetic compatibility and Radio spectrum Matters (ERM); Conformance testing for the Peer-to-Peer Digital Private Mobile Radio, as identified below:

- Part 1: "Protocol Implementation Conformance Statement (PICS) proforma";
- Part 2: "Test Suite Structure and Test Purposes (TSS&TP) specification";
- Part 3: "Requirements catalogue";
- Part 4: "Abstract Test Suite (ATS)";
- Part 5: "Interoperability Test Suite Structure and Test Purposes (TSS & TP) specification".

Introduction

To evaluate conformance of a particular implementation, it is necessary to have a statement of which capabilities and options have been implemented for a telecommunication specification. Such a statement is called a Protocol Implementation Conformance Statement (PICS).

1 Scope

The present document provides the Protocol Implementation Conformance Statement (PICS) proforma for the ERM; Peer-to-Peer Digital Private Mobile Radio using FDMA with a channel spacing of 6,25 kHz with e.r.p. of up to 500 mW as defined in TS 102 490 [1] in compliance with the relevant requirements, and in accordance with the relevant guidance given in ISO/IEC 9646-7 [3] and ETS 300 406 [4].

The present document details in tabular form the implementation options, i.e. the optional functions additional to those which are mandatory to implement.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at http://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

- [1] ETSI TS 102 490 (V1.3.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Peer-to-Peer Digital Private Mobile Radio using FDMA with a channel spacing of 6,25 kHz with e.r.p. of up to 500 mW".
- [2] ISO/IEC 9646-1: "Information technology Open Systems Interconnection Conformance testing methodology and framework Part 1: General concepts".
- [3] ISO/IEC 9646-7: "Information technology Open Systems Interconnection Conformance testing methodology and framework Part 7: Implementation Conformance Statements".
- [4] ETSI ETS 300 406: "Methods for testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 102 490 [1], ISO/IEC 9646-1 [2], ISO/IEC 9646-7 [3] and the following apply:

Implementation Conformance Statement (ICS): statement made by the supplier of an implementation or system claimed to conform to a given specification, stating which capabilities have been implemented

NOTE: The ICS can take several forms: protocol ICS, profile ICS, profile specific ICS, information object ICS, etc.

ICS proforma: document, in the form of a questionnaire, which when completed for an implementation or system becomes an ICS

Protocol ICS (PICS): ICS for an implementation or system claimed to conform to a given protocol specification

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CSF Configured Services and Facilities
dPMR digital Private Mobile Radio
FDMA Frequency Division Multiple Access
FDMA Frequency Division Multiple Access
ICS Implementation Conformance Statement

IP Internet Protocol

ISF Initial Services and Facilities
IUT Implementation Under Test

MS Mobile Station
OACSU Off-air Call Set-up

PICS Protocol Implementation Conformance Statement

PTT Push To Talk SUT System Under Test

4 Conformance to this PICS proforma specification

If it claims to conform to the present document, the actual PICS proforma to be filled in by a supplier shall be technically equivalent to the text of the PICS proforma given in annex A, and shall preserve the numbering/naming and ordering of the proforma items.

A PICS, which conforms to the present document, shall be a conforming PICS proforma completed in accordance with the guidance for completion given in clause A.1.

Annex A (normative): Protocol ICS proforma for TS 102 490

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PICS proforma in this annex so that it can be used for its intended purposes and may further publish the completed PICS.

A.1 Guidance for completing the PICS proforma

A.1.1 Purposes and structure

The purpose of this PICS proforma is to provide a mechanism whereby a supplier of an implementation of the requirements defined in TS 102 490 [1], may provide information about the implementation in a standardized manner.

The PICS proforma is subdivided into clauses for the following categories of information:

- guidance for completing the PICS proforma;
- identification of the implementation;
- identification of the TS 102 490 [1];
- global statement of conformance;
- entity;
- type ISF, CSF;
- MS features:
 - capabilities;
 - frames;
 - timers.

A.1.2 Abbreviations and conventions

The PICS proforma contained in this annex is comprised of information in tabular form in accordance with the guidelines presented in ISO/IEC 9646-7 [3].

Item column

The item column contains a number which identifies the item in the table.

Item description column

The item description column describes in free text each respective item (e.g. parameters, timers, etc.). It implicitly means "is <item description> supported by the implementation?".

Status column

The following notations, defined in ISO/IEC 9646-7 [3], are used for the status column:

- m mandatory the capability is required to be supported.
- o optional the capability may be supported or not.

n/a not applicable - in the given context, it is impossible to use the capability.

x prohibited (excluded) - there is a requirement not to use this capability in the given context.

o.i qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which

identifies an unique group of related optional items and the logic of their selection which is

defined immediately following the table.

ci conditional - the requirement on the capability ("m", "o", "x" or "n/a") depends on the support of

other optional or conditional items. "i" is an integer identifying an unique conditional status

expression which is defined immediately following the table.

i irrelevant (out-of-scope) - capability outside the scope of the reference specification. No answer is

requested from the supplier.

NOTE 1: This use of "i" status is not to be confused with the suffix "i" to the "o" and "c" statuses above.

Reference column

The reference column makes reference to TS 102 490 [1], except where explicitly stated otherwise.

Support column

The support column shall be filled in by the supplier of the implementation. The following common notations, defined in ISO/IEC 9646-7 [3], are used for the support column:

Y or y supported by the implementation.

N or n not supported by the implementation.

N/A, n/a or - no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional

status).

If this PICS proforma is completed in order to describe a multiple-profile support in a system, it is necessary to be able to answer that a capability is supported for one profile and not supported for another. In that case, the supplier shall enter the unique reference to a conditional expression, preceded by "?" (e.g. ?3). This expression shall be given in the space for comments provided at the bottom of the table. It uses predicates defined in the SCS, each of which refers to a single profile and which takes the value TRUE if and only if that profile is to be used.

EXAMPLE 1: ?3: IF prof1 THEN Y ELSE N.

NOTE 2: As stated in ISO/IEC 9646-7 [3], support for a received PDU requires the ability to parse all valid parameters of that PDU. Supporting a PDU while having no ability to parse a valid parameter is non-conformant. Support for a parameter on a PDU means that the semantics of that parameter are supported.

Values allowed column

The values allowed column contains the type, the list, the range or the length of values allowed. The following notations are used:

• range of values: <min value> .. <max value>

example: 5 .. 20

• list of values: <value1>, <value2>, ..., <valueN>

example: 2, 4, 6, 8, 9

example: '1101'B, '1011'B, '1111'B example: '0A'H, '34'H, '2F'H

• list of named values: <name1>(<val1>), <name2>(<val2>), ..., <nameN>(<valN>)

example: reject(1), accept(2)

• length: size (<min size> .. <max size>)

example: size (1 .. 8)

Values supported column

The values supported column shall be filled in by the supplier of the implementation. In this column, the values or the ranges of values supported by the implementation shall be indicated.

References to items

For each possible item answer (answer in the support column) within the PICS proforma a unique reference exists, used, for example, in the conditional expressions. It is defined as the table identifier, followed by a solidus character "/", followed by the item number in the table. If there is more than one support column in a table, the columns are discriminated by letters (a, b, etc.), respectively.

EXAMPLE 2: A.5/4 is the reference to the answer of item 4 in table A.5 of annex A.

EXAMPLE 3: A.6/3b is the reference to the second answer (i.e. in the second support column) of item 3 in table A.6 of annex A.

Prerequisite line

A prerequisite line takes the form: Prerequisite: cpredicate.

A prerequisite line after a clause or table title indicates that the whole clause or the whole table is not required to be completed if the predicate is FALSE.

A.1.3 Instructions for completing the PICS proforma

The supplier of the implementation shall complete the PICS proforma in each of the spaces provided. In particular, an explicit answer shall be entered, in each of the support or supported column boxes provided, using the notation described in clause A.1.2.

However, the tables containing in "Mobile Station MS" clause shall only be completed for MS implementations, and the tables containing in "Base Station BS" clause shall only be completed for BS implementations.

If necessary, the supplier may provide additional comments in space at the bottom of the tables or separately.

More detailed instructions are given at the beginning of the different clauses of the PICS proforma.

A.2 Identification of the implementation

Identification of the Implementation Under Test (IUT) and the system in which it resides (the System Under Test (SUT)) should be filled in so as to provide as much detail as possible regarding version numbers and configuration options.

The product supplier information and client information should both be filled in if they are different.

A person who can answer queries regarding information supplied in the PICS should be named as the contact person.

A.2.1 Date of the statement

A.2.2 IUT name:	Implementation Under Test (IUT) identification
IUT version:	
A.2.3 SUT name:	System Under Test (SUT) identification
Hardware co	onfiguration:
Operating sy	
A.2.4 Name:	Product supplier
Address:	
Telephone n	umber:
Facsimile nu	ımber:
E-mail addre	

Client (if different from product supplier) A.2.5 Name: Address: Telephone number: Facsimile number: E-mail address: Additional information: A.2.6 ICS contact person (A person to contact if there are any queries concerning the content of the ICS). Name: Telephone number: Facsimile number: E-mail address: Additional information:

A.3 Identification of the protocol

This PICS proforma applies to the following standard:

TS 102 490 [1] (V1.3.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Peer-to-Peer Digital Private Mobile Radio using FDMA with a channel spacing of 6,25 kHz with e.r.p. of up to 500 mW".

A.4 Global statement of conformance

Are all mandatory capabilities implemented? (Yes/No)

NOTE: Answering "No" to this question indicates non-conformance to the TS 102 490 specification.

Non-supported mandatory capabilities are to be identified in the PICS, with an explanation of why the

implementation is non-conforming, on pages attached to the PICS proforma.

A.5 Entity

Table A.1: Entity

Item	Entity type	Reference	Status	Support
1	ISF	[1] clause 8.1	0.1	
2	CSF	[1] clause 8.2	0.1	

o.1:	It is mandatory to support exactly one of these items.
Com	ments:
•••••	

A.6 ISF

Table A.2: ISF type

Item	ISF type	Reference	Status	Support
1	Voice	[1] clause 8.1	m	
2	Type 2 data	[1] clause 8.1	0	
3	Type 1 data	[1] clause 8.1	0	

Comments.		

Table A.3: ISF Voice supplementary services

ltem	Service	Reference	Status	Support
1	Late entry	[1] clause 8.1	m	
2	All call	[1] clause 8.1	0	
3	PTT call	[1] clause 8.1	m	
4	Talking Party Identification	[1] clause 8.1	0	

Table A.4: Type 2 data Tele-services Prerequisite: A.2/2 Type 2 data Item Tele-service Reference Status Supp 1 IP over dPMR [1] clause 8.1 o 2 Group Short Data message [1] clause 8.1 m
ItemTele-serviceReferenceStatusSupp1IP over dPMR[1] clause 8.1o
ItemTele-serviceReferenceStatusSupp1IP over dPMR[1] clause 8.1o
1 IP over dPMR [1] clause 8.1 o
nments:
inches.
Table A F. ISE Type 2 data Symplementary consises
Table A.5: ISF Type 2 data Supplementary services
Description A 4/0. Time 0 provided that makes an
Prerequisite: A.4/2 Type 2 group short data message
Item Supplementary service Reference Status Supplementary
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.54Short file transfer[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.5
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.54Short file transfer[1] clause 8.10.5 It is mandatory to support at least one of these items.
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.54Short file transfer[1] clause 8.10.5 It is mandatory to support at least one of these items.
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.54Short file transfer[1] clause 8.10.5 It is mandatory to support at least one of these items.
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.54Short file transfer[1] clause 8.10.5 It is mandatory to support at least one of these items.
Item Supplementary service Reference Status Supplementary 1 Status message [1] clause 8.1 0.5 2 Precoded message [1] clause 8.1 0.5 3 Free text message [1] clause 8.1 0.5 4 Short file transfer [1] clause 8.1 0.5 The supplementary service It is mandatory to support at least one of these items.
ItemSupplementary serviceReferenceStatusSupplementary1Status message[1] clause 8.10.52Precoded message[1] clause 8.10.53Free text message[1] clause 8.10.54Short file transfer[1] clause 8.10.5
Item Supplementary service Reference Status Supplementary 1 Status message [1] clause 8.1 0.5 2 Precoded message [1] clause 8.1 0.5 3 Free text message [1] clause 8.1 0.5 4 Short file transfer [1] clause 8.1 0.5 5: It is mandatory to support at least one of these items. mments:
Item Supplementary service Reference Status Supplementary 1 Status message [1] clause 8.1 0.5 2 Precoded message [1] clause 8.1 0.5 3 Free text message [1] clause 8.1 0.5 4 Short file transfer [1] clause 8.1 0.5 5: It is mandatory to support at least one of these items.
Item Supplementary service Reference Status Supplementary service 1 Status message [1] clause 8.1 0.5 2 Precoded message [1] clause 8.1 0.5 3 Free text message [1] clause 8.1 0.5 4 Short file transfer [1] clause 8.1 0.5 5 It is mandatory to support at least one of these items. It is mandatory to support at least one of these items. It is mandatory to support at least one of these items.
Item Supplementary service Reference Status Supplementary
Item Supplementary service Reference Status Supplementary service Item Supplementary service Item Item Supplementary service Item Item Supplementary service Reference Status Supplementary Item Item
Item Supplementary service Reference Status Supplementary service 1 Status message [1] clause 8.1 0.5 2 Precoded message [1] clause 8.1 0.5 3 Free text message [1] clause 8.1 0.5 4 Short file transfer [1] clause 8.1 0.5 5 It is mandatory to support at least one of these items. It is mandatory to support at least one of these items. It is mandatory to support at least one of these items. It is mandatory to support at least one of these items.

Table A.7: Type 1 data Supplementary services

Prerec	Prerequisite: A.6/2 Type 1 group short data message					
Item	Tele-service	Reference	Status	Support		
1	Status message	[1] clause 8.1	0.7			
2	Precoded message	[1] clause 8.1	0.7			
3	Free text message	[1] clause 8.1	0.7			
4	Short file transfer	[1] clause 8.1	0.7			

o.7: It is mandatory to support at least one of these items.

Comments:		
	 	••••••

A.7 CSF

Table A.8: CSF type

Item	CSF type	Reference	Status	Support
1	Voice	[1] clause 8.2	m	
2	Type 3 data	[1] clause 8.2	0	
3	Type 2 data	[1] clause 8.2	0	
4	Type 1 data	[1] clause 8.2	0	
5	Numbering and dialling	[1] clauses A.2 and A.3	0	

Comments:		

Table A.9: CSF Voice Tele-services

Item	Tele-service	Reference	Status	Support
1	Individual call	[1] clause 8.2	0.9	
2	Group call	[1] clause 8.2	0.9	

o.9:	It is mandatory to support at least one of these items.
Comn	nents:

Table A.10: CSF Voice Individual call supplementary services

Prerec	uisite: A.9/1 CSF individual call			
Item	Supplementary service	Reference	Status	Support
1	Late entry	[1] clause 8.2	m	
2	OACSU	[1] clause 8.2	0	
3	Cancel Call Setup	[1] clause 8.2	0	
4	PTT Call	[1] clause 8.2	0	
5	Slow user data	[1] clause 8.2	0	
6	Short appended data	[1] clause 8.2	0	
7	Talking party identification	[1] clause 8.2	0	

Comments:		

Table A.11: CSF Voice group call supplementary services

Prerec	uisite: A.9/2 CSF group call			
Item	Supplementary service	Reference	Status	Support
1	Late entry	[1] clause 8.2	m	
2	OACSU	[1] clause 8.2	0	
3	Cancel Call Setup	[1] clause 8.2	0	
4	PTT Call	[1] clause 8.2	0	
5	Slow user data	[1] clause 8.2	0	
6	Short appended data	[1] clause 8.2	0	
7	Talking party identification	[1] clause 8.2	0	

	_	uisite: A8/2 CSF Type 3 data			
	Item	Tele-service	Reference	Status	Support
	1	IP over dPMR	[1] clause 8.2	0.12	
	2	Individual Short Data message	[1] clause 8.2	0.12	
nments:		support at least one of these items.			
	•••••				
		able A.13: CSF Type 3 individual sho		ntary ser	vices
	Prerec	quisite: A.12/2 type 1 individual sho	ort data message		
				ntary ser Status	Support
omments:	Prerec	quisite: A.12/2 type 1 individual sho	ort data message Reference	Status	
omments:	Prerec	quisite: A.12/2 type 1 individual sho	ort data message Reference	Status	
omments:	Prerection 1	quisite: A.12/2 type 1 individual sho Supplementary service Short file transfer Table A.14: CSF Type	rt data message Reference [1] clause 8.2	Status m	
mments:	Prerece Prescription Prescrip	Table A.14: CSF Type 2 data	rt data message Reference [1] clause 8.2 2 data Tele-servi	Status m	Support
nments:	Prerece Item	Table A.14: CSF Type 2 data Tele-service	Reference [1] clause 8.2 2 data Tele-servi	Status m	
nments:	Prerece Prescription Prescrip	Table A.14: CSF Type 2 data	rt data message Reference [1] clause 8.2 2 data Tele-servi	Status m	Support

Table A.15: CSF Type 2 individual data Supplementary services

Prerec	Prerequisite: A.14/2 type 2 individual short data message			
Item	Supplementary service	Reference	Status	Support
1	Status message	[1] clause 8.2	o.15	
2	Precoded message	[1] clause 8.2	o.15	
3	Free text message	[1] clause 8.2	o.15	
4	Short file transfer	[1] clause 8.2	o.15	

5: It is m	•				
mments:					
••••••	•••••••••			••••••	•••••
		Table A.16: CSF Type 2 group	data Supplement	ary servi	ces
	Droros	unicita. A 14/2 tupo 2 group chart s	lata magaga		
	Item	uisite: A.14/3 type 2 group short of Supplementary service	Reference	Status	Support
	1	Status message	[1] clause 8.2	0.16	Опррот
	2	Precoded message	[1] clause 8.2	0.16	
				1	
	3		[1] clause 8.2	o.16	
	4	Free text message Short file transfer support at least one of these items.	[1] clause 8.2 [1] clause 8.2	0.16 0.16	
	4	Free text message Short file transfer			
16: It is m omments:	andatory to	Free text message Short file transfer support at least one of these items. Table A.17: CSF Type	[1] clause 8.2	0.16	
	andatory to	Free text message Short file transfer support at least one of these items. Table A.17: CSF Type uisite: A8/4 CSF Type 1 data	[1] clause 8.2 1 data Tele-servi	0.16 ces	
	andatory to	Free text message Short file transfer support at least one of these items. Table A.17: CSF Type uisite: A8/4 CSF Type 1 data Tele-service	1 data Tele-servi	0.16	Support
	Prerequitem	Free text message Short file transfer support at least one of these items. Table A.17: CSF Type uisite: A8/4 CSF Type 1 data Tele-service IP over dPMR	1 data Tele-servi Reference [1] clause 8.2	ces Status 0.17	Support
	andatory to	Free text message Short file transfer support at least one of these items. Table A.17: CSF Type uisite: A8/4 CSF Type 1 data Tele-service	1 data Tele-servi	ces	Support

Table A.18: CSF Type 1 individual data Supplementary services

Prerec	Prerequisite: A.17/2 type 1 individual short data message			
Item	Supplementary service	Reference	Status	Support
1	Status message	[1] clause 8.2	o.18	
2	Precoded message	[1] clause 8.2	o.18	
3	Free text message	[1] clause 8.2	o.18	
4	Short file transfer	[1] clause 8.2	o.18	

o.18: It is mandatory to support at least one of these items.

Comments:

Comments:		

Table A.19: CSF Type 1 group data Supplementary services

Prerequisite: A.17/3 type 1 group short data message				
Item	Supplementary service	Reference	Status	Support
1	Status message	[1] clause 8.2	o.19	
2	Precoded message	[1] clause 8.2	o.19	
3	Free text message	[1] clause 8.2	o.19	
4	Short file transfer	[1] clause 8.2	o.19	

Table A.20: Numbering and dialling
Comments:
o.19: It is mandatory to support at least one of these items.

Item	Procedure	Reference	Status	Support
1	Address space mapping	[1] clause A.2	m	
2	User dialling plan	[1] clause A.3	m	

Comments:				
•••••	•••••	•••••	•••••	

Table A.21: Standard User Interface derived functions

Item	Function	Reference	Status	Support
1	Dialling string convention	[1] clause A.3.1	m	
2	Call initiation	[1] clause A.3.1.1	m	
3	Call type determination	[1] clause A.3.1.2	m	
4	Call modifier	[1] clause A.3.1.3	0	
5	MS address	[1] clause A.3.3.1	m	
6	Talkgroup identification	[1] clause A.3.3.2	m	
7	All call addressing	[1] clause A.3.3.3	m	
8	Invalid numbers	[1] clause A.3.3.4	m	
9	Talkgroup addressing	[1] clause A.3.3.5	m	
10	Caller dialling	[1] clause A.3.4.1	m	
11	Call modifier function	[1] clause A.3.4.2	0	
12	Call abandon	[1] clause A.3.4.3	0	

Comments:			

A.8 MS features

A.8.1 Features

Comments:

Table A.22: MS feature

Item	Feature	Reference	Status	Support
1	Channel access	[1] clause 10	m	
2	Powersave	[1] clause 11	0	

Reference [1] clause 10.1	1 m 2 0 2 m 3 m 4 m 5 m	Support
[1] clause 10.1 lure [1] clause 10.2 e [1] clause 10.3 [1] clause 10.4 [1] clause 10.5	1 m 2 o 2 m 3 m 4 m 5 m	Support
ure [1] clause 10.2 e [1] clause 10.3 [1] clause 10.3 [1] clause 10.4 [1] clause 10.5	2 0 2 m 3 m 4 m 5 m	
e [1] clause 10.2 [1] clause 10.3 [1] clause 10.4 [1] clause 10.5	2 m 3 m 4 m 5 m	
[1] clause 10.4 [1] clause 10.4 [1] clause 10.5	3 m 4 m 5 m	
[1] clause 10.4	4 m 5 m	
[1] clause 10.5	5 m	
nannel Access proced	dure	
	1 0	
Reference		Support
oup [1] clause 10.4		
[1] clause 10.4	4 0.24	
items.		
	oup [1] clause 10.	[1] clause 10.4 0.24

A.8.2 Frames

Table A.25: Frames

Item	Frame	MS s	ending		MS re	ceiving	
		Reference	Status	Support	Reference	Status	Support
1	Frame 1, 2, 3, 4 of Superframe	[1] clause 5.1	m		[1] clause 5.1	m	
2	Header frame	[1] clause 5.2	m		[1] clause 5.2	m	
3	End frame	[1] clause 5.3	m		[1] clause 5.2	m	
4	Packet Header frame	[1] clause 5.4	c2501		[1] clause 5.4	c2501	
5	Packet Data frame	[1] clause 8.3	c2501		[1] clause 8.3	c2501	
6	Acknowledgement	[1] clause 5.5	m		[1] clause 5.5	m	

c2501: IF A.8/2 THEN m ELSE n/a	if Type 3 data then mandatory else not applicable.
Comments:	

A.8.3 Timers

Table A.26: MS CCL timers

Item	CCL Timer	Reference	Status	Support	Value	s
					Allowed	Supported
1	T_ch_chk	[1] clause 10.10.1	m		min. 100 ms	
2	T_ch_free	[1] clause 10.10.1	m		min. 200 ms	
3	Call Duration	[1] clause 10.3	m		max. 180 s	
4	T_ack	[1] clause 10.4.1	m		max 3 s	

Comments:		

History

	Document history				
V1.1.1	April 2007	Publication			