

ETSI TS 102 841 V1.1.1 (2010-04)

Technical Specification

**Digital Enhanced Cordless Telecommunications (DECT);
New Generation DECT;
Extended wideband speech services;
Profile Test Specification (PTS) and Test Case Library (TCL)**



Reference

DTS/DECT-NG258

Keywords

DECT, testing, codec, GAP, IMT-2000,
interoperability, IP, profile, speech

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions.....	9
3.2 Symbols.....	10
3.3 Abbreviations	10
4 Test method	11
4.1 Test platform	11
4.1.1 PP test platform.....	11
4.1.1.1 List content for tests	12
4.1.1.1.1 List of supported lists	12
4.1.1.1.2 Missed calls list	12
4.1.1.1.3 Outgoing calls list.....	12
4.1.1.1.4 Incoming accepted calls list.....	13
4.1.1.1.5 All calls list.....	13
4.1.1.1.6 Contact list.....	15
4.1.1.1.7 Internal names list.....	15
4.1.1.1.8 DECT system settings list.....	16
4.1.1.1.9 Line settings list.....	16
4.1.1.1.10 All incoming calls list.....	17
4.1.2 FP test platform.....	18
4.1.2.1 List content for tests	19
4.1.3 NG-DECT PART1 backward compatibility test platform	19
4.2 Hypothesis	20
4.3 Test groups	20
4.3.1 Network features.....	20
4.3.2 Application features	20
5 Test Cases (TCs)	20
5.1 TC definition conventions	21
5.2 TC naming conventions.....	22
5.3 Portable Part TC purposes.....	23
5.3.1 List of New Generation DECT Part 3 PT tests cases related to NG-DECT Part 1 features.....	23
5.3.2 List of New Generation DECT Part 3 PT tests cases.....	24
5.4 Fixed Part TC purposes	29
5.4.1 List of New Generation DECT Part 3 FT tests cases related to NG-DECT Part 1 features.....	29
5.4.2 List of New Generation DECT Part 3 FT tests cases.....	29
6 Portable Part Test specification.....	36
6.1 TC_PT_NG1.N.1 Codec negotiation tests cases	37
6.2 TC_PT_NG1.N.2 Codec switching tests cases.....	40
6.3 TC_PT_NG1.N.3 Missed call notification tests cases.....	40
6.4 TC_PT_NG1.N.4 Voice message waiting notification tests cases	41
6.5 TC_PT_NG1.N.5 Date and time synchronization tests cases	41
6.6 TC_PT_NG1.N.6 Parallel calls tests cases.....	42
6.7 TC_PT_NG1.N.7 Common parallel call procedures tests cases	45
6.8 TC_PT_NG1.N.8 Call transfer tests cases	51
6.9 TC_PT_NG1.N.9 3-party conference with established external and/or internal calls tests cases	54
6.10 TC_PT_NG1.N.10 Intrusion call tests cases	55
6.11 TC_PT_NG1.N.11 Call deflection (external or internal) tests cases.....	57
6.12 TC_PT_NG1.N.12 Line identification tests cases.....	58

6.13	TC_PT_NG1.N.13 Call identification tests cases	64
6.14	TC_PT_NG1.N.14 Multiple lines tests cases	67
6.15	TC_PT_NG1.N.15 Multiple calls tests cases	71
6.16	TC_PT_NG1.N.16 List access service tests cases.....	74
6.17	TC_PT_NG1.N.17 Calling line identity restriction tests cases	135
6.18	TC_PT_NG1.N.18 Call forwarding (external calls) tests cases	136
6.19	TC_PT_NG1.N.19 DTMF handling tests cases	136
6.20	TC_PT_NG1.N.20 Tones provision tests cases	137
6.21	TC_PT_NG1.N.21 Headset management tests cases	138
6.22	TC_PT_NG1.N.22 Handling of lines where second calls are signalled in-band tests cases	143
6.23	TC_PT_GAP.N.30 Calling Line Identification Presentation tests cases	144
6.24	TC_PT_GAP.N.31 Internal call tests cases.....	144
6.25	TC_PT_GAP.N.34 Calling Name Identification Presentation tests cases.....	145
6.26	TC_PT_GAP.N.35 Enhanced security tests cases.....	147
6.27	TC_PT_NG1.A.1 Easy PIN code registration tests cases	153
6.28	TC_PT_NG1.A.2 Easy pairing registration tests cases	154
6.29	TC_PT_NG1.A.3 Handset locator tests cases	155
6.30	TC_PT_GAP.A.4 Terminal identity number assignment in mono cell system tests cases	155
7	Fixed Part Test specification	156
7.1	TC_FT_NG1.N.1 Codec negotiation tests cases	156
7.2	TC_FT_NG1.N.2 Codec switching tests cases.....	159
7.3	TC_FT_NG1.N.3 Missed call notification tests cases.....	159
7.4	TC_FT_NG1.N.4 Voice message waiting notification tests cases	160
7.5	TC_FT_NG1.N.5 Date and time synchronization tests cases	160
7.6	TC_FT_NG1.N.6 Parallel calls tests cases.....	161
7.7	TC_FT_NG1.N.7 Common parallel call procedures tests cases	163
7.8	TC_FT_NG1.N.8 Call transfer tests cases	171
7.9	TC_FT_NG1.N.9 3-party conference with established external and/or internal calls tests cases	175
7.10	TC_FT_NG1.N.10 Intrusion call tests cases	178
7.11	TC_FT_NG1.N.11 Call deflection (external or internal) tests cases.....	183
7.12	TC_FT_NG1.N.12 Line identification tests cases.....	185
7.13	TC_FT_NG1.N.13 Call identification tests cases	190
7.14	TC_FT_NG1.N.14 Multiple lines tests cases	194
7.15	TC_FT_NG1.N.15 Multiple calls tests cases	200
7.16	TC_FT_NG1.N.16 List access service tests cases.....	204
7.17	TC_FT_NG1.N.17 Calling line identity restriction tests cases	244
7.18	TC_FT_NG1.N.18 Call forwarding (external calls) tests cases	244
7.19	TC_FT_NG1.N.19 DTMF handling tests cases	245
7.20	TC_FT_NG1.N.20 Tones provision tests cases	246
7.21	TC_FT_NG1.N.21 Headset management tests cases	248
7.22	TC_FT_NG1.N.22 Handling of lines where second calls are signalled in-band tests cases	251
7.23	TC_FT_GAP.N.30 Calling Line Identification Presentation tests cases	253
7.24	TC_FT_GAP.N.31 Internal call tests cases.....	253
7.25	TC_FT_GAP.N.34 Calling Name Identification Presentation tests cases.....	255
7.26	TC_FT_GAP.N.35 Enhanced security tests cases.....	255
7.27	TC_FT_NG1.A.1 Easy PIN code registration tests cases	261
7.28	TC_FT_NG1.A.2 Easy pairing registration tests cases	262
7.29	TC_FT_NG1.A.3 Handset locator tests cases	263
7.30	TC_FT_GAP.A.4 Terminal identity number assignment in mono cell system tests cases	263
Annex A (normative): Declarations on features and procedures supported		264
A.1	Declarations for portable part.....	264
A.1.1	Optional PT features.....	264
A.1.2	Extra information for PT testing.....	264
A.1.3	Optional or conditional PT procedures.....	265
A.1.4	PT relevant test cases list.....	267
A.1.4.1	PT is a normal PT (not a headset portable part).....	268
A.1.4.2	PT is a headset portable part	268
A.2	Declarations for fixed part.....	268
A.2.1	Optional FT features.....	268

A.2.2	Extra information for FT testing.....	269
A.2.3	Optional or conditional FT procedures.....	270
A.2.4	FT relevant test cases list.....	274
A.2.4.1	FT handling only 'Common parallel call procedures' lines	274
A.2.4.2	FT handling only 'double call with in-band signalling' lines	274
A.2.4.3	FT handling 'Common parallel call procedures' lines and 'double call with in-band signalling' lines	275
Annex B (informative):	List of NG Part 3 procedures.....	276
History		282

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Digital Enhanced Cordless Telecommunications (DECT).

The present document is based on EN 300 175 parts 1 [1] to 8 [8], EN 300 444 [12], TS 102 527-1 [13] and TS 102 527-3 [14]. General attachment requirements and speech attachment requirements are based on EN 300 176-1 [9], EN 301 406 [11] (replacing TBR 006 [i.2]) and EN 300 176-2 [10] (previously covered by TBR 010 [i.3]). Further details of the DECT system may be found in TR 101 178 [i.1].

The information in the present document is believed to be correct at the time of publication. However, DECT standardization is a rapidly changing area, and it is possible that some of the information contained in the present document may become outdated or incomplete within relatively short time-scales.

All numbers and names used in examples are imaginary. Any similarities to actual persons, places or directory numbers is merely coincidental.

1 Scope

The present document contains the Profile Test Specification (PTS) and the Test Case Library (TCL) for "New Generation DECT; Part 3: Extended wideband speech" (TS 102 527-3 [14]). The present document covers both the Portable (PT) and the Fixed (FT) Radio terminations.

The Test Case Library (TCL) covers also some test cases for "DECT New Generation; part 1; Wideband speech" (TS 102 527-1 [13]) and for the "Generic Access Profile" (EN 300 444 [12]). This is done because such test cases are mandatory or especially relevant for New Generation DECT part 3 (see TS 102 527-3 [14]), and are not covered by existing GAP test specifications.

Due to the ascending compatibility of DECT profiles, all New Generation DECT part 3 devices (see TS 102 527-3 [14]) are required to be also compliant with "DECT New Generation; part 1; Wideband speech" (TS 102 527-1 [13]) and with the "Generic Access Profile" (GAP, EN 300 444 [12]). However, with the exception of some specific test cases, as noted above, the present document does not cover the compliance with GAP that is assumed to be enforced by separate test specifications (see note).

NOTE: The industry de-facto standard practice for insuring the compliance to GAP [12] is the use of TBR 022 [i.4] amended by TBR 022/A1 [i.5], even when these two documents do not have any longer their initial regulatory signification. TBR 022 [i.4] relies on the GAP Profile Test Specification (EN 300 494 parts 1 [i.6] to 3 [i.8]) and on the DECT Test Case Library (EN 300 497 parts 1 [i.9] to 9 [i.17]).

The objective of the present document is to provide a basis for approval tests of NG-DECT Part 3 equipment giving a high probability of air interface inter-operability between different manufacturer's DECT equipment.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this Clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".
- [2] ETSI EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical layer (PHL)".

- [3] ETSI EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".
- [4] ETSI EN 300 175-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".
- [5] ETSI EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".
- [6] ETSI EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".
- [7] ETSI EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".
- [8] ETSI EN 300 175-8: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 8: Speech and audio coding and transmission".
- [9] ETSI EN 300 176-1: "Digital Enhanced Cordless Telecommunications (DECT); Test specification; Part 1: Radio".
- [10] ETSI EN 300 176-2: "Digital Enhanced Cordless Telecommunications (DECT); Test specification; Part 2: Audio and speech".
- [11] ETSI EN 301 406: "Digital Enhanced Cordless Telecommunications (DECT); Harmonized EN for Digital Enhanced Cordless Telecommunications (DECT) covering the essential requirements under article 3.2 of the R&TTE Directive; Generic radio".
- [12] ETSI EN 300 444: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP)".
- [13] ETSI TS 102 527-1: "Digital Enhanced Cordless Telecommunications (DECT); New Generation DECT; Part 1: Wideband Speech".
- [14] ETSI TS 102 527-3: "Digital Enhanced Cordless Telecommunications (DECT); New Generation DECT; Part 3: Extended wideband speech services".
- [15] ISO/IEC 9646-7: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation Conformance Statements".

2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] ETSI TR 101 178: "Digital Enhanced Cordless Telecommunications (DECT); A high Level Guide to the DECT Standardization".
- [i.2] ETSI TBR 006: "Digital Enhanced Cordless Telecommunications (DECT); General terminal attachment requirements".
- [i.3] ETSI TBR 010: "Digital Enhanced Cordless Telecommunications (DECT); General terminal attachment requirements: Telephony applications".
- [i.4] ETSI TBR 022: "Radio Equipment and Systems (RES); Attachment requirements for terminal equipment for Digital Enhanced Cordless Telecommunications (DECT) Generic Access Profile (GAP) applications".
- [i.5] ETSI TBR 022/A1: Amendment to: "Radio Equipment and Systems (RES); Attachment requirements for terminal equipment for Digital Enhanced Cordless Telecommunications (DECT) Generic Access Profile (GAP) applications".
- [i.6] ETSI EN 300 494-1: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile Test Specification (PTS); Part 1: Summary".

- [i.7] ETSI EN 300 494-2: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile Test Specification (PTS); Part 2: Profile Specific Test Specification (PSTS) - Portable radio Termination (PT)".
- [i.8] ETSI EN 300 494-3: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile Test Specification (PTS); Part 3: Profile Specific Test Specification (PSTS) - Fixed radio Termination (FT)".
- [i.9] ETSI EN 300 497-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 1: Test Suite Structure (TSS) and Test Purposes (TP) for Medium Access Control (MAC) layer".
- [i.10] ETSI EN 300 497-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 2: Abstract Test Suite (ATS) for Medium Access Control (MAC) layer - Portable radio Termination (PT)".
- [i.11] ETSI EN 300 497-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 3: Abstract Test Suite (ATS) for Medium Access Control (MAC) layer - Fixed radio Termination (FT)".
- [i.12] ETSI EN 300 497-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 4: Test Suite Structure (TSS) and Test Purposes (TP) - Data Link Control (DLC) layer".
- [i.13] ETSI EN 300 497-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 5: Abstract Test Suite (ATS) - Data Link Control (DLC) layer".
- [i.14] ETSI EN 300 497-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 6: Test Suite Structure (TSS) and Test Purposes (TP) - Network (NWK) layer - Portable radio Termination (PT)".
- [i.15] ETSI EN 300 497-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 7: Abstract Test Suite (ATS) for Network (NWK) layer - Portable radio Termination (PT)".
- [i.16] ETSI EN 300 497-8: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 8: Test Suite Structure (TSS) and Test Purposes (TP) - Network (NWK) layer - Fixed radio Termination (FT)".
- [i.17] ETSI EN 300 497-9: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 9: Abstract Test Suite (ATS) for Network (NWK) layer - Fixed radio Termination (FT)".
- [i.18] ITU-T Recommendation P.311 (2005): "Transmission characteristics for wideband (150-7000 Hz) digital handset telephones".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 102 527-3 [14], TS 102 527-1 [13], EN 300 444 [12] and the following apply.

NG-DECT Part 1 (equipment): equipment complying with TS 102 527-1 [13]

NG-DECT Part 3 (equipment): equipment complying with TS 102 527-3 [14]

NG-DECT Part 1 Golden Device: Golden Device, such as the one administered by the DECT Forum, used for compliance testing of NG-DECT Part 1 [13] equipment

Golden device: ideal example of a device used as reference device for compliance testing and against which later devices are tested and judged

3.2 Symbols

For the purposes of the present document, the following symbols apply:

M	mandatory to support (provision mandatory, process mandatory)
O	optional to support (provision optional, process mandatory)
I	out-of-scope (provision optional, process optional) not subject for testing
C	conditional to support (process mandatory)
N/A	not applicable (in the given context the present document makes it impossible to use this capability)

Provision mandatory, process mandatory means that the indicated feature service or procedure shall be implemented as described in the present document, and may be subject to testing.

Provision optional, process mandatory means that the indicated feature, service or procedure may be implemented, and if implemented, the feature, service or procedure shall be implemented as described in the present document, and may be subject to testing.

NOTE: The used notation is based on the notation proposed in ISO/IEC 9646-7 [15].

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AC	Authentication Code
CC	Call Control
CFB	Call forwarding on Busy subscriber
CFNA	Call forwarding on No Answer
CFU	Call forwarding Unconditional
CI	Common Interface
CLIP	Calling Line Identification Presentation
CLIR	Calling Line Identification Restriction
CNIP	Calling Name Identification Presentation
DECT	Digital Enhanced Cordless Telecommunications
DLC	Data Link Control
DTMF	Dual Tone Multi-Frequency
FP	Fixed Part
FT	Fixed radio Termination
GAP	Generic Access Profile
HPP	Headset Portable Part
HTTP	HyperText Transfer Protocol
IE	Information Element
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
IWU	InterWorking Unit
IXIT	Implementation eXtra Information for Testing
LiA	List Access
MAC	Medium Access Control
MM	Mobility Management
MMI	Mand and Machine Interface
NB	Narrow Band
NDT	Network Delay Type
NG	New Generation
NG-DECT	New Generation DECT
NWK	NetWorK
PHL	PHysical Layer
PIN	Personnal Identification Number
PP	Portable Part

PT	Portable radio Termination
PTS	Profile Test Specification
RF	Radio Frequency
TCL	Test Case Library
TS	Test System
VoIP	Voice over IP
WB	WideBand

4 Test method

This Clause describes the test method used to test the NG-DECT Part 3 devices.

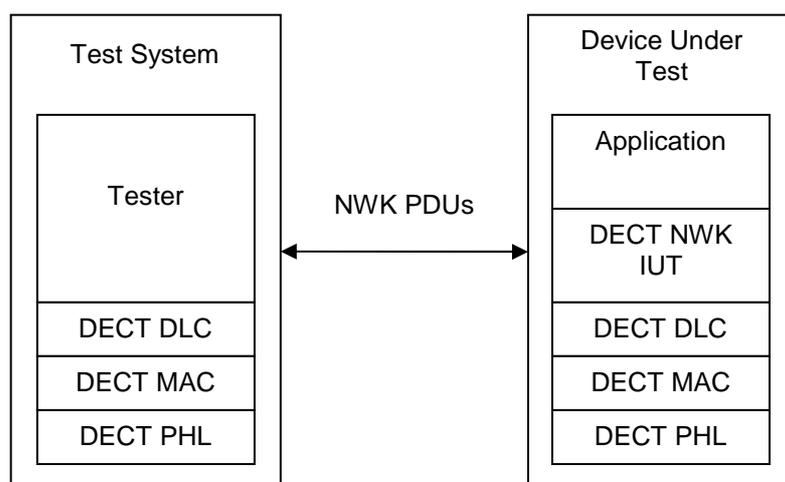



Figure 1: New Generation DECT remote test method

Tester: A tester is located in a remote DECT test system. It controls and observes the behaviour of the Implementation Under Test (IUT). The TS behaves as a FP (or a PP) when testing a PP (respectively a FP).

4.1 Test platform

4.1.1 PP test platform

The PP test platform is depicted on figure 2.

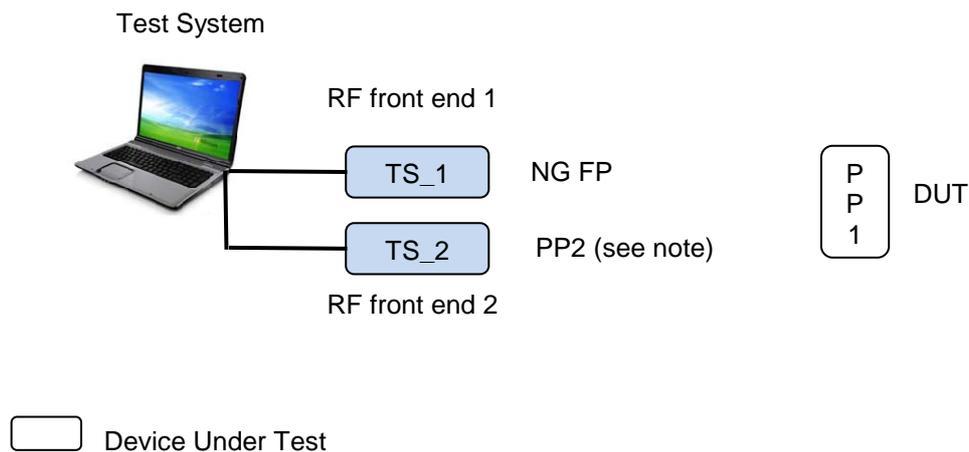

NOTE: PP2 behaves either as a NG PP or a legacy GAP PP according to test case

Figure 2: PP test platform

The first RF front-end of Test system "TS_1" plays the role of a NG FP to which the tested PP is paired.

The following devices are needed to perform parallel call test cases: either a NG PP or a GAP legacy PP. The second RF front-end of Test system "TS_2" plays the role of one of these PPs according to test case condition.

4.1.1.1 List content for tests

The following list contents will be used by the tester when running List access PP test cases.

4.1.1.1.1 List of supported lists

All lists are supported (list identifiers from 00H to 09H).

4.1.1.1.2 Missed calls list

Presence of 3 missed calls with a total number of 10 entries in the list.

Table 1: Missed calls test list content

Number	Name	Date and time	Unread	Line name	Line id	Nb of calls
497312456897	JENDREZEJZAK	09/09/09 06:45:00	1	Provider 1	0, 0, 0	2
0145567897		06/09/09 18:48:00	1	Provider 1	0, 0, 0	3
00441324778824	C.Alexander	06/09/09 15:36:36	0	Provider 1	0, 0, 0	1
0321259514	LE BIHAN	06/09/09 15:36:00	1	Provider 2	0, 0, 1	1
0296301005		06/09/09 12:35:00	0	Provider 1	0, 0, 0	1
008989945270	M.UWE	02/09/09 11:17:00	0	Provider 3	0, 0, 2	1
0177476923	C.FENRIJO	01/09/09 14:08:00	0	Provider 1	0, 0, 0	1
4526300099446770	B.ZIMMERMANN	30/08/09 18:50:00	0	Provider 3	0, 0, 2	1
0675000209	R.ALOUSSI	22/08/09 12:00:00	0	Provider 1	0, 0, 0	1
0247413706	VAN DER VYNC	20/08/09 18:15:00	0	Provider 2	0, 0, 1	1

Properties

For all fields, editable=0.

4.1.1.1.3 Outgoing calls list

Total number of 10 entries in the list.

Table 2: Outgoing calls test list content

Number	Name	Date and time	Line name	Line id
008989945270	UWE	08/09/09 13:13:13	Provider 1	0, 0, 0
0145567897		07/09/09 09:09:09	Provider 1	0, 0, 0
0675000321	WOJCIECHOSKI	06/09/09 08:33:33	Provider 1	0, 0, 0
0612345678	FENJIRO	06/09/09 08:22:22	Provider 2	0, 0, 2
0490413002	FENJIRO	06/09/09 08:12:12	Provider 2	0, 0, 2
00550123456789	G. DEL PIETRO	03/09/09 07:07:07	Provider 3	0, 0, 0
4526300099446770	B.ZIMMERMANN	31/08/09 23:23:23	Provider 1	0, 0, 0
00449876543210	C.ALEXANDER	31/08/09 16:16:16	Provider 3	0, 0, 2
0296301005		28/08/09 17:17:17	Provider 1	0, 0, 0
02298951214	LAGADEC	27/08/09 18:18:18	Provider 1	0, 0, 0

Properties

For all fields, editable=0.

4.1.1.1.4 Incoming accepted calls list

Total number of 10 entries in the list.

Table 3: Incoming accepted calls test list content

Number	Name	Date Time	Line name	Line id
02298951214	J.LAGADEC	07/09/09 12:12:12	Provider 1	0, 0, 0
0321259514	LE BIHAN	06/09/09 18:36:18	Provider 2	0, 0, 1
0308980764		06/09/09 08:24:24	Provider 1	0, 0, 0
0581321185	K.BORDONADO	06/09/09 08:16:16	Provider 1	0, 0, 0
00441324778824	C.Alexander	06/09/09 08:16:08	Provider 1	0, 0, 0
00550123456789	G. DEL PIETRO	02/09/09 09:18:09	Provider 3	0, 0, 2
0296301005		01/09/09 20:40:20	Provider 1	0, 0, 0
00449876543210	C.ALEXANDER	31/08/09 12:24:12	Provider 3	0, 0, 2
0425960406	D.LE BRAZ	25/08/09 18:36:18	Provider 2	0, 0, 1
0675000321	WOJCIECHOSKI	22/08/09 11:22:11	Provider 1	0, 0, 0

Properties

For all fields, editable=0.

4.1.1.1.5 All calls list

Total number of 30 entries in the list.

Table 4: All calls test list content

Call Type	Number	Name	Date and time	Line name	Line id
Missed	497312456897	JENDREZEJZAK	09/09/09 06:45:00	Provider 1	0, 0, 0
Outgoing	008989945270	UWE	08/09/09 13:13:13	Provider 1	0, 0, 0
Accepted	02298951214	J.LAGADEC	07/09/09 12:12:12	Provider 1	0, 0, 0
Outgoing	0145567897		07/09/09 09:09:09	Provider 1	0, 0, 0
Missed	0145567897		06/09/09 18:48:00	Provider 1	0, 0, 0
Accepted	0321259514	LE BIHAN	06/09/09 18:36:18	Provider 2	0, 0, 1
Missed	00441324778824	C.Alexander	06/09/09 15:36:36	Provider 1	0, 0, 0
Missed	0321259514	LE BIHAN	06/09/09 15:36:00	Provider 2	0, 0, 1
Missed	0296301005		06/09/09 12:35:00	Provider 1	0, 0, 0
Outgoing	0675000321	WOJCIECHOSKI	06/09/09 08:33:33	Provider 1	0, 0, 0
Accepted	0308980764		06/09/09 08:24:24	Provider 1	0, 0, 0
Outgoing	0612345678	FENJIRO	06/09/09 08:22:22	Provider 3	0, 0, 2
Accepted	0581321185	K.BORDONADO	06/09/09 08:16:16	Provider 1	0, 0, 0
Accepted	00441324778824	C.Alexander	06/09/09 08:16:08	Provider 1	0, 0, 0
Outgoing	0490413002	FENJIRO	06/09/09 08:12:12	Provider 3	0, 0, 2
Outgoing	00550123456789	G. DEL PIETRO	03/09/09 07:07:07	Provider 1	0, 0, 0
Missed	008989945270	M.UWE	02/09/09 11:17:00	Provider 3	0, 0, 2
Accepted	00550123456789	G. DEL PIETRO	02/09/09 09:18:09	Provider 3	0, 0, 2
Accepted	0296301005		01/09/09 20:40:20	Provider 1	0, 0, 0
Missed	0177476923	C.FENRIJO	01/09/09 14:08:00	Provider 1	0, 0, 0
Outgoing	4526300099446770	B.ZIMMERMANN	31/08/09 23:23:23	Provider 1	0, 0, 0
Outgoing	00449876543210	C.ALEXANDER	31/08/09 16:16:16	Provider 3	0, 0, 2
Accepted	00449876543210	C.ALEXANDER	31/08/09 12:24:12	Provider 3	0, 0, 2
Missed	4526300099446770	B.ZIMMERMANN	30/08/09 18:50:00	Provider 3	0, 0, 2
Outgoing	0296301005		28/08/09 17:17:17	Provider 1	0, 0, 0
Outgoing	02298951214	LAGADEC	27/08/09 18:18:18	Provider 1	0, 0, 0
Accepted	0425960406	D.LE BRAZ	25/08/09 18:36:18	Provider 2	0, 0, 1
Missed	0675000209	R.ALOUSSI	22/08/09 12:00:00	Provider 1	0, 0, 0
Accepted	0675000321	WOJCIECHOSKI	22/08/09 11:22:11	Provider 1	0, 0, 0
Missed	0247413706	VAN DER VYNC	20/08/09 18:15:00	Provider 2	0, 0, 1

Properties

For all fields, editable=0.

4.1.1.1.6 Contact list

Total number of 10 entries in the list.

Table 5: Contact list test content

Name	First name	Contact number1	Contact number2 (note 1)	Associated Melody (note 2)	Line id
ALEXANDER	Christian	(fixed) 00441324778824	(work) 00449876543210	1	0, 0, 2
ALEXANDER	Christina	(fixed) 00441324778812		2	0, 0, 2
ALOSSI	RAMIN	(fixed) 0156891247	(mobile) 0675000209	3	0, 0, 0
BORDONADO	Karlità	(work) 0581321185		4	0, 0, 0
DEL PIETRO	David	(fixed) 00550123456789		5	0, 0, 0
FENJIRO	Carlos	(work) 0490413002	(mobile) 0612345678	6	0, 0, 2
LAGADEC	Jérôme	(work) 02298951214		7	0, 0, 0
WALKER	BARCLAY	(mobile) 06123123		8	0, 0, 2
UWE	MARCUS	(work) 008989945270	(fixed) 00491603794505	9	0, 0, 0
WOJCIECHOSKI		(mobile) 0675000321		10	0, 0, 1

NOTE 1: Contact number2 entry field should be only sent by the tester when the manufacturer has declared the support of several 'Contact number' fields in the contact list.
NOTE 2: 'Associated melody' field is optional on PP side, anyhow it should be handled in each entry when received in data packet.

Properties

For all fields, editable=1.

4.1.1.1.7 Internal names list

Total number of 4 entries in the list.

Table 6: Internal names test list content

Number	Name	Call interception
31H	Kitchen	30H
32H	Living-room	30H
33H	Office	31H
39H	Boby room	30H

Properties

- Number field: editable=0, internal=1, own=0
- Name field: editable=1
- Call interception field: editable=1

4.1.1.1.8 DECT system settings list

Table 7: DECT system settings test list content

Entry identifier	Settings	Editable	PIN protected	Value
1	Current PIN code	1	0	FFH, FFH, 12H, 34H
	Clock master	1	0	30H (FP)
	Base reset	1	0	30H (No)
	FP IP address / type	1	0	DHCP=0, Static=1
	FP IP address / value	1	0	IPv4/6=0, 'C0A8D40C'H (192.168.212.12)
	FP IP address / subnet mask	1	0	IPv4/6=0, 'FFFFFF00'H (255.255.255.0)
	FP IP address / gateway	1	0	IPv4/6=0, 'C0A8D401'H (192.168.212.1)
	FP IP address / DNS server	1	0	IPv4/6=0, 'C0A8D401'H (192.168.212.1)
	FP version / Firmware version	0	0	"F1.2C8"
	FP version / Eeprom version	0	0	"E1.5C6"
	FP version / Hardware version	0	0	"H1.4A2"
	Emission mode	1	0	NEM=0 (deactivated)
	New PIN code	1	1	FFH, FFH, 12H, 34H

4.1.1.1.9 Line settings list

Total number of 2 entries in the list.

Table 8: Line settings test list content

Entry identifier	Settings	Editable	Value
1	Line Name	1	"Provider VoIP1"
	Line id	0	0, 0, 0
	Attached handsets	1	Nb=03H, bitmap=03H, 82H (PP1, PP2, PP9)
	Dialling Prefix	1	""
	FP melody	1	08H
	FP volume	1	30H
	Blocked number	1	"08*"
	Multiple calls mode	1	30H (Single call mode)
	Intrusion call	1	30H (Not allowed)
	Permanent CLIR	1	Value=30H (deactivated), CLIR activation code="R*1-2*" CLIR deactivation code="R#1-9#"
	Call forwarding Unconditional	1	Value=30H (deactivated), CFU activation code="*22" CFU deactivation code="*33" Nb = "0698765432"
	Call forwarding on No Answer	1	Value=30H (deactivated), Nb of seconds=19H (25) CFNA activation code="#44" CFNA deactivation code="#55" Nb = "0212345678"
	Call forwarding on Busy subscriber	1	Value=30H (deactivated), CFB activation code="*66" CFB deactivation code="#77" Nb = "0612345678"

Entry identifier	Settings	Editable	Value
2	Line Name	1	"Provider VoIP2"
	Line id	1	0, 0, 1
	Attached handsets	1	Nb=01H, bitmap=84H (PP3)
	Dialling Prefix	1	"3651"
	FP melody	1	03H
	FP volume	1	30H
	Blocked number	1	"06*"
	Multiple calls mode	1	30H (Single call mode)
	Intrusion call	1	30H (Not allowed)
	Permanent CLIR	1	Value=30H (deactivated), CLIR activation code="#88#" CLIR deactivation code="#99#"
	Call forwarding Unconditional	1	Value=30H (deactivated), CFU activation code="" CFU deactivation code="" Nb = ""
	Call forwarding on No Answer	1	Value=30H (deactivated), Nb of seconds=00H CFNA activation code="" CFNA deactivation code="" Nb = ""
Call forwarding on Busy subscriber	1	Value=30H (deactivated), CFB activation code="" CFB deactivation code="" Nb = ""	

4.1.1.1.10 All incoming calls list

Total number of 20 entries in the list.

Table 9: All incoming calls test list content


Number	Name	Date and time	New	Line name	Line id	Nb of calls
497312456897	JENDREZEJZAK	09/09/09 06:45:00	1	Provider 1	0, 0, 0	2
02298951214	J.LAGADEC	07/09/09 12:12:12	0	Provider 1	0, 0, 0	1
0145567897		06/09/09 18:48:00	1	Provider 1	0, 0, 0	3
0321259514	LE BIHAN	06/09/09 18:36:18	0	Provider 2	0, 0, 1	1
00441324778824	C.Alexander	06/09/09 15:36:36	0	Provider 1	0, 0, 0	1
0321259514	LE BIHAN	06/09/09 15:36:00	1	Provider 2	0, 0, 1	1
0296301005		06/09/09 12:35:00	0	Provider 1	0, 0, 0	1
0308980764		06/09/09 08:24:24	0	Provider 1	0, 0, 0	1
0581321185	K.BORDONADO	06/09/09 08:16:16	0	Provider 1	0, 0, 0	1
00441324778824	C.Alexander	06/09/09 08:16:08	0	Provider 1	0, 0, 0	1
008989945270	M.UWE	02/09/09 11:17:00	0	Provider 3	0, 0, 2	1
00550123456789	G. DEL PIETRO	02/09/09 09:18:09	0	Provider 3	0, 0, 2	1
0296301005		01/09/09 20:40:20	0	Provider 1	0, 0, 0	1
0177476923	C.FENRIJO	01/09/09 14:08:00	0	Provider 1	0, 0, 0	1
00449876543210	C.ALEXANDER	31/08/09 12:24:12	0	Provider 3	0, 0, 2	1
4526300099446770	B.ZIMMERMANN	30/08/09 18:50:00	0	Provider 3	0, 0, 2	1
0425960406	D.LE BRAZ	25/08/09 18:36:18	0	Provider 2	0, 0, 1	1
0675000209	R.ALOUSSI	22/08/09 12:00:00	0	Provider 1	0, 0, 0	1
0675000321	WOJCIECHOSKI	22/08/09 11:22:11	0	Provider 1	0, 0, 0	1
0247413706	VAN DER VYNC	20/08/09 18:15:00	0	Provider 2	0, 0, 1	1

Properties

For all fields, editable=0.

4.1.2 FP test platform

The fixed part under test shall be connected to a network when running the tests suite. It shall be ready to initiate an outgoing call or to receive an incoming call. An example of FP test platform is depicted on figure 3.

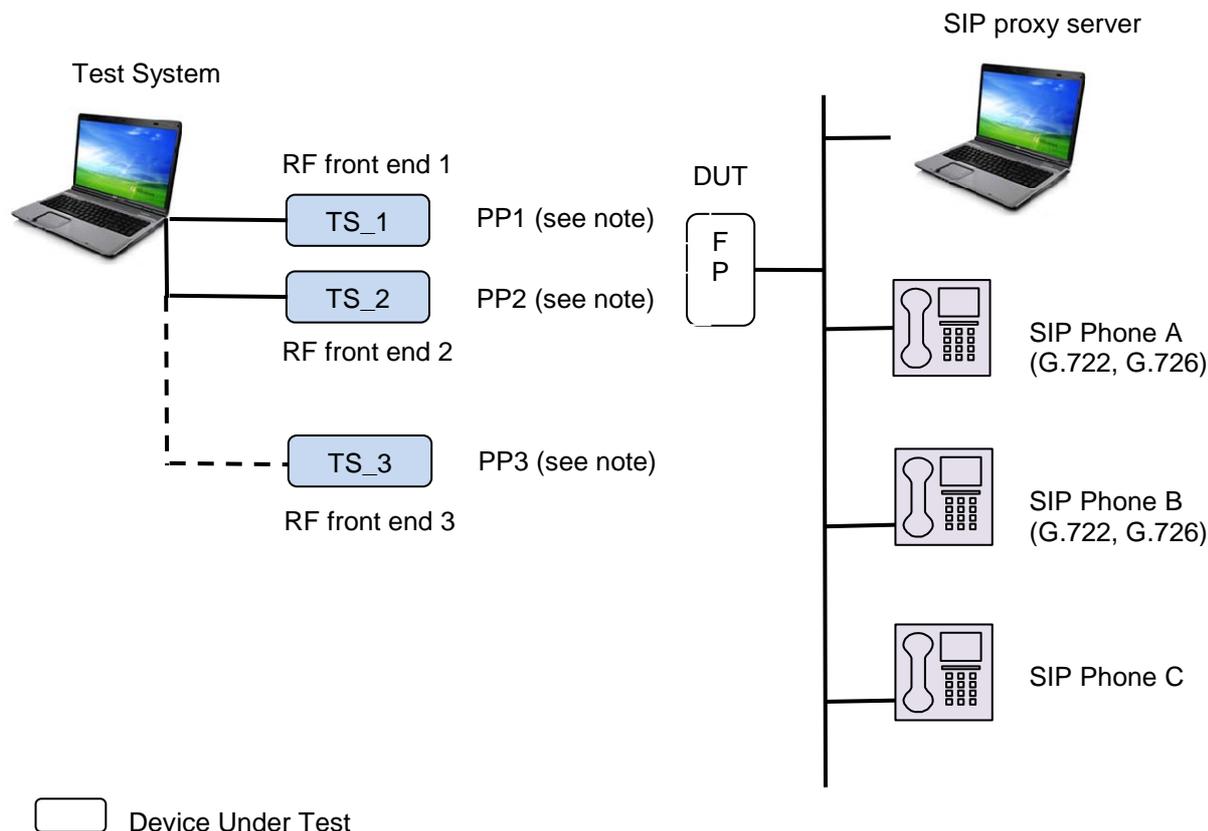

NOTE: PP1, PP2 and PP3 behave either as a NG PP, a legacy GAP PP, or a headset PP according to test case.

Figure 3: Example of FP Test platform

The first RF front-end of Test system "TS_1" plays the role of a NG PP or a GAP PP paired on the tested FP.

The following devices are needed:

- One other PP for internal call test cases: a NG PP and a GAP legacy PP (see note 1).
- One call server (e.g. a SIP server).
- A first phone 'Phone A' (e.g. SIP phone supporting G.722 and G.726 codecs) for first call test cases (see note 2).
- A second phone 'Phone B' (e.g. SIP phone supporting G.722 and G.726 codecs) for parallel call test cases (see note 2).
- A third phone 'Phone C' for call deflection and call forward test cases.
- A handset PP for headset call test cases (see notes 1 and 3).
- A third headset is needed for few test cases (internal general call and switching from headset to handset): any GAP PP can be used.

- A third phone only capable of G.726 is required for one headset test case.

NOTE 1: The second RF front-end of Test system "TS_2" plays the role of one of these PPs according to test case condition: NG PP, GAP PP or headset PP.

NOTE 2: When running "Multiple lines" test cases, phone A is on line 0 and phone B on line 1. These line identifiers values are generic identifier values standing for the line identifiers defined by the system.

NOTE 3: To behave like a headset, the TS has just to set the corresponding terminal capability bit "Support of the "Headset management" feature" and to send a "call interception request from HPP" command in {CC-SETUP} message.

This platform is based on SIP protocol exchanges between the FP and the network. It must be considered as an example as the FP under test may not be designed for SIP network (e.g. H323, PBX, etc.). However, no matter which network is used, it shows the minimum devices needed to run the FP test cases.

4.1.2.1 List content for tests

When running List access FP test cases, the 'Current PIN code' field shall be set to (FFH, FFH, 12H, 34H). Thus, the test equipment can automatically edit and save the 'Current PIN code' field of 'DECT system settings' list before editing 'PIN protected' field (see Clause 5.1).

4.1.3 NG-DECT PART1 backward compatibility test platform

It is crucial to ensure interoperability between NG-DECT PART3 devices and legacy NG-DECT PART1 devices. In order to gain maximum interoperability to the NG-DECT PART1 devices a test against the legacy Golden Devices (FT and PT) is absolutely necessary.

In order to keep the required effort as low as possible, it is proposed to add just some basic tests such as incoming call WB, outgoing call WB and service change WB->NB.

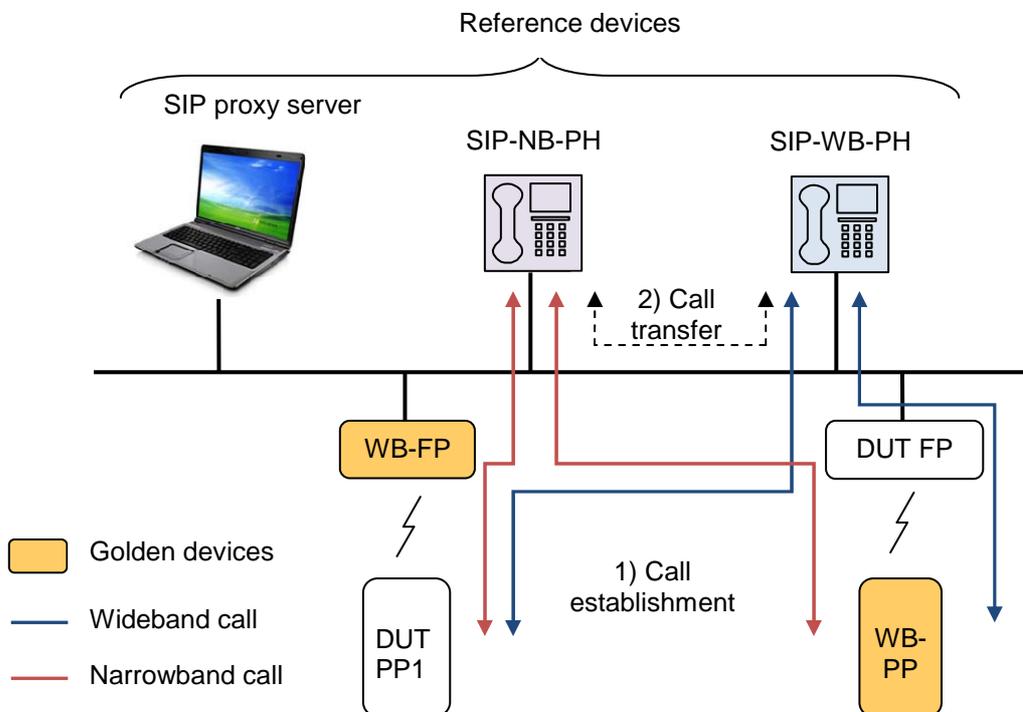


Figure 4: Test platform for NG-DECT PART1 backwards compatibility tests

The following devices are needed:

- Golden devices:
 - Two Golden NG-DECT PART1 handsets (WB-PP).
 - Two Golden NG-DECT PART1 base stations (WB-FP).
- Reference devices:
 - One corded wideband SIP phone (SIP-WB-PH).
 - One corded narrowband SIP phone (SIP-NB-PH).
- SIP server.
- Device under test:
 - Wideband handset (DUT-PP);or
 - Wideband base station (DUT-FP).

4.2 Hypothesis

Protocol layers tested

Network and application features are only tested. DLC, MAC, and PHY procedures used by new DECT generation standard are supposed to be tested when testing network features.

Speech services tested

Device under test is required to support only mandatory speech services. The optional codecs are out of the scope of the present document.

Length of a NWK layer message

The test equipment shall not send NWK layer messages longer than 63 bytes (see EN 300 444 [12], Clause 6.9.3). In the other direction, the test equipment shall be capable of receiving and processing NWK layer messages of at least 63 octets long. A received NWK layer message longer than 63 bytes shall be discarded.

4.3 Test groups

4.3.1 Network features

See TS 102 527-3 [14], Clauses 5.2, 6.4 and 6.10.

4.3.2 Application features

See TS 102 527-3 [14], Clauses 5.7, 6.9 and 6.13.

5 Test Cases (TCs)

Each test case is allocated directly under a defined TC.

5.1 TC definition conventions

The TCs are defined following particular rules as shown in table 10.

Table 10: TC definition rules

TC Id according to the TC naming conventions	Test case objective
Reference:	The reference should contain the references of the subject to be validated by the actual TC (specification reference, Clause, paragraph, flow chart number, etc.)
Initial condition:	The condition defines in which initial state the IUT has to be to apply the actual TC.
Stimulus:	The stimulus defines the test event to which the TC is related
Pass criteria:	Definition of the events or parameters that are expected from the IUT to conform to the base specification
Comments: (optional)	Additional information or comments on test case content

The device under test and the test equipment shall meet the features and procedures specified in "New Generation DECT; Part 3: Extended wideband speech" (see TS 102 527-3 [14]). Nevertheless, only checked protocol elements are specifically described in the test case. Even if a NG PART3 requirement is not specified in a stimulus or a pass criteria test step, this does not mean it should not be implemented or tested. This simply means that this requirement is out of scope of this test case and will be tested elsewhere. As a result, the "New Generation DECT; Part 1: Wideband speech" (TS 102 527-1 [13]) and the delta to the "Generic Access Profile" (EN 300 444 [12]) features will be tested with the NG Part 3 requirements implemented (e.g. call identification, line identification...).

TC Id

The TC Id is a unique identifier; it shall be specified according to the TC naming conventions defined in the Clause below.

Reference

When a flowchart number is given in reference, this flowchart is only a recommendation to implement the test case. As a result, the TS must be flexible enough to deal with several IUT implementations (dynamic behaviour).

Initial condition

When a test necessitates other PP registered (NG PP or legacy GAP PP), it is stipulated.

By default (i.e. no other PP specified), the TS_1 and the IUT are involved together in the CC instance whose CC control state is stipulated in the initial condition.

A test case reference is given when this TC has to be run to reach the initial condition (for example: "Run TC_FT_NG1.N.16_BV_1802"). That means that this test case shall be run before the current one.

Pass criteria

- Checking "end-to-end U-plane connection" criteria: this is an operation to detect the state of the U-plane connection. The acoustical path will be checked in both directions. When testing a PP, Test system could perform an audio loopback and introduce a delay (e.g. 1s) to create an echo. When testing a FP, Test system could use a tone generation. In both cases, Test system could also use a handset receiver plugged in the equipment.
- Some parameters used in TCs can be allocated by the IUT (e.g. call id, terminal identity number, session id, line id, etc.) or be network dependant (line type information for each line) as a consequence a generic notation is used in the TC description (respectively "call id A", " IA5 coding of terminal identity number in decimal of PP1", session id n, line 0, lt0, etc.).

Line type information

- When testing a PP, by default if it is not specified, the simulated lines are full VoIP lines and so the 'Line type information' field in <<CALL-INFORMATION>> IE shall be coded as follows:
 - The 'Network delay type ('NDT') = '1'B, indicating that the line is a 'significant delay' line.

- The 'Second call type' ('SCT') = '0'B, indicating that second calls are handled with 'common parallel call' procedures.
- When testing a FP, the 'Line type information' field in <<CALL-INFORMATION>> is line dependant for the 'Network delay type' ('NDT') information. The 'Second call type' ('SCT') information shall be coded according to the manufacturer's declarations for Line 0 and Line 1 (see Table A.16 and Table A.17).

Internal call Initiation

- When initiating an internal call, a PP under test could access to the internal names list. The test equipment shall be ready to accept both methods: with and without access to the internal names list.

List access service tests cases

- In order to make lighter the NG1.N.16 List access service test cases, stimulus and pass criteria make reference only to the list access commands sent or expected. However, the tester and IUT shall comply with NG PART 3 requirements (see TS 102 527-3 [14], Clause 7.4.10.1). As a consequence, when receiving commands in pass criteria, each command shall be received in a {IWU-Info} message with information element <<IWU to IWU>> using the protocol discriminator '03'H. Respectively, when sending commands in stimulus, the tester shall use the same transport message.
- When testing the PP, entries can be displayed one by one or several together depending on display capabilities of the tested IUT.
- When testing the FP, some field of the 'DECT system setting', 'Line setting', or 'Internal names' lists can be 'PIN protected'. When reading a 'PIN protected' field, the 'PIN protected' property bit will be set to 1. As a result, the test equipment shall automatically edit and save the 'Current PIN code' field of 'DECT system settings' list before editing this field (see TS 102 527-3 [14], Clause 7.4.11.1).

NOTE: In order to simplify the implementation, it is also possible to systematically edit and save the 'Current PIN code' field before opening the possible protected lists as the authentication is valid for the whole List access service call.

5.2 TC naming conventions

Each feature to be tested corresponds to a group of test cases identified by its standard feature number.

The identifier of the TC is built according to table 11.

Table 11: TC naming convention

TC_<rt>_<fn>_<tt>_<ppnn>		
<rt> = type of radio termination	FT PT	Fixed radio Termination Portable radio Termination
<fn> = feature number	NG1.N.x GAP.N.x NG1.A.x GAP.A.x	New generation Network feature GAP Network feature New generation Application feature GAP Application feature
<tt> = Type of testing	BV GC WC	Valid Behaviour Tests GAP backward compatibility Tests (see note 1) NG-DECT PART 1 backward compatibility Tests (note 2)
<pp> = procedure number	(1 to 99)	Procedure Number (see note 3)
<nn> = sequential number	(01 to 99)	Test Purpose Number
NOTE 1: GAP backward compatibility tests concern only the FP. These tests check FP specific behaviours for NG features in front of GAP PPs.		
NOTE 2: These tests are to ensure interoperability in front of legacy NG-DECT PART 1 "Wideband speech" devices.		
NOTE 3: The procedure number refers to the number given to each procedure in Annex B. For example the procedure "NG1.N.1_3 Codec Negotiation during call establishment" is the procedure number '3' of NG1.N.1 Codec Negotiation feature. If several procedures are involved in the TS, the procedure number refers to the procedure mainly tested.		

NOTE: In order to limit the number of tests, invalid behaviour use cases are not tested.

5.3 Portable Part TC purposes

5.3.1 List of New Generation DECT Part 3 PT tests cases related to NG-DECT Part 1 features

This Clause gives the list of NG-DECT Part 3 test cases related to the DECT "Wideband speech" (part 1) (TS 102 527-1 [13]) features. In other words, these test cases shall be implemented with the NG-DECT Part 3 requirements (see Clause 5.1).

Table 12: NG-DECT Part 3 PT Test Case Index related to NG-DECT Part 1 features

NG-DECT Part 3 PT test case index related to NG-DECT Part 1 features			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.1	Codec Negotiation	
TC_PT_NG1.N.1	TC_PT_NG1.N.1_BV_101	NG-DECT Part 1 capability during subscription registration	M
	TC_PT_NG1.N.1_BV_102	NG-DECT Part 1 capability during location registration	M
	TC_PT_NG1.N.1_BV_201	Basic service wideband speech	M
	TC_PT_NG1.N.1_BV_301	Outgoing call, codec chosen in {CC-SETUP-ACK} without slot type modification	M
	TC_PT_NG1.N.1_BV_303	Outgoing call, codec chosen in {CC-CALL-PROC} without slot type modification	M
	TC_PT_NG1.N.1_BV_308	Outgoing call, codec chosen in {CC-CONNECT} message in state T-01 without slot type modification	M
	TC_PT_NG1.N.1_BV_309	Outgoing call, codec chosen in {CC-SETUP-ACK} with slot type modification	M
	TC_PT_NG1.N.1_BV_311	Outgoing call, codec chosen in {CC-CALL-PROC} message with slot type modification	M
	TC_PT_NG1.N.1_BV_316	Outgoing call, codec chosen in {CC-CONNECT} in state T-01 with slot type modification	M
	TC_PT_NG1.N.1_BV_317	Outgoing call, fall back to a mandatory codec when slot type modification fails	M
	TC_PT_NG1.N.1_BV_321	Incoming call G.722, full paging	M
	TC_PT_NG1.N.1_WC_101	Outgoing call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device A)	M
	TC_PT_NG1.N.1_WC_102	Outgoing call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device B)	M
	TC_PT_NG1.N.1_WC_103	Incoming call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device A)	M
	TC_PT_NG1.N.1_WC_104	Incoming call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device B)	M
	TC_PT_NG1.N.1_WC_105	Service change at NG-DECT Part 1 Golden Device FT (Golden Device A)	M
	TC_PT_NG1.N.1_WC_106	Service change at NG-DECT Part 1 Golden Device FT (Golden Device B)	M
	NG1.N.2	Codec Switching	M
TC_PT_NG1.N.2	TC_PT_NG1.N.2_BV_101	Codec switching from G.722 to G.726	M
	TC_PT_NG1.N.2_BV_102	Codec switching from G.726 to G.722	M
	GAP.N.30	Calling Line Identification Presentation (CLIP)	M
TC_PT_GAP.N.30	TC_PT_GAP.N.30_BV_01	Incoming call with calling party number in {CC-SETUP}	M
	TC_PT_GAP.N.30_BV_02	Incoming call with calling party number in {CC-INFO}	M

5.3.2 List of New Generation DECT Part 3 PT tests cases

This Clause gives the list of NG-DECT Part 3 test cases related to the DECT "Extended Wideband Speech Services" (TS 102 527-3 [14]) features.

Table 13: NG-DECT Part 3 PT Test Case Index

NG-DECT Part 3 PT test case index			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.1	Codec negotiation	M
TC_PT_NG1.N.1	TC_PT_NG1.N.1_BV_103	NG-DECT Part 3 capability during subscription registration	M
	TC_PT_NG1.N.1_BV_104	NG-DECT Part 3 capability during location registration	M
	NG1.N.3	Missed call notification	M
TC_PT_NG1.N.3	TC_PT_NG1.N.3_BV_201	Missed call notification, activation	M
	TC_PT_NG1.N.3_BV_202	Missed call notification, deactivation	M
	TC_PT_NG1.N.3_BV_203	Missed call notification, activation while on active call	M
	NG1.N.4	Voice message waiting notification	M
TC_PT_NG1.N.4	TC_PT_NG1.N.4_BV_201	Voice message waiting notification, activation	M
	TC_PT_NG1.N.4_BV_202	Voice message waiting notification, deactivation	M
	NG1.N.5	Date and Time synchronization	M
TC_PT_NG1.N.5	TC_PT_NG1.N.5_BV_101	FT initiated Date and Time synchronization	M
	TC_PT_NG1.N.5_BV_102	PT initiated Date and Time synchronization	O
	NG1.N.6	Parallel Calls	M
TC_PT_NG1.N.6	TC_PT_NG1.N.6_BV_401	Codec change for parallel calls from G.722 to G.726	M
	TC_PT_NG1.N.6_BV_402	Codec change for parallel calls from G.726 to G.722	M
	TC_PT_NG1.N.6_BV_501	Sending negative acknowledgement - call toggle unsuccessful	M
	TC_PT_NG1.N.6_BV_601	Busy line notification	M
	NG1.N.7	Common parallel call procedures (external or internal)	M
TC_PT_NG1.N.7	TC_PT_NG1.N.7_BV_101	Common parallel call procedures capability	M
	TC_PT_NG1.N.7_BV_102	Outgoing parallel call initiation (external)	M
	TC_PT_NG1.N.7_BV_103	Outgoing parallel call initiation (internal)	M
	TC_PT_NG1.N.7_BV_201	Call waiting indication (external) - CLIP on call waiting indication - End of call waiting indication	M
	TC_PT_NG1.N.7_BV_202	Call waiting indication (internal) - CLIP on call waiting indication - End of call waiting indication	M
	TC_PT_NG1.N.7_BV_301	Call toggle (external)	M
	TC_PT_NG1.N.7_BV_302	Call toggle (internal)	M
	TC_PT_NG1.N.7_BV_401	Call release and call release rejection	M
	TC_PT_NG1.N.7_BV_601	Call waiting acceptance (from PP to FP) (external)	M
	TC_PT_NG1.N.7_BV_602	Call waiting acceptance (from PP to FP) (internal)	M
	TC_PT_NG1.N.7_BV_701	Active call release with replacement (from PP to FP) - call waiting (external)	O
	TC_PT_NG1.N.7_BV_701	Active call release with replacement (from PP to FP) - call on-hold (external)	O
	TC_PT_NG1.N.7_BV_801	Call waiting rejection (from PP to FP) (external)	M
	TC_PT_NG1.N.7_BV_901	Putting a call on-hold - Resuming a call put on-hold	O
	TC_PT_NG1.N.7_BV_1201	CNIP on call waiting indication (external)	M
	TC_PT_NG1.N.7_BV_1202	CNIP on call waiting indication (internal)	M
	NG1.N.8	Call transfer (external or internal)	M
TC_PT_NG1.N.8	TC_PT_NG1.N.8_BV_101	Call transfer (external) - announced	M
	TC_PT_NG1.N.8_BV_102	Call transfer (external) - unannounced	M
	TC_PT_NG1.N.8_BV_103	Call re-injection to the system (external)	M
	TC_PT_NG1.N.8_BV_104	Remote party CLIP on call transfer (external)	M
	TC_PT_NG1.N.8_BV_105	Remote party CNIP on call transfer (external)	M
	NG1.N.9	3-party conference with established external and/or internal calls	O
TC_PT_NG1.N.9	TC_PT_NG1.N.9_BV_101	3-party conference with established external and internal calls - IUT is the initiating party - release from one of the non initiating parties	M
	TC_PT_NG1.N.9_BV_102	3-party conference with established external and internal calls - IUT is not the initiating party	M

NG-DECT Part 3 PT test case index			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.10	Intrusion call	O
TC_PT_NG1.N.10	TC_PT_NG1.N.10_BV_101	Implicit call intrusion into a line in "single call" mode - IUT is the initiating party	C1301
	TC_PT_NG1.N.10_BV_102	Implicit call intrusion into a line in "single call" mode - IUT is not the initiating party	C1301
	TC_PT_NG1.N.10_BV_201	Explicit call intrusion into a line in "single call" mode	C1301
	NG1.N.11	Call deflection (external or internal)	O
TC_PT_NG1.N.11	TC_PT_NG1.N.11_BV_101	Call deflection (internal) in multiple lines context	O
	TC_PT_NG1.N.11_BV_201	Call deflection (external) - successful	M
	TC_PT_NG1.N.11_BV_202	Call deflection (external) - unsuccessful	M
	TC_PT_NG1.N.11_BV_203	Call deflection (external) - Call waiting deflection	M
	NG1.N.12	Line identification	M
TC_PT_NG1.N.12	TC_PT_NG1.N.12_BV_201	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE (non early CC-CONNECT implementation)	M
	TC_PT_NG1.N.12_BV_202	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE (early CC-CONNECT implementation)	M
	TC_PT_NG1.N.12_BV_401	Line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (non early CC-CONNECT implementation)	O
	TC_PT_NG1.N.12_BV_402	Line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (early CC-CONNECT implementation)	O
	TC_PT_NG1.N.12_BV_501	FP managed line selection for a first external outgoing call (non early CC-CONNECT implementation)	M
	TC_PT_NG1.N.12_BV_502	FP managed line selection for a first external outgoing call (early CC-CONNECT implementation)	M
	NG1.N.13	Call identification	M
TC_PT_NG1.N.13	TC_PT_NG1.N.13_BV_201	Call identifier assignment on outgoing call (FP to PP) - Normal call (non early CC-CONNECT implementation) - Call status indication	M
	TC_PT_NG1.N.13_BV_202	Call identifier assignment on outgoing call (FP to PP) - Normal call (early CC-CONNECT implementation) - Call status indication	M
	TC_PT_NG1.N.13_BV_203	Call identifier assignment on outgoing call (FP to PP) - Internal call - Call status indication	M
	TC_PT_NG1.N.13_BV_301	Call identifier assignment on incoming call (FP to PP) - Normal call setup	M
	NG1.N.14	Multiple Lines	M
TC_PT_NG1.N.14	TC_PT_NG1.N.14_BV_301	Incoming external calls on a multiple line system - Accept incoming call on second line and release it - Resume first call	M
	TC_PT_NG1.N.14_BV_305	Outgoing external calls on a multiple line system - Initiate a second outgoing call on second line using PP line selection	M
	TC_PT_NG1.N.14_BV_306	Outgoing external calls on a multiple line system - Initiate a second outgoing call on second line using FP managed line selection	M
	NG1.N.15	Multiple calls	M
TC_PT_NG1.N.15	TC_PT_NG1.N.15_BV_201	Incoming external calls on a multiple call line - Accept incoming second call	M
	TC_PT_NG1.N.15_BV_205	Outgoing external calls on a multiple call line - Initiate a second outgoing call on the line using line selection	M
	TC_PT_NG1.N.15_BV_206	Outgoing external calls on a multiple call line - Initiate a second outgoing call on the line using FP managed line selection	M
	TC_PT_NG1.N.15_BV_301	Busy system notification	M

NG-DECT Part 3 PT test case index			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.16	List access service	M
TC_PT_NG1.N.16	TC_PT_NG1.N.16_BV_1701	Missed calls list - Read entries - Initiate an external call	M
	TC_PT_NG1.N.16_BV_1702	Missed calls list - Delete entry	M
	TC_PT_NG1.N.16_BV_1703	Missed calls list - Delete list - Read entries when empty	M
	TC_PT_NG1.N.16_BV_1704	Missed calls list - Transfer number from missed calls list to contact list	M
	TC_PT_NG1.N.16_BV_1705	Missed calls list - Incoming first voice call during existing list access session	M
	TC_PT_NG1.N.16_BV_1801	Outgoing calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_1802	Outgoing calls list - Delete entry	O
	TC_PT_NG1.N.16_BV_1803	Outgoing calls list - Delete list - Read entries when empty	O
	TC_PT_NG1.N.16_BV_1901	Incoming accepted calls list - Read entries - Initiate an external call	M
	TC_PT_NG1.N.16_BV_1902	Incoming accepted calls list - Delete entry	M
	TC_PT_NG1.N.16_BV_1903	Incoming accepted calls list - Delete list - Read entries when empty	M
	TC_PT_NG1.N.16_BV_1904	Incoming accepted calls list - Transfer number from Incoming accepted calls list to contact list	M
	TC_PT_NG1.N.16_BV_2001	All calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2002	All calls list - Delete entry	O
	TC_PT_NG1.N.16_BV_2003	All calls list - Delete list - Read entries when empty	O
	TC_PT_NG1.N.16_BV_2101	Contact list - Read entries - Initiate an external call	M
	TC_PT_NG1.N.16_BV_2102	Contact list - Delete entry	M
	TC_PT_NG1.N.16_BV_2103	Contact list - Delete list - Read entries when empty	M
	TC_PT_NG1.N.16_BV_2104	Contact list - Create entry - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_2105	Contact list - Create entry - Negative Acknowledgement	M
	TC_PT_NG1.N.16_BV_2106	Contact list - Read entries during external call	M
	TC_PT_NG1.N.16_BV_2110	Contact list - Entry with several contact numbers	O
	TC_PT_NG1.N.16_BV_2201	Internal names list - Read entries - Initiate an internal call	M
	TC_PT_NG1.N.16_BV_2202	Internal names list - Delete entry	M
	TC_PT_NG1.N.16_BV_2203	Internal names list - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_2204	Internal names list - Call interception - PIN protected - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_2301	All incoming calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2302	All incoming calls list - Delete entry	O
	TC_PT_NG1.N.16_BV_2303	All incoming calls list - Delete list - Read entries when empty	O
	TC_PT_NG1.N.16_BV_2401	DECT system settings list - Read entries	M
	TC_PT_NG1.N.16_BV_2501	Line settings list - Read entries	M
	TC_PT_NG1.N.16_BV_2601	Virtual missed calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2602	Virtual outgoing calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2603	Virtual incoming accepted calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2604	Virtual all calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2605	Virtual contact list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2606	Virtual all incoming calls list - Read entries - Initiate an external call	O
	TC_PT_NG1.N.16_BV_2701	DECT system settings list - Current PIN code - New PIN code - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_2801	DECT system settings list - Clock master - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_2901	DECT system settings list - Base reset - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_2902	DECT system settings list - Base reset - PIN protected - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_3001	DECT system settings list - FP IP address - Edit entry - Save entry	O
	TC_PT_NG1.N.16_BV_3501	DECT system settings list - FP version - Read entries	M
	TC_PT_NG1.N.16_BV_3801	Line settings list - Line name - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_4001	Line settings list - Attached handsets - Edit entry - Save entry	M

NG-DECT Part 3 PT test case index			
Test Group Reference	Test Case Id	Description	Status
	TC_PT_NG1.N.16_BV_4002	Line settings list - Attached handsets - PIN protected - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_4101	Line settings list - Dialing prefix - Edit entry - Save entry	O
	TC_PT_NG1.N.16_BV_4201	Line settings list - FP melody - Edit entry - Save entry	O
	TC_PT_NG1.N.16_BV_4301	Line settings list - FP volume - Edit entry - Save entry	O
	TC_PT_NG1.N.16_BV_4401	Line settings list - Blocked telephone number - Edit entry - Save entry	O
	TC_PT_NG1.N.16_BV_4501	Line settings list - Multiple calls mode - Edit entry - Save entry	M
	TC_PT_NG1.N.16_BV_4601	Line settings list - Intrusion call - Edit entry - Save entry	C1302
	TC_PT_NG1.N.16_BV_4701	Line settings list - Permanent CLIR - Edit entry - Save entry - 'Value' sub field	C1303
	TC_PT_NG1.N.16_BV_4702	Line settings list - Permanent CLIR - Edit entry - Save entry - CLIR code sub fields	C1303
	TC_PT_NG1.N.16_BV_4801	Line settings list - Call forwarding unconditional - Edit entry - Save entry - 'Value' and 'Call forwarding number' sub fields	M
	TC_PT_NG1.N.16_BV_4802	Line settings list - Call forwarding unconditional - Edit entry - Save entry - CFU codes sub fields	O
	TC_PT_NG1.N.16_BV_4901	Line settings list - Call forwarding on No answer - Edit entry - Save entry - 'Value' and 'Call forwarding number' sub fields	M
	TC_PT_NG1.N.16_BV_4902	Line settings list - Call forwarding unconditional - Edit entry - Save entry - CFNA codes sub fields	O
	TC_PT_NG1.N.16_BV_5001	Line settings list - Call forwarding on Busy subscriber - Edit entry - Save entry - 'Value' and 'Call forwarding number' sub fields	M
	TC_PT_NG1.N.16_BV_5002	Line settings list - Call forwarding unconditional - Edit entry - Save entry - CFB codes sub fields	O
	TC_PT_NG1.N.16_BV_5101	DECT system settings list - Emission mode - Edit entry - Save entry	C1304
	NG1.N.17	Calling line identity restriction	O
TC_PT_NG1.N.17	TC_PT_NG1.N.17_BV_301	Temporary CLIR mode (call by call)	M
	NG1.N.18	Call forwarding (external calls)	M
TC_PT_NG1.N.18	No test case		
	NG1.N.19	DTMF handling	M
TC_PT_NG1.N.19	TC_PT_NG1.N.19_BV_101	Uplink DTMF transmission at call setup when FP connected to classic switching network	M
	TC_PT_NG1.N.19_BV_201	Uplink DTMF transmission when connected	M
	NG1.N.20	Tones provision	M
TC_PT_NG1.N.20	TC_PT_NG1.N.20_BV_201	Tones provision by the system - Ring-back tone and Busy tone	M
	TC_PT_NG1.N.20_BV_203	Tones provision by the system - Intercept tone, Negative acknowledgement tone and Call waiting tone	M
	TC_PT_NG1.N.20_BV_206	Tones provision by the system - Dial tone	O
	TC_PT_NG1.N.20_BV_207	Tones provision by the system - Off-hook warning tone	O
	TC_PT_NG1.N.20_BV_208	Tones provision by the system - Network congestion tone	O
	NG1.N.21	Headset management	C1305
TC_PT_NG1.N.21	TC_PT_NG1.N.21_BV_101	Headset capability during subscription registration	C1305
	TC_PT_NG1.N.21_BV_102	Headset capability during location registration	C1305
	TC_PT_NG1.N.21_BV_201	Headset call interception - G.722 call	C1305
	TC_PT_NG1.N.21_BV_301	Headset incoming call - G.722 call	C1305
	TC_PT_NG1.N.21_BV_401	Re-dial of last outgoing call	C1306
	TC_PT_NG1.N.21_BV_501	Re-dial of last incoming call	C1306
	TC_PT_NG1.N.21_BV_601	Headset incoming call - G.726 call - Switching from headset to handset (headset initiated)	C1306
	TC_PT_NG1.N.21_BV_701	Headset side - Headset call interception - G.726 call - Switching from headset to handset (handset initiated)	C1307
	TC_PT_NG1.N.21_BV_705	Handset side - Headset call interception - G.722 call - Switching from headset to handset (handset initiated)	C1308
	NG1.N.22	Handling of lines where second calls are signalled in-band	M
TC_PT_NG1.N.22	TC_PT_NG1.N.22_BV_401	Use of transparent commands on IBSC lines (Basic or Off-hook CLIP enabled) or any other line	M

NG-DECT Part 3 PT test case index			
Test Group Reference	Test Case Id	Description	Status
	GAP.N.31	Internal call	M
TC_PT_GAP.N.31	TC_PT_GAP.N.31_BV_101	Internal call setup - internal call class	M
	TC_PT_GAP.N.31_BV_301	Internal call CLIP	M
	TC_PT_GAP.N.31_BV_401	Internal call CNIP	M
	TC_PT_GAP.N.31_BV_601	Internal call codec priority - outgoing call	M
	TC_PT_GAP.N.31_BV_602	Internal call codec priority - incoming call	M
	GAP.N.34	Calling Name Identification Presentation (CNIP)	M
TC_PT_GAP.N.34	TC_PT_GAP.N.34_BV_101	Incoming call with calling party name in {CC-SETUP}	M
	TC_PT_GAP.N.34_BV_102	Incoming call with calling party name in {CC-INFO}	M
	TC_PT_GAP.N.34_BV_103	Incoming call with CLIP and CNIP in {CC-INFO}	M
	GAP.N.35	Enhanced security	M
TC_PT_GAP.N.35	TC_PT_GAP.N.35_BV_101	Encryption of all calls	M
	TC_PT_GAP.N.35_BV_201	Indication of Support of 'Re-keying' and 'early encryption' in terminal capabilities during registration	O
	TC_PT_GAP.N.35_BV_202	Indication of Support of 'Re-keying' and 'early encryption' in terminal capabilities during location registration	O
	TC_PT_GAP.N.35_BV_203	Re-keying procedure	O
	TC_PT_GAP.N.35_BV_301	Assignment of default cipher key and usage of early encryption during incoming call	O
	TC_PT_GAP.N.35_BV_302	Usage of early encryption during outgoing call	O
	TC_PT_GAP.N.35_BV_303	Usage of early encryption for MM procedure	O
	TC_PT_GAP.N.35_BV_304	Overwriting a default cipher key by assigning a new default cipher key with the same index	O
	TC_PT_GAP.N.35_BV_305	Assign two default cipher keys with different indices.	O
	TC_PT_GAP.N.35_BV_306	PP releases connection in case FP rejects early encryption on MAC layer	O
	TC_PT_GAP.N.35_BV_501	Release of unexpectedly unencrypted outgoing call in call proceeding state	M
	TC_PT_GAP.N.35_BV_502	Release of unexpectedly unencrypted outgoing call in connect state	M
	TC_PT_GAP.N.35_BV_503	Release of unexpectedly unencrypted incoming call in alerting state	M
	TC_PT_GAP.N.35_BV_504	Release of unexpectedly unencrypted incoming call in connect state.	M
	TC_PT_GAP.N.35_BV_505	Release of unexpectedly unencrypted outgoing call in connect state after switching encryption support in FT off	M
	TC_PT_GAP.N.35_BV_506	Release of unexpectedly unencrypted outgoing call in connect state despite of successful authentication	M
	TC_PT_GAP.N.35_BV_507	Release of unexpectedly unencrypted incoming call in connect state despite of successful authentication	M
	NG1.A.1	Easy PIN code registration	M
TC_PT_NG1.A.1	TC_PT_NG1.A.1_BV_101	Registration mode automatic access	M
	TC_PT_NG1.A.1_BV_201	Searching mode and PIN code requests	M
	TC_PT_NG1.A.1_BV_301	Base station name selection	O
	TC_PT_NG1.A.1_BV_401	Registration user feedback	M
	NG1.A.2	Easy pairing registration	M
TC_PT_NG1.A.2	TC_PT_NG1.A.2_BV_401	Searching mode request (default PIN)	M
	TC_PT_NG1.A.2_BV_402	Searching mode request (switching back to PIN entry)	M
	NG1.A.3	Handset Locator	M
TC_PT_NG1.A.3	TC_PT_NG1.A.3_BV_101	Handset Locator	M
	GAP.A.4	Terminal Identity number assignment in mono cell system	M
TC_PT_GAP.A.4	TC_PT_GAP.A.4_BV_101	Terminal Identity number assignment in mono cell system	M
C1301:	At least one of the two procedures implicit or explicit call intrusion shall be implemented.		
C1302:	IF NG1.N.17 THEN "M" ELSE "I".		
C1303:	IF NG1.N.17 THEN "M" ELSE "I".		
C1304:	IF NG1.M.5 "no-emission" mode is supported THEN "M" ELSE "I".		
C1305:	IF the PT is a headset PP THEN "M" ELSE "I".		
C1306:	IF the PT is a headset PP THEN "O" ELSE "I".		
C1308:	IF the PT is a headset PP THEN "I" ELSE "O".		

5.4 Fixed Part TC purposes

5.4.1 List of New Generation DECT Part 3 FT tests cases related to NG-DECT Part 1 features

This Clause gives the list of NG-DECT Part 3 test cases related to the DECT "Wideband speech" (part 1) (TS 102 527-1 [13]) features. In other words, these test cases shall be implemented with the NG-DECT Part 3 requirements (see Clause 5.1).

Table 14: NG-DECT Part 3 FT Test Case Index related to NG-DECT Part 1 features

NG-DECT Part 3 FT test case index related to NG-DECT Part 1 features			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.1	Codec Negotiation	M
TC_FT_NG1.N.1	TC_FT_NG1.N.1_BV_101	Exchange of codec list during subscription registration	M
	TC_FT_NG1.N.1_BV_102	Exchange of codec list during location registration	M
	TC_FT_NG1.N.1_BV_103	NG-DECT Part 1 higher layer capabilities	M
	TC_FT_NG1.N.1_BV_201	Basic service wideband speech	M
	TC_FT_NG1.N.1_BV_301	Outgoing G.722 call without slot type modification	M
	TC_FT_NG1.N.1_BV_302	Outgoing G.726 call without slot type modification	M
	TC_FT_NG1.N.1_BV_303	Outgoing G.722 call with slot type modification	M
	TC_FT_NG1.N.1_BV_304	Outgoing G.726 call with slot type modification	M
	TC_FT_NG1.N.1_BV_305	Outgoing G.722 call, fall back to a G.726 codec when full to long slot type modification fails	M
	TC_FT_NG1.N.1_BV_306	Outgoing call without sending any IE <<CODEC-LIST>> in {CC-SETUP}	M
	TC_FT_NG1.N.1_BV_307	Outgoing call with an IE <<CODEC-LIST>> in {CC-SETUP} different from previous sent during location registration	M
	TC_FT_NG1.N.1_BV_321	Incoming call G.722	M
	TC_FT_NG1.N.1_BV_322	Incoming call G.726	M
	TC_FT_NG1.N.1_BV_323	Incoming call G.722, negotiation results in G.726	M
	TC_FT_NG1.N.1_WC_101	Outgoing call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device A)	M
	TC_FT_NG1.N.1_WC_102	Outgoing call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device B)	M
	TC_FT_NG1.N.1_WC_103	Incoming call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device A)	M
	TC_FT_NG1.N.1_WC_104	Incoming call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device B)	M
	TC_FT_NG1.N.1_WC_105	Service change at NG-DECT Part 1 Golden Device PT (Golden Device A)	M
	TC_FT_NG1.N.1_WC_106	Service change at NG-DECT Part 1 Golden Device PT (Golden Device B)	M
	NG1.N.2	Codec switching	M
TC_FT_NG1.N.2	No test case		
	GAP.N.30	Calling Line Identification Presentation (CLIP)	M
TC_FT_GAP.N.30	TC_FT_GAP.N.30_BV_01	Incoming call with calling party number	M

5.4.2 List of New Generation DECT Part 3 FT tests cases

This Clause gives the list of NG-DECT Part 3 test cases related to the DECT "Extended Wideband Speech Services" (TS 102 527-3 [14]) features.

Table 15: NG-DECT Part 3 FT Test Case Index

NG-DECT Part 3 FT test case index				
Test Group Reference	Test Case Id	Description	Status	
	NG1.N.1	Codec negotiation	M	
TC_FT_NG1.N.1	TC_FT_NG1.N.1_BV_104	NG-DECT Part 3 higher layer capabilities	M	
	NG1.N.3	Missed call notification	M	
TC_FT_NG1.N.3	TC_FT_NG1.N.3_BV_201	Missed call notification after PP location registration or FP reboot	M	
	NG1.N.4	Voice message waiting notification	M	
TC_FT_NG1.N.4	TC_FT_NG1.N.4_BV_201	Voice message waiting notification, activation	M	
		TC_FT_NG1.N.4_BV_202	Voice message waiting notification, deactivation	M
	NG1.N.5	Date and Time synchronization	M	
TC_FT_NG1.N.5	TC_FT_NG1.N.5_BV_101	FT initiated Date and Time synchronization	M	
		TC_FT_NG1.N.5_BV_102	PT initiated Date and Time synchronization	M
	NG1.N.6	Parallel Calls	M	
TC_FT_NG1.N.6	TC_FT_NG1.N.6_BV_401	Codec change for parallel calls from G.722 to G.726	M	
		TC_FT_NG1.N.6_BV_402	Codec change for parallel calls from G.726 to G.722	M
		TC_FT_NG1.N.6_BV_501	Sending negative acknowledgement - invalid call toggle request	M
		TC_FT_NG1.N.6_BV_601	Busy line notification	M
	NG1.N.7	Common parallel call procedures (external or internal)	M	
TC_FT_NG1.N.7	TC_FT_NG1.N.7_BV_101	Outgoing parallel call initiation (external), FP managed line selection	M	
		TC_FT_NG1.N.7_BV_102	Outgoing parallel call initiation (internal)	M
		TC_FT_NG1.N.7_BV_103	Outgoing parallel call initiation (external), line selection using <<CALL-INFORMATION>> IE in {CC-INFO}	M
		TC_FT_NG1.N.7_BV_104	Outgoing parallel call initiation (external), line selection using <<MULTI-KEYPAD>> IE in {CC-INFO}	M
		TC_FT_NG1.N.7_BV_201	Call waiting indication (external) - CLIP on call waiting indication - End of call waiting indication	M
		TC_FT_NG1.N.7_BV_202	Call waiting indication (internal) - CLIP on call waiting indication - End of call waiting indication	M
		TC_FT_NG1.N.7_BV_301	Call toggle (external)	M
		TC_FT_NG1.N.7_BV_302	Call toggle (internal)	M
		TC_FT_NG1.N.7_BV_401	Call release and call release rejection - Resuming a call put on-hold	C1501
		TC_FT_NG1.N.7_BV_601	Call waiting acceptance (from PP to FP) (external)	M
		TC_FT_NG1.N.7_BV_602	Call waiting acceptance (from PP to FP) (internal)	M
		TC_FT_NG1.N.7_BV_701	Active call release with replacement (from PP to FP) - call waiting (external)	O
		TC_FT_NG1.N.7_BV_702	Active call release with replacement (from PP to FP) - call on-hold (external)	O
		TC_FT_NG1.N.7_BV_801	Call waiting rejection (from PP to FP) (external)	C1502
		TC_FT_NG1.N.7_BV_901	Putting a call on hold (external) - Resuming a call put on-hold	C1503
		TC_FT_NG1.N.7_BV_902	Putting a call on hold (internal) - Resuming a call put on-hold	M
		TC_FT_NG1.N.7_BV_1201	CNIP on call waiting indication (external)	M
		TC_FT_NG1.N.7_BV_1202	CNIP on call waiting indication (internal)	M
	NG1.N.8	Call transfer (external or internal)	M	
TC_FT_NG1.N.8	TC_FT_NG1.N.8_BV_101	Call transfer (external) - announced	M	
		TC_FT_NG1.N.8_BV_201	Call transfer (external) - unannounced	M
		TC_FT_NG1.N.8_BV_301	Call re-injection to the system (external) - announced	M
		TC_FT_NG1.N.8_BV_302	Call re-injection to the system (external) - unannounced	M
		TC_FT_NG1.N.8_BV_401	Remote party CLIP on call transfer	M
		TC_FT_NG1.N.8_BV_501	Remote party CNIP on call transfer	M

NG-DECT Part 3 FT test case index			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.9	3-party conference with established external and/or internal calls	O
TC_FT_NG1.N.9	TC_FT_NG1.N.9_BV_101	3-party conference with established external and internal calls - release from non initiating internal party	M
	TC_FT_NG1.N.9_BV_102	3-party conference with established external and internal calls - release of external party from initiating PP	M
	TC_FT_NG1.N.9_BV_103	3-party conference with established external calls - release from initiating party	O
	TC_FT_NG1.N.9_BV_104	3-party conference with established external calls on two different lines - release from initiating party	O
	NG1.N.10	Intrusion call	O
TC_FT_NG1.N.10	TC_FT_NG1.N.10_BV_101	Implicit call intrusion into a line in "single call" mode - release from intruder	M
	TC_FT_NG1.N.10_BV_105	Implicit call intrusion into a line in "single call" mode on a multiple line system (non early CC-CONNECT implementation) - release from intruder	M
	TC_FT_NG1.N.10_BV_106	Implicit call intrusion into a line in "single call" mode on a multiple line system (early CC-CONNECT implementation) - release from intruder	M
	TC_FT_NG1.N.10_BV_201	Explicit call intrusion into a line in "single call" mode - handset intrusion	M
	TC_FT_NG1.N.10_BV_202	Explicit call intrusion into a line in "single call" mode - line intrusion	M
	NG1.N.11	Call deflection (external or internal)	O
TC_FT_NG1.N.11	TC_FT_NG1.N.11_BV_101	Call deflection (internal) in multiple lines context	O
	TC_FT_NG1.N.11_BV_201	Call deflection (external) - first incoming call deflection	M
	TC_FT_NG1.N.11_BV_202	Call deflection (external) - call waiting deflection	M
	NG1.N.12	Line identification	M
TC_FT_NG1.N.12	TC_FT_NG1.N.12_BV_301	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE in {CC-INFO} (non early CC-CONNECT implementation)	M
	TC_FT_NG1.N.12_BV_302	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE in {CC-INFO} (early CC-CONNECT implementation)	M
	TC_FT_NG1.N.12_BV_401	Backward-compatible line identification for a first external outgoing call using IE <<MULTI-KEYPAD>> IE (non early CC-CONNECT implementation)	M
	TC_FT_NG1.N.12_GC_401	Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (non early CC-CONNECT implementation)	M
	TC_FT_NG1.N.12_BV_402	Backward-compatible line identification for a first external outgoing call using IE <<MULTI-KEYPAD>> IE (early CC-CONNECT implementation)	M
	TC_FT_NG1.N.12_GC_402	Backward-compatible line identification for a first external outgoing call using IE <<MULTI-KEYPAD>> IE (early CC-CONNECT implementation)	M
	TC_FT_NG1.N.12_BV_501	FP managed line selection for a first external outgoing call (non early CC-CONNECT implementation)	M
	TC_FT_NG1.N.12_BV_502	FP managed line selection for a first external outgoing call (early CC-CONNECT implementation)	M

NG-DECT Part 3 FT test case index			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.13	Call identification	M
TC_FT_NG1.N.13	TC_FT_NG1.N.13_BV_201	Call identifier assignment on outgoing call (FP to PP) - Normal call (non early CC-CONNECT implementation) - Call status indication	M
	TC_FT_NG1.N.13_BV_202	Call identifier assignment on outgoing call (FP to PP) - Normal call (early CC-CONNECT implementation) - Call status indication	M
	TC_FT_NG1.N.13_BV_203	Call identifier assignment on outgoing call (FP to PP) - Internal call - Call status indication	M
	TC_FT_NG1.N.13_BV_204	Call identifier assignment on outgoing call (FP to PP) - LiA service call setup - Call status indication for outgoing external call	M
	TC_FT_NG1.N.13_BV_205	Call identifier assignment on outgoing call (FP to PP) - LiA service call setup - Call status indication for internal call	M
	TC_FT_NG1.N.13_BV_301	Call identifier assignment on incoming call (FP to PP) - Normal call setup	M
	TC_FT_NG1.N.13_BV_302	Call identifier assignment on incoming call (FP to PP) - LiA service call setup - Call status indication for incoming external call	M
	NG1.N.14	Multiple Lines	O
TC_FT_NG1.N.14	TC_FT_NG1.N.14_BV_301	Incoming external calls on a multiple line system - Incoming calls on two lines with no active PPs	M
	TC_FT_NG1.N.14_BV_302	Incoming external calls on a multiple line system - Incoming calls with one active PP - Accept second call on idle PP and release it	M
	TC_FT_NG1.N.14_BV_303	Incoming external calls on a multiple line system - Incoming calls with one active PP - Accept second call on active PP and release it - Resume active call	M
	TC_FT_NG1.N.14_BV_304	Incoming external calls on a multiple line system - Two simultaneous incoming calls	M
	TC_FT_NG1.N.14_BV_305	Outgoing external calls on a multiple line system - Initiate outgoing calls on two lines (non early CC-CONNECT implementation)	M
	TC_FT_NG1.N.14_BV_306	Outgoing external calls on a multiple line system - Initiate outgoing calls on two lines (early CC-CONNECT implementation)	M
	TC_FT_NG1.N.14_BV_401	Internal calls in multiple line context	M
	NG1.N.15	Multiple calls	M
TC_FT_NG1.N.15	TC_FT_NG1.N.15_BV_201	Incoming external calls on a multiple call line - Accept incoming second call on idle PP	M
	TC_FT_NG1.N.15_BV_202	Incoming external calls on a multiple call line - Accept incoming second call on active PP	M
	TC_FT_NG1.N.15_BV_205	Outgoing external calls on a multiple call line - Initiate outgoing second call on idle PP (non early CC-CONNECT implementation)	M
	TC_FT_NG1.N.15_BV_206	Outgoing external calls on a multiple call line - Initiate outgoing second call on idle PP (early CC-CONNECT implementation)	M
	TC_FT_NG1.N.15_BV_207	Outgoing external calls on a multiple call line - Initiate outgoing second call on active PP using <<CALL-INFORMATION>> line selection	M
	TC_FT_NG1.N.15_BV_208	Outgoing external calls on a multiple call line - Initiate outgoing second call on active PP using <<MULTI-KEYPAD>> line selection	M
	TC_FT_NG1.N.15_BV_301	Busy system notification	M

NG-DECT Part 3 FT test case index			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.16	List access service	M
TC_FT_NG1.N.16	TC_FT_NG1.N.16_BV_301	Start / end session sequencing and parameters - list of supported lists	M
	TC_FT_NG1.N.16_BV_302	CC-RELEASE without end session - list of supported lists	M
	TC_FT_NG1.N.16_BV_303	No simultaneous access to the same list from 2 different PPs - internal names list	M
	TC_FT_NG1.N.16_BV_304	Simultaneous access to the same list from 2 different PPs (check edit locks an entry)- internal names list	M
	TC_FT_NG1.N.16_BV_305	Edit Current PIN code while Line setting list session is open	M
	TC_FT_NG1.N.16_BV_1601	List of supported lists - read entries	M
	TC_FT_NG1.N.16_BV_1701	Missed calls list - Delete list - Read entries when empty	M
	TC_FT_NG1.N.16_BV_1702	Missed calls list - List change notification - Read entries when new entries	M
	TC_FT_NG1.N.16_BV_1703	Missed calls list - Delete entry - Negative acknowledgement	M
	TC_FT_NG1.N.16_BV_1704	Missed calls list - Transfer number from missed calls list to contact list	M
	TC_FT_NG1.N.16_BV_1705	Missed calls list - Initiate a voice call during a list access session	M
	TC_FT_NG1.N.16_BV_1706	Missed calls list - List access during existing voice call with second call initiation - Switching between LA session and voice call - Returning to LA session after voice call termination	M
	TC_FT_NG1.N.16_BV_1801	Outgoing calls list - Delete list - Read entries when empty	O
	TC_FT_NG1.N.16_BV_1802	Outgoing calls list - Read entries when new entries	O
	TC_FT_NG1.N.16_BV_1803	Outgoing calls list - Delete entry - Negative acknowledgement	O
	TC_FT_NG1.N.16_BV_1901	Incoming accepted calls list - Delete list - Read entries when empty	M
	TC_FT_NG1.N.16_BV_1902	Incoming accepted calls list - Read entries when new entries	M
	TC_FT_NG1.N.16_BV_1903	Incoming accepted calls list - Delete entry - Negative acknowledgement	M
	TC_FT_NG1.N.16_BV_2001	All calls list - Delete list - Read entries when empty	O
	TC_FT_NG1.N.16_BV_2002	All calls list - Read entries when new entries	O
	TC_FT_NG1.N.16_BV_2003	All calls list - Delete entry - Negative acknowledgement	O
	TC_FT_NG1.N.16_BV_2101	Contact list - Delete list - Read entries when empty	M
	TC_FT_NG1.N.16_BV_2102	Contact list - Save entry - Read entries in ascending order	M
	TC_FT_NG1.N.16_BV_2103	Contact list - Query supported entry fields - Read entries in descending order	M
	TC_FT_NG1.N.16_BV_2104	Contact list - Edit entry - add a second contact number field to an entry	M
	TC_FT_NG1.N.16_BV_2105	Contact list - Edit entry - Save entry without changing the entry	M
	TC_FT_NG1.N.16_BV_2106	Contact list - Search entries using matching options	M
	TC_FT_NG1.N.16_BV_2107	Contact list - Search entries in ascending order and descending order	M
	TC_FT_NG1.N.16_BV_2108	Contact list - Initiate a voice call during a list access session	M
	TC_FT_NG1.N.16_BV_2109	Contact list - Entry used to update Outgoing call list	O
	TC_FT_NG1.N.16_BV_2110	Contact list - Delete entry - Negative acknowledgement	M
	TC_FT_NG1.N.16_BV_2111	Contact list - Incoming first voice call during existing list access session	M
	TC_FT_NG1.N.16_BV_2201	Internal names list - Edit entry - Save entry	M
	TC_FT_NG1.N.16_BV_2202	Internal names list - New registration - List change notification - Read entries	M
	TC_FT_NG1.N.16_BV_2203	Internal names list - Initiate and check internal call from internal names list	M
	TC_FT_NG1.N.16_BV_2210	Internal names list - Delete entry	M
	TC_FT_NG1.N.16_BV_2301	All incoming calls list - Delete list - Read entries when empty	O
	TC_FT_NG1.N.16_BV_2302	All incoming calls list - Read entries when new entries	O
	TC_FT_NG1.N.16_BV_2303	All incoming calls list - Delete entry - Negative acknowledgement	O

NG-DECT Part 3 FT test case index			
Test Group Reference	Test Case Id	Description	Status
	TC_FT_NG1.N.16_BV_2401	DECT system settings list - Query supported entry fields	M
	TC_FT_NG1.N.16_BV_2402	DECT system settings list - Read entries	M
	TC_FT_NG1.N.16_BV_2501	Line settings list - Query supported entry fields	M
	TC_FT_NG1.N.16_BV_2502	Line settings list - Read entries	M
	TC_FT_NG1.N.16_BV_2701	DECT system settings list - Current PIN code - New PIN code - Edit entry - Save entry	M
	TC_FT_NG1.N.16_BV_2801	DECT system settings list - Clock master- Edit entry - Save entry- Read entries	M
	TC_FT_NG1.N.16_BV_2901	DECT system settings list - Base reset - Edit entry - Save entry - Read entries	M
	TC_FT_NG1.N.16_BV_2902	DECT system settings list - Base reset - Read entries - Default settings values	M
	TC_FT_NG1.N.16_BV_3001	DECT system settings list - FP IP address - Edit entry - Save entry - Read entries	O
	TC_FT_NG1.N.16_BV_3501	DECT system settings list - FP version - Read entries	M
	TC_FT_NG1.N.16_BV_3801	Line settings list - Line name- Edit entry - Save entry - List change notification - Read entries	M
	TC_FT_NG1.N.16_BV_3901	Line settings list - Line id - Edit entry - Save entry- Read entries	M
	TC_FT_NG1.N.16_BV_4001	Line settings list - Attached handsets - Edit entry - Save entry - List change notification - Read entries after registration	M
	TC_FT_NG1.N.16_BV_4101	Line settings list - Dialling Prefix - Edit entry - Save entry - List change notification - Read entries- Outgoing call	O
	TC_FT_NG1.N.16_BV_4201	Line settings list - FP melody - Edit entry - Save entry - List change notification - Read entries	O
	TC_FT_NG1.N.16_BV_4301	Line settings list - FP volume - Edit entry - Save entry - List change notification - Read entries	O
	TC_FT_NG1.N.16_BV_4401	Line settings list - Blocked number - Edit entry - Save entry - List change notification - Read entries- Outgoing call blocked	O
	TC_FT_NG1.N.16_BV_4501	Line settings list - Multiple calls mode - Edit entry - Save entry - List change notification - Read entries	M
	TC_FT_NG1.N.16_BV_4601	Line settings list - Intrusion call - Edit entry - Save entry - List change notification - Read entries	C1504
	TC_FT_NG1.N.16_BV_4701	Line settings list - Permanent CLIR - Edit entry - Save entry - List change notification - Read entries	C1505
	TC_FT_NG1.N.16_BV_4801	Line settings list - Call Forwarding unconditional - Edit entry - Save entry - List change notification - Read entries	M
	TC_FT_NG1.N.16_BV_4901	Line settings list - Call Forwarding on no answer - Edit entry - Save entry - List change notification - Read entries	M
	TC_FT_NG1.N.16_BV_5001	Line settings list - Call Forwarding on busy subscriber - Edit entry - Save entry - List change notification - Read entries	M
	TC_FT_NG1.N.16_BV_5101	DECT system settings list - Emission mode - Edit entry - Save entry - Read entries	C1506
	NG1.N.17	Calling line identity restriction	O
TC_FT_NG1.N.17	TC_FT_NG1.N.17_BV_201	Permanent CLIR mode (all calls)	M
	NG1.N.18	Call forwarding (external calls)	M
TC_FT_NG1.N.18	TC_FT_NG1.N.18_BV_201	External Call Forwarding Unconditional (CFU) to external number	M
	TC_FT_NG1.N.18_BV_301	External Call Forwarding on No Answer (CFNA) to external number	M
	TC_FT_NG1.N.18_BV_401	External Call Forwarding on Busy subscriber (CFB) to external number	M
	NG1.N.19	DTMF handling	M
TC_FT_NG1.N.19	TC_FT_NG1.N.19_BV_401	Local DTMF feedback of dialled digits	M

NG-DECT Part 3 FT test case index			
Test Group Reference	Test Case Id	Description	Status
	NG1.N.20	Tones provision	M
TC_FT_NG1.N.20	TC_FT_NG1.N.20_BV_201	Tones provision by the system - Ring-back tone	M
	TC_FT_NG1.N.20_BV_202	Tones provision by the system - Busy tone	M
	TC_FT_NG1.N.20_BV_203	Tones provision by the system - Call waiting tone	M
	TC_FT_NG1.N.20_BV_204	Tones provision by the system - Negative acknowledgement tone	M
	TC_FT_NG1.N.20_BV_205	Tones provision by the system - Intercept tone	M
	TC_FT_NG1.N.20_BV_206	Tones provision by the system - Dial tone	O
	TC_FT_NG1.N.20_BV_207	Tones provision by the system - Off-hook warning tone	O
	TC_FT_NG1.N.20_BV_210	Tones provision by the system - Ring-back tone on parallel call	M
	TC_FT_NG1.N.20_BV_220	Tones provision by the system - Backward compatibility with legacy PPs	M
	TC_FT_NG1.N.20_BV_301	Transparency to tones provision by the network or PABX - Dial tone and ring back tone for a first call	M
	TC_FT_NG1.N.20_BV_302	Transparency to tones provision by the network or PABX - Busy tone	M
	TC_FT_NG1.N.20_BV_303	Transparency to tones provision by the network or PABX - Call waiting tone	M
	TC_FT_NG1.N.20_BV_304	Transparency to tones provision by the network or PABX - Dial tone and ring back tone for outgoing parallel call	M
	NG1.N.21	Headset management	M
TC_FT_NG1.N.21	TC_FT_NG1.N.21_BV_201	Headset call interception - G.722 call	M
	TC_FT_NG1.N.21_BV_202	Headset call interception - G.726 call	M
	TC_FT_NG1.N.21_BV_204	Headset call interception - Control code failed	M
	TC_FT_NG1.N.21_BV_701	Switching from headset to handset (handset initiated) - G.722 call	M
	NG1.N.22	Handling of lines where second calls are signalled in-band	O
TC_FT_NG1.N.22	TC_FT_NG1.N.22_BV_101	Off-hook CLIP enabled 'double call with in-band signalling' lines - double call with in-band signalling type for outgoing call (first and second call)	M
	TC_FT_NG1.N.22_BV_301	Off-hook CLIP enabled 'double call with in-band signalling' lines - Call release	C1507
	TC_FT_NG1.N.22_BV_302	Off-hook CLIP enabled 'double call with in-band signalling' lines - Call waiting rejection (from PP to FP) (external)	C1508
	TC_FT_NG1.N.22_BV_303	Off-hook CLIP enabled 'double call with in-band signalling' lines - Putting a call on hold (external)	C1509
	GAP.N.31	Internal call	M
TC_FT_GAP.N.31	TC_FT_GAP.N.31_BV_101	Internal call setup - internal call class	M
	TC_FT_GAP.N.31_BV_102	Internal call setup - internal general call	M
	TC_FT_GAP.N.31_BV_301	Internal call CLIP	M
	TC_FT_GAP.N.31_BV_401	Internal call CNIP	M
	TC_FT_GAP.N.31_BV_601	Internal call codec priority	M
	TC_FT_GAP.N.31_GC_101	Internal call setup - external call class	M
	GAP.N.34	Calling Name Identification Presentation (CNIP)	M
TC_FT_GAP.N.34	TC_FT_GAP.N.34_BV_101	Incoming call with calling party name	M
	TC_FT_GAP.N.34_BV_201	Incoming call with UTF-8 calling party name	M
	TC_FT_GAP.N.34_GC_201	Incoming call with calling party name - UTF-8 to IA5 characters translation	M
	GAP.N.35	Enhanced security	M
	TC_FT_GAP.N.35_BV_101	Verify that FT enables encryption for incoming call within timer < MM_encryption_check.1 >	M
	TC_FT_GAP.N.35_BV_102	Verify that FT enables encryption for outgoing call within timer < MM_encryption_check.1 >	M
	TC_FT_GAP.N.35_BV_105	Release of unencrypted call in case of wrong answer to authentication request	M
	TC_FT_GAP.N.35_BV_106	Release of unencrypted call in case of missing answer to authentication request	M
	TC_FT_GAP.N.35_BV_107	Release of unencrypted call in case of PP sending {AUTHENTICATION-REJECT} message	M
	TC_FT_GAP.N.35_BV_108	Release of unencrypted call in case of cipher reject.	M

NG-DECT Part 3 FT test case index			
Test Group Reference	Test Case Id	Description	Status
	TC_FT_GAP.N.35_BV_109	Release of unencrypted call in case of missing encryption activation on MAC layer.	M
	TC_FT_GAP.N.35_BV_201	Verify indication of Support of 'Re-keying' and 'early encryption' in extended higher layer capabilities part 2	O
	TC_FT_GAP.N.35_BV_202	Usage and frequency of re-keying procedure	O
	TC_FT_GAP.N.35_BV_203	Abnormal release if encryption for re-keying is not activated in MAC layer	O
	TC_FT_GAP.N.35_BV_204	Abnormal release if PP does not answer to {AUTHENTICATION-REQUEST} message for re-keying procedure	O
	TC_FT_GAP.N.35_BV_205	Abnormal release if PP answers to {AUTHENTICATION-REQUEST} message for re-keying procedure with { AUTHENTICATION-REJECT}	O
	TC_FT_GAP.N.35_BV_206	Abnormal release if PP answers to {CIPHER_REQUEST} message for re-keying procedure with { CIPHER_REJECT}	O
	TC_FT_GAP.N.35_BV_301	Assignment of default cipher key and usage of early encryption during incoming call.	O
	TC_FT_GAP.N.35_BV_302	Usage of early encryption during outgoing call	O
	TC_FT_GAP.N.35_BV_303	Usage of early encryption for MM procedure	O
	TC_FT_GAP.N.35_BV_401	Duration of registration window	M
	TC_FT_GAP.N.35_BV_402	Closing of registration window after successful registration.	M
	GAP.A.1	Easy PIN code registration	O
TC_FT_GAP.A.1	TC_FT_NG1.A.1_BV_401	Registration user feedback	O
	GAP.A.2	Easy pairing registration	M
TC_FT_GAP.A.2	TC_FT_NG1.A.2_BV_301	Base station limited registration mode	M
	TC_FT_NG1.A.2_BV_501	Base station name selection	O
	NG1.A.3	Handset Locator	O
TC_FT_NG1.A.3	TC_FT_NG1.A.3_BV_101	Handset Locator	O
	GAP.A.4	Terminal Identity number assignment in mono cell system	M
TC_FT_GAP.A.4	TC_FT_GAP.A.4_BV_101	Terminal Identity number assignment in mono cell system	M
C1501: IF NG1.N.22 AND call release command is not supported THEN "I" ELSE "M".			
C1502: IF NG1.N.22 AND call waiting rejection command is not supported THEN "I" ELSE "M".			
C1503: IF NG1.N.22 AND putting a call on-hold command is not supported THEN "I" ELSE "M".			
C1504: IF NG1.N.10 THEN "M" ELSE "I".			
C1505: IF NG1.N.17 THEN "M" ELSE "I".			
C1506: IF NG1.M.5 "no-emission" mode is supported THEN "M" ELSE "I"			
C1507: IF call release command is not supported THEN "M" ELSE "I".			
C1508: IF call waiting rejection command is not supported THEN "M" ELSE "I".			
C1509: IF putting a call on-hold command is not supported THEN "M" ELSE "I".			

6 Portable Part Test specification

This Clause includes lists of the test groups relevant for a NG-DECT portable part. Test cases are ordered like network features followed by application features (TS 102 527-3 [14], Clauses 6.4 and 6.9).

6.1 TC_PT_NG1.N.1 Codec negotiation tests cases

Test subgroup objectives: to check the IUT's behaviours when negotiating a codec.

TC_PT_NG1.N.1_BV_101	NG-DECT Part 1 capability during subscription registration
Reference:	TS 102 527-1 [13], Clauses 7.3.1 and 7.3.7 EN 300 175-5 [5], Clause 7.7.41
Initial condition:	No access rights.
Stimulus:	A44 set to 1 on TS_1. Perform an access rights request from IUT
Pass criteria:	Verify that the IUT includes in the {ACCESS-RIGHTS-REQUEST} message: <ul style="list-style-type: none"> • an IE <<TERMINAL-CAPABILITY>> with following capabilities declared: <ul style="list-style-type: none"> - Full and long 640 slots in Slot type capability field (octet 3c) - "GAP supported" in Profile indicator_1 field (octet 4) - "NG-DECT Part 1: Wide band voice supported" in Profile indicator_7 field (octet 4f) • an IE <<CODEC-LIST>> with G.722 codec, G.726 codec, and "Codec negotiation possible" indications
TC_PT_NG1.N.1_BV_102	NG-DECT Part 1 capability during location registration
Reference:	TS 102 527-1 [13], Clause 7.3.1 EN 300 175-5 [5], Clause 7.7.41
Initial condition:	T-00
Stimulus:	Perform a location registration request from IUT (Switch IUT off and on again)
Pass criteria:	Verify that the IUT includes in the {LOCATE-REQUEST} message: <ul style="list-style-type: none"> • an IE <<TERMINAL-CAPABILITY>> with following capabilities declared: <ul style="list-style-type: none"> - Full and long 640 slots in Slot type capability field (octet 3c) - "GAP supported" in Profile indicator_1 field (octet 4) - "NG-DECT Part 1: Wide band voice supported" in Profile indicator_7 field (octet 4f) • an IE <<CODEC-LIST>> with G.722 codec, G.726 codec, and "Codec negotiation possible" indications
TC_PT_NG1.N.1_BV_103	NG-DECT Part 3 capability during subscription registration
Reference:	TS 102 527-1 [13], Clause 7.4.9.1 EN 300 175-5 [5], Clause 7.7.41
Initial condition:	No access rights.
Stimulus:	A44 set to 1 on TS_1. Perform an access rights request from IUT
Pass criteria:	Verify that the IUT includes in the {ACCESS-RIGHTS-REQUEST} message an IE <<TERMINAL-CAPABILITY>> with following capabilities declared : <ul style="list-style-type: none"> • "TCLw > 55 dB" in Echo parameters field (octet 3b) • "Support of NG-DECT Part 3" capability in Profile indicator_7 octet (octet 4f)
TC_PT_NG1.N.1_BV_104	NG-DECT Part 3 capability during location registration
Reference:	TS 102 527-3 [14], Clause 7.4.9.1 EN 300 175-5 [5], Clause 7.7.41
Initial condition:	T-00
Stimulus:	Perform a location registration request from IUT (Switch IUT off and on again)
Pass criteria:	Verify that the IUT includes in the {LOCATE-REQUEST} message an IE <<TERMINAL-CAPABILITY>> with following capabilities declared: <ul style="list-style-type: none"> • "TCLw > 55 dB" in Echo parameters field (octet 3b) • "Support of NG-DECT Part 3" capability in Profile indicator_7 field (octet 4f)
TC_PT_NG1.N.1_BV_201	Basic service wideband speech
Reference:	TS 102 527-1 [13], Clause 7.3.2
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT
Pass criteria:	Verify that the IUT sets "wideband speech default" attribute in an IE <<BASIC-SERVICE>> in {CC-SETUP} message

TC_PT_NG1.N.1_BV_301	Outgoing call, codec chosen in {CC-SETUP-ACK} without slot type modification
Reference:	TS 102 527-3 [14], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT. TS_1 will choose first codec in the list in a {CC-SETUP-ACK} message
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-01 to perform a codec negotiation without slot type modification
TC_PT_NG1.N.1_BV_303	Outgoing call, codec chosen in {CC-CALL-PROC} without slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT. TS_1 will choose first codec in the list in a {CC-CALL-PROC} message
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-02 to perform a codec negotiation without slot type modification
TC_PT_NG1.N.1_BV_308	Outgoing call, codec chosen in {CC-CONNECT} message in state T-01 without slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 2
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT. TS_1 will choose first codec in the list in a {CC-CONNECT} message
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-01 to perform a codec negotiation without slot type modification
TC_PT_NG1.N.1_BV_309	Outgoing call, codec chosen in {CC-SETUP-ACK} with slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT. TS_1 will choose a different mandatory codec in the list in a {CC-SETUP-ACK} message
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-01 to perform a codec negotiation with slot type modification
TC_PT_NG1.N.1_BV_311	Outgoing call, codec chosen in {CC-CALL-PROC} message with slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT. TS_1 will choose a different mandatory codec in the list in a {CC-CALL-PROC} message
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-02 to perform a codec negotiation with slot type modification
TC_PT_NG1.N.1_BV_316	Outgoing call, codec chosen in {CC-CONNECT} in state T-01 with slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 2
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT. TS_1 will choose a different mandatory codec in the list in a {CC-CONNECT} message
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-01 to perform a codec negotiation with slot type modification

TC_PT_NG1.N.1_BV_317	Outgoing call, fall back to a mandatory codec when slot type modification fails
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 2
Initial condition:	T-00
Stimulus:	Perform an outgoing call from IUT. TS_1 will choose a different mandatory codec in the list in a {CC-CONNECT} message. TS_1 will reject the slot type modification.
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able to fall back to a mandatory codec supporting the current slot format and indicates so by sending {IWU-INFO}

TC_PT_NG1.N.1_BV_321	Incoming call G.722, full paging
Reference:	TS 102 527-1 [13], Clauses 7.3.3, D.1.3.1 and figure D.7
Initial condition:	T-00
Stimulus:	Perform incoming call G.722 (full paging (Long slot; j = 640), G.722 prioritized) from TS_1. Call pick up on IUT.
Pass criteria:	Verify that the IUT selects a codec only in one of the following messages: {CC-ALERTING} and {CC-CONNECT} (other messages not allowed) Verify by checking end-to-end U-plane connection that the IUT is able to process an incoming call G.722 through full paging

TC_PT_NG1.N.1_WC_101	Outgoing call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device A)
Reference:	TS 102 527-1 [13], Clauses D.1.2.1, D.1.2.2
Initial condition:	T-00, A wideband corded SIP phone (SIP-WB-PH) is connected to the SIP server. IUT registered to this Golden Device FT
Stimulus:	Perform an outgoing call from IUT to the SIP-WB-PH.
Pass criteria:	Verify by checking end-to-end U-plane connection that a test audio signal (e.g. sine wave 6kHz) transmitted to/from the corded phone can be heard on both ends

TC_PT_NG1.N.1_WC_102	Outgoing call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device B)
-----------------------------	---

Same as TC_PT_NG1.N.1_WC_401 but with the second Golden Device FT.

TC_PT_NG1.N.1_WC_103	Incoming call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device A)
Reference:	TS 102 527-1 [13], Clause D.1.3.1
Initial condition:	T-00, A wideband corded SIP phone (SIP-WB-PH) is connected to the SIP server. IUT registered to this Golden Device FT
Stimulus:	An outgoing call is established from the corded wideband phone (SIP-WB-PH) to the Golden Device FT. The call is answered on the IUT.
Pass criteria:	Verify by checking end-to-end U-plane connection that a test audio signal (e.g. sine wave 6kHz) transmitted to/from the corded phone can be heard on both ends

TC_PT_NG1.N.1_WC_104	Incoming call Wideband at NG-DECT Part 1 Golden Device FT (Golden Device B)
-----------------------------	---

Same as TC_PT_NG1.N.1_WC_103 but with the second Golden Device FT.

TC_PT_NG1.N.1_WC_105	Service change at NG-DECT Part 1 Golden Device FT (Golden Device A)
Reference:	TS 102 527-1 [13], Clause D.1.4.1
Initial condition:	A wideband corded SIP phone (SIP-WB-PH) and a narrow band corded SIP phone (SIP-NB-PH) are connected to the SIP server G.722 call established between IUT an wideband corded SIP phone (SIP-WB-PH) as is in TC_PT_NG1.N.1_WC_101
Stimulus:	Perform a call transfer from the corded wideband phone (SIP-WB-PH) to the corded narrowband phone (SIP-NB-PH) initiated by the corded wideband phone. This results in the SIP server re-negotiating from wideband to narrowband.
Pass criteria:	Verify by checking end-to-end U-plane connection that a test audio signal (e.g. sine wave 2kHz) transmitted to/from the corded phone can be heard on both ends

TC_PT_NG1.N.1_WC_106	Service change at NG-DECT Part 1 Golden Device FT (Golden Device B)
-----------------------------	---

Same as TC_PT_NG1.N.1_BV_105 but with the second Golden Device FT.

6.2 TC_PT_NG1.N.2 Codec switching tests cases

Test subgroup objectives: to check the IUT's behaviours during codec switching.

TC_PT_NG1.N.2_BV_101	Codec switching from G.722 to G.726
Reference:	TS 102 527-1 [13], Clauses 7.3.4, 7.3.5, D.1.4.1 and figure D.10
Initial condition:	T-10 (IUT+TS_1) in G.722
Stimulus:	Perform a codec change from TS_1
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-10 to perform a codec switching from G.722 to G.726

TC_PT_NG1.N.2_BV_102	Codec switching from G.726 to G.722
Reference:	TS 102 527-1 [13], Clauses 7.3.4 and 7.3.5
Initial condition:	T-10 (IUT+TS_1) in G.726
Stimulus:	Perform a codec change from TS_1
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able in state T-10 to perform a codec switching from G.726 to G.722

6.3 TC_PT_NG1.N.3 Missed call notification tests cases

Test subgroup objectives: to check the IUT's behaviours when receiving missed call notification.

TC_PT_NG1.N.3_BV_201	Missed call notification, activation
Reference:	TS 102 527-3 [14], Clause 7.4.1.3, table 15
Initial condition:	T-00
Stimulus:	Send a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Missed call, A new external missed voice call just arrived, 1>(<=<01H,81H,81H>) < List change indication, Missed calls list, 10>(<=<03H,81H,8AH>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> from TS_1
Pass criteria:	Verify that the IUT indicates the missed call to the receiving user

TC_PT_NG1.N.3_BV_202	Missed call notification, deactivation
Reference:	TS 102 527-3 [14], Clause 7.4.1.3, table 15
Initial condition:	T-00, Missed call notified (Run TC_PT_NG1.N.3_BV_201)
Stimulus:	Send a {FACILITY} with IE <<EVENTS NOTIFICATION= <Missed call, No new missed call arrived, 0>(<=<01H,82H,80H>) < List change indication, Missed calls list, 10> (<=<03H,81H,8AH>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> from TS_1
Pass criteria:	Verify that the IUT deactivates the missed call indication to the receiving user

TC_PT_NG1.N.3_BV_203	Missed call notification, activation while on active call
Reference:	TS 102 527-3 [14], Clause 7.4.1.3
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 1)> from TS_1 2. Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> from TS_1 3. Send a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Missed call, A new external missed voice call just arrived, 1>(<01H,81H,81H>) < List change indication, Missed calls list, 10>(<03H,81H,8AH>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> from TS_1 Hang up on IUT 4. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT indicates the call waiting to the receiving user 2. Verify that the IUT stops the call waiting presentation to the receiving user 3. Verify that the IUT sends to TS_1 a {CC-RELEASE} message 4. Verify that the IUT indicates the missed call to the receiving user

6.4 TC_PT_NG1.N.4 Voice message waiting notification tests cases

Test subgroup objectives: to check the IUT's behaviours when receiving voice message waiting notification.

TC_PT_NG1.N.4_BV_201	Voice message waiting notification, activation
Reference:	TS 102 527-3 [14], Clause 7.4.1.2, table 14
Initial condition:	T-00
Stimulus:	Send a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Message waiting, voice, 2>(<00H,81H,82H>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> from TS_1
Pass criteria:	Verify that the IUT indicates 2 voice messages waiting to the receiving user

TC_PT_NG1.N.4_BV_202	Voice message waiting notification, deactivation
Reference:	TS 102 527-3 [14], Clause 7.4.1.2, table 14
Initial condition:	T-00, Voice message waiting notified (Run TC_PT_NG1.N.4_BV_201)
Stimulus:	Send a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Message waiting, voice, 0>(<00H,81H,80H>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> from TS_1
Pass criteria:	Verify that the IUT deactivates the voice message waiting indication to the receiving user

6.5 TC_PT_NG1.N.5 Date and time synchronization tests cases

Test subgroup objectives: to check the IUT's behaviours regarding date and time synchronization.

Declarations (see Annex A):

- NG1.N.5_1 "PT initiated Date and Time synchronization" sub procedure is optional. So the manufacturer shall declare if it is supported.

TC_PT_NG1.N.5_BV_101	FT initiated Date and Time synchronization
Reference:	TS 102 527-3 [14], Clauses 7.4.2.1 and 7.4.2, table 16
Initial condition:	T-00
Stimulus:	Send a {FACILITY} message for date and time synchronization with IE <<TIME-DATE = <Time and Date, The current time/date, (09H, 01H, 14H, 18H, 52H, 12H, 00H)> >> from TS_1
Pass criteria:	Verify that the IUT sets its date to 14/01/2009 and its time to 18h 52mn (18h stands for 6p.m)
Comments:	Method to check time after test might be device specific Seconds may differ from sent value

TC_PT_NG1.N.5_BV_102	PT initiated Date and Time synchronization
Reference:	TS 102 527-3 [14], Clauses 7.4.2.2 and 7.4.2, table 16
Initial condition:	T-00
Stimulus:	Modify date and time on the IUT to 22/05/2009 and 05h 33mn 07sec
Pass criteria:	Verify that the IUT sends to TS_1 a {FACILITY} message with IE <<TIME-DATE = <Time and Date, The current time/date, (09H, 05H, 22H, 05H, 33H, don't care value, 00H)> >>
Comments:	Some IUT may not allow to configure the seconds. As a result, octet 6 seconds is not tested

6.6 TC_PT_NG1.N.6 Parallel calls tests cases

Test subgroup objectives: to check the IUT's behaviours regarding parallel calls common requirements taking into account the following considerations:

- As NG1.N.6_2 "Control messages" and NG1.N.6_3 "Sending keypad information" procedures are tested implicitly when testing NG1.N.7 "Common parallel call procedures (external or internal)", there is no test case defined for these two procedures.

TC_PT_NG1.N.6_BV_401	Codec change for parallel calls from G.722 to G.726
Reference:	TS 102 527-3 [14], Clause 7.4.3.1, Clause 7.4.3.3
Initial condition:	G.722 external call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> Perform an outgoing parallel call on line 0 to "0123456789" phone number from IUT Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) = <(1, 0, value a), (2, 1, 9)> <ol style="list-style-type: none"> If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) = <(0, 0, 0), (0, 5, 1), (1, 0, value b)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) = <(1, 0, value b), (2, 1, 3)> <ol style="list-style-type: none"> Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup ack) = <(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 2)> <ol style="list-style-type: none"> Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) = <(1, 0, value b), (2, 1, 2)> If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) = <(0, 0, 0), (0, 5, 1), (1, 0, value b)> <p>In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) = <(1, 0, value b), (2, 1, 3)></p> <p>In all cases, send a {CC-SERVICE-CHANGE} message from TS_1 with an IE <<CODEC-LIST>> set to G.726</p> Send a {IWU-INFO} message from TS_1 with an IE <<CODEC-LIST>> set to G.726 Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) = <(1, 0, value b), (2, 1, 5)>

TC_PT_NG1.N.6_BV_401	Codec change for parallel calls from G.722 to G.726
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits, and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 0) = <(0, 0, 0)> or • "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) = <(0, 0, 0)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id b) = <(0, 0, 0), (1, 0, value b)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id b) = <(1, 0, value b)> 3. Verify that the IUT sends to TS_1 a {CC-SERVICE-ACCEPT} message 4. Verify that the IUT sends to TS_1 a {IWU-INFO} message with an IE <<CODEC-LIST>> set to G.726 5. Verify end-to-end U-plane connection between IUT and TS_1

TC_PT_NG1.N.6_BV_402	Codec change for parallel calls from G.726 to G.722
Reference: Initial condition: Stimulus:	TS 102 527-3 [14], Clause 7.4.3.3 G.726 external call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a), <ol style="list-style-type: none"> 1. Perform an outgoing parallel call on line 0 to "0123456789" phone number from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) = <(1, 0, value a), (2, 1, 9)> <ol style="list-style-type: none"> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) = <(0, 0, 0), (0, 5, 1), (1, 0, value b)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) = <(1, 0, value b), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup ack) = <(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 2)> (2.3) Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) = <(1, 0, value b), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) = <(0, 0, 0), (0, 5, 1), (1, 0, value b)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) = <(1, 0, value b), (2, 1, 3)> In all cases, send a {CC-SERVICE-CHANGE} message from TS_1 with an IE <<CODEC-LIST>> set to G.722 4. Send a {IWU-INFO} message from TS_1 with an IE <<CODEC-LIST>> set to G.722 5. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) = <(1, 0, value b), (2, 1, 5)>

TC_PT_NG1.N.6_BV_402	Codec change for parallel calls from G.726 to G.722
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits, and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> or • "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id b) =<(0, 0, 0), (1, 0, value b)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id b) =<(1, 0, value b)> 3. Verify that the IUT sends to TS_1 a {CC-SERVICE-ACCEPT} message 4. Verify that the IUT sends to TS_1 a {IWU-INFO} message with an IE <<CODEC-LIST>> set to G.722 5. Verify end-to-end U-plane connection between IUT and TS_1

TC_PT_NG1.N.6_BV_501	Sending negative acknowledgement - call toggle unsuccessful
Reference:	TS 102 527-3 [14], Clauses 7.4.3.4 and 7.4.3.5.3
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a), One parallel external call on hold on line 0 (call id b)
Stimulus:	<ol style="list-style-type: none"> 1. Perform a call toggle from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone' and IE <<CALL-INFORMATION>> specifying (call id a, CS call connect, control code failed) =<(1, 0, value a), (2, 1, 5), (2, 2, 3)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 31H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 2. Verify that the IUT indicates that the service cannot be fulfilled, generates a negative acknowledgement tone and stops the generation by itself <p>Verify end-to-end U-plane connection between IUT and TS_1</p>

TC_PT_NG1.N.6_BV_601	Busy line notification
Reference:	TS 102 527-3 [14], Clauses 7.4.8.3
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing external parallel call on line 0 to "0123456789" phone number from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 04H indicating 'Busy tone on' and IE <<CALL-INFORMATION>> specifying (call id a, CS call disconnecting, reason=line in use) =<(1, 0, value a), (2, 1, 6), (2, 2, 1)> 3. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 3FH indicating 'Tones off' and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits 2. Verify that the IUT indicates that the line is busy and generates a busy tone 3. Verify that the IUT stops the tone generation <p>Verify end-to-end U-plane connection between IUT and TS_1</p>

6.7 TC_PT_NG1.N.7 Common parallel call procedures tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Common parallel call procedures (external or internal).

Declarations (see Annex A):

- NG1.N.7_7 "Active call release with replacement (from PP to FP)" is optional. So the manufacturer shall declare if it is supported for each sub procedure: call waiting and call on-hold.
- NG1.N.7_9 "Putting a call on-hold" is optional. So the manufacturer shall declare if it is supported.
- NG1.N.7_10 "Resuming a call put on-hold" is optional. So the manufacturer shall declare if it is supported.

TC_PT_NG1.N.7_BV_102	Outgoing parallel external call initiation
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.1
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing parallel call on line 0 to "0123456789" phone number from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> <ol style="list-style-type: none"> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) =<(0, 0, 0), (0, 5, 1), (1, 0, value b)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 2)> (2.3) Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) =<(0, 0, 0), (0, 5, 1), (1, 0, value b)> <p>In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)></p> <p>In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)></p>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 1CH 15H digits and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> or • "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id b) =<(0, 0, 0), (1, 0, value b)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection between IUT and TS_1

TC_PT_NG1.N.7_BV_103	Outgoing parallel internal call initiation
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.1
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	1. Perform an internal outgoing parallel call on IUT towards PP2 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> If dialing information was not received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)>
Pass criteria:	3. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 17H digit, and possibly together with terminal Id of PP2, or 2AH in case of internal general call 2. If dialing information was not received in step 1 then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to the terminal Id of PP2, or 2AH in case of internal general call, and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection between IUT and TS_2
Comments:	IUT could access to internal names list, and/or initiate internal general call, to initiate internal call

TC_PT_NG1.N.7_BV_201	Call waiting indication (external) - CLIP on call waiting indication - End of call waiting indication
Reference:	TS 102 527-3 [14], Clauses 7.4.3.5.2, 7.4.15.2.1, and 7.4.3.5.10
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 1)>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <International number, Unknown, '33298951207'> >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>
Pass criteria:	1. Verify that the IUT indicates the call waiting to the receiving user and generates a call waiting tone and stops the generation by itself Verify CLIP presentation on IUT display according to its display capabilities 2. Verify that the IUT stops the call waiting presentation to the receiving user

TC_PT_NG1.N.7_BV_202	Call waiting indication (internal) - CLIP on call waiting indication - End of call waiting indication
Reference:	TS 102 527-3 [14], Clauses 7.4.3.5.2 and 7.4.3.5.10
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2> >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>
Pass criteria:	1. Verify that the IUT Indicates the call waiting to the receiving user, generates a call waiting tone and stops the generation by itself Verify CLIP presentation on IUT display 2. Verify that the IUT stops the call waiting presentation to the receiving user
Comments:	Internal CLIP is the terminal Identity number of the calling part.

TC_PT_NG1.N.7_BV_301	Call toggle (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.3
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a), one parallel external call on hold on line 0 (call id b)
Stimulus:	<ol style="list-style-type: none"> 1. Perform a call toggle from IUT 2. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 3. Perform a call toggle from IUT 4. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 either <ul style="list-style-type: none"> • a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 31H) digits and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> or • a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 41H) and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> (hold call id a). followed by, a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 42H) and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> (resume call id b) 2. Verify end-to-end U-plane connection between IUT and TS_1 3. Verify that the IUT sends to TS_1 either <ul style="list-style-type: none"> • a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 31H) digits and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> or if declared (see Annex A Table A.4) • a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 41H) and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> (hold call id b). followed by, a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 42H) and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> (resume call id a) 4. Verify end-to-end U-plane connection between IUT and TS_1

TC_PT_NG1.N.7_BV_302	Call toggle (internal)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.3
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a), one parallel internal call on hold (call id b) with PP2
Stimulus:	<ol style="list-style-type: none"> 1. Perform a call toggle from IUT 2. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 3. Perform a call toggle from IUT 4. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 either <ul style="list-style-type: none"> • a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 31H) and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> or • a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 41H) and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> (hold call id a). followed by, a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 42H) and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> (resume call id b) 2. Verify end-to-end U-plane connection between IUT and TS_2 3. Verify that the IUT sends to TS_1 either <ul style="list-style-type: none"> • a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 31H) and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> or if declared (see Annex A Table A.4) • a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 41H) and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> (hold call id b). followed by, a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 42H) and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> (resume call id a) 4. Verify end-to-end U-plane connection between IUT and TS_1
TC_PT_NG1.N.7_BV_401	Call release and call release rejection - Resuming a call put on-hold
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.4
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a), one parallel external call on hold on line 0 (call id b)
Stimulus:	<ol style="list-style-type: none"> 1. Release active call from IUT 2. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> 3. Resume call put on hold from IUT. This may require or not an action of the user. 4. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 33H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 2. Verify that end-to-end U-plane connection is not established between IUT and TS_1 3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 42H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 4. Verify end-to-end U-plane connection between IUT and TS_1

TC_PT_NG1.N.7_BV_601	<p>Call waiting acceptance (from PP to FP) (external)</p> <p>Reference: TS 102 527-3 [14], Clause 7.4.3.5.6</p> <p>Initial condition: External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a),</p> <p>Stimulus: 1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 1)>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <International number, Unknown, '33298951207'> >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)></p> <p>Accept waiting call from IUT</p> <p>2. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)></p> <p>Pass criteria: 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 35H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)></p> <p>2. Verify end-to-end U-plane connection between IUT and TS_1</p>
TC_PT_NG1.N.7_BV_602	<p>Call waiting acceptance (from PP to FP) (internal)</p> <p>Reference: TS 102 527-3 [14], Clause 7.4.3.5.6</p> <p>Initial condition: 2 PPs registered (IUT is PP1, TS_2 is NG PP2),</p> <p>External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a),</p> <p>Stimulus: 1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2> >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)></p> <p>Accept waiting call from IUT</p> <p>2. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)></p> <p>Pass criteria: 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 35H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)></p> <p>2. Verify end-to-end U-plane connection between IUT and TS_2</p>
TC_PT_NG1.N.7_BV_701	<p>Active call release with replacement (from PP to FP) - call waiting (external)</p> <p>Reference: TS 102 527-3 [14], Clause 7.4.3.5.12</p> <p>Initial condition: External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a),</p> <p>Stimulus: 1. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 1)></p> <p>2. Accept waiting call from IUT with active call released</p> <p>3. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)></p> <p>Pass criteria: 1. Verify that the IUT indicates the call waiting to the receiving user</p> <p>2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 38H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)></p> <p>3. Verify end-to-end U-plane connection between IUT and TS_1</p>

TC_PT_NG1.N.7_BV_702	Active call release with replacement (from PP to FP) - call on-hold (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.12
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a), one parallel external call on hold on line 0 (call id b)
Stimulus:	<ol style="list-style-type: none"> 1. Perform an active call release with replacement from IUT 2. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 38H) digits and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 2. Verify end-to-end U-plane connection between IUT and TS_1
TC_PT_NG1.N.7_BV_801	Call waiting rejection (from PP to FP) (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.7
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a),
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 1)> 2. Reject waiting call from IUT 3. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT indicates the call waiting to the receiving user 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 36H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection between IUT and TS_1
TC_PT_NG1.N.7_BV_901	Putting a call on-hold (external) - Resuming a call put on-hold
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.8
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a),
Stimulus:	<ol style="list-style-type: none"> 1. Put call on hold from IUT 2. Resume call put on hold from IUT
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 41H) and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> Verify that end-to-end U-plane connection is not established between IUT and TS_1 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 42H) and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> Verify end-to-end U-plane connection between IUT and TS_1
TC_PT_NG1.N.7_BV_1201	CNIP on call waiting indication (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.11
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 1)>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NAME = < Presentation allowed, DECT standard, User-provided, verified and passed, 'CW ext CNIP'> >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>
Pass criteria:	Verify CNIP presentation on IUT display of 'CW ext CNIP'

TC_PT_NG1.N.7_BV_1202	CNIP on call waiting indication (internal)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.11 EN 300 444 [12], Clause 8.44
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)>,)>, followed by a {CC-INFO} message from TS_1 with IE << CALLING PARTY NAME = < Presentation allowed, DECT standard, User provided, verified and passed, 'CW int CNIP'> >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>
Pass criteria:	Verify CNIP presentation on IUT display of 'CW int CNIP'

6.8 TC_PT_NG1.N.8 Call transfer tests cases

Test subgroup objectives: to check the IUT's behaviours regarding call transfer procedures.

TC_PT_NG1.N.8_BV_101	Call transfer (external) - announced
Reference:	TS 102 527-3 [14], Clauses 7.4.3.6 and 7.4.15.2.1
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Perform an internal outgoing parallel call on IUT towards PP2 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> If dialing information was not received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 4. Sends a {CC-INFO} message from TS_1 with an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' and IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 5. Perform a call transfer request from IUT to PP2 6. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, followed by a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 17H digit, and possibly together with terminal Id of PP2 2. If dialing information was not received in step 1 then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to the terminal Id of PP2, and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify that the IUT generates a ring-back tone 4. Verify that the IUT stops the tone generation Verify end-to-end U-plane connection between IUT and TS_2 5. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 6. Verify that the IUT send to TS_1 a {CC-RELEASE-COM} message
Comments:	IUT could access to internal names list to initiate internal call

TC_PT_NG1.N.8_BV_102	Call transfer (external) - unannounced
Reference:	TS 102 527-3 [14], Clauses 7.4.3.6 and 7.4.15.2.1
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2),
Stimulus:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
	<ol style="list-style-type: none"> 1. Perform an internal outgoing parallel call on IUT towards PP2 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> If dialing information was not received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 4. Perform a call transfer request from IUT to PP2 5. Send a {CC-INFO} message with an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 6. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, followed by a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 17H digit, and possibly together with terminal Id of PP2 2. If dialing information was not received in step 1 then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to the terminal Id of PP2, and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify that the IUT generates a ring-back tone 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 5. Verify that the IUT stops the tone generation 6. Verify that the IUT send to TS_1 a {CC-RELEASE-COM} message
Comments:	IUT could access to internal names list to initiate internal call

TC_PT_NG1.N.8_BV_103	Call re-injection to the system (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.6.3
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Perform an internal outgoing parallel call on IUT towards all PPs 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> If dialing information was not received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 4. Perform a call transfer request from IUT 5. Send a {CC-INFO} message with an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 6. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, followed by a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 17H digit, and possibly together with 2AH digit 2. If dialing information was not received in step 1 then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 2AH in and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify that the IUT generates a ring-back tone 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 34H) digits and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 5. Verify that the IUT stops the tone generation 6. Verify that the IUT send to TS_1 a {CC-RELEASE-COM} message
Comments:	IUT could access to internal names list to initiate internal call

TC_PT_NG1.N.8_BV_104	Remote party CLIP on call transfer (external)
Reference:	TS 102 527-3 [14], Clauses 7.4.3.6.4 and 7.4.3.6.5 figure 18
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <Call class = internal call>>>, IE <<SIGNAL>> set to 40H indicating 'Alerting on - pattern 0', and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)>, followed by a {CC-INFO} message from TS_1 with IE << CALLING PARTY NUMBER = < Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2 > >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 2. Send a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <National number, National standard plan, '0298123456'>>> and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, updated call id a, CS call under transfer) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (1, 1, value a), (2, 1, 12)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify CLIP presentation on IUT display of PP2's internal CLIP 2. Verify CLIP presentation on IUT display according to its display capabilities of '0298123456' phone number
Comments:	Internal CLIP is the terminal Identity number of the calling part.

TC_PT_NG1.N.8_BV_105	Remote party CNIP on call transfer (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.6.5 figure 18
Initial condition:	Internal names test list content (see Clause 4.1.1.1.7), 2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <Call class = internal call>>>, IE <<SIGNAL>> set to 40H indicating 'Alerting on - pattern 0', and with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NAME = < Presentation allowed, DECT standard, User-provided, verified and passed, internal names list entry of PP2.> >> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 2. Send a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NAME= <Presentation allowed, DECT standard, User-provided, verified and passed, "Transferred CNIP"> >> and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, updated call id a, CS call under transfer) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (1, 1, value a), (2, 1, 12)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify CNIP presentation on IUT display of PP2's internal CNIP 'Living-room' 2. Verify CNIP presentation on IUT display according to its display capabilities of 'Transferred CNIP'

6.9 TC_PT_NG1.N.9 3-party conference with established external and/or internal calls tests cases

Test subgroup objectives: to check the IUT's behaviours regarding 3-party conference with established external and/or internal calls.

Declarations (see Annex A):

- NG1.N.9 "3-party conference with established external and/or internal calls" feature is optional on PP side, so the manufacturer shall declare if it is supported.

TC_PT_NG1.N.9_BV_101	3-party conference with established external and internal calls - IUT is the initiating party - release from one of the non initiating parties
Reference:	TS 102 527-3 [14], Clause 7.4.3.7
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a), one parallel internal call on hold (call id b) with PP2
Stimulus:	<ol style="list-style-type: none"> 1. Perform a 3-party conference call request from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> 3. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call connect) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 5)> and IE <<CALLING PARTY NUMBER = <International number, Unknown, '33299886655'> >> as a result of hang up from TS_2 4. Hang up from IUT 5. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 32H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 2. Verify end-to-end U-plane connection between IUT and TS_1/TS_2 3. Verify CLIP presentation on IUT display according to its display capabilities Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.9_BV_102	3-party conference with established external and internal calls - IUT is not the initiating party
Reference:	TS 102 527-3 [14], Clause 7.4.3.7
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), Internal call in T-10 (IUT+TS_1) initiated by IUT (call id b) with PP2, One parallel external call on-hold on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, updated call id a, CS conference connect) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (1, 1, value a), (2, 1, 11)> 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2>> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> as a result of release of external party from TS_2 3. Hang up from IUT 4. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify end-to-end U-plane connection between IUT and TS_1/TS_2 2. Verify CLIP presentation on IUT display 3. Verify end-to-end U-plane connection between IUT and TS_1 3. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.10 TC_PT_NG1.N.10 Intrusion call tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Intrusion call.

Declarations (see Annex A):

- NG1.N.10 "Intrusion call" feature is optional on PP side, so the manufacturer shall declare if it is supported.
- NG1.N.10_1 "Implicit call intrusion into a line in 'single call' mode" is optional. So the manufacturer shall declare if it is supported.
- NG1.N.10_2 "Explicit call intrusion (from PP to FP)" is optional. So the manufacturer shall declare if it is supported.

TC_PT_NG1.N.10_BV_101	Implicit call intrusion into a line in "single call" mode - IUT is the initiating party
Reference:	TS 102 527-3 [14], Clause 7.4.3.8.1
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 and PP2 attached to only line 0 External call in T-10 (TS_2+TS_1) initiated by TS_2 on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call on line 0 from IUT 2. Send a {CC-CONNECT} message from TS_1 with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS conference connect) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 11)> 3. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call connect) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 5)> and IE <<CALLING PARTY NUMBER = <National number, Unknown, '0411223344'>> as a result of hang up from TS_2 4. Hang up from IUT 5. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', and possibly an IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> 2. Verify end-to-end U-plane connection between IUT and TS_1/TS_2 3. Verify CLIP presentation on IUT display according to its display capabilities 4. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.10_BV_102	Implicit call intrusion into a line in "single call" mode - IUT is not the initiating party
Reference:	TS 102 527-3 [14], Clause 7.4.3.8.1
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 and PP2 attached to only line 0
Stimulus:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a) 1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on', IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2> >> and IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> as a result of TS_2 outgoing call 2. Send a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <National number, Unknown, '0411223344'> and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call connect) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 5)> >> as result of TS_2 hang up 3. Hang up from IUT 4. Send a {CC-RELEASE-COM} message from TS_ 1
Pass criteria:	1. Verify CLIP presentation on IUT display Verify end-to-end U-plane connection between IUT and TS_1/TS_2 2. Verify CLIP presentation on IUT display according to its display capabilities Verify end-to-end U-plane connection between IUT and TS_1 3. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.10_BV_201	Explicit call intrusion into a line in "single call" mode
Reference:	TS 102 527-3 [14], Clause 7.4.3.8.2
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 and PP2 attached to only line 0
Stimulus:	External call in T-10 (TS_2+TS_1) initiated by TS_2 on line 0 (call id a) 1. Perform either an explicit call intrusion on line 0 or a PP2 handset intrusion from IUT 2. Send a {CC-CONNECT} message from TS_1 with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' and with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS conference connect) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 11)> 3. Send a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <National number, Unknown, '0411223344'> , and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call connect) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 5)> >> as result of TS_2 hang up 4. Hang up from IUT 5. Send a {CC-RELEASE-COM} message from TS_ 1
Pass criteria:	1. Verify that the IUT sends to TS_1 either: <ul style="list-style-type: none"> • a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', IE << MULTI-KEYPAD >> set to (1CH, 40H) digits, and an IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> • a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE << MULTI-KEYPAD >> set to (1CH, 40H) digits, followed by a {CC-INFO} message with an IE << MULTI-KEYPAD >> set to (17H, 32H or 2AH) digits 2. Verify that the IUT generates an intercept tone and stops the generation by itself Verify end-to-end U-plane connection between IUT and TS_1/TS_2 3. Verify CLIP presentation on IUT display according to its display capabilities Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.11 TC_PT_NG1.N.11 Call deflection (external or internal) tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Call deflection (external or internal) with the following consideration:

- As NG1.N.11_3 "Call deflection control messages" procedure is tested when testing NG1.N.11_1 "Call deflection (internal)" procedure and NG1.N.11_2 "Call deflection (external)" procedure, there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.N.11 "Call deflection (external or internal)" feature is optional on PP side, so the manufacturer shall declare if it is supported.

TC_PT_NG1.N.11_BV_101	Call deflection (internal) in multiple lines context
Reference:	TS 102 527-3 [14], Clause 7.4.4.2
Initial condition:	2 PPs registered (IUT is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0, PP2 is attached to line 1, F-00
Stimulus:	<ol style="list-style-type: none"> Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)> Request a call deflection to PP2 from IUT Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> Verify that the IUT send to TS_1 a {CC-ALERTING} message Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 39H, 17H, Terminal Id of PP2) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comment:	Line 1 is not used. PP2 is not attached to line 0 in order not to ring in the first call

TC_PT_NG1.N.11_BV_201	Call deflection (external) - successful
Reference:	TS 102 527-3 [14], Clause 7.4.4.2
Initial condition:	T-00
Stimulus:	<ol style="list-style-type: none"> Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)> Request a call deflection to "1234567890" number from IUT Send a {CC-RELEASE} message
Pass criteria:	<ol style="list-style-type: none"> Verify that the IUT send to TS_1 a {CC-ALERTING} message Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 39H, 15H, 31H, 32H, 33H, 34H, 35H, 36H, 37H, 38H, 39H, 30H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_PT_NG1.N.11_BV_202	Call deflection (external) - unsuccessful
Reference:	TS 102 527-3 [14], Clause 7.4.4.2
Initial condition:	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)> 2. Request a call deflection to "1234567890" number from IUT 3. Send a {CC-INFO} message from TS_1 with an IE <<CALL-INFORMATION>> specifying (call id a, CS call setup, control code failed) =<(1, 0, value a), (2, 1, 1), (2, 2, 3)> 4. Call pick up on IUT 5. Hang up on IUT 6. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT send to TS_1 a {CC-ALERTING} message 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 39H, 15H, 31H, 32H, 33H, 34H, 35H, 36H, 37H, 38H, 39H, 30H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 3. Verify that the IUT continues ringing 4. Verify end-to-end U-plane connection between IUT and TS_1 5. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.11_BV_203	Call deflection (external) - Call waiting deflection
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.6
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a),
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 1)> from TS_1 2. Request a call deflection to "1234567890" number from IUT 3. Send a {CC-INFO} message from TS_1 with an IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT indicates the call waiting to the receiving user 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 39H, 15H, 31H, 32H, 33H, 34H, 35H, 36H, 37H, 38H, 39H, 30H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify that waiting call is no longer presented on IUT <p>Verify end-to-end U-plane connection between IUT and TS_1</p>

6.12 TC_PT_NG1.N.12 Line identification tests cases

Test subgroup objectives: to check the IUT's behaviours regarding line identification with the following consideration:

- NG1.N.12_7 "Line identification for a first external incoming call" is tested with NG1.N.13_3 "Call identifier assignment on incoming call (FP to PP)" procedure.

Declarations (see Annex A):

Following procedures are optional or conditional so the manufacturer shall declare if they are supported:

- NG1.N.12_4 "Line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE". When supported, the IUT shall be able to select one each selection mode to test individually each line selection procedure (can be through configuration or hidden menus).

TC_PT_NG1.N.12_BV_201	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE (non early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.2 T-00</p> <ol style="list-style-type: none"> 1. Perform an outgoing call on line 0 to "0123456789" phone number from IUT 2. (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 4. Hang up on IUT 5. Send a {CC-RELEASE-COM} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> or <ul style="list-style-type: none"> • IE <<MULTI-KEYPAD>> set to "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, 0), (1, 0, value a)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.12_BV_202	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE (early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.2 T-00</p> <ol style="list-style-type: none"> 1. Perform an outgoing call on line 0 to "0123456789" phone number from IUT 2. (2.1) If line id and complete dialing information were received in step 1 then send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a

TC_PT_NG1.N.12_BV_202	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE (early CC-CONNECT implementation)
Pass criteria:	<p>{CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)></p> <p>3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)></p> <p>4. Hang up on IUT</p> <p>5. Send a {CC-RELEASE-COM} message from TS_1</p> <p>1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and possibly either:</p> <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> or • IE <<MULTI-KEYPAD>> set to "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> <p>2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that:</p> <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, 0), (1, 0, value a)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> <p>3. Verify end-to-end U-plane connection between IUT and TS_1</p> <p>4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message</p>

TC_PT_NG1.N.12_BV_401	Line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (non early CC-CONNECT implementation)
Reference: Initial condition: Stimulus:	<p>TS 102 527-3 [14], Clause 7.4.5.2.3</p> <p>T-00</p> <p>1. Perform an outgoing call on line 0 to "0123456789" phone number from IUT</p> <p>2. (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)></p> <p>3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)></p> <p>4. Hang up on IUT</p> <p>5. Send a {CC-RELEASE-COM} message from TS_1</p>

TC_PT_NG1.N.12_BV_401	Line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (non early CC-CONNECT implementation)
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', and possibly either: <ul style="list-style-type: none"> • IE <<MULTI-KEYPAD>> set to "#0" digits or <ul style="list-style-type: none"> • IE <<MULTI-KEYPAD>> set to "#0" digits and a substring of "0123456789" 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> and an IE <<MULTI-KEYPAD>> set to "#0" digits with may be a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.12_BV_402	Line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.3 T-00</p> <ol style="list-style-type: none"> 1. Perform an outgoing call on line 0 to "0123456789" phone number from IUT 2. <ol style="list-style-type: none"> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 4. Hang up on IUT 5. Send a {CC-RELEASE-COM} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' possibly either: <ul style="list-style-type: none"> • IE <<MULTI-KEYPAD>> set to "#0" digits or <ul style="list-style-type: none"> • IE <<MULTI-KEYPAD>> set to "#0" digits and a substring of "0123456789" 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> and an IE <<MULTI-KEYPAD>> set to "#0" digits with may be a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.12_BV_501	FP managed line selection for a first external outgoing call (non early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.4 T-00</p> <ol style="list-style-type: none"> 1. Perform an outgoing call without selecting a line to "0123456789" phone number from IUT 2. (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 4. Hang up on IUT 5. Send a {CC-RELEASE-COM} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> or <ul style="list-style-type: none"> • IE <<MULTI-KEYPAD>> set to "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line None, call id a) =<(0, 0, 127), (1, 0, value a)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.12_BV_502	FP managed line selection for a first external outgoing call (early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.4 T-00</p> <ol style="list-style-type: none"> 1. Perform an outgoing call without selecting a line to "0123456789" phone number from IUT 2. <ol style="list-style-type: none"> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) Else if line id was received in step 1 then send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 4. Hang up on IUT 5. Send a {CC-RELEASE-COM} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> • or • IE <<MULTI-KEYPAD>> set to "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line None, call id a) =<(0, 0, 127), (1, 0, value a)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.13 TC_PT_NG1.N.13 Call identification tests cases

Test subgroup objectives: to check the IUT's behaviours regarding call identification with the following consideration:

- NG1.N.13_1 "Call identification general requirements" and NG1.N.13_4 "Call status indication to the handset (FP to PP)" procedures are tested with NG1.N.13_2 "Call identifier assignment on outgoing call (FP to PP)" and NG1.N.13_3 "Call identifier assignment on incoming call (FP to PP)" procedures.
- NG1.N.13_2 "Call identifier assignment on outgoing call (FP to PP)" procedure for service call is tested with NG1.N.6_17 "Missed called list" procedure and NG1.N.6_22 "Internal names list" procedure.
- No backward compatibility tests in front of a GAP FP are foreseen as these tests will be done when running EN 300 444 [12] tests.

- No backward compatibility tests in front of a NG-DECT PART1 FP are foreseen as these tests will be done when running NG-DECT PART1 backward compatibility tests (see TC_PT_NG1.N.1_WC_* TCs).

TC_PT_NG1.N.13_BV_201	Call identifier assignment on outgoing call (FP to PP) - Normal call (non early CC-CONNECT implementation) - Call status indication
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clauses 7.4.6.1, 7.4.6.2 and 7.4.6.4</p> <p>T-00</p> <ol style="list-style-type: none"> Perform an outgoing call on line 0 to "0123456789" phone number from IUT <ol style="list-style-type: none"> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) If line id only, or line id with partial dialing information was received in step 1 then send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> If not done in step 2 (i.e. in subcase 2.3) then send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-ALERTING} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> In all cases, send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Hang up on IUT Send a {CC-RELEASE-COM} message from TS_1 <ol style="list-style-type: none"> Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', and possibly either: <ul style="list-style-type: none"> IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> or <ul style="list-style-type: none"> IE <<MULTI-KEYPAD>> set to "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, 0), (1, 0, value a)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> Verify end-to-end U-plane connection between IUT and TS_1 Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.13_BV_202	Call identifier assignment on outgoing call (FP to PP) - Normal call (early CC-CONNECT implementation) - Call status indication
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clauses 7.4.6.1, 7.4.6.2 and 7.4.6.4 T-00</p> <ol style="list-style-type: none"> 1. Perform an outgoing call to "0123456789" phone number from IUT 2. <ol style="list-style-type: none"> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-CONNECT } message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 2)> (2.3) Else send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC- INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> In all cases, send a {CC- INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 4. Hang up on IUT 5. Send a {CC-RELEASE-COM} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> or • IE <<MULTI-KEYPAD>> set to "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, 0), (1, 0, value a)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id a) =<(1, 0, value a)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.13_BV_203	Call identifier assignment on outgoing call (FP to PP) - Internal call - Call status indication
Reference:	TS 102 527-3 [14], Clauses 7.4.6.3 and 7.4.6.4
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an internal outgoing call on IUT towards PP2 2. If dialing information was not received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> 3. Send a {CC-ALERTING} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)>, followed by a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 4. Hang up on IUT
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup', and possibly IE <<MULTI-KEYPAD>> set to terminal Id of PP2, or 2AH in case of internal general call 2. If dialing information was not received in step 1 then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to terminal Id of PP2, or 2AH in case of internal general call, and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	IUT could access to internal names list, and/or initiate internal general call, to initiate internal call

TC_PT_NG1.N.13_BV_301	Call identifier assignment on incoming call (FP to PP) - Normal call setup
Reference:	TS 102 527-3 [14], Clauses 7.4.6.3 and 7.4.6.4
Initial condition:	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)> 2. Call pick up on IUT 3. Send a {CC-CONNECT-ACK} message from TS_1 followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 4. Hang up on IUT
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT send to TS_1 a {CC-ALERTING} message 2. Verify that the IUT sends to TS_1 a {CC-CONNECT} message 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.14 TC_PT_NG1.N.14 Multiple lines tests cases

Test subgroup objectives: to check the IUT's behaviours regarding multiple lines with the following consideration:

- NG1.N.14_1 "Multiple lines general requirements" procedure requires that PP implements NG1.N.7 "Common parallel call procedures (external or internal)" feature. So there is no test case defined for this procedure which is tested implicitly when testing "NG1.N.7 Common parallel call procedures (external or internal)" feature.
- NG1.N.14_2 "Terminal attachment and line settings" procedure is tested when testing NG1.N.16_25 "Line settings list" procedure and NG1.N.16_40 "Attached handsets" procedure.
- NG1.N.14_3 "Incoming and outgoing external calls on a multiple line system" procedure for the first call on a line is tested when testing the NG1.N.12 "Line identification" feature. Only test cases for the second call on a second line are specified in this Clause.
- NG1.N.14_4 "Internal calls in multiple context" procedure is not tested on PP side as this procedure includes only FP requirements.

- NG1.N.14_5 "compatibility with non multiple line PP or FP" procedure is not tested as is this procedure is tested when testing the NG1.N.12 "Line identification" feature and when running EN 300 444 [12] tests.

TC_PT_NG1.N.14_BV_301	Incoming external calls on a multiple line system - Accept incoming call on second line and release it - Resume first call
<p>Reference: Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.7.3 IUT attached to line 0 and line 1, External call in T-10 (IUT+TS_1) on line 0 (call id a)</p> <ol style="list-style-type: none"> 1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', IE <<Calling Party Number=<National number, National standard plan, '2222222222'>> >> and IE<<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id b, CS call setup) =<(0, 0, 1), (0, 5, 1), (1, 0, value b), (2, 1, 1)> 2. Accept call waiting on IUT 3. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 4. Release call on line 1 on IUT 5. Send a {CC-INFO} message from TS_1 with IE<<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> Resume call on line 0 on IUT. This may require or not an action of the user. 6. Send a {CC-INFO} message from TS_1 with IE<<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> <ol style="list-style-type: none"> 1. Verify that the IUT indicates the call waiting to the receiving user, generates a call waiting tone and stops the generation by itself 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with 1CH 35H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection on line 1 between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with 1CH 33H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 5. Verify that the IUT sends to TS_1 a {CC-INFO} message with 1CH 42H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 6. Verify end-to-end U-plane connection on line 0 between IUT and TS_1

TC_PT_NG1.N.14_BV_305	Outgoing external calls on a multiple line system - Initiate a second outgoing call on second line using PP line selection
Reference:	TS 102 527-3 [14], Clause 7.4.7.3
Initial condition:	IUT attached to line 0 and line 1, External call in T-10 (IUT+TS_1) on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Initiate a second external call on line 1 to phone number "01234567890" from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id b) =<(0, 0, 1), (0, 5, 1), (1, 0, value b)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id b, CS call setup ack) =<(0, 0, 1), (0, 5, 1), (1, 0, value b), (2, 1, 2)> (2.3) Else send a {CC-INFO} message IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id b) =<(0, 0, 1), (0, 5, 1), (1, 0, value b)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 4. Release call on line 1 on IUT 5. Send a {CC-INFO} message from TS_1 with IE<<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> from TS_1 Hang up on IUT 6. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 1CH 15H digits and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 1) =<(0, 0, 1)> or • "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 1) =<(0, 0, 1)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 1, call id b) =<(0, 0, 1), (1, 0, value b)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with 1CH 33H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.14_BV_306	Outgoing external calls on a multiple line system - Initiate a second outgoing call on second line using FP managed line selection
Reference:	TS 102 527-3 [14], Clause 7.4.7.3
Initial condition:	IUT attached to line 0 and line 1, External call in T-10 (IUT+TS_1) on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Initiate a second external call without selecting a line to phone number "01234567890" from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id b) =<(0, 0, 1), (0, 5, 1), (1, 0, value b)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id b, CS call setup ack) =<(0, 0, 1), (0, 5, 1), (1, 0, value b), (2, 1, 2)> (2.3) Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id b) =<(0, 0, 1), (0, 5, 1), (1, 0, value b)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 1, call id b, CS call proc) =<(0, 0, 0), (1, 0, value b), (2, 1, 3)> In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> from TS_1 4. Release call on line 1 on IUT 5. Send a {CC-INFO} message from TS_1 with IE<<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> Hang up on IUT 6. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 1CH 15H digits and possibly either: <ul style="list-style-type: none"> • an IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> or • "0123456789" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line None, call id b) =<(0, 0, 127), (1, 0, value b)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with 1CH 33H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.15 TC_PT_NG1.N.15 Multiple calls tests cases

Test subgroup objectives: to check the IUT's behaviours regarding multiple calls procedures with the following consideration:

- NG1.N.15_1 "Multiple calls general requirements" procedure requires that PP implements NG1.N.7 "Common parallel call procedures (external or internal)" feature. So there is no test case defined for this procedure which is tested implicitly when testing "NG1.N.7 Common parallel call procedures (external or internal)" feature.

TC_PT_NG1.N.15_BV_201	Incoming external calls on a multiple call line - Accept incoming second call
Reference:	TS 102 527-3 [14], Clause 7.4.8.2
Initial condition:	IUT attached to line 0 in "Multiple call" mode line,
Stimulus:	External call in T-10 (IUT+TS_1) on line 0 (call id a) <ol style="list-style-type: none"> 1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on', IE <<CALLING PARTY NUMBER=<National number, National standard plan, '2222222222'>> >> and IE<<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup) =<(0, 0, 0) , (0, 5, 1), (1, 0, value b), (2, 1, 1)> 2. Accept call waiting on IUT 3. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)>, followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 4. Hang up on IUT 5. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT indicates the call waiting to the receiving user, generates a call waiting tone and stops the generation by itself 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with 1CH 35H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.15_BV_205	Outgoing external calls on a multiple call line - Initiate a second outgoing call on the line using line selection
Reference:	TS 102 527-3 [14], Clause 7.4.8.2
Initial condition:	IUT attached to line 0 in "Multiple call" mode line,
Stimulus:	External call in T-10 (IUT+TS_1) on line 0 (call id a)
	<ol style="list-style-type: none"> 1. Initiate a second external on line 0 to phone number "01234567890" from IUT 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> <ol style="list-style-type: none"> (2.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) =<(0, 0, 0), (0, 5, 1), (1, 0, value b) > followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)> (2.2) Else if line id only, or line id with partial dialing information was received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b, CS call setup ack) =<(0, 0, 0), (0, 5, 1), (1, 0, value b), (2, 1, 2)> (2.3) Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 3. If not done in step 2 (i.e. in subcase 2.3) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id b) =<(0, 0, 0), (0, 5, 1), (1, 0, value b) > <p>In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)></p> <p>In all cases, send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)></p> 4. Hang up on IUT 5. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 1CH 15H digits and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> or • "01234567890" or a substring of this string together with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, 0)> 2. If the line id and/or the complete number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line 0, call id b) =<(0, 0, 0), (1, 0, value b)>, and may contain an IE <<MULTI-KEYPAD>> set to a leading substring of "0123456789" (possibly the whole string) • all subsequent {CC-INFO} messages (and the first one also if it does not contain the line id) shall contain each an IE <<MULTI-KEYPAD>> set to a substring of "0123456789" (possibly the whole string) • the concatenated substrings of "0123456789" in all {CC-INFO} messages (including the substring received in step 1) shall match "0123456789" • each {CC-INFO} message shall contain (call id b) =<(1, 0, value b)> 3. Verify end-to-end U-plane connection between IUT and TS_1 4. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.16 TC_PT_NG1.N.16 List access service tests cases

Test subgroup objectives: to check the IUT's behaviours regarding list access service procedures with the following considerations:

- There are several ways to implement List access service on PP side. For example, query could happen at different places during the sequence of a TC, optional commands can be supported or not, optional fields can be or not supported, settings can be read one by one or all in one read entries command, it is impossible to predict when the List of supported lists will be open, ...As a consequence, the tester should be flexible enough to accept several implementations of list access on PP side.
- NG1.N.6_2 "List change notification" procedure is not tested because there is no requirement on PP side related to the expected behavior of the PP when it is notified.
- As "Negative Acknowledgement" command is foreseen to reject invalid PP command, NG1.N.6_11 "Negative Acknowledgement" procedure is not tested.
- As it is impossible to know when "List of supported lists" is open, NG1.N.6_16 "List of supported lists" procedure is not tested.
- The optional 'associated melody' field in contact list entry is not tested.

Declarations (see Annex A):

- Following procedures are optional or conditional so the manufacturer shall declare if they are supported:
 - NG1.N.16_2 "List change notification".
 - NG1.N.16_4 "Query supported entry fields".
 - NG1.N.16_16 "List of supported lists".
 - NG1.N.16_18 "Outgoing calls list".
 - NG1.N.16_20 "All calls list".
 - NG1.N.16_23 "All incoming calls list".
 - NG1.N.16_26 "Virtual contact list and call list per line".
 - NG1.N.16_30 "FP IP address/type".
 - NG1.N.16_31 "FP IP address/value".
 - NG1.N.16_32 "FP IP address/subnet mask".
 - NG1.N.16_33 "FP IP address/gateway".
 - NG1.N.16_34 "FP IP address/DNS server".
 - NG1.N.16_37 "FP version/Hardware version".
 - NG1.N.16_41 "Dialling prefix".
 - NG1.N.16_42 "FP melody".
 - NG1.N.16_43 "FP volume".
 - NG1.N.16_44 "Blocked number".
 - NG1.N.16_46 "Intrusion call".
 - NG1.N.16_47 "Permanent CLIR".
 - NG1.N.16_51 "Emission mode".
- The manufacturer shall declare the support of several 'contact number' fields in one entry of the contact list.

- When the following Line settings list fields are supported, the manufacturer shall declare if the associated 'code' sub fields can be edited:
 - Field 'Permanent CLIR': 'CLIR activation code' and 'CLIR deactivation code' sub fields.
 - Field 'Call forwarding unconditional': 'CFU activation code' and 'CFU deactivation code' sub fields.
 - Field 'Call forwarding on No Answer': 'CFNA activation code' and 'CFNA deactivation code' sub fields.
 - Field 'Call forwarding on Busy subscriber': 'CFB activation code' and 'CFB deactivation code' sub fields.

TC_PT_NG1.N.16_BV_1701	Missed calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.3
Initial condition:	Missed calls test list content (see Clause 4.1.1.1.2) FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the Missed calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the newest call to the oldest one 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the oldest call to the newest one 6. Phone back "VAN DER VYNC" entry (entry can be selected using the number "0247413706") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 01H, nb of sorting fields = n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, counter= i, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H> 4. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the newest call to the oldest one 5. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the oldest call to the newest one 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "0247413706" digits, and IE <<CALL-INFORMATION>> specifying (line 0 or None) =<(0, 0, 0 or 127)> 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_1702	Missed calls list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.3
Initial condition:	Missed calls test list content (see Clause 4.1.1.1.2) FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-00 1. Open the Missed calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Delete "M.UWE " entry (entry can be selected using the number "008989945270") 6. Send a <Delete entry confirm, session id=2, total nb of available entries = 9> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 01H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=s, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H> 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete entry, session id=2, entry identifier = identifier value of "M.UWE " entry > 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Some IUT may open the contact list to display the name from the contact list Some IUT may send a READ entries command after deletion of one entry

TC_PT_NG1.N.16_BV_1703	Missed calls list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.3
Initial condition:	Missed calls test list content (see Clause 4.1.1.1.2)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Missed calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries 5. Delete the list 6. Send a <Delete list confirm, session id=3> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=3> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Open the Missed calls list from IUT 8. Send a {CC-CALL-PROC} message from TS_1, followed by a <Start session confirm, session id=4, total nb=0, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> 9. Close the list access service from IUT 10. If <End session> received then send <End session confirm, session id=4> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 01H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H> 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete list, session id=3> 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message 7. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> followed by a <Start session, List identifier = 01H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 8. Verify that IUT indicates that the list is empty 9. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_1704	Missed calls list - Transfer number from missed calls list to contact list
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.3
Initial condition:	Missed calls test list content (see Clause 4.1.1.1.2)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Missed calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=4, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> from TS_1 4. Send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the number i of requested entries 5. Select "JENDREZEJZAK" entry to save it in the contact list (entry can be selected using the number "497312456897") 6. Send a <Start session confirm, session id=5, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =1> from TS_1 7. Send a <Save entry confirm, session id=5, entry identifier= identifier value of created entry , position index=4, total nb of available entries= 11> from TS_1 Close the list access service from IUT 8. If <End session> received then send <End session confirm, session id=5> and <End session confirm, session id=4> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 01H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=1, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H> 4. Verify that "JENDREZEJZAK" entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 6. Verify that the IUT sends to TS_1 a <Save entry, session id=5, entry identifier=00H> followed by <data packet/data packet last> set to (Name= JENDREZEJZAK, First name= null or possible edited value, Contact number = "497312456897") and optionally (Associated melody= one octet value) 7. Verify that the IUT sends to TS_1, optionally a <End session, session id=5> and a <End session, session id=4>, and a {CC-RELEASE} message
Comments:	<p>After selecting the "JENDREZEJZAK" entry in stimulus step 5, some IUT can re-read the entry</p> <p>Some IUT can release the missed call list session before establishing the contact list session</p>

TC_PT_NG1.N.16_BV_1705	Missed calls list - Incoming first voice call during existing list access session
Reference:	TS 102 527-3 [14], Clause 7.4.10.6.3
Initial condition:	Missed calls test list content (see Clause 4.1.1.1.2)
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the Missed calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=4, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. Send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the number i of requested entries 5. Send a {CC-CONNECT} message from TS_1 followed by a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on' , and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)> , followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER = <International number, Unknown, '44123456789'> >> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 6. If <End session> received then send <End session confirm, session id=4> from TS_1 <p>Accept waiting call from</p> <ol style="list-style-type: none"> 7. Sends a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 8. Hang up on IUT
Pass criteria:	<ol style="list-style-type: none"> 9. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 01H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=1, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H> 4. Verify that "JENDREZEJZAK" entry content is displayed on IUT 5. Verify that the IUT indicates the call waiting to the receiving user, generates a call waiting tone and stops the generation by itself <p>Verify CLIP presentation on IUT display according to its display capabilities</p> <ol style="list-style-type: none"> 6. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 35H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_1801	Outgoing calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.4
Initial condition:	Outgoing calls test list content (see Clause 4.1.1.1.3)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Outgoing calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the newest call to the oldest one 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the oldest call to the newest one 6. Phone back "LAGADEC" entry (entry can be selected using the number "02298951214") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 02H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the newest call to the oldest one 5. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the oldest call to the newest one 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "02298951214" digits, and IE <<CALL-INFORMATION>> specifying (line 0 or None) =<(0, 0, 0 or 127)> 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_1802	Outgoing calls list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.4
Initial condition:	Outgoing calls test list content (see Clause 4.1.1.1.3)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Outgoing calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Delete "C.ALEXANDER" entry (entry can be selected using the number "00449876543210") 6. Send a <Delete entry confirm, session id=2, total nb of available entries = 9> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 02H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete entry, session id=2, entry identifier = identifier value of "C.ALEXANDER" entry > 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Some IUT may send a READ entries command after deletion of one entry

TC_PT_NG1.N.16_BV_1803	Outgoing calls list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.4
Initial condition:	Outgoing calls list content (see Clause 4.1.1.1.3) FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the Outgoing calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1, 3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries 5. Delete the list from IUT 6. Send a <Delete list confirm, session id=3> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=3> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Open the Outgoing calls list from IUT 8. Send a {CC-CALL-PROC} message from TS_1, 9. Send a <Start session confirm, session id=4, total nb=0, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> from TS_1 10. Close the list access service from IUT 11. If <End session> received then send <End session confirm, session id=4> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 02H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete list, session id=3> 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message 7. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 8. Verify that the IUT sends to TS_1 a <Start session, List identifier = 02H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 9. Verify that IUT indicates that the list is empty 10. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_1901	Incoming accepted calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.5
Initial condition:	Incoming accepted calls test list content (see Clause 4.1.1.1.4)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-00
	1. Open the Incoming accepted calls list from IUT
	2. Send {CC-CALL-PROC} message from TS_1
	3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1
	4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index
	Browse into the list on IUT from the newest call to the oldest one
	5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index
	Browse into the list on IUT from the oldest call to the newest one
	6. Phone back "G. DEL PIETRO" entry (entry can be selected using the number "00550123456789")
	7. If <End session> was received then send a < End session confirm, session id=1> from TS_1
	Send a {CC-CONNECT} message from TS_1
	Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1
	Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1
	Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1
	Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1
	8. Hang up on IUT
	9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 03H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H >
	3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H >
	4. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the newest call to the oldest one
	5. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the oldest call to the newest one
	6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "00550123456789" digits, and IE <<CALL-INFORMATION>> specifying (line 0 or None) =<(0, 0, 0 or 127)>
	7. Verify end-to-end U-plane connection between IUT and TS_1
	8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_1902	Incoming accepted calls list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.5
Initial condition:	Incoming accepted calls test list content (see Clause 4.1.1.1.4) FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Incoming accepted calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Delete "D.LE BRAZ" entry (entry can be selected using the number "0425960406") 6. Send a <Delete entry confirm, session id=2, total nb of available entries = 9> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 03H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete entry, session id=2, entry identifier = identifier value of "D.LE BRAZ" entry > 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Some IUT may send a READ entries command after deletion of one entry

TC_PT_NG1.N.16_BV_1903	Incoming accepted calls list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.5
Initial condition:	Incoming accepted calls list content (see Clause 4.1.1.1.4)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-00
	1. Open the Incoming accepted calls list from IUT
	2. Send {CC-CALL-PROC} message from TS_1
	3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =3> from TS_1
	4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries
	5. Delete the list
	6. Send a <Delete list confirm, session id=3> from TS_1
	Close the list access service from IUT
	7. If <End session> received then send <End session confirm, session id=3> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
	Open the Incoming accepted calls list from IUT
	8. Send {CC-CALL-PROC} message from TS_1
	9. Send a <Start session confirm, session id=4, total nb=0, discriminator type=0, nb of sorting fields =1,sorting field id1 =3>
	10. Close the list access service from IUT
	11. If <End session> received then send <End session confirm, session id=4> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE
	<<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 03H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H >
	3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H >
	4. For each entry read, verify that entry content is displayed on IUT
	5. Verify that the IUT sends to TS_1 a <Delete list, session id=3>
	6. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message
	7. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE
	<<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	8. Verify that the IUT sends to TS_1 a <Start session, List identifier = 03H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H >
	9. Verify that IUT indicates that the list is empty
	10. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message
Pass criteria:	

TC_PT_NG1.N.16_BV_1904	Incoming accepted calls list - Transfer number from Incoming accepted calls list to contact list
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.5
Initial condition:	Incoming accepted calls test list content (see Clause 4.1.1.1.4), contact test list content FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the Incoming accepted calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=4, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. Send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the number i of requested entries 5. Select "0308980764" entry to save it in the contact list 6. Send a <Start session confirm, session id=5, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 7. Send a <Save entry confirm, session id=5, entry identifier= identifier value of created entry , position index=p, total nb of available entries= 11> from TS_1 Close the list access service from IUT 8. If <End session> received then send <End session confirm, session id=5> and <End session confirm, session id=4> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 03H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. Verify that "0308980764" entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 6. Verify that the IUT sends to TS_1 a <Save entry, session id=5, entry identifier=00H> followed by <data packet/data packet last> set to (Name= null or possible edited value, First name= null or possible edited value, Contact number = "0308980764") and optionally (Associated melody= one octet value) 7. Verify that the IUT sends to TS_1, optionally a <End session, session id=5> and a <End session, session id=4>, and a {CC-RELEASE} message
Comments:	<p>After stimulus step 4, some IUT may ask to edit each field before saving the entry Some IUT can release the Incoming accepted calls list session before establishing the contact list session</p>

TC_PT_NG1.N.16_BV_2001	All calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.6
Initial condition:	All calls test list content (see Clause 4.1.1.1.5)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the All calls list from IUT 2. Send {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=30, discriminator type=0, nb of sorting fields =1, sorting field id1 =4> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the newest call to the oldest one 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the oldest call to the newest one 6. Phone back "R.ALOUSSI" entry (entry can be selected using the number "0675000209") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 04H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H > 4. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the newest call to the oldest one 5. For each entry read, verify that entry content is displayed on IUT in the correct sequence from the oldest call to the newest one 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "0675000209" digits, and IE <<CALL-INFORMATION>> specifying (line 0 or None) =<(0, 0, 0 or 127)> 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2002	All calls list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.6
Initial condition:	All calls test list content (see Clause 4.1.1.1.5)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the All calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =4> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Delete "VAN DER VYNC" entry (entry can be selected using the number "0247413706") 6. Send a <Delete entry confirm, session id=2, total nb of available entries = 29> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 04H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete entry, session id=2, entry identifier = identifier value of "VAN DER VYNC" entry > 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Some IUT may send a READ entries command after deletion of one entry

TC_PT_NG1.N.16_BV_2003	All calls list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.6
Initial condition:	All calls list content (see Clause 4.1.1.1.5)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-00
	1. Open the All calls list from IUT
	2. Send {CC-CALL-PROC} message from TS_1
	3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =4> from TS_1
	4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries
	5. Delete the list
	6. Send a <Delete list confirm, session id=3> from TS_1
	Close the list access service from IUT
	7. If <End session> received then send <End session confirm, session id=3> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
	Open the All calls list from IUT
	8. Send a {CC-CALL-PROC} message from TS_1
	9. Send a <Start session confirm, session id=4, total nb=0, discriminator type=0, nb of sorting fields =1,sorting field id1 =3>
	10. Close the list access service from IUT
	11. If <End session> received then send <End session confirm, session id=4> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE
	<<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 04H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H >
	3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H >
	4. For each entry read, verify that entry content is displayed on IUT
	5. Verify that the IUT sends to TS_1 a <Delete list, session id=3>
	6. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message
	7. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE
	<<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	8. Verify that the IUT sends to TS_1 a <Start session, List identifier = 04H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H >
	9. Verify that IUT indicates that the list is empty
	10. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2101	Contact list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact test list content (see Clause 4.1.1.1.6)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Contact list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list in alphanumerical order on IUT 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list in reverse alphanumerical order on IUT 6. Phone back "WOJCIECHOSKI" entry (entry can be selected using the contact number "0675000321") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H> 4. For each entry read, verify that entry content is displayed on IUT in the correct sequence in alphanumerical order 5. For each entry read, verify that entry content is displayed on IUT in the correct sequence in reverse alphanumerical order 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "0675000321" digits, and IE <<CALL-INFORMATION>> specifying (line 0 or None) =<(0, 0, 0 or 127)> 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2102	Contact list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact calls test list content (see Clause 4.1.1.1.6)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Contact list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Delete "FENJIRO" entry (entry can be selected using the contact number "0490413002") 6. Send a <Delete entry confirm, session id=2, total nb of available entries = 9> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete entry, session id=2, entry identifier = identifier value of "FENJIRO" entry > 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Some IUT may send a READ entries command after deletion of one entry

TC_PT_NG1.N.16_BV_2103	Contact list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact list content (see Clause 4.1.1.1.6)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-00
	1. Open the Contact list from IUT
	2. Send {CC-CALL-PROC} message from TS_1
	3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =1> from TS_1
	4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries
	5. Delete the Contact list
	6. Send a <Delete list confirm, session id=3> from TS_1
	Close the list access service from IUT
	7. If <End session> received then send <End session confirm, session id=3> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
	Open the Contact list from IUT
	8. Send {CC-CALL-PROC} message from TS_1
	9. Send a <Start session confirm, session id=4, total nb=0, discriminator type=0, nb of sorting fields =1,sorting field id1 =3>
	10. Close the list access service from IUT
	11. If <End session> received then send <End session confirm, session id=4> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE
	<<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H >
	3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H >
	4. For each entry read, verify that entry content is displayed on IUT
	5. Verify that the IUT sends to TS_1 a <Delete list, session id=3>
	6. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message
	7. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE
	<<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	8. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H >
	9. Verify that IUT indicates that the list is empty
	10. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message
Pass criteria:	

TC_PT_NG1.N.16_BV_2104	Contact list - Create entry - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact list content (see Clause 4.1.1.1.6)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-00
	1. Open the Contact list from IUT
	2. Send a {CC-CALL-PROC} message from TS_1
	3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1
	4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries
	5. Create a new entry on IUT with following fields:
	Name= "ZBERG",
	First name= "PETER",
	Contact number1= "003308123456".
	6. Send a <Save entry confirm, session id=3, entry identifier=v, position index=11, total nb of available entries= 11>
	Select the "ZBERG" entry and edit it on IUT
	7. Send a <Edit entry confirm, session id=3> followed by <data packet/data packet last> with entry content from TS_1
	Modify the entry on IUT to:
	Name= "ZBERG",
	First name= "PETER",
	Contact number1= "06123321".
	8. Send a <Save entry confirm, session id=3, entry identifier=v, position index=11, total nb of available entries= 11>
	Close the list access service from IUT
	9. If <End session> received then send <End session confirm, session id=3> from TS_1
	Send a {CC-RELEASE-COM} message from TS_1
	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE
	<<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >>
	2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H >
	3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H >
	4. For each entry read, verify that entry content is displayed on IUT
	5. Verify that the IUT sends a <Save entry, session id=3, entry identifier=0 > from TS_1 followed by <data packet last> with entry previously created
	6. Verify that the IUT sends to TS_1 a <Edit entry, session id=3, entry identifier=v, list entry field identifier 1..n = 01H, 02H, 03H, 04H, 05H >
	7. Verify that the IUT sends a <Save entry, session id=3, entry identifier=v > from TS_1 followed by <data packet last> with entry previously modified
	8. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message
	Some IUT may send a READ entries command before editing an entry after stimulus step 6
	After saving new entry, IUT will probably read a number of entries in order to show the new entry in alphabetical order.

TC_PT_NG1.N.16_BV_2105	Contact list - Create entry - Negative Acknowledgement
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact list content (see Clause 4.1.1.1.6)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Contact list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries 5. Create a new entry on IUT with following fields: Name= "VALDO", First name= "ANDY", Contact number1= "123545". 6. Send a <Negative acknowledgement, session id=3, reject reason= list full> from TS_1 7. Close the list access service from IUT 8. If <End session> received then send <End session confirm, session id=3> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends a <Save entry, session id=3, entry identifier=0 > from TS_1 followed by <data packet last> with entry previously created 6. Verify that the IUT indicates that the list is full 7. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2106	Contact list - Read entries during external call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact test list content (see Clause 4.1.1.1.6)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	T-10 (IUT+TS_1)
	1. Open the Contact list from IUT
	2. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1,sorting field id1 =1> from TS_1
	3. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index
	Browse into the list in alphanumerical order on IUT
	4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index
	Browse into the list in reverse alphanumerical order on IUT
	5. Close the list access session on IUT
	6. Hang up on IUT
	7. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H >
	2. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H >
	3. For each entry read, verify that entry content is displayed on IUT in the correct sequence in alphanumerical order
	4. For each entry read, verify that entry content is displayed on IUT in the correct sequence in reverse alphanumerical order
	5. Verify that the IUT sends to TS_1 a <End session, session id=1>
	6. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2110	Contact list - Entry with several contact numbers
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact list content (see Clause 4.1.1.1.6) FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
T-00	
Stimulus:	<ol style="list-style-type: none"> 1. Open the Contact list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries Browse into the list in alphanumerical order on IUT 5. Select and read the "ALOUSSI" entry (entry can be selected using the contact number "0156891247") 6. Create a new entry on IUT with following fields: Name= "PARAGI", First name= "KLAUS", Contact number1= "0140506070" with 'fixed' property bit set. Contact number2= "0655443322" with 'mobile' property bit set. 7. Send a <Save entry confirm, session id=3, entry identifier=v, position index=7, total nb of available entries= 11> Close the list access service from IUT 8. If <End session> received then send <End session confirm, session id=3> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the "ALOUSSI" entry is correctly displayed: Name= "ALOUSSI", First name= "RAMIN", Contact number1= "0156891247". Contact number2= "0675000209". 6. Verify that the IUT sends a <Save entry, session id=3, entry identifier=0 > from TS_1 followed by <data packet last> with entry previously created 7. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message
Comments:	Some IUT may send a READ entries command before editing an entry after stimulus step 6 After saving new entry, IUT will probably read a number of entries in order to show the new entry in alphabetical order.

TC_PT_NG1.N.16_BV_2201	Internal names list - Read entries - Initiate an internal call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.8
Initial condition:	Internal names test list content (see Clause 4.1.1.1.7), IUT is PP1, TS_2 is NG PP2
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the Internal names list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=4, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index and 'own' property bit set when IUT entry is read Browse into the list on IUT 5. Select and call internal party 2 "Living-Room" 6. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 7. Hang up on IUT 8. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 06H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H> command 4. Verify that the internal names entries PP2, PP3, and PP9 are displayed on IUT (PP1 may be not displayed and entries can be displayed one by one or several together depending on display capabilities) 5. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, 32H) 6. Verify end-to-end U-plane connection between IUT and TS_1 7. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2202	Internal names list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.8
Initial condition:	Internal names test list content (see Clause 4.1.1.1.7), IUT is PP1, TS_2 is NG PP2
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the Internal names list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2, total nb=4, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index and 'own' property bit set when IUT entry is read Browse into the list on IUT 5. Delete "Boby room" entry (PP9) 6. Send a <Delete entry confirm, session id=2, total nb of available entries = 3> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 2. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 3. Verify that the IUT sends to TS_1 a <Start session, List identifier = 06H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H > 4. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H > 5. Verify that the internal names entries PP2, PP3 and PP9 are displayed on IUT (PP1 may be not displayed) 6. Verify that the IUT sends to TS_1 a <Delete entry, session id=2, entry identifier = identifier value of "Boby room" entry > 7. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Some IUT may send a READ entries command after deletion of one entry

TC_PT_NG1.N.16_BV_2203	Internal names list - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.8
Initial condition:	Run TC_PT_NG1.N.16_BV_2202, IUT is PP1, TS_2 is NG PP2 T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Internal names list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3, total nb=3, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index and 'own' property bit set when IUT entry is read Browse into the list on IUT 5. Select and edit "Living-room" entry (PP2) 6. Send a <Edit entry confirm, session id=3> from TS_1, followed by <data packet/data packet last> with PP2 entry content Modify the name of entry (PP2) to "Bedroom" 7. Send a <Save entry confirm, session id=3, entry identifier= entry identifier of PP2 entry, position index=2, total number of available entries=3> from TS_1 Close the list access service from IUT 8. If <End session> received then send <End session confirm, session id=3> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 06H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H > 4. Verify that the internal names entry PP2 and PP3 are displayed on IUT (PP1 may be not displayed) 5. Verify that the IUT sends to TS_1 a <Edit entry, session id=3, entry identifier= entry identifier of PP2 entry, list entry field identifier 1..n =01H, 02H, 03H > 6. Verify that the IUT sends to TS_1 <Save entry, session id=3, entry identifier= entry identifier of PP2 entry > followed by <data packet/data packet last> modifying "Name" field to "Bedroom" 7. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2204	Internal names list - Call interception - PIN protected - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.10.5.8 and 7.4.11.1
Initial condition:	Internal names test list content (see Clause 4.1.1.1.7) with 'PIN protected' property bit set to 1 for 'Call interception' field of all entries
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the Internal names list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3, total nb=3, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index and 'own' property bit set when IUT entry is read Browse into the list on IUT 5. Select and edit "Living-room" entry (PP2) 6. Send a <Start session confirm, session id=4> from TS_1 7. For each <Read entries> received, send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the requested field(s) 8. Send to TS_1 a <Edit entry confirm, session id=4> followed by <data packet/data packet last> with current PIN code field set to (FFH, FFH, FFH, FFH) Enter "1234" as current PIN code value 9. Send to TS_1 a <Save entry confirm, session id=4, entry identifier= 1, position index=1, total number of available entries=1> 10. Send to TS_1 a <End session confirm, session id=4> 11. Send a <Edit entry confirm, session id=3> from TS_1, followed by <data packet/data packet last> with PP2 entry content Modify the Call interception of entry (PP2) to Allowed value 12. Send a <Save entry confirm, session id=3, entry identifier= entry identifier of PP2 entry, position index=2, total number of available entries=3> from TS_1 Close the list access service from IUT 13. If <End session> received then send <End session confirm, session id=3> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 06H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H > 4. Verify that the internal names entry PP2 and PP3 are displayed on IUT (IUT entry, i.e. PP1, may be not displayed) 5. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 6. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at least Current PIN code identifier 01H > 7. Verify that the IUT requires the user to enter the PIN code value Verify that the IUT sends to TS_1 a <Edit entry, session id=4, entry identifier=1, list entry field identifier 1= Current PIN code identifier 01H> 8. Verify that the IUT sends to TS_1 a <Save entry, session id=4, entry identifier=1>, followed by <data packet/data packet last> with Current PIN code field set to (FFH, FFH, 12H, 34H) 9. Verify that the IUT sends to TS_1 a <End session, session id=4> 10. Verify that the IUT sends to TS_1 a <Edit entry, session id=3, entry identifier= entry identifier of PP2 entry, list entry field identifier 1..n =01H, 02H, 03H > 11. Verify that the IUT sends to TS_1 <Save entry, session id=3, entry identifier= entry identifier of PP2 entry > followed by <data packet/data packet last> modifying "Call interception" field to 31H 12. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message
Comments:	<p>Instead of asking the PIN before editing a field protected by the FP, the IUT might also ask for PIN before opening the list via start session, or before reading a field, or before editing a field (although it is not protected by the FP), or before saving a field (either protected or not by the FP). All these implementations are accepted.</p>

TC_PT_NG1.N.16_BV_2301	All incoming calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.11
Initial condition:	All incoming calls test list content (see Clause 4.1.1.1.10)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the All incoming calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Phone back "M.UWE" entry (entry can be selected using the number "008989945270") 6. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 7. Hang up on IUT 8. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 09H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 4. For each entry read, verify that entry content is displayed on IUT from the newest call to the oldest one 5. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "008989945270" digits, and IE <<CALL-INFORMATION>> specifying (line 0 or None) =<(0, 0, 0 or 127)> 6. Verify end-to-end U-plane connection between IUT and TS_1 7. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2302	All incoming calls list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.11
Initial condition:	All incoming calls test list content (see Clause 4.1.1.1.10)
	FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the All incoming calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2, total nb=20, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Delete "WOJCIECHOSKI" entry (entry can be selected using the number "0675000321") 6. Send a <Delete entry confirm, session id=2, total nb of available entries = 19> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 09H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=s, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete entry, session id=2, entry identifier = identifier value of "WOJCIECHOSKI" entry > 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Some IUT may send a READ entries command after deletion of one entry

TC_PT_NG1.N.16_BV_2303	All incoming calls list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.11
Initial condition:	All incoming calls list content (see Clause 4.1.1.1.10) FP does not implement the NG1.N.16_26 "Virtual contact list and call list per line" procedure
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the All incoming calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the number i of requested entries 5. Delete the list 6. Send a <Delete list confirm, session id=3> from TS_1 Close the list access service from IUT 7. If <End session> received then send <End session confirm, session id=3> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Open the All incoming calls list from IUT 8. Send a {CC-CALL-PROC} message from TS_1 9. Send a <Start session confirm, session id=4, total nb=0, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 10. Close the list access service from IUT 11. If <End session> received then send <End session confirm, session id=4> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 09H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H> 4. For each entry read, verify that entry content is displayed on IUT 5. Verify that the IUT sends to TS_1 a <Delete list, session id=3> 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message 7. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 8. Verify that the IUT sends to TS_1 a <Start session, List identifier = 09H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 9. Verify that IUT indicates that the list is empty 10. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message

TC_PT_NG1.N.16_BV_2401	DECT system settings list - Read entries
Reference:	TS 102 527-3 [14], Clauses 7.4.11.3 and 7.4.11.3
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 Send a {CIPHER-REQUEST} message from TS_1 3. Send a <Start session confirm, session id=1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the requested field(s) Read all settings from IUT 5. Close the list access service on IUT 6. If <End session> received then send <End session confirm, session id=1> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that IUT complete the cipher procedure at MAC level 3. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 4. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = 01H, 02H, 03H, 09H, 0AH completed with optional settings supported (see Annex A Table A.7) > 5. Verify that the DECT system settings parameters displayed on IUT match the DECT system settings list content (see Clause 4.1.1.1.8) 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-RELEASE} message
Comments:	<p>Start session might actually come before ciphering the link</p> <p>If <Query supported entry fields> received, TS_1 shall send back a <Query supported entry fields confirm, session id=1, number of editable entry fields=08H, list entry field identifier 1..n = 01H, 02H, 03H, 04H, 05H, 06H, 07H, 08H, number of non-editable entry fields=03H, list entry field identifier 1..n = 09H, 0AH, 0BH></p> <p>Settings fields can be read one by one, or all in the same <Read entries> command</p> <p>Settings will probably be displayed in several sub-menus, the PIN code and the Base reset will not be displayed at all</p>

TC_PT_NG1.N.16_BV_2501	Line settings list - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the requested field(s) Read all line settings of line 1 and 2 from IUT 5. Close the list access service on IUT 6. If <End session> received then send <End session confirm, session id=1> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 2. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 3. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 4. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = 01H, 02H, 03H, 08H, 0BH, 0CH, 0DH completed with optional settings supported (see Annex A Table A.7) > 5. Verify that the Line settings parameters displayed on IUT for line 1 and line 2 match the Line settings list contents (see Clause 4.1.1.1.9) 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-RELEASE} message
Comments:	<p>If <Query supported entry fields> received, TS_1 shall send back a <Query supported entry fields confirm, session id=1, number of editable entry fields=0CH, list entry field identifier 1..n = 01H, 03H, 04H, 05H, 06H, 07H, 08H, 09H, 0AH, 0BH, 0CH, 0DH), number of non-editable entry fields=01H, list entry field identifier 1..n = 02H)></p> <p>Settings fields can be read one by one, or all in the same <Read entries> command</p> <p>Settings will probably be displayed in several sub-menus</p>

TC_PT_NG1.N.16_BV_2601	Virtual missed calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clauses 7.4.11.5 and 7.4.10.5.3
Initial condition:	Missed calls test list content (see Clause 4.1.1.1.2) FP implements the NG1.N.14 "Multiple lines" feature T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Missed calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the newest call to the oldest one 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the oldest call to the newest one 6. Phone back "VAN DER VYNC" entry (entry can be selected using the number "0247413706") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id a) =<(0, 0, 1), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 01H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H> 4. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence from the newest call to the oldest one 5. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence from the oldest call to the newest one 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to "0247413706" digits and with an IE <<CALL-INFORMATION>> requesting the Provider 2 line (=<0, 0, 1>) 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	The PP shall filter the calls that are related to a given line thanks to the line identifier field

TC_PT_NG1.N.16_BV_2602	Virtual outgoing calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clauses 7.4.11.5 and 7.4.10.5.4
Initial condition:	Outgoing calls test list content (see Clause 4.1.1.1.3) FP implements the NG1.N.14 "Multiple lines" feature T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Outgoing calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the newest call to the oldest one 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the oldest call to the newest one 6. Phone back "LAGADEC" entry (entry can be selected using the number "02298951214") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 02H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence from the newest call to the oldest 5. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence from the oldest call to the newest one 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "02298951214" digits and with an IE <<CALL-INFORMATION>> requesting the Provider 1 line (=<0, 0, 0>) 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	The PP shall filter the calls that are related to a given line thanks to the line identifier field

TC_PT_NG1.N.16_BV_2603	Virtual incoming accepted calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clauses 7.4.11.5 and 7.4.10.5.5
Initial condition:	Incoming accepted calls test list content (see Clause 4.1.1.1.4) FP implements the NG1.N.14 "Multiple lines" feature T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Incoming accepted calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the newest call to the oldest one 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the oldest call to the newest one 6. Phone back "G. DEL PIETRO" entry (entry can be selected using the number "00550123456789") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 03H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H> 4. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence from the newest call to the oldest one 5. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence from the oldest call to the newest one 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "00550123456789" digits and with an IE <<CALL-INFORMATION>> requesting the Provider 1 line (= <0, 0, 0>) 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	The PP shall filter the calls that are related to a given line thanks to the line identifier field

TC_PT_NG1.N.16_BV_2604	Virtual all calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clauses 7.4.11.5 and 7.4.10.5.6
Initial condition:	All calls test list content (see Clause 4.1.1.1.5)
	FP implements the NG1.N.14 "Multiple lines" feature
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the All calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=30, discriminator type=0, nb of sorting fields =1, sorting field id1 =4> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the newest call to the oldest one 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT from the oldest call to the newest one 6. Phone back "R.ALOUSSI" entry (entry can be selected using the number "065000209") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 04H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H, 06H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H> 4. For each entry read, verify that entry content is displayed on IUT and in the correct sequence from the newest call to the oldest one 5. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence from the oldest call to the newest one 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "065000209" digits and with an IE <<CALL-INFORMATION>> requesting the Provider 1 line (= <0, 0, 0>) 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	The PP shall filter the calls that are related to a given line thanks to the line identifier field

TC_PT_NG1.N.16_BV_2605	Virtual contact list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clauses 7.4.11.5 and 7.4.10.5.7
Initial condition:	Contact test list content (see Clause 4.1.1.1.6)
	FP implements the NG1.N.14 "Multiple lines" feature
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Contact list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =1> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list in alphanumerical order on IUT 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list in reverse alphanumerical order on IUT 6. Phone back "WOJCIECHOSKI" entry (entry can be selected using the contact number "0675000321") 7. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id a) =<(1, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 8. Hang up on IUT 9. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 05H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H> 4. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence in alphanumerical order 5. For each entry read, verify that entry content is displayed on IUT, line by line, and in the correct sequence in reverse alphanumerical order 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "0675000321" digits and with an IE <<CALL-INFORMATION>> requesting the Provider 2 line (=<0, 0, 1>) 7. Verify end-to-end U-plane connection between IUT and TS_1 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	The PP shall filter the calls that are related to a given line thanks to the line identifier field

TC_PT_NG1.N.16_BV_2606	Virtual all incoming calls list - Read entries - Initiate an external call
Reference:	TS 102 527-3 [14], Clauses 7.4.11.5 and 7.4.10.5.11
Initial condition:	All incoming calls test list content (see Clause 4.1.1.1.10)
	FP implements the NG1.N.14 "Multiple lines" feature
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the All incoming calls list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the number i of requested entries from s start index Browse into the list on IUT 5. Phone back "M.UWE" entry (entry can be selected using the contact number "008989945270") 6. If <End session> was received then send a < End session confirm, session id=1> from TS_1 Send a {CC-CONNECT} message from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 1, full VoIP line type information, call id a) =<(1, 0, 0), (0, 5, 1), (1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> from TS_1 Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> from TS_1 7. Hang up on IUT 8. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 09H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter= i, mark entries request= (00H, 7FH, or FFH), list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H, 06H, 07H > 4. For each entry read, verify that entry content is displayed on IUT, line by line, in the correct sequence from the newest call to the oldest one 5. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "008989945270" digits and with an IE <<CALL-INFORMATION>> requesting the Provider 2 line (= <0, 0, 1>) 6. Verify end-to-end U-plane connection between IUT and TS_1 7. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	The PP shall filter the calls that are related to a given line thanks to the line identifier field

TC_PT_NG1.N.16_BV_2701	DECT system settings list - Current PIN code - New PIN code - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.11.3, 7.4.11.3.1 and 7.4.11.3.13
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8),
Stimulus:	T-00
	<ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a {CIPHER-REQUEST} message from TS_1 4. Send a <Start session confirm, session id=1> from TS_1 5. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select and edit the PIN code field on IUT 6. Send to TS_1 a <Edit entry confirm, session id=1> followed by <data packet/data packet last> with current PIN code field set to (FFH, FFH, FFH, FFH) Enter "1234" as old PIN code value 7. Send to TS_1 a <Save entry confirm, session id=1, entry identifier= 1, position index=1, total number of available entries=1> 8. Send to TS_1 a <Edit entry confirm, session id=1> followed by <data packet/data packet last> with new PIN code field set to (FFH, FFH, FFH, FFH) and 'PIN protected' property bit set to 1 Enter "6789" as new PIN code value 9. Send to TS_1 a <Save entry confirm, session id=1, entry identifier= 1, position index=1, total number of available entries=1> Close the list access service on IUT 10. If <End session> received then send <End session confirm, session id=1> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that IUT complete the cipher procedure at MAC level 3. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 4. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at the minimum PIN code identifier 01H> 5. Verify that the IUT requires the user to enter the old PIN code value Verify that the IUT sends to TS_1 a <Edit entry, session id=1, entry identifier=1, list entry field identifier 1= Current PIN code identifier 01H> 6. Verify that the IUT sends to TS_1 a <Save entry, session id=1, entry identifier=1>, followed by <data packet/data packet last> with Current PIN code field set to (FFH, FFH, 12H, 34H) 7. Verify that the IUT sends to TS_1 a <Edit entry, session id=1, entry identifier=1, list entry field identifier 1= New PIN code identifier 0DH> 8. Verify that the IUT sends to TS_1 a <Save entry, session id=1, entry identifier=1>, followed by <data packet/data packet last> with new PIN code field set to (FFH, FFH, 67H, 89H) 9. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-RELEASE} message
Comments:	<p>Start session can actually come before ciphering the link</p> <p>Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command</p>

TC_PT_NG1.N.16_BV_2801	DECT system settings list - Clock master - Edit entry - Save entry
Reference:	TS 102 527-3 [14] , Clauses 7.4.11.3 and 7.4.11.3.2
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8),
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select and edit the Clock Master field on IUT 5. Send a <Edit entry confirm, session id=2> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the Clock Master field to "Portable Part" 6. Send a <Save entry confirm, session id=2, entry identifier= 1, position index=1, total number of available entries=1> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Clock master identifier 02H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=2, entry identifier=1, list entry field identifier 1= at the minimum Clock master identifier 02H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=2, entry identifier=1>, followed by <data packet/data packet last> with Clock Master field set to 31H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_2901	DECT system settings list - Base reset - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.11.3 and 7.4.11.3.3
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select and edit the Base reset field on IUT 5. Send a <Edit entry confirm, session id=3> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the Base reset field to "Yes" 6. Send a <Save entry confirm, session id=3, entry identifier= 1, position index=1, total number of available entries=1> from TS_1 Send a {CC-RELEASE } message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Base reset identifier 03H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=3, entry identifier=1, list entry field identifier 1= at the minimum Base reset identifier 03H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=3, entry identifier=1>, followed by <data packet/data packet last> with Base reset field set to 31H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_2902	DECT system settings list - Base reset - PIN protected - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.11.1 and 7.4.11.3.3
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8) with 'PIN protected' property bit set to 1 for 'Base reset' field.
Stimulus:	<p>T-00</p> <ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=4> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the requested field(s) and with 'PIN protected' property bit set to 1 for 'Base reset' field Select and edit the Base reset field on IUT 5. Send to TS_1 a <Edit entry confirm, session id=4> followed by <data packet/data packet last> with current PIN code field set to (FFH, FFH, FFH, FFH) Enter "1234" as current PIN code value 6. Send to TS_1 a <Save entry confirm, session id=4, entry identifier= 1, position index=1, total number of available entries=1> 7. Send a <Edit entry confirm, session id=4> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the Base reset field to "Yes" 8. Send a <Save entry confirm, session id=4, entry identifier= 1, position index=1, total number of available entries=1> from TS_1 Close the list access service on IUT 9. If <End session> received then send <End session confirm, session id=4> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Base reset identifier 03H> 4. Verify that the IUT requires the user to enter the PIN code value Verify that the IUT sends to TS_1 a <Edit entry, session id=4, entry identifier=1, list entry field identifier 1= Current PIN code identifier 01H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=4, entry identifier=1>, followed by <data packet/data packet last> with Current PIN code field set to (FFH, FFH, 12H, 34H) 6. Verify that the IUT sends to TS_1 a <Edit entry, session id=4, entry identifier=1, list entry field identifier 1= at the minimum Base reset identifier 03H> 7. Verify that the IUT sends to TS_1 a <Save entry, session id=4 entry identifier=1>, followed by <data packet/data packet last> with Base reset field set to 31H, and other edited fields, if any, not modified 8. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message
Comments:	<p>Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command.</p> <p>Instead of asking the PIN before editing a field protected by the FP, the IUT might also ask for PIN before opening the list via start session, or before reading a field, or before editing a field (although it is not protected by the FP), or before saving a field (either protected or not by the FP). All these implementations are accepted.</p>

TC_PT_NG1.N.16_BV_3001	DECT system settings list - FP IP address - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.11.3, 7.4.11.3.4, 7.4.11.3.5, 7.4.11.3.6, 7.4.11.3.7 and 7.4.11.3.8
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1, 3. Send a <Start session confirm, session id=4> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select and edit the FP IP address field on IUT 5. Send a <Edit entry confirm, session id=4> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the FP IP address/type field to "DHCP" 6. Send a <Save entry confirm, session id=4, entry identifier= 1, position index=1, total number of available entries=1> from TS_1 Select and edit the FP IP address field on IUT 7. Send a <Edit entry confirm, session id=4> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the FP IP address/type field to "Static" Modify the FP IP address/value = 192.168.221.20 Modify the FP IP address/subnet mask = 255.255.255.0 Modify the FP IP address/gateway = 192.168.221.1 Modify the FP IP address/DNS server = 192.168.221.2 if declared (see Annex A, Table A.7) 8. Send a <Save entry confirm, session id=4, entry identifier= 1, position index=1, total number of available entries=1> from TS_1 Close the list access service on IUT 9. If <End session> received then send <End session confirm, session id=4> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = 01H, 02H, 03H, 09H, 0AH completed with optional settings supported (see Annex A, Table A.7) > 4. Verify that the IUT sends a <Edit entry, session id=4, entry identifier=1, list entry field identifier 1= at the minimum FP IP address identifiers 04H, 05H, 06H, 07H, 08H > 5. Verify that the IUT sends a <Save entry, session id=4, entry identifier=1>, followed by <data packet/data packet last> with FP IP address/type field set to (DHCP=1, static=0), and other edited fields, if any, not modified 6. Verify that the IUT sends a <Edit entry, session id=4, entry identifier=1, list entry field identifier 1= at the minimum FP IP address identifiers 04H, 05H, 06H, 07H, 08H > 7. Verify that the IUT sends a <Save entry, session id=4, entry identifier=1>, followed by <data packet/data packet last> with FP IP address/type field set to (DHCP=1, static=0) FP IP address/value set to (IPv4/6=0, 'C0A8DD14'H) FP IP address/subnet mask set to (IPv4/6=0, 'FFFFFF00'H) FP IP address/gateway set to (IPv4/6=0, 'C0A8DD01'H) FP IP address/DNS server set to (IPv4/6=0, 'C0A8DD02'H) if declared (see Annex A, Table A.7) other edited fields, if any, not modified 8. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_3501	DECT system settings list - FP version - Read entries
Reference:	TS 102 527-3 [14], Clauses 7.4.11.3, 7.4.11.3.9, 7.4.11.3.10 and 7.4.11.3.11
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=5> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=5> from TS_1, followed by <data packet/data packet last> with the requested field(s) Browse into the FP version field(s) on the IUT 5. Close the list access service on IUT 6. If <End session> received then send <End session confirm, session id=5> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 2. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 3. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 4. Verify that the IUT sends to TS_1 a <Read entries, session id=5, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at the minimum FP version identifiers 09H, 0AH> (0BH if declared, see Annex A, Table A.7) > 5. Verify that the FP version fields are displayed on IUT Firmware version = "F1.2C8" Eeprom version = "E1.5C6" Hardware version = "H1.4A2" if declared (see Annex A, Table A.7) 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=5>, and a {CC-RELEASE} message
Comments:	Settings fields can be read one by one, or all in the same <Read entries> command

TC_PT_NG1.N.16_BV_3801	Line settings list - Line name - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.1
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select first line and edit the Line name field from IUT 5. Send a <Edit entry confirm, session id=1> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the Line name field to "Line for test" 6. Send a <Save entry confirm, session id=1, entry identifier= 1, position index=1, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=1> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Line name identifier 01H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=1, entry identifier=1, list entry field identifier 1= at the minimum Line name identifier 01H> (some other fields can be edited at the same time) 5. Verify that the IUT sends to TS_1 a <Save entry, session id=1, entry identifier=1>, followed by <data packet/data packet last> with Line name field set to "Line for test", and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4001	Line settings list - Attached handsets - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.3
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=3, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=3> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Attached handsets field from IUT 5. Send a <Edit entry confirm, session id=3> from TS_1, followed by <data packet/data packet last> with requested field(s) Attach PP2 to line 2 from IUT 6. Send a <Save entry confirm, session id=3, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Select line 1 and edit the Attached handsets field from IUT 7. Send a <Edit entry confirm, session id=3> from TS_1, followed by <data packet/data packet last> with requested field(s) De-attach PP2 from line 1 on IUT 8. Send a <Save entry confirm, session id=3, entry identifier= 1, position index=1, total number of available entries=2> from TS_1 Close the list access service on IUT 9. If <End session> received then send <End session confirm, session id=3> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 1) = <(0, 3, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=3, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Attached handsets identifier 03H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=3, entry identifier=2, list entry field identifier 1= at the minimum Attached handsets identifier 03H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=3, entry identifier=2>, followed by <data packet/data packet last> with Attached handsets field set to Nb=02H, bitmap=86H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1 a <Edit entry, session id=3, entry identifier=1, list entry field identifier 1= at the minimum Attached handsets identifier 03H> 7. Verify that the IUT sends to TS_1 a <Save entry, session id=3, entry identifier=1>, followed by <data packet/data packet last> with Attached handsets field set to Nb=02H, bitmap= 01H, 82H, and other edited fields, if any, not modified 8. Verify that the IUT sends to TS_1, optionally a <End session, session id=3>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command IUT can open the internal names list to know the registered handsets list

TC_PT_NG1.N.16_BV_4002	Line settings list - Attached handsets - PIN protected - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.11.1 and 7.4.11.4.3
Initial condition:	Line settings list content (see Clause 4.1.1.1.9) with 'PIN protected' property bit set to 1 for 'Attached handset' field of line 2
	DECT system settings list content (see Clause 4.1.1.1.8)
Stimulus:	T-00
	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=4, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the requested field(s) and with 'PIN protected' property bit set to 1 for 'Attached handsets' field Select second line and edit the Attached handsets field from IUT 5. Send a <Start session confirm, session id=5> from TS_1 6. For each <Read entries> received, send a <Read entries confirm, session id=5> from TS_1, followed by <data packet/data packet last> with the requested field(s) 7. Send to TS_1 a <Edit entry confirm, session id=5> followed by <data packet/data packet last> with current PIN code field set to (FFH, FFH, FFH, FFH) Enter "1234" as current PIN code value 8. Send to TS_1 a <Save entry confirm, session id=5, entry identifier= 1, position index=1, total number of available entries=1> 9. Send to TS_1 a <End session confirm, session id=5> 10. Send a <Edit entry confirm, session id=4> from TS_1, followed by <data packet/data packet last> with requested field(s) Terminate the edit entry without changing the entry content 11. Send a <Save entry confirm, session id=4, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 12. If <End session> received then send <End session confirm, session id=4> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Attached handsets identifier 03H> 4. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 5. Verify that the IUT sends to TS_1 a <Read entries, session id=5, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at least Current PIN code identifier 01H > 6. Verify that the IUT requires the user to enter the PIN code value Verify that the IUT sends to TS_1 a <Edit entry, session id=5, entry identifier=1, list entry field identifier 1= Current PIN code identifier 01H> 7. Verify that the IUT sends to TS_1 a <Save entry, session id=5, entry identifier=1>, followed by <data packet/data packet last> with Current PIN code field set to (FFH, FFH, 12H, 34H) 8. Verify that the IUT sends to TS_1 a <End session, session id=5> 9. Verify that the IUT sends to TS_1 a <Edit entry, session id=4, entry identifier=2, list entry field identifier 1= at the minimum Attached handsets identifier 03H> 10. Verify that the IUT sends to TS_1 a <Save entry, session id=4, entry identifier=2>, followed by one empty <data packet/data packet last> 11. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message
Comments:	<p>Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command.</p> <p>IUT can open the internal names list to know the registered handsets list.</p> <p>Instead of asking the PIN before editing a field protected by the FP, the IUT might also ask for PIN before opening the list via start session, or before reading a field, or before editing a field (although it is not protected by the FP), or before saving a field (either protected or not by the FP). All these implementations are accepted.</p>

TC_PT_NG1.N.16_BV_4101	Line settings list - Dialing prefix - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.4
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=4, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=4> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select first line and edit the Dialing prefix field from IUT 5. Send a <Edit entry confirm, session id=4> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the Dialing prefix field to "0033" 6. Send a <Save entry confirm, session id=4, entry identifier= 1, position index=1, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=4> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=4, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Dialing prefix identifier 04H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=4, entry identifier=1, list entry field identifier 1= at the minimum Dialing prefix identifier 04H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=4, entry identifier=1>, followed by <data packet/data packet last> with Dialing prefix field set to "0033", and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=4>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4201	Line settings list - FP melody - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.5
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=5, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=5> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the FP melody field from IUT 5. Send a <Edit entry confirm, session id=5> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify FP melody field to melody 1 6. Send a <Save entry confirm, session id=5, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=5> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=5, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum FP melody identifier 05H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=5, entry identifier=2, list entry field identifier 1= at the minimum FP melody identifier 05H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=5, entry identifier=2>, followed by <data packet/data packet last> with FP melody field set to 01H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=5>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4301	Line settings list - FP volume - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.6
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=6, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=6> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the FP volume field from IUT 5. Send a <Edit entry confirm, session id=6> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify FP volume field to volume 3 6. Send a <Save entry confirm, session id=6, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=6> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=6, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum FP volume identifier 06H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=6, entry identifier=2, list entry field identifier 1= at the minimum FP volume identifier 06H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=6, entry identifier=2>, followed by <data packet/data packet last> with FP volume field set to 33H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=6>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4401	Line settings list - Blocked number - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.7
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=7, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=7> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Blocked number field from IUT 5. Send a <Edit entry confirm, session id=6> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Blocked number field to "00" 6. Send a <Save entry confirm, session id=7, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=7> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=7, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Blocked number identifier 07H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=7, entry identifier=2, list entry field identifier 1= at the minimum Blocked number identifier 07H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=7, entry identifier=2>, followed by <data packet/data packet last> with Blocked number field set to "00*", and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=7>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4501	Line settings list - Multiple calls mode - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=8, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=8> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select first line and edit the Multiple calls mode field from IUT 5. Send a <Edit entry confirm, session id=8> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Multiple calls mode field to Multiple call 6. Send a <Save entry confirm, session id=8, entry identifier= 1, position index=1, total number of available entries=2> from TS_1 Close the list access service on IUT 7. Send a {CC- If <End session> received then send <End session confirm, session id=8> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=8, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Multiple calls mode identifier 08H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=8, entry identifier=1, list entry field identifier 1= at the minimum Multiple calls mode identifier 08H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=8, entry identifier=1>, followed by <data packet/data packet last> with Multiple calls mode field set to 31H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=8>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4601	Line settings list - Intrusion call - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=9, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=9> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select first line and edit the Intrusion call field from IUT 5. Send a <Edit entry confirm, session id=9> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Intrusion call field to Allowed 6. Send a <Save entry confirm, session id=9, entry identifier= 1, position index=1, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=9> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=9, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Intrusion call identifier 09H> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=9, entry identifier=1, list entry field identifier 1= at the minimum Intrusion call identifier 09H> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=9, entry identifier=1>, followed by <data packet/data packet last> with Intrusion call field set to 31H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=9>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4701	Line settings list - Permanent CLIR - Edit entry - Save entry - "Value" sub field
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=10, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=10> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select first line and edit the Permanent CLIR field from IUT 5. Send a <Edit entry confirm, session id=10> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Permanent CLIR field to "Value" sub field set to Activated 6. Send a <Save entry confirm, session id=10, entry identifier= 1, position index=1, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=10> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=10, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Permanent CLIR identifier 0AH> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=10, entry identifier=1, list entry field identifier 1= at the minimum Permanent CLIR identifier 0AH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=10, entry identifier=1>, followed by <data packet/data packet last> with Permanent CLIR field set to Value=31H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=10>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4702	Line settings list - Permanent CLIR - Edit entry - Save entry - CLIR code sub fields
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=10, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=10> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select first line and edit the Permanent CLIR field from IUT 5. Send a <Edit entry confirm, session id=10> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Permanent CLIR field to "CLIR activation code" sub field set to "#12" "CLIR deactivation code" sub field set to "*34" 6. Send a <Save entry confirm, session id=10, entry identifier= 1, position index=1, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=10> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=10, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Permanent CLIR identifier 0AH> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=10, entry identifier=1, list entry field identifier 1= at the minimum Permanent CLIR identifier 0AH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=10, entry identifier=1>, followed by <data packet/data packet last> with Permanent CLIR field set to CLIR activation code (including length) = 03H, 23H, 31H, 32H, CLIR deactivation code (including length) =03H, 2AH, 33H, 34H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=10>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4801	Line settings list - Call forwarding unconditional - Edit entry - Save entry - 'Value' and 'Call forwarding number' sub fields
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9),
Stimulus:	T-00
	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=11, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=11 > from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Call forwarding unconditional field from IUT 5. Send a <Edit entry confirm, session id=11 > from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Call forwarding unconditional field to "Value" sub field set to Activated "Call forwarding number" sub field set to "0123456789" 6. Send a <Save entry confirm, session id=11, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=11> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 1) = <(0, 3, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=11, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Call forwarding unconditional identifier 0BH> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=11, entry identifier=2, list entry field identifier 1= at the minimum Call forwarding unconditional identifier 0BH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=11, entry identifier=2>, followed by <data packet/data packet last> with Call forwarding unconditional field set to Value=31H, Call forwarding number (including length) =0AH, 30H, 31H, 32H, 33H, 34H, 35H, 36H, 37H, 38H, 39H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=11 >, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4802	Line settings list - Call forwarding unconditional - Edit entry - Save entry - CFU codes sub fields
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=11, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=11 > from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Call forwarding unconditional field from IUT 5. Send a <Edit entry confirm, session id=11 > from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Call forwarding unconditional field to "CFU activation code" sub field set to "*111" "CFU deactivation code" sub field set to "*112" 6. Send a <Save entry confirm, session id=11, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=11> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 1) = <(0, 3, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=11, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Call forwarding unconditional identifier 0BH> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=11, entry identifier=2, list entry field identifier 1= at the minimum Call forwarding unconditional identifier 0BH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=11, entry identifier=2>, followed by <data packet/data packet last> with Call forwarding unconditional field set to CFU activation code (including length) = 04H, 2AH, 31H, 31H, 31H, CFU deactivation code (including length) =04H, 2AH, 31H, 31H, 32H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=11 >, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4901	Line settings list - Call forwarding on No answer - Edit entry - Save entry - 'Value' and 'Call forwarding number' sub fields
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9),
Stimulus:	T-00
	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=12, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=12 > from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Call forwarding unconditional field from IUT 5. Send a <Edit entry confirm, session id=12 > from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Call forwarding unconditional field to "Value" sub field set to Activated "Call forwarding number" sub field set to "9876543210" 6. Send a <Save entry confirm, session id=12, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=12> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 1) = <(0, 3, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=12, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Call forwarding on No answer identifier 0CH> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=12, entry identifier=2, list entry field identifier 1= at the minimum Call forwarding on No answer identifier 0CH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=12, entry identifier=2>, followed by <data packet/data packet last> with Call forwarding unconditional field set to Value=31H, Call forwarding number (including length) =0AH, 39H, 38H, 37H, 36H, 35H, 34H, 33H, 32H, 31H, 30H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=12 >, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_4902	Line settings list - Call forwarding on No answer - Edit entry - Save entry - CFNA codes sub fields
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=12, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=12 > from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Call forwarding unconditional field from IUT 5. Send a <Edit entry confirm, session id=12 > from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Call forwarding unconditional field to "Nb of seconds before call is forwarded" sub field set to 25 seconds "CFNA activation code" sub field set to "#20" "CFNA deactivation code" sub field set to "#21" 6. Send a <Save entry confirm, session id=12, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=12> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (=03H,88H,81H)> >> and IE<<CALL-INFORMATION>> specifying (Relating to line 1) =<(0, 3, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=12, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Call forwarding on No answer identifier 0CH> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=12, entry identifier=2, list entry field identifier 1= at the minimum Call forwarding on No answer identifier 0CH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=12, entry identifier=2>, followed by <data packet/data packet last> with Call forwarding unconditional field set to Nb of seconds before call is forwarded = 19H, CFNA activation code (including length) = 03H, 23H, 32H, 30H, CFNA deactivation code (including length) =03H, 23H, 32H, 31H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=12 >, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_5001	Line settings list - Call forwarding on Busy subscriber - Edit entry - Save entry - 'Value' and 'Call forwarding number' sub fields
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9),
Stimulus:	T-00
	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=13, total nb=2, discriminator type=0, nb of sorting fields =1,sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=13 > from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Call forwarding unconditional field from IUT 5. Send a <Edit entry confirm, session id=13 > from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Call forwarding unconditional field to "Value" sub field set to Activated "Call forwarding number" sub field set to "0123456789" 6. Send a <Save entry confirm, session id=13, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=13> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 1) = <(0, 3, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=13, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Call forwarding on Busy subscriber identifier 0DH > 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=13, entry identifier=2, list entry field identifier 1= at the minimum Call forwarding on Busy subscriber identifier 0DH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=13, entry identifier=2>, followed by <data packet/data packet last> with Call forwarding unconditional field set to Value=31H, Call forwarding number (including length) =0AH, 30H, 31H, 32H, 33H, 34H, 35H, 36H, 37H, 38H, 39H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=13 >, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_5002	Line settings list - Call forwarding on Busy subscriber - Edit entry - Save entry - CFB codes sub fields
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	Line settings list content (see Clause 4.1.1.1.9),
Stimulus:	T-00
	<ol style="list-style-type: none"> 1. Open the Line settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=13, total nb=2, discriminator type=0, nb of sorting fields =1, sorting field id1 =2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=13 > from TS_1, followed by <data packet/data packet last> with the requested field(s) Select second line and edit the Call forwarding unconditional field from IUT 5. Send a <Edit entry confirm, session id=13 > from TS_1, followed by <data packet/data packet last> with requested field(s) Modify Call forwarding unconditional field to "CFB activation code" sub field set to "*44" "CFB deactivation code" sub field set to "*55" 6. Send a <Save entry confirm, session id=13, entry identifier= 2, position index=2, total number of available entries=2> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=13> from TS_1 Send a {CC-RELEASE-COM} message from TS_1 Send a {FACILITY} message from TS_1 with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1> (= <03H,88H,81H>) >> and IE <<CALL-INFORMATION>> specifying (Relating to line 1) = <(0, 3, 1)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 08H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=13, start index=s, direction=0, counter=i, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Call forwarding on Busy subscriber identifier 0DH > 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=13, entry identifier=2, list entry field identifier 1= at the minimum Call forwarding on Busy subscriber identifier 0DH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=13, entry identifier=2>, followed by <data packet/data packet last> with Call forwarding unconditional field set to CFB activation code (including length) = 03H, 2AH, 34H, 34H, CFU deactivation code (including length) =03H, 2AH, 35H, 35H, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=13 >, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

TC_PT_NG1.N.16_BV_5101	DECT system settings list - Emission mode - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.11.3 and 7.4.11.3.12
Initial condition:	DECT system settings list content (see Clause 4.1.1.1.8), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Open the DECT system settings list from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=2> from TS_1 4. For each <Read entries> received, send a <Read entries confirm, session id=2> from TS_1, followed by <data packet/data packet last> with the requested field(s) Select and edit the Emission mode field on IUT 5. Send a <Edit entry confirm, session id=2> from TS_1, followed by <data packet/data packet last> with requested field(s) Modify the Emission mode field to "activated" 6. Send a <Save entry confirm, session id=2, entry identifier= 1, position index=1, total number of available entries=1> from TS_1 Close the list access service on IUT 7. If <End session> received then send <End session confirm, session id=2> from TS_1 Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 07H, nb of sorting fields =0> 3. Verify that the IUT sends to TS_1 a <Read entries, session id=2, start index=1, direction=0, counter=1, mark entries request= don't care value, list entry field identifier 1..n = at the minimum Emission mode identifier 0CH> 4. Verify that the IUT sends to TS_1 a <Edit entry, session id=2, entry identifier=1, list entry field identifier 1= at the minimum Emission mode identifier 0CH> 5. Verify that the IUT sends to TS_1 a <Save entry, session id=2, entry identifier=1>, followed by <data packet/data packet last> with Emission mode bit NEM set to 1B, and other edited fields, if any, not modified 6. Verify that the IUT sends to TS_1, optionally a <End session, session id=2>, and a {CC-RELEASE} message
Comments:	Settings fields can be read (or edited) one by one, or all in the same <Read entries> (respectively <Edit entry>) command

6.17 TC_PT_NG1.N.17 Calling line identity restriction tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Calling line identity restriction with the following considerations:

- As NG1.N.17_2 "Permanent CLIR mode (all calls)" procedure includes only FP requirements, there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.N.17 "Calling line identity restriction" feature is optional on PP side, so the manufacturer shall declare if it is supported.

TC_PT_NG1.N.17_BV_301	Temporary CLIR mode (call by call)
Reference:	TS 102 527-3 [14], Clause 7.4.12.3
Initial condition:	"Permanent CLIR" field on line 0 set to the following value: "Value" sub field set to 30H (deactivated)
Stimulus:	T-00 1. Perform an outgoing call with restricted presentation on line 0 to "0123456789" phone number from IUT 2. Perform an outgoing call without restricted presentation on line 0 to "0123456789" phone number from IUT
Pass criteria:	1. Verify that the IUT sends to TS_1 either in a {CC-SETUP} or a {CC-INFO} message an IE <<MULTI-KEYPAD>> set to CLIR invocation temporary digits sequence followed by "0123456789" digits 2. Verify that the IUT sends to TS_1 either in a {CC-SETUP} or a {CC-INFO} message an IE <<MULTI-KEYPAD>> set to "0123456789" digits

6.18 TC_PT_NG1.N.18 Call forwarding (external calls) tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Call forwarding (external calls) with the following considerations:

- As NG1.N.18_1 "Call forwarding common requirements" procedure is tested when testing NG1.N.16_25 "Line settings list" procedure for the corresponding settings, there is no test case defined for this procedure.
- As NG1.N.18_2 "External Call Forwarding Unconditional (CFU) to external number" procedure includes only FP requirements, there is no test case defined for this procedure.
- As NG1.N.18_3 "External Call Forwarding on No Answer (CFNA) to external number" procedure includes only FP requirements, there is no test case defined for this procedure.
- As NG1.N.18_4 "External Call Forwarding on Busy subscriber (CFB) to external number" procedure includes only FP requirements, there is no test case defined for this procedure.

6.19 TC_PT_NG1.N.19 DTMF handling tests cases

Test subgroup objectives: to check the IUT's behaviours regarding DTMF handling with the following considerations:

- As NG1.N.19_3 "Downlink DTMF reception" procedure includes only FP requirements, there is no test case defined for this procedure.
- As NG1.N.19_4 "Local DTMF feedback of dialled digits" procedure includes only MMI requirements on PP side, there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.N.19_1 "Uplink DTMF transmission at call setup when FP connected to classic switching network" is conditional, so the manufacturer shall declare if it is supported.

TC_PT_NG1.N.19_BV_101	Uplink DTMF transmission at call setup when FP connected to classic switching network
Reference:	TS 102 527-3 [14], Clause 7.4.14.1.1
Initial condition:	T-00
Stimulus:	Initiate an outgoing call from IUT and press each telephone digit key (0-9, *,#) on IUT
Pass criteria:	Verify on TS_1 side that the PP does not generate any in band audio DTMF and that keypad information is received for each digit pressed

TC_PT_NG1.N.19_BV_201	Uplink DTMF transmission when connected
Reference:	TS 102 527-3 [14], Clause 7.4.14.1.2
Initial condition:	T-10 (IUT+TS_1)
Stimulus:	Press each telephone digit key (0-9, *,#) on IUT
Pass criteria:	Verify on TS_1 side that the PP does not generate any in band audio DTMF and that keypad information is received for each digit

6.20 TC_PT_NG1.N.20 Tones provision tests cases

Test subgroup objectives: to check the IUT's behaviours regarding tone provision with the following considerations:

- The PT shall support two methods for providing tones : IE <<SIGNAL>> signal method (NG1.N.20_2 "Tones provision by the system" procedure) and in band method (NG1.N.20_3 "Transparency to tones provision by the network or PABX" procedure).
- To limit the number of tests, TC_PT_NG1.N.20 tests cases include only tone tests for a first call. Tone tests related to parallel calls are merged with corresponding TCs (see TC_PT_NG1.N.6 and TC_PT_NG1.N.7 tests cases) as it is mandatory on PP side to support "Tones provision by the system" procedure.
- As the U-plane connection using the IE <<Progress Indicator>> is mandatory in EN 300 444 [12] on PP side, there is no test case for the NG1.N.20_3 "Transparency to tones provision by the network or PABX" procedure. Only the NG1.N.20_2 "Tones provision by the system" procedure is tested.
- Ring-back tone on internal call, included in NG1.N.20_2 "Tones provision by the system" procedure, is tested when running NG1.N.8 "Call transfer" test cases, so there is no test case defined for this requirement.

Declarations (see Annex A):

- Following tones are optional so the manufacturer shall declare if they are supported:
 - NG1.N.20_2 "Dial tone".
 - NG1.N.20_2 "Off-hook warning tone".
 - NG1.N.20_2 "Network congestion tone (external calls only)".

TC_PT_NG1.N.20_BV_201	Tones provision by the system - Ring-back tone and Busy tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call to "1234567890" phone number from IUT Send a {CC-CALL-PROC} followed by a {CC-ALERTING} message with IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' from TS_1 2. Send a {CC-INFO} message with IE <<SIGNAL>> with the value 04H indicating 'Busy tone on' from TS_1 3. Send a {CC-INFO} message with IE <<SIGNAL>> with the value 3FH indicating 'Tones off' from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT generates a ring-back tone 2. Verify that the IUT generates a busy tone 3. Verify that the IUT stops the tone generation

TC_PT_NG1.N.20_BV_203	Tones provision by the system - Intercept tone, Negative acknowledgement tone and Call waiting tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	T-10 (IUT+TS_1)
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' from TS_1 2. Initiate outgoing parallel call from IUT Send a {CC-INFO} message with IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone' from TS_1 3. Send a {CC-INFO} message with IE <<SIGNAL>> with the value 07H indicating 'Call waiting tone on' from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT generates an intercept tone and stops the generation by itself 2. Verify that the IUT generates a negative acknowledgement tone and stops the generation by itself 3. Verify that the IUT generates a call-waiting tone and stops the generation by itself
Comments:	In principle, the tone generation is independent of the codec itself

TC_PT_NG1.N.20_BV_206	Tones provision by the system - Dial tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call from IUT without sending digits. Send a {CC-SETUP-ACK} message with IE <<SIGNAL>> with the value 00H indicating 'Dial tone on' from TS_1 2. Send a {CC-CONNECT} message with IE <<SIGNAL>> with the value 3FH indicating 'Tones off' from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT generates a dial-tone tone 2. Verify that the IUT stops the tone generation

TC_PT_NG1.N.20_BV_207	Tones provision by the system -Off-hook warning tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call from IUT. Send a {CC-CONNECT} message from TS_1 followed by a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 08H indicating 'Off-hook warning tone on' 2. Send a {CC-INFO} message with IE <<SIGNAL>> with the value 3FH indicating 'Tones off' from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT generates an Off-hook warning tone 2. Verify that the IUT stops the tone generation

TC_PT_NG1.N.20_BV_208	Tones provision by the system - Network congestion tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call from IUT. Send a {CC-CONNECT} message with IE <<SIGNAL>> with the value 03H indicating 'Network congestion tone on' from TS_1 2. Send a {CC-INFO} message with IE <<SIGNAL>> with the value 3FH indicating 'Tones off' from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT generates a Network congestion tone 2. Verify that the IUT stops the tone generation

6.21 TC_PT_NG1.N.21 Headset management tests cases

Test subgroup objectives: to check the IUT's behaviours regarding headset management with the following consideration:

- As NG1.N.21_6 "Switching headset to handset (headset initiated)" procedure is tested together with NG1.N.21_3 "Headset incoming call" procedure, there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.N.21 "Headset management" feature is conditional on PP side, so the manufacturer shall declare if it is supported.
- NG1.N.21_4 "Re-dial of last outgoing call" procedure is optional on PP side, so the manufacturer shall declare if it is supported.
- NG1.N.21_5 "Re-dial of last incoming call" procedure is optional on PP side, so the manufacturer shall declare if it is supported.
- NG1.N.21_6 "Switching from headset to handset (headset initiated)" procedure is optional on PP side, so the manufacturer shall declare if it is supported.

TC_PT_NG1.N.21_BV_101	Headset capability during subscription registration
Reference:	TS 102 527-3 [14], Clause 7.4.16.1
Initial condition:	No access rights on IUT AC set to '0000' value on TS_1
Stimulus:	A44 set to 1 on TS_1 Perform an access rights request from IUT
Pass criteria:	Verify that the IUT includes in the {ACCESS-RIGHTS-REQUEST} message an IE <<TERMINAL-CAPABILITY>> with following capabilities declared: <ul style="list-style-type: none"> ○ Support of the "Headset management" feature in Profile indicator_7 field (octet 4f) Verify that the registration is successful

TC_PT_NG1.N.21_BV_102	Headset capability during location registration
Reference:	TS 102 527-3 [14], Clause 7.4.16.1
Initial condition:	T-00
Stimulus:	Perform a location registration request from IUT (Switch IUT off and on again)
Pass criteria:	Verify that the IUT includes in the {LOCATE-REQUEST} message an IE <<TERMINAL-CAPABILITY>> with following capabilities declared: <ul style="list-style-type: none"> ○ Support of the "Headset management" feature in Profile indicator_7 field (octet 4f)

TC_PT_NG1.N.21_BV_201	Headset call interception - G.722 call
Reference:	TS 102 527-3 [14], Clause 7.4.16.2
Initial condition:	2 PPs registered (IUT is HPP PP1, TS_2 is NG PP2), "Call interception" set to 31H ("allowed") for PP2 entry in Internal names list, G.722 external call in T-10 (IUT+TS_1) initiated by TS_2 on line 0 (call id a)
Stimulus:	1. Perform an outgoing call from IUT 2. Send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call proc) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 3)> followed by a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 3. Hang up from IUT
Pass criteria:	4. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE << MULTI-KEYPAD >> set to (1CH, 50H, 2AH) digits 2. Verify end-to-end U-plane connection between IUT and TS_1 3. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.21_BV_301	Headset incoming call - G.722 call
Reference:	TS 102 527-3 [14], Clause 7.4.16.3
Initial condition:	2 PPs registered (IUT is HPP PP1, TS_2 is NG PP2), T-00
Stimulus:	Perform incoming call G.722 (full paging (Long slot; j = 640), G.722 prioritized) from TS_1. Call pick up on IUT
Pass criteria:	Verify that the IUT selects a codec only in one of the following messages: {CC-ALERTING} and {CC-CONNECT} (other messages not allowed) Verify end-to-end U-plane connection between IUT and TS_1

TC_PT_NG1.N.21_BV_401	Re-dial of last outgoing call
Reference:	TS 102 527-3 [14], Clause 7.4.16.4
Initial condition:	Outgoing calls test list content (see Clause 4.1.1.1.3)
	T-00
Stimulus:	<ol style="list-style-type: none"> 1. Re-dial the last outgoing call from IUT 2. Send a {CC-CALL-PROC} message from TS_1 3. Send a <Start session confirm, session id=1, total nb=10, discriminator type=0, nb of sorting fields =1, sorting field id1 =3> from TS_1 4. Send a <Read entries confirm, session id=1> from TS_1, followed by <data packet/data packet last> with first entry content 5. If <End session> was received then send a < End session confirm, session id=1> from TS_1
Pass criteria:	<ol style="list-style-type: none"> Send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 6. Hang up on IUT 7. Send a {CC-RELEASE-COM} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Verify that the IUT sends to TS_1 a <Start session, List identifier = 02H, nb of sorting fields =n followed by n sorting field identifiers among 01H, 02H, 03H, 04H, 05H > 3. Verify that the IUT sends to TS_1 a <Read entries, session id=1, start index=1, direction=0, counter= 1, mark entries request= don't care value, list entry field identifier 1..n = some or all identifiers among 01H, 02H, 03H, 04H, 05H > 4. Verify that the IUT sends to TS_1, optionally a <End session, session id=1>, and a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to "008989945270" digits 5. Verify end-to-end U-plane connection between IUT and TS_1 6. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

TC_PT_NG1.N.21_BV_501	Re-dial of last incoming call
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.16.5 T-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', IE << CALLING PARTY NUMBER =<unknown, unknown, '0123456789012'>, and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)>>> 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-RELEASE} message from TS_1 3. Redial the last incoming call from IUT 4. (4.1) If line id and complete dialing information were received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> (4.2) Else send a {CC-SETUP-ACK} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 5. If not done in step 4 (i.e. in subcase 4.2) then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a) =<(0, 0, 0), (0, 5, 1), (1, 0, value a)> In all cases, send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call proc) =<(1, 0, value a), (2, 1, 3)> In all cases, send a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 6. Hang up on IUT 7. Send a {CC-RELEASE-COM} message from TS_1 <ol style="list-style-type: none"> 1. Verify that IUT rings 2. Verify that the IUT send to TS_1 a {CC-RELEASE-COM} message 3. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', and possibly either: <ul style="list-style-type: none"> • IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> or <ul style="list-style-type: none"> • IE <<MULTI-KEYPAD>> set to "0123456789012" together with IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> 4. If the line id and/or the number were not received in step 1 then verify that the IUT sends to TS_1 one or several {CC-INFO} messages, such that: <ul style="list-style-type: none"> • if the line id was not received in step 1, the first {CC-INFO} message shall contain an IE <<CALL-INFORMATION>> specifying (line None, call id a) =<(0, 0, 127), (1, 0, value a)>, and may contain an IE <<MULTI-KEYPAD>> set to "0123456789" • the subsequent {CC-INFO} message shall contain an IE <<MULTI-KEYPAD>> set to "0123456789" and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 5. Verify end-to-end U-plane connection between IUT and TS_1 6. Verify that the IUT send to TS_1 a {CC-RELEASE } message

TC_PT_NG1.N.21_BV_601	Headset incoming call - G.726 call - Switching from headset to handset (headset initiated)
Reference:	TS 102 527-3 [14], Clauses 7.4.16.3 and 7.4.16.6
Initial condition:	2 PPs registered (IUT is HPP PP1, TS_2 is NG PP2), T-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform incoming call G.726 (short paging (full slot), G.726 prioritized) from TS_1. Call pick up on IUT 2. Perform an unannounced call transfer on IUT towards all PPs 3. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> If dialing information was not received in step 1 then send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> Else send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)> 4. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, followed by a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT selects a codec only in one of the following messages: {CC-ALERTING} and {CC-CONNECT} (other messages not allowed) Verify end-to-end U-plane connection between IUT and TS_1 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<MULTI-KEYPAD>> set to 17H digit, and possibly together with 2AH digit 3. If dialing information was not received in step 2 then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 2AH in and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 5. Verify that the IUT send to TS_1 a {CC-RELEASE-COM} message

TC_PT_NG1.N.21_BV_701	Headset side - Headset call interception - G.726 call - Switching from headset to handset (handset initiated)
Reference:	TS 102 527-3 [14], Clause 7.4.16.2
Initial condition:	2 PPs registered (IUT is HPP PP1, TS_2 is NG PP2), "Call interception" set to 31H ("allowed") for PP2 entry in Internal names list, G.726 external call in T-10 (IUT+TS_1) initiated by TS_2 on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call from IUT 2. Send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call proc) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 3)> followed by a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 3. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on', IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2> >> and IE <<CALL-INFORMATION>> specifying (call id a, CS call intercepted) =<(1, 0, value a), (2, 1, 10)> as a result of switching from headset to handset request from TS_2 4. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup'and IE <<MULTI-KEYPAD >> set to (1CH, 50H, 2AH) digits 2. Verify end-to-end U-plane connection between IUT and TS_1 3. Verify that the IUT generates an Intercept tone 4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_PT_NG1.N.21_BV_705	Handset side - Headset call interception - G.722 call - Switching from headset to handset (handset initiated)
Reference:	TS 102 527-3 [14], Clauses 7.4.16.2 and 7.4.16.7
Initial condition:	2 PPs registered (IUT is NG PP1, TS_2 is HPP PP2), "Call interception" set to 31H ("allowed") for PP2 entry in Internal names list, G.722 external call in T-10 (IUT+TS_1) initiated by IUT on line 0 (call id a)
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message from TS_1 with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on', IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2> >> and IE <<CALL-INFORMATION>> specifying (call id a, CS call intercepted) = <(1, 0, value a), (2, 1, 10)> as a result of headset call interception request from TS_2 2. Send a {CC-INFO} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) = <(1, 0, value a), (2, 1, 0)> followed by a {CC-RELEASE} message from TS_1 3. Perform a switching from headset to handset request from IUT 4. Send a {CC-CALL-PROC} message from TS_1 with IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call proc) = <(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 3)> followed by a {CC-CONNECT} message from TS_1 with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) = <(1, 0, value a), (2, 1, 5)> 5. Hang up from IUT 6. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT generates an Intercept tone 2. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 3. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<MULTI-KEYPAD >> set to (1CH, 50H, 2AH) digits 4. Verify end-to-end U-plane connection between IUT and TS_1 5. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.22 TC_PT_NG1.N.22 Handling of lines where second calls are signalled in-band tests cases

Test subgroup objectives: to check the IUT's behaviours regarding handling of lines where second calls are signalled in-band with the following consideration:

- NG1.N.22_3 "Off-hook CLIP enabled 'double call with in-band signalling' line" procedure is not tested as the PT requirements are tested with NG1.N.7 "Common parallel call procedures" feature.

TC_PT_NG1.N.22_BV_401	Use of transparent commands on IBSC lines (Basic or Off-hook CLIP enabled) or any other line
Reference:	TS 102 527-3 [14], Clause 7.4.3.10.4
Initial condition:	External call in T-10 (IUT+TS_1) initiated by IUT on line 1 (call id a)
Stimulus:	Send a transparent command from IUT
Pass criteria:	Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 15H, and IE <<CALL-INFORMATION>> specifying (call id a) = <(1, 0, value a)>

6.23 TC_PT_GAP.N.30 Calling Line Identification Presentation tests cases

Test subgroup objectives: to check the IUT's behaviours when receiving CLIP.

TC_PT_GAP.N.30_BV_01	Incoming call with calling party number in {CC-SETUP}
Reference:	EN 300 444 [12], Clauses 8.12, 8.13 and 8.41
Initial condition:	T-00
Stimulus:	Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', IE << CALLING PARTY NUMBER =<unknown, unknown, '0123456789012'>, and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)>>>
Pass criteria:	Verify by checking CLIP presentation according to its display capabilities that the IUT is able to handle <<CALLING PARTY NUMBER>> in {CC-SETUP}

TC_PT_GAP.N.30_BV_02	Incoming call with calling party number in {CC-INFO}
Reference:	EN 300 444 [12], Clauses 8.12, 8.13 and 8.41
Initial condition:	T-00
Stimulus:	Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)>>>, followed by a {CC-INFO} message from TS_1 with IE << CALLING PARTY NUMBER =<National number, National standard plan, '987654321098'> >> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a) >>>
Pass criteria:	Verify by checking CLIP presentation according to its display capabilities that the IUT is able to handle <<CALLING PARTY NUMBER>> in {CC-INFO}

6.24 TC_PT_GAP.N.31 Internal call tests cases

Test subgroup objectives: to check the IUT's behaviours when handling internal call with the following consideration:

- As GAP.N.31_2 "Internal call keypad" is tested implicitly when testing GAP.N.31_1 "Internal call setup", there is no test case defined for this procedure.
- As GAP.N.31_5 "UTF-8 CNIP" is tested implicitly when testing GAP.N.31_4 "Internal Call CNIP", there is no test case defined for this procedure.

Declarations (see Annex A):

- GAP.N.31_6 "Internal call codec priority" procedure can be not supported (see TS 102 527-3 [14], Clause 7.4.3.9.2). So the manufacturer shall declare if it is supported.

TC_PT_GAP.N.31_BV_101	Internal call setup - internal call class
Reference:	TS 102 527-1 [13], Clause 7.3.6 EN 300 444 [12], Clause 14.4.3
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	Perform an internal outgoing call on IUT towards PP2
Pass criteria:	1. Verify that the IUT sends to TS_1 an internal call setup, as described in TS 102 527-1 [13], Clause 7.3.6, table 13 (i.e. with <Call class = internal call>) 2. Verify that the IUT sends to TS_1 an internal call keypad, as described in EN 300 444 [12], Clause 14.4.3, table 107 (i.e. with <Keypad information = IA5 coding of terminal identity number in decimal of PP2, or 2AH in case of internal general call >)
Comments:	IUT could access to internal names list, and/or initiate internal general call, to initiate internal call. IUT can either send internal call keypad in the {CC-SETUP} or in the {CC-INFO} message later on

TC_PT_GAP.N.31_BV_301	Internal call CLIP
Reference:	EN 300 444 [12], Clause 8.43
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	Perform an incoming internal call from TS_1 with an IE <<CALLING PARTY NUMBER>> set to EN 300 444 [12], Clause 8.43, table 78d content and <Calling party address = IA5 coding of terminal identity number in decimal of PP2>
Pass criteria:	Verify by checking CLIP presentation according to its display capabilities that the IUT is able to handle internal call CLIP.
Comments:	Internal CLIP is the terminal Identity number of the calling part

TC_PT_GAP.N.31_BV_401	Internal call CNIP
Reference:	EN 300 444 [12], Clause 8.44 TS 102 527-3 [14], Clause 7.4.17.2
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	Perform an incoming internal call from TS_1 with IE <<CALLING PARTY NAME>> set to EN 300 444 [12], Clause 8.44, table 78e content and <Calling party name= 'TESTER çöü'>
Pass criteria:	Verify by checking CNIP presentation on IUT display of 'TESTER çöü' that the IUT is able to handle internal call UTF-8 <<CALLING PARTY NAME>> without crashing
Comments:	For UTF-8 characters the PP is not able to display among "ç", "ö", "ü", the PP should use a replacement character (replacement character is left free to the manufacturer) UTF-8 characters encoding: <ul style="list-style-type: none"> • "ç" : LATIN SMALL LETTER C WITH CEDILLA 'c3a7'H • "ö" : LATIN SMALL LETTER O WITH DIAERESIS 'c3b6'H • "ü" : LATIN SMALL LETTER U WITH DIAERESIS 'c3bc'H

TC_PT_GAP.N.31_BV_601	Internal call codec priority - outgoing call
Reference:	TS 102 527-3 [14], Clause 7.4.3.9
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	1. Perform an internal outgoing call on IUT towards PP2 2. TS_2 will choose G.722 codec in a {CC-CONNECT} message 3. Send a {CC-RELEASE} from TS_2
Pass criteria:	1. Verify that the IUT sends to TS_1 either: <ul style="list-style-type: none"> • if specified at call setup phase, G.722 in IE <<CODEC LIST>> with highest priority; or • if not specified at call setup phase, G.722 in IE <<CODEC LIST>> with highest priority at last location registration 2. Verify by checking end-to-end U-plane connection that the IUT is able to establish G.722 internal outgoing call 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM}

TC_PT_GAP.N.31_BV_602	Internal call codec priority - incoming call
Reference:	TS 102 527-3 [14], Clause 7.4.3.9
Initial condition:	2 PPs registered (IUT is PP1, TS_2 is NG PP2), T-00
Stimulus:	1. Perform an internal G.722 outgoing call on PP2 towards IUT 2. Call pick up on IUT 3. Hang up on IUT
Pass criteria:	1. Verify that the IUT presents the internal call to the user (ringing or display) 2. Verify that the IUT selects G.722 codec in IE <<CODEC LIST>> only in one of the following messages: {CC-ALERTING} and {CC-CONNECT} (other messages not allowed) Verify by checking end-to-end U-plane connection that the IUT is able to establish G.722 internal incoming call 3. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.25 TC_PT_GAP.N.34 Calling Name Identification Presentation tests cases

Test subgroup objectives: to check the IUT's behaviours when receiving CNIP with the following consideration:

- As GAP.N.34_2 "UTF-8 CNIP" is tested implicitly when testing GAP.N.34_1 "Calling Name Identification Presentation (CNIP) Indication", there is no test case defined for this procedure.

TC_PT_GAP.N.34_BV_101	Incoming call with calling party name in {CC-SETUP}
Reference:	EN 300 444 [12], Clauses 8.12, 8.13 and 8.42 TS 102 527-3 [14], Clause 7.4.17.2
Initial condition:	T-00
Stimulus:	Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', IE <<CALLING PARTY NAME = < Presentation allowed, UTF-8, Network provided, 'CNIP1 àà' >> >, and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)>>>
Pass criteria:	Verify by checking CNIP presentation on IUT display of 'CNIP1 àà' that the IUT is able to handle UTF-8 <<CALLING PARTY NAME>> in {CC-SETUP} without crashing
Comments:	For UTF-8 characters the PP is not able to display among "à", "à", "ä", the PP should use a replacement character (replacement character is left free to the manufacturer) UTF-8 characters encoding: <ul style="list-style-type: none"> • "à" : LATIN SMALL LETTER A WITH CIRCUMFLEX 'c3a2'H • "à" : LATIN SMALL LETTER A WITH GRAVE 'c3a0'H • "ä" : LATIN SMALL LETTER A WITH DIAERESIS 'c3a4'H

TC_PT_GAP.N.34_BV_102	Incoming call with calling party name in {CC-INFO}
Reference:	EN 300 444 [12], Clauses 8.12, 8.13 and 8.42 TS 102 527-3 [14], Clause 7.4.17.2
Initial condition:	T-00
Stimulus:	Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)>>>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NAME = < Presentation allowed, UTF-8, User-provided, verified and passed, 'CNIP2 éèè' >> > and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a) >>>
Pass criteria:	Verify by checking CNIP presentation on IUT display of 'CNIP2 éèè' that the IUT is able to handle UTF-8 <<CALLING PARTY NAME>> in {CC-INFO} without crashing
Comments:	For UTF-8 characters the PP is not able to display among "é", "è", "ë", the PP should use a replacement character (replacement character is left free to the manufacturer). UTF-8 characters encoding <ul style="list-style-type: none"> • "é" : LATIN SMALL LETTER E WITH ACUTE 'c3a9'H • "è" : LATIN SMALL LETTER E WITH GRAVE 'c3a8'H • "ë" : LATIN SMALL LETTER E WITH DIAERESIS 'c3ab'H

TC_PT_GAP.N.34_BV_103	Incoming call with CLIP and CNIP in {CC-INFO}
Reference:	EN 300 444 [12], Clauses 8.12, 8.13, 8.41 and 8.42 TS 102 527-3 [14], Clause 7.4.17.2
Initial condition:	T-00
Stimulus:	Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> set to 'Normal call setup', IE <<SIGNAL>> set to 41H indicating 'Alerting on - pattern 1', and IE <<CALL-INFORMATION>> specifying (line 0, full VoIP line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, 1), (1, 0, value a), (2, 1, 1)>>>, followed by a {CC-INFO} message from TS_1 with IE <<CALLING PARTY NUMBER =<National number, National standard plan, '987654321098' >> > and an IE <<CALLING PARTY NAME = < Presentation allowed, UTF-8, User-provided, verified and passed, 'CLIPøCNIP' >> > and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a) >>>
Pass criteria:	Verify by checking CNIP presentation on IUT display of 'CLIPøCNIP', and CLIP presentation, if displays, according to its display capabilities, that the IUT is able to handle both <<CALLING PARTY NUMBER>> and UTF-8 <<CALLING PARTY NAME>> in {CC-INFO} without crashing
Comments:	In case both CLIP and CNIP are sent to the PP, it is sufficient to display CNIP. It is optional to display both. If the PP is not able to display "ø" UTF-8 character, the PP should use a replacement character (replacement character is left free to the manufacturer). UTF-8 character encoding: <ul style="list-style-type: none"> • "ø" : LATIN SMALL LETTER O WITH STROKE 'c3b8'H

6.26 TC_PT_GAP.N.35 Enhanced security tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Enhanced security features with the following consideration:

- As GAP.N.35_4 "subscriptions requirements" procedure specifies only FP requirements, there is no test case defined for this procedure.

Declarations (see Annex A):

- GAP.N.35_2 "Re-keying during a call" procedure is optional on PP side, so the manufacturer shall declare if it is supported.
- GAP.N.35_3 "Early encryption" procedure is optional on PP side, so the manufacturer shall declare if it is supported.

TC_PT_GAP.N.35_BV_101	Encryption of all calls
Reference:	EN 300 444 [12], Clause 8.45.1
Initial condition:	T-00.
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call from IUT 2. Send a {CC-CONNECT} message from TS_1 followed by a {AUTHENTICATION-REQUEST} message from TS_1. 3. TS_1 sends a {CIPHER_REQUEST} message.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a {CC-SETUP} message. 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message 3. Verify that IUT activates encryption on MAC layer. Verify that encryption is activated and verify end-to-end U-plane connection.
TC_PT_GAP.N.35_BV_201	Indication of Support of 'Re-keying' and 'early encryption' in terminal capabilities during registration
Reference:	EN 300 444 [12], Clause 8.45.2
Initial condition:	No access rights. TS_1 indicates the support of 'Re-keying' and 'early encryption' in Extended higher layer capabilities part 2 (a42bit)
Stimulus:	A44 set to 1 on TS_1. Perform an access rights request from IUT
Pass criteria:	Verify that the IUT includes in the {ACCESS-RIGHTS-REQUEST} message an IE <<Terminal-capability>> with following capabilities declared <ul style="list-style-type: none"> • support of 'Re-keying' and 'early encryption' in Profile indicator_7 field (octet 4f)
TC_PT_GAP.N.35_BV_202	Indication of Support of 'Re-keying' and 'early encryption' in terminal capabilities during location registration
Reference:	EN 300 444 [12], Clause 8.45.2
Initial condition:	T-00. TS_1 indicates the support of 'Re-keying' and 'early encryption' in extended higher layer capabilities part 2 (a42 bit)
Stimulus:	Perform a location registration request from IUT (Switch IUT off and on again)
Pass criteria:	Verify that the IUT includes in the {LOCATE-REQUEST} message an IE <<Terminal-capability>> with following capabilities declared: <ul style="list-style-type: none"> • support of 'Re-keying' and 'early encryption' in Profile indicator_7 field (octet 4f)

TC_PT_GAP.N.35_BV_203	Re-keying procedure
Reference:	EN 300 444 [12], Clause 8.45.2
Initial condition:	T-00.
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call from IUT 2. Send a {CC-CONNECT} message from TS_1 followed by a {AUTHENTICATION-REQUEST} message from TS_1 TS_1 saves generated DCK as DCK_1 3. TS_1 sends a {CIPHER_REQUEST} message 4. TS_1 sends a {AUTHENTICATION-REQUEST} message. TS_1 saves generated DCK as DCK_2. 5. TS_1 sends a {CIPHER_REQUEST} message
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a {CC-SETUP} message. 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message 3. Verify that IUT activates encryption on MAC layer. Verify that encryption is activated with DCK_1 and verify end-to-end U-plane connection. 4. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message 5. Verify that IUT activates encryption on MAC layer. Verify that encryption is activated with DCK_2 and verify end-to-end U-plane connection

TC_PT_GAP.N.35_BV_301	Assignment of default cipher key and usage of early encryption during incoming call
Reference:	EN 300 444 [12], Clause 8.45.5.3
Initial condition:	IUT has no access rights. TS_1 is in registration mode ('Access Rights supported' higher layer capability bit is set to 1). TS_1 indicates the support of 'Re-keying' and 'early encryption' in the Extended higher layer capabilities part 2 (a42 bit)
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message. TS_1 sends a {AUTHENTICATION-REQUEST} message indicating DEF-bit=1 and default cipher key index 0001 and saves DCK as Def_DCK_1. 3. TS_1 broadcasts {LCE-REQUEST-PAGE} for the IUT. 4. TS_1 sends a {CC-SETUP} to IUT. 5. Invoke call answering on IUT 6. TS_1 sends a {CC-CONNECT_ACK}.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful subscription registration. Verify that IUT indicates the support of 'Re-keying' and 'early encryption' in the terminal capability. Verify that IUT sends to TS_1 a {LOCATE-REQUEST} message. 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message. Verify that connection is released on MAC layer. 3. Verify that IUT establishes MAC connection with immediate encryption activation using Def_DCK_1 with default cipher key index 0001 and sends a {LCE-PAGE-RESPONSE} message. 4. Verify that IUT sends to TS_1 a {CC-ALERTING} message 5. Verify that IUT sends to TS_1 a {CC-CONNECT} message 6. Verify end-to-end U-plane connection.

TC_PT_GAP.N.35_BV_302	Usage of early encryption during outgoing call
Reference:	EN 300 444 [12], Clause 8.45.5.3
Initial condition:	T-00. Default cipher key Def_DCK_1 is available both in IUT and TS_1 with default cipher key index 0001 (i.e. TC_PT_GAP.N.35_BV_301 was executed before and the Def_DCK_1 has not been deleted).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke outgoing call at IUT 2. TS_1 sends a {CC-CONNECT} message.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT establishes MAC connection with immediate encryption activation using Def_DCK_1 with default cipher key index 0001 Verify that IUT sends to TS_1 a {CC-SETUP} message 2. Verify end-to-end U-plane connection.

TC_PT_GAP.N.35_BV_303	Usage of early encryption for MM procedure
Reference:	EN 300 444 [12], Clause 8.45.3
Initial condition:	T-00. Default cipher key Def_DCK_1 is available both in IUT and TS_1 with default cipher key index 0001 (i.e. TC_PT_GAP.N.35_BV_301 was executed before and the Def_DCK_1 has not been deleted).
Stimulus:	Switch IUT off and on.
Pass criteria:	Verify that IUT performs MAC connection establishment with immediate encryption activation using Def_DCK_1 with default cipher key index 0001 and sends to TS_1 {LOCATE-REQUEST} message on the already encrypted link.

TC_PT_GAP.N.35_BV_304	Overwriting a default cipher key by assigning a new default cipher key with the same index
Reference:	EN 300 444 [12], Clause 8.45.3
Initial condition:	T-00. Default cipher key Def_DCK_1 is available both in IUT and TS_1 with Default cipher key index 0001 (i.e. TC_PT_GAP.N.35_BV_301 was executed before and the Def_DCK_1 has not been deleted).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke outgoing call at IUT. 2. TS_1 sends a {CC-CONNECT} message. 3. TS_1 sends a {AUTHENTICATION-REQUEST} message indicating DEF-bit=1 and default cipher key index 0001 and saves DCK as Def_DCK_2. 4. TS_1 sends a {CC-RELEASE} message. 5. TS_1 initiates release of MAC connection. 6. Invoke outgoing call at IUT. 7. TS_1 sends a {CC-CONNECT} message.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT establishes MAC connection with immediate encryption activation using Def_DCK_1 with default cipher key index 0001 Verify that IUT sends to TS_1 a {CC-SETUP} message. 2. Verify end-to-end U-plane connection. 3. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message. 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message. 5. Verify that MAC connection is released. 6. Verify that IUT establishes MAC connection with immediate encryption activation using Def_DCK_2 with default cipher key index 0001 Verify that IUT sends to TS_1 a {CC-SETUP} message. 7. Verify end-to-end U-plane connection.
Comments:	Def_DCK_2 shall be different than Def_DCK_1. This is automatically achieved in case e.g. the random values in the {AUTHENTICATION-REQUEST} message are different.

TC_PT_GAP.N.35_BV_305	Assign two default cipher keys with different indices.
Reference:	EN 300 444 [12], Clause 8.45.3
Initial condition:	T-00. Default cipher key Def_DCK_1 is available both in IUT and TS_1 with Default cipher key index 0001 (i.e. TC_PT_GAP.N.35_BV_301 was executed before and the Def_DCK_1 has not been deleted).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke outgoing call at IUT. 2. TS_1 sends a {CC-CONNECT} message. 3. TS_1 sends a {AUTHENTICATION-REQUEST} message indicating DEF-bit=1 and default cipher key index 0002 and saves DCK as Def_DCK_2. 4. TS_1 sends a {CC-RELEASE} message. 5. TS_1 initiates release of MAC connection. 6. Invoke outgoing call at IUT 7. TS_1 sends a {CC-CONNECT} message.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT establishes MAC connection with immediate encryption activation using Def_DCK_1 with default cipher key index 0001 Verify that IUT sends to TS_1 a {CC-SETUP} message. 2. Verify end-to-end U-plane connection. 3. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message. 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message. 5. Verify that MAC connection is released. 6. Verify that IUT establishes MAC connection with immediate encryption activation using either Def_DCK_1 with default cipher key index 0001 or Def_DCK_2 with default cipher key index 0002 Verify that IUT sends to TS_1 a {CC-SETUP} message. 7. Verify end-to-end U-plane connection.
Comments:	Def_DCK_2 shall be different than Def_DCK_1. This is automatically achieved in case e.g. the random values in the {AUTHENTICATION-REQUEST} message are different.

TC_PT_GAP.N.35_BV_306	PP releases connection in case FP rejects early encryption on MAC layer
Reference:	EN 300 444 [12], Clause 8.45.3
Initial condition:	T-00. Default cipher key Def_DCK_1 is available both in IUT and TS_1 with default cipher key index 0001 (i.e. TC_PT_GAP.N.35_BV_301 was executed before and the Def_DCK_1 has not been deleted).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke outgoing call at IUT. 2. TS_1 rejects start of encryption with cipher key index 0001 on MAC layer.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT establishes MAC connection and initiates encryption activation using Def_DCK_1 with default cipher key index 0001 2. Verify that PP releases connection on MAC layer.

TC_PT_GAP.N.35_BV_501	Release of unexpectedly unencrypted outgoing call in call proceeding state
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	IUT has no access rights. TS_1 is in registration mode (bit a44 is set). TS_1 broadcasts that standard ciphering is supported (bit a37=1 in higher layer capabilities).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message. Invoke outgoing call at IUT. 3. TS_1 sends a {CC-CALL-PROC} to IUT. TS_1 performs authentication of PP and FT initiated cipher switching. 4. TS_1 sends a {CC-RELEASE} message 5. TS_1 initiates release of MAC-connection. 6. Invoke outgoing call at IUT. 7. TS_1 sends a {CC-CALL-PROC} message to IUT. TS_1 does not perform authentication of PP and FT initiated cipher switching
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful registration. Verify that IUT sends to TS_1 a {LOCATE-REQUEST} message. 2. Verify that IUT sends to TS_1 a {CC-SETUP} message 3. Verify successful authentication of PP and successful FT initiated cipher switching. Verify end-to-end U-plane connection. 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message 5. Verify successful release of MAC-connection. 6. Verify that IUT establishes link and sends to TS_1 a {CC-SETUP} message 7. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<RELEASE REASON = <Security attack assumed> >>

TC_PT_GAP.N.35_BV_502	Release of unexpectedly unencrypted outgoing call in connect state
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	IUT has no access rights. TS_1 is in registration mode (bit a44 is set). TS_1 broadcasts that standard ciphering is supported (bit a37=1 in higher layer capabilities).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message. Invoke outgoing call at IUT. 3. TS_1 sends a {CC-CONNECT} message to IUT. TS_1 performs authentication of PP and FT initiated cipher switching. 4. TS_1 sends a {CC-RELEASE} message 5. TS_1 initiates release of MAC-connection. 6. Invoke outgoing call at IUT. 7. TS_1 sends a {CC-CONNECT} message to IUT. TS_1 does not perform authentication of PP and FT initiated cipher switching
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful registration. Verify that IUT sends to TS_1 a {LOCATE-REQUEST} message. 2. Verify that IUT sends to TS_1 a {CC-SETUP} message 3. Verify successful authentication of PP and successful FT initiated cipher switching. Verify end-to-end U-plane connection. 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message 5. Verify successful release of MAC-connection. 6. Verify that IUT establishes link and sends to TS_1 a {CC-SETUP} message 7. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<RELEASE REASON= <Security attack assumed> >>.

TC_PT_GAP.N.35_BV_503	Release of unexpectedly unencrypted incoming call in alerting state
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	IUT has no access rights. TS_1 is in registration mode (bit a44 is set). TS_1 broadcasts that standard ciphering is supported (bit a37=1 in higher layer capabilities).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message. TS_1 sends a {CC-SETUP}. 3. TS_1 performs authentication of PP and FT initiated cipher switching. 4. TS_1 sends a {CC-RELEASE} message 5. TS_1 initiates release of MAC-connection. 6. TS_1 broadcasts {LCE-REQUEST-PAGE} for IUT. 7. TS_1 sends a {CC-SETUP}. TS_1 does not perform authentication of PP and FT initiated cipher switching
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful registration. Verify that IUT sends to TS_1 a {LOCATE-REQUEST} message. 2. Verify that IUT sends to TS_1 a {CC-ALERTING} message 3. Verify successful authentication of PP and successful FT initiated cipher switching. Verify end-to-end U-plane connection. 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message 5. Verify successful release of MAC-connection. 6. Verify successful link establishment. 7. Verify that IUT sends to TS_1 a {CC-ALERTING} message. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE << RELEASE REASON= <Security attack assumed> >>

TC_PT_GAP.N.35_BV_504	Release of unexpectedly unencrypted incoming call in connect state.
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	IUT has no access rights. TS_1 is in registration mode (bit a44 is set). TS_1 broadcasts that standard ciphering is supported (bit a37=1 in higher layer capabilities).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message. TS_1 sends a {CC-SETUP}. 3. Answer call at IUT. 4. TS_1 sends a {CC-CONNECT-ACK} message to IUT. TS_1 performs authentication of PP and FT initiated cipher switching. 5. TS_1 sends a {CC-RELEASE} message 6. TS_1 initiates release of MAC-connection. 7. TS_1 broadcasts {LCE-REQUEST-PAGE} for IUT. 8. TS_1 sends a {CC-SETUP} message 9. Answer call at IUT within 10 seconds. 10. TS_1 sends a {CC-CONNECT-ACK} message to IUT. TS_1 does not perform authentication of PP and FT initiated cipher switching
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful registration. Verify that IUT sends to TS_1 a {LOCATE-REQUEST} message. 2. Verify that IUT sends to TS_1 a {CC-ALERTING} message 3. Verify that IUT sends to TS_1 a {CC-CONNECT} message 4. Verify successful authentication of PP and successful FT initiated cipher switching. Verify end-to-end U-plane connection. 5. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} 6. Verify successful release of MAC-connection. 7. Verify successful link establishment. 8. Verify that IUT sends to TS_1 a {CC-ALERTING} message 9. Verify that IUT sends to TS_1 a {CC-CONNECT} message 10. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<RELEASE REASON = <Security attack assumed > >>

TC_PT_GAP.N.35_BV_505	Release of unexpectedly unencrypted outgoing call in connect state after switching encryption support in FT off
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	IUT has no access rights. TS_1 is in registration mode (bit a44 is set). TS_1 broadcasts that standard ciphering is supported (bit a37=1 in higher layer capabilities).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message. Invoke outgoing call at IUT. 3. TS_1 sends a {CC-CONNECT} to IUT. TS_1 performs authentication of PP and FT initiated cipher switching. 4. TS_1 sends a {CC-RELEASE} message 5. TS_1 initiates release of MAC-connection. 6. TS_1 switches encryption support to 'off' and broadcasts that standard ciphering is not supported (bit a37=0 in higher layer capabilities) for 20 seconds. Afterwards invoke outgoing call at IUT. 7. TS_1 sends a {CC-CONNECT} to IUT. TS_1 does not perform authentication of PP and FT initiated cipher switching
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful registration. Verify that IUT sends to TS_1 a {LOCATE-REQUEST} message. 2. Verify that IUT sends to TS_1 a {CC-SETUP} message 3. Verify successful authentication of PP and successful FT initiated cipher switching. Verify end-to-end U-plane connection. 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message 5. Verify successful release of MAC-connection. 6. Verify that IUT establishes link and sends to TS_1 a {CC-SETUP} message 7. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<RELEASE REASON = <Security attack assumed> >>

TC_PT_GAP.N.35_BV_506	Release of unexpectedly unencrypted outgoing call in connect state despite of successful authentication
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	IUT has no access rights. TS_1 is in registration mode (bit a44 is set). TS_1 broadcasts that standard ciphering is supported (bit a37=1 in higher layer capabilities).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message. Invoke outgoing call at IUT. 3. TS_1 sends a {CC-CONNECT} message to IUT. TS_1 performs authentication of PP and FT initiated cipher switching 4. TS_1 sends a {CC-RELEASE} message 5. TS_1 initiates release of MAC-connection 6. Invoke outgoing call at IUT. 7. TS_1 sends a {CC-CONNECT} message to IUT TS_1 sends a {AUTHENTICATION-REQUEST} message to IUT 8. TS_1 does not perform FT initiated cipher switching
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful registration Verify that IUT sends to TS_1 a {LOCATE-REQUEST}message 2. Verify that IUT sends to TS_1 a {CC-SETUP} message 3. Verify successful authentication of PP and successful FT initiated cipher switching Verify end-to-end U-plane connection 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message 5. Verify successful release of MAC-connection 6. Verify that IUT establishes link and sends to TS_1 a {CC-SETUP} message 7. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message 8. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<RELEASE REASON= <Security attack assumed> >>.

TC_PT_GAP.N.35_BV_507	Release of unexpectedly unencrypted incoming call in connect state despite of successful authentication.
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	IUT has no access rights. TS_1 is in registration mode (bit a44 is set). TS_1 broadcasts that standard ciphering is supported (bit a37=1 in higher layer capabilities).
Stimulus:	<ol style="list-style-type: none"> 1. Invoke registration procedure at IUT. 2. TS_1 sends a {LOCATE-ACCEPT} message TS_1 sends a {CC-SETUP} message 3. Answer call at IUT 4. TS_1 sends a {CC-CONNECT-ACK} message to IUT. TS_1 performs authentication of PP and FT initiated cipher switching 5. TS_1 sends a {CC-RELEASE} message 6. TS_1 initiates release of MAC-connection. 7. TS_1 broadcasts {LCE-REQUEST-PAGE} for IUT 8. TS_1 sends a {CC-SETUP} message 9. Answer call at IUT within 10 seconds 10. TS_1 sends a {CC-CONNECT-ACK} message to IUT. TS_1 sends a {AUTHENTICATION-REQUEST} message to IUT. 11. TS_1 does not perform FT initiated cipher switching
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful registration Verify that IUT sends to TS_1 a {LOCATE-REQUEST} message 2. Verify that IUT sends to TS_1 a {CC-ALERTING} message 3. Verify that IUT sends to TS_1 a {CC-CONNECT} message 4. Verify successful authentication of PP and successful FT initiated cipher switching. Verify end-to-end U-plane connection. 5. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} 6. Verify successful release of MAC-connection 7. Verify successful link establishment 8. Verify that IUT sends to TS_1 a {CC-ALERTING} message 9. Verify that IUT sends to TS_1 a {CC-CONNECT} message 10. Verify that IUT sends to TS_1 a {AUTHENTICATION-REPLY} message 11. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<RELEASE REASON = <Security attack assumed > >>

6.27 TC_PT_NG1.A.1 Easy PIN code registration tests cases

Test subgroup objectives: to check the IUT's behaviours regarding easy PIN-code registration.

Declarations (see Annex A):

- NG1.A.1_3 "Base station name selection" procedure is optional. So the manufacturer shall declare if it is supported.

TC_PT_NG1.A.1_BV_101	Registration mode automatic access
Reference:	TS 102 527-3 [14], Clause 7.10.1.3.1
Initial condition:	IUT not registered and powered off
Stimulus:	Switch on IUT
Pass criteria:	Verify that the IUT starts in a mode where the user is directly invited to trigger the access rights procedure

TC_PT_NG1.A.1_BV_201	Searching mode and PIN code requests
Reference:	TS 102 527-3 [14], Clause 7.10.1.1.1
Initial condition:	IUT not registered, 'Access Rights supported' capability bit of TS_1 set to 1
Stimulus:	Start the access rights procedure on the IUT
Pass criteria:	Verify that the IUT prompts the user to enter the PIN code

TC_PT_NG1.A.1_BV_301	Base station name selection
Reference:	TS 102 527-3 [14], Clause 7.10.1.3.2
Initial condition:	IUT not registered, 'Access Rights supported' capability bit of TS_1 set to 1 AC set to '1234' value, FP name set to 'NG-DECT Part 3 FP tester' (17 characters max.).
Stimulus:	<ol style="list-style-type: none"> 1. Start the access rights procedure on the IUT 2. Select TS_1 name 'NG-DECT Part 3 FP tester' for registration 3. Enter '1234' as PIN value on the IUT 4. Perform an outgoing call from IUT
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT displays the 'NG-DECT Part 3 FP tester' base station name 2. Verify that the IUT prompts the user to enter the PIN code value 3. Verify that the registration procedure is successful on IUT 4. Verify that the IUT sends to TS_1 a {CC-SETUP} message

TC_PT_NG1.A.1_BV_401	Registration user feedback
Reference:	TS 102 527-3 [14], Clause 7.10.1.3.3
Initial condition:	IUT not registered, 'Access Rights supported' capability bit of TS_1 set to 0, AC set to '1234' value
Stimulus:	<ol style="list-style-type: none"> 1. Start the access rights procedure on IUT 2. Wait for the end of the procedure on IUT 3. Set 'Access Rights supported' capability bit to 1 on TS_1 Start the access rights procedure on the IUT 4. Perform an Easy PIN code registration procedure using '5678' as PIN value from TS_1 5. Start the access rights procedure on the IUT 6. Perform an Easy PIN code registration procedure using '1234' as PIN value from TS_1 7. Perform an outgoing call from IUT 8. Hang up on IUT Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT gives a feedback to the user of the registration process: "Registration in progress state" 2. Verify that the IUT gives a feedback to the user of the registration process: "Registration error state" 3. Verify that the IUT gives a feedback to the user of the registration process: "Registration in progress state" 4. Verify that the IUT gives a feedback to the user of the registration process: "Registration error state" 5. Verify that the IUT gives a feedback to the user of the registration process: "Registration in progress state" 6. Verify that the IUT gives a feedback to the user of the registration process: "Registration success state" 7. Verify that the IUT sends to TS_1 a {CC-SETUP} message 8. Verify that the IUT sends to TS_1 a {CC-RELEASE} message

6.28 TC_PT_NG1.A.2 Easy pairing registration tests cases

Test subgroup objectives: to check the IUT's behaviours regarding easy pairing registration taking into account the following considerations:

- As NG1.A.2_1 "Easy pairing description" is tested implicitly when testing NG1.A.2_4 "Searching mode request", there is no test case defined for this procedure.
- As NG1.A.2_2 "Registration mode automatic access" is tested when testing NG1.A.2_4 "Searching mode request", there is no test case defined for this procedure.
- As NG1.A.2_3 "Base station limited registration mode" is a FP capacity, there is no PP test case defined for this procedure.
- As NG1.A.2_5 "Base station name selection" is tested when testing NG1.A.1_3 "Base station name selection", there is no test case defined for this procedure.
- As NG1.A.2_6 "Registration user feedback" is tested when testing NG1.A.1_4 "Registration user feedback", there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.A.1_3 "Base station name selection" is optional. So the manufacturer shall declare if it is supported.

TC_PT_NG1.A.2_BV_401	Searching mode request (default PIN)
Reference:	TS 102 527-3 [14], Clause 7.10.1.2.3
Initial condition:	IUT not registered and powered off, 'Access Rights supported' higher layer capability bit of TS_1 set to 1, AC set to '0000' value
Stimulus:	1. Switch on IUT 2. Start the access rights procedure on IUT
Pass criteria:	1. Verify that the IUT starts in a mode where the user is directly invited to trigger the access rights procedure 2. Verify that the IUT does not prompt the user to enter the PIN code and that the registration is successful

TC_PT_NG1.A.2_BV_402	Searching mode request (switching back to PIN entry)
Reference:	TS 102 527-3 [14], Clause 7.10.1.2.3
Initial condition:	IUT not registered, 'Access Rights supported' higher layer capability bit of TS_1 set to 1, AC set to '1234' value
Stimulus:	1. Start the access rights procedure on IUT 2. When prompt, enter '1234' PIN code on IUT
Pass criteria:	1. Verify that the IUT prompts the user to enter the PIN code 2. Verify that the registration is then successful

6.29 TC_PT_NG1.A.3 Handset locator tests cases

Test subgroup objectives: to check the IUT's behaviours regarding handset locator.

TC_PT_NG1.A.3_BV_101	Handset locator
Reference:	TS 102 527-3 [14], Clause 7.10.2
Initial condition:	T-00, IUT ringing capabilities enabled
Stimulus:	Perform an incoming call from TS_1 with an IE <<Calling Party name>> whose <<Presentation indicator>> field is set to 'Handset locator'
Pass criteria:	Verify that the IUT rings

6.30 TC_PT_GAP.A.4 Terminal identity number assignment in mono cell system tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Terminal Identity number assignment in mono cell system taking into account the following consideration:

- As 14.4.3 Related Procedures of GAP.A.4 feature are tested when tested GAP.N.31 Internal call feature, there is no test case defined for these related procedures.

TC_PT_GAP.A.4_BV_101	Terminal Identity number assignment in mono cell system
Reference:	EN 300 444 [12], Clause 14.4.2
Initial condition:	IUT is the first registered PP, IUT powered off
Stimulus:	1. Switch on IUT 2. Send a {LOCATE-ACCEPT} message from TS_1 as described in EN 300 444 [12], Clause 14.4.2, table 106 with <<Identity-value>> set to terminal identity number '0000 0001B'
Pass criteria:	1. Verify that the IUT sends {TEMPORARY-IDENTITY-ASSIGN-ACK} message 2. When supported, verify that the IUT displays '1' as terminal identity number in Idle Locked mode (for example, "DECT 1" or "HANDSET 1") or corresponding internal names list entry

7 Fixed Part Test specification

This Clause includes lists of the test groups relevant for a NG-DECT fixed part. Test cases are ordered like network features followed by application features (TS 102 527-3 [14], Clauses 6.4 and 6.9).

The NG-DECT fixed part under test shall be connected to a network when running the tests suite.

7.1 TC_FT_NG1.N.1 Codec negotiation tests cases

Test subgroup objectives: to check the IUT's behaviours when negotiating a codec.

TC_FT_NG1.N.1_BV_101	Exchange of codec list during subscription registration
Reference:	TS 102 527-1 [13], Clauses 7.3.1 and 7.3.7
Initial condition:	F-00.
Stimulus:	Perform an access rights request from TS_1
Pass criteria:	Verify that the IUT includes in the {ACCESS-RIGHTS-ACCEPT} message an IE <<Codec-list>> with G.722 codec, G.726 codec, and "Codec negotiation possible" indications

TC_FT_NG1.N.1_BV_102	Exchange of codec list during location registration
Reference:	TS 102 527-1 [13], Clause 7.3.1
Initial condition:	F-00
Stimulus:	Perform a location registration request from TS_1
Pass criteria:	Verify that the IUT includes in the {LOCATE-ACCEPT} message an IE <<Codec-list>> with G.722 codec, G.726 codec, and "Codec negotiation possible" indications

TC_FT_NG1.N.1_BV_103	NG-DECT Part 1 higher layer capabilities
Reference:	EN 300 175-5 [5], Clause F.3
Initial condition:	F-00.
Stimulus:	Perform an access rights request from TS_1
Pass criteria:	Verify that "NG-DECT Wideband voice" FP higher layer capability bit is set to 1 (= Extended higher layer capabilities (part 2) a24 bit)

TC_FT_NG1.N.1_BV_104	NG-DECT Part 3 higher layer capabilities
Reference:	EN 300 175-5 [5], Clause F.3
Initial condition:	F-00.
Stimulus:	Perform an access rights request from TS_1
Pass criteria:	Verify that "NG-DECT Extended wideband voice supported" higher layer capability bit is set to 1 (= Extended higher layer capabilities (part 2) a29 bit)

TC_FT_NG1.N.1_BV_201	Basic service wideband speech
Reference:	TS 102 527-1 [13], Clause 7.3.2
Initial condition:	F-00
Stimulus:	Perform an incoming call towards IUT from Phone_A
Pass criteria:	Verify that the IUT sets "wideband speech default" attribute IE <<Basic-service>> in {CC-SETUP} message

TC_FT_NG1.N.1_BV_301	Outgoing G.722 call without slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	F-00
Stimulus:	Perform a G.722 outgoing call in long slot mode from TS_1 to a device supporting G.722.
Pass criteria:	Verify that the IUT selects a codec only in one of the following messages: {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING}, or {CC-CONNECT} message (other messages not allowed) Verify by checking end-to-end U-plane connection that the IUT is able to establish G.722 outgoing call without slot type modification
Comments:	Test case shall fail if IE <<CODEC-LIST>> is sent in more than one CC message

TC_FT_NG1.N.1_BV_302	Outgoing G.726 call without slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	F-00
Stimulus:	Perform a G.726 outgoing call in full slot mode from TS_1 to a device supporting G.726
Pass criteria:	Verify that the IUT selects a codec only in one of the following messages: {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING}, or {CC-CONNECT} message (other messages not allowed) Verify by checking end-to-end U-plane connection that the IUT is able to establish G.726 outgoing call without slot type modification
Comments:	Test case shall fail if IE <<CODEC-LIST>> is sent in more than one CC message

TC_FT_NG1.N.1_BV_303	Outgoing G.722 call with slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	F-00
Stimulus:	Perform a G.722 outgoing call (long slot) modifying an established full slot connection from TS_1 to a device supporting G.722.
Pass criteria:	Verify that the IUT selects a codec only in one of the following messages: {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING}, or {CC-CONNECT} message (other messages not allowed) Verify by checking end-to-end U-plane connection that the IUT is able to establish G.722 outgoing call with slot type modification
Comments:	Test case shall fail if IE <<CODEC-LIST>> is sent in more than one CC message

TC_FT_NG1.N.1_BV_304	Outgoing G.726 call with slot type modification
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	F-00
Stimulus:	Perform a G.726 outgoing call (full slot) modifying an established long slot connection from TS_1 to a device supporting G.726
Pass criteria:	Verify that the IUT selects a codec only in one of the following messages: {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING}, or {CC-CONNECT} message (other messages not allowed) Verify by checking end-to-end U-plane connection that the IUT is able to establish G.726 outgoing call with slot type modification
Comments:	Test case shall fail if IE <<CODEC-LIST>> is sent in more than one CC message

TC_FT_NG1.N.1_BV_305	Outgoing G.722 call, fall back to G.726 codec when full to long slot type modification fails
Reference:	TS 102 527-1 [13], Clause 7.3.3 EN 300 444 [12], Clause 8.1, figure 1
Initial condition:	F-00
Stimulus:	Perform a G.722 outgoing call in full slot mode from TS_1 to a device supporting G.722 and G.726. TS_1 will not perform the full to long slot type modification successfully. TS_1 will switch to G.726, indicating so by sending {IWU-INFO}
Pass criteria:	Verify that the IUT selects a codec only in one of the following messages: {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING}, or {CC-CONNECT} message (other messages not allowed) Verify by checking end-to-end U-plane connection that the IUT is able to fall back to G.726 when full to long slot type modification fails
Comments:	Test case shall fail if IE <<CODEC-LIST>> is sent in more than one CC message

TC_FT_NG1.N.1_BV_306	Outgoing call without sending any IE <<CODEC-LIST>> in {CC-SETUP}
Reference:	TS 102 527-1 [13], Clause 7.3.3, see Annex D table D.3 for IE <<CODEC-LIST>> values in locate
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform a location registration request with an IE <<Codec-list>> set to <Negotiation indicator=codec negotiation, G.722, G.711, G.726> from TS_1 2. Perform an outgoing call (full slot) from TS_1 without sending any IE <<Codec-list>> in {CC-SETUP} message to Phone A supporting G.722
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT includes in the {LOCATE-ACCEPT} message an IE <<Codec-list>> with at least G.722 and G.726 codecs 2. Verify that the IUT selects G.722 codec only in one of the following messages: {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING}, or {CC-CONNECT} message (other messages not allowed) <p>Verify end-to-end U-plane connection between TS_1 and Phone A</p>
Comments:	Test case shall fail if IE <<CODEC-LIST>> is sent in more than one CC message

TC_FT_NG1.N.1_BV_307	Outgoing call with an IE <<CODEC-LIST>> in {CC-SETUP} different from previous sent during location registration
Reference:	TS 102 527-1 [13], Clause 7.3.3, see Annex D table D.3 for IE <<CODEC-LIST>> values in locate
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform a location registration request with an IE <<Codec-list>> set to <Negotiation indicator=codec negotiation, G.722, G.711, G.726> from TS_1 2. Perform an outgoing call (long slot) from TS_1 with an IE <<Codec-list>> set to <Negotiation indicator=codec negotiation, G.722, G.726> in {CC-SETUP} message to Phone A supporting G.722
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT includes in the {LOCATE-ACCEPT} message an IE <<Codec-list>> with at least G.722 and G.726 codecs 2. Verify that the IUT selects G.722 codec only in one of the following messages: {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING}, or {CC-CONNECT} message (other messages not allowed) <p>Verify end-to-end U-plane connection between TS_1 and Phone A</p>
Comments:	Test case shall fail if IE <<CODEC-LIST>> is sent in more than one CC message

TC_FT_NG1.N.1_BV_321	Incoming call G.722
Reference:	TS 102 527-1 [13], Clauses 7.3.3 and D.1.3 figure D.7
Initial condition:	F-00
Stimulus:	Perform a G.722 incoming call towards IUT . TS_1 sends {CC-ALERTING}, and chooses G.722 in {CC-CONNECT}
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able to process G.722 incoming call

TC_FT_NG1.N.1_BV_322	Incoming call G.726
Reference:	TS 102 527-1 [13], Clauses 7.3.3 and D.1.3.1 figure D.7 with G.726
Initial condition:	F-00
Stimulus:	Perform a G.726 incoming call towards IUT . TS_1 chooses G.726 in {CC-ALERTING}, and sends {CC-CONNECT}
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able to process G.726 incoming call

TC_FT_NG1.N.1_BV_323	Incoming call G.722, negotiation results in G.726
Reference:	TS 102 527-1 [13], Clauses 7.3.3 and D.1.3.2 figure D.8
Initial condition:	F-00
Stimulus:	Perform a G.722 incoming call towards IUT. TS_1 chooses G.726 in {CC-ALERTING}, and sends {CC-CONNECT} after long to full slot modification
Pass criteria:	Verify by checking end-to-end U-plane connection that the IUT is able to process an incoming call G.722 finally negotiated in G.726

TC_FT_NG1.N.1_WC_101	Outgoing call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device A)
Reference:	TS 102 527-1 [13], Clause D.1.2.1, D.1.2.2
Initial condition:	T-00, A wideband corded SIP phone (SIP-WB-PH) is connected to the SIP server. Golden Device PT registered to IUT
Stimulus:	Perform an outgoing call from Golden Device PT to the SIP-WB-PH.
Pass criteria:	Verify by checking end-to-end U-plane connection that a test audio signal (e.g. sine wave 6kHz) transmitted to/from the corded phone can be heard on both ends

TC_FT_NG1.N.1_WC_102	Outgoing call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device B)
-----------------------------	---

Same as TC_FT_NG1.N.1_WC_101 but with the second Golden Device PT

TC_FT_NG1.N.1_WC_103	Incoming call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device A)
Reference:	TS 102 527-1 [13], Clause D.1.3.1
Initial condition:	T-00, A wideband corded SIP phone (SIP-WB-PH) is connected to the SIP server. Golden Device PT is registered to the IUT
Stimulus:	An outgoing call is established from the corded wideband phone (SIP-WB-PH) to the IUT. The call is answered on the Golden Device PT.
Pass criteria:	Verify by checking end-to-end U-plane connection that a test audio signal (e.g. sine wave 6kHz) transmitted to/from the corded phone can be heard on both ends

TC_FT_NG1.N.1_WC_104	Incoming call Wideband at NG-DECT Part 1 Golden Device PT (Golden Device B)
-----------------------------	---

Same as TC_FT_NG1.N.1_WC_403 but with the second Golden Device PT

TC_FT_NG1.N.1_WC_105	Service change at NG-DECT Part 1 Golden Device PT (Golden Device A)
Reference:	TS 102 527-1 [13], Clause D.1.4.1
Initial condition:	A wideband corded SIP phone (SIP-WB-PH) and a narrow band corded SIP phone (SIP-NB-PH) are connected to the SIP server G.722 call established between Golden Device PT and wideband corded SIP phone (SIP-WB-PH) as is in TC_FT_NG1.N.1_BV_401
Stimulus:	Perform a call transfer from the corded wideband phone (SIP-WB-PH) to the corded narrowband phone (SIP-NB-PH) initiated by the corded wideband phone. This results in the SIP server re-negotiating from wideband to narrowband.
Pass criteria:	Verify by checking end-to-end U-plane connection that a test audio signal (e.g. sine wave 2 kHz) transmitted to/from the corded phone can be heard on both ends

TC_FT_NG1.N.1_WC_106	Service change at NG-DECT Part 1 Golden Device PT (Golden Device B)
-----------------------------	---

Same as TC_FT_NG1.N.1_WC_105 but with the second Golden Device PT

7.2 TC_FT_NG1.N.2 Codec switching tests cases

Test subgroup objectives: to check the IUT's behaviours during codec switching with the following consideration:

- As a codec change initiates by a PP during an established communication does not correspond to a common use case, there is no test case defined for this feature on FP side.

7.3 TC_FT_NG1.N.3 Missed call notification tests cases

Test subgroup objectives: to check the IUT's ability to handle missed call notification with the following consideration:

- NG1.N.3_2 "Missed call notification" procedure is also tested when testing NG1.N.16_17 "Missed calls list" procedure due to the "Simultaneous 'list change indication' " requirement.

TC_FT_NG1.N.3_BV_201	Missed call notification after PP location registration or FP reboot
Reference:	TS 102 527-3 [14], Clause 7.4.1.3
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-00
Stimulus:	1. Perform an incoming call on line 0 towards IUT from Phone A without answering 2. Perform a location registration request from TS_1 3. Reboot IUT
Pass criteria:	1. Verify that the IUT sends to TS_1 and TS_2, a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Missed call, A new external missed voice call just arrived, 1 >(<01H,81H,81H>) < List change indication, Missed calls list, don't care value>(<03H,81H,xxH>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> 2. Verify that the IUT sends a {FACILITY} to TS_1 message with IE <<EVENTS NOTIFICATION= <Missed call, No new missed call arrived, 1>(<01H,82H,81H>) < List change indication, Missed calls list, don't care value>(<03H,81H,xxH>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> 3. Verify that the IUT sends a {FACILITY} to TS_1 and TS_2 message with IE <<EVENTS NOTIFICATION= <Missed call, No new missed call arrived, 1>(<01H,82H,81H>) < List change indication, Missed calls list, don't care value>(<03H,81H,xxH>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)>

7.4 TC_FT_NG1.N.4 Voice message waiting notification tests cases

Test subgroup objectives: to check the IUT's ability to handle voice message waiting notification.

TC_FT_NG1.N.4_BV_201	Voice message waiting notification, activation
Reference:	TS 102 527-3 [14], Clause 7.4.1.2, table 14
Initial condition:	Support of voice mailbox service 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), external call in F-10 (TS_2+IUT)
Stimulus:	Leave one voice message in the mailbox of line 0 from Phone A
Pass criteria:	Verify that the IUT sends a {FACILITY} message, with IE <<EVENTS NOTIFICATION= <Message waiting, voice, 1>(<00H,81H,81H>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)>, to TS_1 and TS_2

TC_FT_NG1.N.4_BV_202	Voice message waiting notification, deactivation
Reference:	TS 102 527-3 [14], Clause 7.4.1.2, table 14
Initial condition:	Support of voice mailbox service 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), external call in F-10 (TS_2+IUT) Voice message waiting notified on line 0 (Run TC_FT_NG1.N.4_BV_201)
Stimulus:	Consult the voice mailbox
Pass criteria:	Verify that the IUT sends a {FACILITY} message, with IE <<EVENTS NOTIFICATION= <Message waiting, voice, 0>(<00H,81H,80H>) >> and IE<<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)>, to TS_1 and TS_2
Comments:	The most convenient way to perform the stimulus seems to use a handset provided by the manufacturer

7.5 TC_FT_NG1.N.5 Date and time synchronization tests cases

Test subgroup objectives: to check the IUT's behaviours regarding date and time synchronization.

TC_FT_NG1.N.5_BV_101	FT initiated Date and Time synchronization
Reference:	TS 102 527-3 [14], Clauses 7.4.2.1 and 7.4.2, table 16
Initial condition:	F-00, "Clock master" field equal to "FP"
Stimulus:	Provide date and time to the IUT
Pass criteria:	Verify that the IUT sends to TS_1 a {FACILITY} message with corresponding date and time in IE <<TIME-DATE = <11B, 00H, (last 2 digits of the year, month, day, hour, minute, second, time zone)>> >> coded in BCD format with the nibble carrying the most significant digit transmitted in bits 8-5 of each octet
Comments:	Several ways may exist to provide date and time to the IUT: NTP-request, incoming call, web configuration, ...

TC_FT_NG1.N.5_BV_102	PT initiated Date and Time synchronization
Reference:	TS 102 527-3 [14], Clauses 7.4.2.2 and 7.4.2, table 16
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), "Clock master" field equal to "PP", F-00
Stimulus:	Send a {FACILITY} message for date and time synchronization with IE <<TIME-DATE = <Time and Date, The current time/date, (09H, 07H, 18H, 13H, 22H, 12H, 00H)>> >> from TS_1 to IUT
Pass criteria:	Verify that the IUT sends to TS_2 a {FACILITY} message with IE <<TIME-DATE = <Time and Date, The current time/date, (09H, 07H, 18H, 13H, 22H, don't care value, 00H)>> >>
Comments:	Some IUT may not allow to configure the seconds. As a result, octet 6 seconds is not tested

7.6 TC_FT_NG1.N.6 Parallel calls tests cases

Test subgroup objectives: to check the IUT's behaviours regarding parallel calls common requirements with the following consideration:

- As NG1.N.6_2 "Control messages" and NG1.N.6_3 "Sending keypad information" procedures are tested implicitly when testing NG1.N.7 "Common parallel call" procedures (external or internal), there is no test case defined for these two procedures.

TC_FT_NG1.N.6_BV_401	Codec change for parallel calls from G.722 to G.726
Reference:	TS 102 527-3 [14], Clause 7.4.3.3
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), G.722 external call in F-10 (TS_1+IUT) initiated by Phone A on line 0 (call id a), TS_1 selected G.722 when negotiating codec
Stimulus:	<ol style="list-style-type: none"> Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to 17H digit from TS_1 Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to terminal Id of PP2 and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 Send a {CC-ALERTING} message with an IE <<CODEC-LIST>> set to G.726 from TS_2 Send a {CC-SERVICE-ACCEPT} message from TS_1 Send a {IWU-INFO} message with an IE <<CODEC-LIST>> set to G.726 from TS_1
Pass criteria:	<ol style="list-style-type: none"> Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_1 a {CC-SERVICE-CHANGE} message with an IE <<CODEC-LIST>> set to G.726 Verify that the IUT sends to TS_1 a {IWU-INFO} message with an IE <<CODEC-LIST>> set to G.726 Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and TS_2

TC_FT_NG1.N.6_BV_402	Codec change for parallel calls from G.726 to G.722
Reference:	TS 102 527-3 [14], Clause 7.4.3.3
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), G.726 external call in F-10 (TS_1+IUT) initiated by Phone A on line 0 (call id a), TS_1 selected G.726 when negotiating codec
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to 1CH 15H digits and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone B number and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 3. Call pick up on Phone B 4. Send a {CC-SERVICE-ACCEPT} message from TS_1 5. Send a {IWU-INFO} message with an IE <<CODEC-LIST>> set to G.722 from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup ack) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 2)> 2. Verify that Phone B rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call alerting) =<(1, 0, value b), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-SERVICE-CHANGE} message with an IE <<CODEC-LIST>> set to G.722 4. Verify that the IUT sends to TS_1 a {IWU-INFO} message with an IE <<CODEC-LIST>> set to G.722 5. Verify that the IUT sends to TS_1 a {INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> <p>Verify end-to-end U-plane connection between TS_1 and Phone B</p>

TC_FT_NG1.N.6_BV_501	Sending negative acknowledgement - invalid call toggle request
Reference:	TS 102 527-3 [14], Clauses 7.4.3.4 and 7.4.3.5.3
Initial condition:	F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a)
Stimulus:	Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 31H) digits and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	<p>Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone' when declared (see Annex A, Table A.26) • an IE <<CALL-INFORMATION>> specifying (call id a, CS call connect, control code failed) =<(1, 0, value a), (2, 1, 5), (2, 2, 3)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages

TC_FT_NG1.N.6_BV_601	Busy line notification
Reference:	TS 102 527-3 [14], Clauses 7.4.8.3 and 7.4.3.5.1
Initial condition:	"Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 30H ("not allowed") on line 0 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A, one parallel external call on hold on line 0 (call id b) with Phone B
Stimulus:	Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to 1CH 15H digits from TS_1
Pass criteria:	<p>Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 04H indicating 'Busy tone on' when declared (see Annex A, Table A.26) • an IE <<CALL-INFORMATION>> specifying (call id c, CS call disconnecting, line in use) =<(1, 0, value c), (2, 1, 6), (2, 2, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages <p>And after some time-out, verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<CALL-INFORMATION>> specifying (call id c, CS idle) =<(1, 0, value c), (2, 1, 0)> • an IE <<SIGNAL>> with the value 3FH indicating 'Tones off' when declared (see Annex A, Table A.26)

7.7 TC_FT_NG1.N.7 Common parallel call procedures tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Common parallel call procedures (external or internal).

Declarations (see Annex A):

- When NG1.N.22 "Handling of lines where second calls are signalled in-band" feature is supported on a line, the manufacturer shall declare if the following procedures are supported within this line:
 - Call release and call release rejection.
 - Call waiting rejection (from PP to FP).
 - Putting a call on hold (external).

TC_FT_NG1.N.7_BV_101	Outgoing parallel call initiation (external), FP managed line selection
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.4.3.5.1 figure 5 External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A 1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to 1CH 15H digits from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone B number and IE <<CALL-INFORMATION>> specifying (line None, call id b) =<(0, 0, 127), (1, 0, value b)> from TS_1 3. Call pick up on Phone B 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 2. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b)> Verify that Phone B rings If the 'Second call type' of 'Line type information' received in step 2 was "second calls are handled with 'common parallel' procedures" then verify the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call alerting) =<(1, 0, value b), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B

TC_FT_NG1.N.7_BV_102	Outgoing parallel call initiation (internal)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.1
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to 17H digit from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to terminal Id of PP2 and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 3. Send a {CC-ALERTING} message from TS_2 Send a {CC-CONNECT} message from TS_2
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 2. Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> 3. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and TS_2

TC_FT_NG1.N.7_BV_103	Outgoing parallel call initiation (external), line selection using <<CALL-INFORMATION>> IE in {CC-INFO}
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.1, figure 4
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to 1CH 15H digits 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone B number and IE <<CALL-INFORMATION>> specifying (line 0, call id b) =<(0, 0, lid0), (1, 0, value b)> 3. Call pick up on Phone B
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 2. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b)> Verify that Phone B rings If the 'Second call type' of 'Line type information' received in step 2 was "second calls are handled with 'common parallel' procedures" then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call alerting) =<(1, 0, value b), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B

TC_FT_NG1.N.7_BV_104	Outgoing parallel call initiation (external), line selection using <<MULTI-KEYPAD>> IE in {CC-INFO}
Reference: Initial condition: Stimulus: Pass criteria:	<p>TS 102 527-3 [14], Clause 7.4.3.5.1, figure 4</p> <p>External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 15H, 23H, 30H) digits 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone B number and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 3. Call pick up on Phone B <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup ack) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 2)> 2. Verify that Phone B rings If the 'Second call type' of 'Line type information' received in step 1 was "second calls are handled with 'common parallel' procedures" then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call alerting) =<(1, 0, value b), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> <p>Verify end-to-end U-plane connection between TS_1 and Phone B</p>

TC_FT_NG1.N.7_BV_201	Call waiting indication (external) - CLIP on call waiting indication - End of call waiting indication
Reference: Initial condition: Stimulus: Pass criteria:	<p>TS 102 527-3 [14], Clause 7.4.3.5.2</p> <p>External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <ol style="list-style-type: none"> 1. Perform an incoming external call towards IUT from Phone B on line 0 2. Hang up on Phone B <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on' when declared (see Annex A, Table A.26) • an IE <<CALLING PARTY NUMBER>> with <calling party address= Phone B number> • an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages 2. If the 'Second call type' of 'Line type information' received in step 1 was "second calls are handled with 'common parallel' procedures" then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>

TC_FT_NG1.N.7_BV_202	Call waiting indication (internal) - CLIP on call waiting indication - End of call waiting indication
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.2
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' from TS_2 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to terminal Id of PP1 and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_2 3. Send a {CC-RELEASE} message from TS_2
Pass criteria:	1. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 2. Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on' when declared (see Annex A, Table A.26) • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP2> >> • an IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>

TC_FT_NG1.N.7_BV_301	Call toggle (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.3
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A, one parallel external call on hold on line 0 (call id b) with Phone B
Stimulus:	1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 31H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 31H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A

TC_FT_NG1.N.7_BV_302	Call toggle (internal)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.3
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A, one parallel internal call on hold (call id b) with TS_2
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 31H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 31H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and TS_2 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)> Verify end-to-end U-plane connection between TS_1 and Phone A

TC_FT_NG1.N.7_BV_401	Call release and call release rejection - Resuming a call put on-hold
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.4
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A, one parallel external call on hold on line 0 (call id b) with Phone B
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 33H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 42H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> Verify on Phone A that the call was released (i.e. Idle mode or Off-hook warning tone). 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B

TC_FT_NG1.N.7_BV_601	Call waiting acceptance (from PP to FP) (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.6
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming external call towards IUT from Phone B on line 0 2. Send a {CC-INFO} message from TS_1 with IE << MULTI-KEYPAD >> set to (1CH, 35H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 1)> 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B

TC_FT_NG1.N.7_BV_602	Call waiting acceptance (from PP to FP) (internal)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.6
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' from TS_2 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to terminal Id of PP1 and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_2 3. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 35H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> 3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and TS_2

TC_FT_NG1.N.7_BV_701	Active call release with replacement (from PP to FP) - call waiting (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.12
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	1. Perform an incoming external call towards IUT from Phone B on line 0 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 38H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup) =<(0, 0, lid0), (0, 5, lid0), (1, 0, value b), (2, 1, 1)> 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B Verify on Phone A that the call was released (i.e. Idle mode or Off-hook warning tone).

TC_FT_NG1.N.7_BV_702	Active call release with replacement (from PP to FP) - call on-hold (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.12
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A, one parallel external call on hold on line 0 (call id b) with Phone B
Stimulus:	Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 38H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B

TC_FT_NG1.N.7_BV_801	Call waiting rejection (from PP to FP) (external)
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.7
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming external call towards IUT from Phone B on line 0 2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 36H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 1)> 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> <p>Verify end-to-end U-plane connection between TS_1 and Phone A</p>

TC_FT_NG1.N.7_BV_901	Putting a call on hold (external) - Resuming a call put on-hold
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.8
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 41H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_1 2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 42H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> <p>Verify that end-to-end U-plane connection is not established between TS_1 and Phone A</p> <ol style="list-style-type: none"> 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> <p>Verify end-to-end U-plane connection between TS_1 and Phone A</p>

TC_FT_NG1.N.7_BV_902	Putting a call on hold (internal) - Resuming a call put on-hold
Reference:	TS 102 527-3 [14], Clause 7.4.3.5.8
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Internal call in F-10 (TS_1+TS_2) with call id a
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 41H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 42H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 and TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> <p>Verify that end-to-end U-plane connection is not established between TS_1 and TS_2</p> <ol style="list-style-type: none"> 2. Verify that the IUT sends to TS_1 and TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> <p>Verify end-to-end U-plane connection between TS_1 and TS_2</p>

TC_FT_NG1.N.7_BV_1201	CNIP on call waiting indication (external)
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.3.5.11</p> <p>External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <p>Perform an incoming external call on line 0 towards IUT from Phone B (CNIP B)</p> <p>Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<CALLING PARTY NAME =< Presentation indicator=don't care value, Used alphabet= UTF-8 or DECT standard, Screening indicator= don't care value, calling party name = name of Phone B>> • an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages <p>UTF-8 CNIP can be received if the FP is designed for a network capable of sending UTF-8 CNIP</p>

TC_FT_NG1.N.7_BV_1202	CNIP on call waiting indication (internal)
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.3.5.11</p> <p>2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2),</p> <p>external call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <p>1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' from TS_2</p> <p>2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to terminal Id of PP1 and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_2</p> <p>1. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)></p> <p>2. Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<CALLING PARTY NAME = < Presentation allowed, DECT standard, User-provided, verified and passed, internal names list entry of PP2>> • an IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =< (1, 0, value b), (2, 1, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages <p>CNIP can be internal names list entry of PP2 or default string (e.g. "DECT n" where n stands for the IA5 coding of the terminal identity number of PP2 in decimal representation) UTF-8 characters are not required as it will be too complex to setup an internal names list entry through TS in the initial condition</p>

7.8 TC_FT_NG1.N.8 Call transfer tests cases

Test subgroup objectives: to check the IUT's behaviours regarding call transfer.

TC_FT_NG1.N.8_BV_101	Call transfer (external) - announced
Reference:	TS 102 527-3 [14], Clause 7.4.3.6.1
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), external call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, IA5 coding of terminal identity number in decimal of TS_2) digits from TS_1 2. Send a {CC-CONNECT} message from TS_2 3. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 34H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 4. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<SIGNAL>> with the value 01H indicating 'ring back tone on' if declared (see Annex A Table A.26) 2. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_1 in the same than call status indication or different {CC-INFO} messages an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' if declared (see Annex A Table A.26) Verify that the IUT sends to TS_1 in the same or different {CC-INFO} message, an IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value a), (2, 1, 5)> and an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' 3. Verify end-to-end U-plane connection between TS_1 and TS_2 Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, then optionally sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> and then mandatorily sends to TS_1 a {CC-RELEASE} message Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS call connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (1, 1, value a), (2, 1, 5)> 4. Verify end-to-end U-plane connection between TS_2 and Phone A

TC_FT_NG1.N.8_BV_201	Call transfer (external) - unannounced
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clauses 7.4.3.6 and 7.4.3.6.2</p> <p>2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), external call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <p>1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, IA5 coding of terminal identity number in decimal of TS_2) digits from TS_1</p> <p>2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1</p> <p>3. Send a {CC-RELEASE-COM} message from TS_1 Send a {CC-CONNECT} message from TS_2</p> <p>1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' if declared (see Annex A Table A.26)</p> <p>2. Verify that the IUT sends to TS_1 in the same than call status indication or different {CC-INFO} message an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' if declared (see Annex A Table A.26) Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, then optionally sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, and then mandatorily sends to TS_1 a {CC-RELEASE} message Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS call under transfer) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (1, 1, value a), (2, 1, 12)></p> <p>3. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 1, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_2 and Phone A</p>

TC_FT_NG1.N.8_BV_301	Call re-injection to the system (external) - announced
Reference:	TS 102 527-3 [14], Clauses 7.4.3.6, 7.4.3.6.3 and 7.4.15.2.1
Initial condition:	3 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2, TS_3 is NG PP3),
Stimulus:	external call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, IA5 coding of internal general call = 2AH) digits from TS_1 2. Send a {CC-CONNECT} message from TS_2 3. Send a {CC-RELEASE-COM} message from TS_3 4. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 5. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> Verify that the IUT sends to TS_2 and TS_3 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<SIGNAL>> with the value 01H indicating 'ring back' tone on' if declared (see Annex A, Table A.26) 2. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_3 optionally a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> and then mandatorily sends to TS_3 a {CC-RELEASE} message 3. Verify end-to-end U-plane connection between TS_1 and TS_2 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> and then sends optionally to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, and then mandatorily sends to TS_1 a {CC-RELEASE} message Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS call connect) =<(0, 0, lid0), (0, 5, lid0), (1, 0, value b), (1, 1, value a), (2, 1, 5)> 5. Verify end-to-end U-plane connection between TS_2 and Phone A

TC_FT_NG1.N.8_BV_302	Call re-injection to the system (external) - unannounced
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clauses 7.4.3.6, 7.4.3.6.3 and 7.4.15.2.1</p> <p>3 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2, TS_3 is NG PP3), external call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <p>1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, IA5 coding of internal general call = 2AH) digits from TS_1</p> <p>2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1</p> <p>3. Send a {CC-RELEASE-COM} message from TS_1 Send a {CC-CONNECT} message from TS_2 Send a {CC-RELEASE-COM} message from TS_3</p> <p>1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> Verify that the IUT sends to TS_2 and TS_3 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' if declared (see Annex A Table A.26)</p> <p>2. Verify that the IUT sends to TS_1 in the same than call status indication or different {CC-INFO} message an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' if declared (see Annex A Table A.26) Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, then optionally sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)>, and then mandatorily sends to TS_1 a {CC-RELEASE} message Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS call under transfer) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (1, 1, value a), (2, 1, 12)> Verify that the IUT optionally sends to TS_3 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> and then mandatorily sends to TS_3 a {CC-RELEASE} message</p> <p>3. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 1, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_2 and Phone_A</p>

TC_FT_NG1.N.8_BV_401	Remote party CLIP on call transfer
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clauses 7.4.3.6.4 and 7.4.3.6.5, figure 18</p> <p>2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by Phone A on line 0 (call id a)</p> <p>1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, IA5 coding of terminal identity number in decimal of TS_2) digits from TS_1</p> <p>2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1</p> <p>1. Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_2 in the {CC-SETUP} or a {CC-INFO} message an IE << CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP1 >> and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)></p> <p>2. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= Phone A number >> and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)></p>

TC_FT_NG1.N.8_BV_501	Remote party CNIP on call transfer
Reference:	TS 102 527-3 [14], Clause 7.4.3.6.5, figure 18
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by Phone A on line 0 (call id a)
Stimulus:	1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, IA5 coding of terminal identity number in decimal of TS_2) digits from TS_1
	2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 34H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id b, CS call setup) =<(1, 0, value b), (2, 1, 1)>
	Verify that the IUT sends to TS_2 in the {CC-SETUP} or a {CC-INFO} message an IE <<CALLING PARTY NAME = < Presentation allowed, DECT standard, User-provided, verified and passed, internal names list entry of PP1> >> and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>
	2. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALLING PARTY NAME =< Presentation indicator=don't care value, Used alphabet= UTF-8 or DECT standard, Screening indicator= don't care value, calling party name= Phone A name > >> and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>
Comments:	CNIP can be internal names list entry of PP2 or default string (e.g. "DECT n" where n stands for the IA5 coding of the terminal identity number of PP2 in decimal representation)

7.9 TC_FT_NG1.N.9 3-party conference with established external and/or internal calls tests cases

Test subgroup objectives: to check the IUT's behaviours regarding 3-party conference with established external and/or internal calls.

Declarations (see Annex A):

- NG1.N.9 "3-party conference with established external and/or internal calls" feature is optional on FP side, so the manufacturer shall declare if it is supported.
- 3-party conference with two established external calls can be base station or network dependent, so the manufacturer shall declare if it is supported.
- 3-party conference with two established external calls on two different lines can be base station or network dependent, so the manufacturer shall declare if it is supported in addition to the NG1.N.14 "Multiple lines" feature support.

TC_FT_NG1.N.9_BV_101	3-party conference with established external and internal calls - release from non initiating internal party
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.3.7</p> <p>2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_1+IUT) initiated by Phone_A on line 0 (call id a), one parallel internal call on hold (call id b) with TS_2</p> <p>1. Nothing</p> <p>2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 32H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1</p> <p>3. Send a {CC-RELEASE} message from TS_2</p> <p>1. Verify that "3-party conference" higher layer capability bit is set to 1 (= Extended higher layer capabilities (part 2) a32 bit)</p> <p>2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id not chosen for the conference, CS idle) =<(1, 0, value a or b), (2, 1, 0)>, If the call id chosen for the conference is call id b then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, updated call id b, CS conference connect) =<(1, 0, value a), (1, 1, value b), (2, 1, 11)>, and to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value), (2, 1, 11)> Else verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)>, and to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (1, 1, value a), (2, 1, 11)> Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_2 and Phone A Verify end-to-end U-plane connection between TS_1 and TS_2</p> <p>2. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message Verify that the IUT sends to TS_1 in one or several {CC-INFO} messages an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id chosen for the conference, CS call connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a or b), (2, 1, 5)> and IE <<CLIP>> with <Calling party address> field set to Phone A number Verify end-to-end U-plane connection between TS_1 and Phone A</p> <p>'Call id chosen for the conference': chosen by the FP among the involved calls, either the on-hold call id (call id b) or the active call id (call id a). The other call id is the 'call id not chosen for the conference' (respectively call id a or call id b).</p>

TC_FT_NG1.N.9_BV_102	3-party conference with established external and internal calls - release of external party from initiating PP
Reference:	TS 102 527-3 [14], Clause 7.4.3.7
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External G.722 call in F-10 (TS_1+IUT) initiated by Phone_A on line 0 (call id a), one parallel internal G.726 call on hold (call id b) with TS_2
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 32H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 33H) digits and with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id not chosen for the conference, CS idle) =<(1, 0, value a or b), (2, 1, 0)>, <ul style="list-style-type: none"> If the call id chosen for the conference is call id b then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, updated call id b, CS conference connect) =<(1, 0, value a), (1, 1, value b), (2, 1, 11)>, and to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value), (2, 1, 11)> Else verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)>, and to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (1, 1, value a), (2, 1, 11)> Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_2 and Phone A Verify end-to-end U-plane connection between TS_1 and TS_2 2. Verify that the IUT sends to TS_1 in one or several {CC-INFO} messages an IE <<CALL-INFORMATION>> specifying (call id chosen for the conference, CS call connect) =<(1, 0, value a or b), (2, 1, 5)> and IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP2>>> Verify that the IUT sends to TS_2 in one or several {CC-INFO} messages an IE <<CALL-INFORMATION>> specifying (call id chosen for the conference, CS call connect) =<(1, 0, value a or b), (2, 1, 5)> and IE <<CALLING PARTY NUMBER = <Network specific number, Private plan, IA5 coding of terminal identity number in decimal of PP1>>> Verify end-to-end U-plane connection between TS_1 and TS_2
Comments:	'Call id chosen for the conference': chosen by the FP among the involved calls, either the on-hold call id (call id b) or the active call id (call id a). The other call id is the 'call id not chosen for the conference' (respectively call id a or call id b).

TC_FT_NG1.N.9_BV_103	3-party conference with established external calls - release from initiating party
Reference:	TS 102 527-3 [14], Clause 7.4.3.7
Initial condition:	External call in F-10 (TS_1+IUT) initiated by Phone_A on line 0 (call id a), one parallel external call on hold on line 0 (call id b) with Phone B
Stimulus:	1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 32H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 2. Send a {CC-RELEASE} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id not chosen for the conference, CS idle) =<(1, 0, value a or b), (2, 1, 0)>, If the call id chosen for the conference is call id b then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, updated call id b, CS conference connect) =<(1, 0, value a), (1, 1, value b), (2, 1, 11)> Else verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_1 and Phone B Verify end-to-end U-plane connection between Phone A and Phone B 2. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	'Call id chosen for the conference': chosen by the FP among the involved calls, either the on-hold call id (call id b) or the active call id (call id a). The other call id is the 'call id not chosen for the conference' (respectively call id a or call id b).

TC_FT_NG1.N.9_BV_104	3-party conference with established external calls on two different lines - release from initiating party
Reference:	TS 102 527-3 [14], Clause 7.4.3.7
Initial condition:	External call in F-10 (TS_1+IUT) initiated by Phone_A on line 0 (call id a), one parallel external call on hold on line 1 (call id b) with Phone B
Stimulus:	1. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 32H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 2. Send a {CC-RELEASE} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id not chosen for the conference, CS idle) =<(1, 0, value a or b), (2, 1, 0)>, If the call id chosen for the conference is call id b then verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, updated call id b, CS conference connect) =<(1, 0, value a), (1, 1, value b), (2, 1, 11)> Else verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_1 and Phone B Verify end-to-end U-plane connection between Phone A and Phone B 2. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	'Call id chosen for the conference': chosen by the FP among the involved calls, either the on-hold call id (call id b) or the active call id (call id a). The other call id is the 'call id not chosen for the conference' (respectively call id a or call id b).

7.10 TC_FT_NG1.N.10 Intrusion call tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Intrusion call.

Declarations (see Annex A):

- NG1.N.10 "Intrusion call" feature is optional on FP side, so the manufacturer shall declare if it is supported.
- When NG1.N.14 "Multiple lines" procedure is declared, following behaviours and corresponding test cases are exclusive:
 - FP implements 'non early CC-CONNECT': TC_FT_NG1.N.10_BV_105.

- FP implements 'early CC-CONNECT': TC_FT_NG1.N.10_BV_106.

TC_FT_NG1.N.10_BV_101	Implicit call intrusion into a line in "single call" mode - release from intruder
Reference:	TS 102 527-3 [14], Clause 7.4.3.8.1
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 and PP2 attached to only line 0
Stimulus:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A 1. Send a {CC-SETUP} message from TS_2 with IE <<BASIC-SERVICE>> 'Normal call setup' and with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> 2. Send a {CC-RELEASE} message from TS_2
Pass criteria:	1. Verify that the IUT sends to TS_2 either: <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26), and with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 11)> or <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 11)>, followed by a {CC-INFO} with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP2>> • an IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_1 and TS_2 Verify end-to-end U-plane connection between TS_2 and Phone A 2. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message Verify that the IUT sends to TS_1 in one or several {CC-INFO} messages an IE <<CLIP>> with <Calling party address> field set to Phone A number and IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A
Comments:	The CLIP in pass criteria 3 is an 'artificial' CLIP created by the FP as the first call was an outgoing call

TC_FT_NG1.N.10_BV_105	Implicit call intrusion into a line in "single call" mode on a multiple line system (non early CC-CONNECT implementation) - release from intruder
Reference: Initial condition:	TS 102 527-3 [14], Clause 7.4.3.8.1 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 attached to line 0, PP2 attached to line 0 and line 1
Stimulus:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_2 with IE <<BASIC-SERVICE>> 'Normal call setup' 2. Send a {CC-INFO} message from TS_2 with IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, lid0), (1, 0, value a)> 3. Send a {CC-RELEASE} message from TS_2
Stimulus:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_2 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 2. Verify that the IUT sends to TS_2 either: <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26), and with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (1, 1, value a), (2, 1, 11)> or • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 11)>, followed by a {CC-INFO} with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>
Pass criteria:	<p>Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP2> >> • an IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages <p>Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_1 and TS_2 Verify end-to-end U-plane connection between TS_2 and Phone A</p> <ol style="list-style-type: none"> 3. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message Verify that the IUT sends to TS_1 in one or several {CC-INFO} messages an IE <<CLIP>> with <Calling party address> field set to Phone A number and IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id chosen for the conference, CS call connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a or b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A
Comments:	The CLIP in pass criteria 3 is an 'artificial' CLIP created by the FP as the first call was an outgoing call

TC_FT_NG1.N.10_BV_106	Implicit call intrusion into a line in "single call" mode on a multiple line system (early CC-CONNECT implementation) - release from intruder
Reference: Initial condition:	TS 102 527-3 [14], Clause 7.4.3.8.1 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 attached to line 0, PP2 attached to line 0 and line 1
Stimulus:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Pass criteria:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_2 with IE <<BASIC-SERVICE>> 'Normal call setup' 2. Send a {CC-INFO} message from TS_2 with IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, lid0), (1, 0, value a)> 3. Send a {CC-RELEASE} message from TS_2
Stimulus:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 2. Verify that the IUT sends to TS_2 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) • an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, updated call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (1, 1, value a), (2, 1, 11)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages
Pass criteria:	<p>Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP2> >> • an IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages
Stimulus:	<p>Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_1 and TS_2 Verify end-to-end U-plane connection between TS_2 and Phone A</p>
Pass criteria:	<ol style="list-style-type: none"> 3. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message Verify that the IUT sends to TS_1 in one or several {CC-INFO} messages an IE <<CLIP>> with <Calling party address> field set to Phone A number and IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id chosen for the conference, CS call connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a or b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A
Comments:	The CLIP in pass criteria 3 is an 'artificial' CLIP created by the FP as the first call was an outgoing call

TC_FT_NG1.N.10_BV_201	Explicit call intrusion into a line in "single call" mode - handset intrusion
Reference:	TS 102 527-3 [14], Clause 7.4.3.8.2
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 and PP2 attached to line 0
Stimulus:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A 1. Send a {CC-SETUP} message from TS_2 with IE <<BASIC-SERVICE>> 'Normal call setup' and with IE <<MULTI-KEYPAD >> set to (1CH, 40H) digits followed by a {CC-INFO} message from TS_2 with IE <<MULTI-KEYPAD >> set to (17H, 31H) digits
Pass criteria:	1. Verify that the IUT sends to TS_2 either: <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26), and with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 11)> or • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 11)>, followed by a {CC-INFO} with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP2> >> • an IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_1 and TS_2 Verify end-to-end U-plane connection between TS_2 and Phone A

TC_FT_NG1.N.10_BV_202	Explicit call intrusion into a line in "single call" mode - line intrusion
Reference:	TS 102 527-3 [14], Clause 7.4.3.8.2
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), "Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 31H ("allowed") on line 0, PP1 and PP2 attached to line 0
Stimulus:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A 1. Send a {CC-SETUP} message from TS_2 with IE <<BASIC-SERVICE>> 'Normal call setup' and with IE <<MULTI-KEYPAD >> set to (1CH, 40H) digits followed by a {CC-INFO} message from TS_2 with IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)>
Pass criteria:	1. Verify that the IUT sends to TS_2 either <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26), and with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 11)> or • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS conference connect) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 11)>, followed by a {CC-INFO} with IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'Intercept tone on' when declared (see Annex A Table A.26) • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP2> >> • an IE <<CALL-INFORMATION>> specifying (call id a, CS conference connect) =<(1, 0, value a), (2, 1, 11)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_1 and TS_2 Verify end-to-end U-plane connection between TS_2 and Phone A

7.11 TC_FT_NG1.N.11 Call deflection (external or internal) tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Call deflection (external or internal) with the following consideration:

- As NG1.N.11_3 "Call deflection control messages" procedure is tested when testing NG1.N.11_1 "Call deflection (internal)" procedure and NG1.N.11_2 "Call deflection (external)" procedure, there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.N.11 "Call deflection (external or internal)" feature is optional on FP side, so the manufacturer shall declare if it is supported.
- NG1.N.11_1 "Call deflection (internal)" procedure is mandatory on FP side but it only makes sense if NG1.N.14 "Multiple lines" procedure is declared.

TC_FT_NG1.N.11_BV_101	Call deflection (internal) in multiple lines context
Reference:	TS 102 527-3 [14], Clause 7.4.4.2
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0, PP2 is attached to line 1, F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call on line 0 towards IUT from Phone A 2. Send a {CC-ALERTING} message from TS_1 Wait for 3 seconds before sending a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 39H, 17H, Terminal id of PP2) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Send a {CC-RELEASE-COM} message from TS_1 4. Send a {CC-ALERTING} message from TS_2
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> Verify that the IUT does not send to TS_2 a {CC-SETUP} message 2. Verify that the IUT optionally sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, and then mandatorily sends to TS_1 a {CC-RELEASE} message 3. Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, 0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)>
Comment:	Although PP2 is only attached to line 1, it may receive a call from line 0 as a result of call deflection

TC_FT_NG1.N.11_BV_201	Call deflection (external) - first incoming call deflection
Reference:	TS 102 527-3 [14], Clause 7.4.4.2
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 and PP2 attached to line 0 F-00
Stimulus:	<ol style="list-style-type: none"> 1. Switch on IUT 2. Perform an incoming call on line 0 towards IUT from Phone A 3. Send a {CC-ALERTING} message from TS_1 Send a {CC-ALERTING} message from TS_2 Wait for 3 seconds before sending a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 39H, 15H, Phone B number) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 4. Send a {CC-RELEASE-COM} message from TS_1 Send a {CC-RELEASE-COM} message from TS_2
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that "Call deflection" higher layer capability bit is set to 1 (= Extended higher layer capabilities (part 2) a34 bit) 2. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> 3. Verify that the IUT optionally sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, and then mandatorily sends to TS_1 a {CC-RELEASE} message Verify that the IUT optionally sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)>, and then mandatorily sends to TS_2 a {CC-RELEASE} message 4. Verify that Phone B rings
Comment:	Call deflection request impacts all PPs receiving the incoming call (all stop ringing)

TC_FT_NG1.N.11_BV_202	Call deflection (external) - call waiting deflection
Reference:	TS 102 527-3 [14], Clause 7.4.4.2
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming external call towards IUT from Phone B on line 0 2. Wait for 3 seconds before sending a {CC-INFO} message with IE <<MULTI-KEYPAD >> set to (1CH, 39H, 15H, Phone C number) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on' when declared (see Annex A, Table A.26) • an IE <<CALLING PARTY NUMBER>> with <calling party address= Phone B number> • an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> Verify that Phone C rings

7.12 TC_FT_NG1.N.12 Line identification tests cases

Test subgroup objectives: to check the IUT's behaviours regarding line identification with the following considerations:

- NG1.N.12_3 "Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE" procedure in {CC-SETUP} message is tested with NG1.N.13_2 "Call identifier assignment on outgoing call (FP to PP)" procedure.
- NG1.N.12_6 "General line identification requirements for external incoming calls" and NG1.N.12_7 "Line identification for a first external incoming call " procedures are tested with NG1.N.7_2 "Call waiting indication (external or internal)" and NG1.N.13_3 "Call identifier assignment on incoming call (FP to PP)" procedures.
- No backward compatibility tests in front of a GAP PP are foreseen as these tests will be done when running EN 300 444 [12] tests.

Declarations (see Annex A):

- Following behaviours and corresponding test cases are exclusive:
 - FP implements 'non early CC-CONNECT': TC_FT_NG1.N.12_BV_301, TC_FT_NG1.N.12_BV_401, TC_FT_NG1.N.12_BV_501.
 - FP implements 'early CC-CONNECT': TC_FT_NG1.N.12_BV_302, TC_FT_NG1.N.12_BV_402, TC_FT_NG1.N.12_BV_502.

TC_FT_NG1.N.12_BV_301	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE in {CC-INFO} (non early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.2 F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, lid0), (1, 0, value a)> from TS_1 3. Send a {CC-RELEASE} message from TS_1 4. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 5. Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, call id b) =<(0, 0, lid0), (1, 0, value b)>, followed by a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 6. Send a {CC-RELEASE} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 2. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)> Verify that Phone A rings or that the IUT sends to TS_1 a {CC-ALERTING} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 5. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b)> Verify that Phone A rings or that the IUT sends to TS_1 a {CC-ALERTING} message 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message <p>The FP call identifier assignment method is left free to implementation; 'call id a' will be equal to 'call b' if IUT implements the "no re-use method".</p>

TC_FT_NG1.N.12_BV_302	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE in {CC-INFO} (early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.2 F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (line 0, call id a) =<(0, 0, lid0), (1, 0, value a)> from TS_1 3. Send a {CC-RELEASE} message from TS_1 4. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 5. Send a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, call id b) =<(0, 0, lid0), (1, 0, value b)>, followed by a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 6. Send a {CC-RELEASE} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 2. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)> Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> 5. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b)> Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message <p>The FP call identifier assignment method is left free to implementation; 'call id a' will be equal to 'call b' if IUT implements the "no re-use method".</p>

TC_FT_NG1.N.12_BV_401	Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (non early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.3 F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> requesting line 0 (=23H, 30H) and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>, followed by a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Send a {CC-RELEASE} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 2. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)> Verify that Phone A rings or that the IUT sends to TS_1 a {CC-ALERTING} 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.12_GC_401	Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (non early CC-CONNECT implementation)
Reference:	TS 102 527-3 [14], Clause 7.4.5.2.3
Initial condition:	TS_1 is a GAP PP1 F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to ("#0" + Phone A number) digits from TS_1 3. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message 2. Verify that Phone A rings or that the IUT sends to TS_1 a {CC-ALERTING} message 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.12_BV_402	Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (early CC-CONNECT implementation)
Reference:	TS 102 527-3 [14], Clause 7.4.5.2.3
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to ("#0"+Phone A number) digits and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 2. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)> Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.12_GC_402	Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE (early CC-CONNECT implementation)
Reference:	TS 102 527-3 [14], Clause 7.4.5.2.3
Initial condition:	TS_1 is a GAP PP1 F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' from TS_1 2. Use the piece-wise method to send ("#0"+Phone A number) digits in several {CC-INFO} messages with IE <<KEYPAD>> from TS_1 3. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CONNECT} message 2. Verify that Phone A rings 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.12_BV_501	FP managed line selection for a first external outgoing call (non early CC-CONNECT implementation)
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.5.2.4 F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Send a {CC-RELEASE} message from TS_1 4. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', IE <<MULTI-KEYPAD>> set to Phone A number, and IE <<CALL-INFORMATION>> specifying (line None, call id b) =<(0, 0, 127), (1, 0, value b)> from TS_1 5. Send a {CC-RELEASE} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying at the minimum (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> and possibly (line u, line type information) =<(0, 0, value u), (0, 5, lt0)> 2. If line id was not received in step 1 then verify that the IUT sends to TS_1 either: <ul style="list-style-type: none"> • a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line u, line type information, call id a) =<(0, 0, line u), (0, 5, lt0), (1, 0, value a) > <p>or</p> <ul style="list-style-type: none"> • a {CC-CALL-PROC} message with IE <<CALL-INFORMATION>> specifying (line u, line type information, call id a, CS call proc) =<(0, 0, line u), (0, 5, lt0), (1, 0, value a), (2, 1, 3)> <p>Verify that Phone A rings or that the IUT sends to TS_1 a {CC-ALERTING} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)></p> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1 either: <ul style="list-style-type: none"> • a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line u, line type information, call id b) =<(0, 0, value u), (0, 5, lt0), (1, 0, value b)> <p>or</p> <ul style="list-style-type: none"> • a {CC-CALL-PROC} message with IE <<CALL-INFORMATION>> specifying (line u, line type information, call id b, CS call proc) =<(0, 0, value u), (0, 5, lt0), (1, 0, value b), (2, 1, 3)> <p>Verify that Phone A rings or that the IUT sends to TS_1 a {CC-ALERTING} message</p> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message <p>The FP call identifier assignment method is left free to implementation; 'call id a' will be equal to 'call b' if IUT implements the "no re-use method".</p>

TC_FT_NG1.N.12_BV_502	FP managed line selection for a first external outgoing call (early CC-CONNECT implementation)
Reference:	TS 102 527-3 [14], Clause 7.4.5.2.4
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line None) =<(0, 0, 127)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Send a {CC-RELEASE} message from TS_1 4. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup', IE <<MULTI-KEYPAD>> set to Phone A number, and IE <<CALL-INFORMATION>> specifying (line None, call id b) =<(0, 0, 127), (1, 0, value b)> from TS_1 5. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1: <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying at least (call id a) =<(2, 1, 2)> • followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> • one of the two previous messages {CC-CONNECT} or {CC-INFO} possibly specifying (line u, line type information) =<(0, 0, value u), (0, 5, dtu)> in the <<CALL-INFORMATION>> IE 2. If line id was not received in step 1, verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (line u, line type information, call id a) =<(0, 0, value u), (0, 5, dtu), (1, 0, value a)> Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1: <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying at least (call id b) =<(1, 0, value b)> • optionally a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (call id b, CS call proc) =<(1, 0, value b), (2, 1, 3)> • one of the two previous messages {CC-CONNECT} or {CC-INFO} specifying at least (line u, line type information) =<(0, 0, value u), (0, 5, dtu)> in the <<CALL-INFORMATION>> IE Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	The FP call identifier assignment method is left free to implementation; 'call id a' will be equal to 'call b' if IUT implements the "no re-use method".

7.13 TC_FT_NG1.N.13 Call identification tests cases

Test subgroup objectives: to check the IUT's behaviours regarding call identification with the following consideration:

- NG1.N.13_1 "Call identification general requirements" and NG1.N.13_4 " Call status indication to the handset (FP to PP)" procedures are tested with NG1.N.13_2 "Call identifier assignment on outgoing call (FP to PP)" and NG1.N.13_3 "Call identifier assignment on incoming call (FP to PP)" procedures.
- No backward compatibility tests in front of a GAP PP are foreseen as these tests will be done when running EN 300 444 [12] tests.
- No backward compatibility tests in front of a NG-DECT PART1 PP are foreseen as these tests will be done when running NG-DECT PART1 backward compatibility tests (see TC_FT_NG1.N.1_WC_* TCs).

Declarations (see Annex A):

Following behaviours and corresponding test cases are exclusive:

- FP implements 'non early CC-CONNECT': TC_FT_NG1.N.13_BV_201.
- FP implements 'early CC-CONNECT': TC_FT_NG1.N.13_BV_202.

TC_FT_NG1.N.13_BV_201	Call identifier assignment on outgoing call (FP to PP) - Normal call (non early CC-CONNECT implementation) - Call status indication
Reference: Initial condition: Stimulus:	TS 102 527-3 [14], Clauses 7.4.6.1, 7.4.6.2 and 7.4.6.4 F-00 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Call pick up on Phone A 4. Send a {CC-RELEASE} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup ack) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 2)> 2. Verify that Phone A rings and that the IUT sends to TS_1 a {CC-ALERTING} with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A 4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	FP can send {CC-CALL-PROC} with 'CS call proc' call status before {CC-ALERTING} in step 2

TC_FT_NG1.N.13_BV_202	Call identifier assignment on outgoing call (FP to PP) - Normal call (early CC-CONNECT implementation) - Call status indication
Reference: Initial condition: Stimulus:	TS 102 527-3 [14], Clauses 7.4.6.1 and 7.4.6.2 F-00 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Call pick up on Phone A 4. Send a {CC-RELEASE} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1: <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying at least (call id a) =<(1, 0, value a)> • followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> • one of the two previous messages {CC-CONNECT} or {CC-INFO} message specifying at least (line 0, line type information) =<(0, 0, lid0), (0, 5, lt0)> in the <<CALL-INFORMATION>> IE 2. Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)>Verify end-to-end U-plane connection between TS_1 and Phone A 4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	FP can send also 'CS call proc' with the call identifier before 'CS call alerting' in step 2

TC_FT_NG1.N.13_BV_203	Call identifier assignment on outgoing call (FP to PP) - Internal call - Call status indication
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clauses 7.4.6.1 and 7.4.6.2</p> <p>2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to terminal Id of PP2 and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Send a {CC-ALERTING} message from TS_2 Send a {CC-CONNECT} message from TS_2 4. Send a {CC-RELEASE} message from TS_1 5. Send a {CC-RELEASE} message from TS_2 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> 2. Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id a, CS call setup) =<(1, 0, value a), (2, 1, 1)> 3. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and TS_2 4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 5. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message <p>FP may send "CS call proc" or "CS call alerting" with the call identifier before 'CS call connect' in step 3</p>

TC_FT_NG1.N.13_BV_204	Call identifier assignment on outgoing call (FP to PP) - LiA service call setup - Call status indication for outgoing external call
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.10.6.2</p> <p>F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a {CC-INFO} message from TS_1 with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with Phone A number and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0) > 3. Call pick up on Phone A 4. Send a {CC-RELEASE} message from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a {CC-CONNECT} message followed by a {CC-INFO} message to TS_1 with IE <<CALL-INFORMATION>> specifying at least (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lid0), (1, 0, value a)> Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A 4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message <p>FP can send {CC-CALL-PROC} with 'CS call proc' call status before {CC-ALERTING} in step 2</p>

TC_FT_NG1.N.13_BV_205	Call identifier assignment on outgoing call (FP to PP) - LiA service call setup - Call status indication for internal call
Reference: Initial condition: Stimulus:	TS 102 527-3 [14], Clause 7.4.10.6.2 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-00 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes>>> 2. Send a {CC-INFO} message from TS_1 with IE <<MULTI-KEYPAD>> set to (17H, terminal Id of PP2) digits 3. Send a {CC-ALERTING} message from TS_2 Send a {CC-CONNECT} message from TS_2 4. Send a {CC-RELEASE} message from TS_2 5. Send a {CC-RELEASE} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a {CC-CONNECT} message followed by a {CC-INFO} message to TS_1 with IE <<CALL-INFORMATION>> specifying at least (call id a) =<(1, 0, value a)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' and IE <<CALL-INFORMATION>> specifying (call id a, CS call setup) =<(1, 0, value a), (2, 1, 1)> 3. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and TS_2 4. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	FP may send "CS call proc" and "CS call alerting" with the call identifier before 'CS call connect' in step 3

TC_FT_NG1.N.13_BV_301	Call identifier assignment on incoming call (FP to PP) - Normal call setup
Reference: Initial condition: Stimulus:	TS 102 527-3 [14], Clauses 7.4.6.3, 7.4.6.4 and 7.4.5.3 F-00 1. Perform an incoming call on line 0 towards IUT from Phone A 2. Send a {CC-ALERTING} message from TS_1, followed by a {CC-CONNECT} message 1 second later 3. Send a {CC-RELEASE} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> 2. Verify that the IUT sends to TS_1 a {CC-CONNECT-ACK} message followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.13_BV_302	Call identifier assignment on incoming call (FP to PP) - LiA service call setup - Call status indication for incoming external call
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.4.10.6.3 F-00 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Perform an incoming call on line 0 towards IUT from Phone A 3. Send a {CC-INFO} message from TS_1 with IE <<MULTI-KEYPAD >> set to (1CH, 35H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 4. Send a {CC-RELEASE} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a {CC-CONNECT} message followed by in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on' when declared (see Annex A, Table A.26) • an IE <<CALLING PARTY NUMBER>> with <calling party address= Phone A number> • an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lid0), (1, 0, value a), (2, 1, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages 3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A 4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

7.14 TC_FT_NG1.N.14 Multiple lines tests cases

Test subgroup objectives: to check the IUT's behaviours regarding multiple lines with the following considerations:

- NG1.N.14_1 "Multiple lines general requirements" procedure requires that FP implements NG1.N.7 "Common parallel call procedures (external or internal)" feature. So there is no test case defined for this procedure which is tested implicitly when testing "NG1.N.7 Common parallel call procedures (external or internal)" feature.
- NG1.N.14_2 "Terminal attachment and line settings" procedure is tested when testing NG1.N.16_25 "Line settings list" procedure and NG1.N.16_40 "Attached handsets" procedure.
- NG1.N.14_5 "compatibility with non multiple line PP or FP" procedure is not tested as is this procedure is tested when testing the NG1.N.12 "Line identification" feature and when running EN 300 444 [12] tests.

Declarations (see Annex A):

- NG1.N.14 "Multiple lines" feature is optional on FP side, so the manufacturer shall declare if it is supported.
- When NG1.N.22 "Handling of lines where second calls are signalled in-band" feature is supported on a line, the manufacturer shall declare if the following procedure is supported within this line: call release and call release rejection.

Following behaviours and corresponding test cases are exclusive:

- FP implements 'non early CC-CONNECT': TC_FT_NG1.N.14_BV_305.
- FP implements 'early CC-CONNECT': TC_FT_NG1.N.14_BV_306.

TC_FT_NG1.N.14_BV_301	Incoming external calls on a multiple line system - Incoming calls on two lines with no active PPs
Reference: Initial condition:	TS 102 527-3 [14], Clause 7.4.7.3 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0, PP2 is attached to line 1, F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call on line 0 towards IUT from Phone A 2. Send a {CC-ALERTING} message from TS_1 Perform an incoming call on line 1 towards IUT from Phone B 3. Send a {CC-ALERTING} message from TS_2 Send a {CC-CONNECT} message from TS_1 4. Send a {CC-CONNECT} message from TS_2 5. Send a {CC-RELEASE} message from TS_1 6. Send a {CC-RELEASE} message from TS_2
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> Verify that the IUT does not send to TS_2 a {CC-SETUP} message 2. Verify that the IUT does not send to TS_1 a {CC-SETUP} message Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup) =<(0, 0, lid1), (0, 5, lt1), (1, 0, value b), (2, 1, 1)> 3. Verify that the IUT sends to TS_1 a {CC-CONNECT-ACK} message followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A 4. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_2 and Phone B 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 6. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message

TC_FT_NG1.N.14_BV_302	Incoming external calls on a multiple line system - Incoming call with one active PP - Accept second call on idle PP and release it
Reference: Initial condition:	TS 102 527-3 [14], Clause 7.4.7.3 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0 and line 1, PP2 is attached to line 1, External call in F-10 (TS_1+IUT) initiated by PP1 on line 0 (call id a) with Phone A
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call on line 1 towards IUT from Phone B 2. Send a {CC-ALERTING} message followed by a {CC-CONNECT} from TS_2 3. Send a {CC-RELEASE} message from TS_2
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup) =<(0, 0, lid1), (0, 5, lt0), (1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup) =<(0, 0, lid1), (0, 5, lt1), (1, 0, value b), (2, 1, 1)> 2. Verify that the IUT sends to TS_2 a {CC-CONNECT-ACK} message followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> Verify end-to-end U-plane connection between TS_2 and Phone B 3. Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message
Comments:	IE <<SIGNAL>> with the value 07H indicating 'call waiting' tone is also received by TS_1 in pass criteria 1 if this procedure is supported (see Annex A, Table A.26)

TC_FT_NG1.N.14_BV_303	Incoming external calls on a multiple line system - Incoming call with one active PP - Accept second call on active PP and release it - Resume active call
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.7.3</p> <p>2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0 and line 1, PP2 is attached to line 1, External call in F-10 (TS_1+IUT) initiated by PP1 on line 0 (call id a) with Phone A</p> <p>1. Perform an incoming call on line 1 towards IUT from Phone B</p> <p>2. Send a {CC-ALERTING} message from TS_2 Send a {CC-INFO} message with 1CH 35H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1</p> <p>3. Send a {CC-RELEASE-COM} message from TS_2 Send a {CC-INFO} message with 1CH 33H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>from TS_1</p> <p>4. Send a {CC-INFO} message with 1CH 42H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_1</p> <p>1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup) =<(0, 0, lid1), (0, 5, lt1), (1, 0, value b), (2, 1, 1)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup) =<(0, 0, lid1), (0, 5, lt1), (1, 0, value b), (2, 1, 1)></p> <p>2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify that the IUT optionally sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> and then mandatorily sends to TS_2 a {CC-RELEASE} message Verify end-to-end U-plane connection between TS_1 and Phone B</p> <p>3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)></p> <p>4. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A</p> <p>IE <<SIGNAL>> with the value 07H indicating 'call waiting' tone is also received by TS_1 in pass criteria 1 if this procedure is supported (see Annex A Table A.26)</p>

TC_FT_NG1.N.14_BV_304	Incoming external calls on a multiple line system - Two simultaneous incoming calls
Reference:	TS 102 527-3 [14], Clause 7.4.7.3
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0 and line 1, PP2 is attached to line 1, F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call on line 0 towards IUT from Phone A 2. Send a {CC-ALERTING} message from TS_1 Perform an incoming call on line 1 towards IUT from Phone B 3. Send a {CC-ALERTING} message from TS_2 Hang up on Phone A 4. Send a {CC-RELEASE-COM} message from TS_1 5. Send a {CC-ALERTING} message from TS_1 Hang up on Phone B 6. Send a {CC-RELEASE-COM} message from TS_1 Send a {CC-RELEASE-COM} message from TS_2
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> Verify that the IUT does not send to TS_2 a {CC-SETUP} message 2. Verify that the IUT does not send to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (CS call setup) =<(2, 1, 1)> Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup) =<(0, 0, lid1), (0, 5, lt1), (1, 0, value a), (2, 1, 1)> 3. Verify that the IUT optionally sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> and then mandatorily sends to TS_1 a {CC-RELEASE} message 4. Verify that the IUT send to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup) =<(0, 0, lid1), (0, 5, lt1), (1, 0, value b), (2, 1, 1)> 5. Verify that the IUT optionally sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> and then mandatorily sends to TS_1 a {CC-RELEASE } message Verify that the IUT optionally sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> and then mandatorily sends to TS_2 a {CC-RELEASE} message

TC_FT_NG1.N.14_BV_305	Outgoing external calls on a multiple line system - Initiate outgoing calls on two lines (non early CC-CONNECT implementation)
Reference:	TS 102 527-3 [14], Clause 7.4.7.3
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0, PP2 is attached to line 1, F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 1) =<(0, 0, lid1)> from TS_2 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone B number and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_2 3. Call pick up on Phone A Call pick up on Phone B 4. Send a {CC-RELEASE} message from TS_1 Send a {CC-RELEASE} message from TS_2
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup ack) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 2)> Verify that the IUT sends to TS_2 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (line 1, line type information, call id b, CS call setup ack) =<(0, 0, lid1), (0, 5, lt1), (1, 0, value b), (2, 1, 2)> 2. Verify that Phone A rings and that the IUT sends to TS_1 a {CC-ALERTING} with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> Verify that Phone B rings and that the IUT sends to TS_2 a {CC-ALERTING} with IE <<CALL-INFORMATION>> specifying (call id b, CS call alerting) =<(1, 0, value b), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_2 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> 4. Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_2 and Phone B 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message
Comments:	FP can send {CC-CALL-PROC} with 'CS call proc' call status before {CC-ALERTING} in step 2

TC_FT_NG1.N.14_BV_306	Outgoing external calls on a multiple line system - Initiate outgoing calls on two lines (early CC-CONNECT implementation)
<p>Reference: Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.7.3 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0, PP2 is attached to line 1, F-00</p> <p>1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 1) =<(0, 0, lid1)> from TS_2</p> <p>2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_2</p> <p>3. Call pick up on Phone A Call pick up on Phone B</p> <p>4. Send a {CC-RELEASE} message from TS_1 Send a {CC-RELEASE} message from TS_2</p> <p>1. Verify that the IUT sends to TS_1:</p> <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying at least (call id a) =<(1, 0, value a)> • followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> • one of the two previous messages {CC-CONNECT} or {CC-INFO} specifying at least (line 0, line type information) =<(0, 0, lid0), (0, 5, lt0)> in the <<CALL-INFORMATION>> IE <p>Verify that the IUT sends to TS_2:</p> <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying at least (call id b) =<(1, 0, value b)> • followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (call id b, CS call setup ack) =<(1, 0, value b), (2, 1, 2)> • one of the two previous messages {CC-CONNECT} or {CC-INFO} specifying at least (line 1, line type information) =<(0, 0, lid1), (0, 5, lt1)> in the <<CALL-INFORMATION>> IE <p>2. Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> Verify that Phone B rings and that the IUT sends to TS_2 a {CC-INFO} with IE <<CALL-INFORMATION>> specifying (call id b, CS call alerting) =<(1, 0, value b), (2, 1, 4)></p> <p>3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)></p> <p>4. Verify end-to-end U-plane connection between TS_1 and Phone A Verify end-to-end U-plane connection between TS_2 and Phone B</p> <p>5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message Verify that the IUT sends to TS_2 a {CC-RELEASE-COM} message</p> <p>FP can send also 'CS call proc' with the call identifier before 'CS call alerting' in step 2</p>

TC_FT_NG1.N.14_BV_401	Internal calls in multiple line context
<p>Reference: Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.7.4 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), PP1 is attached to line 0, PP2 is attached to line 1, F-00</p> <p>Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup' with IE <<MULTI-KEYPAD>> set to (IA5 coding of terminal identity number in decimal of TS_2) digit from TS_1</p> <p>Verify that the IUT sends to TS_2 a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Internal call setup'</p>

7.15 TC_FT_NG1.N.15 Multiple calls tests cases

Test subgroup objectives: to check the IUT's behaviours regarding multiple calls procedure.

Declarations (see Annex A):

Following behaviours and corresponding test cases are exclusive:

- FP implements 'non early CC-CONNECT': TC_FT_NG1.N.15_BV_205.
- FP implements 'early CC-CONNECT':TC_FT_NG1.N.15_BV_206.

TC_FT_NG1.N.15_BV_201	Incoming external calls on a multiple call line - Accept incoming second call on idle PP
Reference:	TS 102 527-3 [14], Clause 7.4.8.2
Initial condition:	"Multiple calls mode" set to 31H ("multiple call mode") on line 0, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_2+IUT) initiated by PP2 on line 0 (call id b) with Phone B
Stimulus:	1. Perform an incoming call on line 0 towards IUT from Phone A 2. Send a {CC-ALERTING} message followed by a {CC-CONNECT} from TS_1 3. Send a {CC-RELEASE} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> 2. Verify that the IUT sends to TS_1 a {CC-CONNECT-ACK} message followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> Verify end-to-end U-plane connection between TS_1 and Phone A 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.15_BV_202	Incoming external calls on a multiple call line - Accept incoming second call on active PP
Reference:	TS 102 527-3 [14], Clause 7.4.8.2
Initial condition:	"Multiple calls mode" set to 31H ("multiple call mode") on line 0, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_2+IUT) initiated by PP2 on line 0 (call id b) with Phone B
Stimulus:	1. Perform an incoming call on line 0 towards IUT from Phone A 2. Send a {CC-ALERTING} message from TS_1 Send a {CC-INFO} message with 1CH 35H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_2 3. Send a {CC-INFO} message with 1CH 33H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_2 4. Send a {CC-INFO} message with 1CH 42H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>from TS_2
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> 2. Verify that the IUT sends to TS_1 a {CC-RELEASE} message Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_2 and Phone A 3. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> 4. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_2 and Phone B

TC_FT_NG1.N.15_BV_205	Outgoing external calls on a multiple call line - Initiate outgoing second call on idle PP (non early CC-CONNECT implementation)
Reference:	TS 102 527-3 [14], Clause 7.4.8.2
Initial condition:	"Multiple calls mode" set to 31H ("multiple call mode") on line 0, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_2+IUT) initiated by PP2 on line 0 (call id b) with Phone B
Stimulus:	1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Call pick up on Phone A
Pass criteria:	4. Send a {CC-RELEASE} message from TS_1 1. Verify that the IUT sends to TS_1 a {CC-SETUP-ACK} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup ack) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 2)> 2. Verify that Phone A rings and that the IUT sends to TS_1 a {CC-ALERTING} with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A
Comments:	4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message FP can send {CC-CALL-PROC} with 'CS call proc' call status before {CC-ALERTING} in step 2

TC_FT_NG1.N.15_BV_206	Outgoing external calls on a multiple call line - Initiate outgoing second call on idle PP (early CC-CONNECT implementation)
Reference:	TS 102 527-3 [14], Clause 7.4.8.2
Initial condition:	"Multiple calls mode" set to 31H ("multiple call mode") on line 0, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_2+IUT) initiated by PP2 on line 0 (call id b) with Phone B
Stimulus:	1. Send a {CC-SETUP} message with IE <<BASIC-SERVICE>> 'Normal call setup' and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 3. Call pick up on Phone A
Pass criteria:	4. Send a {CC-RELEASE} message from TS_1 1. Verify that the IUT sends to TS_1: <ul style="list-style-type: none"> • a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying at least (call id a) =<(1, 0, value a)> • followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)> • one of the two previous messages {CC-CONNECT} or {CC-INFO} specifying at least (line 0, line type information) =<(0, 0, lid0), (0, 5, lt0)> in the <<CALL-INFORMATION>> IE 2. Verify that Phone A rings and that the IUT sends to TS_1 a {CC-INFO} with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A
Comments:	4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message FP can send also 'CS call proc' with the call identifier before 'CS call alerting' in step 2

TC_FT_NG1.N.15_BV_207	Outgoing external calls on a multiple call line - Initiate outgoing second call on active PP using <<CALL-INFORMATION>> line selection
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.8.2</p> <p>"Multiple calls mode" set to 31H ("multiple call mode") on line 0, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_2+IUT) initiated by PP2 on line 0 (call id b) with Phone B</p> <p>1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits from TS_2</p> <p>2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (line0, call id a) =<(0, 0, lid0), (1, 0, value a)> from TS_2</p> <p>3. Call pick up on Phone A</p> <p>4. Send a {CC-INFO} message with 1CH 33H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_2</p> <p>5. Send a {CC-INFO} message with 1CH 42H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>from TS_2</p> <p>1. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack) =<(1, 0, value a), (2, 1, 2)></p> <p>2. Verify that the IUT sends a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)></p> <p>Verify that Phone A rings and that the IUT sends to TS_2 a {CC-INFO} with IE <<CALL-INFORMATION>> specifying (call id a, CS alerting) =<(1, 0, value a), (2, 1, 4)></p> <p>3. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)></p> <p>Verify end-to-end U-plane connection between TS_2 and Phone A</p> <p>4. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)></p> <p>5. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)></p> <p>Verify end-to-end U-plane connection between TS_2 and Phone B</p> <p>FP can send also 'CS call proc' with the call identifier before 'CS alerting' in step 2</p>

TC_FT_NG1.N.15_BV_208	Outgoing external calls on a multiple call line - Initiate outgoing second call on active PP using <<MULTI-KEYPAD>> line selection
Reference:	TS 102 527-3 [14], Clause 7.4.8.2
Initial condition:	"Multiple calls mode" set to 31H ("multiple call mode") on line 0, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), External call in F-10 (TS_2+IUT) initiated by PP2 on line 0 (call id b) with Phone B
Stimulus:	1. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 15H, 23H, 30H) digits from TS_2 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to Phone A number from TS_2 3. Call pick up on Phone A 4. Send a {CC-INFO} message with 1CH 33H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_2 5. Send a {CC-INFO} message with 1CH 42H in IE <<MULTI-KEYPAD>> and IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)>from TS_2
Pass criteria:	1. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call hold) =<(1, 0, value b), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup ack) =<(0, 0, lid0), (0, 5, lid0), (1, 0, value a), (2, 1, 2)> 2. Verify that Phone A rings and that the IUT sends to TS_2 a {CC-INFO} with IE <<CALL-INFORMATION>> specifying (call id a, CS alerting) =<(1, 0, value a), (2, 1, 4)> 3. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_2 and Phone A 4. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> 5. Verify that the IUT sends to TS_2 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_2 and Phone B
Comments:	FP can send also 'CS call proc' with the call identifier before 'CS alerting' in step 2

TC_FT_NG1.N.15_BV_301	Busy system notification
Reference:	TS 102 527-3 [14], Clause 7.4.8.3
Initial condition:	"Multiple calls mode" set to 30H ("single call mode") and "Intrusion call" set to 30H ("not allowed") on line 0 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), external call in F-10 (TS_2+IUT) initiated by TS_2 on line 0 (call id b) with Phone B
Stimulus:	1. Send a {CC-SETUP} from TS_1 2. Send a {CC-RELEASE-COM} from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages <ul style="list-style-type: none"> an IE <<SIGNAL>> set to the value 04H indicating 'Busy tone on' when declared (see Annex A Table A.26) an IE <<CALL-INFORMATION>> specifying (call id a, CS call disconnecting, line in use) =<(1, 0, value a), (2, 1, 6), (2, 2, 1)> when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages After some time-out, verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> an IE <<SIGNAL>> with the value 3FH indicating 'Tones off' when declared (see Annex A Table A.26) optionally an IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> Verify that the IUT sends to TS_1 a {CC-RELEASE} message

7.16 TC_FT_NG1.N.16 List access service tests cases

Test subgroup objectives: to check the IUT's behaviours regarding list access service procedures with the following considerations:

- Some test cases shall be run in a given order. In that case, the test case reference to be run before is indicated in the initial condition.
- NG1.N.6_2 "List change notification" procedure is tested with NG1.N.6_22 "Internal names list" procedure and NG1.N.6_25 "Line settings list" procedure.
- As NG1.N.16_26 "Virtual contact list and call list per line" is conditional on support of NG1.N.14 "Multiple lines" feature, and there are no more requirements on FP side that the implementation of line identifier field, there is no test case defined for this procedure.

Declarations (see Annex A):

- Following procedures are optional or conditional so the manufacturer shall declare if they are supported:
 - NG1.N.16_18 "Outgoing calls list".
 - NG1.N.16_20 "All calls list".
 - NG1.N.16_23 "All incoming calls list".
 - NG1.N.16_26 "Virtual contact list and call list per line".
 - NG1.N.16_30 "FP IP address/type".
 - NG1.N.16_31 "FP IP address/value".
 - NG1.N.16_32 "FP IP address/subnet mask".
 - NG1.N.16_33 "FP IP address/gateway".
 - NG1.N.16_34 "FP IP address/DNS server".
 - NG1.N.16_37 "FP version/Hardware version".
 - NG1.N.16_41 "Dialling prefix".
 - NG1.N.16_42 "FP melody".
 - NG1.N.16_43 "FP volume".
 - NG1.N.16_44 "Blocked number".
 - NG1.N.16_46 "Intrusion call".
 - NG1.N.16_47 "Permanent CLIR".
 - NG1.N.16_51 "Emission mode".
- Following behaviours and corresponding test cases are exclusive:
 - TC_FT_NG1.N.16_BV_303 : FP does not accept simultaneous access to the same list from 2 different PPs.
 - TC_FT_NG1.N.16_BV_304 : FP accepts simultaneous accesses to the same list from 2 PPs.
- When implemented multiple lines, the manufacturer shall declare the PP default attachment to at least one line after registration.

TC_FT_NG1.N.16_BV_301	Start / end session sequencing and parameters - list of supported lists
Reference:	TS 102 527-3 [14], Clause 7.4.10.4.1
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, List identifier = 00H, nb of sorting fields =0> from TS_1 3. Send a <End session, session id=n> from TS_1 4. Send a {CC-RELEASE} from TS_1
Pass criteria:	Verify that the IUT sends back to TS_1: <ol style="list-style-type: none"> 1. a {CC-CALL-PROC} 2. a <Start session confirm, session id=n, total nb=1, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 3. a <End session confirm, session id=n> 4. a {CC-RELEASE-COM} message
Comments:	Session identifier shall be different from "0" value.

TC_FT_NG1.N.16_BV_302	CC-RELEASE without end session - list of supported lists
Reference:	TS 102 527-3 [14], Clause 7.4.10.4.1
Initial condition:	List of supported lists open (session id=n). Re-use first 2 steps as TC_FT_NG1.N.16_BV_301 test.
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-RELEASE} from TS_1 2. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 3. Send a <Start session, List identifier = 00H, nb of sorting fields =0> from TS_1 4. Send a <Read entries, session id=n, start index=0, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=01H> from TS_1 5. Send a {CC-RELEASE} from TS_1
Pass criteria:	After start session confirm received, Verify that the IUT sends back to TS_1: <ol style="list-style-type: none"> 1. a {CC-RELEASE-COM} message 2. a {CC-CALL-PROC} message 3. a <Start session confirm, session id=n, total nb=1, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 4. a <Read entries confirm, session id=n, start index=1, counter=1> followed by one <data packet last> 5. a {CC-RELEASE-COM} message
Comments:	Make sure that the second start session is successful (no error returned by the FP) Between step 2 and step 3, no specific delay is required.

TC_FT_NG1.N.16_BV_303	No simultaneous access to the same list from 2 different PPs - internal names list
Reference:	TS 102 527-3 [14], Clause 7.4.10.4.1
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2)
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, list identifier = 06H, nb of sorting fields =0> from TS_1 3. Send a {CC-SETUP} message from TS_2 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 4. Send a <Start session, list identifier = 06H, nb of sorting fields =0> from TS_2 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} from TS_2 7. Send a {CC-RELEASE} from TS_1
Pass criteria:	Verify that the IUT sends back to TS_1: <ol style="list-style-type: none"> 1. a {CC-CALL-PROC} message 2. a <Start session confirm, session id=n, total nb=2, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> Verify that the IUT sends back to TS_2: <ol style="list-style-type: none"> 3. a {CC-CALL-PROC} message 4. a <Start session confirm, session id=0, Start session reject reason= list already in use by another session > 5. Verify that the IUT sends back to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends back to TS_2 a {CC-RELEASE-COM} message 7. Verify that the IUT sends back to TS_1 a {CC-RELEASE-COM} message
Comments:	Here we only check that FP rejects with proper error code the start session from the second PP. This TC is exclusive with TC_FT_NG1.N.16_BV_304

TC_FT_NG1.N.16_BV_305	Edit Current PIN code while Line setting list session is open
Reference:	TS 102 527-3 [14], Clause 7.4.11.1
Initial condition:	Current PIN code field set to (FFH, FFH, 00H, 00H)
Stimulus:	<p>F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, List identifier = 08H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=01H, 02H, 03H > from TS_1 4. Send a <Start session, List identifier = 07H, nb of sorting fields =0> from TS_1 5. Send a <Read entries, session id=m, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=01H> from TS_1 6. Send a <Edit entry, session id=m, entry identifier=v, list entry field identifier 1=01H> from TS_1 7. Send a <Save entry, session id=m, entry identifier=v> from TS_1 followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, 00H, 00H) 8. Send a <End session, session id=m> from TS_1 9. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=01H, 02H, 03H> from TS_1 10. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by one <data packet last> 11. Send a <End session, session id=n> from TS_1 12. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=t, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 3. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 4. Verify that the IUT sends to TS_1 a <Start session confirm, session id=m, total nb=1, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 5. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=m> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) (entry identifier = v) 6. Verify the IUT sends to TS_1 a <Edit entry confirm, session id=m> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) 7. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=m, entry identifier=v, position index=1, total number of available entries=1> 8. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 9. Verify the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 10. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 11. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 12. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_1601	List of supported lists - read entries
Reference:	TS 102 527-3 [14], Clauses 7.4.10.5.1.1 and 7.4.10.5.2
Initial condition:	List of supported lists open (session id=n)
Stimulus:	Send a <Read entries, session id=n, start index=0, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=01H> from TS_1
Pass criteria:	<p>- Verify that the IUT sends back to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by one <data packet last></p> <p>In data packet:</p> <ul style="list-style-type: none"> - Verify that there is one entry in packet - Verify that there is one field 'List identifiers' in this entry - Verify that the list identifiers are ordered in ascending numerical order in 'List identifiers' field - Verify that 'List identifiers' field includes at the minimum and ordered in ascending numerical order: <ul style="list-style-type: none"> • 00H List of supported lists • 01H Missed calls list • 03H Incoming accepted calls list • 05H Contact list • 06H Internal names list • 07H DECT system settings list • 08H Line settings list <p>- Verify that 'List identifiers' field include optional lists declared (see Annex A, Table A.25)</p>
Comments:	Session identifier shall be different from "0" value.

TC_FT_NG1.N.16_BV_1701	Missed calls list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.3
Initial condition:	Service call in F-03
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Start session, List identifier = 01H, nb of sorting fields =0> from TS_1 2. Send a <Delete list, session id=n> from TS_1 3. Send a {CC-RELEASE} from TS_1 4. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 5. Send a <Start session, List identifier = 01H, nb of sorting fields =0> from TS_1 6. Send a <Read entries, session id=m, start index=1, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 7. Send a <End session, session id=n> from TS_1 8. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=t, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =3> 2. Verify that the IUT sends to TS_1 a <Delete list confirm, session id=n> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 5. Verify that the IUT sends to TS_1 a <Start session confirm, session id=m, total nb=0, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =3> 6. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=m, reject reason= invalid start index > 7. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 8. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	Session identifier shall be different from "0" value

TC_FT_NG1.N.16_BV_1702	Missed calls list - List change notification - Read entries when new entries
Reference:	TS 102 527-3 [14], Clauses 7.4.1.3, 7.4.10.4.1 and 7.4.10.5.3
Initial condition:	Date and time of the system set, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Missed calls list empty (see TC_FT_NG1.N.16_BV_1701), F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call on line 0 towards IUT from Phone A (CLIP A / CNIP A) without answering 2. Perform an incoming call on line 0 towards IUT from Phone B (CLIP B / CNIP B) without answering 3. Perform an incoming call on line 0 towards IUT from Phone A (CLIP A / CNIP A) without answering 4. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 5. Send a <Start session, List identifier = 01H, nb of sorting fields =0> from TS_1 6. Send a <Read entries, session id=m, start index=1, direction=0, counter=3, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 7. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 and TS_2, a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Missed call, A new external missed voice call just arrived, 1> (=01H,81H,81H)> < List change indication, Missed calls list, 1> (=03H,81H,81H)> >> and IE<<CALL-INFORMATION>> specifying (line 0) =(0, 0, lid0)> 2. Verify that the IUT sends to TS_1 and TS_2, a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Missed call, A new external missed voice call just arrived, 2> (=01H,81H,82H)> < List change indication, Missed calls list, 2> (=03H,81H,82H)>> and IE<<CALL-INFORMATION>> specifying (line 0) =(0, 0, lid0)> 3. Verify that the IUT sends to TS_1 and TS_2, a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Missed call, A new external missed voice call just arrived, 3> (=01H,81H,83H)>< List change indication, Missed calls list, 2 or 3> (=03H,81H,82H or 83H)>> and IE<<CALL-INFORMATION>> specifying (line 0) =(0, 0, lid0)> 4. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 5. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=2 or 3, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =3> 6. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=m> followed by <data packet/data packet last> with <ul style="list-style-type: none"> • 1st entry : "Number" field set to CLIP A, "Name" field set to CNIP A, "Read status" field set to 'unread' (unread =1B), and 'Number of calls' field set to 1 or 2 • 2nd entry : "Number" field set to CLIP B, "Name" field set to CNIP B, "Read status" field set to 'unread' (unread =1B), and 'Number of calls' field set to 1 • "Date and Time" field value of 1st entry shall be more recent than "Date and Time" field value of 2nd entry 7. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 8. Verify that the IUT sends to TS_1 and TS_2, a {FACILITY} message with IE <<EVENTS NOTIFICATION= <Missed call, No new missed call arrived, 0> (=01H,82H,80H)> < List change indication, Missed calls list, 2 or 3> (=03H,81H,82H or 83H)> >> and IE<<CALL-INFORMATION>> specifying (line 0) =(0, 0, lid0)>
Comments:	<p>"Event multiplicity" field is tested and not full octet value (i.e. 03H instead of 83H)</p> <p>"Total number of available entries" field can be set to 2, or 3, as some FPs may either handle only one entry for the last missed call from a remote party, or one entry per incoming missed call.</p> <p>CLIP and CNIP in step 5 of pass criteria must be the same than ones previously received during step 3 of stimulus</p>

TC_FT_NG1.N.16_BV_1703	Missed calls list - Delete entry - Negative acknowledgement
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.3
Initial condition:	Run TC_FT_NG1.N.16_BV_1702 - Missed calls list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 2. Send a <Delete entry, session id=n+1, entry identifier = u> from TS_1 3. Send a <Delete entry, session id=n, entry identifier = u> from TS_1 4. Send a <Delete entry, session id=n, entry identifier = u+3> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n+1, reject reason= invalid session number > 3. Verify that the IUT sends to TS_1 <Delete entry confirm, session id=n, total nb of available entries = 1 or 2> 4. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n, reject reason= entry not available > 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	In step 4, 'u+3' identifier is invalid on IUT side

TC_FT_NG1.N.16_BV_1704	Missed calls list - Transfer number from missed calls list to contact list
Reference:	TS 102 527-3 [14], Clauses 7.4.10.5.3 and 7.4.10.5.7
Initial condition:	Run TC_FT_NG1.N.16_BV_1703 - Missed calls list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 2. Send a <Start session, List identifier = 05H, nb of sorting fields =0> from TS_1 3. Send to TS_1 a <Save entry, session id=m, entry identifier=00H> followed by <data packet/data packet last> set to (Name= CNIP B, First name="Forename B", Contact number = CLIP B) and (Associated melody= 0) when declared (see Annex A Table A.15) 4. Send a <Read entries, session id=m, start index=p, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 5. Send a <End session, session id=m> from TS_1 6. Send a <End session, session id=n> from TS_1 7. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u): "Number" field set to CLIP B, "Name" field set to CNIP B, "Unread" field set to 'unread' (unread=1B), and 'Number of calls' field set to 1 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=m, total nb=t, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=m, entry identifier= v, position index=p, total nb of available entries= t+1> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=m, start index=p, counter=1> followed by <data packet/data packet last> with entries created in step 1 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 6. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 7. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	<p>'v' entry identifier in pass criteria 3 shall be a new identifier different from 'u' entry identifier</p> <p>Total number of available entries in pass criteria 3 shall be Total number of available entries in pass criteria 2 + 1</p> <p>'position index=p' received from IUT in pass criteria 3 shall be used in stimulus 4 'Start index=p'</p>

TC_FT_NG1.N.16_BV_1705	Missed calls list - Initiate a voice call during a list access session
Reference:	TS 102 527-3 [14], Clauses 7.4.10.5.3 and 7.4.10.6.2
Initial condition:	Run TC_FT_NG1.N.16_BV_1704,
Stimulus:	<p>F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, List identifier = 01H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 4. Send a {CC-INFO} message from TS_1 with IE <<MULTI-KEYPAD>> set to 1CH, 15H digits together with Phone B number and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> 5. Send a <End session, session id=n> from TS_1 6. Call pick up on Phone B 7. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=2, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =3> 3. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u): "Number" field set to CLIP B, "Name" field set to CNIP B, "Unread" field set to 'read' (read=0B), and 'Number of calls' field set to 1 4. Verify that the IUT sends to TS_1 a {CC-CONNECT} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)> 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> Verify that Phone B rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call alerting) =<(1, 0, value a), (2, 1, 4)> 6. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B 7. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_1706	Missed calls list - List access during existing voice call with second call initiation - Switching between LA session and voice call - Returning to LA session after voice call termination
Reference:	TS 102 527-3 [14], Clauses 7.4.10.5.3, 7.4.10.6.4 and 7.4.10.6.5
Initial condition:	Run TC_FT_NG1.N.16_BV_1704, F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <normal call setup, Wideband speech default setup attributes> >>, IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> Call pick up on Phone A 2. Send a <Start session, List identifier = 01H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 4. Send a {CC-INFO} message from TS_1 with IE <<MULTI-KEYPAD>> set to 1CH, 15H digits together with Phone B number and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> 6. Call pick up on Phone B 7. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 33H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1 8. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 33H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 9. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 10. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 in a {CC-CONNECT} or a {CC-INFO} message an IE <<CALL-INFORMATION>> specifying at least (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=2, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =3> 3. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u): "Number" field set to CLIP B, "Name" field set to CNIP B, "Unread" field set to 'read' (read=0B), and 'Number of calls' field set to 1 Verify end-to-end U-plane connection between TS_1 and Phone A 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (line 0, line type information, call id b) =<(0, 0, lid0), (0, 5, lid0), (1, 0, value b)> 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> Verify that Phone B rings and that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call alerting) =<(1, 0, value b), (2, 1, 4)> 6. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B 7. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS idle) =<(1, 0, value a), (2, 1, 0)> 8. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS idle) =<(1, 0, value b), (2, 1, 0)> 9. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u): "Number" field set to CLIP B, "Name" field set to CNIP B, "Unread" field set to 'read' (read=0B), and 'Number of calls' field set to 1 10. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_1902	Incoming accepted calls list - Read entries when new entries
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.5
Initial condition:	Date and time of the system set, Incoming accepted calls list empty
Stimulus:	(see TC_FT_NG1.N.16_BV_1901), F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call on line 0 towards IUT from Phone B (CLIP B / CNIP B) without answering Perform an incoming call on line 0 towards IUT from Phone A (CLIP A / CNIP A) with answering Perform an incoming call on line 0 towards IUT from Phone B (CLIP B / CNIP B) with answering Perform an incoming call on line 0 towards IUT from Phone A (CLIP A / CNIP A) with answering Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, List identifier = 03H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=1, direction=0, counter=2, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H > from TS_1 4. Send a <End session, session id=n> from TS_1 5. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=2 or 3, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =3> 3. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with <ul style="list-style-type: none"> • 1st entry : "Number" field set to CLIP A, "Name" field set to CNIP A • 2nd entry : "Number" field set to CLIP B, "Name" field set to CNIP B • "Date and Time" field value of 1st entry shall be more recent than "Date and Time" field value of 2nd entry 4. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	"Total number of available entries" field can be set to 2, or 3, as some FPs may either handle only one entry for the last call from a remote party, or one entry per incoming call. CLIP and CNIP in step 3 of pass criteria must be the same than ones previously received during step 3 of stimulus

TC_FT_NG1.N.16_BV_1903	Incoming accepted calls list - Delete entry - Negative acknowledgement
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.5
Initial condition:	Run TC_FT_NG1.N.16_BV_1902 - Incoming accepted calls list open (session id=n)
Stimulus:	
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 2. Send a <Delete entry, session id=n+1, entry identifier = u> from TS_1 3. Send a <Delete entry, session id=n, entry identifier = u> from TS_1 4. Send a <Delete entry, session id=n, entry identifier = u+3> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n+1, reject reason= invalid session number > 3. Verify that the IUT sends to TS_1 <Delete entry confirm, session id=n, total nb of available entries = 1 or 2> 4. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n, reject reason= entry not available > 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	In step 4, 'u+3' identifier is invalid on IUT side

TC_FT_NG1.N.16_BV_2001	All calls list - Delete list - Read entries when empty
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.10.5.6 Service call in F-03</p> <ol style="list-style-type: none"> 1. Send a <Start session, List identifier = 04H, nb of sorting fields =0> from TS_1 2. Send a <Delete list, session id=n> from TS_1 3. Send a {CC-RELEASE} from TS_1 4. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 5. Send a <Start session, List identifier = 04H, nb of sorting fields =0> from TS_1 6. Send a <Read entries, session id=m, start index=0, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H > from TS_1 7. Send a <End session, session id=n> from TS_1 8. Send a {CC-RELEASE} from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=t, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =3> 2. Verify that the IUT sends to TS_1 a <Delete list confirm, session id=n> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 5. Verify that the IUT sends to TS_1 a <Start session confirm, session id=m, total nb=0, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =3> 6. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=m, reject reason= invalid start index > 7. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 8. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_2002	All calls list - Read entries when new entries
<p>Reference: Initial condition: Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.10.5.6 Date and time of the system set, All calls list empty (see TC_FT_NG1.N.16_BV_2001), F-00</p> <ol style="list-style-type: none"> 1. Perform an outgoing call on line 0 to Phone B (Number B=CLIP B) from TS_1 Perform an incoming call on line 0 towards IUT from Phone A (CLIP A / CNIP A) with answering on TS_1 Perform an outgoing call on line 0 to Phone A (Number A) from TS_2 Perform an incoming call on line 0 towards IUT from Phone B (CLIP B / CNIP B) without answering Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, List identifier = 04H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=1, direction=0, counter=4, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H> from TS_1 4. Send a <End session, session id=n> from TS_1 5. Send a {CC-RELEASE} from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb= 4, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =3> 3. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with <ul style="list-style-type: none"> • 1st entry : "Call type" field set to "Missed call", "Number" field set to CLIP B, "Name" field set to CNIP B • 2nd entry : "Call type" field set to "Outgoing call", "Number" field set to Number A • 3rd entry : "Call type" field set to "Accepted call", "Number" field set to CLIP A, "Name" field set to CNIP A • 4th entry : "Call type" field set to "Outgoing call", "Number" field set to Number B • "Date and Time" field value of lowest index entry shall be more recent than "Date and Time" field value of highest index entry 4. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message <p>CLIP and CNIP in step 3 of pass criteria must be the same than ones previously received during step 3 of stimulus. Same remark for Number composed.</p>

TC_FT_NG1.N.16_BV_2102	Contact list - Save entry - Read entries in ascending order
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact list empty (see TC_FT_NG1.N.16_BV_2101), Service call in F-03
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Start session, List identifier = 05H, nb of sorting fields =0> from TS_1 2. Send a <Save entry, session id=n, entry identifier = 00H > from TS_1 followed by <data packet/data packet last> set to (Name= Fenjiro, First name= Carlos, Contact number= 0490413002) and (Associated melody= 1) when declared (see Annex A Table A.15) 3. Send a <Save entry, session id=n, entry identifier = 00H > from TS_1 followed by <data packet/data packet last> set to (Name= Alexander, First name= Christina, Contact number 1= 00441324778812) and (Associated melody= 1) when declared (see Annex A Table A.15) 4. Send a <Save entry, session id=n, entry identifier = 00H > from TS_1 followed by <data packet/data packet last> set to (Name= Uwe,First name= Marcus, Contact number= 008989945270, Contact number2= 00491603794505) and (Associated melody= 2) when declared (see Annex A Table A.15) 5. Send a <Save entry, session id=n, entry identifier = 00H > from TS_1 followed by <data packet/data packet last> set to (Name= ALOUSSI, First name= Ramin, Contact number1= 0156891247, Contact number2= 0675000209) and (Associated melody= 1) when declared (see Annex A Table A.15) 6. Send a <Save entry, session id=n, entry identifier = 00H > from TS_1 followed by <data packet/data packet last> set to (Name= Alexander, First name= Christian, Contact number= 00441324778824) and (Associated melody= 1) when declared (see Annex A Table A.15) 7. Send a <Save entry, session id=n, entry identifier = 00H > from TS_1 followed by <data packet/data packet last> set to (Name= Lagadec, First name= Jérôme, Contact number= 02298951214) and (Associated melody= 3) when declared (see Annex A Table A.15) 8. Send a <Read entries, session id=n, start index=1, direction=0, counter=2, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 9. Send a <Read entries, session id=n, start index=3, direction=0, counter=2, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 10. Send a <Read entries, session id=n, start index=5, direction=0, counter=2, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 11. Send a <End session, session id=n> from TS_1 12. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=0, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 2. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier= u, position index=1, total nb of available entries= 1> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier= v, position index=1, total nb of available entries= 2> 4. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier= w, position index=3, total nb of available entries= 3> 5. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier= x, position index=2, total nb of available entries= 4> 6. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier= y, position index=1, total nb of available entries= 5> 7. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier= z, position index=5, total nb of available entries= 6> 8. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=2> followed by <data packet/data packet last> with entries created in steps 6 and 3 (Alexander Christian / Alexander Christina) 9. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=3, counter=2> followed by <data packet/data packet last> with entries created in steps 5 and 2 (ALOUSSI Ramin / Fenjiro Carlos) 10. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=5, counter=2> followed by <data packet/data packet last> with entries created in steps 7 and 4 (Lagadec Jérôme / Uwe Marcus) 11. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 12. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	UTF-8 characters encoding: <ul style="list-style-type: none"> • "é" : LATIN SMALL LETTER E WITH ACUTE 'c3a9'H • "ô" : LATIN SMALL LETTER O WITH CIRCUMFLEX 'c3b4'H

TC_FT_NG1.N.16_BV_2106	Contact list - Search entries using matching options
Reference:	TS 102 527-3 [14], Clauses 7.4.10.5.7 and 7.4.10.4.8
Initial condition:	Contact list filled for test (see TC_FT_NG1.N.16_BV_2102), Service call in F-03
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Start session, List identifier = 05H, nb of sorting fields =0> from TS_1 2. Send a <Search entries, session id=n, matching option=04H, searched value='FENRIJO', direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 3. Send a <Search entries, session id=n, matching option=00H, searched value='FENRIJO', direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 4. Send a <Search entries, session id=n, matching option=05H, searched value='AL', direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 5. Send a <Search entries, session id=n, matching option=01H, searched value='AL', direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 6. Send a <Search entries, session id=n, matching option=06H, searched value='AL', direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 7. Send a <Search entries, session id=n, matching option=02H, searched value='AL', direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 8. Send a <End session, session id=n> from TS_1 9. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=6, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =1> 2. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=0, direction=0, counter=0> > without <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=4, direction=0, counter=1> followed by <data packet/data packet last> with entry created in TC_FT_NG1.N.16_BV_2102 step 2 (Fenrijo Carlos) 4. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=3, direction=0, counter=1> followed by <data packet/data packet last> with entry created in TC_FT_NG1.N.16_BV_2102 step 5 (ALOUSSI Ramin) 5. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=2, direction=0, counter=1> followed by <data packet/data packet last> with entry created in TC_FT_NG1.N.16_BV_2102 step 6 (Alexander Christian) 6. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=2, direction=0, counter=1> followed by <data packet/data packet last> with entry created in TC_FT_NG1.N.16_BV_2102 step 3 (Alexander Christina) 7. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=0, direction=0, counter=0> without <data packet/data packet last> 8. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 9. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_2107	Contact list - Search entries in ascending order and descending order
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clauses 7.4.10.5.7 and 7.4.10.4.8 Contact list filled for test (see TC_FT_NG1.N.16_BV_2102), Service call in F-03 1. Send a <Start session, List identifier = 05H, nb of sorting fields =0> from TS_1 2. Send a <Search entries, session id=n, matching option=01H, searched value='L', direction=0, counter=02H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 3. Send a <Search entries, session id=n, matching option=05H, searched value='L', direction=1, counter=02H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 4. Send a <End session, session id=n> from TS_1 5. Send a {CC-RELEASE} from TS_1 1. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=6, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 2. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=5, direction=0, counter=2> followed by <data packet/data packet last> with entries created in TC_FT_NG1.N.16_BV_2102 steps 7 and 4 (Lagadec Jérôme / Uwe Marcus) 3. Verify that the IUT sends to TS_1 a < Search entries confirm, session id=n, start index=4, direction=0, counter=2> followed by <data packet/data packet last> with entries created in TC_FT_NG1.N.16_BV_2102 steps 2 and 7 (Fenjiro Carlos / Lagadec Jérôme), entry with index 4 transmitted first in the data packets 4. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_2108	Contact list - Initiate a voice call during a list access session
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clauses 7.4.10.5.7 and 7.4.10.5.4 Contact list filled for test (see TC_FT_NG1.N.16_BV_2102), F-00 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes>>> 2. Send a <Start session, List identifier = 05H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=6, direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 4. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH, 15H digits together with "008989945270" digits and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} from TS_1 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=6, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 3. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=6, counter=1> followed by <data packet/data packet last> set to (Name= Uwe, First name= Marcus, Contact number1= 008989945270) and (Associated melody= 2) when declared (see Annex A Table A.15) 4. Verify that the IUT sends to TS_1 a {CC-CONNECT} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)> 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_2109	Contact list - Entry used to update Outgoing call list
Reference:	TS 102 527-3 [14], Clauses 7.4.10.5.7 and 7.4.10.5.4
Initial condition:	Run TC_FT_NG1.N.16_BV_2108, F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with "12345678901234567890" digits and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> from TS_1 3. Send a {CC-RELEASE} from TS_1 4. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 5. Send a <Start session, List identifier = 02H, nb of sorting fields =0> from TS_1 6. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 7. Send a <End session, session id=n> from TS_1 8. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a {CC-CONNECT} message, followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying at least (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a)> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 5. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=x, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =3> 6. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n> followed by <data packet/data packet last> with <ul style="list-style-type: none"> • 1st entry : "Number" field set to "12345678901234567890" and empty "Name" field • 2nd entry : "Number" field set to "008989945270" and "Name" field set to "Uwe" • "Date and Time" field value of 1st entry shall be more recent than "Date and Time" field value of 2nd entry 7. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 8. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_2110	Contact list - Delete entry - Negative acknowledgement
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.7
Initial condition:	Contact list filled for test (see TC_FT_NG1.N.16_BV_2102), contact list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 2. Send a <Delete entry, session id=n+1, entry identifier = u> from TS_1 3. Send a <Delete entry, session id=n, entry identifier = u> from TS_1 4. Send a <Delete entry, session id=n, entry identifier = u+3> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n+1, reject reason= invalid session number > 3. Verify that the IUT sends to TS_1 <Delete entry confirm, session id=n, total nb of available entries = 5> 4. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n, reject reason= entry not available > 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	In step 4, 'u+3' identifier is invalid on IUT side

TC_FT_NG1.N.16_BV_2111	Contact list - Incoming first voice call during existing list access session
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.10.6.3</p> <p>Contact list filled for test (see TC_FT_NG1.N.16_BV_2102), F-00</p> <ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, List identifier = 05H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=6, direction=0, counter=01H, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H> from TS_1 4. Perform an incoming call on line 0 towards IUT from Phone A 5. Send a {CC-INFO} message from TS_1 with IE << MULTI-KEYPAD >> set to (1CH, 35H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> 6. Send a <End session, session id=n> from TS_1 7. Send a {CC-RELEASE} from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=6, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =1> 3. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=6, counter=1> followed by <data packet/data packet last> set to (Name= Uwe, First name= Marcus, Contact number1= 008989945270) and (Associated melody= 2) when declared (see Annex A Table A.15) 4. Verify that the IUT sends to TS_1 a {CC-CONNECT} message, followed by (in the same or different {CC-INFO} messages): <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on' when declared (see Annex A Table A.26) • an IE <<CALLING PARTY NUMBER>> with <calling party address= Phone A number> • an IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages 5. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A 6. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 7. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_2201	Internal names list - Edit entry - Save entry
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clauses 7.4.10.5.8 and 7.4.10.5.1.2</p> <p>One PP registered (TS_1 is NG PP1), service call in F-03</p> <ol style="list-style-type: none"> 1. Send a <Start session, List identifier = 06H, nb of sorting fields =0> from TS_1 2. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H> from TS_1 3. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1..n =01H, 02H, 03H > from TS_1 4. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> modifying "Name" field to "TESTER 1" and close the list session <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=1, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =1> 2. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u) 3. Verify that the IUT sends to TS_1 a < Edit entry confirm, session id=n> followed by <data packet/data packet last> with entry identifier = u, a "Number" field set to (internal=1B, own=1B, digit=terminal Id of PP1), a "Name" field and a "Call interception" field 4. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=1> <p>Session identifier shall be different from "0" value.</p>

TC_FT_NG1.N.16_BV_2202	Internal names list - New registration - List change notification - Read entries
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clauses 7.4.10.5.8 and 7.4.10.5.1.2</p> <p>One PP registered (TS_1 is NG PP1), PP1 name configured as "TESTER 1" (see TC_FT_NG1.N.16_BV_2201), F-00</p> <p>1. Start the access rights procedure on the IUT Register TS_2 as a new PP (PP2)</p> <p>2. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >></p> <p>3. Send a <Start session, list identifier = 06H, nb of sorting fields =0> from TS_1</p> <p>4. Send a <Read entries, session id=m, start index=0, direction=0, counter=2, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H> from TS_1</p> <p>1. Verify that the IUT accepts registration and that the IUT sends to TS_1, a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Internal names list, 2 entries > (= <03H,86H,82H>) >></p> <p>2. Verify that the IUT sends to TS_1 a {CC-CALL-PROC}</p> <p>3. Verify that the IUT sends to TS_1 a <Start session confirm> with "Total number of available entries" field set to 2</p> <p>4. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=m> followed by <data packet/data packet last> with</p> <ul style="list-style-type: none"> • 1st entry : "Number" field set to (internal=1B, own=1B, digit=terminal Id of PP1), a "Name" field set to "TESTER 1" and a "Call interception" field • 2nd entry : "Number" field set to (internal=1B, own=0B, digit=terminal id of PP2), a "Name" field set to a non null default string value, and a "Call interception" field set to 31H indicating 'allowed' value. <p>Session identifier shall be different from "0" value</p> <p>Digit format is not tested here as it was already tested in Terminal Id number assignment procedure.</p>

TC_FT_NG1.N.16_BV_2203	Internal names list - Initiate and check internal call from internal names list
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.10.1</p> <p>2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Internal names list session open (session id=n)</p> <p>1. Send a <Read entries, session id=n, start index=0, direction=0, counter=2, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H> from TS_1</p> <p>2. Perform an internal call from TS_1 towards TS_2 by sending a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H,terminal Id of PP2) digits</p> <p>3. Call pick up on TS_2 by sending a {CC-CONNECT} message from TS_2</p> <p>1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 2 entries</p> <p>2. Verify that the IUT performs an internal call setup towards TS_2 with <Call class = internal call></p> <p>3. Verify that IUT sends to TS_1 a {CC-CONNECT} message and verify end-to-end U-plane connection between TS_1 and TS_2 (WB call)</p>

TC_FT_NG1.N.16_BV_2210	Internal names list - Delete entry
Reference:	TS 102 527-3 [14], Clause 7.4.11.2
Initial condition:	EN 300 444 [12], Clause 8.31
Stimulus:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), internal names list open (session id=n)
	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=2, mark entries request= 00H, list entry field identifier 1..n =01H, 02H, 03H> from TS_1 2. Delete the PP2 entry in the "Internal names" list by sending a < Delete entry, session id=n, entry identifier=v> from TS_1 3. Close the list access session and re-start a new internal names list session from TS_1
	Wait for receiving a {ACCESS-RIGHTS-TERMINATE-REQUEST} message, before sending a {ACCESS-RIGHTS-TERMINATE-ACCEPT} message from TS_2
	<ol style="list-style-type: none"> 4. Send a <Read entries, session id=m, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=01H> from TS_1 5. Send a <End session, session id=m> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with PP1 entry content (entry identifier = u) and PP2 entry content (Entry identifier = v) 2. Verify that the IUT sends to TS_1 <Delete entry confirm, session id=n, total nb of available entries = 1> 3. Verify that the IUT sends to TS_1 a <Start session confirm> with "Total number of available entries" field set to 1
	Verify that the IUT sends to TS_2 an {ACCESS-RIGHTS-TERMINATE-REQUEST}
	<ol style="list-style-type: none"> 4. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=m> followed by <data packet/data packet last> with one entry whose "Number" field is set to (internal=1B, own=1B, digit=terminal Id of PP1) 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=m>
Comments:	{ACCESS-RIGHTS-TERMINATE-REQUEST} message can be sent just after <Delete entry confirm> or later after <End session>

TC_FT_NG1.N.16_BV_2301	All incoming calls list - Delete list - Read entries when empty
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.11
Initial condition:	Service call in F-03
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Start session, List identifier = 09H, nb of sorting fields =0> from TS_1 2. Send a <Delete list, session id=n> from TS_1 3. Send a {CC-RELEASE} from TS_1 4. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 5. Send a <Start session, List identifier = 09H, nb of sorting fields =0> from TS_1 6. Send a <Read entries, session id=m, start index=0, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H > from TS_1 7. Send a <End session, session id=n> from TS_1 8. Send a {CC-RELEASE} from TS_1
	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=t, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =3> 2. Verify that the IUT sends to TS_1 a <Delete list confirm, session id=n> 3. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 4. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 5. Verify that the IUT sends to TS_1 a <Start session confirm, session id=m, total nb=0, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =3> 6. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=m, reject reason= invalid start index > 7. Verify that the IUT sends to TS_1 a <End session confirm, session id=m> 8. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Pass criteria:	
	Session identifier shall be different from "0" value
Comments:	

TC_FT_NG1.N.16_BV_2302	All incoming calls list - Read entries when new entries
Reference:	TS 102 527-3 [14] Clauses 7.4.10.4.1 and 7.4.10.5.11
Initial condition:	Date and time of the system set, All incoming calls list empty (see TC_FT_NG1.N.16_BV_2301), F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call on line 0 towards IUT from Phone A (CLIP A / CNIP A) without answering Perform an incoming call on line 0 towards IUT from Phone B (CLIP B / CNIP B) with answering Perform an incoming call on line 0 towards IUT from Phone A (CLIP A / CNIP A) with answering Perform an incoming call on line 0 towards IUT from Phone B (CLIP B / CNIP B) without answering Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, List identifier = 09H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=m, start index=1, direction=0, counter=2, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 4. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=2 or 4, discriminator type=0 or 1, nb of sorting fields =1, sorting field id1 =3> 3. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=m> followed by <data packet/data packet last> with <ul style="list-style-type: none"> • 1st entry : "Number" field set to CLIP B, "Name" field set to CNIP B, "Unread" field set to 'unread' (unread=1B), and 'Number of calls' field set to 1 • 2nd entry : "Number" field set to CLIP A, "Name" field set to CNIP A, "Unread" field set to 'read' (unread=0B), and 'Number of calls' field set to 1 • "Date and Time" field value of 1st entry shall be more recent than "Date and Time" field value of 2nd entry 4. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	"Total number of available entries" field can be set to 2, or 4, as some FPs may either handle only one entry for the last call from a remote party, or one entry per incoming call. CLIP and CNIP in step 3 of pass criteria must be the same than ones previously received during step 3 of stimulus

TC_FT_NG1.N.16_BV_2303	All incoming calls list - Delete entry - Negative acknowledgement
Reference:	TS 102 527-3 [14], Clause 7.4.10.5.11
Initial condition:	Run TC_FT_NG1.N.16_BV_2302 - All incoming calls list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 7FH, list entry field identifier 1..n =01H, 02H, 03H, 04H, 05H, 06H, 07H> from TS_1 2. Send a <Delete entry, session id=n+1, entry identifier = u> from TS_1 3. Send a <Delete entry, session id=n, entry identifier = u> from TS_1 4. Send a <Delete entry, session id=n, entry identifier = u+3> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with 1st entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n+1, reject reason= invalid session number > 3. Verify that the IUT sends to TS_1 <Delete entry confirm, session id=n, total nb of available entries = 1 or 3> 4. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n, reject reason= entry not available > 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	In step 4, 'u+3' identifier is invalid on IUT side

TC_FT_NG1.N.16_BV_2401	DECT system settings list - Query supported entry fields
Reference:	TS 102 527-3 [14], Clauses 7.4.10.4.2 and 7.4.11.3
Initial condition:	DECT system settings list open (session id=n)
Stimulus:	Send a <Query supported entry fields> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Query supported entry fields confirm, session id=n> 2. Verify that editable entry field includes at the minimum <ul style="list-style-type: none"> • 01H Current PIN code • 02H Clock master • 03H Base reset • 0DH New PIN code 3. Verify that non editable entry fields includes at the minimum <ul style="list-style-type: none"> • 09H FP version / Firmware version • 0AH FP version / EEprom version 4. Verify that entry fields include optional entry fields declared in editable and non-editable fields (see Annex A, Table A.25)

TC_FT_NG1.N.16_BV_2402	DECT system settings list - Read entries
Reference:	TS 102 527-3 [14], Clauses 7.4.10.4.3 and 7.4.11.3
Initial condition:	DECT system settings list open (see TC_FT_NG1.N.16_BV_2401)
Stimulus:	Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list of supported entry field identifiers known from query > from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify on TS_1 that the DECT link is ciphered 2. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> 3. Verify that mandatory entry fields (Current PIN code, Clock master, Base reset, FP version / Firmware version, FP version / EEprom version, New PIN code) and optional entry fields declared in Annex A, Table A.25 are included in data packet 4. Verify that each field complies with its description in the standard (field identifier, length, property, coded value): <p>Mandatory fields:</p> <ul style="list-style-type: none"> • Current PIN code composed of 4 digits set to (FFH, FFH, FFH, FFH) • Clock master = 31 or 30H • Base reset = 31H (Yes) if all other settings are set to their default value, 30H (No) otherwise • FP version / Firmware version: limited to 20 IA-5 bytes • FP version / Eeprom version : limited to 20 IA-5 bytes • New PIN code composed of 4 digits set to (FFH, FFH, FFH, FFH) with property bit 'PIN protected' set to 1 <p>Optional fields (if declared):</p> <ul style="list-style-type: none"> • FP IP address / type : only one property bit 'DHCP' or 'static' must be set at a time • For the 3 following settings check that if IPv4/6 bit is set to 0, the format is IPv4 (4 bytes long), if set to 1, the format is IPv6 (16 bytes long) <ul style="list-style-type: none"> ○ FP IP address / value ○ FP IP address / subnet mask ○ FP IP address / gateway ○ FP IP address / DNS server • FP version / Hardware version : limited to 20 IA-5 bytes • Emission mode: at least 2 bytes

TC_FT_NG1.N.16_BV_2501	Line settings list - Query supported entry fields
Reference:	TS 102 527-3 [14], Clauses 7.4.10.4.2 and 7.4.11.4
Initial condition:	Line settings list open (session id=n)
Stimulus:	Send a <Query supported entry fields> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Query supported entry fields confirm, session id=n> 2. Verify that editable entry fields include at the minimum <ul style="list-style-type: none"> o 01H Line name o 02H Line id o 03H Attached handsets o 08H Multiple calls mode o 0BH Call Forwarding Unconditional o 0CH Call Forwarding on No answer o 0DH Call Forwarding on Busy subscriber 3. Verify that entry fields include optional entry fields declared in editable and non-editable fields (see Annex A, Table A.25)

TC_FT_NG1.N.16_BV_2502	Line settings list - Read entries
Reference:	TS 102 527-3 [14], Clauses 7.4.10.4.3 and 7.4.11.4
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list of supported entry field identifiers known from query > from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> 2. Verify that mandatory entry fields (Line name, Line id, Attached handsets) and optional entry fields declared (see Annex A Table A.25) are included in data packet 3. Verify that each field complies with its description in the standard (field identifier, length, property, coded value): Mandatory fields: <ul style="list-style-type: none"> • Line name = list of UTF-8 characters • Line id = Identifier subtype set Relating to (03H) followed by value • Attached handsets = number set to 2 and handset bitmap set to PP1 and PP2 • Multiple calls mode = 30H or 31H • Call Forwarding Unconditional = Value set to 30H or 31H, CFU activation and deactivation code, and call forwarding number set to a list of digits among 05H, 15H, 23H, 2AH or 30H..39H • Call Forwarding on No answer = Value set to 30H or 31H, nb of seconds among 00H..40H, CFNA activation and deactivation code, and call forwarding number set to a list of digits among 05H, 15H, 23H, 2AH or 30H..39H • Call Forwarding on Busy subscriber = Value set to 30H or 31H, CFB activation and deactivation code, and call forwarding number set to a list of digits among 05H, 15H, 23H, 2AH or 30H..39H Optional fields (if declared): <ul style="list-style-type: none"> • Dialling prefix = list of digits, among 05H, 15H, 23H, 2AH or 30H...39H • FP melody = one octet value from 0 to 255 • FP volume = one octet value among 30H...39H • Blocked number = list of digits among 30H..39H, and 2AH • Intrusion call mode = 30H or 31H • Permanent CLIR = Value set to 30H or 31H, CLIR activation and deactivation code set to a list of digits among 05H, 15H, 23H, 2AH or 30H..39H

TC_FT_NG1.N.16_BV_2701	DECT system settings list - Current PIN code - New PIN code - Edit entry - Save entry
Reference:	TS 102 527-3 [14], Clauses 7.4.10.4.9, 7.4.11.1, 7.4.11.3.1 and 7.4.11.3.13
Initial condition:	Current PIN code field set to (FFH, FFH, 00H, 00H)
Stimulus:	<p>DECT system settings list open (session id=n)</p> <ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =0DH> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=0DH> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, 12H, 34H) 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =01H> from TS_1 5. Send a <Edit entry, session id=n, entry identifier=v, list entry field identifier 1=01H> from TS_1 6. Send a <Save entry, session id=n, entry identifier=v> from TS_1 followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, 12H, 34H) 7. Send a <Save entry, session id=n, entry identifier=v> from TS_1 followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, 00H, 00H) 8. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =0DH> from TS_1 9. Send a <Edit entry, session id=n, entry identifier=w, list entry field identifier 1=0DH> from TS_1 10. Send a <Save entry, session id=n, entry identifier=w> from TS_1 followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, 12H, 34H)
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the DECT link is ciphered and that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) (entry identifier = u) 2. Verify the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) 3. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n, reject reason= PIN code required> 4. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) (entry identifier = v) 5. Verify the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) 6. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=n, reject reason= incorrect PIN> 7. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=v, position index=1, total number of available entries=1> 8. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) (entry identifier = w) 9. Verify the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with PIN code field set to (FFH, FFH, FFH, FFH) 10. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=w, position index=1, total number of available entries=1>

TC_FT_NG1.N.16_BV_2801	DECT system settings list - Clock master- Edit entry - Save entry - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.3.2
Initial condition:	DECT system settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =02H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=02H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with clock master field modified (i.e. modify to 30H if 31H or 31H if 30H) 4. Send a <Read entries, session id=n, start index=0, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=02H> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 IUT a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=1> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with clock master field set to previously modified value

TC_FT_NG1.N.16_BV_2901	DECT system settings list - Base reset - Edit entry - Save entry - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.3.3
Initial condition:	DECT system settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =03H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=03H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with base reset field set to 31H 4. Send a <End session, session id=n> from TS_1 5. If {CC-RELEASE} message was received in step 4 then send a {CC-RELEASE-COM} message from TS_1 else send a {CC-RELEASE} message
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with Base reset field set to 30H. 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=1> 4. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> or a {CC-RELEASE} message 5. If a {CC-RELEASE} message was sent in step 5 then verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message
Comments:	<p>This test must be run after any DECT system or line settings test modifying a default value to get the Base reset field set to 30H in step1.</p> <p>As all DECT system and line settings should be reset to their default value, it is recommended to run it at the end of the test suite.</p> <p>IUT can reboot after step 4</p>

TC_FT_NG1.N.16_BV_2902	DECT system settings list - Base reset - Read entries - Default settings values
Reference:	TS 102 527-3 [14] Clause 7.4.11.3.3
Initial condition:	Run TC_FT_NG1.N.16_BV_2901 (if IUT rebooted wait till re-locking), F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE = <LiA service call setup, Wideband speech default setup attributes> >> 2. Send a <Start session, list identifier = 07H, nb of sorting fields =0> from TS_1 3. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list of supported entry field identifiers known from query > from TS_1 4. Send a <End session, session id=n> from TS_1 5. Send a <Start session, list identifier = 08H, nb of sorting fields =0> from TS_1 6. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list of supported entry field identifiers known from query > from TS_1

TC_FT_NG1.N.16_BV_2902	DECT system settings list - Base reset - Read entries - Default settings values
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message 2. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=1, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 3. Verify on TS_1 that the DECT link is ciphered if PIN code setting is supported by the FP (see Annex A Table A.25) Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) Verify that mandatory entry fields (Clock master, Base reset, FP version / Firmware version) and optional entry fields declared in Annex A Table A.25 are included in data packet Verify that each field complies with its description in the standard (field identifier, length, property, coded value): Mandatory fields: <ul style="list-style-type: none"> • Clock master = 31 or 30H • Base reset = 31H (Yes) • FP version / Firmware version : limited to 20 IA-5 bytes • Optional fields (if declared): • PIN code: not empty composed of 4 digits, each digit from 0 to 255 • FP IP address / type : only one property bit 'DHCP' or 'static' must be set at a time • For the 3 following settings check that if IPv4/6 bit is set to 0, the format is IPv4 (4 bytes long), if set to 1, the format is IPv6 (16 bytes long) <ul style="list-style-type: none"> - FP IP address / value - FP IP address / subnet mask - FP IP address / gateway - FP IP address / DNS server • FP version / Eeprom version : limited to 20 IA-5 bytes • FP version / Hardware version : limited to 20 IA-5 bytes 4. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 5. Verify that the IUT sends to TS_1 a <Start session confirm, session id=n, total nb=1, discriminator type=0 or 1, nb of sorting fields =1,sorting field id1 =1> 6. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> Verify that mandatory entry fields (Line name, Line id, Attached handsets) and optional entry fields declared (see Annex A Table A.25) are included in data packet Verify that each field complies with its description in the standard (field identifier, length, property, coded value): <ul style="list-style-type: none"> • Mandatory fields: <ul style="list-style-type: none"> • Line name = empty (length =1) or list of UTF-8 characters • Line id = Identifier subtype set Relating to (03H) followed by value • Attached handsets = number and handset bitmap • Optional fields (if declared): <ul style="list-style-type: none"> • Dialling prefix = empty (length =1), or list of digits among 05H, 15H, 23H, 2AH or 30H...39H • FP melody = one octet value from 0 to 255 • FP volume = one octet value among 30H...39H • Blocked number = empty (length =1), or list of digits among 30H..39H, and 2AH • Multiple calls mode = 30H or 31H • Intrusion call mode = 30H or 31H • Permanent CLIR = Value set to 30H, CLIR activation and deactivation codes empty (length =1), or set to a list of digits among 05H, 15H, 23H, 2AH or 30H..39H • Call Forwarding unconditional = empty (length =1) • Call Forwarding on No answer = empty (length =1) • Call Forwarding on no answer = empty (length =1)

TC_FT_NG1.N.16_BV_3801	Line settings list - Line name- Edit entry - Save entry - List change notification - Read entries
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p> <p>Comments:</p>	<p>TS 102 527-3 [14], Clause 7.4.11.4.1 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)</p> <p>1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =01H> from TS_1</p> <p>2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=01H> from TS_1</p> <p>3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Line name field set to "My First Line"</p> <p>4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=01H> from TS_1</p> <p>5. Send a <End session, session id=n> from TS_1</p> <p>6. Send a {CC-RELEASE} message from TS_1</p> <p>1. Close the Line settings list</p> <p>1. Verify that the IUT sends to TS_1 IUT a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u)</p> <p>2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u)</p> <p>3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=1></p> <p>4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Line name field set to previously modified value</p> <p>5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n></p> <p>6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message</p> <p>7. Verify that the IUT sends to TS_1 and TS_2 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (= <03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)></p> <p>{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session></p>

TC_FT_NG1.N.16_BV_3901	Line settings list - Line id - Edit entry - Save entry - Read entries
<p>Reference:</p> <p>Initial condition:</p> <p>Stimulus:</p> <p>Pass criteria:</p>	<p>TS 102 527-3 [14], Clause 7.4.11.4.2 EN 300 175-5 [5], Clause 7.7.56 Line settings list open (session id=n)</p> <p>1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =02H> from TS_1</p> <p>2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=02H> from TS_1</p> <p>3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Line id field set to ("Relating-to", 01H)</p> <p>4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=02H> from TS_1</p> <p>1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u)</p> <p>2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with 'editable' property bit of Line id field set to 0B</p> <p>3. Verify that the IUT sends to TS_1 a <Negative acknowledgement, session id=m, reject reason= procedure not allowed></p> <p>4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Line id field set to previously modified value</p>

TC_FT_NG1.N.16_BV_4001	Line settings list - Attached handsets - Edit entry - Save entry - List change notification - Read entries after registration
Reference:	TS 102 527-3 [14], Clauses 7.4.11.2 and 7.4.11.4.3
Initial condition:	Only one first PP registered (TS_1 is NG PP1) attached to each line, Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=03H> from TS_1 and close the list session 2. Start the access rights procedure on IUT Register TS_2 as a new PP 3. Open Line settings list and send a <Read entries, session id=m, start index=1, direction=0, counter= t (total number of lines), mark entries request= 00H, list entry field identifier 1=03H> from TS_1 4. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=03H> from TS_1 5. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with "Number" field set to (Number of registered handsets attached to the line=01H, Handset bitmap=01H) 6. Send a <End session, session id=n> from TS_1 7. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with "Attached handsets" field set to (Number of registered handsets attached to the line=01H, Handset bitmap=01H) 2. Verify that the IUT accepts registration 3. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=m, start index=1, counter=t > followed by <data packet/data packet last> If t (total number of lines =1) then verify that at the first entry includes an "Attached handsets" field set to (Number of registered handsets attached to the line=02H, Handset bitmap=03H) Else verify that at least one of the entries includes an "Attached handsets" field set to (Number of registered handsets attached to the line=02H, Handset bitmap=03H) when declared (see Annex A, see Table A.15) 4. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with set to (Number of registered handsets attached to the line=02H, Handset bitmap=03H) 5. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=p, total number of available entries=t> 6. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 7. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 8. Verify that the IUT sends to TS_1 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (=03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line u) =<(0, 3, value u)>
Comments:	<p>'u ' entry identifier is the identifier of the first line found with the new registered PP attached to.</p> <p>{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session></p>

TC_FT_NG1.N.16_BV_4101	Line settings list - Dialling Prefix - Edit entry - Save entry - List change notification - Read entries - Outgoing call
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.4
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =04H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=04H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with "Number" field set to (Digit=30H, 39H) 4. Send a <Read entries, session id=n, start index=0, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=04H> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1 7. Perform an outgoing call to "0123456789" from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> with "Number" field length = 01H 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Dialling Prefix field set to previously modified value 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message Verify at network interface that the IUT added the dialling prefix to the called party number by dialling "090123456789"

TC_FT_NG1.N.16_BV_4201	Line settings list - FP melody - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.5
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =05H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=05H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with FP melody field set to 55H 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=05H> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with FP melody field set to 55H 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_4301	Line settings list - FP volume - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.6
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =06H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=06H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with FP volume field set to 30H 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=06H> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=1> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with FP volume field set to 30H 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.16_BV_4401	Line settings list - Blocked number - Edit entry - Save entry - List change notification - Read entries- Outgoing call blocked
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.7
Initial condition:	Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =07H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=07H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with "Number" field set to (Digit=30H, 30H, 2AH) 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=07H> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1 7. Perform an outgoing call to "000123456789" from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Blocked number field set to previously modified value 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 7. Verify that the IUT blocks the call and sends back to TS_1 a {CC-RELEASE} message
Comments:	This field may be contained several times in line settings entry

TC_FT_NG1.N.16_BV_4501	Line settings list - Multiple calls mode - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.8
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Multiple calls IUT, Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =08H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=08H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Multiple calls mode field modified (i.e. modify to 30H if 31H or 31H if 30H) 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=08H> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Multiple calls mode field set to previously modified value 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 7. Verify that the IUT sends to TS_1 and TS_2 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (= <03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Comments:	{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session>

TC_FT_NG1.N.16_BV_4601	Line settings list - Intrusion call - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.9
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =09H> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=09H> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Intrusion call field modified (i.e. modify to 30H if 31H or 31H if 30H) 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=09H> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Intrusion call mode field set to previously modified value 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 7. Verify that the IUT sends to TS_1 and TS_2 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (= <03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line 0) =<(0, 3, 0)>
Comments:	{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session>

TC_FT_NG1.N.16_BV_4701	Line settings list - Permanent CLIR - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.10
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =0AH> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=0AH> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Permanent CLIR field set to: "Value" sub field set to 31H "CLIR activation code" sub field set to (05H, 2AH, 05H, 30H, 39H, 2AH) "CLIR deactivation code" sub field set to (05H, 23H, 05H, 31H, 38H, 23H) 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=0AH> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Permanent CLIR field set to previously modified value 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 7. Verify that the IUT sends to TS_1 and TS_2 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (= <03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Comments:	{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session>

TC_FT_NG1.N.16_BV_4801	Line settings list - Call Forwarding unconditional - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.11
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =0BH> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=1, list entry field identifier 1=0BH> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Call Forwarding unconditional field set to: "Value" sub field set to 31H "CFU activation code" sub field set to (04H, 2AH, 05H, 30H, 39H) "CFU deactivation code" sub field set to (04H, 23H, 05H, 31H, 38H) "Call forwarding number" sub field set to "0612345789" 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=0BH> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 7. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Call Forwarding unconditional field set to previously modified value 4. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 6. Verify that the IUT sends to TS_1 and TS_2 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (= <03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Comments:	{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session>

TC_FT_NG1.N.16_BV_4901	Line settings list - Call Forwarding on no answer - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.12
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =0CH> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=0CH> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Call Forwarding on no answer field set to: "Value" sub field set to 31H "Nb of seconds before call is forwarded" sub field set to 40H "CFNA activation code" sub field set to (03H, 23H, 38H, 38H) "CFNA deactivation code" sub field set to (03H, 2AH, 39H, 39H) "Call forwarding number" sub field set to "0912345678" 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=0CH> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Call Forwarding on no answer field set to previously modified value 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 7. Verify that the IUT sends to TS_1 and TS_2 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (= <03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Comments:	{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session>

TC_FT_NG1.N.16_BV_5001	Line settings list - Call Forwarding on busy subscriber - Edit entry - Save entry - List change notification - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.4.13
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), Line settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =0DH> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=0DH> from TS_1 3. Send a <Save entry, session id=n, entry identifier=1> from TS_1 followed by <data packet/data packet last> with Call Forwarding on busy subscriber field set to: "Value" sub field set to 31H "CFB activation code" sub field set to (05H, 23H, 05H, 38H, 31H, 23H) "CFB deactivation code" sub field set to (05H, 2AH, 05H, 39H, 30H, 2AH) "Call forwarding number" sub field set to "0897654321" 4. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=0DH> from TS_1 5. Send a <End session, session id=n> from TS_1 6. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=t> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Call Forwarding on busy subscriber field set to previously modified value 5. Verify that the IUT sends to TS_1 a <End session confirm, session id=n> 6. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 7. Verify that the IUT sends to TS_1 and TS_2 a {FACILITY} message with IE <<EVENTS NOTIFICATION= < List change indication, Line settings list, 1 entry > (= <03H,88H,81H>) >> and IE<<CALL-INFORMATION>> specifying (Relating to line 0) = <(0, 3, 0)>
Comments:	{ FACILITY} message can be sent just after <Save entry confirm> or later after <End session>

TC_FT_NG1.N.16_BV_5101	DECT system settings list - Emission mode - Edit entry - Save entry - Read entries
Reference:	TS 102 527-3 [14], Clause 7.4.11.3.12
Initial condition:	DECT system settings list open (session id=n)
Stimulus:	<ol style="list-style-type: none"> 1. Send a <Read entries, session id=n, start index=1, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1 =0CH> from TS_1 2. Send a <Edit entry, session id=n, entry identifier=u, list entry field identifier 1=0CH> from TS_1 3. Send a <Save entry, session id=n, entry identifier=u> from TS_1 followed by <data packet/data packet last> with Emission mode modified (i.e. modify to 'NEM' bit to 0B if 1B or to 1B if 0B) 4. Send a <Read entries, session id=n, start index=0, direction=0, counter=1, mark entries request= 00H, list entry field identifier 1=0CH> from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 IUT a < Read entries confirm, session id=n> followed by <data packet/data packet last> with entry content (entry identifier = u) 2. Verify that the IUT sends to TS_1 a <Edit entry confirm, session id=n> followed by <data packet/data packet last> 3. Verify that the IUT sends to TS_1 a <Save entry confirm, session id=n, entry identifier=u, position index=1, total number of available entries=1> 4. Verify that the IUT sends to TS_1 a <Read entries confirm, session id=n, start index=1, counter=1> followed by <data packet/data packet last> with Emission mode set to previously modified value

7.17 TC_FT_NG1.N.17 Calling line identity restriction tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Calling line identity restriction with the following considerations:

- As NG1.N.17_2 "Permanent CLIR" procedure is also tested when testing NG1.N.16_25 "Line settings list" procedure for the corresponding setting.
- As NG1.N.17_3 "Temporary CLIR mode (call by call)" procedure includes only PP requirements, there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.N.17 "Calling line identity restriction" feature is optional on FP side, so the manufacturer shall declare if it is supported.

TC_FT_NG1.N.17_BV_201	Permanent CLIR mode (all calls)
Reference:	TS 102 527-3 [14], Clause 7.4.12.2
Initial condition:	"Permanent CLIR" field on line 0 set to the following values "Value" sub field set to 31H (activated) "CLIR activation code" sub field set to CLIR activation code if any else to zero length "CLIR deactivation code" sub field set to CLIR deactivation code if any else to zero length
Stimulus:	F-00 1. Perform an outgoing call from TS_1 to Phone A 2. Modify "Value" sub field of "Permanent CLIR" field in line 0 settings list to 30H (deactivated) from TS_1 Perform an outgoing call from TS_1 to Phone A
Pass criteria:	1. Verify that Phone A presents when ringing the IUT identification, either IUT phone number or IUT name 2. Verify that Phone A does not present when ringing the IUT identification, neither IUT phone number nor IUT name (i.e. presentation restricted)

7.18 TC_FT_NG1.N.18 Call forwarding (external calls) tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Call forwarding (external calls) with the following considerations:

- As NG1.N.18_1 "Call forwarding common requirements" procedure is tested when testing NG1.N.16_25 "Line settings list" procedure for the corresponding settings, there is no test case defined for this procedure.

TC_FT_NG1.N.18_BV_201	External Call Forwarding Unconditional (CFU) to external number
Reference:	TS 102 527-3 [14], Clause 7.4.13.2
Initial condition:	"Call Forwarding unconditional" field on line 0 set to the following values "Value" sub field set to 31H (activated) "CFU activation code" sub field set to CFU activation code if any else to zero length "CFU deactivation code" sub field set to CFU deactivation code if any else to zero length "Call forwarding number" sub field set to Phone B number
Stimulus:	F-00 1. Perform an incoming call on line 0 towards IUT from Phone A 2. Modify "Value" sub field of "Call Forwarding unconditional" field in line 0 settings list to 30H (deactivated) from TS_1 Perform an incoming call on line 0 towards IUT from Phone A
Pass criteria:	1. Verify that Phone B rings Verify that IUT does not send to TS_1 any {CC-SETUP} message 2. Verify that the IUT sends to TS_1 a {CC-SETUP} message

TC_FT_NG1.N.18_BV_301	External Call Forwarding on No Answer (CFNA) to external number
Reference:	TS 102 527-3 [14], Clause 7.4.13.3
Initial condition:	"Call Forwarding on No Answer" field on line 0 set to the following values "Value" sub field set to 31H (activated) "Nb of seconds before call is forwarded" set to 0FH "CFNA activation code" sub field set to CFNA activation code if any else to zero length "CFNA deactivation code" sub field set to CFNA deactivation code if any else to zero length "Call forwarding number" sub field set to Phone B number
Stimulus:	F-00 1. Perform an incoming call on line 0 towards IUT from Phone A 2. Wait for 30s 3. Modify "Nb of seconds before call is forwarded" sub field of "Call Forwarding on No Answer" field in line 0 settings list to 00H (default FP value) from TS_1 Perform an incoming call on line 0 towards IUT from Phone A 4. Wait for {CC-RELEASE} message sent to TS_1 5. Modify "Value" sub field of "Call Forwarding on No Answer" field in line 0 settings list to 30H (deactivated) from TS_1 Perform an incoming call on line 0 towards IUT from Phone A
Pass criteria:	Perform an incoming call on line 0 towards IUT from Phone A 1. Verify that the IUT sends to TS_1 a {CC-SETUP} message 2. Verify that the IUT sends to TS_1 a {CC-RELEASE} message Verify that Phone B rings 3. Verify that the IUT sends to TS_1 a {CC-SETUP} message 4. Verify that Phone B rings 5. Verify that the IUT sends to TS_1 a {CC-SETUP} message

TC_FT_NG1.N.18_BV_401	External Call Forwarding on Busy subscriber (CFB) to external number
Reference:	TS 102 527-3 [14], Clause 7.4.13.4
Initial condition:	"Call Forwarding on Busy subscriber" field on line 0 set to the following values "Value" sub field set to 31H (activated) "CFB activation code" sub field set to CFB activation code if any else to zero length "CFB deactivation code" sub field set to CFB deactivation code if any else to zero length "Call forwarding number" sub field set to Phone B number
Stimulus:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 with Phone C 1. Perform an incoming call on line 0 towards IUT from Phone A 2. Send a {CC-RELEASE} from TS_1 3. Modify "Value" sub field of "Call Forwarding on Busy subscriber" field in line 0 settings list to 30H (deactivated) from TS_1 Perform an incoming call on line 0 towards IUT from Phone A
Pass criteria:	1. Verify that Phone B rings Verify that IUT does not send to TS_1 any {CC-SETUP} message 2. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message 3. Verify that the IUT sends to TS_1 a {CC-SETUP} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a, CS call setup) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value a), (2, 1, 1)>>>

7.19 TC_FT_NG1.N.19 DTMF handling tests cases

Test subgroup objectives: to check the IUT's behaviours regarding DTMF handling with the following considerations:

- There is no test case defined for NG1.N.19_1 "Uplink DTMF transmission at call setup when FP connected to classic switching network" procedure and for NG1.N.19_2 "Uplink DTMF transmission when connected" as these procedures are inevitably implemented in a FP.
- There is no test case defined for NG1.N.19_3 "Downlink DTMF reception" procedure as the DTMF are received transparently as in-band audio.

TC_FT_NG1.N.19_BV_401	Local DTMF feedback of dialled digits
Reference:	TS 102 527-3 [14], Clause 7.4.14.3
Initial condition:	F-10 (TS_1+IUT)
Stimulus:	Send piecewise dialling using the {CC-INFO} message with IE <<KEYPAD>> for each digit (0-9, *,#) from TS_1
Pass criteria:	Verify that the IUT does not generate to TS_1 any audio in band feedback.

7.20 TC_FT_NG1.N.20 Tones provision tests cases

Test subgroup objectives: to check the IUT's behaviours regarding tones provision procedures.

Declarations (see Annex A):

- NG1.N.20_2 "Tones provision by the system" procedure and NG1.N.20_3 "Transparency to tones provision by the network or PABX" procedure are exclusive for external call, so the manufacturer shall declare which method is supported for each implemented tone.
- Though, NG1.N.20_2 "Tones provision by the system" procedure is mandatory for internal call.
- Ring-back tone on internal call, included in NG1.N.20_2 "Tones provision by the system" procedure, is tested when running NG1.N.8 "Call transfer" test cases, so there is no test case defined for this requirement.
- When NG1.N.20_2 "Tones provision by the system" procedure is supported, following tones are optional so the manufacturer shall declare if they are supported:
 - NG1.N.20_2 "Dial tone".
 - NG1.N.20_2 "Off-hook warning tone".
 - NG1.N.20_2 "Network congestion tone (external calls only)".

TC_FT_NG1.N.20_BV_201	Tones provision by the system - Ring-back tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an outgoing call to Phone A from TS_1 2. Call pick up on Phone A
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 an IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' within either a {CC-ALERTING} or a {CC-INFO} message 2. Verify that the IUT sends to TS_1 an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' within either a {CC-INFO} or a {CC-CONNECT} message

TC_FT_NG1.N.20_BV_202	Tones provision by the system - Busy tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	"Single call" mode line, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), external call in F-10 (TS_2+IUT) initiated by PP2 with Phone B
Stimulus:	Initiate outgoing call from TS_1
Pass criteria:	Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<SIGNAL>> with the value 04H indicating 'Busy tone on'

TC_FT_NG1.N.20_BV_203	Tones provision by the system - Call waiting tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	G.722 external call in F-10 (TS_1+IUT) with Phone A
Stimulus:	Perform an incoming external call towards IUT from Phone B
Pass criteria:	Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<SIGNAL>> with the value 07H indicating 'call waiting tone on'

TC_FT_NG1.N.20_BV_204	Tones provision by the system - Negative acknowledgement tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	External call in F-10 (TS_1+IUT) with Phone A (call id a), one parallel external call established with Phone B (call id b), both calls are on line 0
Stimulus:	Send a {CC-INFO} message from TS_1 with IE <<MULTI-KEYPAD>> set to (1CH, 33H) digits and with IE <<CALL-INFORMATION>> specifying (call id c) =<(1, 0, value c)>
Pass criteria:	Verify that the IUT send to TS_1 a {CC-INFO} message with IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone'
Comments:	Call id is assigned by the IUT, as a result call id c must be different from allocated ones
TC_FT_NG1.N.20_BV_205	Tones provision by the system - Intercept tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	"Single call" mode line, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-10 (TS_1+IUT) with Phone A
Stimulus:	Initiate intrusion call from PP2
Pass criteria:	Verify that the IUT sends to TS_1 a {CC-INFO} message IE <<SIGNAL>> with the value 02H indicating 'intercept tone on'
TC_FT_NG1.N.20_BV_206	Tones provision by the system - Dial tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	F-00
Stimulus:	1. Send a {CC-SETUP} message from TS_1 2. Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (34H, 33H, 32H, 31H) digits from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 an IE <<SIGNAL>> with the value 00H indicating 'Dial tone on' within either a {CC-SETUP-ACK} or a {CC-INFO} message 2. Verify that the IUT sends to TS_1 an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' within either a {CC-CALL-PROC}, a {CC-CONNECT}, or a {CC-INFO} message
TC_FT_NG1.N.20_BV_207	Tones provision by the system - Off-hook warning tone
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.1
Initial condition:	F-10 (TS_1+IUT) with Phone A
Stimulus:	Hang up on Phone A
Pass criteria:	Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<SIGNAL>> with the value 08H indicating 'Off-hook warning tone on'
TC_FT_NG1.N.20_BV_210	Tones provision by the system - Ring-back tone on parallel call
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.
Initial condition:	External call in F-10 (TS_1+IUT) with Phone A (call id a)
Stimulus:	1. Send 1CH 15H digits together with Phone B number in IE <<MULTI-KEYPAD>> in a {CC-INFO} message from TS_1 2. Call pick up on Phone B
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> for new call reference call id b Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<SIGNAL>> with the value 01H indicating 'Ring back tone on' 2. Verify that the IUT sends to TS_1 an IE <<SIGNAL>> with the value 3FH indicating 'Tones Off' within a {CC-INFO} message
Comments:	The two {CC-INFO} messages may be combined in one in step 1
TC_FT_NG1.N.20_BV_220	Tones provision by the system - Backward compatibility with legacy PPs
Reference:	TS 102 527-3 [14], Clause 7.4.15.2.2
Initial condition:	TS_1 is a GAP PP, F-00
Stimulus:	Perform an outgoing call from TS_1
Pass criteria:	Verify that the IUT indicates availability of in-band tones to TS_1 by connecting the U-plane either by sending: <ul style="list-style-type: none"> • IE <<PROGRESS INDICATOR>> before {CC-CONNECT} message; or • a {CC-CONNECT} message

TC_FT_NG1.N.20_BV_301	Transparency to tones provision by the network or PABX - Dial tone and ring back tone for a first call
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.4.15.3 F-00 Perform an outgoing call on line 0 to Phone A from TS_1 Verify that the IUT indicates availability of in-band tones to TS_1 by connecting the U-plane either by sending: <ul style="list-style-type: none"> • IE <<PROGRESS INDICATOR>> before {CC-CONNECT} message; or • a {CC-CONNECT} message Verify that the IUT plays transparently: <ul style="list-style-type: none"> • The Dial tone on if declared (see Annex A Table A.26) • the Ring Back Tone
TC_FT_NG1.N.20_BV_302	Transparency to tones provision by the network or PABX - Busy tone
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.4.15.3 "Single call" mode line, 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), external call in F-10 (TS_2+IUT) initiated by PP2 with Phone B Perform an outgoing call on line 0 to Phone A from TS_1 Verify that the IUT indicates availability of in-band tones to TS_1 by connecting the U-plane either by sending: <ul style="list-style-type: none"> • IE <<PROGRESS INDICATOR>> before {CC-CONNECT} message; or • a {CC-CONNECT} message Verify that the IUT plays transparently the Busy tone or busy in-band announcement indication
TC_FT_NG1.N.20_BV_303	Transparency to tones provision by the network or PABX - Call waiting tone
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.4.15.3 G.722 external call in F-10 (TS_1+IUT) with Phone A Perform an incoming external call towards IUT from Phone B Verify that the IUT plays transparently the call waiting tone
TC_FT_NG1.N.20_BV_304	Transparency to tones provision by the network or PABX - Dial tone and ring back tone for outgoing parallel call
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.4.15.3 G.722 external call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A Send a {CC-INFO} message from TS_1 with IE << MULTI-KEYPAD >> set to 1CH 15H digits together with Phone B number and IE <<CALL-INFORMATION>> specifying (line None, call id b) =<(0, 0, 127), (1, 0, value b)> Verify that the IUT plays transparently: <ul style="list-style-type: none"> • The Dial tone on if declared (see Annex A Table A.26) • the Ring Back Tone

7.21 TC_FT_NG1.N.21 Headset management tests cases

Test subgroup objectives: to check the IUT's behaviours regarding headset management with the following consideration:

- As NG1.N.21_1 "Headset considerations" is tested implicitly when running NG1.A.1 "Easy PIN-code registration" test cases, there is no test case defined for this procedure.
- As NG1.N.21_3 "Headset incoming call" is tested implicitly when running NG1.N.1 "Codec negotiation" incoming call test cases, there is no test case defined for this procedure.
- As NG1.N.21_4 "Re-dial of last outgoing call" and NG1.N.21_5 "Re-dial of last incoming call" procedures use normal call setup instead of 'interception' setup, there is no test case defined for these procedures.
- As NG1.N.21_6 "Switching headset to handset (headset initiated)" procedures use NG1.N.8 "Call transfer" procedure, there is no test case defined for these procedures.

- All other telephony features are supported on FP side towards a HPP, so there is no test case defined for NG1.N.21_8 "Compatibility with other telephony features and profiles".

TC_FT_NG1.N.21_BV_201	Headset call interception - G.722 call
Reference:	TS 102 527-3 [14], Clause 7.4.16.2.2
Initial condition:	2 PPs registered (TS_1 is HPP PP1, TS_2 is NG PP2), "Call interception" set to 31H ("allowed") for PP2's internal names list entry, G.722 external call in F-10 (TS_2+IUT) initiated by TS_2 on line 0 (call id b) with Phone B, TS_2 selected G.722 when negotiating codec
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message in long slot mode with IE << MULTI-KEYPAD >> set to (1CH, 50H, 2AH) digits from TS_1 2. Start F<CC.NG.01> timer control when receiving IE <<SIGNAL>> in step 1 Time out of F< CC.NG.01> timer control 3. Send a {CC-RELEASE-COM } message from TS_2
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call proc) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 3)> Verify that the IUT sends to TS_2 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'intercept tone on' if declared (see Annex A Table A.26), • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP1> >>>, • an IE <<CALL-INFORMATION>> specifying (call id b, CS_call intercepted) =<(1, 0, value b), (2, 1, 8)>, • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B 2. Verify that the IUT sends to TS_2 a {CC-RELEASE} message
Comments:	'Call interception' parameter in Internal names list must be configured by the test system

TC_FT_NG1.N.21_BV_202	Headset call interception - G.726 call
Reference:	TS 102 527-3 [14], Clause 7.4.16.2.2
Initial condition:	2 PPs registered (TS_1 is HPP PP1, TS_2 is NG PP2), "Call interception" set to 31H ("allowed") for PP2's internal names list entry, G.726 external call in F-10 (TS_2+IUT) initiated by Phone B on line 0 (call id b), TS_2 selected G.726 when negotiating codec
Stimulus:	1. Send a {CC-SETUP} message in long slot mode with IE << MULTI-KEYPAD >> set to (1CH, 50H, 2AH) digits from TS_1 2. Start F<CC.NG.01> timer control when receiving IE <<SIGNAL>> in step 1 Time out of F< CC.NG.01> timer control 3. Send a {CC-RELEASE-COM} message from TS_2
Pass criteria:	1. Verify that the IUT sends to TS_1 a {CC-CALL-PROC} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call proc) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 3)> Verify that the IUT sends to TS_2 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> an IE <<SIGNAL>> with the value 02H indicating 'intercept tone on' if declared (see Annex A Table A.26), an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP1> >>, an IE <<CALL-INFORMATION>> specifying (call id b, CS_call intercepted) =<(1, 0, value b), (2, 1, 8)>, when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages Verify that the IUT sends to TS_1 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B 2. Verify that the IUT sends to TS_2 a {CC-RELEASE} message
Comments:	'Call interception' parameter in Internal names list must be configured by the test system

TC_FT_NG1.N.21_BV_204	Headset call interception - Control code failed
Reference:	TS 102 527-3 [14], Clause 7.4.16.2.2
Initial condition:	2 PPs registered (TS_1 is HPP PP1, TS_2 is NG PP2), "Call interception" set to 30H ("not allowed") for PP2's internal names list entry, External call in F-10 (TS_2+IUT) initiated by TS_2 on line 0 (call id b) with Phone B
Stimulus:	Send a {CC-SETUP} message in long slot mode with IE << MULTI-KEYPAD >> set to (1CH, 50H, 2AH) digits from TS_1
Pass criteria:	Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> an IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone' when declared (see Annex A Table A.26) an IE <<CALL-INFORMATION>> specifying (call id a, CS call setup ack, control code failed) =<(1, 0, value a), (2, 1, 2), (2, 2, 3)> when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages Verify end-to-end U-plane connection between TS_2 and Phone B
Comments:	'Call interception' parameter in Internal names list must be configured by the test system

TC_FT_NG1.N.21_BV_701	Switching from headset to handset (handset initiated) - G.722 call
Reference:	TS 102 527-3 [14], Clause 7.4.16.7
Initial condition:	2 PPs registered (TS_1 is HPP PP1, TS_2 is NG PP2), "Call interception" set to 31H ("allowed") for PP1's internal names list entry, G.722 outgoing call in F-10 intercepted by TS_1 (Run TC_FT_NG1.N.21_BV_201)
Stimulus:	1. Send a {CC-SETUP} message in long slot mode with IE << MULTI-KEYPAD >> set to (1CH, 50H, 2AH) digits from TS_2
	2. Start F<CC.NG.01> timer control when receiving IE <<SIGNAL>> in step 1 Time out of F< CC.NG.01> timer control
	3. Send a {CC-RELEASE-COM} message from TS_1
Pass criteria:	1. Verify that the IUT sends to TS_2 a {CC-CALL-PROC} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id b, CS call proc) =<(0, 0, lid0), (0, 5, lt0), (1, 0, value b), (2, 1, 3)> Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:
	<ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 02H indicating 'intercept tone on' if declared (see Annex A Table A.26) • an IE <<CALLING PARTY NUMBER = <Number type= Network specific number, Numbering plan id = Private plan, Presentation indicator=don't care value, Screening indicator= don't care value, calling party address= IA5 coding of terminal identity number in decimal of PP1> >>, • an IE <<CALL-INFORMATION>> specifying (call id b, CS_call intercepted) =<(1, 0, value b), (2, 1, 8)>, • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages
	Verify that the IUT sends to TS_2 a {CC-CONNECT} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)>
	Verify end-to-end U-plane connection between TS_2 and Phone B
	2. Verify that the IUT sends to TS_1 a {CC-RELEASE} message
Comments:	'Call interception' parameter in Internal names list must be configured by the test system

7.22 TC_FT_NG1.N.22 Handling of lines where second calls are signalled in-band tests cases

Test subgroup objectives: to check the IUT's behaviours regarding handling of lines where second calls are signalled in-band with the following consideration:

- NG1.N.22 "Handling of lines where second calls are signalled in-band" feature is optional on FP side, so the manufacturer shall declare if it is supported.
- NG1.N.22_2 "Basic 'double call with in-band signalling' lines" procedure is not tested as this type of line is not considered as DCIBS line from the NG1.N.22 "Handling of lines where second calls are signalled in-band" feature perspective.
- NG1.N.22_3 "Use of transparent commands on IBSC lines (Basic or Off-hook CLIP enabled) or any other line" procedure is not tested as the transparent commands are network dependant.

Declarations (see Annex A):

- NG1.N. 22 "Handling of lines where second calls are signalled in-band" feature is optional on FP side, so the manufacturer shall declare if it is supported.

TC_FT_NG1.N.22_BV_101	Off-hook CLIP enabled 'double call with in-band signalling' lines - double call with in-band signalling type for outgoing call (first and second call)
Reference:	TS 102 527-3 [14], Clauses 7.4.3.10.2 and 7.4.8.3
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Send a {CC-SETUP} message from TS_1 with IE <<BASIC-SERVICE>> 'Normal call setup', IE <<MULTI-KEYPAD>> set to Phone A number and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> 2. Call pick up on Phone A 3. Send a {CC-INFO} message from TS_1 with IE <<MULTI-KEYPAD>> set to 1CH 15H digits together with Phone B number and IE <<CALL-INFORMATION>> specifying (line 0) =<(0, 0, lid0)> 4. Call pick up on Phone B 5. Send a {CC-RELEASE} message from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 in a CC-message (either {CC-INFO}, {CC-CALL-PROC}, or {CC-CONNECT}) with IE <<CALL-INFORMATION>> specifying (line 0, line type information with second call type set to 1, call id a) =<(0, 0, lid0), (0, 5, lt0=1xB), (1, 0, value a)> 2. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call connect) =<(1, 0, value a), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone A 3. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id a, CS call hold) =<(1, 0, value a), (2, 1, 9)> followed by a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (line 0, line type information with second call type set to 1, call id b) =<(0, 0, lid0), (0, 5, lt0=1xB), (1, 0, value b)> 4. Verify that the IUT sends to TS_1 a {CC-INFO} message with IE <<CALL-INFORMATION>> specifying (call id b, CS call connect) =<(1, 0, value b), (2, 1, 5)> Verify end-to-end U-plane connection between TS_1 and Phone B 5. Verify that the IUT sends to TS_1 a {CC-RELEASE-COM} message

TC_FT_NG1.N.22_BV_301	Off-hook CLIP enabled 'double call with in-band signalling' lines - Call release
Reference:	TS 102 527-3 [14], Clause 7.4.3.10.3.2
Initial condition:	External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A, one parallel external call on hold on line 0 (call id b) with Phone B
Stimulus:	Send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (1CH, 33H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)> from TS_1
Pass criteria:	<p>Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone' when declared (see Annex A Table A.26) • an IE <<CALL-INFORMATION>> specifying (call id a, CS call connect, control code failed) =<(1, 0, value a), (2, 1, 5), (2, 2, 3)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages

TC_FT_NG1.N.22_BV_302	Off-hook CLIP enabled 'double call with in-band signalling' lines - Call waiting rejection (from PP to FP) (external)
Reference: Initial condition: Stimulus: Pass criteria:	<p>TS 102 527-3 [14], Clause 7.4.3.10.3.2</p> <p>External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <ol style="list-style-type: none"> 1. Perform an incoming external call towards IUT from Phone B on line 0 2. Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 36H) digits and with IE <<CALL-INFORMATION>> specifying (call id b) =<(1, 0, value b)> from TS_1 <ol style="list-style-type: none"> 1. Verify that the IUT sends to TS_1 a {CC-INFO} message with an IE <<CALL-INFORMATION>> specifying (line 0, line type information with second call type set to 1, call id b, CS call setup) =<(0, 0, lid0), (0, 5, lt0=1xB), (1, 0, value b), (2, 1, 1)> 2. Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages: <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone' when declared (see Annex A Table A.26) • an IE <<CALL-INFORMATION>> specifying (call id b, CS call connect, control code failed) =<(1, 0, value b), (2, 1, 5), (2, 2, 3)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages <p>Verify end-to-end U-plane connection between TS_1 and Phone A</p>

TC_FT_NG1.N.22_BV_303	Off-hook CLIP enabled 'double call with in-band signalling' lines - Putting a call on hold (external)
Reference: Initial condition: Stimulus: Pass criteria:	<p>TS 102 527-3 [14], Clause 7.4.3.10.3.2</p> <p>External call in F-10 (TS_1+IUT) initiated by TS_1 on line 0 (call id a) with Phone A</p> <p>Send a {CC-INFO} message with IE << MULTI-KEYPAD >> set to (1CH, 41H) digits and with IE <<CALL-INFORMATION>> specifying (call id a) =<(1, 0, value a)>from TS_1</p> <p>Verify that the IUT sends to TS_1 in the same or different {CC-INFO} messages:</p> <ul style="list-style-type: none"> • an IE <<SIGNAL>> with the value 09H indicating 'Negative acknowledgement tone' when declared (see Annex A Table A.26) • an IE <<CALL-INFORMATION>> specifying (call id a, CS call connect, control code failed) =<(1, 0, value a), (2, 1, 5), (2, 2, 3)> • when sent in different messages, call status indication shall always be sent in the first used {CC-INFO} message, and call identifier shall be sent within all messages <p>Verify end-to-end U-plane connection between TS_1 and Phone A</p>

7.23 TC_FT_GAP.N.30 Calling Line Identification Presentation tests cases

Test subgroup objectives: to check the IUT's ability to transmit CLIP.

TC_FT_GAP.N.30_BV_01	Incoming call with calling party number
Reference: Initial condition: Stimulus: Pass criteria:	<p>EN 300 444 [12], Clauses 8.12, 8.13 and 8.41</p> <p>F-00</p> <p>Perform an incoming call towards IUT from Phone A</p> <ol style="list-style-type: none"> 1. Verify by checking <<CALLING PARTY NUMBER>> reception on TS_1 that the IUT is able to transmit CLIP either in the {CC-SETUP} message or in a {CC-INFO} message. 2. Verify that <<CALLING PARTY NUMBER>> includes <Calling party address> field with the calling party number of external party.

7.24 TC_FT_GAP.N.31 Internal call tests cases

Test subgroup objectives: to check the IUT's behaviours when handling internal call with the following consideration:

- As GAP.N.31_2 "Internal call keypad" is tested implicitly when testing NG1.N.7 "Common parallel call procedures (external or internal)", there is no test case defined for this procedure.

TC_FT_GAP.N.31_BV_101	Internal call setup - internal call class
Reference:	TS 102 527-1 [13], Clause 7.3.6 table 14
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-00
Stimulus:	Perform an internal call towards TS_1 from TS_2
Pass criteria:	Verify that the IUT performs an internal call setup towards TS_1 with <Call class = internal call>
TC_FT_GAP.N.31_BV_102	Internal call setup - internal general call
Reference:	TS 102 527-1 [13], Clause 7.3.6 EN 300 444 [12], Clause 14.4.3
Initial condition:	3 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2, TS_3 is NG PP3), F-00
Stimulus:	Perform an internal general call from TS_1: send a {CC-INFO} message with IE <<MULTI-KEYPAD>> set to (17H, IA5 coding of internal general call = 2AH) digits
Pass criteria:	Verify that the IUT performs an internal call setup towards TS_2 and TS_3 with <Call class = internal call>
TC_FT_GAP.N.31_BV_301	Internal call CLIP
Reference:	EN 300 444 [12], Clause 8.43
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), no internal name configured for PP2, F-00
Stimulus:	Perform an internal call towards TS_1 from TS_2
Pass criteria:	Verify that the IUT sends to TS_1 an IE <<CALLING PARTY NUMBER>>, as described in EN 300 444 [12], Clause 8.43, table 78d with <Calling party address> = IA5 coding of terminal identity number in decimal of PP2
TC_FT_GAP.N.31_BV_401	Internal call CNIP
Reference:	EN 300 444 [12], Clause 8.44
Initial condition:	TS 102 527-3 [14], Clauses 7.4.10.1 (Alphabet compatibility) and 7.4.17.1 2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-00
Stimulus:	Perform an internal call towards TS_1 from TS_2
Pass criteria:	Verify that the IUT sends to TS_1 an IE <<CALLING PARTY NAME>>, as described in EN 300 444 [12], Clause 8.44, table 78e with <Calling party name = internal names list entry of PP2>
Comments:	CNIP can be internal names list entry of PP2 or default string (e.g. "DECT n" where n stands for the IA5 coding of the terminal identity number of PP2 in decimal representation) UTF-8 characters are not required as it will be too complex to setup an internal names list entry through TS in the initial condition
TC_FT_GAP.N.31_BV_601	Internal call codec priority
Reference:	TS 102 527-3 [14], Clause 7.4.3.9
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-00
Stimulus:	1. Perform an internal call G.722 (long slot, G.722 prioritized) towards TS_1 from TS_2 2. Call pick up on TS_1
Pass criteria:	1. Verify that the IUT sends to TS_1 an IE <<CODEC LIST>> with highest priority for G.722 at call setup or previously at location registration. 2. Verify end-to-end U-plane connection between TS_1 and TS_2
TC_FT_GAP.N.31_GC_101	Internal call setup - external call class
Reference:	TS 102 527-1 [13], Clause 7.3.6
Initial condition:	2 PPs registered (TS_1 is a GAP PP1, TS_2 is a NG PP), F-00
Stimulus:	Perform an internal call towards TS_1 from TS_2
Pass criteria:	Verify that the IUT performs an internal call setup with <Call class = external call> in IE <<BASIC-SERVICE>> towards TS_1

7.25 TC_FT_GAP.N.34 Calling Name Identification Presentation tests cases

Test subgroup objectives: to check the IUT's ability to handle CNIP.

Declarations (see Annex A):

- GAP.N.34_2 "UTF-8 CNIP" procedure shall be only tested if the FP is connected to an UTF-8 CNIP enabled line.

TC_FT_GAP.N.34_BV_101	Incoming call with calling party name
Reference:	EN 300 444 [12], Clauses 8.12, 8.13 and 8.42
Initial condition:	F-00
Stimulus:	Perform an incoming call on line 0 towards IUT from Phone A (CNIP A with DECT standard characters)
Pass criteria:	Verify that the IUT sends to TS_1 in the {CC-SETUP} or {CC-INFO} message an IE <<CALLING PARTY NAME =< Presentation indicator=don't care value, Used alphabet= DECT standard or UTF-8, Screening indicator= don't care value, calling party name = name of Phone A >>

TC_FT_GAP.N.34_BV_201	Incoming call with UTF-8 calling party name
Reference:	EN 300 444 [12], Clauses 8.12, 8.13 and 8.42 TS 102 527-3 [14], Clause 7.4.17.1
Initial condition:	F-00
Stimulus:	Perform an incoming call on line 0 towards IUT from Phone B (CNIP B with UTF-8 characters, e.g. 'Phone B èàü')
Pass criteria:	Verify that the IUT sends to TS_1 in the {CC-SETUP} or {CC-INFO} message an IE <<CALLING PARTY NAME =< Presentation indicator=don't care value, Used alphabet= UTF-8, Screening indicator= don't care value, calling party name = name of Phone B >>
Comments:	UTF-8 suggested characters encoding: <ul style="list-style-type: none"> • "é" : LATIN SMALL LETTER E WITH ACUTE 'c3a9'H • "à" : LATIN SMALL LETTER A WITH GRAVE 'c3a0'H • "ü" : LATIN SMALL LETTER U WITH DIAERESIS 'c3bc'H

TC_FT_GAP.N.34_GC_201	Incoming call with calling party name - UTF-8 to IA5 characters translation
Reference:	EN 300 444 [12], Clauses 8.12, 8.13 and 8.42 TS 102 527-3 [14], Clause 7.4.17.1
Initial condition:	TS_1 is a GAP PP1, F-00
Stimulus:	Perform an incoming call on line 0 towards IUT from Phone B (CNIP B with UTF-8 characters, e.g. 'Phone B éàü')
Pass criteria:	Verify that the IUT sends to TS_1 in the {CC-SETUP} or {CC-INFO} message an IE <<CALLING PARTY NAME =< Presentation indicator=don't care value, Used alphabet= DECT standard, Screening indicator= don't care value, calling party name = name of Phone B including only IA5 characters >>
Comments:	For each UTF-8 character received from the network, the FP should translate it into equivalent IA5 characters (replacement character is left free to the manufacturer) UTF-8 suggested characters encoding: <ul style="list-style-type: none"> • "é" : LATIN SMALL LETTER E WITH ACUTE 'c3a9'H • "à" : LATIN SMALL LETTER A WITH GRAVE 'c3a0'H • "ü" : LATIN SMALL LETTER U WITH DIAERESIS 'c3bc'H

7.26 TC_FT_GAP.N.35 Enhanced security tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Enhanced security features with the following consideration:

- As GAP.N.35_5 "Enhanced security regarding legacy devices" procedure is tested when testing GAP.N.35_1 "Encryption of all calls" procedure, there is no test case defined for this procedure.
- As GAP.N.35_4 "subscriptions requirements" procedure specifies only FP requirements, there is no test case defined for this procedure.

Declarations (see Annex A):

- GAP.N.35_2 "Re-keying during a call" procedure is optional on FP side, so the manufacturer shall declare if it is supported.
- GAP.N.35_3 "Early encryption" procedure is optional on FP side, so the manufacturer shall declare if it is supported.

TC_FT_GAP.N.35_BV_101	Verify that FT enables encryption for incoming call within timer < MM_encryption_check.1 >
Reference:	EN 300 444 [12], Clauses 8.45.1
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Perform an incoming call from Phone A 2. TS_1 sends a {CC-ALERTING} message to IUT and start timer T001 (MM_encryption_check.1 + 10 %) 3. TS_1 sends a {AUTHENTICATION-REPLY} message 4. TS_1 activates encryption on MAC layer
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a {CC-SETUP} message 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message before timer T001 expires 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message before timer T001 expires 4. Verify that encryption is activated before timer T001 expires Verify end-to-end U-plane connection between TS_1 and Phone A

TC_FT_GAP.N.35_BV_102	Verify that FT enables encryption for outgoing call within timer < MM_encryption_check.1 >
Reference:	EN 300 444 [12], Clause 8.45.1
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. TS_1 sends a {CC-SETUP} to IUT 2. Start timer T001 (MM_encryption_check.1 + 10 %) 3. TS_1 sends a {AUTHENTICATION-REPLY} message 4. TS_1 activates encryption on MAC layer
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a CC-message (either {CC-SETUP-ACK}, {CC-ALERTING}, {CC-CALL-PROC}, or {CC-CONNECT}) 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message before timer T001 expires 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message before timer T001 expires 4. Verify that encryption is activated before timer T001 expires and verify end-to-end U-plane connection

TC_FT_GAP.N.35_BV_105	Release of unencrypted call in case of wrong answer to authentication request
Reference:	EN 300 444 [12], Clause 8.45.1
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. TS_1 sends {CC-SETUP} to IUT 2. Start timer T001 (MM_encryption_check.1 + 10 %). 3. TS_1 sends {AUTHENTICATION-REPLY} with random (wrong) credentials
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a CC-message (either {CC-SETUP-ACK}, {CC-ALERTING}, {CC-CALL-PROC}, or {CC-CONNECT}) 2. Verify that IUT sends to TS_1 a {AUTHENTICATION_REQUEST} message before timer T001 expires. 3. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} with the information element <<RELEASE REASON = either <encryption activation failed> or <authentication failed>>>

TC_FT_GAP.N.35_BV_106	Release of unencrypted call in case of missing answer to authentication request
Reference:	EN 300 444 [12], Clause 8.45.1
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. TS_1 sends {CC-SETUP} to IUT 2. Start timer T001 (MM_encryption_check.1 + 10 %). 3. TS_1 does neither send {AUTHENTICATION-REPLY} nor {AUTHENTICATION-REJECT}
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a CC-message (either {CC-SETUP-ACK}, {CC-ALERTING}, {CC-CALL-PROC}, or {CC-CONNECT}) 2. Verify that IUT sends to TS_1 a {AUTHENTICATION_REQUEST} message before timer T001 expires. 3. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} with the information element <<RELEASE REASON = either <encryption activation failed> or <authentication failed>>>

TC_FT_GAP.N.35_BV_107	Release of unencrypted call in case of PP sending {AUTHENTICATION-REJECT} message
Reference:	EN 300 444 [12], Clause 8.45.1
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. TS_1 sends {CC-SETUP} to IUT 2. Start timer T001 (MM_encryption_check.1 + 10 %) 3. TS_1 sends a {AUTHENTICATION-REJECT} message to IUT
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a CC-message (either {CC-SETUP-ACK}, {CC-ALERTING}, {CC-CALL-PROC}, or {CC-CONNECT}) 2. Verify that IUT sends to TS_1 a {AUTHENTICATION_REQUEST} message before timer T001 expires 3. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<RELEASE REASON = either <encryption activation failed> or <authentication failed> >> before expiry of T001

TC_FT_GAP.N.35_BV_108	Release of unencrypted call in case of cipher reject.
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. TS_1 sends {CC-SETUP} to IUT 2. Start timer T001 (MM_encryption_check.1 + 10 %) 3. TS_1 sends a {AUTHENTICATION_REPLY} message 4. TS_1 sends a {CIPHER-REJECT} to IUT.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a CC-message (either {CC-SETUP-ACK}, {CC-ALERTING}, {CC-CALL-PROC}, or {CC-CONNECT}) 2. Verify that IUT sends to TS_1 a {AUTHENTICATION_REQUEST} message before timer T001 expires 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message before timer T001 expires 4. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message with the information element <<RELEASE REASON = <encryption activation failed> >>

TC_FT_GAP.N.35_BV_109	Release of unencrypted call in case of missing encryption activation on MAC layer.
Reference:	EN 300 444 [12], Clause 8.45.5
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. TS_1 sends {CC-SETUP} to IUT. 2. Start timer T001 (MM_encryption_check.1 + 10 %) 3. TS_1 sends a {AUTHENTICATION_REPLY} message.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a CC-message (either {CC-SETUP-ACK}, {CC-ALERTING}, {CC-CALL-PROC}, or {CC-CONNECT}) 2. Verify that IUT sends to TS_1 a {AUTHENTICATION_REQUEST} message before timer T001 expires. 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message before timer T001 expires. Verify that IUT sends to TS_1 a {CC-RELEASE-COM} message with the information element <<RELEASE REASON = <encryption activation failed> >>.

TC_FT_GAP.N.35_BV_201	Verify indication of Support of 'Re-keying' and 'early encryption' in extended higher layer capabilities part 2
Reference:	EN 300 444 [12], Clause 8.45.2
Initial condition:	F-00
Stimulus:	TS_1 evaluates the higher layer capabilities
Pass criteria:	Verify that IUT indicates the support of 'Re-keying' and 'early encryption' in Extended higher layer capabilities part 2 (a42 bit=1)

TC_FT_GAP.N.35_BV_202	Usage and frequency of re-keying procedure
Reference:	EN 300 444 [12], Clause 8.45.2
Initial condition:	F-00. 2 PPs registered (TS_1 and TS_2)
Stimulus:	<ol style="list-style-type: none"> 1. Invoke internal call from TS_2 towards TS_1. 2. TS_1 sends a {CC-CONNECT} message. Start timer T001 (<MM_re-keying.1> +10 %). 3. TS_1 sends a {AUTHENTICATION-REPLY} message and stores DCK as DCK_01. Start timer T001 (<MM_re-keying.1> +10%). 4. TS_1 activates encryption on MAC layer 5. TS_1 sends a {AUTHENTICATION-REPLY} message and stores DCK as DCK_02. 6. TS_1 activates encryption on MAC layer
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a {CC-SETUP} message 2. Verify that IUT sends to TS_1 {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 4. Verify that encryption is activated with DCK_1 Verify end-to-end U-plane connection between TS_1 and TS_2 Verify that IUT sends to TS_1 {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 5. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 6. Verify that encryption is activated with DCK_2 and verify end-to-end U-plane connection.

TC_FT_GAP.N.35_BV_203	Abnormal release if encryption for re-keying is not activated in MAC layer
Reference:	EN 300 444 [12], Clause 8.45.2
Initial condition:	F-00. 2 PPs registered (TS_1 and TS_2)
Stimulus:	<ol style="list-style-type: none"> 1. Invoke internal call from TS_2 towards TS_1. 2. TS_1 sends a {CC-CONNECT} message. Start timer T001 (<MM_re-keying.1> +10 %). 3. TS_1 sends a {AUTHENTICATION-REPLY} message. Start timer T001 (<MM_re-keying.1> +10 %). 4. TS_1 activates encryption on MAC layer 5. TS_1 sends a {AUTHENTICATION-REPLY} message. 6. TS_1 does not activate encryption on MAC layer
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a {CC-SETUP} message 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 4. Verify that encryption is activated Verify end-to-end U-plane connection between TS_1 and TS_2 Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 5. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 6. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<Release Reason = <Re-Keying failed> >>.

TC_FT_GAP.N.35_BV_204	Abnormal release if PP does not answer to {AUTHENTICATION-REQUEST} message for re-keying procedure
Reference: Initial condition: Stimulus:	EN 300 444 [12], Clause 8.45.2 F-00. 2 PPs registered (TS_1 and TS_2) 1. Invoke internal call from TS_2 towards TS_1. 2. TS_1 sends a {CC-CONNECT} message. Start timer T001 (MM_re-keying.1 + 10 %). 3. TS_1 sends a {AUTHENTICATION-REPLY} message. Start timer T001 (<MM_re-keying.1> +10 %). 4. TS_1 activates encryption on MAC layer 5. TS_1 does neither send {AUTHENTICATION-REPLY} nor {AUTHENTICATION-REJECT} message
Pass criteria:	1. Verify that IUT sends to TS_1 a {CC-SETUP} message 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 4. Verify that encryption is activated Verify end-to-end U-plane connection between TS_1 and TS_2 Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 5. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<Release Reason = <Re-Keying failed> >>

TC_FT_GAP.N.35_BV_205	Abnormal release if PP answers to {AUTHENTICATION-REQUEST} message for re-keying procedure with { AUTHENTICATION-REJECT}
Reference: Initial condition: Stimulus:	EN 300 444 [12], Clause 8.45.2 F-00. 2 PPs registered (TS_1 and TS_2) 1. Invoke internal call from TS_2 towards TS_1. 2. TS_1 sends a {CC-CONNECT} message. Start timer T001 (MM_re-keying.1 + 10 %). 3. TS_1 sends a {AUTHENTICATION-REPLY} message. Start timer T001 (<MM_re-keying.1> +10%). 4. TS_1 activates encryption on MAC layer 5. TS_1 sends a {AUTHENTICATION-REJECT}
Pass criteria:	1. Verify that IUT sends to TS_1 a {CC-SETUP} message 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 4. Verify that encryption is activated and verify end-to-end U-plane connection. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 5. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<Release Reason = <Re-Keying failed> >>.

TC_FT_GAP.N.35_BV_206	Abnormal release if PP answers to {CIPHER_REQUEST} message for re-keying procedure with { CIPHER_REJECT}
Reference:	EN 300 444 [12], Clause 8.45.2
Initial condition:	F-00. 2 PPs registered (TS_1 and TS_2)
Stimulus:	<ol style="list-style-type: none"> 1. Invoke internal call from TS_2 towards TS_1. 2. TS_1 sends a {CC-CONNECT} message. Start timer T001 (MM_re-keying.1 + 10 %). 3. TS_1 sends a {AUTHENTICATION-REPLY} message. Start timer T001 (<MM_re-keying.1> +10 %). 4. TS_1 activates encryption on MAC layer 5. TS_1 sends a {AUTHENTICATION- REPLY} 6. TS_1 sends a {CIPHER_REJECT} message
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that IUT sends to TS_1 a {CC-SETUP} message 2. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 3. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 4. Verify that encryption is activated Verify end-to-end U-plane connection between TS_1 and TS_2. 5. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message to TS_1 before expiry of timer T001. 6. Verify that IUT sends to TS_1 a {CIPHER_REQUEST} message 6. Verify that IUT sends to TS_1 a {CC-RELEASE_COM} message containing IE <<Release Reason = <Re-Keying failed> >>.

TC_FT_GAP.N.35_BV_301	Assignment of default cipher key and usage of early encryption during incoming call.
Reference:	EN 300 444 [12], Clause 8.45.3
Initial condition:	TS_2 is registered to IUT. TS_1 has no access rights. Registration mode in IUT enabled (bit a44 is set).
Stimulus:	<ol style="list-style-type: none"> 1. TS_1 performs subscription registration to IUT, indicating the support of 'Re-keying' and 'early encryption' in the terminal capability. 2. Start timer T001 (<MM_early_encryption.1>+10 %). TS_1 sends a {LOCATE-REQUEST} message, indicating the support of 'Re-keying' and 'early encryption' in the terminal capability. 3. TS_1 sends a {AUTHENTICATION-REPLY} and saves DCK as Def_DCK_1. 4. Invoke internal call from TS_2 towards TS_1. 5. Perform MAC connection establishment with immediate encryption activation using Def_DCK_1 and send a {LCE-PAGE-RESPONSE} message. 6. TS_1 sends a {CC-CONNECT} message.
Pass criteria:	<ol style="list-style-type: none"> 1. Verify successful subscription registration. 2. Verify that the IUT sends to TS_1 a {LOCATE-ACCEPT} message. Verify that IUT sends to TS_1 a {AUTHENTICATION-REQUEST} message indicating DEF-bit=1 before timer T001 expires. 3. Verify that connection is released on MAC layer. 4. Verify that the IUT broadcasts to TS_1 a {LCE-REQUEST-PAGE} message. 5. Verify that the IUT sends to TS_1 a {CC-SETUP} message on the already encrypted link. 6. Verify that encryption is activated with Def_DCK_1 and Verify end-to-end U-plane connection between TS_1 and TS_2
Comments:	The {AUTHENTICATION-REQUEST} message might also arrive in TS_1 before the {LOCATE-ACCEPT} message is received by TS_1. This would also be valid behaviour. Verification of U-plane connection shall be done while Def_DCK_1 is used. Therefore the TS shall not switch to another DCK (by re-keying) before the U-Plane connection is verified even if the IUT requests to do so.

TC_FT_GAP.N.35_BV_302	Usage of early encryption during outgoing call
Reference:	EN 300 444 [12], Clause 8.45.3
Initial condition:	F-00. Default cipher key Def_DCK_1 is available both in IUT and TS_1 (i.e. TC_FT_GAP.N.35_BV_401 was executed before and the Def_DCK_1 has not been deleted). TS_2 is registered to IUT.
Stimulus:	1. TS_1 performs MAC connection establishment with immediate encryption activation using Def_DCK_1 and sends a {CC-SETUP} message. 2. Invoke acceptance of outgoing call at TS_2.
Pass criteria:	1. Verify that IUT sends to TS_1 a CC-message (either {CC-SETUP-ACK}, {CC-ALERTING}, {CC-CALL-PROC}, or {CC-CONNECT}) 2. Verify that IUT sends to TS_1 a {CC-CONNECT} message to TS_1 Verify that encryption is activated with Def_DCK_1 Verify end-to-end U-plane connection.

TC_FT_GAP.N.35_BV_303	Usage of early encryption for MM procedure
Reference:	EN 300 444 [12], Clause 8.45.3
Initial condition:	F-00. Default cipher key Def_DCK_1 is available both in IUT and TS_1 (i.e. TC_FT_GAP.N.35_BV_401 was executed before and the Def_DCK_1 has not been deleted).
Stimulus:	Switch IUT off and on. TS_1 synchronizes to IUT. TS_1 performs MAC connection establishment with immediate encryption activation using Def_DCK_1 and sends a {LOCATE-REQUEST} message.
Pass criteria:	Verify that encryption is activated with Def_DCK_1 Verify that IUT sends to TS_1 a {LOCATE-ACCEPT} message over the encrypted link.

TC_FT_GAP.N.35_BV_401	Duration of registration window
Reference:	EN 300 444 [12], Clause 8.45.4
Initial condition:	F-00
Stimulus:	Put IUT in registration mode. Start timer T001 (120 seconds + 5 %)
Pass criteria:	Verify that IUT sets bit a44 in the FP Capabilities to 0 before expiry of timer T001.

TC_FT_GAP.N.35_BV_402	Closing of registration window after successful registration.
Reference:	EN 300 444 [12], Clause 8.45.4
Initial condition:	TS_1 has no access rights to IUT.
Stimulus:	1. Put IUT in registration mode. 2. TS_1 performs subscription registration to IUT.
Pass criteria:	1. Verify that IUT sets bit a44 in the FP Capabilities to 1. 2. Verify successful subscription registration. Verify that IUT sets bit a44 in the FP Capabilities to 0.

7.27 TC_FT_NG1.A.1 Easy PIN code registration tests cases

Test subgroup objectives: to check the IUT's behaviours regarding easy PIN-code registration taking into account the following considerations:

- As NG1.A.1_3 "Base station name selection" is tested when testing NG1.A.2_5 " Base station name selection ", there is no test case defined for this procedure in following Clause.

Declarations (see Annex A):

- NG1.A.1 "Easy PIN code registration" feature is optional on FP side, so the manufacturer shall declare if it is supported.
- NG1.A.1_3 "Base station name selection" is optional. So the manufacturer shall declare if it is supported.
- NG1.A.1_4 "Registration user feedback" is optional. So the manufacturer shall declare if it is supported.

TC_FT_NG1.A.1_BV_401	Registration user feedback
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.10.1.3.3 PIN code set to '1234', F-00 1. Start the access rights procedure on the IUT 2. Stop the access rights procedure on the IUT when possible or wait for the end of the procedure (3 minutes maximum) 3. Start the access rights procedure on the IUT 4. Perform an Easy PIN code registration procedure using '4567' as PIN value from TS_1 5. Start the access rights procedure on the IUT 6. Perform an Easy PIN code registration procedure using '1234' as PIN value from TS_1 1. Verify that the IUT gives a feedback to the user of the registration process: "Registration in progress state" 2. Verify that the IUT gives a feedback to the user of the registration process: "Registration error state" 3. Verify that the IUT gives a feedback to the user of the registration process: "Registration in progress state" 4. Verify that the IUT gives a feedback to the user of the registration process: "Registration error state" 5. Verify that the IUT gives a feedback to the user of the registration process: "Registration in progress state" 6. Verify that the IUT gives a feedback to the user of the registration process: "Registration success state"

7.28 TC_FT_NG1.A.2 Easy pairing registration tests cases

Test subgroup objectives: to check the IUT's behaviours regarding easy pairing registration taking into account the following considerations:

- As NG1.A.2_6 "Registration user feedback" is tested when testing NG1.A.1_4 "Registration user feedback", there is no test case defined for this procedure.

Declarations (see Annex A):

- NG1.A.1_3 "Base station name selection" is optional. So the manufacturer shall declare if it is supported.
- NG1.A.1_6 "Registration user feedback" is optional. So the manufacturer shall declare if it is supported.

TC_FT_NG1.A.2_BV_301	Base station limited registration mode
Reference: Initial condition: Stimulus: Pass criteria:	TS 102 527-3 [14], Clause 7.10.1.2.2 PIN code set to '0000', F-00 1. Confirm that the IUT is not in registration mode 2. Start the access rights procedure on the IUT and start F<AP.01> timer control 3. Time out of F<AP.01> timer control 4. Start the access rights procedure on the IUT 5. Perform an Easy pairing code registration procedure from TS_1 and TS_2 1. Verify that the IUT broadcasts the following capability: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 0 2. Verify that the IUT broadcasts the following capability: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 1 3. Verify that the IUT broadcasts the following capability: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 0 4. Verify that the IUT broadcasts the following capability: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 1 5. Verify that the registration procedure is successful on one RF front end (for example TS_1) and not successful on the other RF front end (for example TS_2) Verify that the IUT broadcasts the following capability after successful registration: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 0

TC_FT_NG1.A.2_BV_501	Base station name selection
Reference:	TS 102 527-3 [14], Clause 7.10.1.3.2
Initial condition:	F-00
Stimulus:	<ol style="list-style-type: none"> 1. Set the base station name of the IUT to 'NG-DECT Part 3 FP tester' 2. Start the access rights procedure on the FP, start F<AP.01> timer control and F<AP.03> timer control 3. Time out of F<AP.03> timer control 4. Time out of F<AP.01> timer control
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT broadcasts the following capability: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 0 2. Verify that the IUT broadcasts the following capability: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 1 3. Verify that the first segment of {CLMS-FIXED} message arrives within the allowed margin time of F<AP.03> with <Address>=CFFFH and <PD>=01H 4. Verify that the second segment of {CLMS-FIXED} message arrived with <Data/Fill> octet 1= 41H and octet 3 = 10H 5. Verify that the four following segments of {CLMS-FIXED} message arrived and that the transmitted name is 'NG-DECT Part 3 FP tester' 6. Verify that the IUT broadcasts the following capability: <ul style="list-style-type: none"> • 'Access Rights supported' capability bit set to 0

7.29 TC_FT_NG1.A.3 Handset locator tests cases

Test subgroup objectives: to check the IUT's behaviours regarding handset locator.

Declarations (see Annex A):

- NG1.A.3 "Handset locator" feature is optional on FP side, so the manufacturer shall declare if it is supported.

TC_FT_NG1.A.3_BV_101	Handset locator
Reference:	TS 102 527-3 [14], Clause 7.10.2
Initial condition:	2 PPs registered (TS_1 is NG PP1, TS_2 is NG PP2), F-00
Stimulus:	<ol style="list-style-type: none"> 1. Trigger the handset locator procedure on IUT 2. Send a {CC-CONNECT} from TS_1
Pass criteria:	<ol style="list-style-type: none"> 1. Verify that the IUT sends a {CC-SETUP} message to TS_1 and TS_2 with <Call class = Normal call setup> and IE <<CALL-INFORMATION>> specifying (line 0, line type information, call id a) =<(0, 0, lid0), (0, 5, lid0), (1, 0, value a)> Verify that the IUT sends to TS_1 and TS_2 an IE <<CNIP >>, either in the {CC-SETUP} message or in a {CC-INFO} message, whose <Presentation indicator> field is set to 'Handset locator' 2. Verify that the IUT sends a {CC-RELEASE} message to TS_1 and TS_2

7.30 TC_FT_GAP.A.4 Terminal identity number assignment in mono cell system tests cases

Test subgroup objectives: to check the IUT's behaviours regarding Terminal Identity number assignment in mono cell system taking into account the following consideration:

- As 14.4.3 Related Procedures of NG1.A.4 feature are tested when tested GAP.N.31 "Internal call" feature, there is no test case defined for these related procedures.

TC_FT_GAP.A.4_BV_101	Terminal Identity number assignment in mono cell system
Reference:	EN 300 444 [12], Clause 14.4.2
Initial condition:	No PP registered
Stimulus:	Register TS_1
Pass criteria:	Verify that the IUT sends to TS_1 a {LOCATE-ACCEPT} message as described in EN 300 444 [12], Clause 14.4.2, table 106 with <Identity-value> set to terminal identity number '0000 0001B'

Annex A (normative): Declarations on features and procedures supported

The information contained within the following tables is required for parameterization of the test cases referred to in the present document. They must be taken into account to run an appropriate test suite against the IUT.

For each procedure noted in the following tables, the manufacturer shall declare if it is supported or not. When supported, the corresponding tests case(s) listed in "TC reference" column shall be tested.

Optional procedures are identified by a status "O".

Conditional procedures are identified by a status "C[.status number]". A procedure can be conditional to a feature support and/or a procedure support and/or a requirement support.

A.1 Declarations for portable part

A.1.1 Optional PT features

This Clause contains the optional features which can be declared by the manufacturer on the PT side.

Table A.1: Optional PT features supported

Feature no	Feature name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.9	3-party conference with established external and/or internal calls	7.4.3.7	O	TC_PT_NG1.N.9_BV_101 TC_PT_NG1.N.9_BV_102
NG1.N.10	Intrusion call	7.4.3.8	O	TC_PT_NG1.N.10_BV_101 TC_PT_NG1.N.10_BV_102 TC_PT_NG1.N.10_BV_201
NG1.N.11	Call deflection (internal or external)	7.4.4.2	O	TC_PT_NG1.N.11_BV_101 TC_PT_NG1.N.11_BV_201 TC_PT_NG1.N.11_BV_202 TC_PT_NG1.N.11_BV_203
NG1.N.17	Calling line identity restriction	7.4.12	O	TC_PT_NG1.N.17_BV_301
NG1.N.21	Headset management	7.4.16	C101	TC_PT_NG1.N.21_BV_101 TC_PT_NG1.N.21_BV_102 TC_PT_NG1.N.21_BV_201 TC_PT_NG1.N.21_BV_301 TC_PT_NG1.N.21_BV_401 TC_PT_NG1.N.21_BV_501 TC_PT_NG1.N.21_BV_601 TC_PT_NG1.N.21_BV_701
			C102	TC_PT_NG1.N.21_BV_705
C101: IF the PT is a headset PP THEN "M" ELSE "I".				
C102: This test case applies to a handset and not to a headset. IF the PT is not a headset PP THEN "O" ELSE "I".				

A.1.2 Extra information for PT testing

In addition to the optional features supported, the supplier shall declare additional information related to the PT implementation.

Table A.2: Implementation extra information for PT testing

Item no	Implementation extra information	Reference to TS 102 527-3 [14]	Possible values to be declared
PT_IXIT_1	Several contact numbers in contact list	7.4.10.5.7	Not supported Supported
PT_IXIT_2	CLIR code sub fields	7.4.11.4.10	Non editable Editable
PT_IXIT_3	CFU code sub fields	7.4.11.4.11	Non editable Editable
PT_IXIT_4	CFNA code sub fields	7.4.11.4.12	Non editable Editable
PT_IXIT_5	CFB code sub fields	7.4.11.4.13	Non editable Editable
PT_IXIT_6	Internal call codec priority	7.4.3.9.2	Not supported Supported

A.1.3 Optional or conditional PT procedures

This Clause contains the optional or conditional procedures which can be declared by the manufacturer on the PT side.

Table A.3: Date and Time synchronization procedure supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.5_1	PT initiated Date and Time synchronization	7.4.2.2	O	TC_PT_NG1.N.5_BV_102

Table A.4: Common parallel call procedures (external or internal) supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.7_7	Active call release with replacement (from PP to FP) - call waiting	7.4.3.5.12	O	TC_PT_NG1.N.7_BV_701
NG1.N.7_7	Active call release with replacement (from PP to FP) - call on-hold	7.4.3.5.12	O	TC_PT_NG1.N.7_BV_702
NG1.N.7_9	Putting a call on-hold	7.4.3.5.8	O	TC_PT_NG1.N.7_BV_901
NG1.N.7_10	Resuming a call put on-hold	7.4.3.5.9	O	TC_PT_NG1.N.7_BV_901

Table A.5: Intrusion call procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.10_1	Implicit call intrusion into a line in "single call" mode	7.4.3.8.1	C11001	TC_PT_NG1.N.10_BV_101 TC_PT_NG1.N.10_BV_102
NG1.N.10_1	Explicit call intrusion (from PP to FP)	7.4.3.8.2	C11001	TC_PT_NG1.N.10_BV_201

C11001: At least one of the two procedures shall be implemented

Table A.6: Line identification procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.12_4	Line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE	7.4.5.2.3	O	TC_PT_NG1.N.12_BV_401 TC_PT_NG1.N.12_BV_402

Table A.7: List access service procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.16_2	List change notification	7.4.10.2	O	
NG1.N.16_4	Query supported entry fields	7.4.10.4.2	O	
NG1.N.16_16	List of supported lists	7.4.10.5.2	O	Not tested
NG1.N.16_18	Outgoing calls list	7.4.10.5.4	O	TC_PT_NG1.N.16_BV_1801 TC_PT_NG1.N.16_BV_1802 TC_PT_NG1.N.16_BV_1803
NG1.N.16_20	All calls list	7.4.10.5.6	O	TC_PT_NG1.N.16_BV_2001 TC_PT_NG1.N.16_BV_2002 TC_PT_NG1.N.16_BV_2003
NG1.N.16_21	Contact list	7.4.10.5.7	C11601	TC_PT_NG1.N.16_BV_2110
NG1.N.16_23	All incoming calls list	7.4.10.5.11	O	TC_PT_NG1.N.16_BV_2301 TC_PT_NG1.N.16_BV_2302 TC_PT_NG1.N.16_BV_2303
NG1.N.16_26	Virtual contact list and call list per line	7.4.11.5	O	TC_PT_NG1.N.16_BV_2601 TC_PT_NG1.N.16_BV_2602 TC_PT_NG1.N.16_BV_2603 TC_PT_NG1.N.16_BV_2604 TC_PT_NG1.N.16_BV_2605 TC_PT_NG1.N.16_BV_2606
NG1.N.16_30	FP IP address / type	7.4.11.3.4	O	TC_PT_NG1.N.16_BV_3001
NG1.N.16_31	FP IP address / value	7.4.11.3.5	O	TC_PT_NG1.N.16_BV_3001
NG1.N.16_32	FP IP address / subnet mask	7.4.11.3.6	O	TC_PT_NG1.N.16_BV_3001
NG1.N.16_33	FP IP address / gateway	7.4.11.3.7	O	TC_PT_NG1.N.16_BV_3001
NG1.N.16_34	FP IP address / DNS server	7.4.11.3.8	O	TC_PT_NG1.N.16_BV_3001
NG1.N.16_37	FP version / Hardware version	7.4.11.3.11	O	TC_PT_NG1.N.16_BV_3501
NG1.N.16_41	Dialling prefix	7.4.11.4.4	O	TC_PT_NG1.N.16_BV_4101
NG1.N.16_42	FP melody	7.4.11.4.5	O	TC_PT_NG1.N.16_BV_4201
NG1.N.16_43	FP volume	7.4.11.4.6	O	TC_PT_NG1.N.16_BV_4301
NG1.N.16_44	Blocked number	7.4.11.4.7	O	TC_PT_NG1.N.16_BV_4401
NG1.N.16_46	Intrusion call	7.4.11.4.9	C11602	TC_PT_NG1.N.16_BV_4601
NG1.N.16_47	Permanent CLIR	7.4.11.4.10	C11603 C11604	TC_PT_NG1.N.16_BV_4701 TC_PT_NG1.N.16_BV_4702
NG1.N.16_48	Call forwarding Unconditional	7.4.11.4.11	C11605	TC_PT_NG1.N.16_BV_4802
NG1.N.16_49	Call forwarding on No Answer	7.4.11.4.12	C11606	TC_PT_NG1.N.16_BV_4902
NG1.N.16_50	Call forwarding on Busy Subscriber	7.4.11.4.13	C11607	TC_PT_NG1.N.16_BV_5002
NG1.N.16_51	Emission mode	7.4.11.3.12	C11608	TC_PT_NG1.N.16_BV_5101
C11601: IF several contact numbers in contact list is supported THEN "M" ELSE "N/A" (see Table A.2 PT_IXIT_1). C11602: IF NG1.N.10 "Intrusion call" is supported THEN "M" ELSE "N/A". C11603: IF NG1.N.17 "Calling line restriction" is supported THEN "M" ELSE "N/A". C11604: IF NG1.N.17 "Calling line restriction" is supported AND CLIR code sub fields can be edited THEN "M" ELSE "N/A" (see Table A.2 PT_IXIT_2). C11605: IF CFU code sub fields can be edited THEN "M" ELSE "N/A" (see Table A.2 PT_IXIT_3). C11606: IF CFNA code sub fields can be edited THEN "M" ELSE "N/A" (see Table A.2 PT_IXIT_4). C11607: IF CFB code sub fields can be edited THEN "M" ELSE "N/A" (see Table A.2 PT_IXIT_5). C11608: IF NG1.M.5 "no-emission mode" is supported THEN "M" ELSE "N/A".				

Table A.8: Tones provision procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.20_2	Tones provision by the system - Dial-tone	7.4.15.2	O	TC_PT_NG1.N.20_BV_206
NG1.N.20_2	Tones provision by the system - Off-hook warning tone	7.4.15.2	O	TC_PT_NG1.N.20_BV_207
NG1.N.20_2	Tones provision by the system - Network congestion tone (external calls only)	7.4.15.2	O	TC_PT_NG1.N.20_BV_208

Table A.9: Headset management procedure supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.21_4	Re-dial of last outgoing call	7.4.16.4	O	TC_PT_NG1.N.21_BV_401
NG1.N.21_5	Re-dial of last incoming call	7.4.16.5	O	TC_PT_NG1.N.21_BV_501
NG1.N.21_6	Switching from headset to handset (headset initiated)	7.4.16.6	O	TC_PT_NG1.N.21_BV_601
NG1.N.21_7	Switching from headset to handset (handset initiated)	7.4.16.7	C12101	TC_PT_NG1.N.21_BV_705
C12101: This procedure applies to a handset and not a headset. IF the PT is a headset PP THEN "I" ELSE "O".				

Table A.10: Internal call codec priority procedure supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
GAP.N.31_6	Internal call codec priority	7.4.3.9	C1311	TC_PT_GAP.N.31_BV_601 TC_PT_GAP.N.31_BV_602
C1311: IF PP complies one of the exception cases to this procedure listed in Clause 7.4.3.9.2 THEN "N/A" ELSE "M" (see Table A.2 PT_IXIT_7)				

Table A.11: Enhanced security procedures supported

Procedure no	Procedure name	Reference to EN 300 444 [12]	Status	TC reference
GAP.N.35_2	Re-keying during a call	8.45.2	O	TC_PT_GAP.N.35_BV_201 TC_PT_GAP.N.35_BV_202 TC_PT_GAP.N.35_BV_203
GAP.N.35_3	Storing the Derived Cipher Key (DCK)	8.45.3	O	TC_PT_GAP.N.35_BV_301 TC_PT_GAP.N.35_BV_302 TC_PT_GAP.N.35_BV_303 TC_PT_GAP.N.35_BV_304 TC_PT_GAP.N.35_BV_305 TC_PT_GAP.N.35_BV_306

Table A.12: Easy PIN code registration procedure supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.A.1_3	Base station name selection	7.10.1.3.2	O	TC_PT_NG1.A.1_BV_301

Table A.13: Easy pairing registration procedure supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.A.2_5	Base station name selection	7.10.1.3.2	O	TC_PT_NG1.A.1_BV_301

A.1.4 PT relevant test cases list

According to the support of NG1.N.21 "Headset management" feature, the following configurations are possible:

- PT is a normal PT (not a headset portable part).
- PT is a headset portable part (i.e. "Support of the Headset management feature" capability bit in <<TERMINAL-CAPABILITY>> is set).

A.1.4.1 PT is a normal PT (not a headset portable part)

No restrictions or modifications are required. All mandatory test cases and those related to supported declarations are applicable.

NOTE: NG1.N.21_7 "Switching from headset to handset (handset initiated)" procedure within NG1.N.21 "Headset management" feature may be applicable for a normal PT (see table Table A.9).

A.1.4.2 PT is a headset portable part

Only the test cases subgroup NG1.N.21 "Headset management" feature is relevant (see Clause 6.21 TC_PT_NG1.N.21_xx). All mandatory test cases and those related to supported declarations within this subgroup are applicable.

A.2 Declarations for fixed part

A.2.1 Optional FT features

This Clause contains the optional features which can be declared by the manufacturer on the FT side.

Table A.14: Optional FT features supported

Feature no	Feature name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.9	3-party conference with established external and/or internal calls	7.4.3.7	O	TC_FT_NG1.N.9_BV_101 TC_FT_NG1.N.9_BV_102 TC_FT_NG1.N.9_BV_103 TC_FT_NG1.N.9_BV_104
NG1.N.10	Intrusion call	7.4.3.8	O	TC_FT_NG1.N.10_BV_101 TC_FT_NG1.N.10_BV_105 TC_FT_NG1.N.10_BV_106 TC_FT_NG1.N.10_BV_201 TC_FT_NG1.N.10_BV_202
NG1.N.11	Call deflection (internal or external)	7.4.4.2	O	TC_FT_NG1.N.11_BV_101 TC_FT_NG1.N.11_BV_201 TC_FT_NG1.N.11_BV_202
NG1.N.14	Multiple Lines	7.4.7	O	TC_FT_NG1.N.14_BV_301 TC_FT_NG1.N.14_BV_302 TC_FT_NG1.N.14_BV_303 TC_FT_NG1.N.14_BV_304 TC_FT_NG1.N.14_BV_305 TC_FT_NG1.N.14_BV_306 TC_FT_NG1.N.14_BV_401
NG1.N.15	Multiple calls	7.4.8	C201	TC_FT_NG1.N.15_BV_201 TC_FT_NG1.N.15_BV_202 TC_FT_NG1.N.15_BV_205 TC_FT_NG1.N.15_BV_206 TC_FT_NG1.N.15_BV_207 TC_FT_NG1.N.15_BV_208 TC_FT_NG1.N.15_BV_301
NG1.N.17	Calling line identity restriction	7.4.12	O	TC_FT_NG1.N.17_BV_201
NG1.N.22	Handling of lines where second calls are signalled in-band	7.4.3.10	O	TC_FT_NG1.N.22_BV_101 TC_FT_NG1.N.22_BV_301 TC_FT_NG1.N.22_BV_302 TC_FT_NG1.N.22_BV_303
NG1.A.1	Easy PIN code registration	7.10.1.1	O	TC_FT_NG1.A.1_BV_401 TC_FT_NG1.A.2_BV_501
NG1.A.3	Handset locator	7.10.2	O	TC_FT_NG1.A.3_BV_101
C201: IF NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on line 0 and line 1 THEN "N/A" ELSE "M" (see Table A.16 FT_IXIT_21 and Table A.17 FT_IXIT_31).				

A.2.2 Extra information for FT testing

In addition to the optional features supported, the supplier shall declare additional information related to the FT implementation and to the network line environment.

Table A.15: Implementation extra information for FT testing

Item no	Implementation extra information	Reference to TS 102 527-3 [14]	Possible values to be declared
FT_IXIT_11	Simultaneous accesses to the same list from 2 PPs	7.4.10.1	Not supported
			Supported
FT_IXIT_12	Default attachment after registration to at least one line	7.4.11.2	Not supported
			Supported
FT_IXIT_13	Associated melody field in contact list entry	7.4.10.5.7	Not supported
			Supported

The "line 0" is the default line used when running the single line test cases. The following extra information related to the behaviour of this line shall be given by the manufacturer.

Table A.16: Line 0 extra information for FT testing

Item no	Line extra information	Reference to TS 102 527-3 [14]	Possible values to be declared
FT_IXIT_20	Line 0 identifier value (lid 0)	7.4.5	00H to 09H (note 1)
FT_IXIT_21	Line 0 second call handling type	7.4.3.10	Common parallel calls
			Double calls with in-band signalling
FT_IXIT_22	Line 0 CC-state machine behaviour	7.4.6.1	Non early {CC-CONNECT}
			Early {CC-CONNECT}
FT_IXIT_23	Line 0 UTF-8 CNIP	7.4.17	Non UTF-8 enabled line
			UTF-8 enabled line
FT_IXIT_24	Line 0 parallel call release command (note 2)	7.4.3.10.3.2	Not supported
			Supported
FT_IXIT_25	Line 0 call waiting rejection command (note 2)	7.4.3.10.3.2	Not supported
			Supported
FT_IXIT_26	Line 0 putting a call on-hold command (note 2)	7.4.3.10.3.2	Not supported
			Supported
FT_IXIT_27	Line 0 resuming a call put on-hold command (note 2)	7.4.3.10.3.2	Not supported
			Supported
NOTE 1: Line identifier in the interval 0AH..7EH are not allowed within NG1.N.12_4 " Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE " procedure.			
NOTE 2: This extra information is only required when NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on this line, i.e. FT_IXIT_31 declared to ' Double calls with in-band signalling' value.			

IF NG1.N.14 "Multiple lines" is supported, the "line 1" is the second line used when running the multiple lines test cases. The following extra information related to the behaviour of this line shall be given by the manufacturer.

Table A.17: Line 1 extra information for FT testing

Item no	Line extra information	Reference to TS 102 527-3 [14]	Possible values to be declared
FT_IXIT_30	Line 1 identifier value (lid 1)	7.4.5	00H to 09H (note 1)
FT_IXIT_31	Line 1 second call handling type (note 2)	7.4.3.10	Common parallel calls Double calls with in-band signalling
FT_IXIT_32	Line 1 CC-state machine behaviour	7.4.6.1	Non early {CC-CONNECT} Early {CC-CONNECT}
FT_IXIT_33	Line 1 UTF-8 CNIP	7.4.17	Non UTF-8 enabled line UTF-8 enabled line
FT_IXIT_34	Line 1 parallel call release command (note 3)	7.4.3.10.3.2	Not supported Supported
FT_IXIT_35	Line 1 call waiting rejection command (note 3)	7.4.3.10.3.2	Not supported Supported
FT_IXIT_36	Line 1 putting a call on-hold command (note 3)	7.4.3.10.3.2	Not supported Supported
FT_IXIT_37	Line 1 resuming a call put on-hold command (note 3)	7.4.3.10.3.2	Not supported Supported
NOTE 1: Line identifier in the interval 0AH..7EH are not allowed within NG1.N.12_4 " Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE " procedure.			
NOTE 2: IF NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported THEN at least one line shall be ' Double calls with in-band signalling' second call handling type.			
NOTE 3: This extra information is only required when NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on this line, i.e. FT_IXIT_31 declared to ' Double calls with in-band signalling' value.			

A.2.3 Optional or conditional FT procedures

This Clause contains the optional or conditional procedures which can be declared by the manufacturer on the FT side.

Table A.18: Common parallel call procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.7_4	Call release and call release rejection	7.4.3.5.4	C20701	TC_FT_NG1.N.7_BV_401
NG1.N.7_8	Call waiting rejection (from PP to FP)	7.4.3.5.7	C20702	TC_FT_NG1.N.7_BV_801
NG1.N.7_9	Putting a call on-hold	7.4.3.5.8	C20703	TC_FT_NG1.N.7_BV_901
C20701: IF NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on line 0 AND the call release command is not supported by the line 0 THEN N/A ELSE m (see Table A.16 FT_IXIT_21 and FT_IXIT_24).				
C20702: IF NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on line 0 AND the call waiting rejection command is not supported by the line 0 THEN N/A ELSE m (see Table A.16 FT_IXIT_21 and FT_IXIT_25).				
C20703: IF NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on line 0 AND the putting a call on-hold command is not supported by the line 0 THEN N/A ELSE m (see Table A.16 FT_IXIT_21 and FT_IXIT_26).				

Table A.19: 3-party conference procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.9_1	3-party conference with two established external calls	7.4.3.7	O	TC_FT_NG1.N.9_BV_103
NG1.N.9_1	3-party conference with two established external calls on two different lines	7.4.3.7	C20901	TC_FT_NG1.N.9_BV_104
C20901: IF NG1.N.14 "Multiple lines" is supported THEN "O" ELSE "N/A".				

Table A.20: Call deflection procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.11_1	Call deflection (internal)	7.4.4.2	C21101	TC_FT_NG1.N.11_BV_101
C21101: IF NG1.N.14 "Multiple lines" is supported THEN "O" ELSE "N/A".				

Table A.21: Line identification procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.12_3	Line identification for a first external outgoing call using <<CALL-INFORMATION>> IE	7.4.5.2.2	C21201	TC_FT_NG1.N.12_BV_301
			C21201	TC_FT_NG1.N.12_BV_302
NG1.N.12_4	Backward-compatible line identification for a first external outgoing call using <<MULTI-KEYPAD>> IE	7.4.5.2.3	C21202	TC_FT_NG1.N.12_BV_401
			C21202	TC_FT_NG1.N.12_BV_402
NG1.N.12_5	FP managed line selection for a first external outgoing call	7.4.5.2.4	C21203	TC_FT_NG1.N.12_BV_501
			C21203	TC_FT_NG1.N.12_BV_502
C21201: Tests cases are exclusive: IF FP implements 'non early CC-CONNECT' on line 0 THEN run TC_FT_NG1.N.12_BV_301 ELSE run TC_FT_NG1.N.12_BV_302 (see Table A.16 FT_IXIT_22)				
C21202: Tests cases are exclusive: IF FP implements 'non early CC-CONNECT' on line 0 THEN run TC_FT_NG1.N.12_BV_401 ELSE run TC_FT_NG1.N.12_BV_402 (see Table A.16 FT_IXIT_22)				
C21203: Tests cases are exclusive: IF FP implements 'non early CC-CONNECT' on line 0 THEN run TC_FT_NG1.N.12_BV_501 ELSE run TC_FT_NG1.N.12_BV_502 (see Table A.16 FT_IXIT_22)				

Table A.22: Call identification procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.13_2	Call identifier assignment on outgoing call (FP to PP)	7.4.6.2	C21301	TC_FT_NG1.N.13_BV_201
			C21301	TC_FT_NG1.N.13_BV_202
C21301: Tests cases are exclusive: IF FP implements 'non early CC-CONNECT' on line 0 THEN run TC_FT_NG1.N.13_BV_201 ELSE run TC_FT_NG1.N.13_BV_202 (see Table A.16 FT_IXIT_22).				

Table A.23: Multiple lines procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.14_2	Incoming and outgoing external calls on a multiple line system	7.4.7.3	C21401	TC_FT_NG1.N.14_BV_303
NG1.N.14_2	Incoming and outgoing external calls on a multiple line system	7.4.7.3	C21402	TC_FT_NG1.N.14_BV_305
NG1.N.14_2	Incoming and outgoing external calls on a multiple line system	7.4.7.3	C21403	TC_FT_NG1.N.14_BV_306
C21401: IF (NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on line 1 AND the call release command is not supported by the line 1) OR (NG1.N.22 " Handling of lines where second calls are signalled in-band " is supported on line 0 AND the resuming a call put on-hold command is not supported by the line 0) THEN N/A ELSE m (see Table A.17 FT_IXIT_31 and FT_IXIT_34 or Table A.16 FT_IXIT_21 and FT_IXIT_27)				
C21402: TC_FT_NG1.N.15_BV_305 and TC_FT_NG1.N.15_BV_306 are exclusive: IF FP implements 'non early CC-CONNECT' on line 0 and line 1 THEN m ELSE N/A (see Table A.16 FT_IXIT_22 and Table A.17 FT_IXIT_32)				
C21403: TC_FT_NG1.N.15_BV_305 and TC_FT_NG1.N.15_BV_306 are exclusive: IF FP implements 'early CC-CONNECT' on line 0 and line 1 THEN m ELSE N/A (see Table A.16 FT_IXIT_22 and Table A.17 FT_IXIT_32)				

Table A.24: Multiple calls procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.15_2	Incoming and outgoing external calls on a multiple call line	7.4.8.2	C21501	TC_FT_NG1.N.15_BV_205
			C21501	TC_FT_NG1.N.15_BV_206
C21501: Tests cases are exclusive: IF FP implements 'non early CC-CONNECT' on line 0 THEN run TC_FT_NG1.N.15_BV_205 ELSE run TC_FT_NG1.N.15_BV_206 (see Table A.16 FT_IXIT_22).				

Table A.25: List access service procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.16_1	General considerations	7.4.10.1	C21601	TC_FT_NG1.N.16_BV_303
			C21601	TC_FT_NG1.N.16_BV_304
NG1.N.16_18	Outgoing calls list	7.4.10.5.4	O	TC_FT_NG1.N.16_BV_1801 TC_FT_NG1.N.16_BV_1802 TC_FT_NG1.N.16_BV_1803
NG1.N.16_20	All calls list	7.4.10.5.6	O	TC_FT_NG1.N.16_BV_2001 TC_FT_NG1.N.16_BV_2002 TC_FT_NG1.N.16_BV_2003
NG1.N.16_21	Contact list	7.4.10.5.7	C21602	TC_FT_NG1.N.16_BV_2109
NG1.N.16_23	All incoming calls list	7.4.10.5.11	O	TC_FT_NG1.N.16_BV_2301 TC_FT_NG1.N.16_BV_2302 TC_FT_NG1.N.16_BV_2303
NG1.N.16_26	Virtual contact list and call list per line	7.4.11.5	C21603	See TC_FT_NG1.N.14_*
NG1.N.16_30	FP IP address / type	7.4.11.3.4	O	TC_FT_NG1.N.16_BV_3001 TC_FT_NG1.N.16_BV_2401 TC_FT_NG1.N.16_BV_2402
NG1.N.16_31	FP IP address / value	7.4.11.3.5	O	TC_FT_NG1.N.16_BV_3001 TC_FT_NG1.N.16_BV_2401 TC_FT_NG1.N.16_BV_2402
NG1.N.16_32	FP IP address / subnet mask	7.4.11.3.6	O	TC_FT_NG1.N.16_BV_3001 TC_FT_NG1.N.16_BV_2401 TC_FT_NG1.N.16_BV_2402
NG1.N.16_33	FP IP address / gateway	7.4.11.3.7	O	TC_FT_NG1.N.16_BV_3001 TC_FT_NG1.N.16_BV_2401 TC_FT_NG1.N.16_BV_2402
NG1.N.16_34	FP IP address / DNS server	7.4.11.3.8	O	TC_FT_NG1.N.16_BV_3001 TC_FT_NG1.N.16_BV_2401 TC_FT_NG1.N.16_BV_2402
NG1.N.16_37	FP version / Hardware version	7.4.11.3.11	O	TC_FT_NG1.N.16_BV_3001 TC_FT_NG1.N.16_BV_2401 TC_FT_NG1.N.16_BV_2402
NG1.N.16_41	Dialling prefix	7.4.11.4.4	O	TC_FT_NG1.N.16_BV_4101 TC_FT_NG1.N.16_BV_4102
NG1.N.16_42	FP melody	7.4.11.4.5	O	TC_FT_NG1.N.16_BV_4201
NG1.N.16_43	FP volume	7.4.11.4.6	O	TC_FT_NG1.N.16_BV_4301
NG1.N.16_44	Blocked number	7.4.11.4.7	O	TC_FT_NG1.N.16_BV_4401 TC_FT_NG1.N.16_BV_4402
NG1.N.16_46	Intrusion call	7.4.11.4.9	O	TC_FT_NG1.N.16_BV_4601
NG1.N.16_47	Permanent CLIR	7.4.11.4.10	C21604	TC_FT_NG1.N.16_BV_4701
NG1.N.16_51	Emission mode	7.4.11.3.12	C21605	TC_FT_NG1.N.16_BV_5101
C21601: Tests cases are exclusive: IF FP supports simultaneous accesses to the same list from 2 PPs THEN run TC_FT_NG1.N.16_BV_304 ELSE run TC_FT_NG1.N.16_BV_303 (see Table A.15 FT_IXIT_11).				
C21602: IF NG1.N.16_18 "Outgoing calls list" is supported THEN "M" ELSE "N/A".				
C21603: IF NG1.N.14 "Multiple lines" is supported THEN "O" ELSE "N/A".				
C21604: IF NG1.N.17 "Calling line restriction" is supported THEN "M" ELSE "N/A".				
C21605: IF NG1.M.5 "no-emission mode" is supported THEN "M" ELSE "N/A".				

For each mandatory and optional tone, the FP shall declare if procedure NG1.N.20_2 "Tones provision by the system" or NG1.N.20_3 "Transparency to tones provision by the network or PABX" is used to provide this tone. Only the TC(s) corresponding to the supported procedure shall be tested.

Table A.26: Tones provision procedures supported for each tone

Tone	Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
Ring back tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2201	TC_FT_NG1.N.20_BV_201 TC_FT_NG1.N.20_BV_210
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2201	TC_FT_NG1.N.20_BV_301 TC_FT_NG1.N.20_BV_304
Busy tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2202	TC_FT_NG1.N.20_BV_202
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2202	TC_FT_NG1.N.20_BV_302
Call waiting tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2203	TC_FT_NG1.N.20_BV_203
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2203	TC_FT_NG1.N.20_BV_303
Intercept tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2204	TC_FT_NG1.N.20_BV_205
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2204	TC_FT_NG1.N.20_BV_301
Negative acknowledgment tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2205	TC_FT_NG1.N.20_BV_204
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2205	TC_FT_NG1.N.20_BV_301
Dial tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2206	TC_FT_NG1.N.20_BV_206
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2206	TC_FT_NG1.N.20_BV_301 TC_FT_NG1.N.20_BV_304
Off hook warning tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2207	TC_FT_NG1.N.20_BV_207
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2207	TC_FT_NG1.N.20_BV_301
Network congestion tone	NG1.N.20_2	Tones provision by the system	7.4.15.2	C2208	Not tested
	NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3	C2208	TC_FT_NG1.N.20_BV_301

C2201, C2202, C2203, C2204, C2205: Tone is mandatory. The manufacturer shall declare which procedure is supported to provide this tone (NG1.N.20_2 or NG1.N.20_3) and run only the corresponding test cases.

C2206: Tone is optional. If declared, the manufacturer shall declare which procedure is supported to provide this tone (NG1.N.20_2 or NG1.N.20_3) and run only the corresponding test cases.

C2207: Tone is optional. If declared, the manufacturer shall declare which procedure is supported to provide this tone (NG1.N.20_2 or NG1.N.20_3) and run only the corresponding test cases.

C2208: Tone is optional. If declared, the manufacturer shall declare which procedure is supported to provide this tone (NG1.N.20_2 or NG1.N.20_3) and run only the corresponding test cases.

NOTE: For example Ring back tone is mandatory, depending on declaration:

- If supplier declares that FP uses procedure NG1.N.20_2 "Tones provision by the system", supplier shall perform tests cases TC_FT_NG1.N.20_BV_201 and TC_FT_NG1.N.20_BV_210.
- If supplier declares that FP uses procedure NG1.N.20_3 "Transparency to tones provision by the network or PABX", supplier shall perform tests case TC_FT_NG1.N.20_BV_301.

Table A.27: Handling of lines where second calls are signalled in-band procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.N.22_3	Off-hook CLIP enabled 'double call with in-band signalling' lines - call release (of the indicated call)	7.4.3.10.3.2	C22301	TC_FT_NG1.N.22_BV_301
NG1.N.22_3	Off-hook CLIP enabled 'double call with in-band signalling' lines - call waiting rejection	7.4.3.10.3.2	C22302	TC_FT_NG1.N.22_BV_302
NG1.N.22_3	Off-hook CLIP enabled 'double call with in-band signalling' lines - Putting a call on-hold	7.4.3.10.3.2	C22303	TC_FT_NG1.N.22_BV_303

C22301: IF the call release command is not supported by the line THEN m ELSE N/A (see Table A.16 FT_IXIT_24 or Table A.17 FT_IXIT_34 according to the tested line).

C22302: IF the call waiting rejection command is not supported by the line THEN "M" ELSE "N/A" (see Table A.16 FT_IXIT_25 or Table A.17 FT_IXIT_35 according to the tested line).

C22303: IF the putting a call on-hold command is not supported by the line THEN "M" ELSE "N/A" (see Table A.16 FT_IXIT_26 or Table A.17 FT_IXIT_36 according to the tested line).

Table A.28: CNIP procedure supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
GAP.N.34_2	UTF-8 CNIP	7.4.17.1	C2341	TC_FT_GAP.N.34_BV_201 TC_FT_GAP.N.34_GC_201
C2341: IF FP is connected to an UTF-8 CNIP enabled line THEN "M" ELSE "N/A" (see Table A.16 FT_IXIT_23).				

Table A.29: Enhanced security procedures supported

Procedure no	Procedure name	Reference to EN 300 444 [12]	Status	TC reference
GAP.N.35_2	Re-keying during a call	8.45.2	O	TC_FT_GAP.N.35_BV_201 TC_FT_GAP.N.35_BV_202 TC_FT_GAP.N.35_BV_203 TC_FT_GAP.N.35_BV_201 TC_FT_GAP.N.35_BV_204 TC_FT_GAP.N.35_BV_205 TC_FT_GAP.N.35_BV_206
GAP.N.35_3	Storing the Derived Cipher Key (DCK)	8.45.3	O	TC_FT_GAP.N.35_BV_301 TC_FT_GAP.N.35_BV_302 TC_FT_GAP.N.35_BV_303

Table A.30: Easy PIN code registration procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.A.1_3	Base station name selection	7.10.1.3.2	O	TC_FT_NG1.A.2_BV_501
NG1.A.1_4	Registration user feedback	7.10.1.3.3	O	TC_FT_NG1.A.1_BV_401

Table A.31: Easy pairing registration procedures supported

Procedure no	Procedure name	Reference to TS 102 527-3 [14]	Status	TC reference
NG1.A.2_5	Base station name selection	7.10.1.3.2	O	TC_FT_NG1.A.2_BV_501
NG1.A.2_6	Registration user feedback	7.10.1.3.3	O	TC_FT_NG1.A.1_BV_401

A.2.4 FT relevant test cases list

According to the support of NG1.N.22 "Handling of lines where second calls are signalled in-band" feature, the following configurations are possible:

- FT handles only 'Common parallel call procedures' lines.
- FT handles only 'double call with in-band signalling' lines.
- FT handles 'common parallel call procedures' lines and 'double call with in-band signalling' lines.

A.2.4.1 FT handling only 'Common parallel call procedures' lines

No restrictions or modifications are required. All mandatory test cases and those related to supported declarations are applicable.

A.2.4.2 FT handling only 'double call with in-band signalling' lines

By definition 'double call with in-band signalling' lines are 'single call mode' lines. Hence, NG1.N.15 "Multiple calls" test cases shall not be run. As a result, all mandatory test cases except the test cases subgroup N.15, and those related to supported declarations are applicable.

A.2.4.3 FT handling 'Common parallel call procedures' lines and 'double call with in-band signalling' lines

All mandatory test cases and those related to supported declarations, except the test cases subgroup N.22, are applicable on the 'common parallel call procedures' line.

In addition, the test cases subgroup N.22 "Handling of lines where second calls are signalled in-band" will be run on the 'double call with in-band signalling' line (see Clause 7.22 TC_FT_NG1.N.22_xx).

NOTE: An example of this of kind of system is a dual phone implementing a full VoIP line and a PSTN line without any tones detection.

Annex B (informative): List of NG Part 3 procedures

The following table gives the list of NG-DECT Part 3 procedures. The reference documents are TS 102 527-3 [14], TS 102 527-1 [13] or EN 300 444 [12]. The status of each feature and procedure are given in TS 102 527-3 [14].

The procedure number 'feature number_x' was created for the need of the present document. This procedure number is used in the TC naming convention. For example, the PT test cases related to the **NG1.N.2_1** "Codec change" procedure are called TC_PT_NG1.N.2_1xx.

1.1 New Generation DECT Speech Services support status		Reference
NG1.1	Narrow band ADPCM G.726 32 kbit/s voice service	5.1 [13]
NG1.2	Narrow band PCM G.711 64 kbit/s voice service	5.1 [13]
NG1.3	Wideband G.722 64 kbit/s voice service	5.1 [13]
NG1.4	Wideband G.729.1 32 kbit/s voice service	5.1 [13]
NG1.5	MPEG-4 ER AAC-LD super wideband 64 kbit/s voice service	5.1 [13]
NG1.6	MPEG-4 ER AAC-LD wideband 32 kbit/s voice service	5.1 [13]
1.2 NWK features support status		
NG1.N.1	Codec Negotiation	5.2 [13]
NG1.N.1_1	Exchange of codec list during registration and location registration	7.3.1 [13]
NG1.N.1_2	Basic service wideband speech and default attributes	7.3.2 [13]
NG1.N.1_3	Codec Negotiation during call establishment	7.3.3 [13]
NG1.N.2	Codec Switching	5.2 [13]
NG1.N.2_1	Codec Change	7.3.4 [13]
NG1.N.2_2	Slot type modification	7.3.5 [13]
NG1.N.2_3	MAC layer advanced connection slot type modification	7.6.7 [13]
NG1.N.2_4	MAC layer connection type modification: basic to/from advanced	7.6.6 [13]
NG1.N.3	Missed call notification	5.2 [14]
NG1.N.3_1	Generic events notification, general	7.4.1.1 [14]
NG1.N.3_2	Missed call notification	7.4.1.3 [14]
NG1.N.4	Voice message waiting notification	5.2 [14]
NG1.N.4_1	Generic events notification, general	7.4.1.1 [14]
NG1.N.4_2	Voice message waiting notification	7.4.1.2 [14]
NG1.N.5	Date and Time synchronization	5.2 [14]
NG1.N.5_1	Date and Time synchronization	7.4.2 [14]
NG1.N.6	Parallel calls	5.2 [14]
NG1.N.6_1	Parallel call common requirements	7.4.3.1 [14]
NG1.N.6_2	Control messages	7.4.3.2 [14]
NG1.N.6_3	Sending Keypad information	8.10 [12]
NG1.N.6_4	Codec change for parallel calls	7.4.3.3 [14]
NG1.N.6_5	Sending negative acknowledgement	7.4.3.4 [14]
NG1.N.6_6	Busy system or line notification	7.4.8.3 [14]
NG1.N.7	Common parallel call procedures (external or internal)	5.2 [14]
NG1.N.7_1	Outgoing parallel call initiation (external or internal)	7.4.3.5.1 [14]
NG1.N.7_2	Call waiting indication (external or internal)	7.4.3.5.2 [14]
NG1.N.7_3	Call toggle (external or internal)	7.4.3.5.3 [14]
NG1.N.7_4	Call release and call release rejection	7.4.3.5.4 [14]
NG1.N.7_5	Void	
NG1.N.7_6	Call waiting acceptance (from PP to FP)	7.4.3.5.6 [14]
NG1.N.7_7	Active call release with replacement (from PP to FP)	7.4.3.5.12 [14]
NG1.N.7_8	Call waiting rejection (from PP to FP)	7.4.3.5.7 [14]
NG1.N.7_9	Putting a call on-hold	7.4.3.5.8 [14]
NG1.N.7_10	Resuming a call put on-hold	7.4.3.5.9 [14]
NG1.N.7_11	CLIP on call waiting indication	7.4.3.5.10 [14]
NG1.N.7_12	CNIP on call waiting indication	7.4.3.5.11 [14]
NG1.N.8	Call transfer (external or internal)	5.2 [14]
NG1.N.8_1	Announced call transfer	7.4.3.6.1 [14]
NG1.N.8_2	Unannounced call transfer	7.4.3.6.2 [14]
NG1.N.8_3	Call re-injection to the system (external or internal)	7.4.3.6.3 [14]
NG1.N.8_4	Remote party CLIP on call transfer	7.4.3.6.4 [14]
NG1.N.8_5	Remote party CNIP on call transfer	7.4.3.6.5 [14]

NG1.N.9	3-party conference with established external and/or internal calls	5.2 [14]
NG1.N.9_1	3-party Conference with established internal and external calls	7.4.3.7 [14]
NG1.N.10	Intrusion call	5.2 [14]
NG1.N.10_1	Implicit call intrusion into a line in "single call" mode	7.4.3.8.1 [14]
NG1.N.10_2	Explicit call intrusion (from PP to FP)	7.4.3.8.2 [14]
NG1.N.11	Call deflection (external or internal)	5.2 [14]
NG1.N.11_1	Call deflection (internal)	7.4.4.2 [14]
NG1.N.11_2	Call deflection (external)	7.4.4.2 [14]
NG1.N.11_3	Call deflection control messages	7.4.4.1.1 [14]
NG1.N.12	Line identification	5.2 [14]
NG1.N.12_1	Line identification general requirements	7.4.5.1 [14]
NG1.N.12_2	General line identification requirements for external outgoing calls	7.4.5.2.1 [14]
NG1.N.12_3	Line identification for a first external outgoing call using <<CALL-INFO>> IE	7.4.5.2.2 [14]
NG1.N.12_4	Line identification for a <u>first</u> external outgoing call using <<MULTI-KEYPAD>> IE	7.4.5.2.3 [14]
NG1.N.12_5	FP managed line selection for a <u>first</u> external outgoing call	7.4.5.2.4 [14]
NG1.N.12_6	General line identification requirements for external incoming calls	7.4.5.3.1 [14]
NG1.N.12_7	Line identification for a first external incoming call	7.4.5.3.2 [14]
NG1.N.13	Call identification	5.2 [14]
NG1.N.13_1	Call identifier general requirements	7.4.6.1 [14]
NG1.N.13_2	Call identifier assignment on outgoing call (FP to PP)	7.4.6.2 [14]
NG1.N.13_3	Call identifier assignment on incoming call (FP to PP)	7.4.6.3 [14]
NG1.N.13_4	Call status indication to the handset (FP to PP)	7.4.6.4 [14]
NG1.N.14	Multiple Lines	5.2 [14]
NG1.N.14_1	Multiple lines common requirements	7.4.7.1 [14]
NG1.N.14_2	Terminal attachment and line settings	7.4.7.2 [14]
NG1.N.14_3	Incoming and outgoing external calls on a multiple line system	7.4.7.3 [14]
NG1.N.14_4	Internal calls in multiple line context	7.4.7.4 [14]
NG1.N.14_5	Compatibility with non multiple line PP or FP	7.4.7.5 [14]
NG1.N.15	Multiple calls	5.2 [14]
NG1.N.15_1	Multiple calls general requirements	7.4.8.1 [14]
NG1.N.15_2	Incoming and outgoing external calls on a multiple call line	7.4.8.2 [14]
NG1.N.15_3	Busy system or line notification	7.4.8.3 [14]
NG1.N.16	List access service	5.2 [14]
NG1.N.16_1	General considerations	7.4.10.1 [14]
NG1.N.16_2	List change notification	7.4.10.2 [14]
NG1.N.16_3	Start / end session	7.4.10.4.1 [14]
NG1.N.16_4	Query supported entry fields	7.4.10.4.2 [14]
NG1.N.16_5	Read entries	7.4.10.4.3 [14]
NG1.N.16_6	Edit entry	7.4.10.4.4 [14]
NG1.N.16_7	Save entry	7.4.10.4.5 [14]
NG1.N.16_8	Delete entry	7.4.10.4.6 [14]
NG1.N.16_9	Delete list	7.4.10.4.7 [14]
NG1.N.16_10	Search entries	7.4.10.4.8 [14]
NG1.N.16_11	Negative acknowledgement	7.4.10.4.9 [14]
NG1.N.16_12	Data packet / Last data packet	7.4.10.4.10 [14]
NG1.N.16_13	DECT system and line settings considerations	7.4.11.1 [14]
NG1.N.16_14	Interactions between registration, attachment of handsets and lists	7.4.11.2 [14]
NG1.N.16_15	Fields description	7.4.10.5.1 [14]
	[Supported lists:]	
NG1.N.16_16	List of supported lists	7.4.10.5.2 [14]
NG1.N.16_17	Missed calls list	7.4.10.5.3 [14]
NG1.N.16_18	Outgoing calls list	7.4.10.5.4 [14]
NG1.N.16_19	Incoming accepted calls list	7.4.10.5.5 [14]
NG1.N.16_20	All calls list	7.4.10.5.6 [14]
NG1.N.16_21	Contact list	7.4.10.5.7 [14]
NG1.N.16_22	Internal names list	7.4.10.5.8 [14]
NG1.N.16_23	All incoming calls list	7.4.10.5.11 [14]
NG1.N.16_24	DECT system settings list	7.4.11.3 [14]
NG1.N.16_25	Line settings list	7.4.11.4 [14]
NG1.N.16_26	Virtual contact list and call list per line	7.4.11.5 [14]

	[Supported DECT system settings]	
NG1.N.16_27	Current PIN code	7.4.11.3.1 [14]
NG1.N.16_28	Clock master	7.4.11.3.2 [14]
NG1.N.16_29	Base reset	7.4.11.3.3 [14]
NG1.N.16_30	FP IP address / type	7.4.11.3.4 [14]
NG1.N.16_31	FP IP address / value	7.4.11.3.5 [14]
NG1.N.16_32	FP IP address / subnet mask	7.4.11.3.6 [14]
NG1.N.16_33	FP IP address / gateway	7.4.11.3.7 [14]
NG1.N.16_34	FP IP address / DNS server	7.4.11.3.8 [14]
NG1.N.16_35	FP version / Firmware version	7.4.11.3.9 [14]
NG1.N.16_36	FP version / EEPROM version	7.4.11.3.10 [14]
NG1.N.16_37	FP version / Hardware version	7.4.11.3.11 [14]
NG1.N.16_51	Emission mode	7.4.11.3.12 [14]
NG1.N.16_52	New PIN code	7.4.11.3.13 [14]
	[Supported line settings]	
NG1.N.16_38	Line name	7.4.11.4.1 [14]
NG1.N.16_39	Line id	7.4.11.4.2 [14]
NG1.N.16_40	Attached handsets	7.4.11.4.3 [14]
NG1.N.16_41	Dialling prefix	7.4.11.4.4 [14]
NG1.N.16_42	FP melody	7.4.11.4.5 [14]
NG1.N.16_43	FP volume	7.4.11.4.6 [14]
NG1.N.16_44	Blocked number	7.4.11.4.7 [14]
NG1.N.16_45	Multiple calls mode (single/multiple)	7.4.11.4.8 [14]
NG1.N.16_46	Intrusion call	7.4.11.4.9 [14]
NG1.N.16_47	Permanent CLIR	7.4.11.4.10 [14]
NG1.N.16_48	Call forwarding Unconditional	7.4.11.4.11 [14]
NG1.N.16_49	Call forwarding on No Answer	7.4.11.4.12 [14]
NG1.N.16_50	Call forwarding on Busy subscriber	7.4.11.4.13 [14]
NG1.N.17	Calling line identity restriction	5.2 [14]
NG1.N.17_1	Considerations	7.4.12.1 [14]
NG1.N.17_2	Permanent CLIR mode (all calls)	7.4.12.2 [14]
NG1.N.17_3	Temporary CLIR mode (call by call)	7.4.12.3 [14]
NG1.N.18	Call forwarding (external calls)	5.2 [14]
NG1.N.18_1	Call Forwarding common requirements	7.4.13.1 [14]
NG1.N.18_2	External Call Forwarding Unconditional (CFU) to external number	7.4.13.2 [14]
NG1.N.18_3	External Call Forwarding on No Answer (CFNA) to external number	7.4.13.3 [14]
NG1.N.18_4	External Call Forwarding on Busy subscriber (CFB) to external number	7.4.13.4 [14]
NG1.N.19	DTMF handling	5.2 [14]
NG1.N.19_1	Uplink DTMF transmission at call setup when FP connected to classic switching network	7.4.14.1.1 [14]
NG1.N.19_2	Uplink DTMF transmission when connected	7.4.14.1.2 [14]
NG1.N.19_3	Downlink DTMF reception	7.4.14.2 [14]
NG1.N.19_4	Local DTMF feedback of dialled digits	7.4.14.3 [14]
NG1.N.20	Tones provision	5.2 [14]
NG1.N.20_1	General considerations	7.4.15.1 [14]
NG1.N.20_2	Tones provision by the system	7.4.15.2 [14]
NG1.N.20_3	Transparency to tones provision by the network or PABX	7.4.15.3 [14]
NG1.N.21	Headset management	5.2 [14]
NG1.N.21_1	Headset considerations	7.4.16.1 [14]
NG1.N.21_2	Headset call interception	7.4.16.2 [14]
NG1.N.21_3	Headset incoming call	7.4.16.3 [14]
NG1.N.21_4	Re-dial of last outgoing call	7.4.16.4 [14]
NG1.N.21_5	Re-dial of last incoming call	7.4.16.5 [14]
NG1.N.21_6	Switching from headset to handset (headset initiated)	7.4.16.6 [14]
NG1.N.21_7	Switching from headset to handset (handset initiated)	7.4.16.7 [14]
NG1.N.21_8	Compatibility with other telephony features and profiles	7.4.16.8 [14]

NG1.N.22	Handling of lines where second calls are signalled in-band	5.2 [14]
NG1.N.22_1	General requirements	7.4.3.10.1 [14]
NG1.N.22_2	Basic 'double call with in-band signalling' lines	7.4.3.10.2 [14]
NG1.N.22_3	Off-hook CLIP enabled 'double call with in-band signalling' lines	7.4.3.10.3 [14]
NG1.N.22_4	Use of transparent commands on IBSC lines (Basic or Off-hook CLIP enabled) or any other line	7.4.3.10.4 [14]
GAP.N.1	Outgoing call	4.1 [12]
GAP.N.2	Off hook	4.1 [12]
GAP.N.3	On hook (full release)	4.1 [12]
GAP.N.4	Dialled digits (basic)	4.1 [12]
GAP.N.5	Register recall	4.1 [12]
GAP.N.6	Go to DTMF signalling (defined tone length)	4.1 [12]
GAP.N.7	Pause (dialling pause)	4.1 [12]
GAP.N.8	Incoming call	4.1 [12]
GAP.N.9	Authentication of PP	4.1 [12]
GAP.N.10	Authentication of user	4.1 [12]
GAP.N.11	Location registration	4.1 [12]
GAP.N.12	On air key allocation	4.1 [12]
GAP.N.13	Identification of PP	4.1 [12]
GAP.N.14	Service class indication/assignment	4.1 [12]
GAP.N.15	Alerting	4.1 [12]
GAP.N.16	ZAP	4.1 [12]
GAP.N.17	Encryption activation FT initiated	4.1 [12]
GAP.N.18	Subscription registration procedure on-air	4.1 [12]
GAP.N.19	Link control	4.1 [12]
GAP.N.20	Terminate access rights FT initiated	4.1 [12]
GAP.N.21	Partial release	4.1 [12]
GAP.N.22	Go to DTMF (infinite tone length)	4.1 [12]
GAP.N.23	Go to Pulse	4.1 [12]
GAP.N.24	Signalling of display characters	4.1 [12]
GAP.N.25	Display control characters	4.1 [12]
GAP.N.26	Authentication of FT	4.1 [12]
GAP.N.27	Encryption activation PT initiated	4.1 [12]
GAP.N.28	Encryption deactivation FT initiated	4.1 [12]
GAP.N.29	Encryption deactivation PT initiated	4.1 [12]
GAP.N.30	Calling Line Identification Presentation (CLIP)	4.1 [12]
GAP.N.31	Internal call	4.1 [12]
GAP.N.31_1	Internal call setup	7.3.6 [13]
GAP.N.31_2	Internal call keypad	4.1 [12]
GAP.N.31_3	Internal call CLIP	4.1 [12]
GAP.N.31_4	Internal call CNIP	4.1 [12]
GAP.N.31_5	UTF-8 CNIP	7.4.17 [14]
GAP.N.31_6	Internal call codec priority	7.4.3.9 [14]
GAP.N.32	Service call	4.1 [12]
GAP.N.33	Enhanced U- plane connection	4.1 [12]
GAP.N.34	Calling Name Identification Presentation (CNIP)	4.1 [12]
GAP.N.34_1	Calling Name Identification Presentation (CNIP) Indication	8.42 [12]
GAP.N.34_2	UTF-8 CNIP	7.4.17 [14]
GAP.N.35	Enhanced security	4.1 [12]
GAP.N.35_1	Encryption of all calls	8.45.1 [12]
GAP.N.35_2	Re-keying during a call	8.45.2 [12]
GAP.N.35_3	Early encryption	8.45.3 [12]
GAP.N.35_4	Subscription requirements	8.45.4 [12]
GAP.N.35_5	Behaviour against legacy devices	8.45.5 [12]

1.3 Data Link Control (DLC) services support status		
NG1.D.1	LU1 Transparent UnProtected service (TRUP) Class 0 /minimum_delay	5.3 [13]
NG1.D.2	LU1 Transparent UnProtected service (TRUP) Class 0	5.3 [13]
NG1.D.3	LU7 64 kbit/s protected bearer service	5.3 [13]
NG1.D.4	LU 12 Unprotected Framed service (UNF) Class 0	5.3 [13]
NG1.D.5	FU1 DLC frame	5.3 [13]
NG1.D.6	FU7 DLC frame	5.3 [13]
NG1.D.7	FU12 DLC frame with adaptation for codec G.729.1	5.3 [13]
GAP.D.1	LAPC class A service and Lc	5.1 [12]
GAP.D.2	C _S channel fragmentation and recombination	5.1 [12]
GAP.D.3	Broadcast Lb service	5.1 [12]
GAP.D.4	Intra-cell voluntary connection handover	5.1 [12]
GAP.D.5	Intercell voluntary connection handover	5.1 [12]
GAP.D.6	Encryption activation	5.1 [12]
GAP.D.7	LU1 TRUP Class 0/min_delay	5.1 [12]
GAP.D.8	FU1	5.1 [12]
GAP.D.9	Encryption deactivation	5.1 [12]
1.4 Medium Access Control (MAC) services support status		
NG1.M.1	I _N minimum delay symmetric MAC service type	5.4 [13]
NG1.M.2	I _N normal delay symmetric MAC service type	5.4 [13]
NG1.M.3	I _{PQ} error_detection symmetric MAC service type	5.4 [13]
NG1.M.4	Advanced connections	5.4 [13]
NG1.M.5	'no-emission' mode	5.4 [14]
GAP.M.1	General	5.1 [12]
GAP.M.2	Continuous broadcast	5.1 [12]
GAP.M.3	Paging broadcast	5.1 [12]
GAP.M.4	Basic connections	5.1 [12]
GAP.M.5	C _S higher layer signalling	5.1 [12]
GAP.M.6	Quality control	5.1 [12]
GAP.M.7	Encryption activation	5.1 [12]
GAP.M.8	Extended frequency allocation	5.1 [12]
GAP.M.9	Bearer Handover, intra-cell	5.1 [12]
GAP.M.10	Bearer Handover, inter-cell	5.1 [12]
GAP.M.11	Connection Handover, intra-cell	5.1 [12]
GAP.M.12	Connection Handover, inter-cell	5.1 [12]
GAP.M.13	SARI support	5.1 [12]
GAP.M.14	Encryption deactivation	5.1 [12]
GAP.M.15	Re-keying	5.1 [12]
GAP.M.16	Early encryption	5.1 [12]
1.5 Physical layer (PHL) services support status		
NG1.P.1	2 level GFSK modulation	5.5 [13]
NG1.P.2	Physical Packet P32	5.5 [13]
NG1.P.3	Physical Packet P64	5.5 [13]
NG1.P.4	Physical Packet P67	5.5 [13]
NG1.P.5	Physical Packet P80	5.5 [13]
1.6 Speech coding and audio features support status		
NG1.SC.1	G.726 32 kbit/s ADPCM codec	5.6 [13]
NG1.SC.2	G.711 64 kbit/s PCM codec	5.6 [13]
NG1.SC.3	G.722 64 kbit/s 7 kHz wideband codec	5.6 [13]
NG1.SC.4	G.729.1 32 kbit/s 7 kHz wideband codec	5.6 [13]
NG1.SC.5	MPEG4 AAC-LD 64 kbit/s 14 kHz superwideband codec	5.6 [13]
NG1.SC.6	MPEG4 AAC-LD 32 kbit/s 11 kHz wideband codec	5.6 [13]
NG1.SC.7	Packet loss Concealment (PLC) for G.722]	5.6 [13]
NG1.SC.8	Detection of Fax/modem tone	5.6 [13]
NG1.SC.9	Codec selection and switching	5.6 [13]
NG1.SC.10	PP Audio profile type 1a (classic GAP handset)	5.6 [13]
NG1.SC.11	PP Audio profile type 1b (improved GAP handset)	5.6 [13]
NG1.SC.12	PP Audio profile type 1c (HATS 3,1 kHz handset)	5.6 [13]
NG1.SC.13	PP Audio profile type 1d (HATS 3,1 kHz improved handset)	5.6 [13]
NG1.SC.14	PP Audio profile type 2a (ITU-T Recommendation P.311 [i.18] 7 kHz handset)	5.6 [13]
NG1.SC.15	PP Audio profile type 2b (HATS 7 kHz handset)	5.6 [13]
NG1.SC.16	PP Audio profile type 2c (HATS 7 kHz improved handset)	5.6 [13]
NG1.SC.17	PP Audio profile type 3a (HATS 3,1 kHz handsfree)	5.6 [13]
NG1.SC.18	PP Audio profile type 3b (HATS 3,1 kHz improved handsfree)	5.6 [13]

NG1.SC.19	PP Audio profile type 4a (HATS 7 kHz handsfree)	5.6 [13]
NG1.SC.20	PP Audio profile type 4b (HATS 7 kHz improved handsfree)	5.6 [13]
NG1.SC.21	PP Audio profile type 5a superwideband (14 kHz) handset	5.6 [13]
NG1.SC.22	PP Audio profile type 5b superwideband (14 kHz) handsfree	5.6 [13]
NG1.SC.23	FP Audio type 1b (new ISDN 3,1 kHz)	5.6 [13]
NG1.SC.24	PP echo canceller for FP, narrowband	5.6 [13]
NG1.SC.25	PP echo suppressor for FP, narrowband	5.6 [13]
NG1.SC.26	FP Audio type 2 (analog PSTN 3,1 kHz)	5.6 [13]
NG1.SC.27	FP Audio type 3 (VoIP 3,1 kHz)	5.6 [13]
NG1.SC.28	FP Audio type 4 (ISDN wideband)	5.6 [13]
NG1.SC.29	FP Audio type 5 (VoIP wideband)	5.6 [13]
NG1.SC.30	PP echo canceller for FP, wideband	5.6 [13]
NG1.SC.31	PP echo suppressor for FP, wideband	5.6 [13]
NG1.SC.32	FP Audio type 6a (internal call)	5.6 [13]
NG1.SC.33	FP Audio type 6b (internal conference)	5.6 [13]
NG1.SC.34	Adaptive volume control for FP	5.6 [13]
1.7 Application features support status		
NG1.A.1	Easy PIN-code registration	5.7 [14]
NG1.A.1_1	Registration mode automatic access	7.10.1.3.1 [14]
NG1.A.1_2	Searching mode and PIN code requests	7.10.1.1.1 [14]
NG1.A.1_3	Base station name selection	7.10.1.3.2 [14]
NG1.A.1_4	Registration user feedback	7.10.1.3.3 [14]
NG1.A.2	Easy pairing registration	5.7 [14]
NG1.A.2_1	Easy pairing description	7.10.1.2.1 [14]
NG1.A.2_2	Registration mode automatic access	7.10.1.3.1 [14]
NG1.A.2_3	Base station limited registration mode	7.10.1.2.2 [14]
NG1.A.2_4	Searching mode request	7.10.1.2.3 [14]
NG1.A.2_5	Base station name selection	7.10.1.3.2 [14]
NG1.A.2_6	Registration user feedback	7.10.1.3.3 [14]
NG1.A.3	Handset locator	5.7 [14]
NG1.A.3_1	Handset locator	7.10.2 [14]
GAP.A.1	AC_bitstring_mapping	4.2 [12]
GAP.A.2	Multiple subscription registration	4.2 [12]
GAP.A.3	Manual entry of the PARK	4.2 [12]
GAP.A.4	Terminal identity number assignment in mono cell system	4.2 [12]

History

Document history		
V1.1.1	April 2010	Publication