



**Intelligent Transport Systems (ITS);
Testing;
Conformance test specifications for
Cooperative Awareness Basic Service (CA);
Part 3: Abstract Test Suite (ATS) and
Protocol Implementation eXtra Information for Testing (PIXIT);
Release 2**

ReferenceRTS/ITS-001971

KeywordsATS, ITS, PIXIT, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	6
3 Definition of terms, symbols and abbreviations.....	7
3.1 Terms.....	7
3.2 Symbols.....	7
3.3 Abbreviations	7
4 Abstract Test Method (ATM).....	8
4.1 Abstract protocol tester	8
4.2 Test Configuration.....	8
4.3 Test architecture	9
4.4 Ports and ASPs (Abstract Services Primitives)	9
4.4.1 Introduction.....	9
4.4.2 Primitives of the camPort	10
4.4.3 Primitives of the utPort	10
4.5 Executing CA tests in secured mode	10
4.6 ETSI test adapter	10
5 Untestable Test Purposes.....	11
6 ATS conventions	11
6.1 Introduction	11
6.2 Testing conventions.....	11
6.2.1 Testing states	11
6.2.1.1 Initial state.....	11
6.2.1.2 Final state.....	11
6.2.2 Message types - ASN.1 definitions.....	11
6.3 Naming conventions.....	12
6.3.1 Introduction.....	12
6.3.2 General guidelines	12
6.3.3 ITS specific TTCN-3 naming conventions	13
6.3.4 Usage of Log statements.....	13
6.3.5 Test Case (TC) identifier	14
Annex A (normative): ATS in TTCN-3.....	15
A.1 TTCN-3 files and other related modules	15
Annex B (normative): Partial PIXIT pro forma for CA	16
B.1 The right to copy	16
B.2 Introduction	16
B.3 Identification summary.....	16
B.4 ATS summary	16
B.5 Test laboratory.....	17
B.6 Client identification.....	17
B.7 SUT	17
B.8 Protocol layer information.....	18

B.8.1	Protocol identification	18
B.8.2	IUT information	18
Annex C (normative): PCTR pro forma for CA		19
C.1	The right to copy	19
C.2	Introduction	19
C.3	Identification summary.....	19
C.3.1	Protocol conformance test report.....	19
C.3.2	IUT identification	19
C.3.3	Testing environment.....	20
C.3.4	Limits and reservation	20
C.3.5	Comments.....	20
C.4	IUT Conformance status	20
C.5	Static conformance summary	21
C.6	Dynamic conformance summary.....	21
C.7	Static conformance review report.....	21
C.8	Test campaign report.....	22
C.9	Observations.....	23
History		24

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Intelligent Transport Systems (ITS).

The present document is part 3 of a multi-part deliverable covering Conformance test specifications for Cooperative Awareness Basic Service (CA), as identified below:

Part 1: "Test requirements and Protocol Implementation Conformance Statement (PICS) pro forma";

Part 2: "Test Suite Structure and Test Purposes (TSS & TP)";

Part 3: "Abstract Test Suite (ATS) and Protocol Implementation eXtra Information for Testing (PIXIT)".

The development of ITS test specifications follows the guidance provided in ETSI EG 202 798 [i.1]. Therefore this ATS documentation is also based on the guidance provided in ETSI EG 202 798 [i.1].

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document contains the Abstract Test Suite (ATS) for Cooperative Awareness Basic Service (CA) as defined in ETSI TS 103 900 [1] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [i.7].

The objective of the present document is to provide a basis for conformance tests for Cooperative Awareness Basic Service (CA) equipment giving a high probability of interoperability between different manufacturers' equipment.

The ISO standards for the methodology of conformance testing (ISO/IEC 9646-1 [i.4] and ISO/IEC 9646-2 [i.5]) as well as the ETSI rules for conformance testing (ETSI ETS 300 406 [i.8]) are used as a basis for the test methodology.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found in the [ETSI docbox](#).

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] [ETSI TS 103 900 \(V2.2.1\)](#): "Intelligent Transport Systems (ITS); Facilities Layer; Cooperative Awareness Service; Release 2".
- [2] [ETSI TS 102 868-1 \(V2.1.1\)](#): "Intelligent Transport Systems (ITS); Testing; Conformance test specifications for Cooperative Awareness Basic Service (CA); Part 1: Test requirements and Protocol Implementation Conformance Statement (PICS) pro forma; Release 2".
- [3] [ETSI TS 102 868-2 \(V2.1.1\)](#): "Intelligent Transport Systems (ITS); Testing; Conformance test specifications for Cooperative Awareness Basic Service (CA); Part 2: Test Suite Structure and Test Purposes (TSS & TP); Release 2".
- [4] [ETSI TS 102 894-2 \(V2.3.1\)](#): "Intelligent Transport Systems (ITS); Users and applications requirements; Part 2: Applications and facilities layer common data dictionary; Release 2".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents may be useful in implementing an ETSI deliverable or add to the reader's understanding, but are not required for conformance to the present document.

- [i.1] ETSI EG 202 798 (V1.1.1): "Intelligent Transport Systems (ITS); Testing; Framework for conformance and interoperability testing".
- [i.2] ETSI TS 103 096-3 (V1.3.1): "Intelligent Transport Systems (ITS); Testing; Conformance test specifications for ITS Security; Part 3: Abstract Test Suite (ATS) and Protocol Implementation eXtra Information for Testing (PIXIT)".

- [i.3] ETSI TR 103 099 (V1.4.1): "Intelligent Transport Systems (ITS); Architecture of conformance validation framework".
- [i.4] ISO/IEC 9646-1 (1994): "Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 1: General concepts".
- [i.5] ISO/IEC 9646-2 (1994): "Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 2: Abstract Test Suite specification".
- [i.6] ISO/IEC 9646-6 (1994): "Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 6: Protocol profile test specification".
- [i.7] ISO/IEC 9646-7 (1995): "Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 7: Implementation Conformance Statements".
- [i.8] ETSI ETS 300 406 (1995): "Methods for testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
- [i.9] ETSI ES 201 873-1 (V4.5.1): "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 1: TTCN-3 Core Language".
- [i.10] ETSI ES 201 873-7 (V4.5.1): "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 7: Using ASN.1 with TTCN-3".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI TS 103 900 [1], ISO/IEC 9646-1 [i.4] and ISO/IEC 9646-7 [i.7] apply.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
ATM	Abstract Test Method
ATS	Abstract Test Suite
BTP	Basic Transport Protocol
BV	Valid test events for Behaviour tests
CA	Cooperative Awareness Basic Service
CAM	Cooperative Awareness Messages
CRS	Crash Status
FMT	Message Format
GeoN	GeoNetworking
GFQ	Generation Frequency
GNSS	Global Navigation Satellite System
INA	Information Adaptation
ISO	International Organization for Standardization
ITS	Intelligent Transport Systems
IUT	Implementation Under Test
LDM	Local Dynamic Map
MSD	Message Dissemination
MSG	Message Generation

MSP	Message Processing
MTC	Main Test Component
PAR	Parameter
PCTR	Protocol Conformance Testing Report
PICS	Protocol Implementation Conformance Statement
PIXIT	Partial Protocol Implementation eXtra Information for Testing
PX	Pixit
SAP	Service Access Point
SCS	System Conformance Statement
SCTR	Static Conformance Test Report
SSP	Service Specific Permissions
SUT	System Under Test
TC	Test Case
TI	Timer tests
TP	Test Purposes
TS	Test System
TSS	Test Suite Structure
TTCN	Testing and Test Control Notation

4 Abstract Test Method (ATM)

4.1 Abstract protocol tester

The abstract protocol tester used by this test suite is described in figure 1. The test system will simulate valid and invalid protocol behaviour, and will analyse the reaction of the IUT.

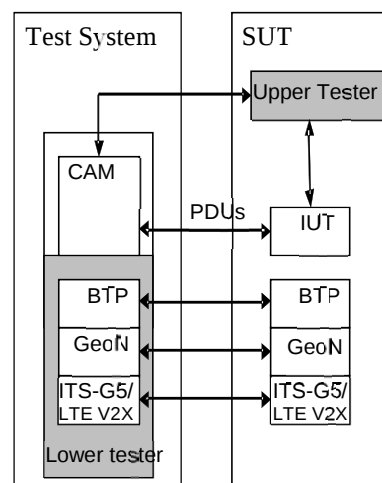


Figure 1: Abstract protocol tester - CA

4.2 Test Configuration

This test suite uses a unique test configuration in order to cover the different test scenarios. In this configuration, the tester simulates one ITS station implementing the CAM protocol.

4.3 Test architecture

The present document implements the general TTCN-3 test architecture described in ETSI EG 202 798 [i.1], clauses 6.3.2 and 8.3.1.

Figure 2 shows the test architecture used for the CA ATS. The CA test component requires using only the Main Test Component (MTC). The MTC communicates with the CA SUT over the camPort. The camPort is used to exchange CA protocol messages between the CA test component and the CA IUT.

The Upper tester entity in the SUT enables triggering CA functionalities by simulating primitives from application or LDM entities. It is required to trigger the CA layer in the SUT to send CA messages, which are resulting from upper layer primitives. Furthermore, receiving CA messages may result for the CA layer in sending primitives to the upper layer (sending Data to LDM for instance).

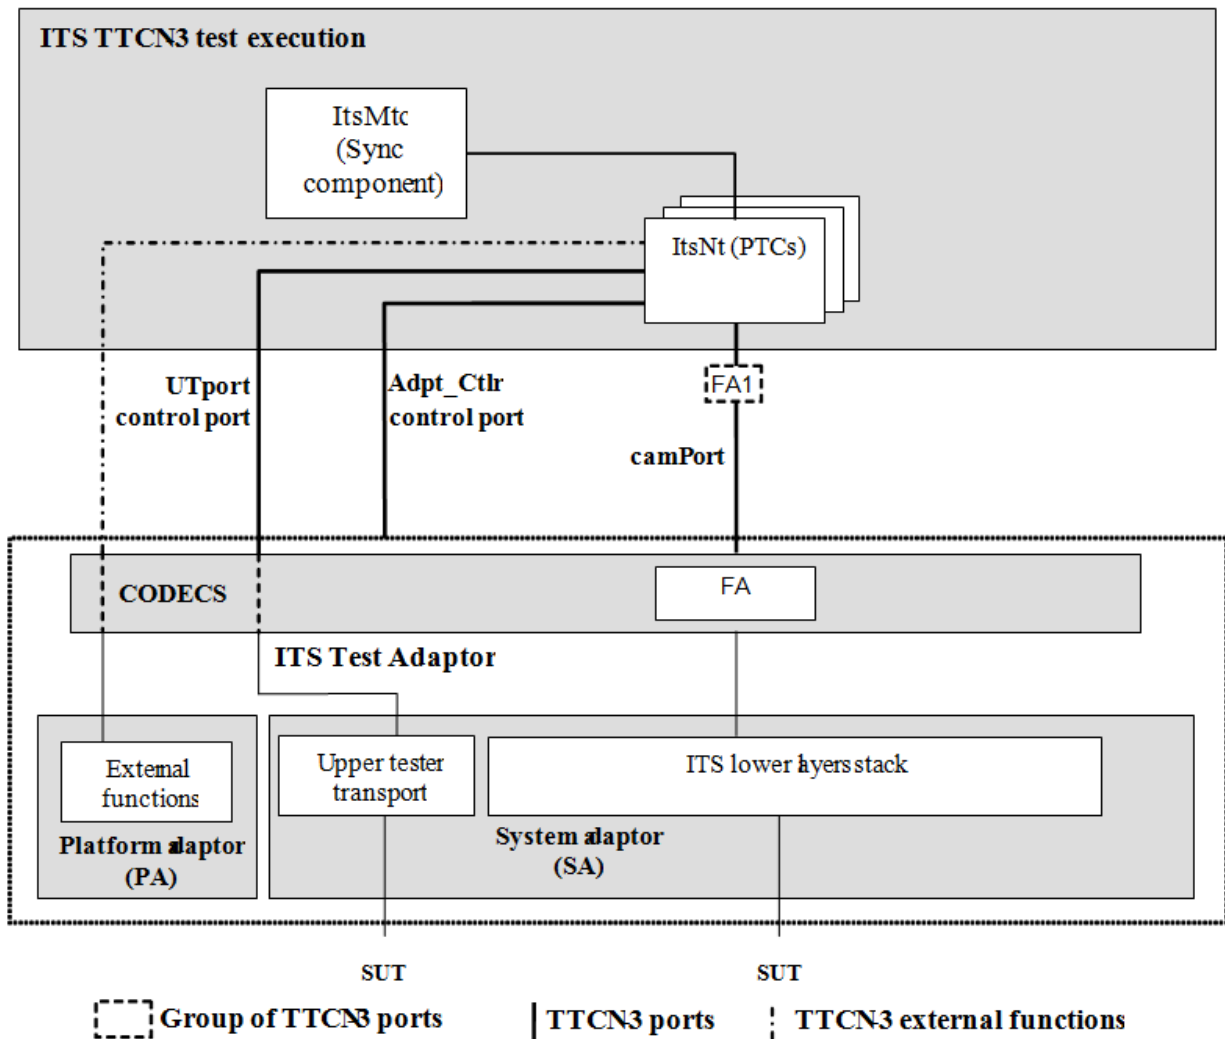


Figure 2: Test system architecture

4.4 Ports and ASPs (Abstract Services Primitives)

4.4.1 Introduction

Two ports are used by the CA ATS:

- The camPort, of type CamPort.
- The utPort, of type UpperTesterPort.

4.4.2 Primitives of the camPort

Two types of primitives are used in the camPort:

- The CamInd primitive used to receive messages of type CamPdu.
- The CamReq primitive used to send messages of type CamPdu.

These two primitives use the CamPdu type, which is declared in the CAM.asn ASN.1 module, following the ASN.1 definition from ETSI TS 103 900 [1].

```
CamPdu ::= SEQUENCE {
    header    ItsPduHeader,
    cam      CoopAwareness
}
```

4.4.3 Primitives of the utPort

This port uses two types of primitives:

- The UtInitialize primitive used to initialize IUT.
- The UtTrigger primitive used trigger upper layer events in IUT.

4.5 Executing CA tests in secured mode

All the CA tests, with the exception of the SSP tests, can be executed with security enabled or with security disabled. The choice of running the CA tests in secured or non-secured mode has no impact on the result of the CA tests because the test verdicts assess CA protocol behaviour only.

The SSP tests can only be executed in secured mode.

The choice of running the CA tests in secured or non-secured mode shall be controlled via the test suite parameter PICS_IS_IUT_SECURED, see table A.5/1 of ETSI TS 102 868-1 [2].

Before running the CA tests in secured mode, the following steps shall be executed:

- security certificates shall be generated for the tester as well as for the IUT, see ETSI TS 103 096-3 [i.2], clause 5.3.2.5;
- security certificates shall be installed onto the IUT, see ETSI TS 103 096-3 [i.2], clause 5.3.2.6;
- in case of usage of the ETSI test adapter, the following test adapter parameters need to be configured.

Test adapter parameter	Default value	Comment
TsSecuredRootPath	data/certificates	The path to the location where all certificates (tester and IUT certificates) are installed
TsSecuredConfigId	void	Name of the subfolder in TsSecuredRootPath in order to organize multiple IUTs
UtSecuredMode	FALSE	To use upper-tester interface in non-secured mode

4.6 ETSI test adapter

All information of the ETSI test adapter is described in ETSI TR 103 099 [i.3].

5 Untestable Test Purposes

Table 1 gives a list of TPs, which are not implemented in the ATS due to the chosen ATM or other restrictions.

Table 1: Untestable TPs

Test purpose	Reason
None	

6 ATS conventions

6.1 Introduction

The ATS conventions are intended to give a better understanding of the ATS but they also describe the conventions made for the development of the ATS. These conventions shall be considered during any later maintenance or further development of the ATS.

The ATS conventions contain two clauses, the testing conventions and the naming conventions. The testing conventions describe the functional structure of the ATS. The naming conventions describe the structure of the naming of all ATS elements.

To define the ATS, the guidelines of ETSI ETS 300 406 [i.8] were considered.

6.2 Testing conventions

6.2.1 Testing states

6.2.1.1 Initial state

All test cases start with the function `f_prInitialState`. This function brings the IUT in an "initialized" state by invoking the upper tester primitive `UtInitialize`.

6.2.1.2 Final state

All test cases end with the function `f_poDefault`. This function brings the IUT back in an "idle" state. As no specific actions are required for the idle state in ETSI TS 103 900 [1], the function `f_poDefault` does not invoke any action.

As necessary, further actions may be included in the `f_poDefault` function.

6.2.2 Message types - ASN.1 definitions

ASN.1 definitions from ETSI TS 103 900 [1] are directly imported in TTCN-3 using the ASN.1 import method specified in ETSI ES 201 873-7 [i.10].

The following example shows the TTCN-3 import statement used to import ASN.1 definitions in the TTCN-3 modules:

```
import from CAM_PDU_Descriptions language "ASN.1:1997" all;
```

Generic ASN.1 definitions (message header, station Id, etc.), are defined in the Common Data Dictionary ETSI TS 102 894-2 [4] ASN.1 module. Thus the CA ASN.1 modules shall import these definitions from the Common Data Dictionary ETSI TS 102 894-2 [4] ASN.1 module (see the following ASN.1 import statement extracted from the CA ASN.1 module):

```
IMPORTS
    ItsPduHeader, StationID, ...
FROM ITS-Container {
    itu-t(0) identified-organization(4) etsi(0) itsDomain(5) wg1(1) ts(102894) cdd(2) version(2)
};
```

6.3 Naming conventions

6.3.1 Introduction

This test suite follows the naming convention guidelines provided in the ETSI EG 202 798 [i.1].

6.3.2 General guidelines

The naming convention is based on the following underlying principles:

- in most cases, identifiers should be prefixed with a short alphabetic string (specified in table 2) indicating the type of TTCN-3 element it represents;
- suffixes should not be used except in those specific cases identified in table 2;
- prefixes and suffixes should be separated from the body of the identifier with an underscore ("_");

EXAMPLE 1: c_sixteen, t_wait.

- only module names, data type names and module parameters should begin with an upper-case letter. All other names (i.e. the part of the identifier following the prefix) should begin with a lower-case letter;
- the start of second and subsequent words in an identifier should be indicated by capitalizing the first character. Underscores should not be used for this purpose.

EXAMPLE 2: f_initialState.

Table 2 specifies the naming guidelines for each element of the TTCN-3 language indicating the recommended prefix, suffixes (if any) and capitalization.

Table 2: ETSI TTCN-3 generic naming conventions

Language element	Naming convention	Prefix	Example identifier
Module	Use upper-case initial letter	none	IPv6Templates
Group within a module	Use lower-case initial letter	none	messageGroup
Data type	Use upper-case initial letter	none	SetupContents
Message template	Use lower-case initial letter	m	m_setupInit
Message template with wildcard or matching expression	Use lower-case initial letters	mw_	mw_anyUserReply
Signature template	Use lower-case initial letter	s_	s_callSignature
Port instance	Use lower-case initial letter	none	signallingPort
Test component instance	Use lower-case initial letter	none	userTerminal
Constant	Use lower-case initial letter	c	c_maxRetransmission
Constant (defined within component type)	Use lower-case initial letter	cc	cc_minDuration
External constant	Use lower-case initial letter	cx	cx_macId
Function	Use lower-case initial letter	f	f_authentication()
External function	Use lower-case initial letter	fx	fx_calculateLength()
Altstep (incl. Default)	Use lower-case initial letter	a	a_receiveSetup()
Test case	Use ETSI numbering	TC	TC_COR_0009_47_ND
Variable (local)	Use lower-case initial letter	v	v_macId

Language element	Naming convention	Prefix	Example identifier
Variable (defined within a component type)	Use lower-case initial letters	vc_	vc_systemName
Timer (local)	Use lower-case initial letter	t_	t_wait
Timer (defined within a component)	Use lower-case initial letters	tc_	tc_authMin
Module parameters for PICS	Use all upper case letters	PICS	PICS_DOOROPEN
Module parameters for other parameters	Use all upper case letters	PX	PX_TESTER_STATION_ID
Formal Parameters	Use lower-case initial letter	p_	p_macId
Enumerated Values	Use lower-case initial letter	e_	e_syncOk

6.3.3 ITS specific TTCN-3 naming conventions

Next to such general naming conventions, table 3 shows specific naming conventions that apply to the ITS TTCN-3 test suite.

Table 3: ITS specific TTCN-3 naming conventions

Language element	Naming convention	Prefix	Example identifier
ITS Module	Use upper-case initial letter	Its"IUTname"	ItsCam_
Module containing types and values	Use upper-case initial letter	Its"IUTname"_TypesAndValues	ItsCam_TypesAndValues
Module containing Templates	Use upper-case initial letter	Its"IUTname"_Templates	ItsCam_Templates
Module containing test cases	Use upper-case initial letter	Its"IUTname"_TestCases	ItsCam_TestCases
Module containing functions	Use upper-case initial letter	Its"IUTname"_Functions	ItsCam_Functions
Module containing external functions	Use upper-case initial letter	Its"IUTname"_ExternalFunctions	ItsCam_ExternalFunctions
Module containing components, ports and message definitions	Use upper-case initial letter	Its"IUTname"_Interface	ItsCam_Interface
Module containing main component definitions	Use upper-case initial letter	Its"IUTname"_TestSystem	ItsCam_TestSystem
Module containing the control part	Use upper-case initial letter	Its"IUTname"_TestControl	ItsCam_TestControl

6.3.4 Usage of Log statements

All TTCN-3 log statements use the following format using the same order:

- Three asterisks.
- The TTCN-3 test case or function identifier in which the log statement is defined.
- One of the categories of log: INFO, WARNING, ERROR, PASS, FAIL, INCONC, TIMEOUT.
- Free text.
- three asterisks.

EXAMPLE 1: **log**("*** TC_CAM_MSG_BV_01: INFO: Initial conditions: First CAM message received ***");

Furthermore, the following rules are applied for the CA ATS:

- Log statements are used in the body of the functions, so that invocations of functions are visible in the test logs.
- All TTCN-3 setverdict statements are combined (as defined in ETSI ES 201 873-1 [i.9]) with a log statement following the same above rules (see example 2).

EXAMPLE 2: **setverdict**(pass, "*** TC_CAM_INA_CRS_BV_01: PASS: CAM message received with crashStatus = true ***").

6.3.5 Test Case (TC) identifier

Table 4 shows the test case naming convention, which follows the same naming convention as the test purposes.

Table 4: TC naming convention

Identifier	TC_<root>_<gr>_<sgr>_<x>_<nn> or TP_<root>_<gr>_<x>_<nn> when no <sgr>	Abbreviation	Description
	<root> = root	CAM	
	<gr> = group	MSD	Message Dissemination
		MSP	Message Processing
	<sgr> = sub- group	FMT	Message Format
		INA	Information Adaptation
		GFQ	Generation Frequency
		PAR	Lower layer parameter
	<x> = type of testing	BV	Behaviour tests to valid test events
		TI	Timer tests
	<nn> = sequential number		01 to 99

EXAMPLE: TP identifier: TP/CAM/MSD/BV/01
TC identifier: TC_CAM_MSD_BV_01.

Annex A (normative): ATS in TTCN-3

A.1 TTCN-3 files and other related modules

This test suite has been produced using the Testing and Test Control Notation (TTCN) according to ETSI ES 201 873-1 [i.9].

ETSI TS 103 900 [1], ETSI TS 102 868-1 [2] and ETSI TS 102 868-2 [3] have been applied to develop this test suite.

This test suite has been compiled error-free using two different commercial TTCN-3 compilers.

The TTCN-3 code of the test suite is available as a tagged version "2.1.1" and released at ETSI forge repository:

- https://forge.etsi.org/rep/ITS/ttcn/ats_cam_ts102868-3.git.

Annex B (normative): Partial PIXIT pro forma for CA

B.1 The right to copy

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the Partial PIXIT pro forma in this annex so that it can be used for its intended purposes and may further publish the completed Partial PIXIT.

B.2 Introduction

The PIXIT Pro forma is based on ISO/IEC 9646-6 (1994).

B.3 Identification summary

The Identification summary shall be as specified in table B.1.

Table B.1: Identification summary

PIXIT Number:	
Test Laboratory Name:	
Date of Issue:	
Issued to:	

B.4 ATS summary

The ATS summary shall be as specified in table B.2.

Table B.2: ATS summary

Protocol Specification:	ETSI TS 103 900 (V2.2.1)
Protocol to be tested:	CA (Cooperative Awareness Basic Service)
ATS Specification:	ETSI TS 102 868-3
Abstract Test Method:	Clause 4

B.5 Test laboratory

The Test laboratory info shall be specified as in table B.3.

Table B.3: Test laboratory info

Test Laboratory Identification:	
Test Laboratory Manager:	
Means of Testing:	
SAP Address:	

B.6 Client identification

The Client identification shall be specified as in table B.4.

Table B.4: Client identification

Client Identification:	
Client Test manager:	
Test Facilities required:	

B.7 SUT

SUT shall be specified as in table B.5.

Table B.5

Name:	
Version:	
SCS Number:	
Machine configuration:	
Operating System Identification:	
IUT Identification:	
PICS Reference for IUT:	
Limitations of the SUT:	
Environmental Conditions:	

B.8 Protocol layer information

B.8.1 Protocol identification

Protocol identification shall be as specified in table B.6.

Table B.6: Protocol identification

Name:	ETSI TS 103 900 (V2.2.1)
Version:	
PICS References:	ETSI TS 102 868-1 (V2.2.1)

B.8.2 IUT information

CA PIXITs shall be as in table B.7.

Table B.7: CA PIXITs

Identifier	Description	
PX_IUT_STATION_ID	Comment	Station Id sent by the IUT
	Type	Integer
	Default value	1
PX_IUT_STATION_TYPE	Comment	Station Type sent by the IUT
	Type	Integer
	Default value	1
PX_TESTER_STATION_ID	Comment	Station Id sent by the tester
	Type	Integer
	Default value	111 111
PX_TESTER_STATION_TYPE	Comment	Station Type sent by the tester
	Type	Integer
	Default value	1
PX_TS_LATITUDE	Comment	The Latitude of the tester (microdegrees)
	Type	Integer
	Default value	436 175 790
PX_TS_LONGITUDE	Comment	The Longitude of the tester (microdegrees)
	Type	Integer
	Default value	70 546 480
PX_TIME_DELTA	Comment	Tolerance to be applied when checking timestamps (ms)
	Type	Integer
	Default value	1 000
PX_GNSS_SCENARIO_SUPPORT	Comment	Does the IUT support GNSS scenarios?
	Type	Boolean
	Default value	FALSE
PX_CERT_FOR_TS	Comment	The certificate identifier that the tester (TS) shall use in case of secured IUT
	Type	Charstring
	Default value	"CERT_TS_A_AT"

Annex C (normative): PCTR pro forma for CA

C.1 The right to copy

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PCTR pro forma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

C.2 Introduction

The PCTR pro forma is based on ISO/IEC 9646-6 (1994).

C.3 Identification summary

C.3.1 Protocol conformance test report

A protocol conformance test report shall be as in table C.1.

Table C.1: Protocol conformance test report

PCTR Number:	
PCTR Date:	
Corresponding SCTR Number:	
Corresponding SCTR Date:	
Test Laboratory Identification:	
Test Laboratory Manager:	
Signature:	

C.3.2 IUT identification

An IUT shall be identified as specified in table C.2.

Table C.2: IUT identification

Name:	
Version:	
Protocol specification:	
PICS:	
Previous PCTR if any:	

C.3.3 Testing environment

The testing environment shall be as specified in table C.3.

Table C.3: Testing environment

PIXIT Number:	
ATS Specification:	
Abstract Test Method:	
Means of Testing identification:	
Date of testing:	
Conformance Log reference(s):	
Retention Date for Log reference(s):	

C.3.4 Limits and reservation

Additional information relevant to the technical contents or further use of the test report, or the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

.....

.....

.....

.....

.....

.....

C.3.5 Comments

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

.....

.....

.....

.....

.....

.....

C.4 IUT Conformance status

This IUT has or has not been shown by conformance assessment to be non-conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in clause C.3 in the present document) and there are no "FAIL" verdicts to be recorded (in clause C.6 in the present document) strike the words "has or", otherwise strike the words "or has not".

C.5 Static conformance summary

The PICS for this IUT is or is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

C.6 Dynamic conformance summary

The test campaign did or did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded (in clause C.6 of the present document) strike the words "did or" otherwise strike the words "or did not".

Summary of the results of groups of test:

.....

.....

.....

.....

.....

.....

.....

.....

C.7 Static conformance review report

If clause C.3 indicates non-conformance, this clause itemizes the mismatches between the PICS and the static conformance requirements of the specified protocol specification.

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

C.8 Test campaign report

Table C.4: Test cases

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause C.7)
TC_CAM_MSD_FMT_BV_01	Yes/No	Yes/No		
TC_CAM_MSD_FMT_BV_02	Yes/No	Yes/No		
TC_CAM_MSD_FMT_BV_03	Yes/No	Yes/No		
TC_CAM_MSD_FMT_BV_04	Yes/No	Yes/No		
TC_CAM_MSD_FMT_BV_05	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_01	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_02	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_03	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_04	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_05	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_06	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_07	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_08	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_09	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_10	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_11	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_12	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_13	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_14	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_15	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_16	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_17	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_18	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_19	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_20	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_21	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_22	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_23	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_24	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_25	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_26	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_27	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_28	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_29	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_30	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_31	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_32	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_33	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_34	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_01_35	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_02	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_03	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_04	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_05	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_06	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_07	Yes/No	Yes/No		
TC_CAM_MSD_INA_BV_08	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_TI_01	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_TI_02	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_TI_03	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_BV_04	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_BV_05	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_BV_06	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_TI_07	Yes/No	Yes/No		
TC_CAM_MSD_GFQ_TI_08	Yes/No	Yes/No		
TC_CAM_MSD_PAR_BV_01	Yes/No	Yes/No		
TC_CAM_MSD_PAR_BV_02	Yes/No	Yes/No		

C.9 Observations

[illegible]

History

Document history		
V1.1.1	March 2011	Publication
V1.2.1	April 2014	Publication
V1.3.1	July 2015	Publication
V1.4.1	March 2017	Publication
V1.5.1	April 2020	Publication
V2.1.1	July 2025	Publication