

# ETSI TS 103 161-16 V1.1.1 (2011-04)

---

*Technical Specification*

**Access, Terminals, Transmission and Multiplexing (ATTM);  
Integrated Broadband Cable and Television Networks;  
IPCablecom 1.5;  
Part 16: Signalling for Call Management Server**

---



---

Reference

DTS/ATTM-003011-16

---

Keywords

access, broadband, cable, IP, multimedia, PSTN

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaicor/ETSI\\_support.asp](http://portal.etsi.org/chaicor/ETSI_support.asp)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011.  
All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP™** is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**LTE™** is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Contents

Intellectual Property Rights .....	8
Foreword.....	8
1 Scope .....	10
2 References .....	10
2.1 Normative references .....	10
2.2 Informative references.....	12
3 Definitions and abbreviations.....	13
3.1 Definitions.....	13
3.2 Abbreviations .....	14
4 Void.....	15
5 Background and motivation .....	15
5.1 Requirements and Design Principles.....	16
5.2 IPCablecom Architecture .....	16
5.3 CMSS Trust Model .....	18
5.4 CMS to CMS Architectural Model.....	19
5.5 Overview of CMS Behaviour.....	21
5.6 Basic Telephony Call Flow .....	21
5.7 CMS-MGC Basic Telephony Call Flow .....	23
6 SIP PROFILE.....	26
6.1 Introduction .....	26
6.2 Overview of SIP Functionality .....	26
6.3 Terminology .....	26
6.4 Overview of Operation .....	26
6.5 Structure of the Protocol.....	26
6.6 Definitions.....	26
6.7 SIP Messages.....	26
6.7.1 Requests.....	27
6.7.2 Responses .....	27
6.7.3 Header Fields .....	27
6.7.4 Bodies .....	27
6.7.4.1 Message Body Types .....	27
6.7.4.2 Message Body Length.....	27
6.7.5 Framing SIP Messages.....	27
6.8 General User Agent Behaviour .....	27
6.8.1 UAC Behaviour .....	27
6.8.1.1 Generating the Request .....	28
6.8.1.2 Processing Responses.....	28
6.8.2 UAS Behaviour.....	29
6.8.3 Redirect Servers .....	29
6.9 Cancelling a Request.....	29
6.10 Registrations.....	29
6.11 Querying for Capabilities .....	29
6.12 Dialogs .....	29
6.13 Initiating a Session .....	29
6.14 Modifying an Existing Session.....	29
6.15 Terminating a Session .....	29
6.16 Proxy Behaviour.....	29
6.17 Transactions .....	30
6.18 Transport .....	30
6.19 Common Message Components .....	30
6.19.1 SIP URI Component .....	30
6.20 Header Fields.....	30
6.20.1 Accept.....	31

6.20.2	Accept-Encoding .....	31
6.20.3	Accept-Language .....	31
6.20.4	Alert-Info .....	31
6.20.5	Allow .....	31
6.20.6	Authentication-Info.....	31
6.20.7	Authorization .....	32
6.20.8	Call-ID .....	32
6.20.9	Call-Info.....	32
6.20.10	Contact.....	32
6.20.11	Content-Disposition .....	32
6.20.12	Content-Encoding .....	33
6.20.13	Content-Language.....	33
6.20.14	Content-Length.....	33
6.20.15	Content-Type .....	33
6.20.16	CSeq.....	33
6.20.17	Date.....	33
6.20.18	Error-Info.....	33
6.20.19	Expires .....	33
6.20.20	From.....	33
6.20.21	In-Reply-To .....	34
6.20.22	Max-Forwards.....	34
6.20.23	Min-Expires .....	34
6.20.24	MIME-Version .....	34
6.20.25	Organization .....	34
6.20.26	Priority .....	34
6.20.27	Proxy-Authenticate .....	34
6.20.28	Proxy-Authorization .....	34
6.20.29	Proxy-Require.....	34
6.20.30	Record-Route.....	35
6.20.31	Reply-To.....	35
6.20.32	Require.....	35
6.20.33	Retry-After.....	35
6.20.34	Route.....	35
6.20.35	Server.....	35
6.20.36	FSubject.....	35
6.20.37	Supported.....	35
6.20.38	Timestamp .....	35
6.20.39	To.....	35
6.20.40	Unsupported.....	36
6.20.41	User-Agent.....	36
6.20.42	Via .....	36
6.20.43	Warning .....	36
6.20.44	WWW-Authenticate .....	36
6.21	Response Codes.....	37
6.22	Usage of HTTP Authentication .....	37
6.23	S/MIME.....	37
6.24	Examples .....	37
6.25	Augmented BNF for the SIP Protocol.....	37
6.26	Security Considerations: Threat Model and Security Usage Recommendations.....	37
6.27	Table of Timer Values.....	37
7	SIP Extensions.....	38
7.1	URIs for Telephone Calls.....	39
7.1.1	Routing Number, Number Portability, Carrier Identification Code and Dial Around Indication Number .....	39
7.1.2	Procedures at an Originating CMS .....	40
7.1.3	Procedures at a Terminating CMS .....	40
7.1.4	Procedures at Proxy .....	40
7.2	Reliability of Provisional Responses .....	40
7.3	SIP UPDATE Method.....	40
7.4	Integration of Resource Management and SIP .....	41
7.4.1	Procedures at an Originating CMS .....	41

7.4.1.1	Default Operation Using QoS Preconditions Strength "Optional" .....	41
7.4.1.2	QoS Preconditions Strength "None" .....	41
7.4.1.3	QoS Preconditions Strength "Mandatory" .....	41
7.4.2	Procedures at a Terminating CMS .....	41
7.4.2.1	QoS Preconditions Strength "None" or "Optional" .....	41
7.4.2.2	QoS Preconditions Strength "Mandatory" .....	42
7.5	SIP-Specific Event Notification .....	42
7.6	The REFER Method .....	42
7.6.1	Procedures at an Originating CMS .....	42
7.6.2	Procedures at a Terminating CMS .....	42
7.7	SIP Proxy to Proxy Extensions for Supporting DCS .....	43
7.7.1	P-DCS-Trace-Party-ID .....	43
7.7.2	P-DCS-LAES and P-DCS-REDIRECT .....	43
7.7.2.1	P-DCS-LAES Header .....	43
7.7.2.2	Surveillance Procedures at Originating CMS .....	43
7.7.2.2.1	CMS <sub>O</sub> Receives REFER Request or Redirect Response .....	44
7.7.2.3	Surveillance Procedures at Terminating CMS .....	46
7.7.2.3.1	Terminating Line is Able to Accept the Call .....	46
7.7.2.3.2	Terminating Line is Unable to Accept the Call .....	46
7.7.2.3.3	Terminating CMS is Unable to Perform Call-Content Surveillance .....	47
7.7.2.3.4	Terminating CMS Redirects or Transfers the Call .....	47
7.7.2.4	Surveillance Procedures at a CMS Proxy .....	48
7.7.2.5	Interworking with CSCFs .....	49
7.7.3	P-DCS-Billing-Info .....	49
7.7.3.1	Procedures at an Originating CMS .....	49
7.7.3.2	Procedures at a Terminating CMS .....	49
7.7.3.3	Procedures at a Proxy .....	49
7.7.3.4	Interaction with CSCF Signaling Nodes .....	49
7.7.3.4.1	Sessions initiated from a CSCF to a CMS or MGC .....	50
7.7.3.4.2	Sessions initiated from a CMS or MGC to a CSCF .....	50
7.7.4	P-DCS Option Tag .....	51
7.8	The SIP "Replaces" Header .....	51
7.9	Private Extensions to the SIP Protocol for Asserted Identity within Trusted Networks .....	51
7.10	A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP) .....	52
7.11	Globally Routable User Agent URI (GRUU) .....	52
7.12	The Early Session Disposition Type for SIP .....	52
7.13	An Extension to the Session Initiation Protocol (SIP) for Request History Information .....	53
7.14	Request Authorization through Dialog Identification in the Session Initiation Protocol (SIP) .....	53
7.15	The Session Initiation Protocol (SIP) Join Header .....	53
7.16	SUBSCRIBE to Dialog Event Package .....	53
8	CMS-CMS SIGNALING .....	53
8.1	CMS Interfaces .....	53
8.1.1	Overview of CMS Behaviour .....	55
8.1.1.1	CMS Behaviour in Support of Call Originator .....	55
8.1.1.2	CMS Behaviour in Support of Call Destination .....	56
8.1.1.3	CMS Behaviour in Support of Mid-call Changes .....	56
8.1.1.4	CMS Behaviour in Support of Event Messaging .....	56
8.1.1.5	CMS Behaviour in Support of Call Forwarding .....	57
8.1.1.6	CMS Behaviour in Support of Inter-Domain Call Forwarding .....	57
8.1.1.7	CMS Behaviour in Support of REFER .....	58
8.1.1.8	CMS Behaviour in Support of Inter-Domain REFER .....	59
8.1.2	Overview of Tandem Proxy .....	59
8.2	CMS Retransmission, Reliability and Recovery Strategies .....	59
8.3	CMS to CMS Routing .....	60
8.3.1	Forming a SIP-URI from a tel-URI .....	60
8.3.2	Routing a SIP(s) URI at Tandem CMSs .....	61
8.3.3	Routing based on tel-URI .....	61
8.4	CMS Procedures .....	61
8.4.1	CMS Messages and Procedures for Basic Call Setup .....	61
8.4.1.1	CMS <sub>O</sub> initiating Invite .....	62

8.4.1.1.1	CMS <sub>O</sub> Authentication and Authorization of Originator .....	63
8.4.1.1.2	Address Translation.....	63
8.4.1.1.3	IP Address Privacy Support.....	64
8.4.1.1.4	INVITE message generation .....	64
8.4.1.2	Invite from CMS <sub>O</sub> arrives at CMS <sub>T</sub> .....	65
8.4.1.2.1	CMS <sub>T</sub> Sending 183-Session-Progress Status Response.....	66
8.4.1.2.2	CMS <sub>T</sub> Sending 3xx REDIRECT Status Response.....	67
8.4.1.2.3	CMS <sub>T</sub> Sending INVITE Request to CMS <sub>F</sub> .....	68
8.4.1.2.4	CMS <sub>T</sub> Sending Other Status Response to INVITE request .....	70
8.4.1.3	CMS <sub>O</sub> Receives Initial Status Response.....	70
8.4.1.3.1	CMS <sub>O</sub> handling of 183-Session-Progress Response.....	71
8.4.1.3.2	302-Redirect Status Response Handling at CMS <sub>O</sub> .....	74
8.4.1.4	CMS <sub>T</sub> Receiving Acknowledgement of 183-Session-Progress.....	76
8.4.1.5	CMS <sub>T</sub> sends 180-Ringing or 183-Session-Progress.....	78
8.4.1.6	CMS <sub>O</sub> receives 180-Ringing or 183-Session-Progress .....	79
8.4.1.7	CMS <sub>T</sub> Sending final Response .....	81
8.4.1.7.1	CMS <sub>T</sub> sending 200-OK Final Response .....	81
8.4.1.7.2	CMS <sub>T</sub> sending 3xx-Redirect Final Response.....	82
8.4.1.7.3	Other Status Response to INVITE Request.....	83
8.4.1.8	CMS <sub>O</sub> Receives Final Response from CMS <sub>T</sub> .....	84
8.4.1.8.1	CMS <sub>O</sub> Receiving 200-OK.....	84
8.4.1.8.2	CMS <sub>O</sub> receiving 302-Redirect .....	85
8.4.1.8.3	CMS <sub>O</sub> receiving other error response .....	87
8.4.1.9	Session Timer expiration at CMS <sub>O</sub> .....	87
8.4.2	Emergency Call Procedures.....	88
8.4.2.1	Network Hold Support .....	88
8.4.2.2	PSAP Operator Ringback.....	90
8.4.2.2.1	PSAP Operator Ringback while Network Hold not Applied (Caller Off-Hook).....	90
8.4.2.2.2	PSAP Operator Ringback while Network Hold Applied (Caller On-Hook) .....	90
8.4.2.3	PSAP Callback (PSAP Originated Emergency Call) .....	91
8.4.2.4	MGC Procedures.....	92
8.4.2.4.1	Invite processing.....	92
8.4.2.4.2	Network Hold processing .....	93
8.4.2.4.3	PSAP Ringback processing .....	93
8.4.2.4.4	PSAP Callback (PSAP Originated Emergency Call) .....	93
8.4.3	CMS Procedures for REFER .....	94
8.4.3.1	CMS <sub>I</sub> Initiates REFER Request .....	94
8.4.3.2	CMS <sub>O</sub> Receives REFER.....	95
8.4.3.3	CMS <sub>I</sub> Receives Final Response to REFER .....	96
8.4.3.4	CMS <sub>I</sub> Receives Initial NOTIFY for REFER.....	96
8.4.3.5	CMS <sub>O</sub> Sends INVITE to Target .....	97
8.4.3.6	CMS <sub>O</sub> Sends Final NOTIFY To CMS <sub>I</sub> .....	98
8.4.3.7	CMS <sub>I</sub> Receives NOTIFY .....	98
8.4.3.8	CMS <sub>O</sub> Receives Final Response To NOTIFY.....	99
8.4.4	CMS handling of Mid-Call Changes .....	99
8.4.4.1	CMS <sub>I</sub> Initiating Call Hold: re-INVITE/UPDATE(hold).....	99
8.4.4.2	CMS <sub>I</sub> Resuming a held call: UPDATE(resume) .....	100
8.4.4.3	CMS <sub>R</sub> Receiving Call Hold: UPDATE(hold) and UPDATE(resume).....	101
8.4.4.4	SIP Messages for Codec Changes - INVITE/UPDATE(Codec-change) .....	101
8.4.4.4.1	Codec Change within Previous Authorization.....	102
8.4.4.4.2	Codec Change Requiring New Authorization .....	103
8.4.5	CMS handling of Call Teardown .....	105
8.4.6	Sample Implementation of Call Transfer.....	106
8.4.7	Sample Implementation of Ad-hoc Conference.....	112
8.4.8	Automatic Recall and Callback .....	112
8.4.8.1	CMS <sub>O</sub> Sends INVITE to Target .....	112
8.4.8.2	CMS <sub>O</sub> Sends SUBSCRIBE to Target.....	113
8.4.8.3	CMS <sub>T</sub> Sends NOTIFY to CMS <sub>O</sub> .....	114
8.4.8.4	INVITE from IPcablecom to PSTN .....	115
8.4.8.5	Initial Query Request from PSTN to IPcablecom .....	116
8.4.9	Message Waiting Indicator .....	116
8.4.9.1	CMS <sub>I</sub> Sends SUBSCRIBE to CMS <sub>R</sub> .....	117

8.4.9.2	CMSR Sends NOTIFY to CMSI.....	117
8.4.10	SDP Interworking .....	118
8.4.10.1	Offer/Answer Requirements for Call Hold .....	120
8.4.10.2	ptime and mptime SDP Interworking.....	121
8.4.11	MGC Caller ID Procedures.....	122
8.4.11.1	MGC Processing - Egress .....	122
8.4.11.2	MGC Processing - Ingress .....	123
8.4.12	Procedures for Request History Information .....	124
8.4.12.1	Preventing Forwarding Loops and Limiting the Number of Forwarding Attempts .....	125
8.4.12.2	Setting of the Call Forwarding parameters.....	125
8.4.12.2.1	First Forwarded INVITE .....	125
8.4.12.2.2	Second or Subsequent Forwarded INVITE .....	126
8.4.12.3	MGC Inter-working .....	127
8.4.12.3.1	MGC Processing - Egress.....	127
8.4.12.3.2	MGC Processing - Ingress.....	129
8.4.13	Operator Services.....	130
8.4.14	Signaling Dialed Non-Geographic Numbers .....	131
9	Application Layer Anonymizer.....	132
9.1	Signaling Content Privacy.....	133
9.2	IP Address Privacy .....	133
<b>Annex A (normative):</b>	<b>TIMER SUMMARY.....</b>	<b>136</b>
<b>Annex B (normative):</b>	<b>CMSS Message and Header Overview .....</b>	<b>137</b>
<b>Annex C (normative):</b>	<b>ENUM Client Requirements.....</b>	<b>141</b>
C.1	Introduction .....	141
C.1.1	General .....	141
C.1.2	DNS Resolver Requirements.....	141
C.1.3	Database Selector .....	141
C.2	NAPTR.....	141
C.2.1	Service Field.....	141
C.2.2	Case Insensitivity .....	142
C.2.3	Regular Expression Delimiters.....	142
C.2.4	Non-Terminal NAPTR Records .....	142
C.2.5	Handling Multiple URIs .....	142
C.2.6	EDNS0 Support.....	143
<b>Annex D (informative):</b>	<b>Bibliography.....</b>	<b>144</b>
History	.....	145

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members** and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Access, Terminals, Transmission and Multiplexing (ATTM).

The present document is part 16 of a multi-part deliverable covering Access, Terminals, Transmission and Multiplexing (ATTM); Integrated Broadband Cable and Television Networks; IPCablecom 1.5, as identified below:

- Part 1: "Overview";
- Part 2: "Architectural framework for the delivery of time critical services over cable Television networks using cable modems";
- Part 3: "Audio Codec Requirements for the Provision of Bi-Directional Audio Service over Cable Television Networks using Cable Modems";
- Part 4: "Network Call Signalling Protocol";
- Part 5: "Dynamic Quality of Service for the Provision of Real Time Services over Cable Television Networks using Cable Modems";
- Part 6: "Event Message Specification";
- Part 7: "Media Terminal Adapter (MTA) Management Information Base (MIB)";
- Part 8: "Network Call Signalling (NCS) MIB Requirements";
- Part 9: "Security";
- Part 10: "Management Information Base (MIB) Framework";
- Part 11: "Media Terminal Adapter (MTA) device provisioning";
- Part 12: "Management Event Mechanism";
- Part 13: "Trunking Gateway Control Protocol - MGCP option";
- Part 14: "Embedded MTA Analog Interface and Powering Specification";
- Part 15: "Analog Trunking for PBX Specification";
- Part 16: "Signalling for Call Management Server";**
- Part 17: "CMS Subscriber Provisioning Specification";
- Part 18: "Media Terminal Adapter Extension MIB";
- Part 19: "IPCablecom Audio Server Protocol Specification - MGCP option";
- Part 20: "Management Event MIB Specification";

Part 21: "Signalling Extension MIB Specification".

NOTE 1: Additional parts may be proposed and will be added to the list in future versions.

NOTE 2: The choice of a multi-part format for this deliverable is to facilitate maintenance and future enhancements.

---

# 1 Scope

The present document describes the IPCablecom Call Management Server (CMS) to CMS Signalling protocol intended for use by a CMS to communicate with another CMS in order to support packet-based voice and other real-time multimedia applications. The protocol exchanges between a CMS and a Media Gateway Controller (MGC) are identical to those between CMSs and so for purposes of the present document the MGC is considered identical to a CMS. CMSs currently support multimedia endpoints (within the IPCablecom infrastructure) that use the Network-based Call Signaling [24] (NCS) protocol and the PSTN Gateway Call Signaling Protocol [25] (TGCP) for communicating signalling information between the endpoint and the CMS. In the future, other protocols may be supported as well and the CMS to CMS protocol is intended to be sufficiently general to accommodate such protocols without change.

The CMS to CMS protocol uses the Session Initiation Protocol 2.0 (SIP) specification with extensions and usage rules that support commonly available local and CLASSSM services. This protocol is referred to as the Call Management Server Signaling (CMSS) protocol.

The CMSS protocol takes into account the need to manage access to network resources and account for resource usage. The usage rules defined in the present document specifically address the coordination between CMS Signaling and IPCablecom Dynamic Quality of Service (QoS) mechanisms for managing resources over the cable access network. In addition, the present document defines the protocols and messages needed between Call Management Servers for supporting these services.

The present document specifies the protocols and procedures to use between CMSs belonging to a single service provider as well as between CMSs that belong to different service providers. In the case that the CMSs are owned by multiple service providers, it is assumed that the service providers have a mutual trust relationship.

Other IPCablecom documents describe interfaces between other system elements. These documents cover areas such as: Event Message recording for billing and other back office functions [23]; Dynamic Quality of Service [21]; Operations and Provisioning [i.8]; Electronic Surveillance [22]; and Security [26]. These other specifications indirectly place requirements on the signalling protocol to ensure that it transports the correct data needed to implement a complete system. The present document includes syntax and protocols for implementing these requirements. Currently, the document does not address interworking with non-IPCablecom-compliant devices.

---

## 2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

### 2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] Void.
- [2] Void.
- [3] IETF RFC 4566 (July 2006): "SDP: Session Description Protocol".
- [4] IETF RFC 2396 (August 1998): "Uniform Resource Identifiers (URI): Generic Syntax".
- [5] IETF RFC 2397 (August 1998): "The "data" URL Scheme".
- [6] IETF RFC 3261 (February 2002): "SIP: Session Initiation Protocol".

- [7] IETF RFC 3262 (June 2002): "Reliability of Provisional Responses in Session Initiation Protocol (SIP).
- [8] IETF RFC 3263 (June 2002): "Session Initiation Protocol (SIP): Locating SIP Servers".
- [9] IETF RFC 3265 (June 2002): "Session Initiation Protocol (SIP)-Specific Event Notification", Roach A.
- [10] IETF RFC 3311 (September 2002): "The Session Initiation Protocol (SIP) UPDATE Method", Rosenberg, J.
- [11] IETF RFC 3312 (October 2002): "Integration of Resource Management and SIP for IP Telephony".
- [12] IETF RFC 3323 (November 2002): "A Privacy Mechanism for the Session Initiation Protocol (SIP)".
- [13] IETF RFC 3325 (November 2002): "Private Extensions to the Session Initiation Protocol (SIP) for Asserted Identity within Trusted Networks".
- [14] Void.
- [15] Void.
- [16] IETF RFC 5503 (March 2009): "Private Session Initiation Protocol (SIP) Proxy-to-Proxy Extensions for Supporting the PacketCable Distributed Call Signaling Architecture".
- [17] IETF RFC 3515 (April 2003): "The Session Initiation Protocol (SIP) Refer Method".
- [18] IETF RFC 3891 (September 2004): "The Session Initiation Protocol (SIP) Replaces Header".
- [19] Void.
- [20] Void.
- [21] PacketCable 1.5 PKT-SP-DQOS1.5-I04-090624 (2009): "Dynamic Quality of Service Specification", Cable Television Laboratories, Inc.
- [22] PacketCable 1.5 PKT-SP-ESP1.5-I02-070412 (2007): "Electronic Surveillance Specification", Cable Television Laboratories, Inc.
- [23] PacketCable 1.5 PKT-SP-EM1.5-I03-070412 (2007): "Event Messaging Specification", Cable Television Laboratories, Inc.
- [24] PacketCable 1.5 PKT-SP-NCS1.5-I03-070412 (2007): "Network-Based Call Signaling Protocol Specification", Cable Television Laboratories, Inc.
- [25] PacketCable 1.5 PKT-SP-TGCP1.5-I03-070412 (2007): "PSTN Gateway Call Signaling Protocol Specification", Cable Television Laboratories, Inc.
- [26] PacketCable 1.5 PKT-SP-SEC1.5-I03-090624 (2009): "Security Specification", Cable Television Laboratories, Inc.
- [27] IETF RFC 3842 (August 2004): "A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP)", R. Mahy.
- [28] IETF RFC 3966 (December 2004): "The tel URI for Telephone Numbers".
- [29] IETF RFC 4694 (October 2006): "Number Portability Parameters for the "tel" URI".
- [30] IETF RFC 3761 (2004): "The E.164 to Uniform Resource Identifiers (URI) Dynamic Delegation Discovery System (DDDS) Application (ENUM)".
- [31] IETF RFC 3764 (2004): "Enumservice registration for Session Initiation Protocol (SIP) Addresses-of-Record".
- [32] IETF RFC 4415 (2006): "IANA Registration for Enumservice Voice".

- [33] IETF RFC 3402 (2002): "Dynamic Delegation Discovery System (DDDS) Part Two: The Algorithm".
- [34] IETF RFC 1034 (1987): "Domain names - concepts and facilities".
- [35] IETF RFC 2671 (1999): "Extension Mechanisms for DNS (EDNS0)".
- [36] IETF RFC 5627 (October 2009): "Obtaining and Using Globally Routable User Agent (UA) URIs (GRUU) in the Session Initiation Protocol (SIP)".
- [37] IETF RFC 3264 (June 2002): "An Offer/Answer Model with Session Description Protocol (SDP)".
- [38] IETF RFC 3455 (January 2003): "Private Header (P-Header) Extensions to the Session Initiation Protocol (SIP) for the 3rd-Generation Partnership Project (3GPP)".
- [39] PacketCable IMS Delta Specification, PKT-SP-24.229-I06-100120 (2010): "Session Initiation Protocol (SIP) and Session Description Protocol (SDP) Stage 3 Specification 3GPP TS 24.229", Cable Television Laboratories Inc.
- [40] IETF RFC 3959 (December 2004): "The Early Session Disposition Type for SIP", G. Camarillo.
- [41] IETF RFC 4244 (November 2005): "An Extension to the Session Initiation Protocol (SIP) for Request History Information".
- [42] IETF RFC 4458 (April 2006): "Session Initiation Protocol (SIP) URIs for Applications such as Voicemail and Interactive Voice Response (IVR)".
- [43] IETF RFC 4538 (June 2006): "Request Authorization through Dialog Identification in the Session Initiation Protocol (SIP)".
- [44] IETF RFC 3911 (October 2004): "The Session Initiation Protocol (SIP) Join Header".
- [45] IETF RFC 5079 (December 2007): "Rejecting Anonymous Requests in the Session Initiation Protocol (SIP)".
- [46] IETF RFC 4235 (November 2005): "An INVITE-Initiated Dialog Event Package for the Session Initiation Protocol (SIP)".
- [47] Telcordia GR-227 (April 2002): "LSSGR: CLASS Feature: Automatic Recall (FSD 01-02-1260)", FR-64.
- [48] Telcordia GR-529 (June 2000): "LSSGR: Public Safety" (FSDs 15-01-0000, 15-03-0000, 15-07-0000), Issue 1.
- [49] Telcordia GR-1277 (August 2001): "LSSGR: Operator Services: Switching System Generic Requirements Using Integrated Services Digital Network User Part (ISUP)".
- [50] Telcordia GR-2956 (December 2002): "LSSGR: CCS SS7 Generic Requirements in Support of E9-1-1 Service".
- [51] IETF Internet-Draft draft-yu-tel-dai-08.txt (October 2009): "DAI Parameter for the "tel" URI", work in progress.
- [52] IETF Internet-Draft draft-york-sipping-p-charge-info-07 (August 2009): "P-Charge-Info - A Private Header (P-Header) Extension to the Session Initiation Protocol (SIP)", work in progress.
- [53] ATIS-1000113.2005: "Signaling System No. 7 (SS7) - High Probability of Completion (HPC) Network Capability".

## 2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] IETF RFC 3398 (2002): "ISUP to SIP Mapping, December".

- [i.2] Void.
- [i.3] PacketCable 1.5 Architecture Framework Technical Report, PKT-TR-ARCH1.5-V02-070412, April 12, 2007, Cable Television Laboratories, Inc.
- [i.4] PacketCable 1.5 Audio Server Protocol Specification, PKT-SP-ASP1.5-I02-070412, April 12, 2007, Cable Television Laboratories, Inc.
- [i.5] Void.
- [i.6] Void.
- [i.7] Void.
- [i.8] PacketCable 1.5 MTA Device Provisioning Specification, PKT-SP-PROV1.5-I04-090624, June 24, 2009, Cable Television Laboratories, Inc.
- [i.9] PacketCable Architecture Framework Technical Report, PKT-TR-ARCH-FRM-V06-090528, May 28, 2009, Cable Television Laboratories, Inc.
- [i.10] Telcordia GR-391, LSSGR: CLASS Feature: Calling Identity Delivery Blocking Features (FSD 01-02-1053).
- [i.11] Telcordia GR-246 (December 2005): "Specification of Signalling System Number 7".
- [i.12] IETF RFC 2327 (April 1998): "SDP: Session Description Protocol".
- [i.13] IETF RFC 3551 (July 2003): "RTP Profile for Auditor and Video Conferences with Minimal Control".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**active:** service flow is said to be "active" when it is permitted to forward data packets

NOTE: A service flow must first be admitted before it is active.

**admitted:** service flow is said to be "admitted" when the CMTS has reserved resources (e.g. bandwidth) for it on the DOCSIS network

**announcement server:** plays informational announcements in IPCablecom network

NOTE: Announcements are needed for communications that do not complete and to provide enhanced information services to the user.

**authentication:** process of verifying the claimed identity of an entity to another entity

**authorization:** act of giving access to a service or device if one has the permission to have the access

**encryption:** method used to translate information in plaintext into ciphertext

**encryption key:** key used in a cryptographic algorithm to translate the plaintext to ciphertext

**endpoint:** Terminal, Gateway or MCU

**event message:** message capturing a single portion of a connection

**gateway:** devices bridging between the IP-Cablecom IP Voice Communication world and the PSTN

NOTE: Examples are the Media Gateway which provides the bearer circuit interfaces to the PSTN and transcodes the media stream and the Signalling Gateway which sends and receives circuit switched network signalling to the edge of the IP-Cablecom network.

**header:** protocol control information located at the beginning of a protocol data unit

**key:** mathematical value input into the selected cryptographic algorithm

**network layer:** layer 3 in the Open System Interconnection (OSI) architecture that provides network information that is independent from the lower layers

**off-net call:** communication connecting an IP-Cablecom subscriber out to a user on the PSTN

**on-net call:** communication placed by one customer to another customer entirely on the IP-Cablecom Network

**privacy:** way to ensure that information is not disclosed to any one other than the intended parties

NOTE: Information is usually encrypted to provide confidentiality. Also known as confidentiality.

**proxy:** facility that indirectly provides some service or acts as a representative in delivering information there by eliminating a host from having to support the services themselves

**public key:** key used in public key cryptography that belongs to an individual entity and is distributed publicly

NOTE: Other entities use this key to encrypt data to be sent to the owner of the key.

**public key cryptography:** procedure that uses a pair of keys, a public key and a private key for encryption and decryption, also known as asymmetric algorithm

NOTE: A user's public key is publicly available for others to use to send a message to the owner of the key. A user's private key is kept secret and is the only key which can decrypt messages sent encrypted by the user's public key.

**realm:** single instance of an IP-Cablecom network

**trunk:** analog or digital connection from a circuit switch which carries user media content and may carry voice signalling (MF, R2, etc.)

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BCID	Billing Correlation ID
BLV	Busy Line Verification
CA	Call Agent
CFNA	Call Forwarding No Answer
CLASS	Custom Local Area Signalling Services
CMTS	Cable Modem Termination System
CNAM	Calling Name
DCS	Distributed Call Signalling
EI	Emergency Interrupt
E.164	Telephone number standard of ITU
FQDN	Fully Qualified Domain Name
GC	Gate Controller
IP	Internet Protocol
LNP	Local Number Portability
LRN	Local Routing Number
MF	Multi-Frequency
MG	Media Gateway
MGC	Media Gateway Controller
MTA	Multimedia Terminal Adapter
NCS	Network Call Signalling

OSPS	Operator Services Positioning System
RFC	Request for Comments (IETF standard)
SDP	Session Description Protocol

---

## 4 Void

---

## 5 Background and motivation

---

The design of the Call Management Server Signaling (CMSS) architecture recognizes the trend towards use of packet networks as the underlying framework for communications. These networks will provide a broad range of services, including traditional best-effort data service, as well as enhanced value-added services such as telephony and gaming. The Network based Call Signaling (NCS) and PSTN Gateway Call Signaling (TGCP) protocols are used to communicate between limited-function multimedia end-points, such as standard telephone sets and trunking gateways and Call Management Servers (CMS). However, the NCS and TGCP protocols do not address the need for communication between multiple CMSs residing in one or more service providers' networks. The present document covers the signalling performed between CMSs. The initial real-time multimedia service that is supported by the NCS and TGCP function is that of interactive telephony. The NCS and TGCP protocols represent the same architecture and are largely similar. In the following, where a distinction is not important, they will sometimes be simply referred to as NCS.

It is recognized that packet based networks may also offer additional real-time multimedia services to endpoints that are IP capable. Also, improvements in silicon will reinforce the trend towards increased functionality and "intelligence" in endpoints. These intelligent endpoints will be addressed in a future specification to take advantage of the widespread availability of packet networks to enable a rich set of applications and services for users.

CMSs may have a need to interconnect with other entities and networks which in turn introduces at least two issues:

- Interoperability - The extensions specified in CMSS may not all be supported.
- Security - When information is sent to or received from an entity, that entity may not be trusted (e.g. a SIP endpoint or VoIP peer network) and special procedures may need to be invoked.

The current CMSS specification has been made flexible to accommodate the interoperability issue identified above. The security issue is resolved as follows; whenever signalling is sent to or received from a particular SIP entity, that entity is assumed to be trusted (see also clause 5.3).

A key element of the CMSS architecture is recognition of the need for coordination between call signalling, which controls access to telephony specific services and resource management, which controls access to network-layer resources. This coordination is designed to meet the user expectations and human factors associated with telephony. For example, in a telephony environment, the called party should not be alerted until the resources necessary to complete the call are available. If resources were not available when the called party picked up, the user would experience a call defect. In addition, PSTN users expect to be charged for service only after the called party answers the phone. As a result, it must be possible to track usage accounting in a way that allows customer billing to start once the called party picks up. Coordination between call signalling and resource management is also needed to prevent fraud. The coordination between call signalling and Dynamic QoS [21] protocols ensures that users are authenticated and authorized before receiving access to the enhanced QoS associated with the telephony service.

In the NCS and TGCP protocols, the functionality required of the multimedia endpoint is simple and more of the functionality resides in the network in call management servers, where the state of a session is maintained. The CMS is responsible for establishing and managing session legs and (indirectly) for requesting and obtaining network layer QoS for the session. The NCS and TGCP protocols specify the information and message exchanges between the multimedia endpoint and the CMS. When the session has to be routed through multiple CMSs, additional functionality is required in the protocol to communicate the information related to the session. This includes information provided by the endpoint to the network as well as information that may reside in the CMS or other entities within the network that relates to the session. Examples of such additional information that may reside in the network include billing and data that may otherwise be kept private from untrusted multimedia endpoints.

## 5.1 Requirements and Design Principles

This clause briefly describes the application requirements that led to the set of CMSS design principles.

The need to support primary line telephony service requires enhanced bearer channel and signalling performance, including:

- *Low delay* - end-to-end packet delay must be sufficiently small that it does not interfere with normal multimedia sessions. The ITU recommends no greater than 300 ms roundtrip delay for a telephony service.
- *Low packet loss* - packet loss must be sufficiently small that it does not perceptibly impede session quality or, in the case of telephony, performance of fax and voice band modems.
- *Short post-dial delay* - the delay between dialling the last digit and receiving positive confirmation from the network must be sufficiently short to ensure that users do not perceive a difference from post-dial delays typically experienced in the circuit switched network; in particular, the delay must not be so long that the user is led to believe that the network has failed.
- *Short post-pickup delay* - the delay between a user picking up a ringing phone or acknowledging a multimedia session and the voice or media path being cut through must be sufficiently short to ensure that the initial talk-spurt, e.g. "hello", is not clipped.

A number of key design principles that arise from the requirements and philosophy above are identified:

- 1) It is essential to provide network-layer Quality of Service while allowing the service provider to derive revenues from the use of such service.
- 2) The CMSS architecture must allow for communication between CMSs in the network. At a high level, one may regard a CMS as performing complex signalling tasks on behalf of an endpoint. When the network includes multiple CMSs, CMSS should provide the call signalling function between the CMSs on an individual call basis. Within such a context, the CMSS architecture must allow the network to support limited-function multimedia endpoints, while allowing additional functions to be performed by the CMSs (including the maintaining call state in the CMSs).
- 3) The CMSS architecture must enable interoperability with SIP entities that do not support all of the extensions specified by CMSS. CMSS compliant implementations will use the extensions and procedures defined in the present document. However, when communicating with non-CMSS compliant implementations, CMSS compliant implementations will only use the extensions supported by both implementations. Furthermore, CMSs may be configured to require peer support for certain extensions and fail calls with peers that do not support those extensions.
- 4) The architecture must ensure that the network is protected from fraud and theft of service. The service provider must be able to authenticate users requesting service and to ensure that only those authorized to receive a particular service are able to obtain it. Furthermore, the service provider must be able to track the usage of such services in order to support billing.
- 5) The architecture must enable the service provider to add value by supporting the functions of a trusted intermediary. In the case of telephony, this includes protecting the Privacy of calling and called party information and ensuring the accuracy of the information that is provided in messages from the network.
- 6) The architecture must be implementable, cost-effectively, at very large scale.

## 5.2 IPCablecom Architecture


The CMS to CMS Signaling (CMSS) Architecture follows the principles outlined above to support a robust multimedia service. Figure 1 introduces the key components in the architecture.

*Multimedia Terminal Adapters* (MTAs) may either be embedded into the Cable Modem (CM) or they may be stand-alone. The cable access network interfaces to an IP backbone through a CMTS that is the first trusted element within the provider's network. The CMTS performs network resource management, acts as a policy enforcement point and as a source of event messages that can be used for billing.

The CMS establishes and receives sessions on behalf of an endpoint by using the NCS protocol to communicate with the MTA. The CMS uses the protocol specified here to communicate with other CMSs. In addition, it may also perform the function of a Gate Controller (GC), which is responsible for authorizing the enhanced Quality of Service for the media stream. The CMS acts as a source of event messages that can be used for billing.

*Media Service Nodes* represent network-based components that operate on media flows to support the service. Media service nodes perform audio bridging, play announcements, provide interactive voice response services, etc. The protocol exchanges between a CMS and a Media Service Nodes are identical to those between CMSs and so for purposes of the present document a Media Service Node is considered identical to a CMS. Media Service Nodes may be decomposed into a controller and a player, in which case CMSS signalling is performed with the controller.

*PSTN gateways* interface to the Public Switched Telephone Network. The PSTN gateway may be decomposed into a Media Gateway Controller (MGC), a signalling gateway (SG) and a Media Gateway (MG). The TGCP protocol is used between the MGC and the MG. The protocol exchanges between a CMS and an MGC are identical to those between CMSs and so for purposes of the present document, the MGC is considered identical to a CMS.

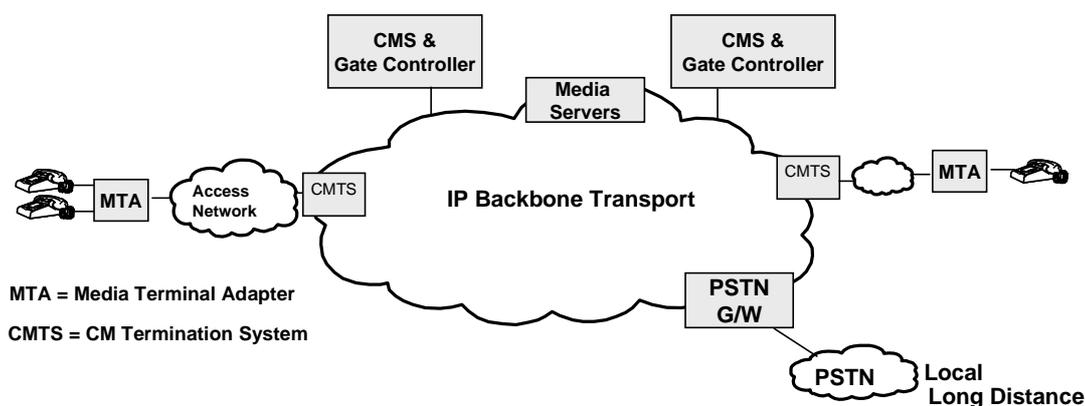

**Figure 1: System Architecture - REALM**

Access to network resources must be controlled by the service provider. The CMTS receives resource management requests from endpoints and is responsible for ensuring that packets are provided the QoS they are authorized to receive (either through packet marking, or through routing and queuing the packets as a specific QoS-assured flow). The CMTS requires authorization from a Gate Controller (on a session by session basis for the multimedia service) before providing access to enhanced QoS for an end-to-end IP flow. Thus, the CMTS is able to ensure that enhanced QoS is provided only for end-to-end flows that have been authorized and for which usage accounting is being performed. Since the CMTS knows about the resource usage associated with individual IP flows, it generates the usage events that allow a user to be charged for service [23].

DQOS1.5 [21] introduces the concept of a "gate" in the CMTS. Conceptually, gates manage access to enhanced quality of service. The gate is a packet classifier and policer that ensures that only those IP flows that have been authorized by the CMS are granted access to enhanced QoS in the access and backbone networks. Gates are "admitted" selectively for a flow. For a multimedia service, gates are opened and controlled for individual sessions. Admitting a gate involves an admission control check that is performed when a resource reservation or commit request is received from the endpoint and it may involve resource reservation in the backbone network if necessary. The packet filter in the gate allows a flow of packets to receive enhanced QoS for a session from a specific IP source address and port number to a specific IP destination address and port number.

CMSs implement a set of service-specific control functions required to support the telephony service:

- Authentication and authorization: Since services are only provided to authorized subscribers, CMSs authenticate signalling messages and authorize requests for service on a session-by-session basis.
- Name/number translation and call routing: CMSs translate dialled numbers or names to a next-hop IP address based on call routing logic.

- Service-specific admission control: CMSs can implement a broad range of admission control policies for the telephony service. For example, CMSs may provide precedence to particular calls, e.g. emergency calls initiated by dialling a special number such as 121 or 911. Admission control may also be used to implement overload control mechanisms, e.g. to restrict the number of calls to a particular location or to restrict the frequency of call setup to avoid signalling overload.
- Signaling and service feature support: CMSs maintain and track all signalling activities to ensure compliance and to manage subscriber features. For example, in the case of telephony, 3-way calling, caller ID, etc.

A CMS is responsible for a set of endpoints and the associated CMTSs. While endpoints are not trusted, there is a trust relationship between the CMTS and its associated CMSs, since the Gate Controllers in the CMSs play a role as a policy server that controls when the CMTS can provide enhanced QoS service. There is also a trust relationship among CMSs. Details of the security model and mechanisms are specified in [26].

CMSS supports inter-working with the circuit switched telephone network through PSTN gateways. A PSTN gateway may be realized as a combination of a Media Gateway Controller (MGC), Media Gateway (MG) and a Signaling Gateway (SG). A media gateway acts as the IP peer of an endpoint for media packets, converting between the data format used over the IP network and the format required for transmission over the PSTN, e.g. PCMU. The signalling gateway acts as the IP peer of a PSTN endpoint for call signalling, providing signalling inter-working between the IP-Cablecom network and conventional telephony signalling protocols such as ISUP/SS7. The MGC uses the PSTN Gateway Call Signaling Protocol (TGCP) to control the operation of the media gateway.

Additionally CMSS supports inter-working with other IP-Cablecom architectures, in particular IP-Cablecom 2.0 [i.9]. IP-Cablecom 2.0 adds support for SIP-based endpoints and a SIP-based service platform that may be used to support a variety of services, please see [i.9] for further details on the IP-Cablecom 2.0 architecture and associated network elements. The CMSS interface support direct inter-working with IP-Cablecom 2.0 Call Session Control Functions (CSCFs) network elements for the majority of session related procedures. There are however a few instances where direct inter-working via CMSS is not possible. As such, specific procedures are documented to cover these special cases. In particular special inter-working procedures are provided for electronic surveillance, accounting and SDP. The procedures for electronic surveillance can be found in clause 7.7.2.5, the procedures for accounting can be found in clause 7.7.3.4 and the procedures for SDP can be found in clause 8.4.10.

There are additional system elements that may be involved in providing the multimedia service [i.3]. For example, in the case of telephony service, the CMS may interface with other servers that implement the authorization or translation functions. Similarly, announcements, voicemail and three-way calling may be supported using media service nodes in the network. Management of security interfaces between system elements is explained in [26].

The present document provides generic capabilities that can be used to implement additional features. Features that have an intra/inter-domain (CMS-CMS) impact are considered and specifically addressed below.

## 5.3 CMSS Trust Model

CMSS defines a trust boundary around the various systems and servers that are within a single domain. These trusted systems include the Internal and External Border Proxies (more generally referred to as tandem proxies or simply proxies), CMSs, CMTSs of the cable access network and various servers such as bridge servers, voicemail servers, announcement servers, etc. Outside of the trust boundary are the customer premises equipment, i.e. the MTAs, the Public Switched Telephone Network (PSTN), but not the PSTN GW; and various media service nodes operated by third-party service providers. At the boundary of the trusted domain are CMTSs/Edge Routers at the transport level and EBP/CMSs at the signalling level. The EBP interfaces to other IP-Cablecom domains. Although these other IP-Cablecom domains are outside the trust boundary, CMSS still trusts call signalling sent to and received from these other IP-Cablecom domains.

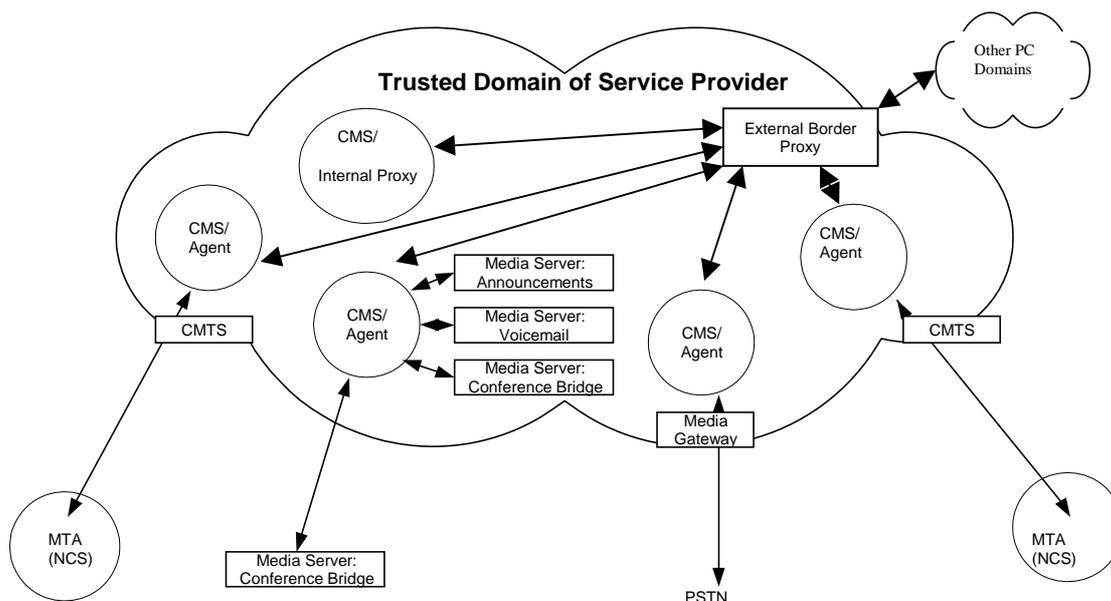


Figure 2: Trusted Domain of IP Cablecom Service Provider

## 5.4 CMS to CMS Architectural Model

The Call Management Server (CMS) is an architectural entity that performs those services necessary to enable endpoints to establish IP multimedia sessions. The CMS is a complex of server functions that support session signalling, number translation and feature support. In addition to processing signalling messages, the CMS provides functions for service and feature authorization, call routing and service-specific admission control. As a trusted decision point, the CMS may also coordinate with Gate Controllers (which act as Policy Decision Points from a resource management point of view) to control when resource reservations are authorized for particular users and media flows.

The present document describes the messages required to support IP Telephony between entities that support one or more of the role indicated in the following table:

Role	Distinguishing function
Call Agent (CA) or CMS as defined above.	Support of endpoints implementing Network-Based Call Signaling (NCS) [24].
Media Gateway Controller (MGC)	Interworking with the PSTN. Use of PSTN Gateway Call Signaling (TGCP) [25] to control trunks.
Announcement Servers, Bridge Servers, or VoiceMail Servers	Provide various media services.
Tandem server within a domain, or a gateway server between service provider domains.	Routing functions only.

NOTE 1: The list of roles may be expanded in the future. Although trust levels vary between providers, the document assumes CMSs within a REALM and across multiple domains trust each other. MTAs, however, are untrusted NCS endpoints.

NOTE 2: Where multiple roles are combined within a single node, the interface between them is hidden and untestable.

All of the various types of endpoint management systems currently fall into one of two different categories of CMSs. A CMS is a trusted entity that establishes calls on behalf of an untrusted endpoint, e.g. an MTA, in the customer premise. CMS/MGC and other types of centralized control CMSs fall within this category as well. The role of the CMS is to verify the signalling messages from the untrusted source and provide various network services, such as translation, authentication and accounting. The second category is the Proxy. Proxies are classified into two types: proxies used within a domain and proxies used between domains. The Interior Border Proxy (IBP) is a proxy that can be used for inter-realm (intra-domain) signalling and the Exterior Border Proxy (EBP) is required for inter-domain signalling. Where a distinction between the different types of proxy is either unimportant or is evident from the text, they will be simply referred to as proxies or tandem proxies.



## 5.5 Overview of CMS Behaviour

IPCablecom defines the Call Management Server (CMS) as a complex of server functions which support call signalling, number translation, call routing, feature support and admission control. Within the CMS complex, the IPCablecom architecture allocates many of these responsibilities to the Proxy/CA/MGC and the Gate Controller (GC) function. In addition to processing session-signalling messages, a CMS provides functions for service and feature authorization, name/number translation, session routing and service-specific admission control. As a trusted decision point, the CMS may also coordinate with Gate Controllers (which act as Policy Decision Points from a resource management point of view) to control when resource reservations are authorized for particular users. While the CMS is responsible for session control functions associated with proxying signalling requests, the Gate Controller is responsible for the policy decision regarding whether a requested QoS level should be admitted. Upon receipt of signalling information, a CMS instructs the Gate Controller to authorize a QoS level in advance of any resource reservation signalling (see [21] for more details).

The CMS associated with the endpoint originating a call is referred to as the originating CMS and is denoted by CMS<sub>O</sub>. The CMS associated with the terminating endpoint is referred to as the terminating CMS and is denoted by CMS<sub>T</sub>. The Gate Controllers (GC<sub>O</sub>, GC<sub>T</sub>) are the trusted policy decision points for controlling when and which resources are allowed to be reserved by endpoints; they coordinate with the CMTSs (CMTS<sub>O</sub>, CMTS<sub>T</sub>) through DQoS signalling. The CMTSs are the policy enforcement points and ensure that the media path is provided the QoS it is authorized to receive.

The IPCablecom CMS-CMS architecture extends the use of the basic INVITE/200-OK/ACK SIP transaction. A provisional response, the 183-Session-Progress and its acknowledgement, the PRACK/200-OK, are used with the initial INVITE to exchange capabilities and establish session state in the network prior to alerting the user. Following this exchange, the endpoints engage in resource reservations to obtain the resources they will need for the media streams. If the resource reservations are successful, the originating CMS performs an UPDATE/200-OK exchange. At this point the initial INVITE continues with a 180-Ringing or 183-Session-Progress, then a PRACK/200-OK followed by the final 200-OK response and ACK to the initial INVITE. In all cases, all provisional and final responses to an INVITE message traverse the path taken by the original INVITE through one or more CMSs and proxies; other messages, however, pass end-to-end directly between the originating CMS and the terminating CMS.

In support of billing functions, the originating CMS (CMS<sub>O</sub>) includes information containing the account number of the caller and the Billing-Correlation-ID in the INVITE message that it sends.

Operator services such as Busy Line Verification (INVITE(BLV)) and Emergency Interrupt (INVITE(EI)) are initiated from a Media-Gateway-Controller type of CMS and sent to the number being verified/interrupted.

In call sequences associated with three-way calling, inter-domain call transfer and inter-domain call forwarding, the CMS performs redirection. One possibility is that the CMS simply passes revised SDP to the other CMS, causing a redirection of media flow without changing the call topology. Alternatively, the CMS makes use of the REFER method to redirect the entire call. The REFER causes the receiver to initiate a new call using the information provided.

## 5.6 Basic Telephony Call Flow

Figure 4 presents a high-level overview of an example basic call that uses the CMSS protocol between the CMSs through a proxy while the end-points (MTAs) are using the NCS protocol.

In this example, when the MTA goes off-hook and the user dials a telephone number, the originating MTA (MTA<sub>O</sub>) collects the dialled digits and exchanges initial NCS messages with the originating CMS (CMS<sub>O</sub>) to notify it of the dialled digits and create a (media) connection. Call flows throughout the present document are examples only; IPCablecom does not mandate particular call flows. As a result of creating the connection, MTA<sub>O</sub> returns a session description using the Session Description Protocol (SDP), which will subsequently be passed to CMS<sub>T</sub>. When CMS<sub>O</sub> wishes to ensure that adequate resources are available in the network before users who wish to communicate are alerted, it includes additional information in the SDP. This additional information is a QoS "Pre-Condition" that needs to be satisfied before the terminating user is alerted. CMS<sub>O</sub> verifies that MTA<sub>O</sub> is a valid subscriber of the telephony service and determines that this subscriber is authorized to place this call. CMS<sub>O</sub> then translates the dialled number into the address of a terminating CMS (CMS<sub>T</sub>) and sends the (1) INVITE message to it containing the SDP with the added pre-conditions.

It is assumed that the originating and terminating CMSs trust each other. CMS<sub>O</sub> includes additional information, such as billing data containing the telephone number of the caller, in the INVITE message that it sends to CMS<sub>T</sub> via the proxy. CMS<sub>T</sub> then translates the dialled number into the address of the terminating MTA (MTA<sub>T</sub>) and exchanges NCS signalling with MTA<sub>T</sub> to create a (media) connection for the terminating endpoint. As part of the task of creating the connection, MTA<sub>T</sub> selects the encoding and bandwidth requirements for the media streams and returns to CMS<sub>T</sub> a session description containing a subset of the capabilities that were present in the NCS Create Connection request that are acceptable to MTA<sub>T</sub>. CMS<sub>T</sub> sends a GATE-SET message to the terminating CMTS (CMTS<sub>T</sub>); this GATE-SET message conveys policy instructions allowing CMTS<sub>T</sub> to create a gate for the IP flow associated with this phone call subsequent to the admission control that is performed following a resource reservation request. CMS<sub>T</sub> may send information in the GATE-SET message to notify CMTS<sub>T</sub> of billing-related information such as the IP address of the terminating RKS, the Billing Correlation ID (see [23] for details (BCID) of the terminating event message stream, etc. (see [21] for further detail). CMS<sub>T</sub> then sends the (2) 183- Session-Progress response back to CMS<sub>O</sub> via the proxy. Included in the 183-Session-Progress response is the SDP from MTA<sub>T</sub>, with an indication added by CMS<sub>T</sub> that the terminating side agrees to meet the preconditions specified in the INVITE before alerting the user. CMS<sub>O</sub> then sends a GATE-SET message to the originating CMTS (CMTS<sub>O</sub>) to indicate that it can admit a gate for the IP flow associated with the phone call. CMS<sub>O</sub> then sends an NCS ModifyConnection request to MTA<sub>O</sub>, enabling MTA<sub>O</sub> to start reserving resources.

The initial INVITE request and the 183-Session-Progress response contain a SIP Contact header to indicate the contact address of the remote CMS to be used for subsequent end-to-end SIP signalling exchanges as well as the BCID and the Financial Entity ID (FEID) of the CMS sending the message. CMS<sub>O</sub> acknowledges the 183-Session-Progress directly to CMS<sub>T</sub> using the (3) Provisional Reliable Ack (PRACK) message. The contact address is in the form of a Globally Routable User-Agent URI (GRUU). The terminating CMS<sub>T</sub> acknowledges the PRACK message with the (4) 200-OK message. At this point, resource reservation has not yet completed and thus the preconditions have not yet been met. CMS<sub>T</sub> now issues a modify connection command to MTA<sub>T</sub> instructing it to reserve network resources.

Once MTA<sub>O</sub> has successfully completed its resource reservation thereby meeting its precondition, it sends an NCS signalling message to CMS<sub>O</sub> which in turn sends the (5) UPDATE message directly to CMS<sub>T</sub>. CMS<sub>T</sub> acknowledges the UPDATE with the (6) 200-OK. When MTA<sub>T</sub> has reserved its resources it exchanges NCS signalling with CMS<sub>T</sub>. At this point in time, all preconditions have been met and CMS<sub>T</sub> can exchange NCS signalling with MTA<sub>T</sub> instructing it to alert the user (ring the destination telephone). CMS<sub>T</sub> then sends the (7) 180-Ringing message to CMS<sub>O</sub> via the proxy indicating that the terminating phone is ringing and that the calling party should be given a ringback call progress tone. CMS<sub>O</sub> exchanges NCS signalling with MTA<sub>O</sub> instructing it to provide ringback and CMS<sub>O</sub> sends another (8) Provisional ACK (PRACK) directly to CMS<sub>T</sub> to acknowledge receipt of the (7) 180-Ringing message.

The terminating CMS<sub>T</sub> acknowledges the PRACK with a (9) 200-OK. When the called party answers, by going off-hook, MTA<sub>T</sub> exchanges NCS signalling with CMS<sub>T</sub> to notify the off-hook and enable a full duplex connection. CMS<sub>T</sub> also sends a (10) 200-OK final response to the (1) INVITE to CMS<sub>O</sub> via the proxy. CMS<sub>O</sub> acknowledges the 200-OK directly with the (11) ACK and exchanges NCS signalling with MTA<sub>O</sub> instructing it to stop local ringback and enable a full duplex connection. At this point the resources that were previously reserved are committed and the call is "cut through".

Either party can terminate the call. When CMS<sub>O</sub> receives an on-hook notification from MTA<sub>O</sub>, CMS<sub>O</sub> sends a (12) BYE message directly to CMS<sub>T</sub>, which is acknowledged with (13) 200-OK. Each CMS exchanges NCS signalling with its MTA to delete the connection and release the resources reserved.

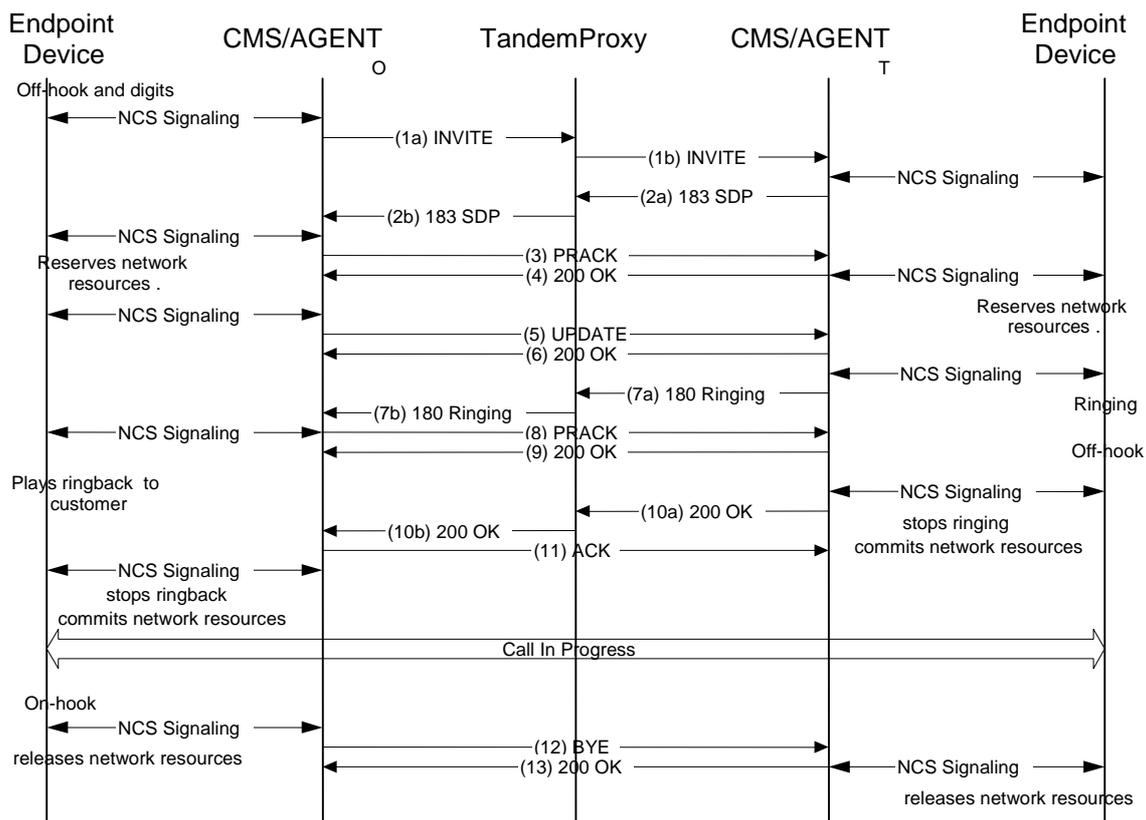


Figure 4: CMS - CMS Signaling Basic Call Flow

## 5.7 CMS-MGC Basic Telephony Call Flow

This clause presents a high level overview of a basic call that uses the CMSS protocol between a CMS and an MGC to make an on-net to off-net call. The procedure shown follows the SIP to ISUP mapping recommendations provided in [i.1].

NOTE: CMSS in general is intended to be compatible with the interworking recommendations provided in [i.1].

The following procedure may be used to make a basic on-net to off-net call using CMSS as the protocol between a CMS and a MGC.

- 1) The subscriber goes off hook.
- 2) The MTA exchanges NCS signalling message with the CMS to notify the CMS that the subscriber went off hook.
- 3) The CMS instructs the MTA to start sending dial tone to the user by exchanging NCS signalling messages with the MTA.
- 4) The subscriber dials a valid telephone number.
- 5) The MTA collects the dialled digits and exchanges NCS messages with the CMS to notify the CMS of the dialled digits.
- 6) The CMS exchanges NCS messages with the MTA to create a (media) connection. As a result of creating the connection, the MTA returns a session description using the Session Description Protocol (SDP).
- 7) The CMS sends the MGC a (1) INVITE message containing the SDP.
- 8) The MGC exchanges TGCP signalling messages with the MG to create a (media) connection. During this exchange, session description information is also exchanged.
- 9) The MGC then sends a (2) 183-Session-Progress response back to the CMS with the SDP from the MG.

- 10) The CMS exchanges DQoS messages with the CMTS and NCS messages with the MTA so that the MTA will start reserving resources.
- 11) The CMS acknowledges the 183-Session-Progress using the (3) Provisional Reliable Ack (PRACK) message.
- 12) The MGC acknowledges the PRACK message with a (4) 200-OK message.
- 13) Once the MTA has successfully completed its resource reservation, the MTA exchanges NCS signalling messages with the CMS.
- 14) The CMS sends the (5) UPDATE message to the MGC.
- 15) The MGC sends an IAM message to the SG.
- 16) The MGC acknowledges the UPDATE message with a (6) 200-OK.
- 17) The MGC receives an ACM message from the SG.
- 18) If the ACM indicates, that the called party is being alerted, the MGC sends a (7) 180-Ringing message to the CMS. If the ACM instead indicated progress or in-band information available, the MGC would have sent a 183-Session-Progress instead (see [i.1] for details). In this latter case, the MGC would also exchange TGCP signalling with the MG instructing the MG to send packets to the MTA so that in-band media provided by the PSTN can be heard by the subscriber.
- 19) The CMS exchanges NCS signalling with the MTA instructing it to play ringback to the subscriber.
- 20) The CMS sends another (8) Provisional ACK (PRACK) to the MGC to acknowledge the receipt of the 18x message.
- 21) The MGC acknowledges the PRACK with a (9) 200-OK.
- 22) The MGC receives an ANM message from the SG.
- 23) The MGC exchanges TGCP signalling with the MG instructing it to enable a full duplex connection.
- 24) The MGC sends a (10) 200-OK final response to the initial INVITE from the CMS.
- 25) The CMS exchanges NCS signalling with the MTA instructing it to enable a full duplex connection.
- 26) The CMS acknowledges the 200-OK with an (11) ACK message, the call is "cut through".
- 27) The subscriber goes on hook.
- 28) The MTA exchanges NCS signalling with the CMS to notify the CMS of the on hook condition.
- 29) The CMS exchanges NCS signalling with the MTA instructing it to delete the connection and release resources.
- 30) The CMS sends the MGC a (12) BYE message.
- 31) The MGC sends the CMS a (13) 200-OK to acknowledge the BYE message.
- 32) The MGC sends a REL message to the SG.
- 33) The SG sends a RLC message to the MGC.
- 34) The MGC exchanges TGCP messages with the MG instructing the MG to delete the connection.

Figure 5 shows a basic on-net to off-net call flow using CMSS as the protocol between the CMS and the MGC.

CMSS CMS - MGC On Net To Off Net Call Flow

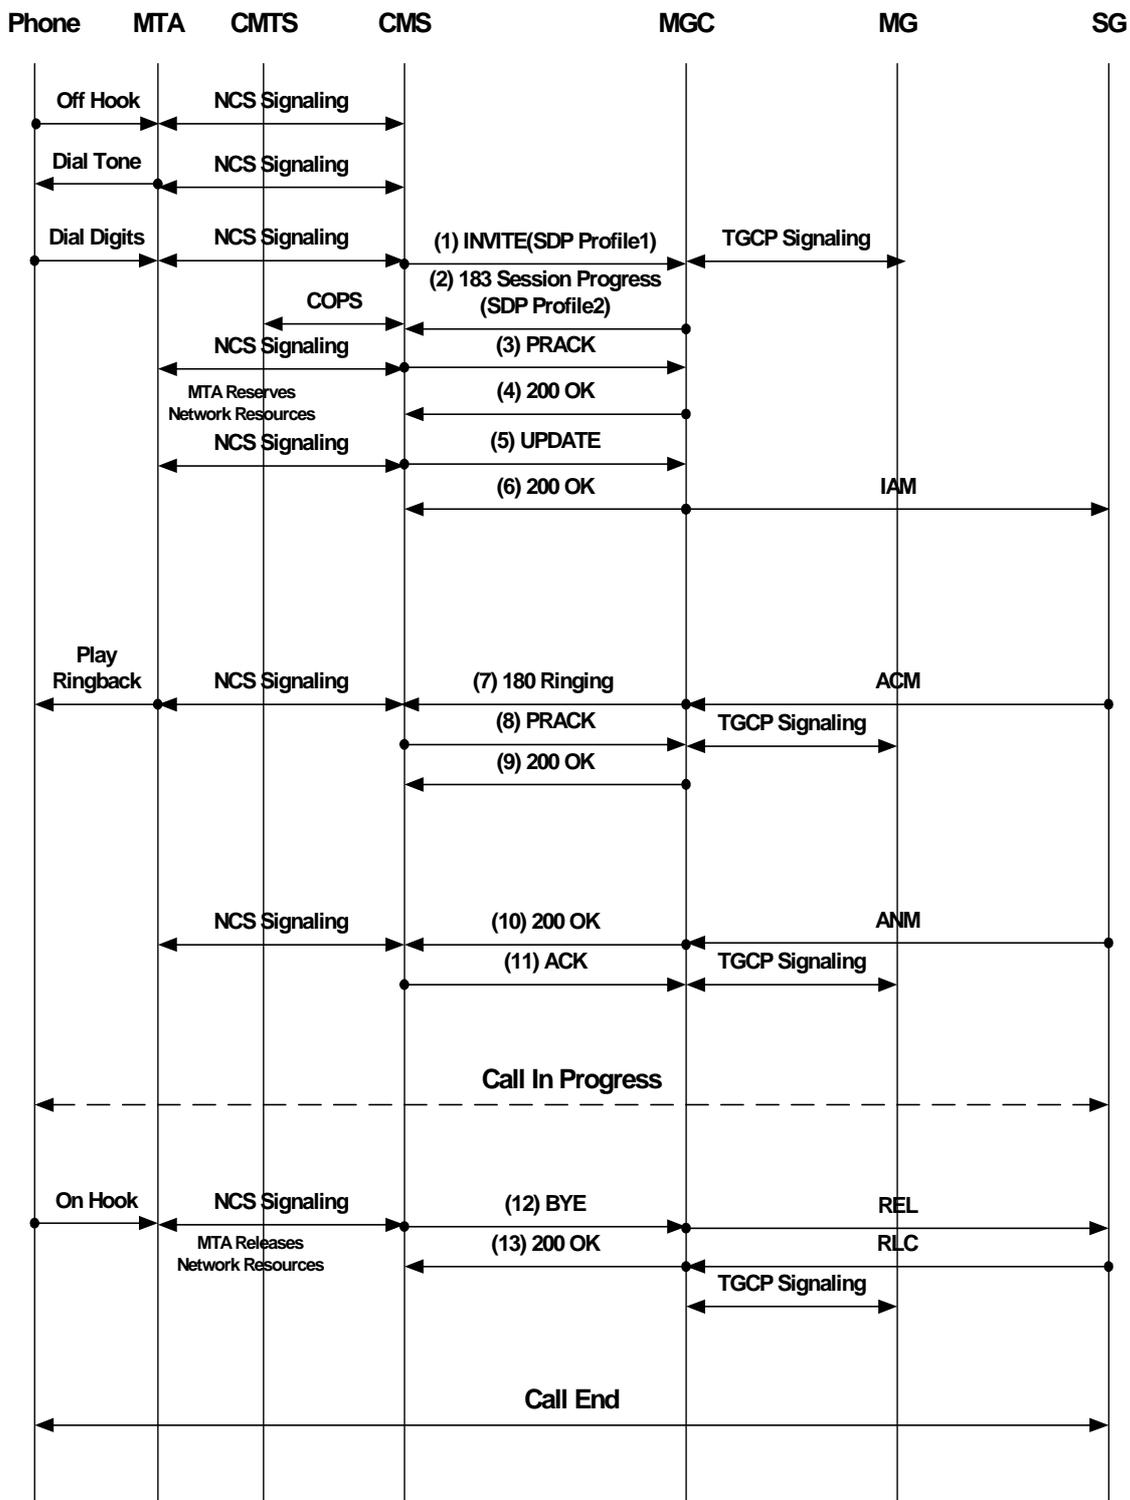


Figure 5: CMS to MGC Signaling

---

## 6 SIP PROFILE

This clause defines a SIP [6] profile for usage in CMSS compliant systems. This clause is structured to mirror the SIP document and its clause numbering. The subclauses of this clause are numbered such that the second digit tracks the SIP section numbers of the SIP specification [6] and section titles at all header levels track the section titles of the SIP specification [6].

This clause and clause 7 define the nearly complete set of enhancements and restrictions to a standard SIP implementation based on [6]. However, not all details of the required behaviour can be captured in these clauses. Later clauses provide details needed for certification and interoperability testing, which are generally not present in [6]. Clauses 6 through 9 are considered normative.

### 6.1 Introduction

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 1.

Since there are no requirements in SIP/2.0 [6] clause 1, CMSS implementations are automatically compliant with it.

### 6.2 Overview of SIP Functionality

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 2.

Since there are no requirements in SIP/2.0 [6] clause 2, CMSS implementations are automatically compliant with it.

### 6.3 Terminology

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 3.

Since there are no requirements in SIP/2.0 [6] clause 3, CMSS implementations are automatically compliant with it.

### 6.4 Overview of Operation

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 4.

Since there are no requirements in SIP/2.0 [6], clause 4, CMSS implementations are automatically compliant with it.

### 6.5 Structure of the Protocol

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 5.

Since there are no requirements in SIP/2.0 [6], clause 5, CMSS implementations are automatically compliant with it.

### 6.6 Definitions

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 6.

NOTE: The term "client" in this clause covers both UAs and proxies.

Since there are no requirements in SIP/2.0 [6], clause 6, CMSS implementations are automatically compliant with it.

### 6.7 SIP Messages

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 7, except as noted below.

## 6.7.1 Requests

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 7.1, except as defined in this clause.

The INVITE, ACK, CANCEL, BYE and OPTIONS methods shall be supported. The REGISTER method may be supported.

The SIP URI as defined in [6] and tel URI as defined in clause 7.1 shall be supported in the Request-URI.

When generating an initial INVITE for a basic telephone call, the Request-URI should identify the called party using a tel URI or by using the telephone-subscriber syntax (i.e. "user=phone") in a SIP URI. Refer to clause 8.3 for details on forming the associated Request-URI.

## 6.7.2 Responses

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 7.2.

## 6.7.3 Header Fields

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 7.3 and its subclauses.

Furthermore, CMSS compliant applications shall be able to both generate and accept short and long form header field names as defined in [6], clause 7.3.3.

## 6.7.4 Bodies

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 7.4 and its subclauses except as defined in this clause.

### 6.7.4.1 Message Body Types

CMSS compliant applications shall support the message body type "application/sdp".

The message body type "application/sdp" shall be supported with the INVITE, UPDATE and PRACK methods as well as any non-failure response to these methods. Furthermore, the message body type "application/sdp" shall be supported in success responses to OPTIONS requests and 488 responses to INVITE requests.

Refer to annex B for a complete list of supported values.

### 6.7.4.2 Message Body Length

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 7.4.2.

## 6.7.5 Framing SIP Messages

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 7.5.

## 6.8 General User Agent Behaviour

Behaviour of CMSS User Agents (UA) shall be in accordance with clause 8 and with [6] except as noted in this clause.

NOTE: The behaviour defined in this clause applies only to requests and responses outside of a dialog. Behaviour within a dialog is defined in clause 6.12.

### 6.8.1 UAC Behaviour

Support for the REGISTER method is OPTIONAL, however, if supported, it shall be as specified in [6], clause 8.1.

When a request is forked, multiple responses may be received, each of which results in the creation of an early dialog. Furthermore, each response may contain an answer and each early dialog may involve early media. Support for multiple simultaneous media streams for a single call, however is OPTIONAL for an MTA. In particular, MTAs may not be able to receive media from multiple different sources simultaneously, e.g. due to resource constraints, or when security services are used on the media stream. Furthermore, having multiple different sources sending media to the MTA at the same time has QoS implications that are outside the scope of the present document.

As a result of this, whenever a given request results in multiple early dialogs with multiple simultaneous media streams, the UAC should not enable early media on more than one of these dialogs. The details of how that is achieved are left to the implementation, however below are two options:

- The UAC may provide the MTA with the answer SDP from one of the early dialogs. The MTA in turn will only process media received in accordance with that SDP.
- When answer SDPs are received on the early dialogs, the UAC may issue new offers on all but one of these to suppress early media.

NOTE 1: This will also suppress final media until a new offer/answer exchange has been performed.

NOTE 2: When media stream security is not being used and the answer SDP is not provided until the final answer, the UAC cannot prevent the MTA from receiving multiple early media streams.

Once a final dialog has been established, media should be allowed on that dialog only.

### 6.8.1.1 Generating the Request

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 8.1.1, except as noted below.

Request-URI in the request contains the address of the callee. This will normally be a telephone-number, but it may also be a general SIP URI. This can, for example, be used when forwarding to an Interactive Voice Response (IVR) system.

The From and To fields in the request might contain random strings that protect the Privacy of the session originator.

Refer to clause 6.20 for further details of various header field values to be used.

By default, CMSS compliant implementations shall not require support for any particular extension. However, a given deployment may be configured to require one or more extensions to be supported. A default CMSS implementation will thus not use the Require or Proxy-Require header fields in requests outside of a dialog. Instead, a list of supported extensions will be included in the SIP Supported header in requests outside of a dialog. Once a dialog has been established (whether early or final), one or more of the supported extensions can then be required.

The above defines the default CMSS implementation, however a particular deployment may require that one or more extensions are supported. The set of extensions that are required to be used in a particular deployment can be configured on the CMSS. When one or more of such extensions have been configured as required, requests outside of dialogs will include the relevant option tags in the Require and/or Proxy-Require header fields. It should be noted that signalling with endpoints as well as proxies that do not support a required extension will result in failures.

The IETF allows option tags to be defined for their purpose only in standards-track RFCs. In addition to the standards-track RFCs' option tags, option tags from non-IETF documents may also be used, as long as they are defined in the present document.

### 6.8.1.2 Processing Responses

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 8.1.3 except as noted in this clause.

When receiving a 401 (Unauthorized) or 407 (Proxy Authentication Required) response, the SIP authorization procedure should only be followed if the UAC has credentials for the realm in question.

When receiving a 420 (Bad Extension) response, the SIP retry procedures should not be followed in the case where the deployment has been configured to require support of any of the extensions listed in the Unsupported header. In all other cases, the SIP retry procedures should be followed.

## 6.8.2 UAS Behaviour

The CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 8.2 and its subclauses.

## 6.8.3 Redirect Servers

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 8.3.

## 6.9 Cancelling a Request

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 9 and its subclauses.

## 6.10 Registrations

Proxies shall and UACs may, support the SIP REGISTER method in accordance with [6], clause 10. Support for registrars is OPTIONAL; however if supported, it shall be as specified in [6], clause 10.

## 6.11 Querying for Capabilities

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 11.

## 6.12 Dialogs

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 12 and its subclauses.

## 6.13 Initiating a Session

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 13 and its subclauses, except as noted in this clause.

CMSS compliant implementations should include a message body of type "application/sdp" with the initial INVITE.

When an initial INVITE is received with an offer SDP, an answer SDP should be included in the first non-failure response to the INVITE.

NOTE: If the response is not sent reliably, then the same answer SDP must be sent in the final response.

## 6.14 Modifying an Existing Session

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 14 and its subclauses, except as noted in this clause.

When a CMSS compliant implementation sends a re-INVITE, it should include a message body of type "application/sdp" with a new offer. Furthermore, CMSS compliant implementations shall support the procedures for modifying an existing session described in clause 8.4.4.

## 6.15 Terminating a Session

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 15 and its subclauses.

## 6.16 Proxy Behaviour

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 16 and its subclauses, except as noted in this clause.

Support for multiple simultaneous media streams for a single call is OPTIONAL for an MTA. Since parallel forking may result in multiple simultaneous media streams for a single call, systems that interact with CMSS compliant implementations should avoid using parallel forking and early media at the same time.

## 6.17 Transactions

CMSS compliant applications shall be in accordance with SIP/2.0 [6] clause 17 and its subclauses except as noted in this clause.

Behaviour of CMSS servers (proxies) shall be in accordance with clause 8, which takes precedence over [6], clause 17 in case of any conflicts.

## 6.18 Transport

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 18 and its subclauses.

## 6.19 Common Message Components

### 6.19.1 SIP URI Component

The definition of a SIP URI is as given in [6] clause 19.1.1 and extended in clause 7.1.1 in the present document.

## 6.20 Header Fields

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 20 and its subclauses, except as defined in this clause.

In addition to the extensions listed in clause 7, the following SIP headers shall be supported by CMSS compliant applications.

- 1) Accept
- 2) Accept-Encoding
- 3) Accept-Language
- 4) Allow
- 5) Call-ID
- 6) Contact
- 7) Content-Disposition
- 8) Content-Encoding
- 9) Content-Length
- 10) Content-Type
- 11) CSeq
- 12) From
- 13) Max-Forwards
- 14) MIME-Version
- 15) Proxy-Require
- 16) Record-Route

- 17) Require
- 18) Route
- 19) Supported
- 20) Timestamp
- 21) To
- 22) Unsupported
- 23) Via

Other SIP headers may be supported by CMSS compliant applications. CMSS compliant applications should ignore unsupported optional headers.

Listed below is each SIP header defined in [6] and the requirements for supporting each in CMSS are identified.

### 6.20.1 Accept

The Accept header shall be supported as specified in [6], clause 20.1.

### 6.20.2 Accept-Encoding

The Accept-Encoding header shall be supported as specified in [6], clause 20.2, except as noted below.

The Accept-Encoding header may be used by CMSS compliant implementations. The "identity" encoding value shall be supported; other encodings may be supported.

### 6.20.3 Accept-Language

The Accept-Language header shall be supported as specified in [6], clause 20.3, except as noted below.

CMSS compliant implementations should include the "Accept-Language" header in requests or responses as defined in [6]. The value "en" for English shall be supported, other values may be supported based on configuration data.

### 6.20.4 Alert-Info

The Alert-Info header shall be supported for emergency calls (see clause 8.4.2); otherwise, it may be supported. When included, it shall be as specified in [6], clause 20.4.

It is noted that there are security risks associated with acting on the Alert-Info header as described in [6], clause 20.4.

### 6.20.5 Allow

The Allow header field shall be supported as specified in [6], clause 20.5. CMSS compliant implementations shall include the "Allow" header in the initial INVITE and the 200-OK response to the initial INVITE. When an Allow header is not received, the set of supported methods is unknown.

Refer to annex B for a list of supported methods.

### 6.20.6 Authentication-Info

Support for the Authentication-Info is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.6.

See also clause 6.22.

## 6.20.7 Authorization

Support for the Authorization header field is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.7.

See also clause 6.22.

## 6.20.8 Call-ID

The Call-ID header shall be supported as specified in [6], clause 20.8, except as noted below.

CMSS restricts contents of the Call-ID header in order to support user Privacy.

When Privacy is requested by the session originator, the Call-ID shall not contain the "@" sign and hence consists of a single "word" as defined in [6], clause 25.1. The "word" shall be a random identifier and shall be unique across all possible UAs with probability of greater than 0.999999. A suggested implementation is a text encoding (which does not contain an "@") of a cryptographic hash of phone number, time, a random number and a quantity provisioned or manufactured to be unique across UAs of otherwise identical manufacture. The last quantity is suggested to help prevent UAs of an otherwise identical manufacture from producing identical "random" Call-IDs when presented with identical stimuli.

## 6.20.9 Call-Info

The Call-Info header shall be supported as specified in [6], clause 20.9 except as noted below.

The Call-Info header "purpose" parameter value of "answer\_if\_not\_busy" shall be supported; other encodings may be supported.

It is noted that there are security risks associated with acting on the Call-Info header as described in [6], clause 20.9.

## 6.20.10 Contact

The Contact header shall be supported as specified in [6], clause 20.10, except as noted below.

CMSS compliant applications shall populate the Contact header field in an INVITE request and in a 2xx response to an INVITE request, with a SIP URI. The contact address shall be in the form of a Globally Routable User-Agent URI (GRUU) [36] as specified in clause 7.11.

When the user is requesting Privacy, the Contact header field should not contain any domain names; the IP address form should be used instead. It should be noted that, in systems with multiple network interfaces, use of the (single) IP address form can reduce the overall system reliability. If multiple interfaces exist and reliability is a concern, it is considered a reasonable trade-off to refrain from using the IP address form. When providing a GRUU on behalf of a user that is requesting Privacy the CMSS compliant application shall provide a GRUU that does not reveal the identity of the user (i.e. a GRUU that has the properties of a temporary GRUU as defined in [36]).

CMSS compliant applications shall populate the Contact header field in a 3xx response to an INVITE request with a valid SIP or tel-URI. If the new destination is a telephone number, it should contain a tel URI with the number of the new destination as described in clause 7.1. Support for any other type of URI is OPTIONAL.

## 6.20.11 Content-Disposition

The Content-Disposition header shall be supported as specified in [6], clause 20.11, except as noted below.

The Content-Disposition header may be used by CMSS compliant implementations. The value "session" shall be supported; other values may be supported.

NOTE: The default value for message bodies of type "application/sdp" is "session", whereas the default value for all other message body types (e.g. "message/sipfrag") is "render". If the default value is not desired, then the Content-Disposition header shall be included.

## 6.20.12 Content-Encoding

The Content-Encoding header shall be supported as specified in [6], clause 20.12, except as noted below.

The Content-Encoding header may be used by CMSS compliant implementations. The "identity" encoding value shall be supported; other encodings may be supported.

## 6.20.13 Content-Language

Support for the Content-Language header is OPTIONAL, however if supported, it shall be as specified in [6], clause 20.13.

## 6.20.14 Content-Length

The Content-Length header shall be supported as specified in [6], clause 20.14.

It should be noted, that when stream-based protocols (such as TCP) are being used, a Content-Length header field must always be included, even if set to zero.

## 6.20.15 Content-Type

The "Content-Type" header shall be supported as specified in [6], clause 20.15.

Refer to annex B for a list of supported values.

## 6.20.16 CSeq

The CSeq header shall be supported as specified in [6], clause 20.16.

## 6.20.17 Date

Support for the Date header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.17.

## 6.20.18 Error-Info

Support for the Error-Info header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.18.

It is noted that there are security risks associated with acting on the Error-Info header as described in [6], clause 20.18.

## 6.20.19 Expires

Support for the Expires header in the non-REGISTER methods and responses defined in [6] is OPTIONAL; however, if supported, it shall be as specified in [6] clause 20.19.

NOTE: Per clause 7.5, support for the Expires header is required for the SUBSCRIBE method.

## 6.20.20 From

The From header shall be supported as specified in [6], clause 20.20, except as noted below.

In support of user Privacy, CMSS restricts the allowed contents of the SIP "From" header.

When the session originator requests Privacy, compliant applications shall generate a From header according to the following rules :

- The display-name shall be "Anonymous".
- The addr-spec shall contain the identifier "anonymous" for userinfo.
- The addr-spec shall contain the non-identifying hostname "anonymous.invalid".

### 6.20.21 In-Reply-To

Support for the In-Reply-To header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.21.

NOTE: Use of this header is subject to security considerations as described in [6], clause 20.21.

### 6.20.22 Max-Forwards

The Max-Forwards header shall be supported as specified in [6], clause 20.22, except as noted below.

When a CMSS compliant implementation of a back-to-back User Agent (B2BUA) forwards a request, it should use a Max-Forwards value equal to the incoming Max-Forwards value minus one.

### 6.20.23 Min-Expires

Support for the Min-Expires header is OPTIONAL (since support for the REGISTER method is optional); however, if supported, it shall be as specified in [6], clause 20.23.

### 6.20.24 MIME-Version

The MIME-Version header shall be supported as specified in [6], clause 20.24, except as noted below.

The MIME-Version header may be used by CMSS compliant implementations. The version "1.0" value shall be supported; other values may be supported.

### 6.20.25 Organization

Support for the Organization header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.25.

### 6.20.26 Priority

The Priority header shall be supported for emergency calls (see clause 8.4.2); otherwise, it may be supported. When included, it shall be as specified in [6], clause 20.26.

There are security ramifications for entities that act on this header.

### 6.20.27 Proxy-Authenticate

Support for the Proxy-Authenticate header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.27.

See also clause 6.22.

### 6.20.28 Proxy-Authorization

Support for the Proxy-Authorization header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.28.

See also clause 6.22.

### 6.20.29 Proxy-Require

The Proxy-Require header shall be supported as specified in [6], clause 20.29, except as noted below.

In addition to the standards-track RFCs' option tags, option tags from non-IETF documents may also be used, as long as they are defined in the present document.

Refer to annex B for a list of supported values.

Refer to clause 6.8.1.1 for considerations around the use of required proxy extensions.

### 6.20.30 Record-Route

The Record-Route header shall be supported as specified in [6], clause 20.30.

### 6.20.31 Reply-To

Support for the Reply-To header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.31.

### 6.20.32 Require

The "Require" header shall be supported as specified in [6], clause 20.32, except as noted below.

In addition to the standards-track RFCs' option tags, option tags from non-IETF documents may also be used, as long as they are defined in the present document.

Refer to annex B for a list of supported values.

Refer to clause 6.8.1.1 for considerations around the use of UserAgent extensions.

### 6.20.33 Retry-After

Support for the Retry-After header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.33.

### 6.20.34 Route

The Route header shall be supported as specified in [6], clause 20.34.

### 6.20.35 Server

Support for the Server header is OPTIONAL; however, if supported, it shall be as specified [6], clause 20.35.

### 6.20.36 FSubject

Support for the Subject header is OPTIONAL, however, if supported, it shall be as specified [6], clause 20.36.

### 6.20.37 Supported

The "Supported" header shall be supported as specified in [6], clause 20.37, except as noted below.

In addition to the standards-track RFCs' option tags, option tags from non-IETF documents may also be used, as long as they are defined in the present document.

Refer to annex B for a list of supported values.

Refer to clause 6.8.1.1 for considerations around the use of UserAgent extensions.

### 6.20.38 Timestamp

The Timestamp header shall be supported as specified in [6], clause 20.38, except as noted below.

CMSS compliant implementations may send the Timestamp header in requests; if received, this header shall be processed as described in [6], clause 20.38.

### 6.20.39 To

The To header shall be supported as specified in [6], clause 20.39. For dialog-initiating requests that are addressed to a destination identified by a telephone number (e.g. an originating INVITE), the To header shall be populated using the original, untranslated dialled digits, except as noted below.

If the dialled digits trigger a feature access code service - such as speed dial or auto recall - whereby the CMS chooses a destination number (e.g. based on information stored in the user's profile), then the To header for dialog-initiating requests shall be populated using the resultant destination number from the service invocation and not the original dialled digits.

In support of user Privacy, CMSS restricts the allowable contents of the SIP "To" header. The "To" header may indicate the dialled digits in a tel-URI (see clause 7.1). This information is of end-to-end significance and might reveal information about the caller's location, e.g. local, long-distance, PBX, or international.

When the call originator requests Privacy, CMSS compliant applications shall generate a "To" header according to the following rules:

- The display-name shall be absent.
- If a global telephone number is used (as defined in [28]), then the userinfo part of the addr-spec shall contain a full E.164 number, including the country code.
- If a local telephone number is used (as defined in [28]), then the userinfo part of the addr-spec must contain a phone-context. When possible, the phone-context should be a country code.

When the call originator does not request privacy, CMSS compliant applications should generate a "To" header according to the following rules:

- If a global telephone number is used (as defined in [28]), then the userinfo part of the addr-spec must contain a full E.164 number, including the country code.
- If a local telephone number is used (as defined in [28]), then the userinfo part of the addr-spec must contain a phone-context. When possible, the phone-context should be a country code.

## 6.20.40 Unsupported

The Unsupported header shall be supported as specified in [6].

## 6.20.41 User-Agent

Support for the User-Agent header is OPTIONAL; however, if supported, it shall be as specified [6], clause 20.41.

## 6.20.42 Via

The Via header shall be supported as specified in [6], clause 20.42, except as noted below.

When the user is requesting Privacy, the Via header field should not contain any domain names; the IP address form should be used instead. Support for IP address Privacy is described in more detail in clause 8.4.1.1.3. It should be noted that, in systems with multiple network interfaces, use of the (single) IP address form can reduce the overall system reliability. If multiple interfaces exist and reliability is a concern, it is considered a reasonable trade-off to refrain from using the IP address form.

A border proxy (EBP) which is passing a request outside of the trusted domain of the service provider may encrypt all "Via" headers except the topmost header (i.e. the "Via" header of the terminating proxy) to a non-recognizable string. The proxy may include the encrypted string in the Via header, or it may cache the encrypted "Via" headers and include a local token string in the Via header.

## 6.20.43 Warning

Support for the Warning header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.43.

## 6.20.44 WWW-Authenticate

Support for the WWW-Authenticate header is OPTIONAL; however, if supported, it shall be as specified in [6], clause 20.44.

See also clause 6.22.

## 6.21 Response Codes

CMSS compliant applications shall be in accordance with SIP/2.0 [6], clause 21 and its subclauses, except as specified below.

CMSS compliant applications should not issue a 401 or a 407 response; however, they shall process any such received responses in accordance with clause 6.8.1.2.

CMSS compliant implementations shall be in accordance with reference [45] in their ability to process any 433 Anonymity Disallowed final response that is received.

## 6.22 Usage of HTTP Authentication

Support of HTTP Authentication is OPTIONAL; however, if used, it shall be as specified in [26] and [6], clause 22. Where these documents conflict, [26] takes precedence.

See also clause 6.21.

## 6.23 S/MIME

Support of S/MIME is OPTIONAL; however, if used, it shall be as specified in [26] and [6], clause 23. Where these documents conflict, [26] takes precedence.

## 6.24 Examples

The examples provided in [6], clause 24 do not apply to CMSS compliant implementations. For equivalent examples, refer to clause 8.

## 6.25 Augmented BNF for the SIP Protocol

CMSS compliant applications shall comply with SIP/2.0 [6], clause 25.

## 6.26 Security Considerations: Threat Model and Security Usage Recommendations

CMSS compliant applications shall comply with the IPCablecom Security specification [26].

Support for the SIP Security Considerations specified in [6], clause 26 is considered OPTIONAL, unless they conflict with the IPCablecom Security specification [26], in which case they shall not be used.

## 6.27 Table of Timer Values

CMSS compliant applications shall comply with SIP/2.0 [6], Appendix A.

CMSS compliant applications shall also support the timer values defined in annex A according to the procedures specified in clause 8.4.

---

## 7 SIP Extensions

SIP [6] has a flexible mechanism for adding extensions and new fields to the protocol for support of additional capabilities. This clause defines a set of SIP extensions that enables IP-Cablecom CMSS-compliant systems to provide a robust multimedia service platform supporting basic telephony, CLASS and custom calling features, while at the same time allowing the supported services to evolve to a multimedia environment. Many of the extensions have been documented in RFCs, to which the present document provides cross-references.

This clause describes procedures applicable to both NCS and SIP based endpoints; however, it should be noted that SIP based MTAs are out of scope of IP-Cablecom 1.5 and are described and listed in this clause for reference purposes only. The term SIP User Agent (UA) in this clause refers to an originator/terminator of SIP requests. The combination of a UA with its SIP Proxy is in many ways equivalent to a CMS; likewise a CMS may be decomposed into a UA and a SIP Proxy (with a hidden and untestable interface between them) as shown in figure 3.

This clause follows the naming convention of SIP [6] of User Agents, Clients, Servers and Proxies. User Agent Clients initiate requests and in particular initiate sessions (i.e. they are call originators) and User Agent Servers respond to requests and in particular accept session requests (i.e. they are call terminators). A User Agent performs either role as required within the context of the call. The description of each extension in this clause gives the specific procedures for CMSs and Proxies.

The present document extends SIP in several ways, which are summarized here. A CMSS compliant implementation shall support all of these:

- CMSS supports a resource reservation scheme in which network resources are reserved prior to alerting the user. This is done through specification of preconditions that must be met prior to continuing the session establishment. Confirmation that the preconditions are met is indicated by an additional end-to-end message exchange (UPDATE/200-OK), which is nested within the normal INVITE/200-OK/ACK message exchange. This extension allows network resources to be reserved prior to alerting the user and also allows network resources to be committed after the user has accepted the invitation, i.e. answered the call. This extension is described further in [11].
- CMSS supports Privacy extensions to SIP. These extensions enable users to make connections without identifying themselves or revealing location information. When Privacy is not requested by the originator, calling number delivery and calling name delivery is provided to the destination (i.e. Caller-ID service) in a reliable manner. Entity identity is also provided to support regulatory features such as Customer Originated Trace, enabling a destination party to report a harassing session even if the originator requested anonymity. This extension is further described in [12] and [13].
- CMSS supports the DCS proxy-to-proxy extensions to SIP that allow proxies to pass additional information between them to perform service-provider functions such as accounting, authorization, billing, coordination of resources, electronic surveillance, etc. This extension is further described in [16].
- CMSS supports the ability to send a reliable provisional response to a SIP request, ensuring the delivery of the provisional response to the initiating UA, with retransmissions as needed. This extension is further described in [7].
- CMSS supports the ability to send a request to another user agent to instruct that other user agent to initiate a new INVITE. Three extensions are defined for this, as described in [17], [9] and [18].
- CMSS supports the ability to send a request to another user agent to update that user agent with parameters of the session that do not impact the state of the session (e.g. media parameters). This extension is further described in [10].

The remainder of this clause defines further extensions to SIP required by a CMSS compliant application.

This clause and clause 8, define the nearly complete set of enhancements and requirements to a standard SIP implementation based on [6]. However, not all details of the required behaviour can be captured in these clauses. Later clauses provide details needed for certification and interoperability testing, clauses 6 through 9 of the present document are normative.

## 7.1 URIs for Telephone Calls

CMSS compliant implementations shall support URIs for telephone calls as specified in RFC 3966 [28], except as noted in this clause.

### 7.1.1 Routing Number, Number Portability, Carrier Identification Code and Dial Around Indication Number

CMSS compliant implementations shall support extensions to the tel URI that relate to number portability and freephone service, as specified in RFC 4694 [29], except as noted in this clause.

CMSS compliant implementations shall support extensions to the tel URI that relate to the subscriber's presubscribed or dialled Carrier ID Code (CIC), as specified in [29] and draft-yu-tel-dai [51], except as noted in this clause.

CMSS compliant implementations shall support extensions to the tel URI to define a dial-around-indicator to indicate how the CIC was derived, as specified in [51] with the exceptions noted in this clause.

These extensions are defined as optional in the tel URI sense. RFC 3966 [28] specifies that an implementation may ignore optional parameters. However, CMSS compliant implementations shall support the extensions as specified in [29] and [51] and hence they shall not be ignored when received.

Unless stated otherwise in the present document, the set of requirements within [51] that apply to a CMSS compliant implementation depend on the role of the CMS as follows:

- a CMS that plays the role of a Call Agent serving NCS endpoints shall follow the requirements for "Network Node A" specified in [51];
- a CMS that plays the role of a proxy shall follow the requirements for "Network Node B" specified in [51];
- an MGC shall follow the requirements for the "GSTN GW" as specified in [51].

CMSS compliant implementations will use the [51] CIC feature to identify not only freephone carriers but also customers' pre-subscribed or dialled carrier access codes as follows:

- If the number dialled is a freephone number and a CIC parameter is included in the response to the freephone database query, then the CIC shall identify the carrier serving that freephone number, irrespective of the customers presubscribed or dialled carrier.
- If the number dialled is a not a freephone number and carrier-based routing is to be done for the call, then the CIC shall identify the pre-subscribed carrier for the caller, unless the caller dialled a carrier access code, in which case the CIC for that carrier shall be used. Also, if the number dialled is not a freephone number and carrier-based routing is to be done for the call, then the dial-around-indicator parameter shall be included. The dial-around-indicator parameter should not be included in any other case. When the dial-around-indicator parameter is included, it shall be set to one of the following values:
  - "presub" - the CIC contains the caller's presubscribed carrier;
  - "presub-da" - the CIC contains the caller's dialled carrier-identification-code; the caller has a presubscribed carrier;
  - "presub-daUnkwn" - the CIC may contain either a caller dialled carrier-identification-code or the caller's presubscribed carrier;
  - "da" - the CIC contains the caller's dialled carrier-identification-code; the caller does not have a presubscribed carrier;
  - "CIC-chrgPty" - the CIC is the preferred carrier of the charged party;
  - "altCIC-chrgPty" - the CIC is the alternate carrier of the charged party;
  - "verbal-clgPty" - the CIC was delivered verbally by the calling party;
  - "verbal-chrgPty" - the CIC was delivered verbally by the charged party;

- "emergency" - this is an emergency call;
- "operator" - the carrier was selected by a network operator.

### 7.1.2 Procedures at an Originating CMS

If the Request-URI of an initial INVITE requires routing via an equal access carrier in the PSTN and is either a tel-URI or a Sip URI with user=phone, a carrier-id-code parameter shall be included in the telephone-subscriber part with a value corresponding to the identity of the carrier preferred by the party paying for the call.

NOTE: For freephone numbers, this will be the carrier serving the freephone number.

If CMS<sub>O</sub> provides support for the caller to select a preferred carrier on a per-call basis, the carrier-id-code parameter shall be included in the telephone-subscriber part and set to the carrier-id-code that the caller has dialled, unless the number dialled is a freephone number. The carrier-id-code may furthermore be included in the Refer-To URI of a REFER request, when the party performing the refer is the party paying for the call.

A Tel or SIP(s) URI containing "npdi" in the telephone-subscriber part shall not appear other than in an initial INVITE Request-URI or the Refer-To URI of a REFER request sent to a proxy or CMST.

An originating CMS that performs the local-number-portability lookup and passes the REFER or initial INVITE request to a proxy or a terminating CMS shall generate a Request-URI containing a SIP(s) or Tel URI with the "npdi" parameter in the telephone-subscriber part.

An originating CMS that performs the local-number-portability lookup and passes the REFER or initial INVITE request to a proxy or a terminating CMS shall include the "rn" parameter indicating the returned value if the local-number-portability lookup returned a value different from the dialled number.

### 7.1.3 Procedures at a Terminating CMS

No specific procedures are defined.

### 7.1.4 Procedures at Proxy

A Tel or SIP(s) URI containing a "npdi" in the telephone-subscriber part shall not appear other than in an initial INVITE Request-URI or the URI of a Refer-To header in a REFER request sent to another proxy or CMS<sub>T</sub>.

A proxy that performs the local-number-portability lookup and passes the REFER or initial INVITE request to another proxy or CMS<sub>T</sub> shall, in each of these cases, generate a SIP(s) or Tel URI containing "npdi". A proxy that performs the local-number-portability lookup and passes the REFER or initial INVITE request to another proxy or CMS<sub>T</sub> shall include the "rn" parameter indicating the returned value if the local-number-portability lookup returned a value.

## 7.2 Reliability of Provisional Responses

CMSS compliant implementations shall support the extensions defined in [7], except as noted in this clause.

CMSS compliant implementations shall by default include a Supported header containing the value "100rel" in the initial INVITE request. Alternatively, if a CMS is configured to require use of reliable provisional responses, the initial INVITE request shall include a Require header containing the value "100rel".

When a CMSS compliant implementation receives an INVITE request with a Supported header that contains the value "100rel", the CMS shall send all non-100 provisional response reliably as defined in [7].

## 7.3 SIP UPDATE Method

CMSS compliant implementations shall support the extensions defined in [10] except as noted in this clause.

CMSs shall include the method "UPDATE" in the Allow header field in the relevant requests and responses as described in clause 6.

## 7.4 Integration of Resource Management and SIP

CMSS compliant implementations shall support the extensions defined in [11] except as noted in the subclasses below. In particular, CMSS compliant implementations shall support segmented QoS preconditions. CMSS compliant implementations may support end-to-end QoS preconditions, although the procedures are not specified here.

### 7.4.1 Procedures at an Originating CMS

CMSS compliant implementations shall support use of segmented QoS preconditions as defined in the following subclasses, however if a given deployment does not want to use QoS preconditions, the session originator (CMS<sub>O</sub>) shall not include any QoS precondition attributes in the SDP and the procedures below do not apply. When QoS preconditions are supported and can be used, one of the following three procedures shall be followed.

#### 7.4.1.1 Default Operation Using QoS Preconditions Strength "Optional"

Unless configured otherwise, the session originator (CMS<sub>O</sub>) shall include a Supported header containing the value "precondition". For each media flow in the SDP sent with the INVITE, the precondition-type shall be "qos" and the status-type shall be segmented, i.e. there needs to be separate attributes for the local and the remote segment as described in [11]. The strength-tag in the desired-status attributes shall be "none" and the direction-tag in the local and remote desired-status attributes shall be "sendrecv".

When CMS<sub>O</sub> receives an answer SDP, CMS<sub>O</sub> shall see if the answer SDP contains any QoS preconditions: if it does, then session establishment shall continue in accordance with the QoS preconditions. Otherwise, session establishment is already progressing and CMS<sub>O</sub> shall simply continue with local QoS operations independent of session progress.

#### 7.4.1.2 QoS Preconditions Strength "None"

If a given deployment has no preference about the use of QoS preconditions, the session originator (CMS<sub>O</sub>) should include a Supported header containing the value "precondition". For each QoS precondition it includes in the SDP, the precondition-type shall then be "qos" and the status-type shall be segmented, i.e. there needs to be separate attributes for the local and the remote segment as described in [11]. The strength-tag in the desired-status attributes shall be "none" and the direction-tag in the local and remote desired-status attributes shall be "sendrecv".

When CMS<sub>O</sub> receives an answer SDP, CMS<sub>O</sub> shall see if the answer SDP contains any QoS preconditions; if it does, then session establishment shall continue in accordance with the QoS preconditions. Otherwise, session establishment is already progressing and CMS<sub>O</sub> shall simply continue with local QoS operations independent of session progress.

#### 7.4.1.3 QoS Preconditions Strength "Mandatory"

If a given deployment requires use of QoS preconditions, the session originator (CMS<sub>O</sub>) shall include a Require header containing the value "precondition". For each media flow in the SDP sent with the INVITE, the precondition-type shall be "qos" and the status-type shall be segmented, i.e. there needs to be separate attributes for the local and the remote segment as described in [11]. The strength-tag in the desired-status attributes shall be "mandatory" and the direction-tag in the local and remote desired-status attributes shall be "sendrecv".

### 7.4.2 Procedures at a Terminating CMS

When an INVITE is received without any QoS preconditions, the procedures in this clause do not apply; instead normal SIP processing of the call occurs. When an INVITE with QoS preconditions is received, three sets of procedures are defined in the following clauses.

#### 7.4.2.1 QoS Preconditions Strength "None" or "Optional"

Unless configured otherwise, on receipt of an INVITE request containing "optional" or "none" QoS preconditions using a segmented status-type, a terminating CMS (CMS<sub>T</sub>) shall generate a 183-Session-Progress response with an SDP containing mandatory preconditions. For each media flow with QoS precondition in the answer SDP, the precondition-type shall be "qos" and the status-type shall be segmented, i.e. there needs to be separate attributes for the local and the remote segment as described in [11]. The strength-tag in the desired-status attributes shall be "mandatory" (i.e. CMS<sub>T</sub> must upgrade the strength to "mandatory" in the answer) and the direction-tag in the local and remote desired-status attributes shall be "sendrecv".

Unless configured otherwise, CMS<sub>T</sub> shall not proceed with the session until resources have been reserved in both the local and remote segments. If the desired status of the originating segment (remote from CMS<sub>T</sub>'s point of view) QoS precondition does not match its current status, then CMS<sub>T</sub> shall request a confirmation of the originating segment QoS reservation from CMS<sub>O</sub> by adding an "a=conf:" attribute where the precondition-type shall be "qos", the status-type shall be "remote" and the direction-tag shall be "sendrecv".

CMS<sub>T</sub> shall wait for the UPDATE message from the originator containing the success/failure indication of each precondition as determined by the originator. If that confirmation indicates a failure for a mandatory precondition, CMS<sub>T</sub> shall send a 580-Precondition-Failure response with the outcome of the preconditions to CMS<sub>O</sub>.

Once the preconditions are met, CMS<sub>T</sub> alerts the user and the SIP transaction completes normally.

#### 7.4.2.2 QoS Preconditions Strength "Mandatory"

On receipt of an INVITE request containing mandatory QoS preconditions using a segmented status-type, a terminating CMS (CMS<sub>T</sub>) shall generate a 183-Session-Progress response with an SDP. For each media flow with QoS precondition in the answer SDP sent, the precondition-type shall be "qos" and the status-type shall be segmented, i.e. there needs to be separate attributes for the local and the remote segment as described in [11]. The strength-tag in the desired-status attributes shall be "mandatory" and the direction-tag in the local and remote desired-status attributes shall be "sendrecv".

Unless configured otherwise, CMS<sub>T</sub> shall not proceed with the session until resources have been reserved in both the local and remote segments. If the desired status of the originating segment (remote from CMS<sub>T</sub>'s point of view) QoS precondition does not match its current status, then CMS<sub>T</sub> shall request a confirmation of the originating segment QoS reservation from CMS<sub>O</sub> by adding an "a=conf:" attribute where precondition-type shall be "qos", the status-type shall be remote and the direction-tag shall be "sendrecv".

### 7.5 SIP-Specific Event Notification

CMSS compliant implementations shall support the extensions defined in [9].

### 7.6 The REFER Method

CMSS compliant implementations shall support the extensions defined in [17] except as noted in this clause.

NOTE: This method makes use of the Notify mechanism defined in clause 7.5.

In CMSS, the use of the REFER method is specified both within an existing dialog and outside of a dialog as a dialog creating request.

#### 7.6.1 Procedures at an Originating CMS

The CMS originating a REFER shall include additional header parameters in the Refer-To header for a nested P-DCS-Billing-Info header and should include the additional header parameters for nested P-DCS-Laes and P-DCS-Redirect headers, as specified in clause 7.7.

NOTE: Please refer to clause 7.7.2 for additional guidance regarding the usage of P-DCS-Laes and P-DCS-Redirect headers.

The Accept header shall be present in a REFER request and the value shall include "message/sipfrag".

An originating CMS may initiate the REFER request as part of an existing INVITE established dialog or outside of the dialog as a dialog creating request. If the REFER is sent outside of a dialog then the CMS shall include a Target-Dialog header in the REFER that identifies the associated INVITE established dialog.

#### 7.6.2 Procedures at a Terminating CMS

If the action requested by the REFER is a SIP INVITE, then the NOTIFY sent when it completes shall include the call-leg identification for the newly established session (i.e. the From, To and Call-ID headers).

The uri-parameters in a SIP or tel URI in a Refer-To header shall be present in the generated INVITE request as described in clauses 6.19 and 7.7. Further, any nested headers (using the '?' syntax defined in RFC 3261 [6]) present in the Refer-To header shall be present in the INVITE request.

If the REFER is received outside of an existing dialog then CMS<sub>T</sub> shall verify that the REFER contains a Target-Dialog header as defined in clause 7.14. If the header is absent then CMS<sub>T</sub> shall reject the REFER with a 400-Bad-Request final response. If the Target-Dialog header is present, then CMS<sub>T</sub> shall associate the dialog in the target header with an existing SIP dialog. If the dialog identified by the Target-Dialog does not match an existing SIP dialog at CMS<sub>T</sub> then CMS<sub>T</sub> shall reject the REFER with a 481-Transaction-Not-Found final response. If the dialog identified by the Target-Dialog header does match an existing dialog, then CMS<sub>T</sub> shall associate the REFER with that dialog. Furthermore, if the Refer-To header in the REFER does not contain a nested P-DCS-Billing-Info header, then CMS<sub>T</sub> shall use the BCID from the dialog identified in the Target-Dialog header as the BCID for the new dialog that is created as a result of the REFER. Refer to clause 7.14 for further details on the Target-Dialog mechanism.

## 7.7 SIP Proxy to Proxy Extensions for Supporting DCS

CMSS compliant implementations shall support the extensions defined in [16] except as defined in this clause.

### 7.7.1 P-DCS-Trace-Party-ID

Support for the P-DCS-TRACE-PARTY-ID header is not required.

### 7.7.2 P-DCS-LAES and P-DCS-REDIRECT

For the purposes of the present document, the 4th paragraph in clause 8 of [16] is intended to require that CMSS compliant devices fully implement the P-DCS-LAES and P-DCS-REDIRECT headers as defined in [16] (with the exceptions noted in the present document) and also implement a mechanism that allows the service provider to turn this feature on or off as required by applicable legislation. For example, an operator may be required to include these headers as specified in [16] for calls within the operator's own network, while excluding the headers for calls that terminate on another operator's network.

#### 7.7.2.1 P-DCS-LAES Header

The P-DCS-LAES-Header is used to pass the responsibility for performing electronic surveillance on a call from one CMS to another. For example, if a call terminates to a line that is marked for surveillance and the line also has call-forwarding activated, then the terminating CMS can include the P-DCS-LAES header in the forwarded INVITE request or 302-Redirect response to inform the forwarded-to CMS that it should perform the surveillance function.

The P-DCS-LAES header contains information to support surveillance of both call-data and call-content. The call-data information, which consists of the BCID assigned to the call-data event stream and the address of the Delivery Function (DF) to receive the call-data events, is always present. The call-content information, which consists of the CCCID assigned to the call-content stream, plus the address of the DF to receive call-content, is optional.

The P-DCS-LAES header syntax is as defined in [16].

The Laes-bcid field shall always be present. The Laes-cccid field shall be present when the Laes-content field is present. The Laes-key field shall not be included.

#### 7.7.2.2 Surveillance Procedures at Originating CMS

An originating CMS (CMS<sub>O</sub>) is required to perform electronic surveillance functions for an originating call if the originating line has an outstanding lawfully authorized electronic surveillance order. An originating CMS may also choose to perform electronic surveillance functions on behalf of a terminating CMS for certain-call forwarding and call-transfer scenarios. The following subclauses detail the responsibilities of the originating CMS for these various surveillance scenarios.

### 7.7.2.2.1 CMS<sub>O</sub> Receives REFER Request or Redirect Response

When CMS<sub>O</sub> receives a 3XX Redirect response containing a P-DCS-Laes header in response to an INVITE, or receives a REFER request containing a P-DCS-Laes header in the Refer-To header for an active dialog, then it shall copy the received P-DCS-Laes header into the subsequent INVITE that is generated as a result of the REFER or Redirect. This will enable the new terminating CMS to perform the surveillance on behalf of the CMS that generated the Redirect response or REFER request message.

The following subclauses describe the CMS<sub>O</sub> behaviour when the P-DCS-Laes header cannot be forwarded to the new terminating CMS for some reason.

#### 7.7.2.2.1.1 Redirected Call Ends Early

If CMS<sub>O</sub> receives a REFER request or 3XX Redirect response message as described above, but the call ends before the subsequent INVITE is sent (say the call is abandoned), then CMS<sub>O</sub> shall send a SurveillanceStop message to its local DF containing the following information:

- The local BCID already assigned to the call (this is a required field in the event message header),
- The remote BCID assigned by CMS<sub>T</sub> and received in the P-DCS-Laes header,
- The call-data IP address and port of the remote DF of CMS<sub>T</sub> received in the P-DCS-Laes header,
- An indicator specifying that both call-data and call-content surveillance are to be stopped,
- An indicator specifying that the local surveillance session (if active) and remote surveillance session are to be stopped.

This will tell the remote DF (i.e. the DF of CMS<sub>T</sub>) that the call has ended and not to expect further surveillance information.

#### 7.7.2.2.1.2 P-DCS-LAES Header Cannot Be Included in Subsequent INVITE

If CMS<sub>O</sub> is unable to include the P-DCS-Laes header in the subsequent INVITE for some reason (see clause 7.7.2), then CMS<sub>O</sub> may choose either to perform the required surveillance function or to stop the remote surveillance session.

##### 7.7.2.2.1.2.1 CMS<sub>O</sub> Chooses To Perform Requested Surveillance

If CMS<sub>O</sub> chooses to perform the requested call-data surveillance function, it shall send a SignalingStart message to its local DF containing the following information:

- the local BCID already assigned to the call (this is a required field in the event message header);
- the remote BCID assigned by CMST and received in the P-DCS-Laes header;
- the call-data IP address and port of the remote DF of CMST received in the P-DCS-Laes header.

This will bind the local BCID to the remote surveillance session and thus enable the local DF to relay subsequent call-data events for this call to the remote DF and BCID of the terminating CMS. Note that if CMS<sub>O</sub> is already monitoring the call (e.g. due to an outstanding lawfully authorized surveillance order on the originating subscriber) when it receives a P-DCS-Laes header, then it shall send a second SignalingStart message to its local DF, containing the appropriate parameters as specified above. This means that the DF must be able to receive two SignalingStart messages for the same call. The second SignalingStart should be used by the local DF only to establish the local-to-remote binding for relay of call-data and possibly call-content to the remote DF.

If the P-DCS-Laes header received in the 3XX Redirect response or REFER request also indicates that call content surveillance is to be performed (in addition to call data), then CMS<sub>O</sub> shall allocate a local CCCID for the call and request the CMTS of the originating line (or MG of the originating trunk if the originator is off-net) to provide a copy of the call content to the local DF.

NOTE: If the originating line or trunk is already being surveilled, then CMS<sub>O</sub> simply uses the already allocated CCCID.

In addition to the call-data information specified above, CMS<sub>O</sub> shall include the following data in the SignalingStart message to the local DF:

- The local CCCID assigned to the call;
- The remote CCCID assigned by CMST and received in the P-DCS-Laes header;
- The call-content IP address and port of the remote DF of CMST received in the P-DCS-Laes header.

This will enable the local DF to relay subsequent call-content packets received from the originating CMTS or MG for this call to the remote DF and CCCID of the terminating CMS.

When the call ends, CMS<sub>O</sub> shall send a SurveillanceStop message to its local DF containing the local BCID and indicating that both local and remote call-data and call-content surveillance are to be stopped. This will terminate the surveillance session in the remote DF for both call-data and call-content (if applicable), clear the local-to-remote binding information in the local DF and stop the local surveillance session (if active).

#### 7.7.2.2.1.2.2 CMS<sub>O</sub> Chooses to Perform Call-Data But Not Call-Content

If the P-DCS-Laes header received in the 3XX Redirect response or REFER request indicates that both call-data and call-content surveillance are to be performed, but CMS<sub>O</sub> chooses to support only call-data (and not call-content), then it shall send a SignalingStart message to its local DF containing the call-data information specified in clause 7.7.2.2.1.2.1.

This will enable the local DF to relay subsequent call-data events for this call to the remote DF and BCID of the terminating CMS.

In addition, CMS<sub>O</sub> shall send a SurveillanceStop message containing the following information:

- the local BCID assigned by CMS<sub>O</sub> to the call (this BCID was bound to the remote surveillance session by the previous SignalingStart message);
- an indicator specifying that only the remote surveillance session is to be stopped (this allows a local surveillance session that may be in progress on the originating endpoint to continue);
- an indicator specifying that (only) call-content surveillance is to be stopped (this allows the remote call-data surveillance to continue).

On receiving this message, the local DF will send a SurveillanceStop message to stop the remote call-content surveillance session.

#### 7.7.2.2.1.2.3 CMS<sub>O</sub> Chooses Not To Perform the Requested Surveillance

If CMS<sub>O</sub> chooses not to perform any of the requested surveillance functions, then it shall send a SurveillanceStop message to its local DF containing the following information:

- the local BCID assigned by CMS<sub>O</sub> to the call (note that even though the local BCID is a required parameter, it does not convey any useful information in this case since the local BCID was not bound to the remote surveillance session by a previous SignalingStart message);
- the remote BCID assigned by CMST and received in the P-DCS-Laes header;
- the call-data IP address and port of the remote DF of CMST received in the P-DCS-Laes header;
- an indicator specifying that only the remote surveillance session is to be stopped (this allows a local surveillance session that may be in progress on the originating endpoint to continue);
- an indicator specifying that both call-data and call-content surveillance are to be stopped.

On receiving this message, the local DF will send a SurveillanceStop message to stop the remote surveillance session.

### 7.7.2.3 Surveillance Procedures at Terminating CMS

A terminating CMS is required to perform surveillance functions for an incoming call for two cases; when the terminating line has an outstanding lawfully authorized electronic surveillance order and when the received INVITE request contains a P-DCS-Laes header requesting the terminating CMS to perform surveillance for this call on behalf of a remote CMS. The following clauses detail the responsibilities of the terminating CMS (CMS<sub>T</sub>) for these cases.

#### 7.7.2.3.1 Terminating Line is Able to Accept the Call

If the terminating line is able to accept the call and either a local outstanding lawfully authorized electronic surveillance order exists for the line, or a P-DCS-Laes header is received in the INVITE, then CMS<sub>T</sub> shall send a SignalingStart message to the local DF containing the identity of the terminating line and the local BCID assigned to the call. Note the local BCID is a mandatory field. This will associate the terminating line to the BCID for all subsequent call-data event messages sent to the local DF for this call. If a P-DCS-Laes header was received, then CMS<sub>T</sub> shall include the following additional information in the SignalingStart message:

- the remote BCID assigned by the remote CMS and received in the P-DCS-Laes header;
- the call-data IP address and port of the remote DF received in the P-DCS-Laes header.

This additional data will enable the local DF to relay subsequent call-data events for this call to the remote DF and BCID of the remote CMS.

If either the local electronic surveillance order or the received P-DCS-Laes header indicates that call-content surveillance is to be performed, then CMS<sub>T</sub> shall allocate a local CCCID for the call and request the CMTS of the terminating line (or MG of the terminating trunk if the terminator is off-net) to provide a copy of the call content to the local DF. In addition to the call-data parameters specified above, CMS<sub>T</sub> shall include the local CCCID in the SignalingStart message to the local DF. If a P-DCS-Laes header was received that indicates that call-content surveillance is to be performed, then CMS<sub>T</sub> shall include the following additional information in the SignalingStart message:

- the remote CCCID assigned by the remote CMS and received in the P-DCS-Laes header;
- the call-content IP address and port of the remote DF received in the P-DCS-Laes header.

This additional data will enable the local DF to relay subsequent call-content packets received from the terminating CMTS or MG for this call to the remote DF and CCCID.

When the call ends, CMS<sub>T</sub> shall send a SurveillanceStop message to its local DF containing the local BCID and indicating that both local and remote call-data and call-content surveillance are to be stopped. This will terminate the surveillance session in the remote DF for both call-data and call-content (if applicable), clear the local-to-remote binding information in the local DF and stop the local surveillance session (if active).

#### 7.7.2.3.2 Terminating Line is Unable to Accept the Call

If CMS<sub>T</sub> receives an INVITE request containing a P-DCS-Laes header and the terminating endpoint is not able to accept the call for some reason (e.g. line is busy, line is unknown) and CMS<sub>T</sub> does not need to otherwise initiate a surveillance session, then CMS<sub>T</sub> shall send a SurveillanceStop message containing the following information:

- the local BCID assigned by CMST to this call (to avoid affecting other surveillance sessions, CMST must use the BCID for this call and not the BCID of any other in-progress call on the same line);
- the remote BCID received in the P-DCS-Laes header;
- the call-data IP address and port of the remote DF received in the P-DCS-Laes header;
- an indicator specifying that both call-data and (if active) call-content surveillance are to be stopped.

On receiving this message, the local DF will send a SurveillanceStop message to stop the remote surveillance session.

NOTE: There are cases where CMS<sub>T</sub> must initiate a surveillance session for the terminating call even though it does not actually offer the call to the terminating line. For example, if the terminating line activates the do-not-disturb feature, then CMS<sub>T</sub> must initiate a surveillance session to record a service instance of do-not-disturb and then immediately stop the surveillance session. These cases are handled as specified in clause 7.7.2.3.1.

### 7.7.2.3.3 Terminating CMS is Unable to Perform Call-Content Surveillance

If CMS<sub>T</sub> receives an INVITE containing a P-DCS-Laes header requesting call-data and call-content surveillance and CMS<sub>T</sub> is unable to perform the call-content surveillance for some reason (e.g. call routed to voice mail server), then CMS<sub>T</sub> must continue to perform the call-data surveillance as specified in clause 7.7.2.3.1. Once this procedure has established the local-to-remote call-data surveillance information in the local DF, CMS<sub>T</sub> shall send SurveillanceStop message containing the following information:

- the local BCID assigned to the terminating call;
- an indication that call-content surveillance is to be terminated.

This will enable the local DF to inform the remote DF that the call-content surveillance session has ended while allowing the call-data surveillance to continue for the duration of the call.

### 7.7.2.3.4 Terminating CMS Redirects or Transfers the Call

If CMS<sub>T</sub> is required to perform surveillance on a call (either as a result of terminating to a subscriber with a lawfully authorized surveillance order, or as specified in the P-DCS-Laes header of the INVITE message from the CMS<sub>O</sub>), but the call is redirected or transferred to a new terminating line, then CMS<sub>T</sub> shall send a SignalingStart message to the local DF containing the identity of the terminating line and the local BCID assigned to the call. This will associate the terminating line to the local BCID for all subsequent call-data event messages sent to the local DF for this call. If a P-DCS-Laes header was received, then CMS<sub>T</sub> shall include the following additional information in the SignalingStart message:

- the remote BCID assigned by the remote CMS and received in the P-DCS-Laes header;
- the call-data IP address and port of the remote DF received in the P-DCS-Laes header.

This additional data will enable the local DF to relay subsequent call-data events for this call to the remote DF and BCID of the remote CMS.

If either the local electronic surveillance order or the received P-DCS-Laes header indicates that call-content surveillance is to be performed, then CMS<sub>T</sub> shall allocate a local CCCID for the call.

NOTE: If the call is forwarded immediately on termination, then CMS<sub>T</sub> does not request the terminating CMTS or MG to provide a copy of the call-content for this call.

In addition to the call-data parameters specified above, CMS<sub>T</sub> shall include the local CCCID in the Signaling Start message to the local DF.

If a P-DCS-Laes header was received indicating that call-content surveillance is to be performed, then CMS<sub>T</sub> shall include the following additional information in the SignalingStart message:

- the remote CCCID assigned by the remote CMS and received in the P-DCS-Laes header;
- the call-content IP address and port of the remote DF received in the P-DCS-Laes header.

This additional data will enable the local DF to relay subsequent call-content packets received from the final terminating CMTS or MG for this call to the remote DF and CCCID.

The remaining action taken by CMS<sub>T</sub> depends on whether it redirects the call by sending a REFER request or 3XX Redirect response to the originating CMS, or by remaining in the signalling path as a proxy for the remainder of the call.

#### 7.7.2.3.4.1 CMS<sub>T</sub> Sends REFER Request or Redirect Response

If CMS<sub>T</sub> transfers or forwards the call by sending a REFER request or Redirect response to the originating CMS, then it shall include a P-DCS-Laes header in the Redirect response or in the Refer-To header of the REFER request.

NOTE: The CMS initiating the REFER is sometimes referred to as CMS<sub>I</sub> in the present document.

The P-DCS-Laes header shall contain the following information:

- the local BCID assigned to the call;
- the call-data IP address and port of the local DF;
- if CMST is required to perform call-content surveillance for the call, then it shall include the following additional data in the P-DCS-Laes header:
  - the local CCCID assigned to the call;
  - the call-content IP address and port of the local DF.

This will enable the DF of the new terminating CMS to relay call-data events and (if required) call-content packets to the local DF.

#### 7.7.2.3.4.2 CMS<sub>T</sub> Remains in the Signaling Path as a Proxy

If CMS<sub>T</sub> is to remain in the signalling path and it is allowed to include a P-DCS-Laes header in the new INVITE request per clause 7.7.2, then CMS<sub>T</sub> shall include the P-DCS-Laes header in the new INVITE request. The P-DCS-Laes header shall contain the following information:

- the local BCID assigned to the call;
- the call-data IP address and port of the local DF.

If CMS<sub>T</sub> is required to perform call-content surveillance for the call and it is allowed to include a P-DCS-Laes header in the new INVITE request per clause 7.7.2, then it shall include the following additional data in the P-DCS-Laes header:

- the local CCCID assigned to the call;
- the call-content IP address and port of the local DF.

This will enable the DF of the new terminating CMS to relay call-data events and (if required) call-content packets to the local DF.

Once CMS<sub>T</sub> has sent the INVITE containing the P-DCS-Laes header, it will not generate any further call-data events to its local DF for this call.

If CMS<sub>T</sub> is to remain in the signalling path, but it is not allowed to include a P-DCS-Laes header in the new INVITE request per clause 7.7.2, then it shall support the call-data surveillance as specified in clause 7.7.2.3.1. Furthermore, if call-content surveillance is required, then CMS<sub>T</sub> shall send a SignallingStop message to terminate the call-content surveillance session.

#### 7.7.2.4 Surveillance Procedures at a CMS Proxy

Electronic surveillance does not impose any special requirements on CMS tandem-proxies that act as dedicated routing proxies. Tandem-proxies will pass the P-DCS-Laes header transparently and will not communicate with the DF.

### 7.7.2.5 Interworking with CSCFs

CSCFs do not generate CCCIDs even when intercepting call content, but populate the CCCID with a null value. Therefore, a CMS that receives a P-DCS-LAES from a CSCF that requires call content intercept will need to generate a CCCID value on behalf of the CSCF. If the CMS<sub>T</sub> receives a SIP message containing a P-DCS-LAES header requesting call-data and call-content surveillance from a CSCF that does not include a value for the 'cccid', the CMS<sub>T</sub> shall generate a local 'cccid' value and populate the P-DCS-LAES header with this value and use this value in event reporting to the DF. This CCCID is generated on behalf of the CSCF for use by the CMS. If the CMS<sub>T</sub> receives a SIP message containing a P-DCS-LAES header requesting call-data and call-content surveillance from a CSCF that includes a value for the 'cccid', the CMS<sub>T</sub> shall use the value in event reporting to the DF. A CMS<sub>T</sub> that does content tapping and receives a SIP message containing a P-DCS-LAES header should send a Media-Report message to the DF. The CMS<sub>T</sub> follows the balance of procedures as described in clause 7.7.2.3.

### 7.7.3 P-DCS-Billing-Info

The P-DCS-Billing-Info header is used to pass accounting information between CMS nodes. clauses 7.7.3.1 through 7.7.3.3 augment the P-DCS-Billing header-Info requirements in [16] by clarifying how the JIP-param procedures are applied based on the role of the CMS.

Clause 7.7.3.4 describes special procedures that are used to convey accounting information between an IPCablecom 2.0 Call Session Control Function (CSCF) and an IPCablecom 1.5 CMS or MGC.

#### 7.7.3.1 Procedures at an Originating CMS

An originating CMS that passes a REFER or initial INVITE request to a proxy or a terminating CMS shall include the JIP-param in the P-DCS-Billing-Info header indicating the NPA-NNX of the originating CMS. In the case of a REFER request, the JIP-param shall be included in the P-DCS-Billing header in the Refer-To header. Similarly, an originating MGC that receives the originator's jurisdiction information from the PSTN and passes an initial INVITE to a proxy or terminating CMS shall include the jurisdiction information in the JIP-param in the P-DCS-Billing-Info header.

The following example shows how a JIP-param would be encoded when the calling number is ported to a CMS serving NPA-NXX 202-544:

```
jip="202554;jip-context=+1"
```

#### 7.7.3.2 Procedures at a Terminating CMS

A terminating CMS that returns a 3xx-Redirect response to an originating CMS shall include the JIP-param in the P-DCS-Billing-Info header indicating the NPA-NNX of the "forwarded from" party.

#### 7.7.3.3 Procedures at a Proxy

No specific procedures are defined.

#### 7.7.3.4 Interaction with CSCF Signaling Nodes

IPCablecom 2.0 [i.9] does not support the P-DCS-Billing header. Instead, accounting information is shared between CMS and Call Session Control Functions (CSCFs) using the P-Charging-Vector and P-Charging-Function-Address headers as defined in [38] and [39] and the P-Charge-Info header as defined in [52]. The information contained in these headers is used in place of the P-DCS-Billing header (for example, when the MGC is interworking with the PSTN). When routing session requests to CSCFs, it will be necessary for the CMS or MGC to be aware of the fact that it is communicating with a CSCF so that these headers can be processed correctly as specified in the following clauses.

For signalling to CSCFs across trust boundaries, an Inter-Operator Identifier (IOI) in the P-Charging-Vector is used to identify the originating and terminating operators. This IOI is equivalent to the Financial Entity ID (FEID) in the IPCablecom 1.5 domain, so a mapping is done from FEID to IOI on outgoing signalling and from IOI to FEID on incoming signalling.

#### 7.7.3.4.1 Sessions initiated from a CSCF to a CMS or MGC

Incoming sessions from a CSCF will contain charging information in a P-Charging-Vector and possibly a P-Charging-Function-Address header. A P-Charge-Info header [52] may also be present.

If the incoming request is from within the same trust domain as the CMS or MGC, the P-Charging-Vector header will be guaranteed to contain the icid-value parameter and this value will be used to correlate the IPCablecom 1.5 event messages with the charging information from the IMS domain. In this case, the ICID will be distinct from the BCID and the terminating BCID shall be independently generated by the terminating CMS or MGC as is normally done for inter-CMS calls.

If the incoming request is from outside the trust domain of the CMS or MGC, the P-Charging-Vector will be guaranteed to contain the orig-ioi parameter and this value will be used to do inter-operator settlements. Since the orig-ioi identifies the other operator's domain, this value will be used as the originating FEID in the IPCablecom 1.5 domain.

When a CMS or MGC receives an INVITE from a CSCF with an icid-value parameter in the P-Charging-Vector header, the icid-value shall be included in Event Messaging as described in [23].

When a CMS or MGC receives an INVITE from a CSCF with an orig-ioi parameter in the P-Charging-Vector header, the orig-ioi shall be used as the originating FEID for the session and included in Event Messaging as described in [23].

When a CMS or MGC responds to an INVITE from a CSCF that contained the orig-ioi parameter, it shall include the term-ioi parameter in the P-Charging-Vector header containing the terminating FEID.

When the CMS or MGC receives an INVITE from a CSCF with a P-Charging-Function-Address header, the CCF values included in the header may be used to identify the RKS entities to be used for the session.

When an MGC receives an INVITE from a CSCF with a P-Charge-Info header, the MGC shall use the contents of the P-Charge-Info header to populate the ISUP Charge Number Parameter.

#### 7.7.3.4.2 Sessions initiated from a CMS or MGC to a CSCF

Outgoing sessions to a CSCF will contain charging information in a P-Charging-Vector and possibly a P-Charging-Function-Address header. A P-Charge-Info header [52] can also be present.

If the outgoing request is for a CSCF within the same trust domain as the CMS or MGC, the P-Charging-Vector header needs to be populated with the icid-value parameter. Since the originating BCID in the IPCablecom 1.5 domain fulfils the uniqueness requirements for ICIDs, the CMS or MGC will use the BCID as the icid-value in the session request.

If the outgoing request is to a CSCF outside the trust domain of the CMS or MGC, the P-Charging-Vector needs to be populated with the orig-ioi parameter and this value will be used to do inter-operator settlements. Since the FEID identifies operator domain of the CMS or MGC, this value will be used as the orig-ioi.

When a CMS or MGC generates an INVITE to a CSCF that is within the same trust domain as the CMS or MGC, the CMS or MGC shall include a P-Charging-Vector header in the INVITE containing an icid-value parameter with the originating BCID. The BCID shall be encoded as a hexadecimal character string of up to 48 bytes as defined in [16]. In this case, the CMS or MGC may also include the icid-gen-addr and/or P-Charging-Function-Addresses header.

When a CMS or MGC generates an INVITE to a CSCF and if the charged number for the call is different than the calling number, then it shall include a P-Charge-Info header [52] in the INVITE that identifies the charged number for the call. The charge number can be obtained from the P-DCS-Billing-Info header, if one is present.

When a CMS or MGC generates an INVITE to a CSCF that is not in the same trust domain as the CMS or MGC, the CMS or MGC shall include a P-Charging-Vector header within the INVITE containing an orig-ioi parameter with the value of the originating FEID. In this case, the CMS or MGC shall not include the icid-value, icid-gen-addr, or P-Charging-Function-Addresses header in the INVITE.

When a CMS or MGC receives a response from a CSCF with a term-ioi parameter in the P-Charging-Vector header, the value of the term-ioi shall be used as the terminating FEID for the session and included in Event Messages to the RKS as described in [23].

### 7.7.4 P-DCS Option Tag

The extensions defined in [16] do not define any option tags; however the CMSS specification defines the option tag "P-DCS" to indicate support of the extension headers P-DCS-Billing-Info, P-DCS-Laes and P-DCS-Redirect as specified in [16].

CMSS compliant implementations may use the option tag "P-DCS" in the Supported header and they shall accept requests with a Require value of "P-DCS".

## 7.8 The SIP "Replaces" Header

CMSS compliant implementations shall support the extensions defined in [18].

## 7.9 Private Extensions to the SIP Protocol for Asserted Identity within Trusted Networks

CMSS compliant implementations shall support the asserted identity extensions defined in [13] except as defined in this clause.

NOTE 1: Support of the asserted identity extensions not only implies support of the P-Asserted-Identity header, but also implies support of the Privacy header with a value of "id" as described in [12] and [13] and a value of "critical" as described in [12], as well as the Proxy-Require option tag "Privacy".

For an on-net originated call, there shall be a single P-Asserted-Identity header present. For an off-net originated call, there shall be a single P-Asserted-Identity header present if the calling party number is available; otherwise, the P-Asserted-Identity header shall not be present.

CMSS compliant implementations shall populate the URI in the P-Asserted-Identity header with the number of the calling party as defined in clause 7.1, either as a tel-URI or as a SIP URI with telephone-subscriber syntax and "user=phone"; however, they shall be prepared to receive non-telephone-number URIs in incoming messages. If calling name Privacy is requested, the display-name "Anonymous" shall be used for this header. If the call is initiated on-net and calling name Privacy was not requested, the display-name shall be set to the name of the calling party. If the call originated off-net and calling-name Privacy was not requested, the display-name may be omitted. If calling number Privacy is requested, a Privacy header with priv-values "id" and "critical" shall be included.

When calling number privacy is requested, a Proxy-Require containing the option tag "Privacy" shall be included by default, as described in [12] and [13], unless it is known (by means outside the scope of the present document), that all proxies that reside on a trust boundary in the domain support the privacy extensions. It should be noted, that reliance on such knowledge is very brittle and can easily lead to unintended disclosure of private information; e.g. when new proxies are added, software upgraded, configurations changed, etc.

In order to support the asserted identity extension, a Spec(T) is specified, as described in [13]. IPCablecom's Spec(T) is defined as follows:

#### 1) Protocol requirements

Implementations must adhere to the present document.

#### 2) Authentication requirements

For calls that originate on-net, the procedure specified in [26] must be followed.

For calls that originate off-net, calling party information present in the PSTN signalling messages shall be used, unless it is user-provided or the PSTN is not trusted, in which case it shall not be used.

#### 3) Security requirements

Connections between nodes within the Trust Domain and between UAs and nodes in the Trust Domain shall use secure signalling as described in [26].

#### 4) Scope of Trust Domain

The CMSS Trust Domain consists of all CMSS hosts that can communicate either directly or indirectly, subject to the security requirements described in [26].

The CMSS Trust Domain also includes the adjacent PSTN network unless configured otherwise.

MTAs shall not be part of the Trust Domain.

It should be noted that the trust boundary here described for signalling is different from the trust boundary described in clause 5.3, which deals with trust for event messages customer premise equipment and third parties.

#### 5) Implicit handling when no Privacy header is present

The CMSS elements in the Trust Domain shall support the "id" Privacy service; therefore, absence of a Privacy header is assumed to indicate that the user is not requesting any Privacy. If no Privacy header field is present in a request, elements in this Trust Domain shall act as if no Privacy is requested.

NOTE 2: Since CMSS (and [26] together) define(s) a single Trust Domain where all CMSs trust each other, a P-Asserted-Identity header will currently never be removed before being forwarded to another CMS.

## 7.10 A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP)

In order to support the message waiting indicator feature when, for example, a voice-mail server is controlled by a different CMS from the one serving the subscriber, CMSS compliant implementations shall support the functionality described in [27] except as indicated in this clause.

CMSS compliant implementations shall support the message-context-class "voice-message". Support of all other message-context-classes is optional.

CMSS compliant implementations may support group or individual message accounts.

CMSS compliant implementations shall ignore newly introduced message headers in the Notify message body that are not recognized.

## 7.11 Globally Routable User Agent URI (GRUU)

A CMSS compliant implementation shall provide a GRUU referring to itself in the contact address of dialog-initiating SIP messages, as specified in [36]; such a GRUU conforms to the definition of a self-made GRUU. A CMSS compliant implementation shall handle requests received outside of the dialog in which the contact was provided. For example, upon receipt of an INVITE request addressed to a GRUU assigned to a dialog it has active and containing a Replaces header referencing that dialog, the element will be able to establish the new call replacing the old one.

A CMSS compliant implementation shall be able to recognize those GRUUs it has assigned and verify their validity. When providing a GRUU on behalf of a user which will be used in subsequent out-of-dialog requests to that user, the CMSS compliant implementation shall be able to derive the identity of the user from the received GRUU.

The present document does not define how GRUUs are created; they may be provisioned by the operator or obtained by any other mechanism.

NOTE: In some cases a GRUU will need to remain valid beyond the lifetime of the dialog in which it was advertised.

## 7.12 The Early Session Disposition Type for SIP

CMSS compliant implementations shall support the early session disposition type as specified in RFC 3959 [40].

The detection and prevention of fraud issues associated with the use of the early session disposition type is considered outside the scope of the present document.

## 7.13 An Extension to the Session Initiation Protocol (SIP) for Request History Information

CMSS compliant implementations shall support the History-Info header as described in [41].

## 7.14 Request Authorization through Dialog Identification in the Session Initiation Protocol (SIP)

In order to support call transfer implementations which make use of a REFER sent out of dialog CMSS compliant implementations shall support the functionality defined in RFC 4538 [43] which specifies the Target-Dialog header used in the out of dialog REFER.

The CMS generating or receiving a REFER outside of an existing dialog shall associate the dialog in the Target-Dialog header with an existing dialog.

## 7.15 The Session Initiation Protocol (SIP) Join Header

CMSS compliant implementations shall support the Join header as described in RFC 3911 [44].

## 7.16 SUBSCRIBE to Dialog Event Package

In order to allow a CMS to determine the line status of an endpoint, CMSS compliant implementations shall support the functionality described in RFC 4235 [46] except as indicated in this clause.

CMSS compliant implementations shall ignore newly introduced message headers in the Notify message body that are not recognized.

---


# 8 CMS-CMS SIGNALING

In this clause, the CMS to CMS signalling that takes place between CMSs within a domain and the signalling that takes place between domains is presented. The primary difference between intra-domain signalling and inter-domain signalling is the use of External Border Proxies, which are described in clause 5.4.

## 8.1 CMS Interfaces

Signaling between two CMSs is simply referred to as CMS-CMS signalling or CMSS signalling. From a CMS-CMS signalling perspective, the Media Gateway Controller (MGC), Bridge Server, Announcement Server and other media service nodes are analogous to the CMS, although they do not interface with a Gate Controller. In the following, therefore, the use of the term CMS is to mean any of these devices, unless otherwise noted.

Figure 6 shows the interfaces to a CMS for an on-net to on-net call (figure 6(a)) and a call involving an off-net endpoint (figure 6(b)). For on-net calls, the CMS (Call Agent) contains a Gate Controller (GC) function in order to control access to Dynamic Quality of Service on the access network. Initial signalling between the CMS originating a session and the CMS handling termination may be routed through intermediate tandem proxies, but subsequent signalling typically will be sent directly. Both the signalling through tandem proxies and the direct signalling are considered CMS-CMS signalling.

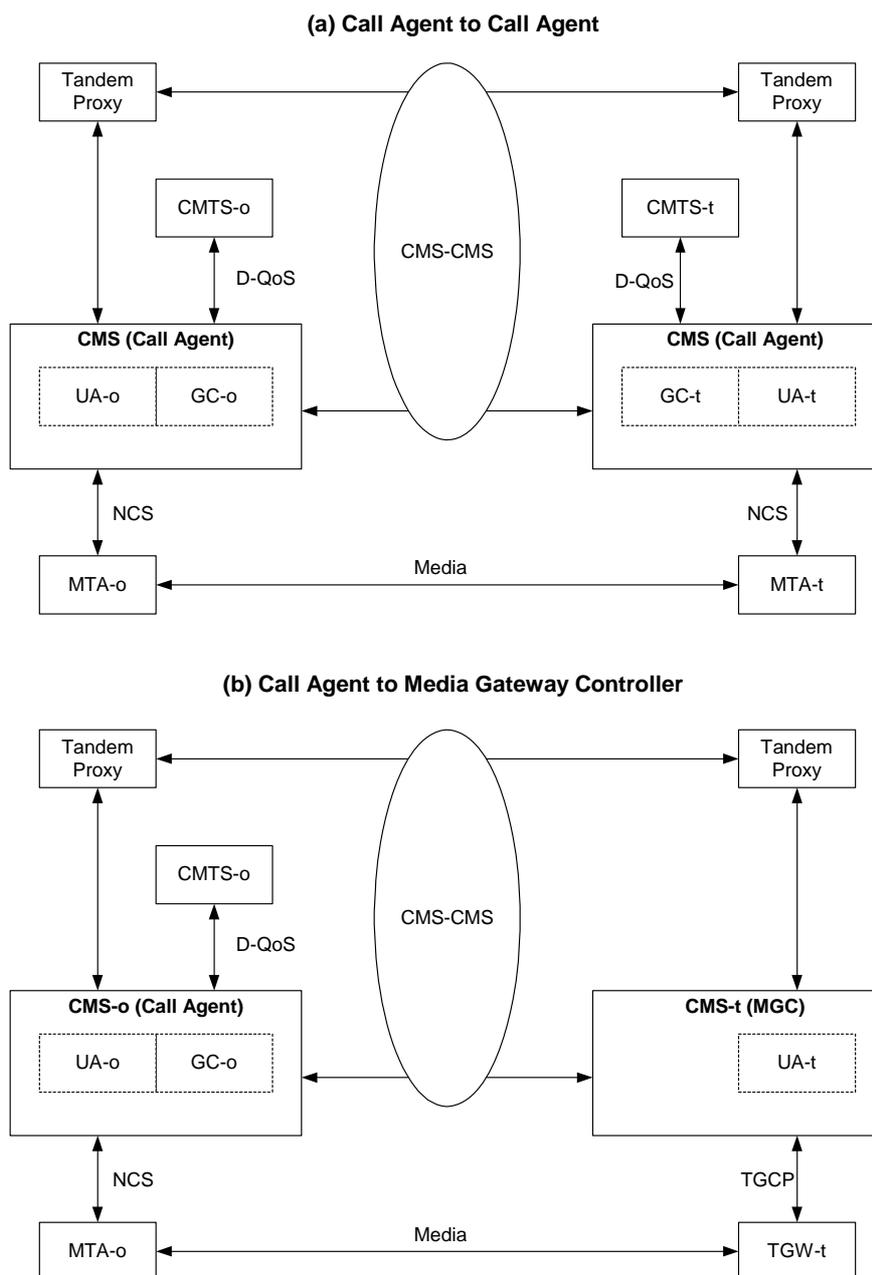


**Figure 6: CMS to CMS Signaling**

Although all the CMSs in a given domain should be able to communicate, the set of CMSs may not form a fully connected mesh for routing and security reasons. In those cases, some of the CMSs may be reachable only through one or more tandem proxies (e.g. interior or exterior border proxies).

Numerous other interfaces to the CMS exist. These are not shown in figure 6 and include interfaces to devices such as translation servers, local-number-portability databases, SS7 signalling interfaces and anonymizers.

The procedures for inter-domain sessions are similar to the procedures for intra-domain sessions with only a few differences. In particular, the initial INVITE message, any interim response messages and the final response message of the initial INVITE transaction pass through EBPs in the originating and terminating domains. In addition, call features involving redirection are treated differently; refer to the following subclauses for further details.

Below, an overview of an example interdomain telephony call flow is presented - the call flow is similar to the intra-domain telephony call flow, except that external border proxies are used for the initial INVITE request and its responses.

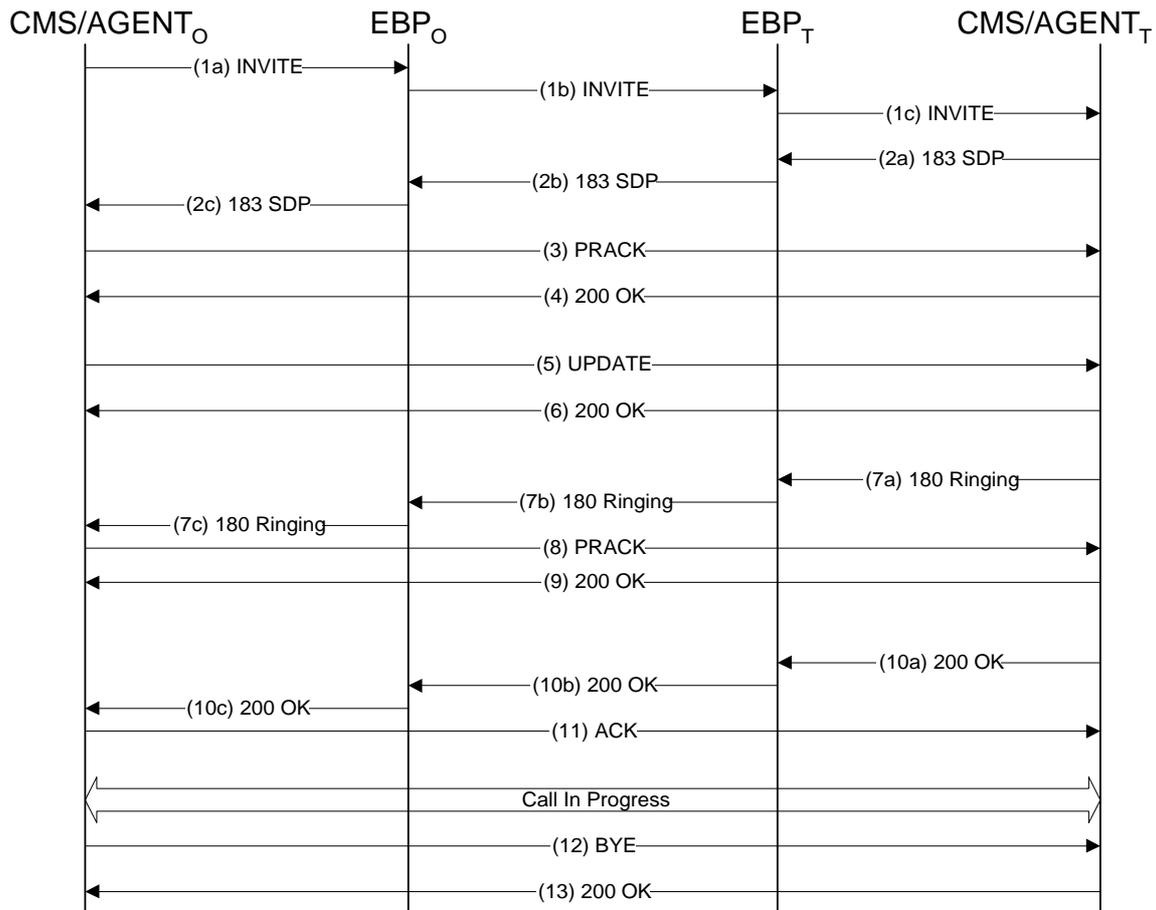

**Figure 7: Overview of Interdomain Telephony Call Flow**

### 8.1.1 Overview of CMS Behaviour

The CMS contains a trusted SIP User Agent Client (UAC) and User Agent Server (UAS). It maintains call state during the life of the call and monitors the endpoint device for state changes that affect the call. The interface between the CMS and the endpoint device is outside the scope of the present document, but the particular case of Network-based Call Signaling (NCS) is used when necessary in the examples.

The Call Management Server (CMS) complex includes the CMS and, if needed, Gate Controller functions. The CMS participates in the CMS-CMS signalling; the Gate Controller participates, if needed, in the DQoS signalling (see [21]). Together, they control the coordination of the signalling for call setup and resource management.

DQoS signalling can be used as a secondary fail-safe mechanism to detect call termination. If necessary, the CMS can use the DQoS Gate-Delete message to remove access to QoS resources for a call (see [21] for details).

Messages for setting up a new call, or changing the attributes or participants of an active call, are initiated by the CMS.

#### 8.1.1.1 CMS Behaviour in Support of Call Originator

Through a mechanism outside the scope of the present document, the CMS becomes aware that the endpoint device desires to initiate a call and determines the destination address of that desired call. This may be done, for example, through a Notify message in NCS, where the MTA detected the off-hook condition and collected a complete dial string from a sequence of touchtone button pushes. Alternatively, it may be done through a Notify message in TGCP, where the MG detected a trunk seizure and received the destination address through MF signalling. Or it could be done through an IP-IAM message from a SS7 signalling gateway, or any one of a number of other mechanisms.

The originating CMS (CMS<sub>O</sub>) translates the destination address and then takes the role of a trusted SIP UAC and initiates an INVITE request to the terminating CMS (CMS<sub>T</sub>), possibly through one or more proxies. Included in this INVITE request are the SDP definition of the desired media stream(s), the billing/accounting information, the endpoint identification and the indication of Privacy requested by the call originator.

In order to support distance sensitive billing, the NPA-NNX of the originating CMS must be known. If the originating telephone number is ported, the NPA-NNX of the originating CMS cannot be inferred from the originating telephone number. Therefore, the NPA-NNX associated with the originating CMS, referred to as Jurisdiction Information Parameter (JIP) in ANSI SS7 ISUP, is included in the JIP-param in the P-DCS-Billing header of the INVITE request. Since JIP is a required ISUP parameter, the originating CMS will always include the JIP-param in the INVITE request.

On receipt of the response to this INVITE request, CMS<sub>O</sub> authorizes the resources needed for the media stream(s), directs the endpoint to initiate any resource reservation needed and informs the destination when the resources are reserved by sending an UPDATE. CMS<sub>O</sub> instructs the endpoint to play any media received and if a provisional response indicating local alerting is received, CMS<sub>O</sub> causes the endpoint device to play a local ringback tone. In response to a final 200-OK response, CMS<sub>O</sub> cuts through the call and enables the bi-directional media flow(s).

### 8.1.1.2 CMS Behaviour in Support of Call Destination

CMS<sub>O</sub> sends an INVITE request to CMS<sub>T</sub>, where the dialled number is translated into the address of the terminating endpoint. Through negotiation with the terminating endpoint, CMS<sub>T</sub> determines the media stream properties and authorizes the QoS resources needed. CMS<sub>T</sub> responds to the INVITE request with a provisional 183-Session-Progress message, giving the SDP, destination identity information and billing information if the destination is overriding that given by the call originator, e.g. for reverse charging.

NOTE: In order to support reverse charging, CMS<sub>O</sub> should not generate any event messages that determine the charged party until the 183-Session-Progress response has been received.

CMS<sub>T</sub> directs the terminating endpoint to reserve the resources necessary for the media stream(s). On receipt of the UPDATE message from the originating endpoint, CMS<sub>T</sub> alerts the destination user. If CMS<sub>T</sub> wants to use remote ringback, it sends back a 183-Session-Progress. The purpose of this 183-Session-Progress message is to aid in PSTN interworking as described in [i.1], clause 8.2.3. If CMS<sub>T</sub> wants to use local ringback, it sends back a 180-Ringing message. When the terminating endpoint answers the call, CMS<sub>T</sub> sends a 200-OK message, cuts through the call and enables the bi-directional media flow(s).

Call features such as call-forwarding-unconditional, call-forwarding-busy, call-waiting and call-forward-no-answer are controlled and implemented by CMS<sub>T</sub> by generating the proper SIP responses as part of the basic call setup procedures. CMS<sub>T</sub>, locally storing information about the previous call (on a per-line basis), also implements features such as return-call and call-trace.

### 8.1.1.3 CMS Behaviour in Support of Mid-call Changes

For the duration of the call, CMS<sub>O</sub> and CMS<sub>T</sub> are available to their respective endpoints and they respond to any mid-call changes requested by the endpoints. Examples of such changes are: hold/resume; codec change; call transfer; three-way-calling; busy-line verification; and emergency interrupt. CMS<sub>O</sub> and CMS<sub>T</sub> initiate and perform the CMS-CMS signalling exchanges necessary to make these and similar changes.

### 8.1.1.4 CMS Behaviour in Support of Event Messaging

The IPCablecom Event Messaging specification [23] requires a stream of events to be generated on behalf of each endpoint involved in a call, i.e. for each half of the call (originating and terminating). Each of the originating and terminating event streams is identified by its own Billing-Correlation-ID and is further identified as to its originating or terminating role. Certain accounting information is needed for the Sig-Start event message [23] and that information is carried in CMS-CMS signalling in the P-DCS-Billing-Info header of the INVITE request. It is further required that each CMS knows the Billing-Correlation-ID and Financial-Entity-ID of the other event message stream and that information is carried in the first initial INVITE and reliable 1xx, 2xx or 3xx response (typically 183-Session-Progress).

If the call originator and destination are in different IPCablecom Domains (i.e. an inter-domain call), it is necessary for each CMS to generate the complete event stream for the call.

### 8.1.1.5 CMS Behaviour in Support of Call Forwarding

Requirements for event generation for the Call Forwarding services are based on the billing model of the PSTN. A forwarded call is considered to consist of several call-segments, each of which is billed to the party that initiated that call-segment. For instance, a call from party A to party B that is forwarded to party C results in event streams for two separate "calls" - first from A to B (typically charged to A) and a second from B to C (typically charged to B).

Continue to consider the case in which party A calls party B and party B forwards the call to party C. Assume that all three parties are in the same IPCablecom domain and served by the same Record Keeping Server.

We are concerned here with accounting information and with the event messages sent to the Record Keeping Server. CMS B provides accounting information to CMS A concerning the call segment from B to C. This accounting information is used by CMS A to create the INVITE message it sends to C.

Two event streams will be generated and the information in them will be correlated by a service instance event. The process is as follows: CMS A generates an origination event stream for the call segment from A to B. CMS C generates a termination event stream for the call segment from B to C. CMS B generates a service instance event that correlates these two streams. The correlation information is carried in the P-DCS-Billing-Info headers in the 302-Redirect response. See diagram below.

NOTE: Refer to clause 8.4.1.8.2 for a more detailed description of this scenario.

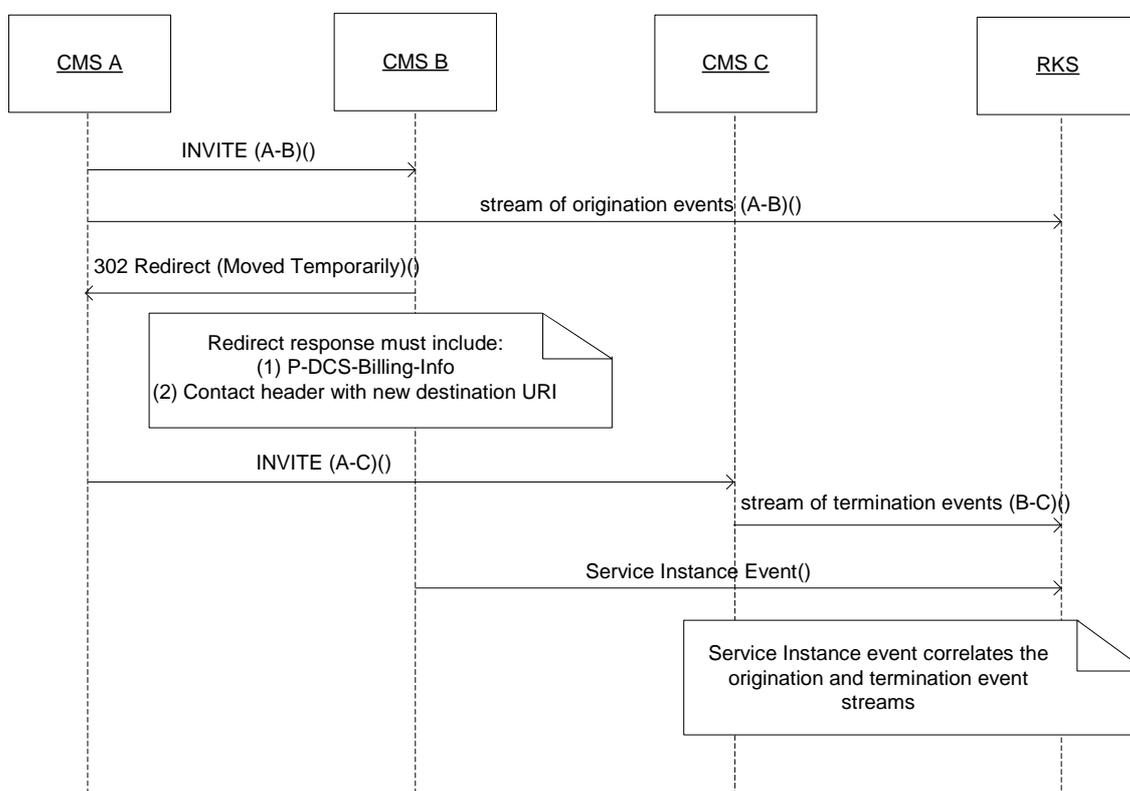


Figure 8: Call Forwarding Support

### 8.1.1.6 CMS Behaviour in Support of Inter-Domain Call Forwarding

When calling and forwarding is performed between IPCablecom domains (or within a domain when the parties are served by different Record Keeping Servers), it is required that all event messages related to a call segment be recorded by the Record Keeping Server within the domain of the party being charged for that call segment. It is therefore necessary for a CMS in each IPCablecom domain to remain on the signalling path for the duration of the resulting call in order to generate the necessary event streams.

There are three separate cases of inter-domain Call Forwarding. There may be three different domains (i.e. A, B and C are each in a different IP-Cablecom domain). The first call may be intra-domain and the forwarding may be inter-domain (i.e. A and B in the same domain, C in a different domain). The first call may be inter-domain and the forwarding may be intra-domain (i.e. A in one domain, B and C in a different domain). We consider each case separately.

With A, B and C each in different IP-Cablecom domains, CMS-A will generate an origination event message stream for a call from A to B, CMS-B will generate the termination event message stream for the call from A to B and will also generate an origination event message stream for a call from B to C and CMS-C will generate a termination event message stream for the call from B to C. CMS-B performs the forwarding operation by proxying an INVITE request to CMS-C, rather than returning a 3xx response to CMS-A. It will include a Record-Route header in the INVITE request, so that CMS-B stays in the signalling path for the duration of the call. The media however, flows directly from A to C.

With A and B in one domain and C possibly in another domain, CMS-B will return a 302-Redirect response and generate a "service-instance" event for the call forwarding service. CMS-A will generate a new INVITE request to C and the P-DCS-Billing-Info header will contain the information about the B-to-C leg. The resulting call will involve only CMS-A and CMS-C; CMS-A will generate an origination event stream and CMS-C will generate a termination event stream, just as in the intra-domain call forwarding case.

With A in one domain and B and C in another domain, CMS-B will proxy the INVITE request to CMS-C and CMS-B will request that CMS-C generate the termination event message stream. CMS-B will generate a "service-instance" event and will not remain on the signalling path. CMS-A will generate an origination stream for a call from A to B; CMS-C will generate the termination stream for the call from B to C.

When the forwarding is done in support of a Call-Forward-No-Answer (CFNA) service, it is necessary for the CMS to respond to the INVITE with a 3xx response. If the procedures described above would have resulted in the CMS proxying the INVITE to the new destination, the CMS instead generates a private URL (as described in [16]) for the Contact header in the 3xx response. All CMSs that had proxied an INVITE for this call that see the 3xx response also generate a private URL and update the Contact header of the 3xx response (as described in [16]). The end result is that the signalling path for the resulting call and event streams generated for the resulting call (except for the service-instance for the CFNA), will be just as if the forwarding had occurred due to "Call-Forward-Unconditional" or "Call-Forward-Busy".

#### 8.1.1.7 CMS Behaviour in Support of REFER


Requirements for event generation for the REFER-based services (e.g. Call Transfer, Three-Way Calling) are based on the billing model of the PSTN. Consider the case in which party A calls party B and party B REFERS the call to party C. Assume that all three parties are in the same IP-Cablecom domain and served by the same Record Keeping Server. This is the intra-domain scenario (refer to figure 9).

The REFER could be used to implement a call transfer or a three way call. In the call-transfer scenario, CMS B has been programmed to transfer calls destined for Party B to Party C. In the three-way call scenario, CMS B is instructed to add Party C onto the call. In both cases, a call is set up between A and C at the initiative of B.

We are concerned here with accounting information and with the event messages that will be sent to the Record Keeping Server. CMS B provides accounting information to CMS A. CMS A uses this information to create the INVITE message it sends to C.

Two call segments will be recorded and two event streams will be generated. The first call segment is from A to B, the second is from B to C. The event streams will be as follows: CMS A generates an origination event stream for the call segment from A to B, typically billed to party A. CMS C generates a termination event stream for the call segment from B to C, billed to party B. See figure 9.

**NOTE:** Refer to clause 8.4.3 for details and limitations as to the scope of the refer messages covered in the present document.

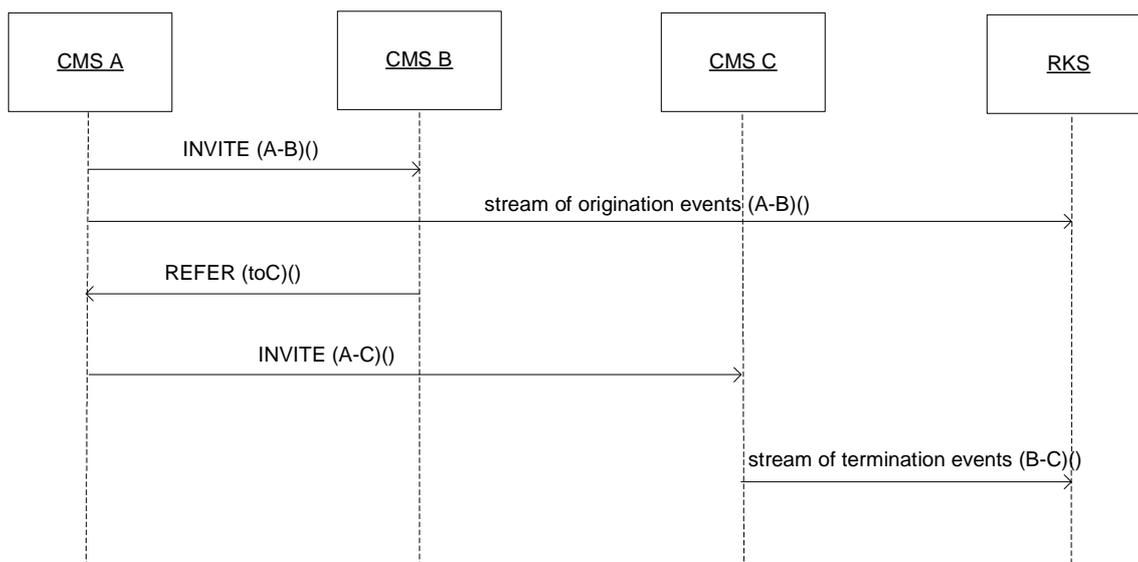

**Figure 9: REFER Support**

### 8.1.1.8 CMS Behaviour in Support of Inter-Domain REFER

When REFER operations are performed between IPCablecom domains, it is required that all event messages related to a call segment be recorded within the domain of the party being charged for that call segment. It is therefore necessary for a CMS in each IPCablecom domain to remain on the signalling path for the duration of the resulting call in order to generate the necessary event streams.

## 8.1.2 Overview of Tandem Proxy

In theory, all CMSs may communicate with each other, both within a given domain, as well as between different domains. In practice, the need for scalable and manageable security and routing implies that one or more levels of indirection may be needed. The tandem proxy provides this indirection. Tandem proxies, which may be stateless proxies, act as call routers and aggregation points for security associations. They may also provide additional functions, such as signalling transformation gateways, signalling firewalls, etc. Depending on its role, a tandem proxy may remain in the call-signalling path for the duration of the call. In the alternative, a tandem proxy may complete its activities and allow the signalling to be passed directly between the CMSs that are managing the endpoints. Two specific types of tandem proxies, known as border proxies, have been defined:

- *Interior border proxy (IBP)*: Proxy involved in intra-domain communication. Interior border proxies are used between two realms in the same domain. This type of proxy is optional and not required for signalling.
- *Exterior border proxy (EBP)*: Proxy involved in inter-domain communication. Exterior border proxies are used to communicate between different domains. Every non-isolated domain has interfaces with one or more other domains via one or more EBPs.

See [i.3] for further information.

The tandem proxy has a limited role in so far as the CMS-CMS signalling is concerned. Its only concern is to ensure that messages for a given call are routed consistently throughout the call. The proxy simply follows the rules specified in clause 6.16 in order to ensure this.

## 8.2 CMS Retransmission, Reliability and Recovery Strategies

SIP [6] defines a retransmission scheme based on two timer values, T1 and T2. The retransmission interval starts at T1 seconds and is doubled, with each attempt (up to a limit of T2 seconds), up to some maximum number of retransmissions.

The CMS shall implement an additional application level timer for each dialog (on a call-by-call basis). This timer is termed T3. Requirements on the conditions for setting T3 and actions on its expiration, are given in clause 8.4.1. On expiration of this timer, the CMS aborts the current request and returns to a known idle state.

CMS<sub>O</sub> sets T3 to T-setup on receipt of the first provisional response to an INVITE. CMS<sub>O</sub> cancels T3 for all dialogs on receipt of a final response to any dialog.

CMS<sub>T</sub> sets T3 to T-ringing on receipt of an INVITE request and cancels T3 upon receipt of the final ACK message.

Default values for these timers (T-setup and T-ringing) are given in annex A.

When the provisioned number of message retransmissions is exceeded for an INVITE without any response being received, the CMS shall try a different CMS address, if available. If multiple CMSs are available, the procedures defined in [8], clause 4.3, shall be used. When a provisioned number (which may be infinite) of CMS addresses have been tried, the CMS shall clear the call and return to an idle state.

The behaviour of Tandem Proxies depends on their role in the network and is not further specified in the present document. Tandem Proxies follow standard SIP processing/retransmission.

## 8.3 CMS to CMS Routing

CMS to CMS routing is concerned with routing requests to their destination. CMSS supports routing of general SIP(s) URIs as well as telephone numbers in the form of tel-URIs as defined in clause 7.1. Routing of general SIP(s) URIs simply follows the procedures in clause 6.8.1. Routing of telephone numbers follows the procedures described here.

The originating CMS receives a telephone number from the originating user; this identifies the destination for the session. In order to route the session setup messages to the correct destination, the number needs to ultimately be resolved to the address of a terminating CMS.

The originating CMS generates a Request-URI based on the destination telephone number. If the destination telephone number may be a ported number, the originating CMS should either perform a local-number-portability (LNP) database query or it should send the request to another CMS (UA or Proxy) that can perform the LNP query.

**NOTE:** If the originating CMS does not perform the LNP query, then it must wait for the first reliable response before generating event messages that contain the Location Routing Number. In the latter case, the Request-URI should be a tel-URI.

By using the tel-URL format, intermediate proxies can perform LNP queries and modify the URL accordingly. Using a SIP(s) URI would not allow for this unless the proxy's domain name matches the domain name specified in the SIP(s) URL.

The CMS that performs the LNP query shall generate a Request-URI containing either a SIP(s) URI or a tel-URI as a result of the query. For SIP(s) URI, the userinfo shall be in the telephone-subscriber format and the URI shall contain a "user=phone" parameter. Both tel-URI and SIP(s) URI shall contain the "npdi" parameter and the "rn" parameter set to the result of the query as specified in clause 7.1. Furthermore, if the number was ported, the CMS that performed the LNP query shall include the Location Routing Number (LRN) in the P-DCS-Billing-Info header in the first reliable response.

The mechanism by which the CMS routes the request to the terminating CMS is beyond the scope of the present document. This involves either routing based purely on the tel-URI, or conversion of the tel-URI into a SIP(s) URI. The SIP(s) URI format is preferred over keeping the tel-URI and therefore the CMS should attempt to form a SIP(s) URI for the destination. These cases are discussed separately below.

### 8.3.1 Forming a SIP-URI from a tel-URI

The FQDN ("hostport") part of a SIP(s) URI identifies the intended recipient of the request. The recipient may or may not be the final destination for the request. The method by which the CMS determines the FQDN part of a SIP(s) URI formed from a tel-URI is outside the scope of the present document. For example, the CMS may have access to a database that can resolve a telephone number into the FQDN to which the request should be addressed. This may be only the next in a series of hops, or it may be the terminating CMS.

If the CMS is able to determine a FQDN, the CMS shall include that FQDN in a SIP(s) URI in the Request-URI. Generation of the "userinfo" part of the SIP(s) URI is as described above. If it is unable to determine a FQDN, the CMS may leave the Request-URI as a tel-URI and forward the request to a tandem proxy that is able to perform this translation.

The CMS should send the request directly to the FQDN identified in the SIP(s) URI following the procedures specified in clause 6.8.1. If the CMS is unable to send the request directly to the FQDN identified in the SIP(s) URI, it determines a tandem proxy to handle the request. Choice of a tandem proxy may be based on static configuration information, provisioning information, query of a routing function, or other methods.

CMS may implement the ENUM Client requirements as defined in annex C for resolving tel URIs to SIP URIs. The rules for determining when to attempt translation of a Tel URI to a SIP URI are a matter of local policy (e.g. a Tel URI with a carrier ID may be preferred over a SIP URI). When using the procedures defined in annex C it is possible that multiple URIs may be returned in response to a single ENUM query. If such a case is encountered, the following requirements apply:

- 1) The CMS shall filter the set of returned URIs based on URI type (e.g. SIP:, tel:, etc.), removing those from the list which have service types not supported by the CMS.
- 2) Absent local policy, the CMS shall choose the URI with the lowest preference value in the list. The remaining URIs shall be stored by the CMS.
- 3) The CMS shall replace the request-URI with the URI contained in the chosen record and send the request directly to the FQDN identified in the chosen URI following the procedure specified in clause 6.8.1.
- 4) If the CMS is unable to determine the next hop for the chosen URI, or there is no response (including an error response) from the next hop, the CMS shall choose the next URI in the list with the lowest preference value and repeat steps 1-4 until either the list is exhausted or there is a successful response from the next hop.

### 8.3.2 Routing a SIP(s) URI at Tandem CMSs

If a CMS receives a request with a SIP(s) URI in the Request-URI that identifies a destination other than the CMS, the CMS considers itself a tandem and attempts to send the request to its intended destination. The CMS may now operate as a stateless proxy as defined in clause 6.16. The Request-URI of the forwarded request should remain unchanged.

If a CMS receives a request identifying itself as the intended destination, performs the Request-URI translation and determines it is not the CMS serving the destination, the CMS considers itself a tandem and attempts to send the request to its intended destination. The Request-URI shall be rewritten to address the desired destination.

### 8.3.3 Routing based on tel-URI


Routing based on tel-URIs is performed hop-by-hop. The Request-URI may be rewritten as a result of Local Number Portability lookup, Freephone Number translation, etc. as described in clause 8.3.1.

## 8.4 CMS Procedures

The following subclauses contain sample procedures for a basic call from an originating CMS to a terminating CMS and for various mid-call changes that may be initiated by either endpoint. The procedures assume that the participating CMSs have been configured to require support of all CMSS extensions. The call flow diagrams are informative only and are intended to provide guidance to developers. Specific processing required for IPCablecom CMSS-compliant systems, beyond that previously specified in clauses 7 and 6, is noted using the specification language of clause 1.2.

### 8.4.1 CMS Messages and Procedures for Basic Call Setup

The basic INVITE message sequence for a CMSS call setup includes the INVITE/183-Session-Progress/18x/200-OK/ACK exchange, an UPDATE/200-OK exchange and one or two PRACK/200-OK message exchanges. These are shown in figure 4 (clause 5.6) and discussed in the following subclauses. When it is known that the far-end is being alerted, the 18x will be a 180-Ringing. A 183-Session-Progress will be used instead of 180-Ringing when there is call progress but it is not known whether the called party is being alerted. For example, when interworking with MF trunks, it is not known whether in-band media is ringback or an announcement and hence a 183-Session-Progress with early media would be used. Please refer to [i.1] for details.

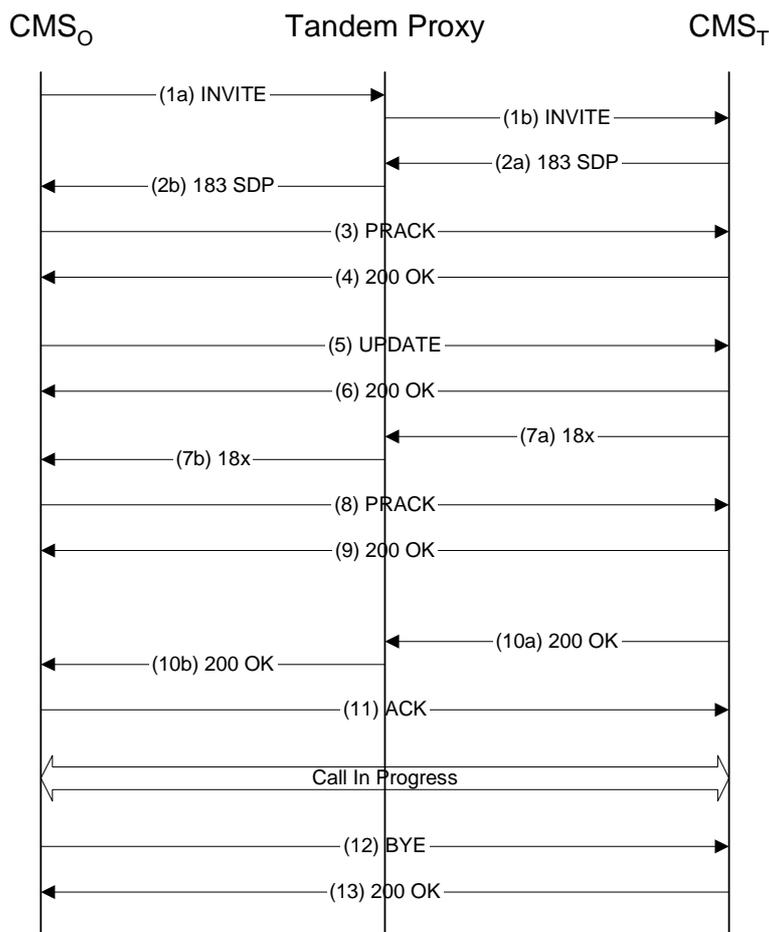

**Figure 10: CMS Messages for Basic Call Setup**

The following clauses trace a basic call from origination to completion and give the requirements for each message exchange. It therefore switches viewpoints from origination to termination and back. For procedures followed by CMS<sub>O</sub> (i.e. originating a call) see clauses 8.4.1.1, 8.4.1.3, 8.4.1.6 and 8.4.1.8. For procedures followed by CMS<sub>T</sub> (i.e. terminating a call) see clauses 8.4.1.2, 8.4.1.4, 8.4.1.5 and 8.4.1.7. A typical CMS implements the procedures in all of these subclauses, while specialized CMSs implement only the portions needed in their application.

The behaviour below also shows the procedures for call forwarding (unconditional and busy) and call forwarding (no answer).

#### 8.4.1.1 CMS<sub>O</sub> initiating Invite

CMS<sub>O</sub> becomes aware of a call origination attempt when it receives a Notify message from the MTA. A Media Gateway Controller (MGC) becomes aware of a call origination attempt when it receives a Notify message from the media gateway, or an IP-IAM message from the signalling gateway. A CMS also becomes aware of a call origination attempt when it receives a REFER request from another CMS.

CMS<sub>O</sub> shall check that the indicated line is authorized for outgoing service to the destination phone number.

The following call characteristics are determined by CMS<sub>O</sub> and used to generate the INVITE message:

- URI of the destination endpoint, either as a tel-URI, or a SIP(s) URI as specified in clause 8.3.
- Originating endpoint identification: both the originating phone number (or, in general, a URI of the originator), the originating account name and the originator's jurisdiction information (JIP NPA-NXX).
- The level of anonymity requested by the call originator.
- Call leg identification, in the form of SIP From:, To: and Call-ID: header values.

- Charging number, routing number and location routing number as defined in [23].
- Session Description (SDP) for the media flow(s) to the originating endpoint including QoS preconditions and all the acceptable choices of codecs (with appropriate rtpmap and bandwidth parameters).

This information is used to generate SIP headers as follows.

Header:	Requirements for CMS <sub>O</sub>
Request URI	The URI of the destination endpoint. Shall conform to the rules for Request-URIs as given in clause 8.3.
P-Asserted-Identity	Originating account name and originating phone number (or URI in general) as described in clause 8.4.1.1.1.
Privacy	If calling number Privacy is requested, this header shall contain the "id" and "critical" tag values.
Proxy-Require	If calling number Privacy is requested, this header shall contain the option tag "Privacy".
From	Originating endpoint identification. Shall follow the requirements of clause 6.20.20.
To	URI of the destination endpoint. Shall follow the requirements of clause 6.20.39.
Call-ID	If Privacy is requested, the Call-ID shall be generated as specified in clause 6.20.8.
Contact	The Contact shall be generated as specified in clause 6.20.10.
P-DCS-Billing-Info	Charging number, calling jurisdiction information and location routing number as defined in [23]. If the INVITE is being generated as a result of a REFER request, see also clause 8.4.3.2.
SDP	The SDP may be generated by interactions between the CMS and the endpoint beyond the scope of the present document. The CMS shall add QoS preconditions to the SDP as needed in accordance with clause 7.4.

#### 8.4.1.1.1 CMS<sub>O</sub> Authentication and Authorization of Originator

Two different cases are considered here:

- a call originating on-net; and
- a call originating off-net.

Except as specified below, if the call originates on-net, CMS<sub>O</sub> shall provide a validated originating phone number for the active line on MTA<sub>O</sub> in the P-Asserted-Identity header. CMS<sub>O</sub> shall also provide a validated originating calling name for the active line on MTA<sub>O</sub>, unless the originator has requested calling name Privacy, in which case the display-name "Anonymous" shall be used. See [26] for further detail.

CMS<sub>O</sub> may permit a call to an emergency service or other special numbers even if provisioned information is not available to generate the calling number P-Asserted-Identity header.

If the call originates off-net and no calling party number is available, then the P-Asserted-Identity header shall be omitted. Otherwise, the CMS<sub>O</sub> shall provide the calling party number received from the PSTN in the P-Asserted-Identity header. If calling name Privacy is requested, the display-name shall be set to "Anonymous".

#### 8.4.1.1.2 Address Translation

CMS<sub>O</sub> shall resolve the destination number into either:

- the address of a destination endpoint served by this CMS; or
- the address of another CMS or proxy (subsequent routing procedures are described in clause 8.3).

If it cannot resolve the destination number, it shall consider the request to be in error.

### 8.4.1.1.3 IP Address Privacy Support

If the caller requested IP Address Privacy, then CMS<sub>O</sub> shall provide IP address Privacy through the use of an anonymizer as described in clause 9. Since there is no CMSS signalling support for IP address Privacy, CMS<sub>O</sub> shall either provide the IP address Privacy itself or route the request to an anonymizer. The anonymizer shall provide IP address Privacy for media and shall ensure that the SDP "c=" line points to a media anonymizer prior to crossing a trust boundary.

NOTE: If the terminating endpoint is an NCS MTA then a trust boundary will be crossed no later than between CMS<sub>T</sub> and MTA<sub>T</sub>. For a PSTN gateway, a trust boundary may not be crossed.

The anonymizer is described in more detail in clause 9.

### 8.4.1.1.4 INVITE message generation

If the destination endpoint is not served by CMS<sub>O</sub>, CMS<sub>O</sub> generates a SIP INVITE message and sends it to CMS<sub>T</sub>, the CMS that manages the terminating endpoint.

Please refer to clause 7.7.2.2 for electronic surveillance procedures at the originating CMS.

CMS<sub>O</sub> shall add the P-DCS-Billing-Info header, which is defined in clause 7.7. The semantics of the contents of P-DCS-Billing-Info are described in [23].

Finally, CMS<sub>O</sub> may add a "Require P-DCS" header.

INVITE (CMS <sub>O</sub> -> CMS <sub>T</sub> ) Header:	Requirements on CMS <sub>O</sub> For Message Generation
INVITE URI SIP/2.0	As described in clause 8.3.
Via:	As described in clause 6.20.42.
Proxy-Require:	As described in clause 6.20.29.
Supported:	As described in clause 6.20.37.
Require:	Shall include "100rel" and "precondition".
Allow:	As defined in clause 6.20.5. Shall include "UPDATE".
P-Asserted-Identity:	As described above.
Privacy:	As described above.
P-DCS-Billing-Info:	As defined in clause 7.7.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.20.20.
To:	As defined in clause 6.20.39.
Call-ID:	As defined in clause 6.20.8.
Cseq:	As defined in clause 6.20.16.
Contact:	As defined in clause 6.20.10.
Content-Type::	Shall be present and shall contain "application/SDP".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= m= a=	c= line may be modified in support of IP address Privacy.  a= line shall be present and shall indicate mandatory send and receive precondition as described in clause 7.4.

CMS<sub>O</sub> shall accept a 100-Trying message as described in the following table.

100-Trying (CMS <sub>T</sub> -> CMS <sub>O</sub> ) Header:	Requirements On CMS <sub>O</sub> for Message Checking
SIP/2.0 100 Trying	As described in clause 6.13.
Via:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

On receipt of a 100-Trying provisional response, the transaction timer (T3) for this exchange shall be set to T-setup. The default value of (T-setup) is given in annex A. On expiration of T3, CMS<sub>O</sub> clears the call attempt and sends a CANCEL message to CMS<sub>T</sub> with the same values of Request-URI, From, To and Call-ID for this call attempt, as specified in clause 8.4.1.9.

#### 8.4.1.2 Invite from CMS<sub>O</sub> arrives at CMS<sub>T</sub>

CMS<sub>T</sub> shall resolve the destination number from the Request-URI into either:

- the address of a destination endpoint served by this CMS; or
- the address of another CMS (subsequent routing procedures are described in clause 8.3).

If it cannot resolve the destination number, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code. 404-Not-Found is the recommended error code.

If, by following the procedure described above, CMS<sub>T</sub> determined it serves the destination endpoint, processing continues as specified in this clause.

CMS<sub>T</sub> shall determine the local endpoint being addressed by this call. CMS<sub>T</sub> shall check to see if this endpoint is authorized to receive this call. If translation or authorization fails, CMS<sub>T</sub> shall return an appropriate 4xx, 5xx, 6xx error code. 404-Not-Found and 403-Forbidden respectively are recommended error codes.

On receiving the INVITE message, CMS<sub>T</sub> shall start the transaction timer (T3) with value T-ringing. The default value of (T-ringing) is given in annex A. Timer T3 is cancelled by receipt of an ACK message acknowledging the final response from CMS<sub>T</sub>. On expiration of timer T3, CMS<sub>T</sub> shall send a 408-Request-Timeout or 302-Redirect response (for call-forwarding-no-answer service) to CMS<sub>O</sub>.

CMS<sub>T</sub> determines, possibly by communicating with the endpoint, whether it will accept the call, forward to another destination, or return an error. The mechanism by which this is done by CMS<sub>T</sub> is outside the scope of this specification.

The following subclauses give the detailed procedures for each of the possible cases.

- If CMS<sub>T</sub> determines that the endpoint is able to accept the incoming call request, then the procedures in clause 8.4.1.2.1 are followed.
- If CMS<sub>T</sub> determined that the call is to be forwarded (either through a provisioned or temporary call-forward-unconditional, or because of a provisioned or temporary call-forward-busy and the line is currently busy) and the RKS-Group-ID of CMS<sub>T</sub> is equal to the RKS-Group-ID of CMS<sub>O</sub> (as contained in the P-DCS-Billing-Info header in the INVITE request), then CMS<sub>T</sub> may return a 3xx response to CMS<sub>O</sub> through the procedures of clause 8.4.1.2.2.
- If, on the other hand, CMS<sub>T</sub> determines that the call is to be forwarded but the special conditions given in the previous paragraph are not met, or if CMS<sub>T</sub> does not want to use the optimized procedure above, then the procedures of clause 8.4.1.2.3 shall be followed to propagate the INVITE request.
- If CMS<sub>T</sub> determines the endpoint is not available to accept the call, or if the endpoint returns an error, an appropriate SIP error code is returned to CMS<sub>O</sub>. 486-Busy (if the user is already on another call and is not able to take a new call) and 480-Temporarily-Unavailable (otherwise) are recommended error codes. The procedures of clause 8.4.1.2.4 shall be followed.

- If CMS<sub>T</sub> receives an INVITE with a Call-Info header declaring "purpose= answer\_if\_not\_busy" then CMS<sub>T</sub> shall ignore any active CFB service for the target endpoint and not forward the call if the endpoint is busy and instead return a 486-Busy-Here response. If the endpoint has CFU, SCF (where the calling party is on the SCF screening list), DND, or Solicitor Blocking (where the calling party is not on the solicitor blocking white list) active, CMS<sub>T</sub> shall reject the INVITE with a 480-Temporarily-Unavailable response.

Please refer to clause 7.7.2.3 for electronic surveillance procedures at the terminating CMS.

#### 8.4.1.2.1 CMS<sub>T</sub> Sending 183-Session-Progress Status Response

If the destination endpoint is able to accept the call, CMS<sub>T</sub> sends the 183-Session-Progress provisional response reliably (see clause 7.2) to CMS<sub>O</sub>.

The following call characteristics are determined by CMS<sub>T</sub> and are used to generate the 183-Session-Progress response:

- Contact address for direct CMS-CMS signalling messages.
- Session Description (SDP) for the media flow(s) to the destination endpoint. This SDP includes all the required fields for precondition as defined in clause 7.4, as well as the choice of codecs (with appropriate rtpmap and bandwidth parameters) that are acceptable to the destination endpoint.

The response's session description shall indicate a set of codecs that the destination endpoint is willing to support.

If the terminating user subscribes to calling name delivery, CMS<sub>T</sub> checks the INVITE for a P-Asserted-Identity header. If the P-Asserted-Identity header does not contain a display-name, but the P-Asserted-Identity does contain a telephone number, CMS<sub>T</sub> shall obtain the calling name by querying a CNAM database by means outside the scope of the present document (e.g. by use of TCAP over ISTP, an HTTP query, etc.).

Please refer to clause 7.7.2.3.1 for electronic surveillance procedures at the terminating CMS when the terminating line is able to accept the call.

If the terminating endpoint is an MTA, CMS<sub>T</sub> uses the information in the SDP description, the electronic surveillance indication and the P-DCS-Billing-Info header values to signal the terminating Gate Controller (GC<sub>T</sub>) to send a GATE-SET command defining the envelope of the authorized QoS parameters to the terminating CMTS (CMTS<sub>T</sub>).

CMS<sub>T</sub> shall check to see if the called party has requested IP address Privacy. If IP address Privacy has been requested, then CMS<sub>T</sub> shall provide IP address Privacy through the use of an anonymizer. The anonymizer shall ensure IP address Privacy for both signalling and media. At a minimum, CMS<sub>T</sub> shall ensure the SDP "c=" line points to the anonymizer prior to crossing a trust boundary.

NOTE: If the originating endpoint is an NCS MTA then a trust boundary will be crossed no later than between CMS<sub>O</sub> and MTA<sub>O</sub>.

If the originating endpoint is a PSTN gateway, a trust boundary may not be crossed. CMS<sub>T</sub> shall also ensure that signalling messages crossing a trust boundary will not reveal any IP address information for the endpoint, (e.g. the Contact header would have to point to an anonymizer). Please refer to clause 9 for additional detail on anonymizers.

CMS<sub>T</sub> shall include a P-DCS-Billing-Info header in the response. This header shall contain the Billing-Correlation-ID, Financial-Entity-ID and RKS-Group-ID for the termination event message stream for the call leg between CMS<sub>O</sub> and CMS<sub>T</sub>. If CMS<sub>T</sub> performed the LNP query for this call, the P-DCS-Billing-Info header shall include the results of that query. The semantics of the contents of P-DCS-Billing-Info are described in [23].

The 183-Session-Progress provisional response sent by CMS<sub>T</sub> to CMS<sub>O</sub> shall be as follows.

183-Session-Progress (CMS <sub>T</sub> -> CMS <sub>O</sub> ) Header:	Requirements On CMS <sub>T</sub> for Message Generation
SIP/2.0 183 Session Progress	Status line with status code 183 shall be present.
Via:	As described in clause 6.13.
Require:	As defined in clause 6.20.32. Shall include "100rel" as described in clause 7.2.
Supported:	As described in clause 6.20.37.
P-DCS-Billing-Info	As described above and in clause 7.7.
From:	As described in clause 6.13.
To:	
Call-ID:	
Cseq:	
Contact:	As defined in clause 6.20.10.
Rseq:	As defined in clause 7.2.
Content-Type:	Shall be present and shall contain "application/SDP".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	SDP shall be present.  SDP description of media streams acceptable to the destination endpoint.  The a= line shall be present, shall indicate mandatory send and receive preconditions and shall request confirmation, as described in clause 7.4.

#### 8.4.1.2.2 CMS<sub>T</sub> Sending 3xx REDIRECT Status Response

Procedures in this clause are invoked when CMS<sub>T</sub> determines (by methods beyond the scope of the present document) that the incoming call is to be forwarded. CMS<sub>T</sub> shall verify that the called party is a subscriber to the Call Forwarding service. If not, CMS<sub>T</sub> shall send a 480 Temporarily Unavailable error response to CMS<sub>O</sub>.

Further, procedures in this clause are invoked only when CMS<sub>T</sub> determines that it is not necessary to remain in the signalling path for this call for event message generation [23], by the conditions stated in clause 8.4.1.2.

Please refer to clause 7.7.2.3.4.1 for procedures at the terminating CMS for generating the 3XX Redirect response with a P-DCS-Laes header.

CMS<sub>T</sub> shall include a P-DCS-Billing-Info header with the information about the call-leg from CMS<sub>T</sub> in the response to the new destination. This header shall include the Billing-Correlation-ID assigned by CMS<sub>T</sub>, the calling number (same as the called number of the INVITE request), the calling jurisdiction information (JIP NPA-NXX), the called number (the new destination for the call) and the charge number (typically the same as the called number of the INVITE request). The semantics of the parameter values for P-DCS-Billing-Info are described in [23].

The CMS<sub>T</sub> is responsible for including and/or updating the History-Info header.

If there is no History-Info header present in the received INVITE, the CMS<sub>T</sub> shall add one to the response in accordance with the procedures in clause 8.4.12.

If there is a History-Info header present in the received INVITE, then the CMS<sub>T</sub> shall check the data in the History-Info header against the forward-to address. If this check reveals a forwarding loop and the forward attempt is due to Call Forward Busy Line, the CMS<sub>T</sub> shall respond with 486-User-Busy. If the check reveals a loop and the forward attempt is due to Call Forward Variable or Selective Call Forward, the CMS<sub>T</sub> shall respond with 480-Temporarily-Unavailable.

If the check does not reveal a loop, the CMS<sub>T</sub> shall add itself to the header in conformance with the procedures outlined in clause 8.4.12.2 and include the entire updated header in the response.

CMS<sub>T</sub> shall send the following 3xx-Redirect response to CMS<sub>O</sub>.

<b>302-Redirect (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 302 Moved Temporarily	Status line with status code 3xx shall be present.
Via:	As described in clause 6.13.
P-DCS-Billing-Info:	Shall be present, as described above and in clause 7.7.
P-DCS-Laes:	May be present, as described above and in clause 7.7.
History-Info:	Shall be present, as described in clause 8.4.12.
From:	As described in clause 6.13.
To:	
Call-ID:	
Cseq:	
Contact:	Shall be inserted by CMS <sub>T</sub> and carry the new destination information. It shall be a valid URI.  If the new destination is a telephone number, then the format of the URI shall be a tel-URI where the URI contains a telephone number as defined in clause 7.1.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this response shall cease on receipt of the following ACK message.

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Checking</b>
ACK URI SIP/2.0	As described in clause 6.17.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

On receipt of the ACK message, CMS<sub>T</sub> shall cancel the transaction timer T3.

#### 8.4.1.2.3 CMS<sub>T</sub> Sending INVITE Request to CMS<sub>F</sub>

Procedures in this clause are invoked when CMS<sub>T</sub> determines (by methods beyond the scope of the present document) that the incoming call is to be forwarded. CMS<sub>T</sub> shall verify that the called party is a subscriber to the Call Forwarding service. If not, CMS<sub>T</sub> shall send a 480 Temporarily Unavailable error response to CMS<sub>O</sub>.

Further, procedures in this clause are invoked only when CMS<sub>T</sub> determines that the special conditions permitting optimized behaviour, given in clause 8.4.1.2, are not present.

If CMS<sub>T</sub> is able to determine, by methods beyond the scope of the present document, that the forwarded destination is served by a CMS (CMS<sub>F</sub>) which is part of the same RKS-Group-ID, then CMS<sub>T</sub> forwards the INVITE to CMS<sub>F</sub>. Otherwise, i.e. when CMS<sub>F</sub> is part of a different RKS-Group-ID or CMS<sub>T</sub> is unable to determine the RKS-Group-ID of CMS<sub>F</sub>, CMS<sub>T</sub> shall include a Record-Route entry in the INVITE request, remain on the signalling path for the call and generate its stream of event messages for the call.

Please refer to clause 7.7.2.3.4.2 for procedures at the terminating CMS for generating the INVITE message to the forward-to CMS with a P-DCS-Laes header.

CMS<sub>T</sub> shall replace the P-DCS-Billing-Info header in the request with the proper information regarding the new leg of the forwarded call, so that it can be charged to the forwarding party. Further information on the semantics of the parameter values for P-DCS-Billing-Info are described in [23].

If there is no History-Info header present in the received INVITE, the CMS<sub>T</sub> shall add one to the generated INVITE in accordance with the procedures in clause 8.4.12.

If there is a History-Info header present in the received INVITE, then the CMS<sub>T</sub> shall check the data in the History-Info header against the forward-to address. If this check reveals a forwarding loop and the forward attempt is due to Call Forward Busy Line, the CMS<sub>T</sub> shall respond with 486-User-Busy. If the check reveals a loop and the forward attempt is due to Call Forward Variable or Selective Call Forward, the CMS<sub>T</sub> shall respond with 480-Temporarily-Unavailable.

If the check does not reveal a loop, the CMS<sub>T</sub> shall add itself to the header in conformance with the procedures outlined in clause 8.4.12 and include the entire updated header in the generated INVITE.

Finally, CMS<sub>T</sub> shall decrement the Max-Forwards value received by one and include the resulting Max-Forwards in the generated INVITE.

The rest of the INVITE message shall be identical to that which was received by CMS<sub>T</sub>, as prescribed by the proxy behaviour specified in clause 6.

The format of the resulting INVITE message as sent by CMS<sub>T</sub> to CMS<sub>F</sub> and the associated requirements on the header fields are as follows.

INVITE (CMS <sub>T</sub> -> CMS <sub>F</sub> ) Header:	Additional Requirements for Message Generation
INVITE URI SIP/2.0	As described above
Via:	As described in clauses 6.16 and 6.20.42
Record-Route:	May be present, as described above
Require:	As described in clause 6.16
Proxy-Require:	As described in clause 6.16
Supported:	As described in clause 6.16
Allow:	As described in clause 6.16
P-Asserted-Identity:	As described in clause 6.16
Privacy:	As described in clause 6.16
P-DCS-Billing-Info:	As described above
P-DCS-Laes:	As described above
P-DCS-Redirect:	As described above
History-Info:	As described in clause 8.4.12
Max-Forwards:	As described above
From:	As described in clause 6.16
To:	As described in clause 6.16
Call-ID:	As described in clause 6.16
CSeq:	As described in clause 6.16
Contact:	As described in clause 6.16
Content-Type:	As described in clause 6.16
Content-Length:	As described in clause 6.16
	An empty line (CRLF) shall be present between the headers and the message body
v= o= s= c= b= t= a= m=	As described in clause 6.16

The behaviour and processing of the INVITE at CMS<sub>F</sub> is identical to that described in clause 8.4.1.2, with CMS<sub>F</sub> taking the role identified in that clause as CMS<sub>T</sub>.

CMS<sub>T</sub> shall handle all the responses to this INVITE request and process as required by clause 6.16, except as follows:

If CMS<sub>T</sub> receives a 3xx response to the INVITE, it shall re-write the Contact header value with a private URL (as defined in clause 7.7), with the following information encoded in the userinfo portion:

- 1) the value of the Contact header received in the 3xx response;
- 2) the contents of the P-DCS-Billing-Info headers in the 3xx response; and
- 3) the value of Billing-Correlation-ID assigned for the event message stream(s) generated by CMS<sub>T</sub>.

CMS<sub>T</sub> shall remove the P-DCS-Billing-Info header in the first reliable response and replace it with a P-DCS-Billing-Info header containing the Billing-Correlation-ID and Financial-Entity-ID for the terminating event stream of the call-leg from CMS<sub>O</sub> to CMS<sub>T</sub>.

If CMS<sub>T</sub> receives a REFER request as part of a dialog created by this INVITE or outside of the dialog (because routing of the out-of-dialog REFER by the network results in the request being presented to CMS<sub>T</sub>) but containing a Target-Dialog header that identifies the dialog created by this INVITE, it shall re-write the Refer-To header value with a private URL (as defined in clause 7.7), with the following information encoded in the userinfo portion: 1) the value of the Refer-To header received in the REFER request; 2) the contents of the P-DCS-Billing-Info headers in the REFER request and 3) the value of Billing-Correlation-ID assigned for the event message stream(s) generated by CMS<sub>T</sub>.

#### 8.4.1.2.4 CMS<sub>T</sub> Sending Other Status Response to INVITE request

A final error response (4xx, 5xx, or 6xx) shall be sent per clause 6. This includes, but is not limited to, 486-Busy Here. The error response shall be formatted as follows.

<b>Error (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 xxx	Status line header shall be present. It shall include the SIP version number and the three digit status code.
Via:	As described in clause 6.13.
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this response shall cease on receipt of the following ACK.

<b>ACK (CMS<sub>O</sub> -&gt; CMST) Header:</b>	<b>Requirements On CMST for Message Checking</b>
ACK URI SIP/2.0	As described in clause 6.17.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

#### 8.4.1.3 CMS<sub>O</sub> Receives Initial Status Response

In response to the initial INVITE request, CMS<sub>O</sub> shall be prepared to receive a 183-Session-Progress provisional response (in a normal call establishment), a 3xx-Redirect response (if the call was forwarded), or a 4xx, 5xx, or 6xx error response (error cases, such as busy). Final responses, including 4xx, 5xx and 6xx, are described in clause 8.4.1.8.3.

### 8.4.1.3.1 CMS<sub>O</sub> handling of 183-Session-Progress Response

The 183-Session-Progress provisional response received by CMS<sub>O</sub> shall be checked to ensure that it conforms to the following format:

183-Session-Progress (CMS <sub>T</sub> -> CMS <sub>O</sub> ) Header:	Requirements On CMS <sub>O</sub> for Message Checking
SIP/2.0 183 Session Progress	Status line with status code 183 shall be present.
Via:	As described in clause 6.13.
Require:	As defined in clauses 6.20.32 and 7.2 (see note).
Supported:	As described in clause 6.20.37.
P-DCS-Billing-Info:	Shall be present as defined in clause 7.7.
From:	As described in clause 6.13.
To:	
Call-ID:	
CSeq:	
Contact:	As defined in clause 6.20.10.
Rseq:	As defined in clause 7.2.
Content-Type:	Shall be present. Shall contain "application/SDP". The response to the INVITE must contain the SDP description of the media stream to be sent to the destination endpoint.
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	SDP shall be present.  SDP description of media streams acceptable to the destination endpoint.  a= line shall be present, shall indicate mandatory send and receive preconditions and shall request confirmation, as described in clause 7.4.
NOTE: The option tag "100rel" shall be present.	

If the received provisional response does not conform to the above format, then CMS<sub>O</sub> may ignore the message. Otherwise, CMS<sub>O</sub> checks for an outstanding lawfully authorized surveillance order for the originating subscriber and, if present, includes this information in the Authorization for Quality of Service or signals this information to the device performing the intercept (e.g. a Media Gateway).

If the P-DCS-Laes header is present in the 183-Session-Progress response (indicating surveillance is required on the terminating subscriber, but that the terminating equipment is unable to perform that function), CMS<sub>O</sub> shall include this information in the Authorization for Quality of Service, or shall signal this information to the device performing the intercept (e.g. a Media Gateway).

If the 183-Session-Progress provisional response was the first response to the sent INVITE, CMS<sub>O</sub> shall set the transaction timer (T3) for this exchange to T-setup. The default value of (T-setup) is given in annex A. On expiration of T3, CMS<sub>O</sub> shall clear the call attempt and send a CANCEL message to CMS<sub>T</sub> with the same values of Request-URI, From, To and Call-ID for this call attempt, as shown in clause 8.4.1.9.

CMS<sub>O</sub> stores the Contact header and the SDP description for the duration of the call.

If CMS<sub>O</sub> did not perform the LNP query when sending the INVITE, CMS<sub>O</sub> shall check the P-DCS-Billing-Info header for the presence of a Location Routing Number. If present, the Location Routing Number shall be used for event messaging.

CMS<sub>O</sub> shall send a PRACK to acknowledge receipt of the reliable 183-Session-Progress. The PRACK message shall be sent directly to the address specified in the Contact header of the received 183-Session-Progress.

If the originator's SDP is different from that in the initial INVITE, an SDP body shall be included in the PRACK message. Otherwise, an SDP body should not be included.

<b>PRACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for message generation</b>
PRACK URI SIP/2.0	As described in clause 7.2.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22
From:	As described in clause 6.12.
To:	
Call-ID:	
Cseq:	
Rack:	As defined in clause 7.2.
Content-Type:	Shall be present if a body is included.
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	Shall be present if there are changes, should not be present otherwise.  Contains the SDP description as modified by CMSO after processing the SDP returned by CMST.

The 200-OK response to the PRACK request shall be as follows. If an SDP offer was included in the PRACK message, then an SDP body shall be included in the 200-OK response to it. Otherwise, an SDP body should not be included:

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 200 OK	As described in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Type:	May be present.
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	If an SDP offer was present in the PRACK, then an answering SDP shall be present in the 200-OK response, as described in clause 7.2.  SDP should not be present otherwise.

Following receipt of the 183-Session-Progress response, or following receipt of the 200-OK response to the PRACK if an SDP is included in the PRACK message, CMS<sub>O</sub> tells the originating endpoint device to attempt to reserve access network resources based on the most recently received SDP parameters.

CMS<sub>O</sub> shall apply operator defined policy if any to the list of codecs specified in the SDP payload to authorize maximum resources that can be used during this call at the originating CMTS (CMTS<sub>O</sub>). The remaining codec information is used in a GATE-SET command to the originating CMTS it defines the envelope of the authorized QoS parameters. The GATE-SET message also includes any required electronic surveillance information.

After successful completion of the resource reservation, CMS<sub>O</sub> shall send an UPDATE message to CMS<sub>T</sub>. This informs the destination that resources are available and that it may proceed to alert the end user (assuming that the terminating side successfully reserved resources). The UPDATE message shall be formatted as follows.

<b>UPDATE (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Generation</b>
UPDATE URI SIP/2.0	As described in clause 7.4.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22
From:	As described in clause 6.12.
To:	
Call-ID:	
Cseq:	
Content-Type:	Shall be present and shall be as defined in clause 7.4.
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	SDP shall be present as defined in clause 7.4.  Contains the SDP description as modified after processing the SDP returned by the terminating endpoint and with status of the QoS precondition, as described in clause 7.4.

Retransmissions of this request shall cease on receipt of a 200-OK.

The originating endpoint must be prepared to receive bearer channel packets once CMS<sub>O</sub> has transmitted the UPDATE.

The 200-OK response to the UPDATE shall be formatted as follows.

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 200 OK	As described in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Type:	As described in clause 7.3.
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	Shall be present.  Contains the SDP description response to the QoS confirmation sent in the UPDATE request.

If the resource reservation fails, CMS<sub>O</sub> should send a CANCEL to CMS<sub>T</sub>:

<b>CANCEL (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Generation</b>
CANCEL URI SIP/2.0	As described in clause 6.9.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As described in clause 6.9.
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this request shall cease on receipt of a final response to the CANCEL. Normally, the final response will be a 200-OK which shall be formatted as follows. A 481 (Call Leg/Transaction Does Not Exist) would be returned if the INVITE transaction had already completed (successfully or not) at the terminating side.

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 200 OK	As defined in clause 6.9.
Via:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

#### 8.4.1.3.2 302-Redirect Status Response Handling at CMS<sub>O</sub>

NOTE 1: The procedures defined in this clause are identical to the procedures defined in clause 8.4.1.8.2.

CMS<sub>O</sub> shall check that the headers of a received 302-Redirect response are as follows.

<b>302-Redirect (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 302 Moved Temporarily	Status line header shall be present. It shall include the SIP version number and the three digit status code.
Via:	As described in clause 6.20.42.
P-DCS-Billing-Info:	Shall be present as described in clause 7.7.
P-DCS-Laes:	May be present.
History-Info:	Shall be present as described in clause 8.4.12.
From:	As described in clause 6.13.
To:	
Call-ID:	
Cseq:	
Contact:	As defined in clause 6.20.10.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If a received 302-Redirect does not meet the above requirements, CMS<sub>O</sub> may ignore the message. Otherwise, CMS<sub>O</sub> shall match the 302-Redirect response to the corresponding INVITE. CMS<sub>O</sub> shall return an ACK to CMS<sub>T</sub>, using the Request-URI from the earlier INVITE.

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Generation</b>
ACK URI SIP/2.0	As described in clause 6.17.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

Following transmission of the ACK message to CMS<sub>T</sub>, CMS<sub>O</sub> shall issue an INVITE request to the party indicated in the Contact header in the 3xx response. CMS<sub>O</sub> shall generate a Request-URI from the Contact header value as described in clause 8.3.

If the destination endpoint is not served by CMS<sub>O</sub>, CMS<sub>O</sub> generates an INVITE message and sends it to CMS<sub>F</sub>, the CMS that manages the forwarded-to destination.

If a P-DCS-Laes header is present in the 3xx response, CMS<sub>O</sub> should include that header unchanged in the reissued INVITE. CMS<sub>O</sub> should also include a P-DCS-Redirect header containing the original dialled number, the new destination number and the number of redirections that have occurred.

NOTE 2: Please refer to clause 7.7.2 for additional guidance regarding the usage of P-DCS-Laes and P-DCS-Redirect headers.

CMS<sub>O</sub> shall copy the contents of the History-Info header in the 3xx response to a History-Info header in the new INVITE.

CMS<sub>O</sub> shall copy the contents of the P-DCS-Billing-Info header in the 3xx response to a P-DCS-Billing-Info header in the new INVITE.

The rest of the INVITE message should be identical to that which was sent to CMS<sub>T</sub>, with the exception of an updated Cseq value.

The format of the resulting INVITE message as sent by CMS<sub>O</sub> to CMS<sub>F</sub> and the associated requirements on the header fields are as follows.

<b>INVITE (CMSO -&gt; CMSF) Header:</b>	<b>Additional Requirements for Message Generation</b>
INVITE URI SIP/2.0	As described above.
Via:	As described in clause 8.4.1.1.
Require:	As described in clause 8.4.1.1.
Proxy-Require:	As described in clause 8.4.1.1.
Supported:	As described in clause 8.4.1.1.
P-Asserted-Identity:	As described in clause 8.4.1.1.
Privacy:	As described in clause 8.4.1.1.
P-DCS-Billing-Info:	As described above.
P-DCS-Laes:	As described above.
P-DCS-Redirect:	As described above.
History-Info:	As defined in clause 8.4.12
Max-Forwards:	As defined in clause 6.20.22
From:	As described in clause 8.4.1.1.
To:	As described in clause 8.4.1.1.
Call-ID:	As described in clause 8.4.1.1.
CSeq:	As described in clause 8.4.1.1.
Contact:	As described in clause 8.4.1.1.
Content-Type:	As described in clause 8.4.1.1.
Content-Length:	As described in clause 8.4.1.1.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	As described in clause 8.4.1.1.  c= line may be modified in support of IP address Privacy.

On receipt of this INVITE message, CMS<sub>F</sub> uses the combination of From, To, Call-ID and Request-URI as described in clause 6 to recognize this as a new call and not a retransmission from a previous call.

The behaviour and processing of the INVITE at CMS<sub>F</sub> is identical to that described in clause 8.4.1.2.

CMS<sub>O</sub> shall accept a 100-Trying message as described in the following table:

<b>100-Trying (CMS<sub>F</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 100 Trying	As described in clause 6.13.
Via:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

On receipt of a 100-Trying provisional response, the transaction timer (T3) for this exchange CMS<sub>O</sub> may ignore the message. Otherwise, it shall be set to T-setup. The default value of (T-setup) is given in annex A. On expiration of T3, CMS<sub>O</sub> clears the call attempt and sends a CANCEL message to CMS<sub>T</sub> with the same values of Request-URI, From, To and Call-ID for this call attempt, as specified in clause 8.4.1.9.

Processing of responses to this INVITE request is as given in clause 8.4.1.3.

#### 8.4.1.4 CMS<sub>T</sub> Receiving Acknowledgement of 183-Session-Progress

After sending the 183-Session-Progress response to the INVITE, CMS<sub>T</sub> shall wait for the PRACK message acknowledging the Session-Progress. The PRACK message headers shall be checked as follows.

<b>PRACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Checking</b>
PRACK URI SIP/2.0	As described in clause 7.2.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22
From:	As described in clause 6.12.
To:	
Call-ID:	
Cseq:	
Rack:	As described in clause 7.2.
Content-Type:	May be present.
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	May be present.  Contains the SDP description as modified by CMS <sub>O</sub> after processing the SDP returned by CMS <sub>T</sub> .

If the PRACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code. Otherwise, CMS<sub>T</sub> shall respond with a 200-OK. The 200-OK response shall be formatted as follows.

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation</b>
SIP/2.0 200 OK	As described in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Type:	May be present.
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	If an SDP offer was present in the PRACK, then answering SDP shall be present in the 200-OK response, as described in clause 7.2.  SDP should not be present otherwise.

Following receipt of the PRACK message, CMS<sub>T</sub> instructs the endpoint to reserve network resources. The resource reservation request is based on the SDP parameters received in the PRACK request (if provided), otherwise it is based on the SDP parameters received in the INVITE request.

NOTE: In both cases interactions with the terminating endpoint may lead to only a subset of the SDP parameters actually being accepted and reserved.

After the originating endpoint successfully completes the resource reservation, CMS<sub>O</sub> sends an UPDATE message to CMS<sub>T</sub>. This informs CMS<sub>T</sub> that resources are available at the originator and that it may proceed and alert the end user (assuming resources were reserved successfully at the terminating end). CMS<sub>T</sub> shall check and verify the UPDATE message as follows.

<b>UPDATE (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Checking</b>	
UPDATE URI SIP/2.0	As described in clause 7.4.	
Max-Forwards:	As defined in clause 6.20.22.	
Via:	As described in clause 6.20.42.	
From:	As described in clause 6.12.	
To:	As described in clause 6.12.	
Call-ID:		
Cseq:		
Content-Type:		Shall be present. Shall be as defined in clause 7.4 .
Content-Length:		As described in clause 6.20.14.
		An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	SDP shall be present as defined in clause 7.4.  Contains the SDP description as modified after processing the SDP returned by the terminating endpoint and with status of the QoS precondition, as described in clause 7.4.	

If the UPDATE message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code. Otherwise, CMS<sub>T</sub> shall respond to the UPDATE request with a 200-OK, unless an error has occurred as described in clause 7.3. The 200-OK response to the UPDATE shall be formatted as follows.

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation</b>
SIP/2.0 200 OK	As described in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

On receipt of the UPDATE message and the terminating endpoint having successfully reserved the network resources needed for its media flows, CMS<sub>T</sub> continues with the alerting procedures of clause 8.4.1.5.

If the resource reservation fails, CMS<sub>T</sub> shall send a 580-Precondition-Failure response to CMS<sub>O</sub>:

<b>580-Precondition-Failure (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> For Message Generation</b>
SIP/2.0 580 precondition failure	Status line header shall be present. It shall include the SIP version number and the three digit status code.
Via:	As described in clause 6.20.42.
From:	As described in clause 6.13.
To:	
Call-ID:	
Cseq:	
Content-Type:	Shall be present and shall be as defined in clause 7.4.
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	SDP shall be present as defined in clause 7.4.  Shall contain the status of the QoS precondition.

Retransmissions of this response shall cease on receipt of an ACK.

#### 8.4.1.5 CMS<sub>T</sub> sends 180-Ringing or 183-Session-Progress

Once CMS<sub>T</sub> receives the UPDATE message and any applicable resource reservation for the terminating endpoint has completed successfully, CMS<sub>T</sub> shall send a provisional or final response to CMS<sub>O</sub>, through the proxy path taken by the initial INVITE request.

When the terminating endpoint is on-net, CMS<sub>T</sub> determines, by mechanisms beyond the scope of the present document, whether alerting is necessary. If alerting of the destination user is necessary, CMS<sub>T</sub> sends a 180-Ringing response. Otherwise, CMS<sub>T</sub> sends a final response as described in clause 8.4.1.7.

When the terminating endpoint is off-net, CMS<sub>T</sub> waits for an off-net indication to determine what response to generate, as described in [i.1]. If the response from the PSTN indicates that alerting is being performed, CMS<sub>T</sub> generates a 180-Ringing response. If the response indicated progress or in-band information available, the CMS<sub>T</sub> generates a 183-Session-Progress instead and ensures that the terminating endpoint can send media to the originating side. A 181 Call is Being Forwarded or 182 Queued could also be generated as described in [i.1]. In all other cases, CMS<sub>T</sub> sends a final response as described in clause 8.4.1.7.

The 180-Ringing or 183-Session-Progress message shall be formatted as follows.

<b>180 Ringing / 183 Session Progress: (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements on CMS<sub>T</sub> For Message Generation</b>
SIP/2.0 180 Ringing/183 Session Progress	Status line with status code 180 or 183 shall be present.
Via:	As described in clause 6.13.
Require:	As defined in clause 6.20.32 shall include "100rel".
From:	As described in clause 6.13.
To:	
Call-ID:	
Contact:	As defined in clause 6.20.10.
Cseq:	As described in clause 6.13.
Rseq:	As defined in clause 7.2.
Content-Length:	Shall be present if the transport protocol is stream-based (TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this response shall cease on receipt of PRACK.

After sending the 180-Ringing or 183-Session-Progress response to the INVITE, CMS<sub>T</sub> shall wait for the PRACK message acknowledging the response. The PRACK message headers shall be checked as follows.

<b>PRACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Checking</b>
PRACK URI SIP/2.0	As described in clause 7.2.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As described in clause 6.12.
To:	
Call-ID:	
Cseq:	
Rack:	As described in clause 7.2.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the PRACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code. Otherwise, on receipt of this PRACK, CMS<sub>T</sub> shall respond with a 200-OK. The 200-OK response shall be formatted as follows.

<b>200-OK (CMST -&gt; CMSO) Header:</b>	<b>Requirements On CMST for Message Generation</b>
SIP/2.0 200 OK	As described in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

#### 8.4.1.6 CMS<sub>O</sub> receives 180-Ringing or 183-Session-Progress

After the originating endpoint has completed the resource reservation and CMS<sub>O</sub> has sent the UPDATE message to the destination CMS, CMS<sub>O</sub> will receive one of:

- 1) a provisional response of 180-Ringing or 183-Session-Progress;
- 2) a final response of 200-OK; or
- 3) an error. This clause covers the procedures for the provisional responses 180 and 183 and clause 8.4.1.8 covers the procedures for the final responses.

Handling of other responses by CMS<sub>O</sub>, in particular 181, 182 and additional 183-Session-Progress responses with preconditions (as in clause 8.4.1.3.1) is OPTIONAL; however, CMS<sub>O</sub> shall not fail on receiving such responses.

CMS<sub>O</sub> shall verify the headers of the provisional response according to the following table:

180 or 183 Provisional Response (CMS <sub>T</sub> -> CMS <sub>O</sub> ) Header:	Requirements On CMS <sub>O</sub> For Message Checking
SIP/2.0 180 Ringing / 183 Session Progress	Status line with status code 180 or 183 shall be present.
Require:	As defined in clause 6.20.32 shall contain "100rel".
Via:	As described in clause 6.13.
From:	As described in clause 6.13.
To:	
Call-ID:	
Contact:	As described in clause 6.20.10.
Cseq:	As described in clause 6.13.
Rseq:	As defined in clause 7.2.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the received provisional response does not conform to the above format, then CMS<sub>O</sub> may ignore the message. Otherwise, the 180-Ringing response indicates to the originating CMS that the terminating party is being alerted and that local ringback should be generated. CMS<sub>O</sub>, by methods outside the scope of the present document, informs the originating endpoint of the desired actions.

NOTE: In accordance with clause 6.13, the originating endpoint must be prepared to receive media based on the offer/answer exchange performed earlier. If media is received while generating local ringback, the originating endpoint should stop the local ringback tone. In NCS [24], this can for example be achieved by use of the "media start" event defined in the Line package.

The 183-Session-Progress response indicates to the originating CMS that the terminating party is providing some kind of unspecified early media and hence local ringback should not be generated. CMS<sub>O</sub>, by methods outside the scope of the present document, informs the originating endpoint of any desired actions.

If the originating endpoint is off-net then the following requirements apply to the originating MGC. When a SIP 183 provisional response is received from CMS<sub>T</sub>, then the MGC shall set the Interworking Indicator (bit I) of the Backward Call Indicators mandatory parameter in the ACM to a value of '1' meaning Interworking Encountered. This enables cut-through of both forwards and backwards transmission paths in the preceding TDM equipment. If the MGC receives a SIP 180 provisional response from CMS<sub>T</sub>, then it shall set the Interworking Indicator (bit I) of the Backward Call Indicators mandatory parameter in the ACM to a value of '0', meaning No Interworking Encountered. A forward transmission path will already have been cut through at the preceding TDM equipment on the handling of the ISUP Initial Address Message (IAM).

CMS<sub>O</sub> shall acknowledge the 180/183 provisional response with a PRACK message:

PRACK (CMS <sub>O</sub> -> CMS <sub>T</sub> ) Header:	Requirements On CMS <sub>O</sub> for Message Generation
PRACK URI SIP/2.0	As described in clause 7.2.
Via:	As described in clause 6.20.42.
Max-Forwards	As defined in clause 6.20.22.
From:	As described in clause 6.12.
To:	
Call-ID:	
Cseq:	
Rack:	As described in clause 7.2.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this request shall cease on receipt of a 200-OK. The 200-OK response shall be as follows.

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 200 OK	As described in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Contact:	As described in clause 6.20.10.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

### 8.4.1.7 CMS<sub>T</sub> Sending final Response

After the destination endpoint has successfully reserved resources, CMS<sub>T</sub> has received the UPDATE message from CMS<sub>O</sub> (indicating it had also successfully reserved resources) and the destination endpoint has completed whatever alerting procedures were required, CMS<sub>T</sub> sends a final response. For a typical telephony service, this is indicated by the user 'going off-hook' and 'answering the phone' and means the endpoint is ready to begin media transfers. The case of a successful completion of a call is covered in clause 8.4.1.7.1 and the various error cases are covered in clauses 8.4.1.7.2 and 8.4.1.7.3.

#### 8.4.1.7.1 CMS<sub>T</sub> sending 200-OK Final Response

Once CMS<sub>T</sub> determines that the destination endpoint accepts the incoming call (e.g. off-hook, or hook-flash, or by other methods beyond the scope of the present document), it shall send a 200-OK final response to the originating CMS. The message sent by CMS<sub>T</sub> to CMS<sub>O</sub> shall be formatted as follows.

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirement</b>
SIP/2.0 200 OK	As described in clause 6.13.
Via:	
From:	
To:	
Call-ID:	
CSeq:	
Contact:	As described in clause 6.20.10.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

On sending the 200-OK, CMS<sub>T</sub> shall stop timer T3, tell the endpoint device to commit to resources that have been reserved for this call and tell the endpoint device that it may begin sending bearer channel packets.

The terminating device should be prepared to receive bearer channel packets once it has sent a final response.

Retransmissions of this response shall cease on receipt of ACK.

The ACK message, which is sent directly between CMS<sub>O</sub> and CMS<sub>T</sub> shall be verified as follows.

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> For Checking Message</b>
ACK URI SIP/2.0	As described in clause 6.13.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

If the ACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

#### 8.4.1.7.2 CMS<sub>T</sub> sending 3xx-Redirect Final Response

If the terminating endpoint wishes to forward the call (e.g. if call-forwarding-no-answer is enabled), a final 3xx-Redirect status response shall be sent by CMS<sub>T</sub>, the contact header contains the new URI of the forwarded to destination. CMS<sub>T</sub> determines this by means beyond the scope of the present document.

Please refer to clause 7.7.2.3.4.1 for procedures at the terminating CMS for generating the 3XX Redirect response with a P-DCS-Laes header.

Two different procedures are defined for handling the call forward case. In the first procedure, CMS<sub>T</sub> does not remain on the signalling path for the resulting call. In the second procedure, CMS<sub>T</sub> does remain on the signalling path for the resulting call. Use of the first procedure is OPTIONAL; however, its use requires certain conditions to be met as described below. If the first procedure is not used, the second procedure shall be used.

In order to use the first procedure, the RKS-Group-ID of CMS<sub>O</sub> (as given in the P-DCS-Billing-Info header in the INVITE request) shall be the same as the RKS-Group-ID of CMS<sub>T</sub>. In this procedure, CMS<sub>T</sub> shall add a P-DCS-Billing-Info headers to the response to allow the new leg of the forwarded call to be charged to the terminating party. CMS<sub>T</sub> shall include in this P-DCS-Billing-Info header the Correlation-ID and Financial-Entity-ID of CMS<sub>T</sub>, the calling number (same as the called number of the INVITE request), the calling jurisdiction information (JIP NPA-NXX), the called number (the new destination for the call) and the charge number (typically the same as the called number in the INVITE request).

In the second procedure, CMS<sub>T</sub> shall generate a private URL (as defined in [16]) causing the redirected call attempt to be routed through CMS<sub>T</sub> for generation of the proper event messages and billing support. The private URL contains the following information encoded in the userinfo portion:

- 1) the new forwarded destination;
- 2) the contents of the P-DCS-Billing-Info headers in the INVITE request; and
- 3) the values of Billing-Correlation-ID assigned for the event message streams being generated by CMS<sub>T</sub>.

CMS<sub>T</sub> shall also add a P-DCS-Billing-Info header containing the Correlation-ID and Financial-Entity-ID of CMS<sub>T</sub> to the 3xx response.

In either case, the CMS<sub>T</sub> is responsible for including and/or updating the History-Info header.

If there is no History-Info header present in the received INVITE, the CMS<sub>T</sub> shall add one to the response in accordance with the procedures in clause 8.4.12.

If there is a History-Info header present in the received INVITE, then the CMS<sub>T</sub> shall check the data in the History-Info header against the forward-to address. If this check reveals a forwarding loop, the CMS<sub>T</sub> shall respond with 408-Request-Timeout.

If the check does not reveal a loop, the CMS<sub>T</sub> shall add itself to the header in conformance with the procedures outlined in clause 8.4.12.2 and include the entire updated header in the response.

CMS<sub>T</sub> shall send the following 3xx-Redirect response to CMS<sub>O</sub>:

<b>302-Redirect (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation</b>
SIP/2.0 302 Moved Temporarily	Status line with status code 3xx shall be present.
Via:	As described in clause 6.13.
P-DCS-Billing-Info:	Shall be present, as described above and in clause 7.7.
P-DCS-Laes:	May be present, as described above and in clause 7.7.
History- Info:	Shall be present, as described in clause 8.4.12.
From:	As described in clause 6.13.
To:	
Call-ID:	
Cseq:	
Contact:	Shall be inserted by CMS <sub>T</sub> and carries the new destination information, which shall be a valid SIP(s) URI or tel-URI. If the new destination is a telephone number, then the format of the URI should be a tel-URI where the URI contains a telephone number as defined in clause 7.1.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this response shall cease on receipt of an ACK.

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> For Message Checking</b>
ACK URI SIP/2.0	As described in clause 6.13.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the ACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

#### 8.4.1.7.3 Other Status Response to INVITE Request

A final error response (4xx, 5xx, or 6xx) shall be sent as per [6]. This includes, but is not limited to, 480-Temporarily-Unavailable. The error response shall be formatted as follows.

<b>Error (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation</b>
SIP/2.0 xxx	As described in clause 6.13.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this response shall cease on receipt of the ACK.

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Checking</b>
ACK URI SIP/2.0	As described in clause 6.13.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

If the ACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

### 8.4.1.8 CMS<sub>O</sub> Receives Final Response from CMS<sub>T</sub>

#### 8.4.1.8.1 CMS<sub>O</sub> Receiving 200-OK

Once the terminating endpoint accepts the incoming call (e.g. off-hook or hook-flash), it sends a 200-OK status message to the originating CMS<sub>O</sub>. The message sent by CMS<sub>T</sub> to CMS<sub>O</sub> shall be formatted as follows.

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 200 OK	Status line with status code 200 shall be present.
Via:	As described in clause 6.13.
From:	
To:	
Call-ID:	
Cseq:	
Contact:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

On receiving the final response, CMS<sub>O</sub> shall stop timer T3, tell the endpoint device to commit to resources that have been reserved for this call and tell the endpoint device that it should begin sending bearer channel packets.

CMS<sub>O</sub> shall acknowledge the 200-OK response with an ACK message. The header fields shall be generated as follows.

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Generation</b>
ACK URI SIP/2.0	As described in clause 6.13.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

If the ACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

### 8.4.1.8.2 CMS<sub>O</sub> receiving 302-Redirect

NOTE: The procedures defined in this clause are identical to the procedures defined in clause 8.4.1.3.2.

If the terminating device wished to forward the call (e.g. if call-forwarding-no-answer was enabled at the destination), a 302-Redirect status response with the forwarded-to destination URI in the contact header is returned. The message sent by CMS<sub>T</sub> to CMS<sub>O</sub> shall be formatted as follows.

<b>302-Redirect (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 302 Moved Temporarily	As described in clause 6.13.
Via:	
P-DCS-Billing-Info:	Shall be present.
P-DCS-Laes:	May be present.
History- Info:	Shall be present as described in clause 8.4.12.
From:	As described in clause 6.13.
To:	
Call-ID:	
Cseq:	
Contact:	
Contact:	Shall be present as described in clause 6.20.10. Carries the new destination information. shall be a valid URI.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

CMS<sub>O</sub> shall match the 302-Redirect response to the earlier INVITE. CMS<sub>O</sub> shall send an ACK message to CMS<sub>T</sub>. The required fields of the message are:

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Generation</b>
ACK URI SIP/2.0	As described in clause 6.17.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the ACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

Following transmission of the ACK message to CMS<sub>T</sub>, CMS<sub>O</sub> shall issue an INVITE request to the party indicated by the Contact header in the 3xx response. CMS<sub>O</sub> shall generate a Request-URI from the Contact header value as described in clause 8.3.

If the destination endpoint is not served by CMS<sub>O</sub>, CMS<sub>O</sub> shall generate a Request-URI from the Contact header value as described in clause 8.3. CMS<sub>O</sub> generates an INVITE message and sends it to CMS<sub>F</sub>, the CMS that manages the forwarded-to destination.

If a P-DCS-Laes header is present in the 3xx response, CMS<sub>O</sub> should include that header unchanged in the reissued INVITE. CMS<sub>O</sub> should also include a P-DCS-Redirect header containing the original dialled number, the new destination number and the number of redirections that have occurred.

NOTE: Please refer to clause 7.7.2. for additional guidance regarding the usage of P-DCS-Laes and P-DCS-Redirect headers.

The CMS<sub>O</sub> shall copy the contents of the History-Info header in the 3xx response to a History-Info header in the new INVITE.

CMS<sub>O</sub> shall copy the contents of the P-DCS-Billing-Info header in the 3xx response to a P-DCS-Billing-Info header in the new INVITE.

The rest of the INVITE message shall appear identical to that which was sent to CMS<sub>T</sub>, with the exception of an incremented Cseq value.

The format of the resulting INVITE message as sent by CMS<sub>O</sub> to CMS<sub>F</sub> and the associated requirements on the header fields are as follows.

<b>INVITE (CMS<sub>O</sub> -&gt; CMS<sub>F</sub>) Header:</b>	<b>Additional Requirements for Message Generation</b>
INVITE URI SIP/2.0	As described above.
Via:	As described in clause 8.4.1.1.
Require:	As described in clause 8.4.1.1.
Proxy-Require:	As described in clause 8.4.1.1.
Supported:	As described in clause 8.4.1.1.
Allow:	As described in clause 8.4.1.1.
P-Asserted-Identity:	As described in clause 8.4.1.1.
Privacy:	As described in clause 8.4.1.1.
P-DCS-Billing-Info:	As described above.
P-DCS-Laes:	As described above.
P-DCS-Redirect:	As described above.
History-Info	As defined in clause 8.4.12.
Max-Forwards:	As described in clause 8.4.1.1.
From:	As described in clause 8.4.1.1.
To:	As described in clause 8.4.1.1.
Call-ID:	As described in clause 8.4.1.1.
CSeq:	As described in clause 8.4.1.1.
Contact:	As described in clause 8.4.1.1.
Content-Type:	As described in clause 8.4.1.1.
Content-Length:	As described in clause 8.4.1.1.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	As described in clause 8.4.1.1.  c= line may be modified in support of IP address Privacy.

On receipt of this INVITE message, CMS<sub>F</sub> uses the combination of From, To, Call-ID, Cseq and Request-URI headers to recognize this as a new call and not a retransmission from a previous call.

The behaviour and processing of the INVITE at CMS<sub>F</sub> is identical to that described in clause 8.4.1.2.

CMS<sub>O</sub> shall accept a 100-Trying message as described in the following table.

<b>100-Trying (CMS<sub>F</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 100 Trying	As described in clause 6.13.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

On receipt of a 100-Trying provisional response, the transaction timer (T3) for this exchange shall be set to T-setup. The default value of (T-setup) is given in clause 8.4.1.2. On expiration of T3, CMS<sub>O</sub> clears the call attempt and sends a CANCEL message to CMS<sub>T</sub> with the same values of Request-URI, From, To and Call-ID for this call attempt, as specified in clause 8.4.1.9.

Processing of responses to this INVITE request is as given in clause 8.4.1.2.

### 8.4.1.8.3 CMS<sub>O</sub> receiving other error response

A final error response (4xx, 5xx, or 6xx) may be sent as per 6.13. This includes, but is not limited to, 480-Temporarily-Unavailable. The error response shall be verified as follows.

<b>Error (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0	As described in clause 6.13.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

CMS<sub>O</sub> shall send an ACK message to acknowledge the error response:

<b>ACK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Generation</b>
ACK URI SIP/2.0	As described in clause 6.17.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the ACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

### 8.4.1.9 Session Timer expiration at CMS<sub>O</sub>

On expiration of timer T3, CMS<sub>O</sub> shall send a CANCEL request to CMS<sub>T</sub> and shall release all resources reserved for this connection. The CANCEL request shall be as described below. CMS<sub>O</sub> shall also be prepared to send a BYE message in the case that it receives a final response after sending the CANCEL.

<b>CANCEL (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirements On CMS<sub>O</sub> for Message Generation</b>
CANCEL URI SIP/2.0	As described in clause 6.9.
Via:	
Max-Forwards:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this request shall cease on receipt of a 200-OK.

The 200-OK response to the CANCEL shall be formatted as follows.

200-OK (CMS <sub>T</sub> -> CMS <sub>O</sub> ) Header:	Requirements On CMS <sub>O</sub> for Message Checking
SIP/2.0 200 OK	As described in clause 6.9.
Via:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

## 8.4.2 Emergency Call Procedures

A call for emergency services, e.g. 121 or 911, shall follow the procedures given for a basic call, as given in clause 8.4.1, with the following exceptions.

As described in clause 7.1, the emergency services telephone number is not an international number and hence cannot be supplied as a global-number. Instead, the local-number form shall be used and a "phone-context" parameter set to the relevant prefix, e.g. "+1" shall be added as illustrated here:

```
tel:911;phone-context=+1 (or) sip:911;phone-context=+1@dcs-proxy;user=phone
```

If the originating endpoint is not authorized for outgoing service, CMS<sub>O</sub> may permit the call to the emergency services number.

CMS<sub>O</sub> shall indicate in the SIP signalling that this is an emergency call by including a Priority header in the INVITE containing the value "emergency".

If CMS<sub>O</sub> is unable to establish the identity of the originator of the call, CMS<sub>O</sub> may permit the call to the emergency services number. Otherwise the P-Asserted-Identity header shall identify the originator of the call as described in clause 8.4.1.1.1.

CMS<sub>O</sub>, receiving a 183-Session-Progress response for an emergency call, shall indicate enhanced priority for access network admission control in the GATE-SET command to the originating CMTS, using the mechanisms described in [21].

An emergency call should not be put on hold or disconnected due to feature interaction. CMS<sub>O</sub> shall disable all call features on any line active in an emergency call. When a PSAP originates an emergency callback call as defined in clause 8.4.2.3, the terminating CMS shall recognize that the call is an emergency call based on the presence of a Priority header containing the value "emergency" in the received INVITE request.


### 8.4.2.1 Network Hold Support

Network Hold is an optional capability that provides the PSAP operator with the ability to control when the emergency call is released. If Network Hold is supported, then when the originating party hangs up during an emergency call, the call is not released. Instead, the call is maintained and Network Hold is applied by placing the media path on hold and sending a Network Hold "disconnect" signal toward the PSAP operator. When the originating party subsequently goes back off-hook, Network Hold is removed by restoring 2-way media communication and sending a Network Hold "resume" signal toward the PSAP operator.

If Network Hold is supported and configured, then the originating CMS and the MGC shall support the procedures defined here. Otherwise, the following procedures do not apply.


The CMS<sub>O</sub> processing of an originating disconnect request (i.e. when originating party goes on-hook) received during an emergency call differs from standard basic call processing of originating disconnect only after the emergency call is answered. If the originator of the emergency call goes on-hook before CMS<sub>O</sub> receives a 200-OK (answer) response to the INVITE request, then CMS<sub>O</sub> shall process the disconnect request in accordance with the normal session release procedures defined in RFC 3261 [6] (i.e. send CANCEL request, etc.).

However, if the originator of the emergency call goes on-hook after CMS<sub>O</sub> receives a 200-OK response to INVITE, then CMS<sub>O</sub> shall not initiate normal session release procedures. Instead, CMS<sub>O</sub> shall initiate a Network Hold timer and apply Network Hold by following the call-hold procedures defined in clause 8.4.4.1. In addition to the call-hold procedures defined in clause 8.4.4.1, CMS<sub>O</sub> shall populate the re-INVITE(hold) or UPDATE(hold) request with a Priority header containing the value "emergency" to indicate to the MGC that special emergency Network Hold disconnect procedures apply (the MGC procedures for support of emergency Network Hold disconnect are defined in clause 8.4.2.4.3). The message flow to support Network Hold disconnect procedures is shown in figure 11.

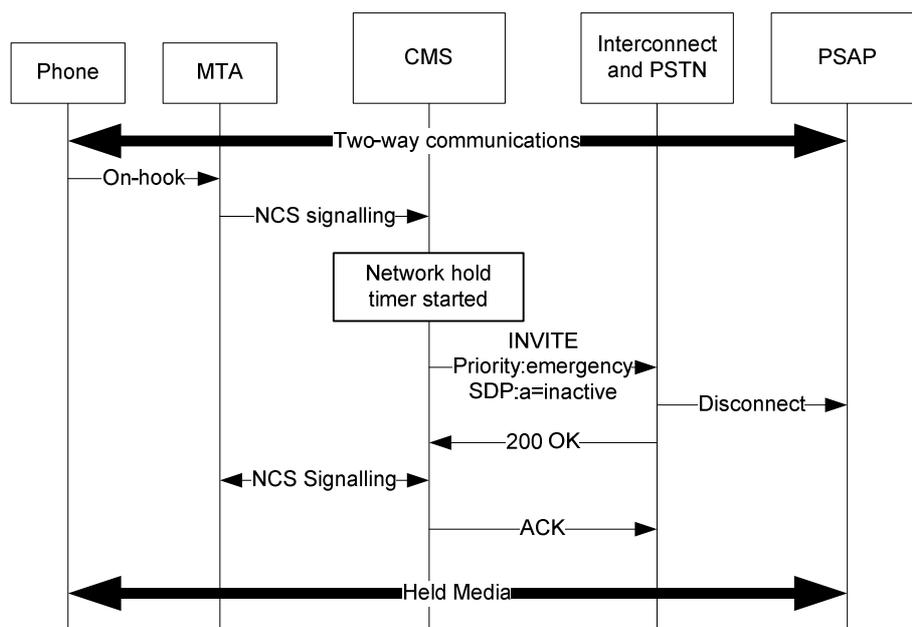

**Figure 11: Emergency Call; Network Hold Disconnect procedures**

If the originator of the emergency call goes back off-hook while Network Hold is in effect, then CMS<sub>O</sub> shall cancel the Network Hold timer and remove Network Hold following the call-hold resume procedures defined in clause 8.4.2.2. In addition to the call-hold resume procedures defined in clause 8.4.2.2, CMS<sub>O</sub> shall populate the re-INVITE(resume) or UPDATE(resume) request with a Priority header containing the value "emergency" to indicate to the MGC that special emergency Network Hold resume procedures apply (the MGC procedures for support of emergency Network Hold resume are defined in clause 8.4.2.4.3). The message flow to support Network Hold resume procedures is shown in figure 12.

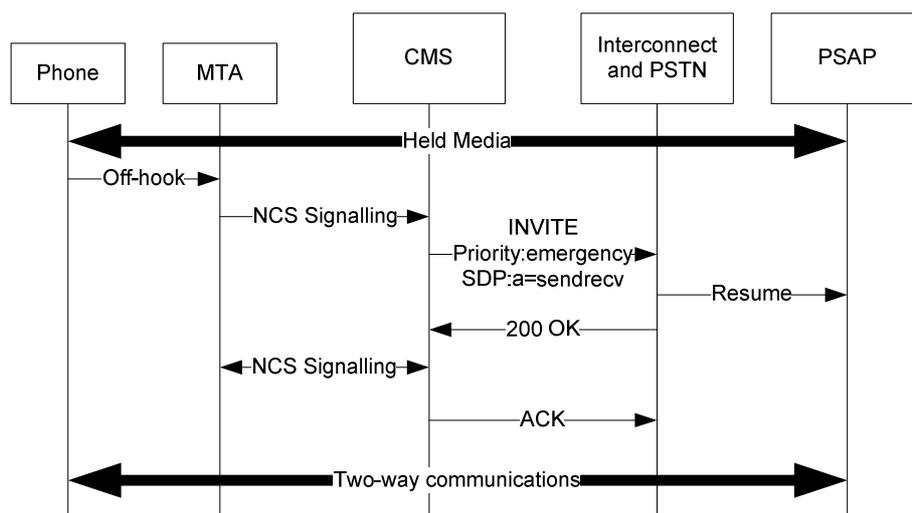

**Figure 12: Emergency Call; Network Hold Resume procedures**

When the  $CMS_O$  network hold timer expires, the  $CMS_O$  shall initiate session release procedures by sending a BYE request as defined in RFC 3261 [6].

The value of the network hold timer should be provisioned on  $CMS_O$ . A value of '0' means that the network does not support network hold although this is not recommended unless it is known that all PSAPs reachable from this  $CMS$  do not support network hold.

#### 8.4.2.2 PSAP Operator Ringback

Operator Ringback is a feature that allows the PSAP to alert the originating party in an established emergency call. The type of alerting depends on whether Network Hold is applied or not (i.e. whether the originating party is on-hook or off-hook). If Network Hold is not applied (caller is off-hook), the caller can be alerted with a special in-band audible alerting (usually ROH tone). If Network Hold is applied (caller is on-hook) then the caller is alerted with standard power ringing. While the caller is receiving the operator ringback alerting signal (e.g. power ringing or ROH tone), the PSAP receives ringback tone.

##### 8.4.2.2.1 PSAP Operator Ringback while Network Hold not Applied (Caller Off-Hook)


When the PSAP indicates that the caller should be alerted and Network Hold is not in effect, the in-band audible alerting signal can be applied in one of several ways. For example, the PSAP could instruct the MG endpoint to send the audible in-band alerting signal toward the originating party via the established bearer path. This mechanism requires no session signalling and therefore is transparent to and requires no support of  $CMS_O$  or the MGC.

Alternatively, on receiving an Operator Ringback request from the PSAP, the MGC could reconfigure the session bearer path to include a media server which provides the audible in-band alerting signal (e.g. ROH) toward the originating party. In this case, the media server provides the audible ringback tone to the PSAP operator. The session is reconfigured using a standard re-INVITE or UPDATE request and therefore places no new requirements on  $CMS_O$ .

##### 8.4.2.2.2 PSAP Operator Ringback while Network Hold Applied (Caller On-Hook)

When the PSAP indicates that the caller should be alerted while Network Hold is applied, the MGC shall send a re-INVITE request containing an Alert-Info header specifying the type of alerting to be applied and a Priority header containing the value "emergency". On receiving the re-INVITE,  $CMS_O$  shall process the request in accordance with normal terminating call procedures; i.e. signal the originating MTA to apply physical alerting as indicated in the Alert-Info header and send a 180-Ringing response to the MGC.

When the alerting emergency call originator goes back off-hook, Network Hold is removed and normal 2-way communication is resumed. However, the signalling to remove Network Hold in this case differs from that described in clause 8.4.2.1. In this case, on receiving an indication that the emergency call originator has gone back off-hook, CMS<sub>O</sub> shall send a 200-OK response to re-INVITE and cancel the Network Hold timer. On receiving the 200-OK response to re-INVITE, the MGC shall perform the Network Hold resume procedures defined in clause 8.4.2.4.3. The message flow to support PSAP Operator Ringback while Network Hold is applied is shown in figure 13.

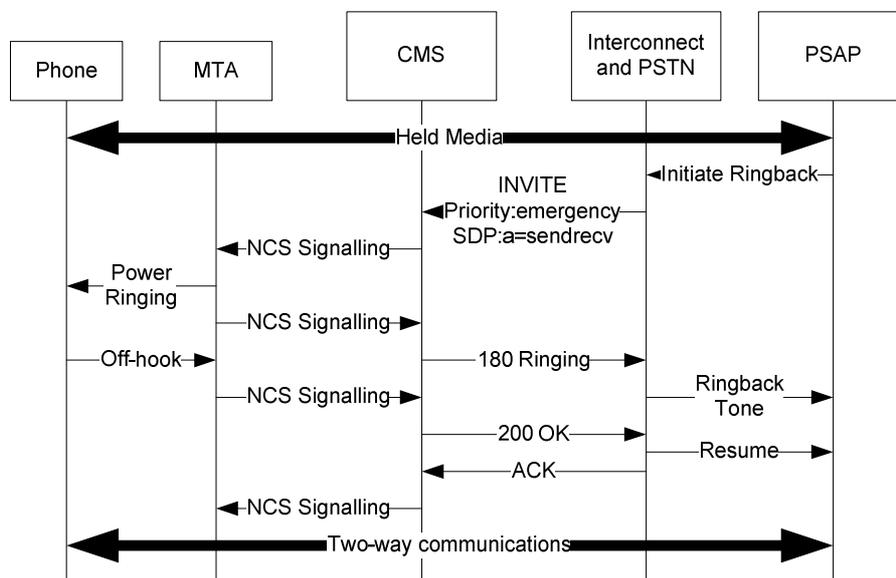

**Figure 13: Emergency Call; PSAP Operator Ringback While on Hold**


**NOTE:** While the operator ringback signal is being applied, the network provides audible ringback tone toward the PSAP operator until the emergency call originator goes back off-hook.

If the MGC receives a disconnect indication from the PSAP operator during alerting, it shall initiate session release procedures as defined in RFC 3261 [6]. If the Network Hold timer expires during alerting, CMS<sub>O</sub> shall initiate session release procedures as defined in RFC 3261 [6].

### 8.4.2.3 PSAP Callback (PSAP Originated Emergency Call)

After an emergency call has ended (due to a caller-initiated disconnect before 200 OK, PSAP forced disconnect, or Network Hold timer timeout), the PSAP operator may wish to re-establish a connection with the emergency caller. In this case, the PSAP initiates a new call towards the original emergency calling party based on information received in the previous call. The callback call arrives as a new terminating call at the CMS that controls target party. The terminating INVITE contains a Priority header containing the value "emergency", thus enabling the CMS to identify this as an operator-initiated emergency callback call. Once the call is answered and in a stable 2-way talk state, it receives the same treatment as if the MTA had originated the emergency call.

On receiving an INVITE with a Priority header containing "emergency", CMS<sub>T</sub> shall mark the call as an emergency call. Once the call is answered and in a stable 2-way talk state, CMS<sub>T</sub> shall support the emergency call Network Hold Procedures defined for CMS<sub>O</sub> in clause 8.4.2.1 and the PSAP Ringback procedures defined in clause 8.4.2.2. The message flow for the PSAP callback call is shown in figure 14.

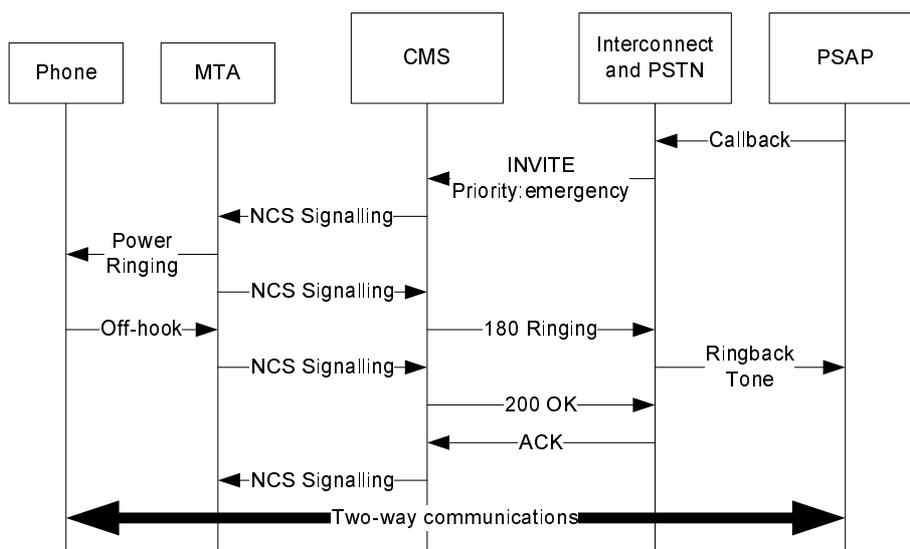

**Figure 14: Emergency Call; PSAP Operator Callback**

#### 8.4.2.4 MGC Procedures

##### 8.4.2.4.1 Invite processing

The MGC procedures to support emergency calls differ depending on whether the trunk interface to the PSTN Selective Router is via SS7 ISUP or Multi-Frequency (MF) Trunks.

##### **SS7 ISUP Trunks:**

Both shared and non-shared ISUP trunks may be used to the selective router. When shared facilities are used the MGC shall limit those facilities with the use of Simulated Facility Groups (SFGs) as documented in Telcordia GR 2956 [50].

On receiving an INVITE request containing a Priority header with a value "emergency", the MGC shall build the resulting ISUP IAM message in accordance with Telcordia GR 2956 [50] including the following mappings:

- The called party number shall be set to the emergency services number (for example, 121 or 911) for that location.
- The P-Asserted-Identity header shall be mapped to the ISUP calling party number.
- The P-Asserted-Identity header shall be mapped to the ISUP Charge Number parameter according to Telcordia GR 2956 [50] requirement R-5.
- The PIDF-LO shall be mapped to Generic Digits Parameter with a Type of Digits set to "Calling Geodetic Location" (CGN).
- The nature of address parameter shall be set to 'National Number'.
- The ISUP Calling Party Category shall be set to "emergency service call".

If the MGC is configured to support Network Hold, then it shall send the ISUP IAM with hold\_possible SAP. The MGC will then receive an indication in the ACM on whether hold should be supported in the hold\_possible SAP.

##### **Multi-Frequency (MF) Trunks:**

The call shall be processed as described in Telcordia GR 529 [48]. The called party number shall be changed to the emergency services number (for example, 121 or 911) for that location. The P-Asserted-Identity header shall be mapped to the calling party number.

#### 8.4.2.4.2 Network Hold processing

The MGC processing of a Network Hold event depends on whether the trunk interface to the PSTN Selective Router is via SS7 ISUP or Multi-Frequency (MF) Trunks.

##### **SS7 ISUP Trunks:**

The MGC shall process Network Hold disconnect requests in accordance with Telcordia GR 1277 [49] (Operator SS7) including the following mappings:

- On receiving a Network Hold disconnect request from CMS<sub>O</sub> as defined in clause 8.4.2.1, the MGC shall instruct the SG to send an ISUP FACILITY message with disconnect\_request SAP.
- On receiving a Network Hold resume request from CMS<sub>O</sub> as defined in clause 8.4.2.1, the MGC shall instruct the SG to send an ISUP FACILITY message with reconnect\_request SAP.

##### **Multi-Frequency (MF) Trunks:**

The MGC shall process the Network Hold disconnect request in accordance with Telcordia GR 529 [48] including the following mappings:

- On receiving a Network Hold disconnect request from CMS<sub>O</sub> as defined in clause 8.4.2.1, the MGC shall instruct the MG to send an on-hook signal.
- On receiving a Network Hold resume request from CMS<sub>O</sub> as defined in clause 8.4.2.1, the MGC shall instruct the MG to send an off-hook signal.

#### 8.4.2.4.3 PSAP Ringback processing

The MGC processing of a PSAP Ringback event depends on whether the trunk interface to the PSTN Selective Router is via SS7 ISUP or Multi-Frequency (MF) Trunks.

##### **SS7 ISUP Trunks:**

The MGC shall process the operator ringback request in accordance with Telcordia GR 1277 [49] (Operator SS7).

On receiving an indication from the SG that an ISUP FACILITY message with the ringback\_request SAP was received,

- If Network Hold is in effect, then the MGC shall send a re-INVITE to CMS<sub>O</sub> to initiate the ringback function at the MTA. The MGC shall include an alert-info header in the re-INVITE.
- If Network Hold is not in effect, then the MGC procedures to apply alerting tone at the MTA (e.g. ROH) are not specified (e.g. the MGC could reconfigure the network path to a media server that provides the tone).

##### **Multi-Frequency (MF) Trunks:**

The MGC shall process the operator ringback request in accordance with Telcordia GR 529 [48].

On receiving a Ringback request from the MG:

- If Network Hold is in effect, then the MGC shall send a re-INVITE to CMS<sub>O</sub> to initiate the ringback function at the MTA. The MGC shall include an alert-info header in the re-INVITE.
- If Network Hold is not in effect, then the MGC procedures to apply alerting tone at the MTA (e.g. ROH) are not specified (e.g. the MGC could reconfigure the network path to a media server that provides the tone).

#### 8.4.2.4.4 PSAP Callback (PSAP Originated Emergency Call)

The MGC shall indicate in the SIP signalling that the PSAP callback call as an emergency call by including a Priority header in the INVITE containing the value "emergency". The method of determining that the call is a PSAP callback call is as follows.

**SS7 ISUP Trunks:**

If an incoming call is received over a trunk group dedicated to emergency calls, then by default the MGC can assume it is an emergency callback call.

- If the ISUP Calling Party Category for an incoming call is set to "emergency service call" or "high priority emergency service call", then the MGC can assume it is a emergency callback call.

**Multi-Frequency (MF) Trunks:**

IPCablecom does not define an MF Trunk interface for support of PSAP emergency callback calls.

**8.4.3 CMS Procedures for REFER**

The SIP REFER method is described in clause 7.6, with further specification text in clause 7.5. This clause details the procedures that a CMS follows in generating and responding to a REFER request.

In the following clauses, CMS<sub>I</sub> is the CMS that initiated the REFER request, CMS<sub>O</sub> is the target of the REFER (who also initiates the action requested by the REFER) and CMS<sub>T</sub> is the CMS that receives the action requested by the REFER. One typical application is three-way-calling (one implementation described in clause 8.4.7), in which case CMS<sub>O</sub> is a Bridge Server that receives the REFER request and initiates INVITEs to parties to be added to a conference.

The basic REFER message sequence for a CMS includes the REFER request, a 202-Accepted response, the request initiated by CMS<sub>O</sub>, a NOTIFY request and a 200-OK response.

**8.4.3.1 CMS<sub>I</sub> Initiates REFER Request**

When the REFER is generated within an established call-leg, the call-leg identification (From tag, To tag and Call-ID) shall match those of the call-leg between CMS<sub>I</sub> and CMS<sub>O</sub>. The CSeq shall be higher than the value of the last-transmitted request (e.g. the ACK). The Request-URI of the REFER shall be the value of the most recently received Contact header from CMS<sub>O</sub> and the Route header (if one is present for the existing dialog) shall be included in the REFER request.

When the REFER is generated outside of an established dialog the CMS<sub>I</sub> shall include a Target-Dialog header in the REFER which matches the call-leg identification (From Tag, To tag and Call-ID) of an established call-leg between CMS<sub>I</sub> and CMS<sub>O</sub>. The Request-URI of the REFER shall be the value of the most recently received Contact header from CMS<sub>O</sub>.

By initiating a REFER request, the Initiator is agreeing to be billed for a logical call-leg from himself to CMS<sub>T</sub> for the duration of the resulting session. Hence the REFER includes the appropriate billing information so that it can be included in the INVITE sent by CMS<sub>O</sub>.

Two different procedures are defined for generating the Refer-To header value. In the first procedure, CMS<sub>I</sub> does not remain on the signalling path for the resulting call. In the second procedure, CMS<sub>I</sub> does remain on the signalling path for the resulting call. Use of the first procedure is OPTIONAL; however, its use requires certain conditions to be met, as described below. If the first procedure is not used, the second procedure shall be used.

In order to use the first procedure, the RKS-Group-ID of CMS<sub>O</sub> (as given in the P-DCS-Billing-Info header in the INVITE request for this dialog) shall be the same as the RKS-Group-ID of CMS<sub>I</sub>. In this procedure, the Refer-To header is set up to point to CMS<sub>T</sub>. If CMS<sub>I</sub> has discovered a Contact header for CMS<sub>T</sub> and that Contact header is a GRUU then the URI from this Contact shall be used by CMS<sub>I</sub> to populate the Refer-To header. Otherwise the basic URL is the same as would be used in the Request-URI, were CMS<sub>I</sub> sending an INVITE directly to CMS<sub>T</sub>; it is constructed according to the procedures described in clause 8.3. In either case, the method parameter is added, with a method of INVITE. CMS<sub>I</sub> shall add a P-DCS-Billing-Info header to the Refer-To URL to allow the additional leg of the resulting call to be charged to the party that initiated the REFER. CMS<sub>I</sub> shall include in this P-DCS-Billing-Info header the Correlation-ID and Financial-Entity-ID of CMS<sub>I</sub>, the calling number (initiator of the REFER request), the calling jurisdiction information (JIP NPA-NXX), the called number (the new destination for the call) and the charge number (typically the initiator of the REFER request).

In the second procedure, CMS<sub>I</sub> shall generate a private URL (as defined in [16]) and place it in the Refer-To header of the REFER request. This causes the resulting call attempt to be routed through CMS<sub>I</sub> for generation of the proper event messages and billing support. The private URL contains the following information encoded in the userinfo portion: 1) the new destination; and 2) the values of Billing-Correlation-ID assigned for the event message streams being generated by CMS<sub>I</sub>.

Any additional header parameters appended to the Refer-To URL (e.g. Refer-To: URI ? header=value & header=value) will be copied into the INVITE issued by CMS<sub>O</sub>, subject to the procedures given in clause 6.19. The headers which need to be included in the Refer-To URL are described in the following paragraphs.

Please refer to clause 7.7.2.3.4.1 for procedures at the terminating CMS for generating the REFER request with a P-DCS-Laes header.

An additional Replaces header may be attached to the Refer-To URI in specific cases.

The REFER request shall not contain an SDP description.

The requirements on the headers which CMS<sub>I</sub> shall include in the message are shown below:

REFER (CMS <sub>I</sub> ->CMS <sub>O</sub> ) Header:	Requirements On CMS <sub>I</sub> For Message Generation
REFER URI SIP/2.0	Shall be as described in clause 7.6.
Via:	As described in clause 6.20.42.
Require:	Shall include "100rel", "precondition".
Proxy-Require:	As described in clause 6.20.29.
Supported:	As described in clause 6.20.37.
Refer-To: URI;method=INVITE ? [P-DCS-Billing-Info=yy] [&] [P-DCS-Redirect=mm & P-DCS-Laes=nn]	Shall be as described in clause 7.6 and identifies the new address of the destination to which the recipient of this REFER is to issue an INVITE. Identifies new call leg to be created. Attached header parameters shall be as described above.
Max-Forwards:	As defined in clause 6.12.
From:	
To:	
Call-ID:	
CSeq:	
Accept:	Shall include "message/sipfrag"
Contact:	As defined in clauses 6.20.10 and 7.6.
Target-Dialog:	Shall be present only if the REFER is sent outside of an established dialog. If included shall be as described in clause 7.14.
Content-Length:	Shall be present and shall indicate a zero-length body.
	An empty line (CRLF) shall be present.

CMS<sub>I</sub> sets an application-level timer (T3) associated with the REFER, with value of T-setup. This timer is cancelled on receipt of either a final response to the REFER or a NOTIFY to the REFER indicating a successful session setup. If timer T3 expires, CMS<sub>I</sub> shall clear the REFER attempt. Thus, if no 2xx response was received, CMS<sub>I</sub> shall send a CANCEL to CMS<sub>O</sub> with the same values of Request-URI, From tag, To tag and Call-ID as in the original REFER request.

#### 8.4.3.2 CMS<sub>O</sub> Receives REFER

CMS<sub>O</sub> receives the REFER request and verifies the requirements shown in the previous subclause. If acceptable, it returns a 202 Accepted final response and goes on to send an INVITE to the Refer-To party (see clause 8.4.1.1). If the request is not acceptable, CMS<sub>O</sub> returns an appropriate 4xx response; 406-Not-Acceptable or 486-Busy-Here are recommended.

<b>202-Accepted (CMS<sub>0</sub> -&gt; CMS<sub>1</sub>) Header:</b>	<b>Requirements On CMS<sub>0</sub> for Message Generation</b>
SIP/2.0 202 Accepted	As described in clause 7.6.
Via:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

If the REFER is received within an existing session at a Bridge Server performing conferencing, the Bridge Server shall assume that the new call-leg that the REFER will create is intended to use the same conference bridge as the existing call-leg. Before responding, it also verifies that a free port is available on the bridge.

If the REFER is received outside of an existing dialog at a Bridge Server performing conferencing and the included Target-Dialog header identifies an existing call-leg then the Bridge Server shall assume that the new call-leg that the REFER will create is intended to use the same conference bridge as the call-leg identified by the Target-Dialog header. Before responding, it also verifies that a free port is available on the bridge.

The REFER creates an implicit subscription to the "refer" event package as described in clause 7.6. Hence, CMS<sub>0</sub> shall send an immediate NOTIFY request to CMS<sub>1</sub> upon accepting the REFER. The format of the NOTIFY is shown below.

<b>NOTIFY (CMS<sub>0</sub> -&gt; CMS<sub>1</sub>) Header:</b>	<b>Requirements On CMS<sub>0</sub> for Message Generation</b>
NOTIFY URL SIP/2.0	Shall be present. Method shall be NOTIFY. The value of URL shall be copied from the Contact header previously received in the REFER.
Via:	As described in clause 7.6.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.12.
To:	
Call-ID:	
Cseq:	
Event: refer	As described in clause 7.6.
Contact:	As described in clause 7.6.
Subscription-State:	As described in clause 7.6.
Content-Type: message/sipfrag	Shall be present. Type shall be "message/sipfrag".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
<Message body>	Message body shall be present. Shall contain the minimal information specified in clause 7.6.

If the Notify message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

### 8.4.3.3 CMS<sub>1</sub> Receives Final Response to REFER

CMS<sub>1</sub> stops the transaction timer T3.

If the response is 202-Accepted, CMS<sub>1</sub> waits for notification of the final result of the request. As described below, other events may precede receipt of this notification, in which case CMS<sub>1</sub> will act on those other events.

### 8.4.3.4 CMS<sub>1</sub> Receives Initial NOTIFY for REFER

Upon receiving the initial NOTIFY for the REFER, CMS<sub>1</sub> sends a 200-OK to CMS<sub>0</sub>.

<b>200-OK (CMS<sub>I</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>I</sub> for Message Generation</b>
SIP/2.0 200 OK	As described in clause 7.6.
Via:	
From:	
To:	
Call-ID:	
Cseq:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
Content-Length:	
	An empty line (CRLF) shall be present.

If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

#### 8.4.3.5 CMS<sub>O</sub> Sends INVITE to Target

CMS<sub>O</sub> creates an INVITE request based on the contents of the REFER. The Request-URI and To header are populated with the URI from the Refer-To header. Additional headers appended to the Refer-To URI (e.g. Replaces) are copied to the INVITE.

If the Refer-To URL did not contain a P-DCS-Billing-Info header, then CMS<sub>O</sub> shall include in the generated INVITE a P-DCS-Billing-Info header that is identical to the P-DCS-Billing-Info header that appeared in the INVITE that created the existing dialog. If CMS<sub>O</sub> initiated that dialog as a UAC, then this is the header value sent in that INVITE; if CMS<sub>O</sub> terminated that dialog as a UAS, then this is the header value received in the INVITE. In this way, the billing arrangements of the previous dialog (between CMS<sub>I</sub> and CMS<sub>O</sub>) are maintained for the first segment of the new call.

The contents of the INVITE are summarized in the following table.

<b>INVITE (CMS<sub>O</sub> -&gt; CMS<sub>I</sub>) Header:</b>	<b>Additional Requirements For Message Generation</b>
INVITE URI SIP/2.0	URI taken from Refer-To
Via:	As described in clause 6.20.42.
Proxy-Require:	As described in clause 6.20.29.
Require:	Shall include "100rel", "precondition".
Supported:	As described in clause 6.20.37.
Allow:	As defined in clause 6.20.5. Shall include "UPDATE".
P-Asserted-Identity:	As described in clause 8.4.1.1. The identity provided is that of the entity issuing the INVITE, as opposed to the identity of the entity that issued the REFER.
Privacy:	As described in clause 8.4.1.1.
P-DCS-Billing-Info:	Copied from Refer-To, if present. Otherwise, shall contain billing information identical to the original call between CMS <sub>O</sub> and CMS <sub>I</sub> .
Max-Forwards	As defined in clauses 6.13 and 6.20.22.
From:	As defined in clauses 6.13 and 6.20.20.
To:	Shall be present. URI taken from Refer-To.
Call-ID:	As defined in clause 6.13.
Cseq:	
Contact:	As defined in clauses 6.13 and 6.20.10.
Content-Type:	Shall be present and shall contain "application/SDP".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= m= a=	As described in clause 8.4.1.1.  c= line may be modified in support of IP address Privacy.  a= line shall be present and shall indicate mandatory send and receive precondition as described in clause 7.4.

Subsequent steps in setting up this second call-leg at CMS<sub>O</sub> introduce nothing new compared with clauses 8.4.1.1 through 8.4.1.5.

In the specific case when CMS<sub>O</sub> is a Bridge Server performing conferencing services, there are two changes from the usual procedures:

- When the Bridge Server receives 180-Ringing, it instructs the conference bridge to play out ringback tone on all ports except that held by the new call-leg.
- When the final response is received from CMS<sub>T</sub>, the Bridge Server instructs the conference bridge to discontinue the ringback tone. Receipt of media from the alerted party will also discontinue the ringback tone.

#### 8.4.3.6 CMS<sub>O</sub> Sends Final NOTIFY To CMS<sub>I</sub>

CMS<sub>O</sub> shall send a NOTIFY request to CMS<sub>I</sub> when it receives the final response to the INVITE.

The NOTIFY request is described in clause 7.5. The format of the message is shown below.

<b>NOTIFY (CMS<sub>I</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements on CMS<sub>I</sub> for Message Generation</b>
NOTIFY URL SIP/2.0	Shall be present. Method shall be NOTIFY. The value of URL shall be copied from the Contact header previously received in the REFER.
Via:	As described in clause 6.12.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.12.
To:	
Call-ID:	
Cseq:	
Event: refer	As described in clause 7.6.
Contact:	
Subscription-State:	
Content-Type: message/sipfrag	Shall be present. Type shall be "message/sipfrag".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
<Message body>	Message body shall be present. At a minimum, shall contain the information specified in clause 7.6.

If the NOTIFY message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

#### 8.4.3.7 CMS<sub>I</sub> Receives NOTIFY

When CMS<sub>I</sub> receives a NOTIFY it matches the From, To and Call-ID headers to an existing call-leg, checks to see that the call-leg has at least one outstanding REFER and verifies that the value of the Cseq parameter in the Event header of the NOTIFY matches the Cseq header of an outstanding REFER. If all of these checks succeed, CMS<sub>I</sub> returns a 200-OK final response.

<b>200-OK (CMS<sub>I</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>I</sub> for Message Generation</b>
SIP/2.0 200 OK	As described in clause 7.6.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the NOTIFY matches an outstanding REFER, CMS<sub>I</sub> cancels the corresponding timer T3 and determines the outcome of the triggered INVITE from the status line provided in the NOTIFY body. If the encapsulated status line indicates a result other than 200-OK, the session attempted with the REFER request has failed and CMS<sub>I</sub> should take action to recover appropriate to the service being requested.

If CMS<sub>I</sub> is unable to match the NOTIFY to an outstanding REFER within an existing call-leg, it returns the final response 481 Subscription Does Not Exist and takes no further action.

### 8.4.3.8 CMS<sub>O</sub> Receives Final Response To NOTIFY

CMS<sub>O</sub> terminates the retransmission timer for the NOTIFY. It takes no other action based on the final response.

## 8.4.4 CMS handling of Mid-Call Changes

Mid-call changes include call-hold, call-resume, call replacement, operator services and dynamic codec changes.

The initiator of a mid-call change in this clause is referred to as CMS<sub>I</sub> and the recipient of a mid-call change is referred to as CMS<sub>R</sub>. Another type of mid-call change involves changing the endpoints of sessions; these are usually referred to as call control services. The REFER method, for which example procedures were given in clause 8.4.3 and example applications are given in clauses 8.4.6 and 8.4.7, provides tools by which many call control services may be built. Implementation of the REFER method is REQUIRED by the present document. For purposes of the present document, three uses of REFER are given as examples: blind transfer, consultative transfer and ad-hoc conferencing. Based on knowledge of the recipient behaviour, the originator may perform many other complex call control operations beyond those shown here.

### 8.4.4.1 CMS<sub>I</sub> Initiating Call Hold: re-INVITE/UPDATE(hold)

To place a call on hold, a re-INVITE(hold) or an UPDATE(hold) message is sent on the signalling channel to the party that is to be put on hold. This is a standard SIP re-INVITE or UPDATE request, with an additional "a=sendonly" or "a=inactive" attribute for the media stream in the SDP. The format of the UPDATE message sent by the initiating CMS<sub>I</sub> and the requirements on the header fields checked at the receiving CMS<sub>R</sub> are as follows (with the exception of the request type, the re-INVITE message encoding is identical).

<b>UPDATE(Hold) (CMS<sub>I</sub> -&gt; CMS-Agent<sub>R</sub>) Header:</b>	<b>Requirements On CMS<sub>I</sub> for Message Generation Requirements On CMS<sub>R</sub> for Message Checking</b>
UPDATE URI SIP/2.0	As described in clause 7.3.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.12.
To:	
Call-ID:	
CSeq:	
Content-Type :	Shall be present and shall contain "application/SDP".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	Shall be present.      a= line shall be present and shall indicate "sendonly" or "inactive".

If the re-INVITE(hold) or UPDATE(hold) message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code. Otherwise, CMS<sub>R</sub> shall send the 200-OK with its SDP description to CMS<sub>I</sub> and shall direct the endpoint on hold to stop sending bearer channel packets.

NOTE: This only holds the media stream in one direction. CMS<sub>R</sub> may decide to return a held SDP as well, however it should not automatically do this in response to an UPDATE(hold).

<b>200-OK (CMS<sub>R</sub> -&gt; CMS<sub>I</sub>) Header:</b>	<b>Requirement for CMS<sub>I</sub> for Message Generation Requirement for CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 200 OK	As defined in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
CSeq:	Shall be present and shall contain "application/SDP".
Content-Type:	
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	Shall be present.  a= line shall be included and encoded as defined in RFC 4566 [3].

After sending the re-INVITE(hold) or UPDATE(hold), the initiator shall wait for a 200-OK response. If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

#### 8.4.4.2 CMS<sub>I</sub> Resuming a held call: UPDATE(resume)

The party that placed the call on hold shall be the one to take it off hold. To take a call off hold, a re-INVITE(resume) or an UPDATE(resume) is sent. A re-INVITE/UPDATE(resume) is a re-INVITE/UPDATE(hold) message with the SDP description of the call being reinstated.

NOTE 1: If this SDP has changed from the pre-hold SDP then QoS may have to be renegotiated. It is consequently RECOMMENDED that the pre-hold SDP be reused for the resumed session.

The format of the re-INVITE or UPDATE message sent by the initiating endpoint (CMS<sub>I</sub>) and the requirements on the header fields checked at the receiving endpoint (CMS<sub>R</sub>) are as follows.

<b>UPDATE(Resume) (CMS<sub>I</sub> -&gt; CMS<sub>R</sub>) Header:</b>	<b>Requirements On CMS<sub>I</sub> for Message Generation Requirements On CMS<sub>R</sub> for Message Checking</b>
UPDATE URI SIP/2.0	As described in clause 7.3.
Via:	As described in clause 6.20.42.
From:	
To:	
Call-ID:	
CSeq:	
Max-Forwards:	As defined in clause 6.12.
Content-Type:	Shall be present and shall contain "application/SDP".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	Shall be present. Should be same as the last SDP sent before the re-INVITE/UPDATE(hold).

The CMS<sub>R</sub> sends a 200-OK with an SDP description to CMS<sub>I</sub>.

NOTE 2: If this SDP has changed from the pre-hold SDP then QoS may have to be renegotiated. It is consequently RECOMMENDED that the pre-hold SDP be reused for the resumed session.

NOTE 3: This only resumes the media stream in one direction. If CMS<sub>R</sub> had held the media stream as well, CMS<sub>R</sub> may decide to return resume SDP as well, however it should not automatically do this in response to a re-INVITE(resume) or an UPDATE(resume).

The 200-OK response shall be as follows.

200-OK (CMS <sub>R</sub> -> CMS <sub>I</sub> ) Header:	Requirements On CMS <sub>R</sub> for Message Generation Requirement On CMS <sub>I</sub> for Message Checking
SIP/2.0 200 OK	As defined in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
CSeq:	Shall be present and shall contain "application/SDP".
Content-Type:	
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	Shall be present.

If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

#### 8.4.4.3 CMS<sub>R</sub> Receiving Call Hold: UPDATE(hold) and UPDATE(resume)

On receiving an UPDATE(hold), CMS<sub>R</sub> sends a 200-OK with SDP description to the party requesting the hold and instructs the endpoint to stop sending bearer channel packets.

On receiving an UPDATE(resume), which is an UPDATE message with the SDP description of the call being reinstated, the CMS sends the party requesting the resume a 200-OK with SDP description to the party requesting the resume is sent back.

NOTE: If either of the SDPs has changed from the pre-hold SDP then QoS may have to be renegotiated. It is consequently RECOMMENDED that the pre-hold SDP be reused for the resumed session.

CMS<sub>R</sub> shall not initiate an UPDATE(resume) during an UPDATE(hold). See clause 8.4.4.1 and 8.4.4.2 for description of the header fields in each message.

#### 8.4.4.4 SIP Messages for Codec Changes - INVITE/UPDATE(Codec-change)

A codec change can occur automatically when two or more codecs are negotiated in the SDP "m=" line. This does not involve any SIP signalling and hence it is not addressed here. However, changing to one or more codecs that were not negotiated in the SDP requires SIP signalling described below.

A signalling message may be sent by either endpoint to initiate a such change in the codec(s). There are two separate cases described. The first is a change to one or more codecs that fall within the existing resource authorization, e.g. as established by the set of codecs listed in the initial INVITE request. Resource authorization for those codecs has already been performed and the message exchange between the CMSs occurs only to synchronize the change. This signalling exchange should be an UPDATE(Codec-Change) request, as described in clause 8.4.4.4.1. An INVITE(Codec-change) may be used instead, as described in clause 8.4.4.4.2.

The second case is a change to one or more codecs that require network resources above and beyond the existing resource authorization, e.g. because they were not previously specified in the initial INVITE. The Gate Controller component of the CMSs must be involved in this procedure in order to increase the resource authorization; therefore, the message exchange follows the proxy-proxy signalling path. This signalling exchange shall be an INVITE(Codec-change), as described in clause 8.4.4.4.2.

#### 8.4.4.4.1 Codec Change within Previous Authorization

If the new codec(s) that CMS<sub>I</sub> wishes to adopt not require additional network resources compared to the codecs included in the SDP of the initial INVITE transaction (or authorized by a subsequent INVITE(codec-change) request), the codec(s) are considered authorized by the network.

In this case, CMS<sub>I</sub> initiating the codec change should send an UPDATE request to the other endpoint with the new codec description. Alternatively, an INVITE request may be sent, as described in clause 8.4.4.4.2; however, this involves a greater number of messages and requires more time to complete.

The format of the UPDATE request sent by the initiating CMS (CMS<sub>I</sub>) and the requirements on the header fields checked at the receiving CMS<sub>R</sub> are:

<b>UPDATE(codec-change) (CMS<sub>I</sub> -&gt; CMS<sub>R</sub>) Header:</b>	<b>Requirements On CMS<sub>I</sub> for Message Generation Requirements On CMS<sub>R</sub> for Message Checking</b>
UPDATE URI SIP/2.0	As described in clause 7.3
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As described in clause 6.12.
To:	
Call-ID:	
CSeq:	
Content-Type :	
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	Shall be present.

Retransmission of this request shall cease on receipt of a final response.

On receiving an UPDATE(codec-change), CMS<sub>R</sub> shall match it to the existing call by the use of the From, To and Call-ID headers. If there is no match, CMS<sub>R</sub> sends a 481-Call-does-not-Exist error response.

If a matching call is found, but the codec change is not acceptable, CMS<sub>R</sub> shall send a 488-Not-Acceptable-Here error response.

If a matching call is found and the codec change is acceptable, CMS<sub>R</sub> shall send a 200-OK response, giving the agreed codec(s).

<b>200-OK (CMS<sub>R</sub> -&gt; CMS<sub>I</sub>) Header:</b>	<b>Requirements On CMS<sub>R</sub> for Message Generation Requirements On CMS<sub>I</sub> for Message Checking</b>
SIP/2.0 200 OK	As defined in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
CSeq:	Shall be present and shall contain "application/SDP".
Content-Type:	
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	SDP shall be present

On sending the 200-OK, CMS<sub>R</sub> instructs the endpoint to commit the network resources. The endpoint may start sending using the new codec.

On receiving a 200-OK response, CMS<sub>I</sub> instructs the endpoint to commit network resources. The endpoint may start using the new codec.

#### 8.4.4.4.2 Codec Change Requiring New Authorization

The format of the INVITE message sent by CMS<sub>I</sub> and the requirements on the header fields checked at the receiving CMS (CMS<sub>R</sub>) are shown below.

<b>INVITE(codec-change) (CMS<sub>I</sub>-&gt;CMS<sub>R</sub>) Header:</b>	<b>Requirements on CMS<sub>I</sub> for message generation Requirements on CMS<sub>R</sub> for message checking</b>
INVITE URI SIP/2.0	As described in clause 6.12. The Request URI shall be the value of the most recent contact header received for this call.
Require:	Shall include "100rel" and "precondition".
Proxy-Require:	As described in clause 6.20.29.
Supported:	As described in clause 6.20.37.
Via:	As described in clause 6.20.42.
P-Asserted-Identity:	As described in clause 8.4.1.1.
Privacy:	As described in clause 8.4.1.1.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.12.
To:	
Call-ID:	
CSeq:	
Content-Type:	Shall be present and shall contain "application/SDP".
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	a= line shall be present and shall indicate mandatory send and receive precondition as described in clause 7.4.

Retransmission of this request shall cease on receipt of a final response.

On receiving an INVITE(Codec-change), CMS<sub>R</sub> shall match it to the existing call by use of the From, To and Call-ID headers. If there is no match, CMS<sub>R</sub> considers this a new call attempt and the procedure continues as described in clause 8.4.1.2.

If a matching call is found, CMS<sub>R</sub> shall send a 183-Session-Progress response, giving the agreed codec(s):

<b>183-Session-Progress (CMS<sub>R</sub> -&gt; CMS<sub>I</sub>) Header:</b>	<b>Requirements On CMS<sub>R</sub> for Message Generation Requirements On CMS<sub>I</sub> for Message Checking</b>
SIP/2.0 183 Session Progress	Status line with status code 183 shall be present.
Via:	As described in clause 6.12.
Require:	As defined in clause 6.20.32.
From:	As described in clause 6.12.
To:	
Call-ID:	
CSeq:	
Contact:	
RSeq:	As defined in clause 7.2.
Content-Type:	Shall be present and shall contain "application/SDP".
Content-Length:	As described in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= a= m=	a= line shall be present, shall indicate mandatory send and receive preconditions and shall request confirmation, as described in clause 7.4.

Retransmissions of this response shall cease on receipt of the PRACK.

CMS<sub>I</sub> shall send a PRACK to acknowledge receipt of the 183-Session-Progress. The PRACK message shall be sent directly to the address specified in the most recent Contact header:

<b>PRACK (CMS<sub>I</sub> -&gt; CMS<sub>R</sub>) Header:</b>	<b>Requirements On CMS<sub>I</sub> for Message Generation Requirements On CMS<sub>R</sub> For Message Checking</b>
PRACK URI SIP/2.0	As described in clause 7.2.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As described in clause 6.12.
To:	
Call-ID:	
Cseq:	
Rack:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Retransmissions of this request shall cease on receipt of a 200-OK.

CMS<sub>I</sub> shall instruct the endpoint to reserve the resources required. CMS<sub>I</sub> sends a UPDATE message to CMS<sub>R</sub> when the outcome of the resource reservation is known. This is as shown in clause 8.4.1.3.

CMS<sub>R</sub> shall send a 200-OK acknowledgement to the PRACK (as in clause 8.4.1.4) and use the SDP description in the INVITE message to instruct the endpoint to reserve access network resources. If successful and after receiving a UPDATE message from CMS<sub>I</sub>, CMS<sub>R</sub> shall send to CMS<sub>I</sub> a 200-OK acknowledgement to the UPDATE (as in clause 8.4.1.4) and a 200-OK final response to the INVITE(codec-change).

On sending the 200-OK, CMS<sub>R</sub> instructs the endpoint to commit the network resources (assuming the UPDATE indicated success). The endpoint may start sending using the new codec.

<b>200-OK (CMS<sub>R</sub> -&gt; CMS<sub>I</sub>) Header:</b>	<b>Requirements On CMS<sub>R</sub> for Message Generation Requirements On CMS<sub>I</sub> for Message Checking</b>
SIP/2.0 200 OK	As described in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
CSeq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

On receiving a 200-OK response, CMS<sub>I</sub> instructs the endpoint to commit network resources and may start using the new codec. CMS<sub>I</sub> shall send out an ACK directly to CMS<sub>R</sub>. The ACK follows the rules for an ACK sent in response to 200-OK for an INVITE message.

<b>ACK (CMS<sub>I</sub> -&gt; CMS<sub>R</sub>) Header:</b>	<b>Requirements On CMS<sub>I</sub> for Message Generation Requirements On CMS<sub>R</sub> For Message Checking</b>
ACK URI SIP/2.0	As described in clause 6.13.
Via:	As described in clause 6.20.42.
Max-Forwards:	As described in clause 6.20.22.
From:	As described in clause 6.12.
To:	
Call-ID:	
Cseq:	
Content-Length:	
	An empty line (CRLF) shall be present.

If the ACK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

## 8.4.5 CMS handling of Call Teardown

To terminate a call, the CMS shall send a BYE message on the signalling channel to instruct the endpoint to stop transmitting bearer data to the other endpoint. It shall also instruct the endpoint to release network resources used for the call.

The endpoint that has detected local hangup is denoted by CMS<sub>I</sub>; the other endpoint in the call is CMS<sub>R</sub>.

<b>BYE (CMS<sub>I</sub> -&gt; CMS<sub>R</sub>) Header:</b>	<b>Requirements on CMS<sub>I</sub> For Message Generation Requirements on CMS<sub>R</sub> For Message Checking</b>
BYE URI SIP/2.0	As described in clause 6.15.
Max-Forwards:	As described in clause 6.20.22.
From:	As described in clause 6.15.
To:	
Call-ID:	
CSeq:	
Content-Length:	
	An empty line (CRLF) shall be present.

Upon receipt of the BYE message, CMS<sub>R</sub> shall instruct the endpoint to release network resources that have been used for this call and it shall send the following 200-OK message in response to the BYE:

200-OK (CMS <sub>R</sub> -> CMS <sub>I</sub> ) Header:	Requirements on CMS <sub>R</sub> For Message Generation Requirements on CMS <sub>I</sub> For Message Checking
SIP/2.0 200 OK	As described in clause 6.15.
From:	
To:	
Call-ID:	
CSeq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

## 8.4.6 Sample Implementation of Call Transfer

The user interface to initiate call transfer and ad hoc conferencing is fundamentally different for NCS MTAs as opposed to intelligent MTAs. The procedures in the present document assume NCS-controlled MTAs; intelligent MTAs are outside the scope of the present document. In the procedural description that follows, the following roles are identified:

- Initiator: the user who begins the call transfer process, often termed the transferor;
- CMS<sub>I</sub>: the CMS serving the Initiator's MTA;
- Party B: the party with whom the Initiator is initially in conversation, often termed the transferee;
- CMS<sub>B</sub>: the CMS serving Party B's MTA;
- Party C: the party to whom the Initiator wishes to transfer the call, often termed the call transfer target;
- CMS<sub>C</sub>: the CMS serving Party C 's MTA;
- Bridge Server: a call server which owns and control conference bridges.

The call transfer procedure is as follows:

- 1) A first call is set up between the Initiator and Party B in the usual way. This call may have been originated by either party.
- 2) The Initiator performs a hook-flash, which is reported to CMS<sub>I</sub>. The latter recognizes that the Initiator has subscribed to conferencing/call transfer and issues an UPDATE(hold) to CMS<sub>B</sub>.
- 3) The Initiator is given dial tone and dials the number of Party C.
- 4) CMS<sub>I</sub> initiates a new call to a Bridge Server by sending an initial INVITE. (The call goes to the Bridge Server rather than CMS<sub>C</sub> because CMS<sub>I</sub> does not yet know whether the Initiator is invoking ad hoc conferencing or call transfer.) Steps 1-4 are shown in figure 15.

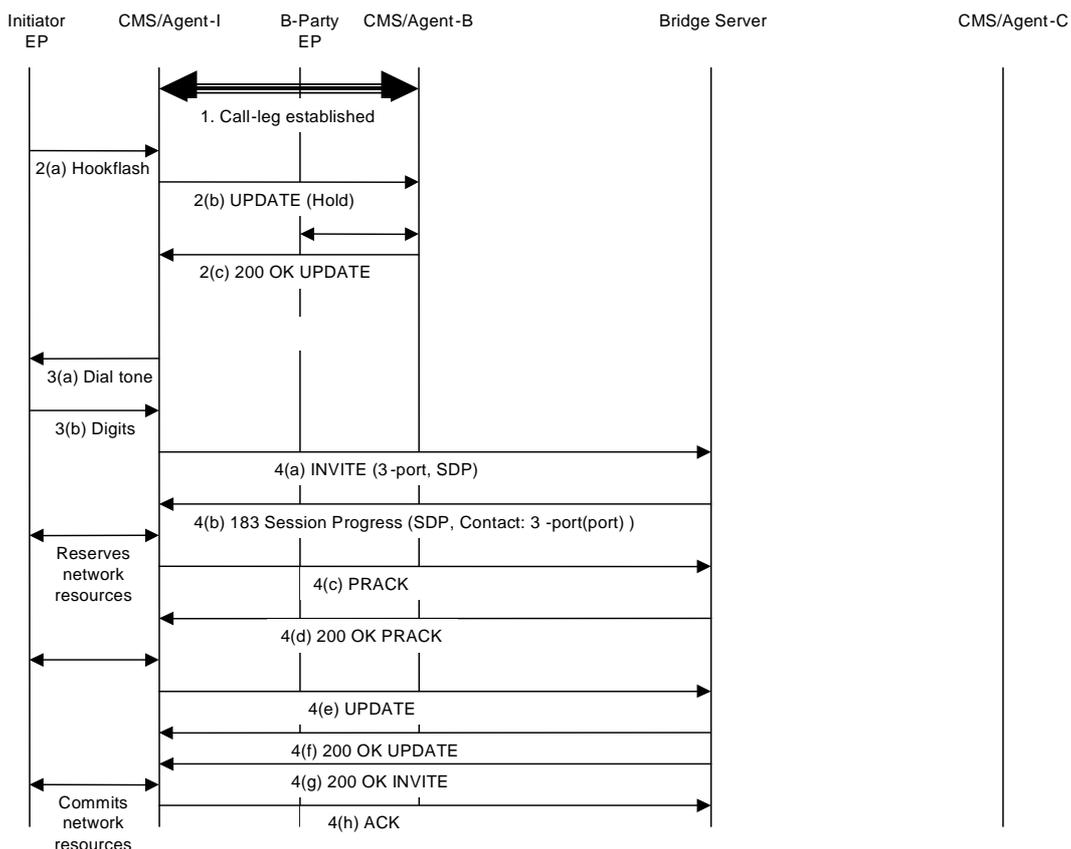


Figure 15: End of transferred call

There is a failure case (F1) where the Bridge Server is unable to accept the INVITE because no free conference circuits are available. In that case, CMSI resumes the original call between the Initiator and Party B, thereby allowing these parties to discover that the transfer attempt has failed. This failure case is shown in figure 16 and is representative of any failure case that prevents the initial connection to the conference bridge.


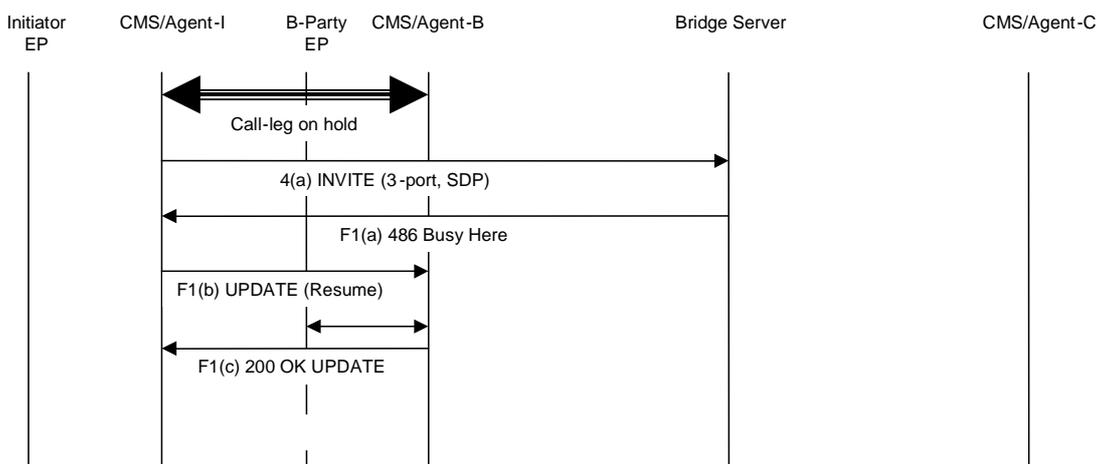



Figure 16: Failure ca- F1 - no free conference circuits

- 5) Once the Bridge Server has accepted the call, CMSI issues REFER either within the existing dialog or outside of the dialog but containing a Target-Dialog header identifying the existing dialog to the Bridge Server, requesting that it establish a call to Party C. The Bridge Server sends a NOTIFY to CMS<sub>I</sub> and establishes the new call on the same conference bridge as the first call. During alerting, it plays ringing audio tone through the bridge to the Initiator. When Party C answers (which could be at any one of a number of points in the following sequence of steps), the Bridge Server sends a final NOTIFY to CMSI. This step is shown in figure 17.

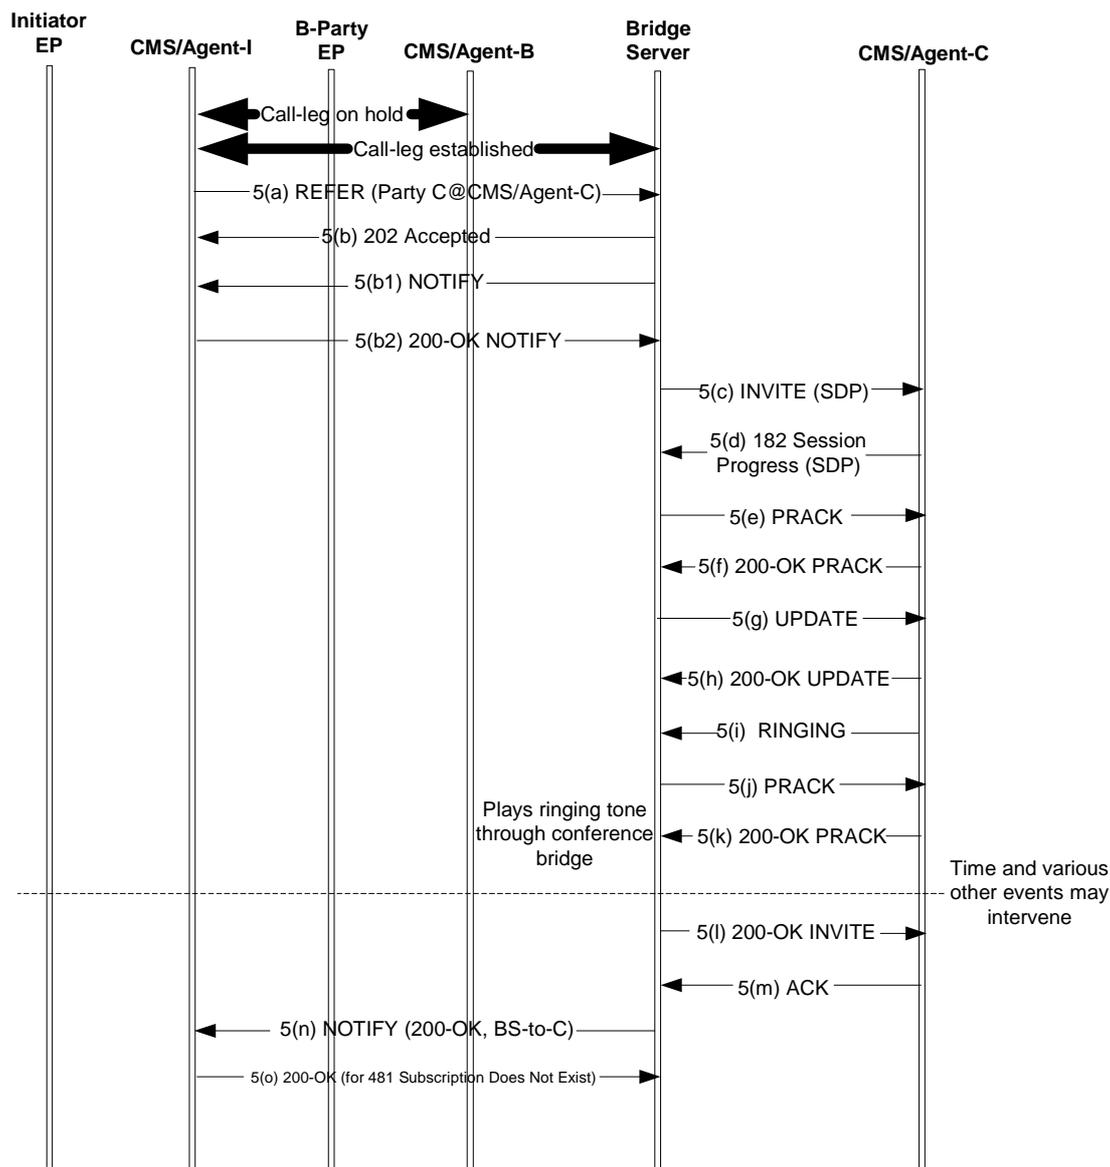


**Figure 17: Establishing the leg from Bridge Server to Party C**

There are several failure cases possible in this step, most of them due to abnormalities which should be handled properly but are too numerous to document here. However, there is a significant probability that Party C is busy. This case is shown as failure case F2 in figure 18. As in the success case, the Bridge Server shall return an immediate NOTIFY after accepting the REFER as well as a NOTIFY request to CMS<sub>I</sub>, with a body containing the status line of the final response from CMS<sub>C</sub>. Since this final response indicates that Party C is busy, CMS<sub>I</sub> recognizes that the transfer has failed. It tears down the connection to the Bridge Server and causes a busy tone to be played out to the Initiator. When the Initiator performs a second hook flash, CMS<sub>I</sub> restores the original direct connection to Party B.

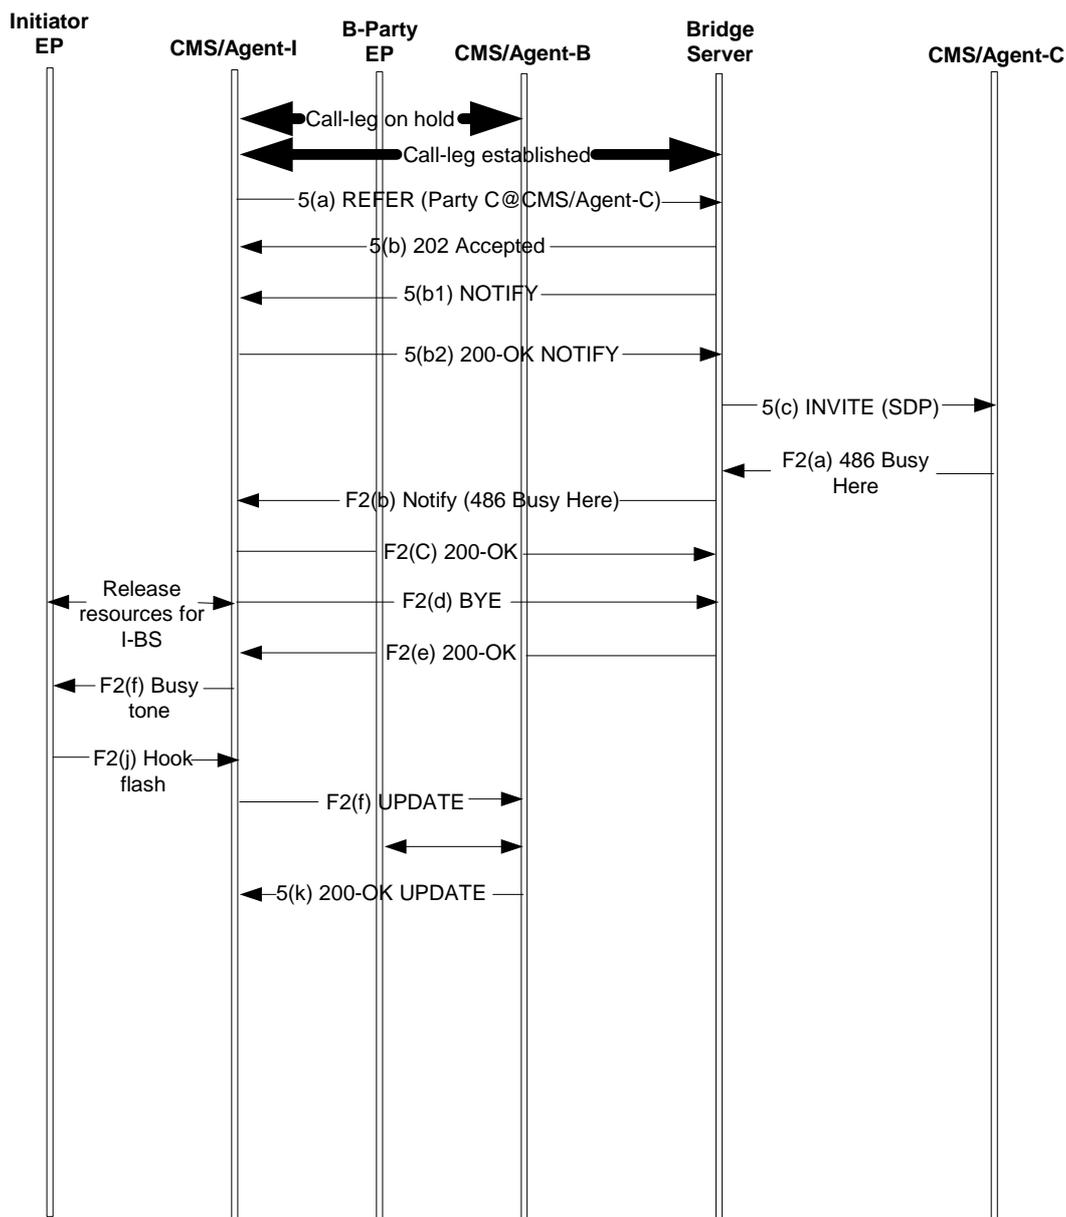


**Figure 18: Failure ca- F2 - Party C busy**

- 6) The Initiator hangs up before the Target has answered (blind call transfer) or after talking to the Target (consultative call transfer) and this is reported to the CMS<sub>i</sub>. (A transfer is termed "blind" because the Transferor does not know whether the call to target will complete successfully.)
- 7) CMS<sub>i</sub> accepts the Initiator's on-hook as the signal to carry out a call transfer. As a first step, it sends a REFER request to the Bridge Server to establish a call-leg to Party B on the same conference bridge as the others. The Refer-To header within the REFER request contains a Replaces header which is to be sent to Party B. Steps 6 and 7 are shown in figure 19.

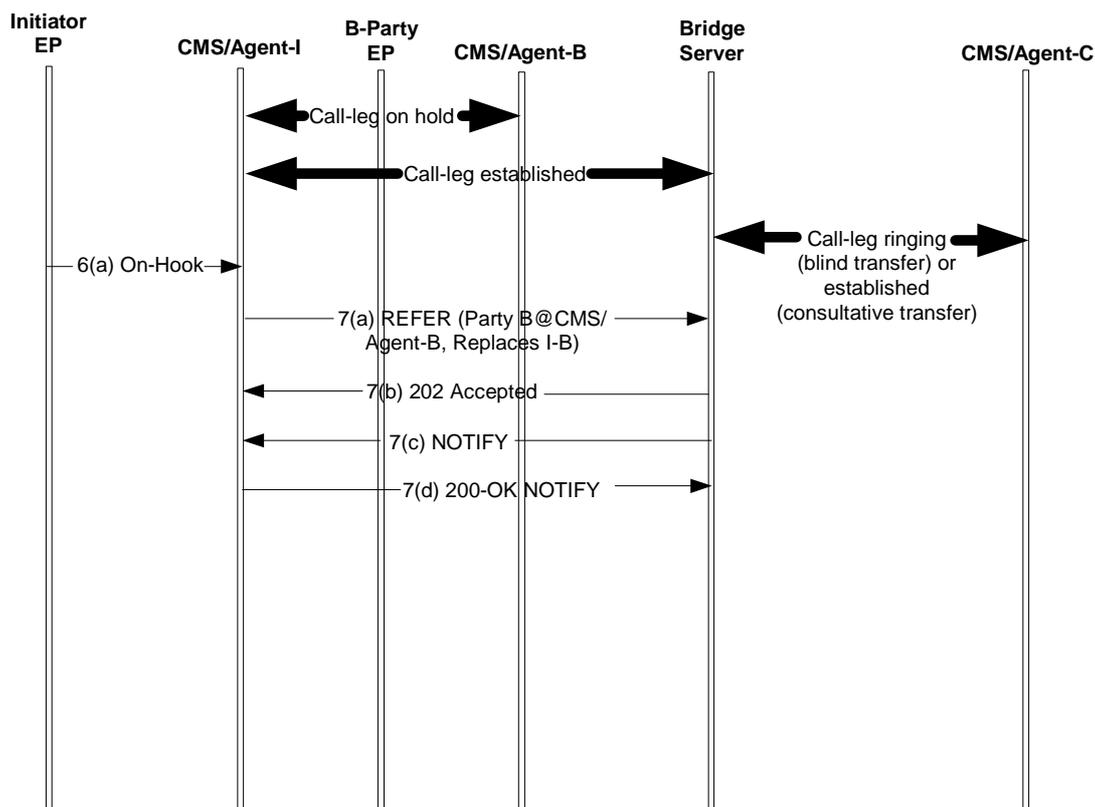

**Figure 19: On-hook initiates transfer action**


As requested, the Bridge Server sends an INVITE to CMSB, containing the Replaces header. CMSB accepts the new call and drops the direct call between the Initiator and Party B. There is no alerting stage because of the call replacement. When the new call-leg is up, the Bridge Server notifies CMSI via a NOTIFY request. If the call-leg to Party C is still in the alerting stage, the Bridge Server continues to play ringing tone through the conference bridge, adding Party B as a listener. This step is shown in figure 20.

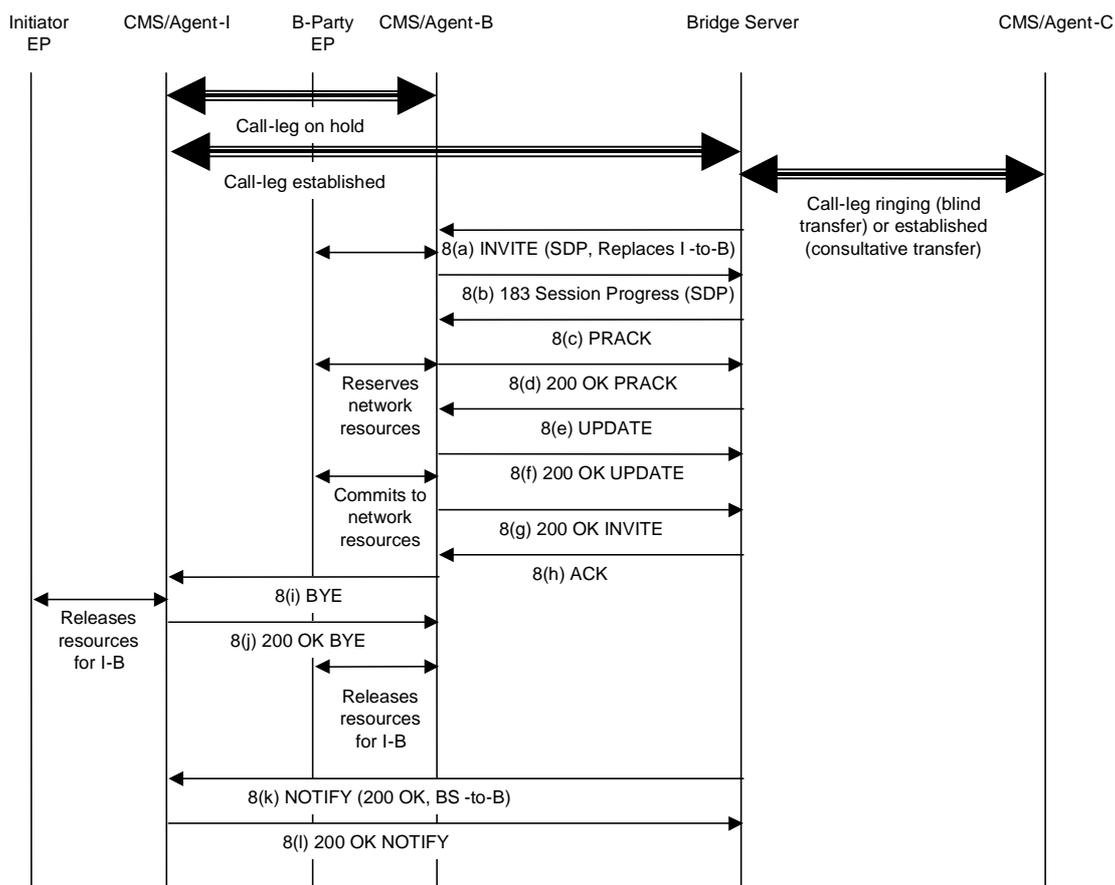

**Figure 20: Relocation of Party B to Bridge**

There are many potential failure points in this step, but all of them are due to abnormalities. The general principle should be to ensure that all call legs are cleared if communication between Party B and Party C is not possible, or to clean up all resources associated with the Initiator but leave the call between Party B and Party C via the Bridge Server in place if steps through 8(h) in figure 20 have succeeded.

- 8) When CMSI receives the NOTIFY from the previous step, it tears down the call-leg to the Bridge Server. The call between Party B and Party C continues through the Bridge Server and conference bridge. Possibly the Bridge Server could take intelligent action to join the two parties and leave the call, but an appropriate trigger for this action must be identified. Moreover, this introduces a race condition between call rerouting and onset of conversation between Party B and Party C. This step is shown in figure 21.

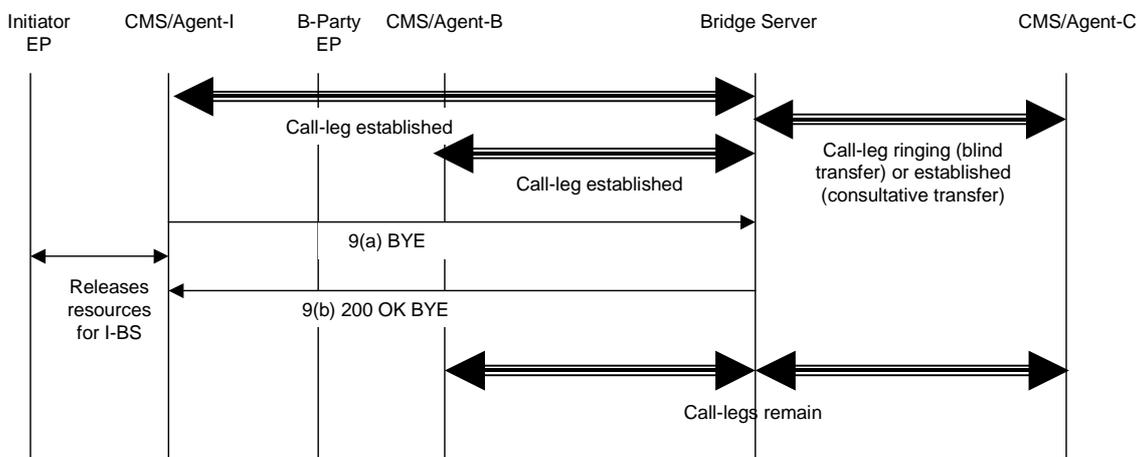

**Figure 21: Transfer completed, CMSI ends involvement in call**

- 9) When one of the remaining parties leaves the call, the Bridge Server also clears the call to the other party. This step is shown in figure 22.

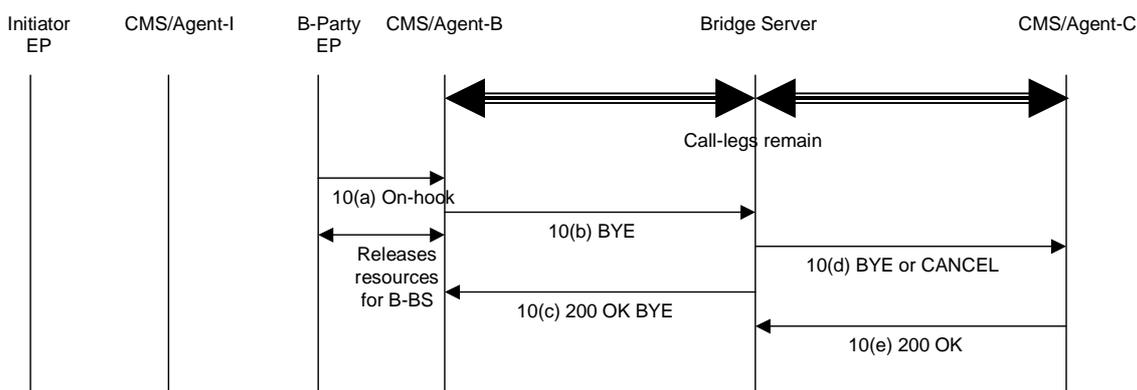


Figure 22: End of transferred call

## 8.4.7 Sample Implementation of Ad-hoc Conference

An ad-hoc conference is formed when the Initiator has two simultaneous active calls, one to Party B and one to Party C and desires to connect them together. The beginning of an ad-hoc conference is as described in steps 1 to 5 and figures 15 to 18 in clause 8.4.6. The difference comes in the next step:

- 6) The Initiator performs another hook-flash.
- 7)  $CMS_I$  accepts the Initiator's hook-flash as the signal to create an ad hoc conference. Its first action is exactly the same as in step 7 of the call transfer procedure:  $CMS_I$  sends a REFER request to the Bridge Server to establish a call-leg to Party B on the same conference bridge as the others. The Refer-To header within the REFER request contains a Replaces header which is to be sent to Party B. Except for the use of hook-flash instead of on-hook, the messaging is the same as in figure 19.
- 8) The actions of the Bridge Server and  $CMS_B$  in response to the REFER are identical to step 8 figure 20 of the call transfer procedure. The one exception to this is that when  $CMS_I$  receives the NOTIFY (message 8(k) in figure 20), it does nothing further until the Initiator goes on-hook or the Bridge Server terminates the call-leg.

## 8.4.8 Automatic Recall and Callback

In support of Automatic Recall and Callback, CMSS supports the extensions defined in clauses 7.16 and 6.20.9.

### 8.4.8.1 $CMS_O$ Sends INVITE to Target

When a user invokes an AR or AC call,  $CMS_O$  shall follow the procedures given for a basic call, as given in clause 8.4.1, with the following exceptions.  $CMS_O$  shall populate the request URI of the INVITE request based on the stored last dialled address for Auto Callback, or the stored address for the last call received for Auto Recall.  $CMS_O$  shall add the Call-Info header with a purpose of "answer\_if\_not\_busy".

CMS<sub>O</sub> shall encode the INVITE request as follows.

INVITE (CMS <sub>O</sub> -> CMS <sub>T</sub> ) Header:	Additional Requirements For Message Generation
INVITE URI SIP/2.0	URI based on stored last party called or last calling party.
Via:	As described in clause 6.20.42.
Proxy-Require:	As described in clause 6.20.29.
Require:	Shall include "100rel", "precondition".
Supported:	As described in clause 6.20.37.
Allow:	As defined in clause 6.20.5 shall include "UPDATE".
P-Asserted-Identity:	As described in clause 8.4.1.1
Privacy:	As described in clause 8.4.1.1.
P-DCS-Billing-Info:	As defined in clause 7.7.
Max-Forwards	As defined in clauses 6.13 and 6.20.22.
From:	As defined in clauses 6.13 and 6.20.20.
To:	As defined in clause 6.20.39.
Call-ID:	As defined in clauses 6.13 and 6.20.8.
Cseq:	As defined in clause 6.20.16.
Contact:	As defined in clauses 6.13 and 6.20.10.
Content-Type:	Shall be present and shall contain "application/ SDP".
Content-Length:	As defined in clause 6.20.14.
Call-Info	Shall be present and shall contain "purpose=answer_if_not_busy".
	An empty line (CRLF) shall be present between the headers and the message body.
v= o= s= c= b= t= m= a=	As described in clause 8.4.1.1.  c= line may be modified in support of IP address Privacy.  a= line shall be present and shall indicate mandatory send and receive precondition as described in clause 7.4.

Subsequent steps follow the requirements as discussed in clauses 8.4.1.1 through 8.4.1.5.

If CMS<sub>O</sub> receives a 200-OK response to INVITE, then it shall follow the basic call procedures defined in clause 8.4.1.8.1. If CMS<sub>O</sub> receives a 486-Busy-Here or 600-Busy-Everywhere response to the INVITE, then it shall follow the AC/AR procedures defined in clauses 8.4.8.2 and 8.4.8.3. If CMS<sub>O</sub> receives any other final 4xx, 5xx, or 6xx response, then it shall follow the error response procedures defined in clause 8.4.1.8.3.

#### 8.4.8.2 CMS<sub>O</sub> Sends SUBSCRIBE to Target

On receiving a 486-Busy-Here or 600-Busy-Everywhere response to an AC/AR INVITE request (defined in clause 8.4.8.1), CMS<sub>O</sub> shall initiate a timer that limits the overall duration of the AC/AR campon attempt. CMS<sub>O</sub> shall then establish a subscription to the dialog event package of the target endpoint, by sending a SUBSCRIBE request to CMS<sub>T</sub>, formatted as follows.

<b>SUBSCRIBE (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Additional Requirements For Message Generation</b>
SUBSCRIBE URI SIP/2.0	Shall contain the URI returned in the Contact header of the INVITE response, if the contact address is a GRUU. Otherwise, shall contain the URI of the stored last called or calling party.
Via:	As described in clause 8.4.1.1.
Max-Forwards:	As defined in clause 8.4.1.1.
From:	As described in clause 8.4.1.1.
To:	
Call-ID:	
CSeq:	
Contact:	As defined in clause 8.4.1.1.
Event:	Shall contain "dialog" as defined in clause 7.16.
Expires:	Shall contain the overall (or remaining) AC/AR duration timer value, as specified in clause 7.5.
Accept:	Shall contain "application/dialog-info+xml" as defined in clauses 7.5 and 7.16.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Upon receiving the SUBSCRIBE request, CMS<sub>T</sub> shall verify that the message is encoded as specified above. CMS<sub>T</sub> shall identify the target subscriber based on the request URI of the SUBSCRIBE request. If the request URI contains a GRUU, then CMS<sub>T</sub> shall derive the identity of the target subscriber from the GRUU. Otherwise (e.g. the request URI contains a non-GRUU SIP URI with "user=phone", or a Tel URI) CMS<sub>T</sub> shall use the request URI as the identity of the target subscriber. If the SUBSCRIBE message does not meet the above requirements or it is not for a valid target subscriber, then CMS<sub>T</sub> shall consider the request to be in error and return an appropriate 4xx, 5xx, or 6xx error code. Otherwise, CMS<sub>T</sub> shall return a 200-OK response and continue processing as described below:

<b>200-OK (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation Requirements On CMS<sub>O</sub> for Message Checking</b>
SIP/2.0 200 OK	As described in clause 7.5.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Expires:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

### 8.4.8.3 CMS<sub>T</sub> Sends NOTIFY to CMS<sub>O</sub>

Upon receiving a valid SUBSCRIBE request, CMS<sub>T</sub> shall send an immediate NOTIFY with the dialog state of the target subscriber. Whenever the dialog state of the target subscriber changes, CMS<sub>T</sub> shall send an updated NOTIFY with the new dialog state. The NOTIFY request is described in clauses 7.5 and 7.16. CMS<sub>T</sub> shall encode the NOTIFY request as follows.

<b>NOTIFY (CMS<sub>T</sub> -&gt; CMS<sub>O</sub>) Header:</b>	<b>Requirements On CMS<sub>T</sub> for Message Generation Requirements On CMS<sub>O</sub> for Message Checking</b>
NOTIFY URL SIP/2.0	As described in clause 7.5.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.12.
To:	
Call-ID:	
Cseq:	
Contact:	As described in clauses 6.20.10 and 7.5.
Event:	Shall contain "dialog" as defined in clause 7.16.
Subscription-State:	As described in clause 7.5.
Content-Type:	Shall contain "application/dialog-info+xml" as defined in clauses 7.5 and 7.16.
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
<Message body>	Message body shall be present. At a minimum, shall contain the information specified in clause 7.16.

Upon receiving the NOTIFY request, CMS<sub>O</sub> shall verify that the message is encoded as specified above. If the NOTIFY message does not meet the above requirements, CMS<sub>O</sub> shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code. Otherwise, CMS<sub>O</sub> shall respond with a 200-OK and continue processing as described below:

<b>200-OK (CMS<sub>O</sub> -&gt; CMS<sub>T</sub>) Header:</b>	<b>Requirement for CMS<sub>O</sub> for Message Generation Requirement for CMS<sub>T</sub> for Message Checking</b>
SIP/2.0 200 OK	As defined in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
CSeq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

Upon receiving a NOTIFY message of "target is idle", CMS<sub>O</sub> shall first cancel the dialog-event subscription by first sending a SUBSCRIBE message with an Expires header containing the value "0". Once the subscription is cancelled, CMS<sub>O</sub> shall send a new INVITE request to the target endpoint as described in clause 8.4.8.1. If CMS<sub>O</sub> receives a 486-Busy-Here or 600-Busy-Everywhere response to the INVITE, then it shall automatically re-subscribe to the dialog event package for the remainder of the overall AC/AR timer as specified in clause 8.4.8.2.

NOTE: A "busy" response could be returned in this case as a result of a race condition, where the target endpoint sends a NOTIFY of "target is idle" and then becomes busy in a new call before the subsequent INVITE is received.

If the overall AC/AR duration timer expires before the target becomes idle, then CMS<sub>O</sub> shall abandon the AC/AR attempt and cancel the subscription by sending a SUSCRIBE request to CMS<sub>T</sub> with an Expires header containing the value "0".

#### 8.4.8.4 INVITE from IPCablecom to PSTN

If MGC<sub>T</sub> receives an INVITE from CMS<sub>O</sub> with a Call-Info header declaring "purpose=answer\_if\_not\_busy", then MGC<sub>T</sub> shall take the following actions:

- Send a TCAP Initial Query message to the PSTN network, requesting the busy/idle status of the target, according to the Originating SPCS procedures defined in GR 227 [47].
- Upon receiving an initial TCAP response indicating that the target is idle according to the originating SPCS procedures defined in [47], immediately send an SS7 ISUP Initial Address Message to the PSTN target, placing a call to the target phone. Normal call processing ensues according to clause 8.4.1.

- Upon receiving an initial TCAP response indicating that the target is busy according to the originating SPCS procedures defined in [47], send a 486-Busy-Here response to the INVITE to CMS<sub>O</sub>. The Contact header in the 486-Busy-Here response shall contain a GRUU that identifies the active TCAP transaction within MGC<sub>T</sub>. The GRUU shall remain valid for the duration of the TCAP transaction. The CMS<sub>O</sub> procedures for processing the 486-Busy-Here response are described in clause 8.4.8.2.
- Upon receiving a SUBSCRIBE message from CMS<sub>O</sub> with a request URI containing a GRUU that identifies the active TCAP transaction, send a SIP NOTIFY message to CMS<sub>O</sub> indicating that the current busy/idle status of the PSTN target endpoint. If the endpoint is busy, CMS<sub>O</sub> maintains the subscription waiting for the target to become idle, as described in clause 8.4.8.3.
- After MGC<sub>T</sub> has responded to the initial INVITE with a 486-Busy-Here message and then upon receiving a TCAP response indicating that the target is now idle according to the Originating SPCS procedures defined in [47], MGC<sub>T</sub> shall send a SIP NOTIFY request to CMS<sub>O</sub> for the active dialog-event subscription, indicating that the target is idle as specified in clause 8.4.8.3. On receiving a notification that the target is now idle, CMS<sub>O</sub> continues with the AC/AR procedures as defined in clause 8.4.8.3.
- If MGC<sub>T</sub> receives a SUBSCRIBE request with an Expires header containing the value "0" from CMS<sub>O</sub>, then it shall terminate the subscription as specified in clause 7.5 and cancel the TCAP transaction as specified in [47].

The PSTN could cancel the TCAP request with a Cancel Terminating Scanning message. If MGC<sub>T</sub> receives a TCAP Cancel Terminating Scanning message, then it shall terminate the subscription to the dialog event package by sending a NOTIFY to CMS<sub>O</sub> indicating that the subscription is to be terminated as specified in clause 7.5.

In processing the dialog event package subscription from CMS<sub>O</sub>, MGC<sub>T</sub> shall comply with [46]. In processing the TCAP Intersystem AR Signaling to scan the PSTN target's busy/idle status, MGC<sub>T</sub> shall comply with procedures in [47] for the originating SPCS.

#### 8.4.8.5 Initial Query Request from PSTN to IPCablecom

When the MGC receives a TCAP Initial Query message according to the terminating SPCS procedures specified in GR 227 [47] and functioning as CMS<sub>O</sub> as specified in clauses 8.4.8.2 and 8.4.8.3, it shall send:

- A SUBSCRIBE request to the target's dialog event package as specified in clause 8.4.8.2. In this case, the request URI of the SUBSCRIBE request contains the URI representing the target subscriber identified in the received TCAP query.
- A TCAP Cancel Terminating Scanning message to the PSTN to cancel the AR/AC request, if the above initial SUBSCRIBE request is rejected.
- A TCAP message to the PSTN according to the terminating SPCS procedures specified in [47], indicating that the target is still busy, upon receiving a NOTIFY response that the target is still busy.
- A TCAP message to the PSTN according to the terminating SPCS procedures specified in [47], indicating that the target is now idle, upon receiving a NOTIFY response that the target is now idle.
- A SUBSCRIBE request to CMS<sub>T</sub> with an Expires header containing the value "0" to terminate the subscription to the target endpoint's Dialog Event Package if it receives a TCAP Cancel Terminating Scanning message from the PSTN to cancel the AR/AC request due to timer expiration. In this case, the MGC shall process the final NOTIFY request received from CMS<sub>T</sub> for the terminating subscription as specified in [47].

In processing the dialog event package subscription toward the target endpoint, the MGC shall comply with [46]. In processing the TCAP Intersystem AR/AC Signaling to scan the target endpoint's busy/idle status, the MGC shall comply with [47]'s procedures for the terminating SPCS.

#### 8.4.9 Message Waiting Indicator

In support of message waiting indicator, CMSS supports the extensions defined in clause 7.10.

If a subscriber's MTA is controlled by a CMS that is different from the one controlling the subscriber's messaging system (e.g. voice-mail), then CMS-to-CMS interaction is required in order to communicate the message waiting indicator to the CMS controlling the MTA.

To determine the message waiting indicator status,  $CMS_I$ , which is controlling the subscriber's MTA, sends a SUBSCRIBE message to  $CMS_R$ , which is controlling the messaging system for that subscriber.  $CMS_R$  in turn sends a NOTIFY to  $CMS_I$  indicating the message waiting indicator status. The interface between  $CMS_I$  and the MTA, as well as the interface between  $CMS_R$  and the messaging system, is outside the scope of the present document.

#### 8.4.9.1 CMSI Sends SUBSCRIBE to CMSR

To subscribe to the message waiting status of a subscriber, a SUBSCRIBE message is sent to the CMS of the subscriber's messaging system. This is a standard SIP SUBSCRIBE [9] request using the "message-summary" event package defined in clause 7.10. The format of the SUBSCRIBE message sent by the initiating  $CMS_I$  and the requirements on the header fields checked at the receiving  $CMS_R$  are shown below.

<b>SUBSCRIBE (<math>CMS_I</math> -&gt; <math>CMS_R</math>) Header:</b>	<b>Requirements On <math>CMS_I</math> for Message Generation Requirements On <math>CMS_R</math> for Message Checking</b>
SUBSCRIBE URI SIP/2.0	As described in clause 7.5.
Via:	As described in clause 8.4.1.1.
Max-Forwards:	As defined in clause 8.4.1.1.
From:	As described in clause 8.4.1.1.
To:	
Call-ID:	
CSeq:	As defined in clause 8.4.1.1.
Contact:	As defined in clause 8.4.1.1.
Event:	Shall contain "message-summary" as defined in clause 7.5.
Expires:	As described in clause 7.5.
Accept:	Shall contain "application/simple-message-summary" as defined in clauses 7.5 and 7.10.
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present

$CMS_R$ , upon receiving the SUBSCRIBE request, determines whether the request is for a valid subscriber. If it is not,  $CMS_R$  returns an appropriate error response and stops further processing. Otherwise,  $CMS_R$  returns a 200-OK response and continues processing as described below.

<b>200-OK (<math>CMS_R</math> -&gt; <math>CMS_I</math>) Header:</b>	<b>Requirements On <math>CMS_R</math> for Message Generation Requirements On <math>CMS_I</math> for Message Checking</b>
SIP/2.0 200 OK	As described in clause 7.5.
Via:	
From:	
To:	
Call-ID:	
Cseq:	
Expires:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present

If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

#### 8.4.9.2 CMSR Sends NOTIFY to CMSI

$CMS_R$  then sends an immediate NOTIFY with the message-waiting status of the subscriber. Whenever the message-waiting status of the subscriber changes,  $CMS_R$  sends an updated NOTIFY with the message-waiting status. The NOTIFY request is described in clauses 7.5 and 7.10. The format of the message is shown below.

<b>NOTIFY (CMS<sub>R</sub> -&gt; CMS<sub>I</sub>) Header:</b>	<b>Requirements On CMS<sub>R</sub> for Message Generation Requirements On CMS<sub>I</sub> for Message Checking</b>
NOTIFY URL SIP/2.0	Shall be present. Method shall be NOTIFY. The value of URL shall be copied from the Contact header previously received in the SUBSCRIBE.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.12.
To:	
Call-ID:	
Cseq:	
Contact:	
Event:	As described in clauses 6.20.10 and 7.5.
Subscription-State:	Shall contain "message-summary" as described in clause 7.10.
Content-Type:	As described in clause 7.5.
Content-Length:	Shall be present. Type shall be "application/simple-message-summary".
	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
<Message body>	Message body shall be present. At a minimum, shall contain the information specified in clause 7.10.

If the NOTIFY message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code. Otherwise, CMS<sub>I</sub> shall responds with a 200-OK.

<b>200-OK (CMS<sub>I</sub> -&gt; CMS<sub>R</sub>) Header:</b>	<b>Requirement for CMS<sub>I</sub> for Message Generation Requirement for CMS<sub>R</sub> for Message Checking</b>
SIP/2.0 200 OK	As defined in clause 6.12.
Via:	
From:	
To:	
Call-ID:	
CSeq:	
Content-Length:	Shall be present if the transport protocol is stream-based (e.g. TCP), as described in clause 6.20.14.
	An empty line (CRLF) shall be present.

If the 200-OK message does not meet the above requirements, it shall consider the request to be in error and return an appropriate 4xx, 5xx, 6xx error code.

## 8.4.10 SDP Interworking

CMSS compliant implementations need to support rules and procedures to allow for interworking between E-MTAs, MGs and UEs. This is due to the protocol differences between NCS/TGCP and SIP and the use of different SDP attributes. Specifically:

- NCS/TGCP and SIP - NCS and TGCP are master/slave protocols that do not use the SDP Offer/Answer procedures defined in [37]. On the other hand, SIP does use Offer/Answer.
- SDP attributes - IPCablecom 1.5 defines SDP attributes that are not used in IPCablecom 2.0 [i.9] and vice versa.
- Other protocol differences such as the use of connection information involving IP address 0.0.0.0, the use of media description including port 0 and the use of multiple media descriptions.

CMSS compliant implementations, as components that translate between NCS/TGCP and SIP, are therefore responsible for ensuring that sessions can still be established even with these differences. Following are specific interworking requirements.

While there are several bandwidth modifier values, IP-Cablecom E-MTAs are required to send and receive only the bandwidth modifier with a value of "AS". In order to interoperate with elements that will use additional bandwidth modifier values, CMSS compliant implementations shall convey only the bandwidth modifier (b=) of "AS" in SDP passed from CMSS to NCS/TGCP, unless provisioned to the contrary. There are some SDP interworking issues that are solved by configuration of CMSS compliant implementations.

If sending media security parameters in LCO attributes, CMSS compliant implementations must be configured to include NULL ciphersuites. When interworking with endpoints that are not E-MTAs, the RemoteConnectionDescriptor will be returned without a ciphersuites list and the E-MTA will assume NULL ciphersuites. This allows a NULL intersection of ciphersuites to enable E-MTAs to interwork with non-E-MTAs.

CMSS compliant implementations shall follow the procedures in [37]. CMSS compliant implementations shall ensure interworking between the SIP interface, which does use offer/answer and the NCS/TGCP interface, which does not. The following provides requirements for general offer/answer model compliance, handling hold scenarios and managing the use of IP-Cablecom 1.5 specific attributes that apply to CMSS implementations. In this clause, the CMS that sends an offer and receives an answer is referred to as CMS<sub>O</sub>, while the CMS that receives an offer and sends an answer is referred to as CMS<sub>T</sub>.

CMSS compliant implementations shall support receiving offers with more than one media descriptor. If the received SDP offer contains more than one media (m=) descriptor, CMS<sub>T</sub> shall forward the first audio descriptor with a non-zero port if present to MTA<sub>T</sub>. If none of the media descriptors indicates audio, CMS<sub>T</sub> shall forward the first image/t38 descriptor with a non-zero port if present to MTA<sub>T</sub>. Otherwise, CMS<sub>T</sub> shall reject the offer with the appropriate SIP response. When forwarding the modified SDP to MTA<sub>T</sub>, CMS<sub>T</sub> shall remove all other media descriptions from the received SDP before forwarding to MTA<sub>T</sub>. Additionally, CMS<sub>T</sub> shall store enough information about the received SDP to be able to construct a valid answer.

CMSS compliant implementations shall support sending answers with more than one media descriptor. The SDP answer provided by CMS<sub>T</sub> shall contain the same number of media descriptors as the offer. CMS<sub>T</sub> builds its answer based on the received LocalConnectionDescriptor (LCD) returned by the terminating endpoint and the information stored for the received SDP offer. If the LCD provided by the terminating endpoint does not contain the same number of media descriptors as was contained in the corresponding SDP offer, CMS<sub>T</sub> shall add the necessary corresponding media descriptors to the received LCD before sending the answer to CMS<sub>O</sub>. For each added media descriptor, CMS<sub>T</sub> shall set the respective port number to zero and include at least one payload type. Attribute descriptors associated with added media descriptors are not required. CMS<sub>T</sub> shall store enough information about the resulting SDP answer to be able to construct a valid SDP offer should a mid-dialog update be necessary. RFC 3262 [7], requires that an answer be included in the first reliable response after an offer is received. In the case of an offer being received in an INVITE and PRACK is being used, the answer supplied by CMS<sub>T</sub> shall be included in the 18x message. This means that CMS<sub>T</sub> shall wait until an LCD is received from the terminating endpoint before sending a 18x message with its SDP answer.

Several stimuli exist which can result in the CMS sending a new SDP offer within an existing dialog (e.g. transition of the endpoint to and from T.38 when the procedures of the FXR package are used, or placing a call on hold). When generating a new SDP offer within an existing dialog the following rules apply:

- the CMS should increment the version in the origin field of the o- line by one from the version in the previous offer;
- the SDP offer generated by the CMS shall contain at least the same number of media descriptors as the previous SDP offer or answer provided by the CMS. For each added media descriptor which was not provided by the endpoint, the CMS shall set the respective port number to zero and include at least one payload type. Attribute lines associated with added media descriptors are not required.

When the CMSS compliant implementation receives a new offer within an existing dialog and this SDP is included in an RCD in an MDCX to an NCS or TGCP endpoint and an LCD is not received in the 200 response, the CMSS compliant implementation shall provide answer SDP on behalf of the NCS/TGCP endpoint. When sending the answer SDP on the CMSS interface, the following rules apply: If a stream is offered as sendonly, the CMSS compliant implementation shall mark the corresponding stream as recvonly or inactive in the answer. If an offered media stream is listed as inactive, the CMSS compliant implementation shall mark the corresponding stream as inactive in the answer. If an offered media stream is recvonly, the CMSS compliant implementation shall mark the corresponding stream as sendonly or inactive in the answer.

### 8.4.10.1 Offer/Answer Requirements for Call Hold

Call hold can be invoked by either the local or remote endpoint. When invoked at the local endpoint, the CMS can choose whether it wants to update the session and inform the remote endpoint of the hold invocation. When invoked at the remote endpoint, the local CMS needs to be prepared to receive a re-INVITE with a number of different hold indicators.

NOTE 1: An existing session can also be updated using the SIP UPDATE method, so the procedures described here apply to both re-INVITE and UPDATE.

When an MTA has had its connection placed in inactive mode or recvnly mode due to invoking call hold, the CMS may send a re-INVITE to the remote endpoint as described in clause 8.4 of [37] and include an a=recvnly or a=inactive line as appropriate. If interworking with pre-RFC 3261 [6] endpoints is desired, the CMSS compliant implementation may also include c=IN IP4 0.0.0.0 in the offer. The CMSS compliant implementation shall be prepared to receive the corresponding answer. Upon receipt of the corresponding answer, the CMSS compliant implementation may choose not to convey the received answer SDP to the MTA.

Receipt of a re-INVITE that contains an SDP offer may signify a number of events. In order to determine whether the re-INVITE is related to a call hold event invoked by the remote endpoint, the CMSS compliant implementation shall support the following hold indicators:

- 1) media description (m=) with RTP port 0
- 2) connection information (c=) with IP address 0.0.0.0
- 3) stream Mode SDP Attributes ("a=inactive", "a=sendonly", "a=recvnly" and "a=sendrecv")

Parsing SDP for these indicators will be limited to: the first session description; connection information (c=) and attribute lines (a=) at the session description level; and the connection information and attribute lines associated with the first audio media description. The standard precedence rules apply with respect to the media and session description levels. For requirements in the following clauses pertaining to call hold, references to the stream mode SDP attribute refer to the attribute with respect to the first audio media description regardless of whether a stream mode SDP attribute is specified at all (default "a=sendrecv"), or specified at the session-level, or specified at the media-level, or specified at both the media-level and session-level.

The cases addressed below assume that a SIP re-INVITE with an SDP offer to enable call hold is received for an existing connection that has an NCS/TGCP ConnectionMode of "sendrecv". For completeness, the CMSS compliant implementation needs to address additional cases, such as the case where the existing connection has a NCS/TGCP ConnectionMode other than "sendrecv" and the case where a similar SDP offer is received and no connection exists.

If a SIP re-INVITE offer SDP includes RTP port 0 in the m=audio line, the following requirements apply: Upon receipt of the SIP re-INVITE, the CMSS compliant implementation shall send an NCS/TGCP ModifyConnection command with a ConnectionMode of "inactive". Unless provisioned to pass SIP re-INVITEs containing RTP port 0, the CMSS compliant implementation shall not include a SIP re-INVITE offer SDP involving port 0 in the NCS/TGCP ModifyConnection command. When sending answer SDP, the CMSS compliant implementation may set the RTP port in the m=audio line to 0.

If a SIP re-INVITE offer SDP includes IP address 0.0.0.0, a non-zero RTP port in the m=audio line and optionally the "a=sendonly" SDP attribute, the following requirements apply: The "a=recvnly" and "a=sendrecv" SDP attributes would be considered invalid in conjunction with an IP address of 0.0.0.0 and shall be treated as "a=inactive" and "a=sendonly", respectively. Upon receipt of the SIP Invite, the CMSS compliant implementation shall send an NCS/TGCP ModifyConnection command with a ConnectionMode of "recvnly". Unless provisioned to pass SIP re-INVITEs containing IP address 0.0.0.0, the CMSS compliant implementation shall not include a SIP re-INVITE offer SDP involving IP address 0.0.0.0 in the NCS/TGCP ModifyConnection command. The CMSS compliant implementation shall include an "a=recvnly" SDP attribute in the answer.

If a SIP re-INVITE offer SDP includes an IP address other than 0.0.0.0, a non-zero RTP port in the m=audio line and the "a=sendonly" SDP attribute, the following requirements apply: Upon receipt of the SIP Invite, the CMSS compliant implementation shall send an NCS/TGCP ModifyConnection command with a ConnectionMode of "recvnly". The CMSS compliant implementation shall include an "a=recvnly" SDP attribute in the answer.

If a SIP re-INVITE offer SDP includes a non-zero RTP port in the m=audio line and the "a=inactive" SDP attribute, the following requirements apply: Upon receipt of the SIP Invite, the CMSS compliant implementation shall send an NCS/TGCP ModifyConnection command with a ConnectionMode of "inactive". The CMSS compliant implementation shall include an "a=inactive" SDP attribute in the answer.

The cases addressed below assume that the NCS/TGCP ConnectionMode is "inactive" or "recvonly" at the time the SIP re-INVITE to disable call hold is received. In disabling call hold, the CMSS compliant implementation needs to take into consideration the NCS/TGCP ConnectionMode at the time call hold was enabled and other possible feature interactions.

If a received SIP re-INVITE offer SDP does not include stream mode SDP attributes (i.e. "a=sendonly", "a=recvonly", "a=inactive" and "a=sendrecv"), the CMSS compliant implementation shall assume "a=sendrecv".

If a received SIP re-INVITE offer SDP includes an IP address other than 0.0.0.0, a non-zero RTP port in the m=audio line and the "a=sendrecv" or no stream mode SDP attribute, the following requirements apply: The CMSS compliant implementation shall convey a SIP re-INVITE offer SDP using a NCS/TGCP ModifyConnection command with a ConnectionMode of "sendrecv".

NOTE 2: The SIP "a=recvonly" SDP attribute does not affect the receive characteristics of the NCS/TGCP endpoint. The CMSS compliant implementation could have an "awareness" regarding why the "receive" characteristics of the NCS/TGCP endpoint should be disabled in this situation. For example, with a previous ConnectionMode of "sendrecv" and a SIP "a=recvonly" SDP attribute, the CMSS compliant implementation could opt to modify the connection to "sendonly". The CMSS compliant implementation could have a similar awareness with respect to "send" characteristics.

#### 8.4.10.2 ptime and mptime SDP Interworking

IPCablecom 1.5 MTAs and Media Gateways are mandated to send an a=mptime line in all LCD. However, this attribute line is not defined in ITU or IETF and is specific to IPCablecom 1.0 and 1.5. Therefore, IPCablecom 2.0 [i.9] devices and non-IPCablecom devices will not recognize this line. Further, IPCablecom 1.5 MTAs and Media Gateways are not required to include the a=ptime line as defined in [3] or [i.12]. If this line is not included by an IPCablecom 1.5 endpoint, the non-IPCablecom 1.5 recipient of the SDP should assume that the default ptime for the codecs in the m=audio line is preferred. The default packetization times are defined in clauses 4.2 and 4.5 of [i.13]. For most codecs, the default packetization is 20ms, but some codecs such as G.723 have different default packetization rates.

Therefore, the CMSS compliant implementation needs to be prepared for the situation where one of more of the following is occurring:

- 1) IPCablecom 1.5 endpoint does not send a=ptime attribute line
- 2) Non-IPCablecom 1.5 endpoint does not honour an a=ptime: line sent by an IPCablecom 1.5 MTA or MG or CMSS interface
- 3) Non-IPCablecom 1.5 endpoint interprets the absence of a=ptime attribute line as meaning the default packetization rate for the codec in use (generally 20 ms)
- 4) Non-IPCablecom 1.5 endpoint sends an a=ptime line
- 5) Non-IPCablecom 1.5 endpoint does not send an a=ptime line

CMSS compliant implementations shall add an a=ptime attribute if the IPCablecom 1.5 MTA sends an mptime attribute with one value or multiple equal values (e.g. mptime: 20 20 20) and a ptime attribute is not present in the offer. In this case the value contained within the added a=ptime attribute shall be equal to the value provided in the a=mptime attribute. CMSS compliant implementations may send the a=ptime attribute if the IPCablecom 1.5 MTA sends an mptime attribute with multiple non-equal values (e.g. mptime: 10 20 30) if the a=ptime attribute is not present. If a CMSS compliant implementation sends the a=ptime attribute based on the presence of the mptime attribute, it shall send the a=ptime attribute with a value present in the mptime attribute which is applicable to all listed codecs. There may be cases where a non-IPCablecom 1.5 client answers with an SDP containing packetization rates that were not offered. CMSS compliant implementations should not specify a p: or mp: LocalConnectionOption that conflicts with the contents of the RCD.

## 8.4.11 MGC Caller ID Procedures

### 8.4.11.1 MGC Processing - Egress

The following closely follows [i.10].

When an MGC receives a SIP request destined for the PSTN, it translates the call signalling from SIP to SS7. The SS7 interface is defined in [i.11]. The ISUP call setup messages for circuit switch calls indicate presentation statuses of calling identity items in data fields known as presentation sub fields. A presentation subfield exists for each calling identity item.

Before constructing the SS7 messages, the MGC first determines the presentation status as follows:

- If a Privacy header is present in the SIP request and contains a privacy value of "id," then the presentation status is "anonymous"; else
- If no P-Asserted-Identity headers are present in the SIP request then the presentation status is "unavailable"; else
- The presentation status is "public."

The MGC determines the value to be included in the presentation subfield of the CPN and GN parameters of the IAM. The format for the CPN parameter field is included in annex A.1 of [i.10]. The format for the GN parameter field is included in annex A.2 of [i.10].

If the presentation status is "public," the MGC shall encode the value "00" in the presentation subfield of the CPN parameter of the IAM to indicate that presentation of the caller's calling number is allowed.

If the presentation status is "anonymous," the MGC shall encode the value "01" in the presentation subfield of the CPN parameter of the IAM to indicate that presentation of the caller's calling number is restricted.

If the presentation status is "unavailable" then no CPN parameter is included in the IAM.

Irrespective of the presentation status, the MGC shall encode the value "11" meaning 'network provided' in the screening indicator subfield of the CPN parameter of the IAM if a CPN parameter is included.

The MGC shall populate the Address Signals within a CPN parameter, if included, according to the following rules:

- 1) If a TEL URI is present in the P-Asserted-Identity header and contains a global-number (as defined in [28]) (if the first character is a "+") then the global-number-digits component shall be extracted and all visual-separator characters as well as the leading "+" character removed. Then all the remaining characters from the global-number-digits component shall be used to populate the address signals. The MGC should populate the value "001" meaning 'ISDN Telephony Numbering Plan (E.164)' in the numbering plan indicator subfield of the CPN parameter and the value "000 0100" meaning 'International Number' in the nature of address subfield of the CPN parameter. The MGC may perform a country code match, if so the country code is removed from the address signals and the value "000 0011" meaning 'National Number' populated in the nature of address subfield.
- 2) If a TEL URI is present in the P-Asserted-Identity header and contains a local-number (as defined in [28]) (if the first character is NOT a "+"), then the local-number-digits component shall be extracted from the URI and all visual-separator characters removed. Then all the remaining characters from the local-number-digits component shall be used to populate the address signals. Population of the numbering plan indicator and nature of address subfields in this case is done via local rules on the MGC for the handling of non-global numbers.
- 3) If no TEL URI is present in the P-Asserted-Identity header, but there is a SIP or SIPS URI with a user part beginning with "+," the user part is used to determine the number field in accordance with the rules in step 1.

If a display name is available and is not a null string ("") the MGC shall encode a GN parameter in the IAM to convey the presentation subfield information for the calling name. To prevent unnecessary TCAP queries when a display name is unavailable, the MGC should provide the GN only when the presentation status is "anonymous".

If the presentation status as determined according to table 1 is "public" the MGC shall populate the GN parameter as follows:

- "001" is in the "Type of Name" subfield in the GN parameter to indicate "calling name".
- "0" is in the "Availability" subfield in the GN parameter to indicate "name available or name availability unknown".
- "00" in the "Presentation" subfield in the GN parameter to indicate "presentation allowed".
- "Character" subfield are sent in the GN parameter. This is non-conformant to Telcordia [i.10] however provision of the name information in the SS7 messaging will reduce unnecessary TCAP queries.

If the presentation status is "anonymous" the MGC shall populate the GN parameter as follows:

- "001" in the "Type of Name" subfield in the GN parameter to indicate "calling name".
- "0" in the "Availability" subfield in the GN parameter to indicate "name available or name availability unknown".
- "01" in the "Presentation" subfield in the GN parameter to indicate "presentation restricted".
- the "Character" subfields are not sent in the GN parameter.

These requirements are summarized in table 1.

**Table 1: Egress PSTN Gateway Encoding Requirements**

Pre-Conditions		CPN Field Population			GN Field Population	
Presentation Status	Display Name Available	Presentation Indicator	Screening Indicator	Address Signals	Presentation Indicator	IA5 Characters
Public	Yes	00 - Allowed	11 - Network Provided	As per the rules above.	00 - Allowed	Populated
Public	No	00 - Allowed	11 - Network Provided	As per the rules above	No GN Encoded	No GN encoded
Anonymous	Yes	01 - Restricted	11 - Network Provided	As per the rules above	01 - Restricted	No characters encoded
Anonymous	No	01 - Restricted	11 - Network Provided	As per the rules above	01 - Restricted	No characters encoded.

#### 8.4.11.2 MGC Processing - Ingress

When a MGC receives an incoming ISUP IAM, it translates the call from Common Channel Signaling SS7 ISUP to SIP [i.11]. The ISUP call setup messages for circuit switch calls indicate presentation statuses of calling identity items in data fields known as presentation sub fields. A presentation subfield exists for each calling identity item.

Before constructing the SIP INVITE, the MGC first determines the presentation status as follows:

- If either of the CPN or GN parameters indicates that presentation is restricted then the presentation status is "anonymous".
- If the CPN screening indicator is any value other than "01 - User Provided, Screening Passed" or "11 - Network Provided" then the presentation status is "anonymous".
- If both the CPN and GN parameters indicate that presentation is allowed then the presentation state is "public".
- If a CNAM database query is required as determined by the GN population, the presentation status is based upon the results of the query.

A query to a CNAM database should only be launched by the ingress gateway if the presentation subfield is set to a value of '10 - Blocking Toggle'.

The ingress MGC requirements are summarized in table 2.

**Table 2: Ingress PSTN Gateway Encoding Requirements**

CPN Field Population	GN Field Population	MGC Action	Action Result	Determined Presentation Status	P-Asserted-Identity		Privacy
					URI	Display	
Presentation Indicator	Presentation Indicator						
00 - Allowed	00 - Allowed	Build INVITE		Public	From CPN	From GN if present	none
00 - Allowed	10 - Blocking Toggle	TCAP CNAM query	PPS = Anonymous	Public	From CPN	From TCAP CNAM query	none
00 - Allowed	10 - Blocking Toggle	TCAP CNAM query	PPS = Public	Anonymous	From CPN	From TCAP CNAM query	id
00 - Allowed	01 - Restricted	Build INVITE		Anonymous	From CPN	From GN if present	id
10 - Restricted	Any	Build INVITE		Anonymous	From CPN	From GN if present	id
Not Present	Any	Build INVITE		Unavailable	unknown@unknown.invalid	""	none

The MGC determines the population of the P-Asserted-Identity and Privacy headers in the SIP INVITE based upon the presentation status determination.

If the presentation status is "public" then the MGC shall populate the P-Asserted-Identity and Privacy headers as follows:

- A Privacy header with a value of "none".
- A P-Asserted-Identity header with a tel URI, or a SIP(S) URI with a user=phone parameter, constructed from the CPN received. If the nature of address in the received CPN is 'International Number' then the URI will contain a global-number as defined in [28], that is a '+' followed by the address signals from the CPN. For other received values of nature of address the URI is built according to local rules on the MGC that enable the qualification of the number via the use of phone-context or other mechanisms.
- If the presentation status is "public" and if a GN is received containing IA5 characters then a display name is included in the P-Asserted-Identity.
- If the presentation status is "public" and if the CPN is unavailable, the MGC populates the P-Asserted-Identity header with a URI of "sip:unknown@unknown.invalid" and a display name of "".

If the presentation status is "anonymous" then the MGC shall populate the P-Asserted-Identity and Privacy headers as follows:

- A Privacy header with a value of "id".
- A P-Asserted-Identity header with a URI constructed from the CPN received.
- A display name in the P-Asserted-Identity with a value determined as specified in table 2 above.

## 8.4.12 Procedures for Request History Information

RFC 4244 [41] defines a standard mechanism for capturing the history information associated with a Session Initiation Protocol (SIP) request. This capability enables many enhanced services by providing the information as to how and why a call arrives at a specific application or user. RFC 4244 [41] also defines a new SIP header, History-Info, for capturing the history information in requests. CMSS compliant implementations shall support the History-Info header as described in [41].

### 8.4.12.1 Preventing Forwarding Loops and Limiting the Number of Forwarding Attempts

For each of the Call Forwarding features, the IP-Cablecom network provides a mechanism to prevent forwarding loops. A call forwarding loop is defined to be the scenario that occurs when a targeted subscriber for a call forwards the call to another destination; if the forwarded-to destination also has call forwarding configured, the call can forward back (directly or indirectly) to the original targeted subscriber. When a loop is detected, the network node that performs the detection performs a configurable action, the default being call rejection. A CMSS compliant implementation shall detect call forwarding loops.

The CMSS compliant implementation shall support a configurable limit on the number of times an individual call may be subject to forwarding. If the number of forwarding attempts for a single call exceeds this limit, the CMSS compliant implementation shall perform a configurable action, the default being call rejection.

The CMSS compliant implementation should support loop prevention and forwarding limit detection via the mechanisms described in this clause. However, this mechanism alone may not be sufficient to detect loops when calls are forwarded to networks not supporting these mechanisms (for example, the PSTN or a network not supporting the required SIP headers). Therefore a CMSS compliant implementation may support additional loop prevention and forwarding limit detection methods as long as the requirements of forwarding limit restriction and loop detection are met.

If the CMSS compliant implementation supports the prevention of forwarding loops via analysis of the History-Info header present in the INVITE then it shall compare the forward-to address with the set of targeted-to URI (hi-targeted-to-uri) entries from the History-Info header. If there is a match then a loop has occurred. If no History-Info header is present then it is not possible to perform loop detection via this mechanism.

If the CMSS compliant implementation determines that a loop has occurred (regardless of the loop detection method used), the CMSS compliant implementation shall handle the call based upon a configurable action. The CMSS compliant implementation shall support the default loop detection action of call rejection. The CMSS compliant implementation shall send a final response appropriate to the type of call forwarding being performed if the call is to be rejected. If the forwarding action is CFBL and the call is to be rejected, the CMSS compliant implementation shall respond with a 486-User-Busy message. If the forwarding action is CFDA and the call is to be rejected, the CMSS compliant implementation shall respond with a 408-Request-Timeout message. If the forwarding action is CFV or SCF and the call is to be rejected, the CMSS compliant implementation shall respond with a 480-Temporarily-Unavailable message.

If the CMSS compliant implementation supports the prevention of forwarding loops by enforcing a maximum number of forwarding attempts, then it shall calculate the number of forwarding attempts by counting the number of entries in the History-Info header that have a nested Reason header which include a protocol-cause parameter and a reason-text parameter populated as defined in clause 8.4.12.2. If no History-Info header is present then it is not possible to determine the number of forwarding attempts via this mechanism.

If the number of forwarding attempts exceeds the configured limit then the CMSS compliant implementation shall handle the call based on a configurable action. The CMSS compliant implementation shall support the default action of call rejection. The CMSS compliant implementation shall send a final response appropriate to the type of call forwarding performed if the call is to be rejected. If the forwarding action is Call Forward Busy Line and the call is to be rejected, the CMSS compliant implementation shall respond with a 486-User-Busy message. If the forwarding action is Call Forward Don't Answer and the call is to be rejected, the CMSS compliant implementation shall respond with a 408-Request-Timeout message. If the forwarding action is Call Forward Variable or Selective Call Forward and the call is to be rejected, the CMSS compliant implementation shall respond with a 480-Temporarily-Unavailable message.

### 8.4.12.2 Setting of the Call Forwarding parameters

After checking the number of forwards, a number of fields of the INVITE request are set by the CMSS compliant implementation as defined in the following subclauses.

#### 8.4.12.2.1 First Forwarded INVITE

The absence of a History-Info header in the INVITE or the presence of a History-Info with no entries containing a nested Reason header with a protocol-cause parameter means that this is the first instance of a forwarding action.

When this is the first forward the INVITE has undergone, the following requirements apply. The CMSS compliant implementation shall set the Request URI to the public user identity where the INVITE is to be forwarded. The CMSS compliant implementation shall not change the contents of the P-Asserted-Identity header in the INVITE.

The CMSS compliant implementation shall set the History-Info header (redirection information, redirecting number, original called number). Two History-Info entries shall be generated as described below.

The first added entry in the History-Info header by the CMSS compliant implementation shall include as the hi-targeted-to-uri the URI of the called party that was addressed with this INVITE. If the called party's presentation status is set to anonymous, the CMSS compliant implementation shall escape the privacy header "history" within the hi-targeted-to-uri; a Reason is not added. If no History-Info header was previously present in the INVITE then the CMSS compliant implementation shall set the Index to index=1. If this is an additional entry to an already present History-Info header then the CMSS compliant implementation shall set the index according to the rules in [41].

The second added entry in the History-Info header by the CMSS compliant implementation shall include as the hi-targeted-to-uri the address to where the INVITE is forwarded. If no History-Info header was present prior to this procedure then the CMSS compliant implementation shall set the index to index=1.1. If this is an additional entry to an already present History-Info header then the CMSS compliant implementation shall set the index according to the rules in [41].

When adding a second entry, the CMSS compliant implementation shall also include a nested Reason header (redirecting reason and redirecting indicator) escaped in the History-Info header, this is populated according to the forwarding conditions.

[42] defines the mapping between the forwarding conditions and the coding of the protocol-cause parameter in the Reason header. The CMSS compliant implementation shall populate the Reason header with a protocol-cause value of "486" and a reason-text value of "CFBL" when the forwarding condition is CFBL. The CMSS compliant implementation shall populate the Reason header with a protocol-cause value of "408" and a reason-text value of "CFDA" when the forwarding condition is CFDA. The CMSS compliant implementation shall populate the Reason header with a protocol-cause value of "302" and a reason-text value of "CFV/SCF" when the forwarding condition is CFV or SCF.

Finally, the CMSS compliant implementation shall set the To header as per the following rules. If the forwarding party does not request privacy to be applied (that is, their presentation status is set to public) then the CMSS compliant implementation shall not change the To header. In the case where the forwarding party requests privacy (that is, their presentation status is set to anonymous) the CMSS compliant implementation shall change the To header to be the URI to where the INVITE is forwarded.

#### 8.4.12.2.2 Second or Subsequent Forwarded INVITE

When this is the second or subsequent forwarding of the INVITE, the CMSS compliant implementation shall add a new entry to the History-Info header according to the rules defined in [41]. If the history entry representing the forwarding party already contains the correct privacy value for the forwarding party (in an escaped privacy header) then the CMSS compliant implementation shall not modify the History-Info header. Otherwise if the forwarding party requests privacy (that is, their presentation status is set to anonymous) the CMSS compliant implementation shall ensure the privacy header "history" is escaped within the hi-targeted-to-uri.

The entry shall contain as the hi-targeted-to-uri the address to where the INVITE is forwarded. The CMSS compliant implementation shall populate the Reason header (redirecting reason and redirecting indicator) escaped in this history-info header according to the forwarding conditions and notification subscription option.

The CMSS compliant implementation shall code the protocol-cause parameter in the Reason header based on forwarding conditions as defined in [42]. The CMSS compliant implementation shall populate the Reason header with a protocol-cause value of "486" and a reason-text value of "CFBL" if the forwarding condition is CFBL. The CMSS compliant implementation shall populate the Reason header with a protocol-cause value of "408" and a reason-text value of "CFDA" if the forwarding condition is CFDA. The CMSS compliant implementation shall populate the Reason header with a protocol-cause value of "302" and a reason-text value of "CFV/SCF" if the forwarding condition is CFV or SCF. The CMSS compliant implementation shall set the Request URI to the public user identity where the INVITE is to be forwarded.

The CMSS compliant implementation shall not change the contents of the P-Asserted-Identity header in the INVITE.

The CMSS compliant implementation shall not change the To header field (original destination number) if the forwarding party does not request privacy (that is, their presentation status is set to public). The CMSS compliant implementation shall change the To header field to be the URI where the INVITE is forwarded if the forwarding party requests privacy (that is, their presentation status is set to anonymous).

Figure 23 illustrates a multiple forwarding scenario and table 3 describes how the headers are populated. In this scenario, Alice calls Bob and is forwarded to Charlie and is then forwarded to Ed and is in turn forwarded to Bob.



**Figure 23: Multiple forwarding scenario**

**Table 3: Parameters and Header Fields that are Modified In a CMSS Compliant Implementation**

Element	MGC (Alice)	CMS (Bob)
H-I Index Added	1	1.1,1.1.1
Entry Added	Bob@domain	Bob@domain, Charlie@domain?Reason=SIP;protocol-cause=302;reason-text="CFV/SCF"
H-I Header	Bob@domain; index=1	Bob@domain; index=1, Bob@domain; index=1.1, <Charlie@domain?Reason=SIP;protocol-cause=302;reason-text="CFV/SCF">; index=1.1.1
Element	CMS (Charlie)	CMS (Ed)
H-I Index Added	1.1.1.1	No entry is added since loop detection at Ed's CMS detects a Call Forwarding loop. The forwarding target Bob@domain is already present in the set of URIs contained in the received H-I header.
Entry Added	Ed@domain?Reason=SIP;protocol-cause=302;reason-text="CFV/SCF"	None as loop detection detects CF loop
H-I Header	Bob@domain; index=1, Bob@domain; index=1.1, <Charlie@domain?Reason=SIP;protocol-cause=302;reason-text="CFV/SCF">; index=1.1.1, <Ed@domain?Reason=SIP;protocol-cause=302;reason-text="CFV/SCF">; index=1.1.1.1	None as loop detection detects CF loop

### 8.4.12.3 MGC Inter-working

To prevent forwarding loops occurring between the IPcablecom network and the PSTN, forwarding information needs to be maintained by the MGC when mapping from SIP to ISUP and vice versa. Given that all of the applicable ISUP parameters required are optional rather than mandatory in an ISUP IAM or ACM message, the procedures detailed here are only effective if support for the necessary parameters is enabled on the ISUP facility selected by the MGC.

#### 8.4.12.3.1 MGC Processing - Egress

When a MGC receives a SIP request destined for the PSTN, it translates the call from SIP to Common Channel Signaling SS7 ISUP, as specified in [i.11]. The ISUP IAM that is mapped from a received SIP INVITE can optionally carry call redirection information.

If the received SIP INVITE contains a History-Info header indicating that the call has been forwarded (header entries populated following the rules defined in clause 8.4.12.2), then the MGC shall populate the Original Called Number, Redirecting Number and Redirection Information parameters of the ISUP IAM based on information determined from the History-Info header.

If the selected ISUP facility supports the Original Called Number (OCN) parameter then the Original Called Number (OCN) field shall be populated according to the following rules:

- Upon detection of the first entry in the History-Info header which has a nested Reason header containing both a protocol-cause parameter and a reason-text parameter populated as defined in clause 8.4.12.2, the entry at the index value immediately prior to that is the candidate entry for population of the OCN parameter. If this entry contains a TEL URI then the MGC determines whether this is a global-number or local-number as defined by [28]. If the first character is a "+" then it is a global-number, otherwise it is a local-number. If the MGC determines that it is a global-number, then it shall extract the global-number-digits component and remove all visual-separator characters as well as the leading "+" character. Then the MGC shall use all the remaining characters from the global-number-digits component to populate the address signals. The MGC shall populate the value "001" meaning 'ISDN Telephony Numbering Plan (E.164)' in the numbering plan indicator subfield of the OCN parameter. If the MGC has the digit analysis capabilities to recognize and then format the number as a nationally significant number then it may remove any identified country code from the characters used to populate the address signals and populate the value "000 0011" meaning 'National Number' in the nature of address subfield of the OCN parameter. If no such digit analysis capabilities exist or are not applied then the MGC shall populate the value "000 0100" meaning 'International Number' in the nature of address subfield of the OCN parameter.
- The History-Info header entry found at the index value immediately prior to the first entry which has a nested Reason header containing both a protocol-cause parameter and a reason-text parameter populated as defined in clause 8.4.12.2 is the candidate entry for population of the OCN parameter. If this entry contains a TEL URI then the MGC determines whether this is a global-number or local-number as defined in [28]. If the first character is NOT a "+", then the number is determined to be a local-number. If the MGC determined that this is a local number, then it shall extract the local-number-digits component from the URI and remove all visual-separator characters. Then the MGC shall use all the remaining characters from the local-number-digits component to populate the address signals. The MGC shall populate the numbering plan indicator and nature of address subfields according to local rules on the MGC for the handling of non-global numbers.
- The History-Info header entry found at the index value immediately prior to the first entry which has a nested Reason header containing both a protocol-cause parameter and a reason-text parameter populated as defined in clause 8.4.12.2 is the candidate entry for the population of the OCN parameter. If this entry does not contain a TEL URI, but there is a SIP URI with a user part beginning with "+," the MGC shall use the user part to determine the number field in accordance with the rules defined for case when a TEL URI with a global-number is present.

The Original Called Number Screening Indicator field shall be set to "11" meaning 'network provided'.

The Original Called Number Presentation Indicator is set based on whether a nested Privacy header is present. If a nested Privacy header is present then the MGC shall set the Presentation Indicator to "01" meaning that the presentation is restricted. If a nested Privacy header is not present then the MGC shall set the Presentation Indicator to "00" meaning that presentation is allowed.

If the selected ISUP facility supports the Redirection Information parameter then the fields within this parameter are populated as follows:

The MGC shall set the Redirection Counter to the number of entries in the History-Info header which contain a nested Reason header that has a Protocol-cause parameter.

- The Original Redirecting Reason is mapped from the Protocol-cause and Reason-text parameters found in the nested Reason header at the first index entry where such an encoding exists (typically index value index=1.1). If the Protocol-cause is "486" and Reason-text is "CFBL" then the MGC shall use a value of "0001" meaning 'user busy'. If the Protocol-cause is "408" and Reason-text is "CFDA" then the MGC shall use a value of "0010" meaning 'no reply'. If the Protocol-cause is "302" and Reason-text is "CFV/SCF" then the MGC shall use a value of "0011" meaning 'unconditional'. Other combinations are not indicative of call forwarding and so the MGC shall not populate the ISUP parameters.

- The Redirecting Reason is mapped from the Protocol-cause and Reason-text parameters found in the nested Reason header at the final indexed entry in the History-Info header where such an encoding exists. If the Protocol-cause is "486" and Reason-text is "CFBL" then the MGC shall use a value of "0001" meaning 'user busy'. If the Protocol-cause is "408" and Reason-text is "CFDA" then the MGC shall use a value of "0010" meaning 'no reply'. If the Protocol-cause is "302" and Reason-text is "CFV/SCF" then the MGC shall use a value of "0011" meaning 'unconditional'. Other combinations are not indicative of call forwarding and so the MGC shall not populate the ISUP parameters.
- Of the set of entries in the History-Info header that contain both Protocol-cause and Reason-text parameters populated as defined in clause 8.4.12.2 in a nested Reason header entry, the MGC shall populate the Redirecting Number parameter from the penultimate History-Info header entry in this set. The penultimate entry is used since the final entry that contains both Protocol-cause and Reason-text parameters is the target of the forwarding attempt (the called party for this leg); the entry preceding that is the previous target that itself forwarded and is therefore the Redirecting Number.

If the set of entries in the History-Info header that contains both Protocol-cause and Reason-text parameters populated as defined in clause 8.4.12.2 in a nested Reason header entry has only one item, a single forwarding has occurred. In this case the Redirecting Number parameter shall be populated with the same information as the Original Called Number parameter; that is the information from index value index=1.

If the selected ISUP facility supports the Redirecting Number parameter then the fields within this parameter are populated as follows:

- The Redirecting Number parameter is populated using the penultimate entry in the History-Info header which contains a Protocol-cause parameter in a nested Reason header, unless only a single forwarding has taken place then the History-Info entry used is that with an index value of index=1. The MGC shall populate the Address Information parameter of the Redirecting Number parameter using this History-Info entry according to the rules defined for the Address Information portion of the Original Called Number.
- The MGC shall set the Screening Indicator to "11" meaning 'network provided'.
- The Presentation Indicator is set based on the presence or absence of a nested Privacy header. If a nested Privacy header is present then the MGC shall set the Presentation Indicator to "01" meaning that the presentation is restricted. If the Privacy header is not present then the MGC shall set the Presentation Indicator to "00", meaning that presentation is allowed.

#### 8.4.12.3.2 MGC Processing - Ingress

When a MGC receives an ISUP IAM, it translates the call from Common Channel Signaling SS7 ISUP to SIP, as specified in [i.11]. The IAM can optionally carry call redirection information.

If the received ISUP IAM contains the Original Called Number, Redirection Information and Redirecting Number parameters then the MGC shall populate a History-Info header within the SIP INVITE. The History-Info needs to reflect as accurately as possible the call forwarding information associated with this call so that accurate determinations of loops which go between IP-Cablecom and PSTN subscribers can be determined as well as the ability to accurately limit the number of forwarding attempts that take place.

The MGC shall construct the History-Info header with at least two history entries according to the following rules:

- The first entry shall include a hi-targeted-to-uri built from the contents of the Original Called Number parameter. This is a tel URI or a SIP URI with a user=phone parameter. If the nature of address in the received OCN is 'International Number' then the URI will contain a global-number as defined in [28], that is a '+' followed by the address information from the OCN. For other received values of nature of address the URI is built according to local rules on the MGC that enable the qualification of the number via the use of phone-context or other mechanisms. If the user wishes privacy (for example, the Presentation Indicator in the OCN is set to the value "01") the MGC shall escape the privacy header "history" within the hi-targeted-to-uri. The MGC shall not add a Reason. The MGC shall set the Index of this first entry to index=1.

- A second entry shall be added with the hi-targeted-to-uri built from the contents of the Redirecting Number parameter. This is a tel URI, or a SIP URI with a user=phone parameter. If the nature of address in the received Redirecting Number is 'International Number' then the URI will contain a global-number as defined in [28], that is a '+' followed by the address information from the Redirecting Number. For other received values of nature of address the URI is built according to local rules on the MGC that enable the qualification of the number via the use of phone-context or other mechanisms. If the user wishes privacy (for example, the Presentation Indicator in the Redirecting Number is set to the value "01") the MGC shall escape the privacy header "history" within the hi-targeted-to-uri. The MGC shall set the Index of this second entry to index=1.1.
- A nested Reason header is added to the second History-Info header with both Protocol-cause and Reason-text parameters populated based on mapping contents of the Redirection Information parameter's Redirecting Reason field. If Redirecting reason has a value of "0001" meaning 'user busy', the MGC shall use a Protocol-cause of "486" and Reason-text of "CFBL". If Redirecting reason has a value of "0010" meaning 'no reply', the MGC shall use a Protocol-cause of "408" and Reason-text of "CFDA". If Redirecting reason has a value of "0011" meaning 'unconditional', the MGC shall use a Protocol-cause of "302" and Reason-text of "CFV/SCF". Otherwise the MGC shall use a Protocol-cause of "302" and Reason-text of "CFV/SCF".
- If the Redirection Counter within the Redirection Information has a value of '1' then population of the History-Info is complete. If the Redirection Counter within the Redirection Information has a value greater than '1' then the MGC shall add duplicate versions of the second History-Info entry (as defined in the bullets above); and shall be added to the History-Info header until the number of entries is equal to the Redirection Counter. That is for a Redirection Counter of 'n' the final entry in the History-Info header has an index value of index=1.n.

### 8.4.13 Operator Services

Operator Services (Busy Line verification and Emergency Interrupt) are initiated from the MGC on behalf of a PSTN gateway connecting to special MF trunks groups from the OSPS system. The SIP messages SUBSCRIBE(Dialog Event) and INVITE(BLV) are initiated by the MGC after performing a basic call to the line being verified. The SUBSCRIBE is for the Dialog Event package described in 7.16. The subsequent INVITE results from the NOTIFY sent by the CMS. The INVITE includes a Join header for the first dialog reported in the NOTIFY.

CMS shall be prepared to receive a SUBSCRIBE for the Dialog Event package at any time and INVITE(BLV) following that. If not received from another CMS by security procedures specified in [26], the messages should be rejected.

The MGC sends a SUBSCRIBE for the dialog event package with an expires value of zero to the CMS with a URI of the targeted public ID to verify. The P-Asserted Identity in the SUBSCRIBE message shall be the reserved operator ID as defined below.

<b>SUBSCRIBE(Dialog Event) Headers:</b>	<b>Requirements On CMS for Message Checking</b>
SUBSCRIBE URI SIP/2.0	Shall be present. Shall contain the URI of the target busy line.
P-Asserted-Identity	Shall be present. Shall be set to BLV Operator Identity.
Expires	Shall be present. Shall be set to 0.
--all other headers, including SDP---	Shall be as specified for SUBSCRIBE.

The CMS shall respond to a SUBSCRIBE to the dialog event package from the MGC with a 200-OK followed by a NOTIFY message with a list of established dialogs for the line being verified. The CMS should list the active dialog first. The headers required for this NOTIFY are defined below.

<b>NOTIFY(Dialog Event) Headers:</b>	<b>Requirements On MGC for Message Checking</b>
NOTIFY URI SIP/2.0	Shall be present. Shall contain the contact address received in the SUBSCRIBE.
Via:	As described in clause 6.20.42.
Max-Forwards:	As defined in clause 6.20.22.
From:	As defined in clause 6.12.
To:	
Call-ID:	
Cseq:	
Contact:	As described in clauses 6.20.10 and 7.5.
Event:	Shall contain "dialog" as defined in clause 7.16.
Subscription-State:	As described in clause 7.5.
Content-Type:	Shall contain "application/dialog-info+xml" as defined in clauses 7.5 and 7.16.
Content-Length:	As defined in clause 6.20.14.
	An empty line (CRLF) shall be present between the headers and the message body.
<Message body>	Message body shall be present. At a minimum, shall contain the information specified in clause 7.16.

Upon receiving the NOTIFY identifying the active dialogs, the MGC shall send an INVITE to the CMS with a Join header containing the first dialog ID in the NOTIFY. The MGC shall encode the INVITE as follows.

<b>INVITE(BLV) (MGC-&gt;CMS) Header:</b>	<b>Requirements On CMS for Message Checking</b>
INVITE URI SIP/2.0	Shall be present.
	Shall contain the URI of the target busy line. Shall be present, if a dialog was returned in the NOTIFY from CMS.
Join	
P-Asserted-Identity	Shall be present. Shall be set to BLV Operator Identity.
--all other headers, including SDP---	Shall be as specified for INVITE.

On receiving the INVITE(BLV) with Join header, the CMS shall not alert the user. Instead, the CMS shall respond with a 183-Session-Progress to the INVITE(BLV) with Join header and complete the call as described in clauses 8.4.1.2.1, 8.4.1.4 and 8.4.1.7.

In order to emulate the PSTN busy-line-verify procedures, the MGC can include a mode attribute of "a=sendrecv" in the SDP offer of the INVITE(BLV). On receiving an INVITE(BLV) containing an SDP offer with "mode=sendrecv", the CMS should configure the OSPS connection and the active call connection into a conference mode, so that the OSPS operator can hear a mix of the send and receive audio on the active connection and the target user can hear the operator (if the operator decides to barge-in).

The CMS may reject an INVITE with Join header if there are insufficient resources to perform audio mixing. The answer SDP sent by the CMS may contain "a=sendonly" to preserve existing behaviour when the line being verified is known to have an active TDD, FAX or Modem call.

If the telephone line is in a state inconsistent with the contents of the Join header in the INVITE, the CMS shall reject the INVITE with 481-Call-Transaction-Does-Not-Exist. The CMS should reject the INVITE with 488-Not-Acceptable for all other failures. When the MGC receives a 481-Call-Transaction-Does-Not-Exist or 488-Not-Acceptable response to the INVITE with Join header it shall play reorder tone to the OSPS.

## 8.4.14 Signaling Dialed Non-Geographic Numbers


This clause describes the procedures for conveying a non-geographic dialled number (e.g. a dialled 800 number) to the terminating IPCablecom network for calls originating in the PSTN.

When the MGC receives an incoming call from the PSTN on an SS7 trunk, it performs the mapping between ISUP and SIP based on the procedures defined in [53] and as described elsewhere in the present document. In addition, on receiving an IAM containing a Generic Address Parameter (GAP) with a Type of Address field set to "dialled number", the MGC shall populate the To header in the INVITE request with a SIP URI with a user=phone parameter or a tel URI containing the dialled address digits identified in the GAP (please refer to [53] for a definition of the GAP). The decision to populate the To header with a SIP or tel URI is based on local policy configured on the MGC. The procedure for mapping the GAP address digits to a SIP or tel URI is outside the scope of the present document.

## 9 Application Layer Anonymizer

In this clause, additional detail about an application-level anonymizer that is used to support Privacy is provided.

As described earlier, a user may request three different forms of Privacy: user, name and IP-address Privacy. In order to provide these three different types of Privacy, an application-layer anonymizer is defined, which serves the role of a trusted intermediary, as illustrated below.

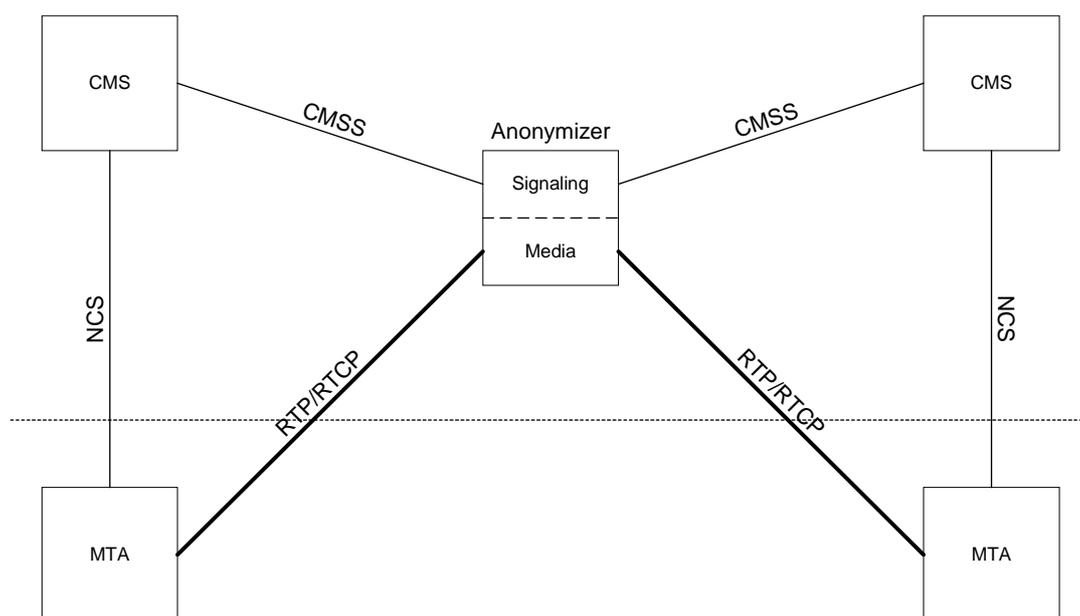


**Figure 24: Application Layer Anonymizer**

The anonymizer provides three Privacy functions:

- Signaling content Privacy
- Signaling IP address Privacy
- Media IP address Privacy

all of which are illustrated in figure 25.

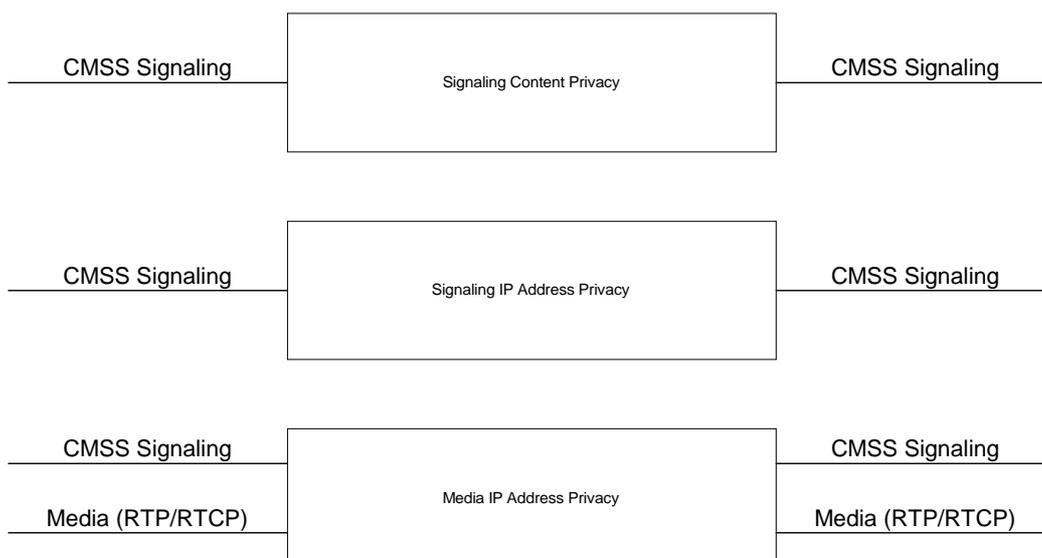

**Figure 25: Anonymizer Functions.**

## 9.1 Signaling Content Privacy

The Signaling Content Privacy function serves the role of modifying the SIP signalling messages to handle calling name and calling number Privacy as specified in clause 8.4. More specifically, the Signaling Content Privacy function shall ensure that the Privacy requirements pertaining to the headers below are met:

Header:	Requirements for CMS <sub>o</sub>
From	See clause 6.20.20
To	See clause 6.20.39
Call-ID	See clause 6.20.8
Contact	See clause 6.20.10
P-Asserted-Identity	See clause 7.9

The Signaling Content function should be implemented as part of the CMS, thereby avoiding an extra hop as well as the need for a back-to-back UA in order to modify some of the above headers in accordance with the Privacy requirements.

NOTE: Headers other than those required by CMSS, e.g. Call-Info, can have Privacy implications as well. Consequently, such headers should not be used when Privacy is requested.

## 9.2 IP Address Privacy

The IP address Privacy function serves the role of modifying the SIP signalling messages to honour IP-address Privacy requests in CMSS as specified in clause 8.4. The IP address Privacy function considers IP address Privacy for both media and signalling. This allows the IP address Privacy function to be used in a variety of environments, including ones where the SIP signalling endpoints do not trust each other.

The Signaling IP address Privacy function provides IP address Privacy for the SIP signalling messages themselves. This can be achieved in a number of different ways and the solution considered here is one where the Signaling IP address Privacy function acts as a back-to-back SIP User Agent.

All signalling IP address information will thus point to, or be based on, the Signaling IP address Privacy function rather than the requesting User Agent (CMS) itself. Calling party IP address Privacy can thus be achieved trivially by routing the session setup through the anonymizer. Called party IP address Privacy, however, is more complicated, since the calling party needs to be referred to the anonymizer and the anonymizer needs to know to forward the messages to the called party. This can be solved in a variety of ways:

- In an NCS architecture, the signalling IP address Privacy is obtained by exchanging signalling with the CMS rather than the MTA. Depending on locality of CMSs, this may or may not provide adequate Privacy. The media IP address Privacy function is then provided by a separate entity controlled by the IP signalling Privacy function (see below).
- The called party can refer subsequent transactions to the anonymizer. The anonymizer needs to be informed of the actual destination and call information for the call. The anonymizer may be informed of this through some unspecified protocol between the anonymizer and CMS.
- The called party can redirect the call to the anonymizer and provide an encrypted blob with the actual destination and call information. The encryption key used must be known to both the anonymizer and the called party unless public key cryptography is used.

Finally, the Media IP address Privacy function provides IP address Privacy for the media stream(s). This involves having the media streams going through the media IP address Privacy function, as well as modifying the SDP provided in signalling to ensure that media is actually routed through the media IP address Privacy function. As before, considered here is a solution where the media IP address Privacy function acts as a back-to-back SIP User Agent.

It should be noted that there is a tight relationship between Signaling and Media IP address Privacy. In particular, there is little reason to provide Signaling IP address Privacy without also providing Media IP address Privacy. However, in a decomposed gateway architecture (such as NCS), it is possible to provide Media IP address Privacy without Signaling IP address Privacy when the SIP signalling endpoints trust each other; this is currently the case in CMSS. In this case, the media IP address Privacy function can be further decomposed, thereby enabling it to stay out of the signalling path. This is illustrated in figure 26 below, where it is assumed the existence of some unspecified control protocol "anon" between the control function provided in the CMS and the media anonymizer part.

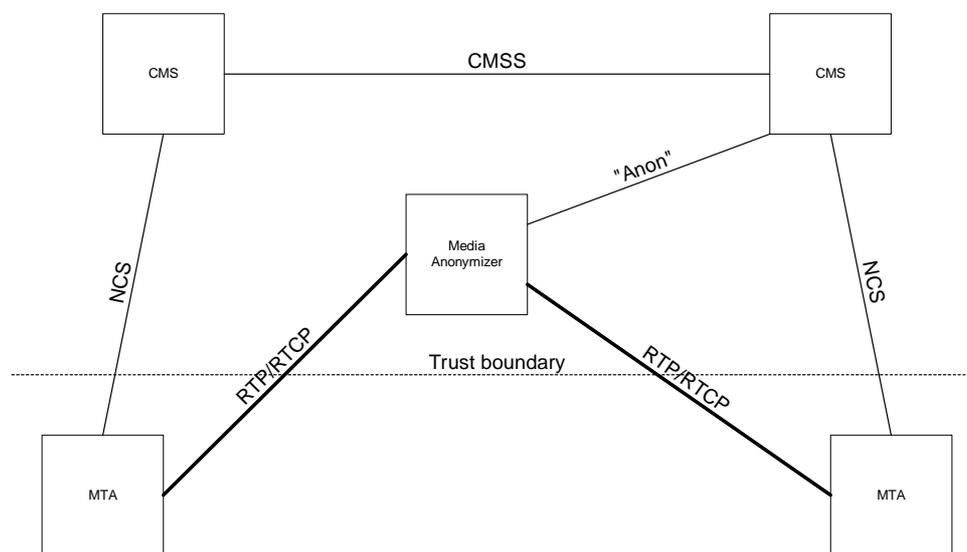


Figure 26: Privacy Issues

The following table lists the CMSS headers and message bodies that have IP address Privacy implications and describes the IP Privacy function provided, assuming that service providers trust each other:

Header/Body Name	Requirements, Comments
From	The hostname shall either follow the requirements in clause 6.20.20 or contain the hostname of the anonymizer. If it does not, a new conforming From header shall be generated as described in clause 6.20.20.
Call-ID	The Call-ID shall follow the requirements in clause 6.20.8. If it does not, a new non-revealing Call-ID shall be generated as specified in clause 6.20.8.
Contact	The contact header shall contain a SIP(s) URI of the Signaling IP Address Privacy function.
Via	The Via header shall not reveal the IP-address or FQDN of any previous hop. The Via shall contain the IP address or FQDN of the Signaling IP Address Privacy function.
Record-Route	The Record-Route header shall not reveal the IP-address or FQDN of any previous hop. The Record-Route header shall contain the IP address or FQDN of the Signaling IP Address Privacy function.
P-DCS-Billing-Info	Because of trust relation between providers, this header is not changed. An untrusted entity shall not see this information.
SDP	The "c=" line shall contain the IP address or FQDN of the Media IP Address Privacy function.

Since the SDP "c=" line is set to point to the "MEDIA anonymizer", RTP and RTCP messages will be directed to the anonymizer where they will be forwarded towards their destination with a source IP address of the anonymizer. Neither the RTP nor the RTCP messages will be examined for content. It is assumed that an entity seeking Privacy will not reveal any Privacy information in these messages. This implies that entities for example do not supply their name, e-mail address, etc. in RTCP.

**NOTE:** Headers other than those required to be used by CMSS can have Privacy implications as well. Consequently, such headers should not be used when Privacy is requested and, if they are, Privacy concerns must be addressed.

---

## Annex A (normative): TIMER SUMMARY

CMS-CMS signalling uses a timer to provide for cleanup of call state in the event of application-level failure.

The application-level timer is used at the originating and terminating CMS during call setup to ensure that call state advances even if the other party suffers application-level failure. Action to be taken if the application-level timer expires is indicated in the table below.

Timer Label	Approximate Duration	Timer Description
Session timers (T3) at originating CMSs and CMSs		
T-setup	5 to 6 minutes	Timer between receiving a provisional response to an INVITE and receiving a 200-OK final response. If T-setup expires before receiving the ring or final response, the CMS sends a CANCEL and aborts the call attempt.
Session timers (T3) at terminating CMSs and CMSs		
T-ringing	3 to 4 minutes	Timer between receiving an INVITE request and connect. If T-ringing expires before connect, the CMS sends a 480-Temporarily-Unavailable response and releases the reserved resources, or invokes features such as call forwarding no-answer.

## Annex B (normative): CMSS Message and Header Overview

This clause provides an informative overview of all the SIP messages and headers that CMSS compliant implementations must support.

The first column lists the message or header in question.

The second column indicates the level of support required in terms of sending the message or including the header in a message (request or response), using the following:

- **Mandatory (M):** There is at least one instance where the message or header must be sent by a CMSS compliant implementation.
- **Recommended (R):** There is no absolute requirement to send this message or header, but there is at least one instance where it is recommended to send this message or header.

NOTE 1: This does not mean that support for the header is optional.

- **Optional (O):** A CMSS compliant implementation may send this header or message if it wants to.
- **Forbidden (F):** A CMSS compliant implementation must not send this message or header.

The third column indicates the level of support required in terms of receiving the message or header. The following codes are used:

- **Mandatory (M):** The message or header must be supported if received.
- **Recommended (R):** It is not absolutely required, that the message or header is supported if received, but there is at least one instance where it is recommended to support it if received.

NOTE 2: This does not mean that support for the header is optional.

- **Optional (O):** A CMSS compliant implementation may support receiving this message or header if it wants to. In the case of an unsupported method, a 501 must be returned as specified in [6]. In the case of an unsupported header, the header is simply ignored (as specified in [6], clause 8.2.2), assuming that there were no indications to the contrary, e.g. a Require or Proxy-Require field implying support was needed. In the case of an unsupported response, the response is treated as an unrecognized response as defined in [6], clause 8.1.3.2.
- **Forbidden (F):** If a CMSS compliant implementation receives this message or header, it must not support it. The handling is similar to unsupported optional messages and headers.

The fourth column provides a reference to the clause providing the message or header definition in CMSS. For some entries, additional comments are provided as well.

NOTE 3: The tables below provide only an informative overview intended as a convenient reference for the reader. The tables do not define any formal requirements for CMSS compliant implementations.

### RFC 3261 Requests

Request	Send	Recv	Reference and Comments
INVITE	M	M	See clause 6
ACK	M	M	See clause 6
CANCEL	M	M	See clause 6
BYE	M	M	See clause 6
OPTIONS	M	M	See clause 6
REGISTER	O	O	See clause 6

**Extension Requests**

Request	Send	Recv	Reference and Comments
PRACK	M	M	See clause 7.2
UPDATE	M	M	See clause 7.3
SUBSCRIBE	M	M	See clause 7.5
NOTIFY	M	M	See clause 7.5
REFER	M	M	See clause 7.6

**RFC 3261 Responses**

CMSS compliant implementations must support all the response codes defined in RFC 3261 [6], except as shown below.

Response	Send	Recv	Reference and Comments
401	F	O	See clause 6.21
407	F	O	See clause 6.21

**Extension Responses**

Response	Send	Recv	Reference and Comments
580	M	M	See clause 7.4
687	M	M	See clause 7.8

## RFC 3261 Header Fields

Header	Send	Recv	Reference and Notes
Accept	M	M	See clause 6.20.1
Accept-Encoding	O	M	See clause 6.20.2
Accept-Language	S	M	See clause 6.20.3
Alert-Info	O	O	See clause 6.20.4
Allow	M	M	See clause 6.20.5 The header value must list all supported methods, i.e. at a minimum, "INVITE", "ACK", "CANCEL", "BYE", "OPTIONS", "PRACK", "UPDATE", "REFER" and "NOTIFY"
Authentication-Info	O	O	See clause 6.20.6
Authorization	O	O	See clause 6.20.7
Call-ID	M	M	See clause 6.20.8
Call-Info	O	O	See clause 6.20.9
Contact	M	M	See clause 6.20.10
Content-Disposition	O	M	See clause 6.20.11
Content-Encoding	O	M	See clause 6.20.12
Content-Language	O	M	See clause 6.20.13
Content-Length	M	M	See clause 6.20.14
Content-Type	M	M	See clause 6.20.15 The values "application/sdp", "message/sipfrag" and "application/simple-message-summary" Shall be supported
CSeq	M	M	See clause 6.20.16
Date	O	O	See clause 6.20.17
Error-Info	O	O	See clause 6.20.18
Expires	M	M	See clauses 6.20.19 and 7.5
From	M	M	See clause 6.20.20
In-Reply-To	O	O	See clause 6.20.21
Max-Forwards	S	M	See clause 6.20.22
Min-Expires	O	O	See clause 6.20.23
MIME-Version	O	M	See clause 6.20.24
Organization	O	O	See clause 6.20.25
Priority	O	O	See clause 6.20.26
Proxy-Authenticate	O	O	See clause 6.20.27
Proxy-Authorization	O	O	See clause 6.20.28
Proxy-Require	M	M	See clause 6.20.29 The option tag "Privacy" shall be supported in accordance with clause 7.9
Record-Route	M	M	See clause 6.20.30
Reply-To	O	O	See clause 6.20.31
Require	M	M	See clause 6.20.32 The option tags "precondition", "replaces" and "100rel" shall be supported. Furthermore, the option tag "P-DCS" may be sent and shall be supported if received as described in clause 7.7.4
Retry-After	O	O	See clause 6.20.33
Route	M	M	See clause 6.20.34
Server	O	O	See clause 6.20.35
Subject	O	O	See clause 6.20.36
Supported	M	M	See clause 6.20.37 The values "precondition", "replaces", "100rel" and "P-DCS" shall be supported. However, a value present in the "Require" header should not also be present in the Supported header
Timestamp	O	M	See clause 6.20.38
To	M	M	See clause 6.20.39
Unsupported	M	M	See clause 6.20.40
User-Agent	O	O	See clause 6.20.41
Via	M	M	See clause 6.20.42
Warning	O	O	See clause 6.20.43
WWW-Authenticate	O	O	See clause 6.20.44

**Extension Header Fields**

<b>Header</b>	<b>Send</b>	<b>Recv</b>	<b>Reference and Notes</b>
Rack	M	M	See clause 7.2
Rseq	M	M	See clause 7.2
Refer-To	M	M	See clause 7.5
P-DCS-OSPS	M	M	See clause 7.7
P-DCS-Billing-Info	M	M	See clause 7.7
P-DCS-Laes	M	M	See clause 7.7
P-DCS-Redirect	M	M	See clause 7.7
Replaces	M	M	See clause 7.8
P-Asserted-Identity	M	M	See clause 7.9
Privacy	M	M	See clause 7.9 The values "id" and "critical" shall be supported
History-Info	M	M	See clause 8.4.12
Target-Dialog	O	M	See clause 7.14
Join	M	M	See clause 7.15

---

# Annex C (normative): ENUM Client Requirements

## C.1 Introduction

The IPCablecom ENUM Client is responsible for taking as an input an E.164 phone number (with country code) (e.g. +1-301-555-1212), an optional service selector, an optional database selector and an optional count of desired URIs and returning one or more URIs. The service selector is used by the ENUM client for filtering NAPTR responses as described in clause C.2.1. The database selector is used by the ENUM client to identify the portion of the DNS Tree where the ENUM data resides, its use is described in clause C.1.

### C.1.1 General

This clause describes the ENUM requirements necessary for usage by CMS, MGC and other IPCablecom component implementations. ENUM is defined in RFC 3761 [30] and unless otherwise prescribed below, is required for the implementation of an IPCablecom ENUM client [hereinafter "Client"].

The processing of the final output of an ENUM lookup up (e.g. a SIP or TEL URI) is outside the scope of the present document.

Clients shall be in accordance with the following ENUM related RFCs: 3761 [30], 3764 [31], 4415 [32] and 3402 [33] except as noted in the following clauses.

### C.1.2 DNS Resolver Requirements

The Client, shall implement a "stub" resolver as defined in RFC 1034 [34]. The Client should implement a 'full' resolver per RFC 1034 [34]. If the Client implements a full resolver, it shall be configurable to act as a stub resolver - e.g. all ENUM queries are forwarded to an external resolver.

Since the data used for ENUM can reside in a DNS system that is partially or totally independent of an operator's DNS system used for other applications (e.g. email, web, etc) the ENUM client may need to be configured accordingly. As such, the ENUM client resolver shall be capable of being configured to forward ENUM queries to an external DNS Server which may differ from the DNS Server used by other applications or processes on the system on which the ENUM Client resides.

### C.1.3 Database Selector

The default database selector is the RFC 3761 [30] default database - "e164.arpa". For the purposes of the present document, step 4 is modified to read as follows: "Append the database selector string (or if unspecified, the default string 'e164.arpa') to the end.

EXAMPLE: 8.4.1.0.6.4.9.7.0.2.4.4.e164.arpa or 2.1.2.1.5.5.1.0.3.1.enum.mso.net".

Valid database selectors shall be specified using the recommended syntax from RFC 1034 [34], i.e. labels consist only of letters, digits and hyphens. Clients shall not send queries with database selectors which violate this syntax.

---

## C.2 NAPTR

### C.2.1 Service Field

A service selector matches any service field that begins with that string, e.g. "E2U" matches any service field beginning with "E2U". "" (blank) matches any service field.

The default selector for the service field is "E2U". Other possible values for the service field selector that can be requested of the client include "E2U+voice:tel" and "E2U+SIP". During ENUM processing, Clients shall silently ignore returned NAPTR records where the selector does not match the service field.

Clients shall be able to receive and process the "E2U+SIP" NAPTR service records as defined in [31].

Clients shall be able to receive and process the "E2U+voice:tel" NAPTR service records as defined in [32].

Client processing of NAPTR records with other service types is outside the current version of the present document.

## C.2.2 Case Insensitivity

For the purposes of selecting and matching records, the Client shall match with the Service and Flags fields of the NAPTR records in a case-insensitive manner, e.g. "E2U+SIP", "E2u+sIP" and "e2u+sip" are all values which indicate an ENUM SIP NAPTR record.

The client shall do a case insensitive match with the left hand side of the NAPTR Regular Expression.

Case insensitivity is defined only with respect to the 26 uppercase and 26 lower case alphabetic characters of the ASCII character set (e.g. A-Z and a-z) - "A" is equivalent to "a", etc. All other characters, regardless of character set, require an exact match.

## C.2.3 Regular Expression Delimiters

Clients shall be able to process the regular expression field of the NAPTR record for any valid delimiter as defined in [33]. While the preferred delimiter is the exclamation point (!), the present document does not impose requirements on the servers which serve the NAPTR records and clients should be prepared to process any valid delimiter they receive. The Client shall ignore NAPTR records which contain malformed regular expressions. When ignoring malformed NAPTR records the Client shall continue processing with the next available NAPTR record if any.

## C.2.4 Non-Terminal NAPTR Records

At this time, IPCablecom only supports NAPTR records with a flag field of "U". The flag indicates a "terminal" or final lookup record with the result being a URI. Clients shall silently ignore any NAPTR record which contains a flag field with any value other than "U" (or its lower case equivalent "u").

## C.2.5 Handling Multiple URIs

Differing from RFC 3761 [30], an ENUM client may return multiple URIs. Unless specified by the application, the Client shall assume the number of desired URIs is 1. Consistent with RFC 3402 [33], when presented with multiple returned NAPTR records which match the service selector, the Client shall follow this procedure:

- 1) Remove from consideration all non-terminal NAPTR records.
- 2) Sort the NAPTR records first by the "Order" field and then by the "Preference" field within the "Order". The sort order for two records with identical Order and Preference fields is undefined and may be ordered any way the Client application desires.
- 3) If there are more than 10 NAPTR records remaining, remove the excess records at the bottom of the sorted list.
- 4) In sort order, attempt to match (see [33]) each NAPTR record. If the match is successful and the returned string is a valid URI, add that URI to the result set along with the NAPTR's associated Order, Preference and Service fields.
- 5) Repeat step 4 until the end of the list is reached or until the number of desired URIs is produced. In no event shall the Client produce more than 5 URIs.
- 6) Return the result set of URIs along with their associated Service, Order and Preference fields.

## C.2.6 EDNS0 Support

Clients shall implement EDNS0 as defined by [35]. Clients shall include an EDNS0 OPT record in any UDP DNS request they send. The Client shall set the OPT record to indicate a Sender UDP Payload Size of at least 4 096 octets, which, in turn, implies that the Client shall be able to receive and process a UDP payload of at least 4 096 octets.

---

## Annex D (informative): Bibliography

- IETF RFC 2234: "Augmented BNF for Syntax Specifications: ABNF", November 1997.
- IETF RFC 1890: "RTP Profile for Audio and Video Conferences with Minimal Control", January 1996.
- IETF RFC 3420: "Internet Media Types message/sip and message/sipfrag", November 2002.
- IETF RFC 768: "User Datagram Protocol", August 1980.
- ITU-T Recommendation E.123: "Notation for national and international telephone numbers, e-mail addresses and Web addresses", February 2001.
- ITU-T Recommendation E.164: "The international public telecommunication numbering plan, May 1997.
- IETF RFC 791: "Transmission Control Protocol", Postal, J., September 1981.
- ETSI TS 103 161-3: "Access, Terminals, Transmission and Multiplexing (ATTM) Integrated Broadband Cable and Television Networks; IP-Cablecom 1.5; Part 3: Audio Codec Requirements for the Provision of Bi-Directional Audio Service over Cable Television Networks using Cable Modems".
- PacketCable Basic Residential Feature Descriptions for PacketCable-Based VoIP Services, PKT-TR-VOIPBRF-R01-000608, June 8, 2000, Cable Television Laboratories, Inc.
- PacketCable Extended Residential Feature Descriptions for PacketCable-Based VoIP Services, PKT-TR-VOIPERF-R01-000831, August 31, 2000, Cable Television Laboratories, Inc.

---

## History

<b>Document history</b>		
V1.1.1	April 2011	Publication