



**Intelligent Transport Systems (ITS);
Testing;
Conformance test specifications for
Facilities layer protocols and communication requirements
for infrastructure services;
Part 3: Abstract Test Suite (ATS) and Protocol Implementation
eXtra Information for Testing (PIXIT)**

ReferenceRTS/ITS-001945

KeywordsATS, ITS, PIXIT, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2021.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	6
3 Definition of terms, symbols and abbreviations.....	7
3.1 Terms.....	7
3.2 Symbols.....	7
3.3 Abbreviations	7
4 Abstract Test Method (ATM).....	8
4.1 Abstract protocol tester	8
4.2 Test Configuration.....	9
4.3 Test architecture	9
4.4 Ports and ASPs (Abstract Services Primitives)	10
4.4.1 Introduction.....	10
4.4.2 MAPEM SPATEM ATS	11
4.4.2.1 Primitives of the mapemSpatemPort.....	11
4.4.2.2 Primitives of the utPort	11
4.4.3 IVIM ATS.....	11
4.4.3.1 Primitives of the ivimPort	11
4.4.3.2 Primitives of the utPort	12
4.4.4 SREM SSEM ATS	12
4.4.4.1 Primitives of the mapemSsemPort	12
4.4.4.2 Primitives of the utPort	12
4.4.5 RTCMEM ATS	12
4.4.5.1 Primitives of the rtcmemPort	12
4.4.5.2 Primitives of the utPort	13
4.5 Executing CA tests in secured mode	13
4.6 ETSI test adapter	13
5 Untestable Test Purposes.....	13
6 ATS conventions	14
6.1 Introduction	14
6.2 Testing conventions.....	14
6.2.1 Testing states	14
6.2.1.1 Initial state.....	14
6.2.1.2 Final state	14
6.2.2 Message types - ASN.1 definitions.....	15
6.3 Naming conventions.....	15
6.3.1 Introduction.....	15
6.3.2 General guidelines	15
6.3.3 ITS specific TTCN-3 naming conventions	16
6.3.4 Usage of Log statements.....	17
6.3.5 Test Case (TC) identifier	17
Annex A (normative): TTCN-3 library modules.....	19
A.1 Electronic annex, zip file with TTCN-3 code	19
Annex B (normative): Partial PIXIT pro forma	20
B.1 Partial cancellation of copyright.....	20

B.2	Introduction	20
B.3	Identification summary.....	20
B.4	ATS summary	20
B.5	Test laboratory.....	21
B.6	Client identification.....	21
B.7	SUT	21
B.8	Protocol layer information.....	22
B.8.1	Protocol identification	22
B.8.2	IUT information	22
B.8.2.1	MAPEM/SPATEM.....	22
B.8.2.2	IVIM.....	22
B.8.2.3	SREM/SSEM.....	23
B.8.2.4	RTCMEM.....	24
B.8.2.5	Generic.....	24
Annex C (normative): PCTR pro forma		25
C.1	Partial cancellation of copyright.....	25
C.2	Introduction	25
C.3	Identification summary.....	25
C.3.1	Protocol conformance test report.....	25
C.3.2	IUT identification.....	25
C.3.3	Testing environment.....	26
C.3.4	Limits and reservation.....	26
C.3.5	Comments.....	26
C.4	IUT Conformance status	26
C.5	Static conformance summary	27
C.6	Dynamic conformance summary.....	27
C.7	Static conformance review report.....	27
C.8	Test campaign report.....	28
C.9	Observations.....	32
	History	33

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Intelligent Transport Systems (ITS).

The present document is part 3 of a multi-part deliverable covering Conformance test specifications for Facilities layer protocols and communication requirements for infrastructure services as identified below:

- Part 1: "Test requirements and Protocol Implementation Conformance Statement (PICS) pro forma";
- Part 2: "Test Suite Structure and Test Purposes (TSS & TP)";
- Part 3: "Abstract Test Suite (ATS) and Protocol Implementation eXtra Information for Testing (PIXIT)".**

The development of ITS test specifications follows the guidance provided in the ETSI EG 202 798 [i.1]. Therefore, the ATS documentation outlined in the present document is also based on the guidance provided in ETSI EG 202 798 [i.1].

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document contains the Abstract Test Suite (ATS) for MAPEM-SPATEM, IVIM, SREM-SSEM and RTCMEM as defined in ETSI TS 103 301 [1] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [i.7].

The objective of the present document is to provide a basis for conformance tests for MAPEM-SPATEM, IVIM, SREM-SSEM and RTCMEM equipment giving a high probability of interoperability between different manufacturers' equipment.

The ISO standards for the methodology of conformance testing (ISO/IEC 9646-1 [i.4] and ISO/IEC 9646-2 [i.5]) as well as the ETSI rules for conformance testing (ETSI ETS 300 406 [i.8]) are used as a basis for the test methodology.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 103 301 (V1.3.1): "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Facilities layer protocols and communication requirements for infrastructure services".
- [2] ISO/TS 19091-2019: "Intelligent transport systems - Cooperative ITS - Using V2I and I2V communications for applications related to signalized intersections".
- [3] ISO/TS 19321-2020: "Intelligent transport systems - Cooperative ITS - Dictionary of in-vehicle information (IVI) data structures".
- [4] ETSI TS 103 191-1 (V1.3.1): "Intelligent Transport Systems (ITS); Testing; Conformance test specifications for Facilities layer protocols and communication requirements for infrastructure services; Part 1: Test requirements and Protocol Implementation Conformance Statement (PICS) pro forma".
- [5] ETSI TS 103 191-2 (V1.3.1): "Intelligent Transport Systems (ITS); Testing; Conformance test specifications for Facilities layer protocols and communication requirements for infrastructure services; Part 2: Test Suite Structure and Test Purposes (TSS & TP)".
- [6] ETSI TS 102 894-2 (V1.3.1): "Intelligent Transport Systems (ITS); Users and applications requirements; Part 2: Applications and facilities layer common data dictionary".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EG 202 798 (V1.1.1): "Intelligent Transport Systems (ITS); Testing; Framework for conformance and interoperability testing".
- [i.2] ETSI TS 103 096-3 (V1.3.1): "Intelligent Transport Systems (ITS); Testing; Conformance test specifications for ITS Security; Part 3: Abstract Test Suite (ATS) and Protocol Implementation eXtra Information for Testing (PIXIT)".
- [i.3] ETSI TR 103 099 (V1.4.1): "Intelligent Transport Systems (ITS); Architecture of conformance validation framework".
- [i.4] ISO/IEC 9646-1 (1994): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework - Part 1: General concepts".
- [i.5] ISO/IEC 9646-2 (1994): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 2: Abstract Test Suite specification".
- [i.6] ISO/IEC 9646-6 (1994): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 6: Protocol profile test specification".
- [i.7] ISO/IEC 9646-7 (1995): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 7: Implementation Conformance Statements".
- [i.8] ETSI ETS 300 406 (1995): "Methods for testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
- [i.9] ETSI ES 201 873-1 (V4.5.1): "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 1: TTCN-3 Core Language".
- [i.10] ETSI ES 201 873-7 (V4.5.1): "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 7: Using ASN.1 with TTCN-3".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given ETSI TS 103 301 [1], ISO/IEC 9646-1 [i.4] and in ISO/IEC 9646-7 [i.7] apply.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN	Abstract Syntax Notation
ASP	Abstract Services Primitives
ATM	Abstract Test Method
ATS	Abstract Test Suite
BI	Invalid Syntax or Behaviour Tests
BV	Valid Behaviour tests
CA	Certification Authority
DSRC	Dedicated Short-Range Communications
ES	ETSI Standard

FA	Facilities
GNSS	Global Navigation Satellite System
GPC	GNSS Positioning Correction
IS	Infrastructure Services
ISO	International Organization for Standardization
ITS	Intelligent Transport Systems
IUT	Implementation Under Test
IVI	Infrastructure to Vehicle Information
IVIM	IVI-Message
MAPEM	MapData Messages
MTC	Main Test Component
PA	Platform Adaptor
PCTR	Protocol Conformance Test Report
PICS	Protocol Implementation Conformance Statement
PIXIT	Partial Protocol Implementation eXtra Information for Testing
PTC	Parallel Test Component
PX	Pixit
RLT	Road and Lane topology
RTCMEM	Radio Technical Commission For Maritime Message
SA	System Adaptor
SAP	Service Access Point
SCS	System Conformance Statement
SCTR	System Conformance Test Report
SPATEM	Signal Phase And Timing Messages
SREM	Signal Request Message
SSEM	Signal Response Message
SSP	Service Specific Permissions
SUT	System Under Test
TC	Test Case
TLC	Traffic Light Control
TLM	Traffic Light Manoeuvre
TP	Test Purposes
TSS	Test Suite Structure
TTCN	Testing and Test Control Notation

4 Abstract Test Method (ATM)

4.1 Abstract protocol tester

The abstract protocol tester used by this test suite is described in figure 1. The test system simulates valid and invalid protocol behaviour, and analyses the reaction of the IUT.

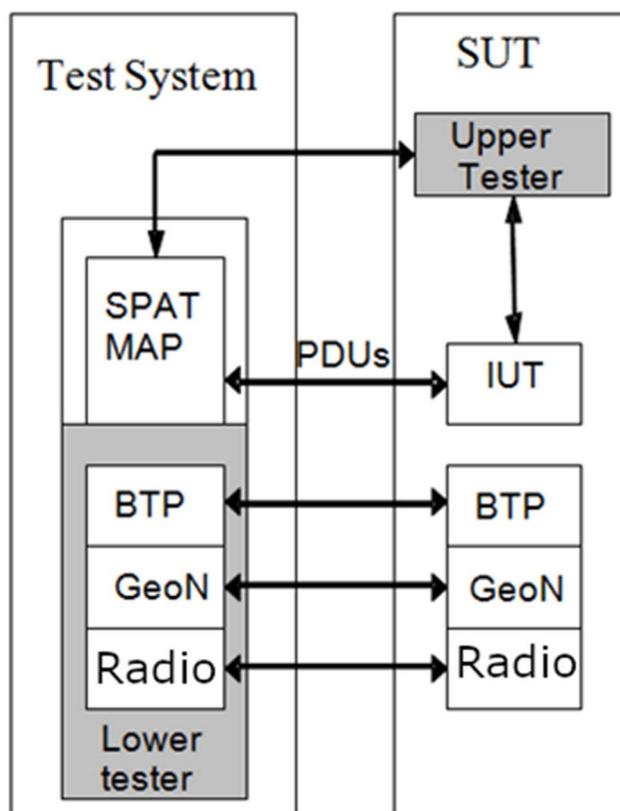


Figure 1: Abstract protocol tester - MAPEM SPATEM case

4.2 Test Configuration

This test suite uses a unique test configuration in order to cover the different test scenarios. In this configuration, the tester simulates one ITS station implementing the MAPEM SPATEM protocol.

4.3 Test architecture

The present document implements the general TTCN-3 test architecture described in ETSI EG 202 798 [i.1], clauses 6.3.2 and 8.3.1.

Figure 2 shows the test architecture used in for the MAPEM SPATEM ATS case. The MAPEM SPATEM test component requires using only the Main Test Component (MTC). The MTC communicates with the MAPEM SPATEM SUT over the MapemSpatemPort. The MapemSpatemPort is used to exchange MAPEM SPATEM protocol messages between the MAPEM SPATEM test component and the MAPEM SPATEM IUT.

NOTE: The same behaviour applies for IVIM and SREM SSEM.

The Upper tester entity in the SUT enables triggering MAPEM SPATEM functionalities by simulating primitives from application. It is required to trigger the MAPEM SPATEM layer in the SUT to send MAPEMs, which are resulting from upper layer primitives. Furthermore, receiving MAPEMs may result for the MAPEM SPATEM layer in sending primitives to the upper layer.

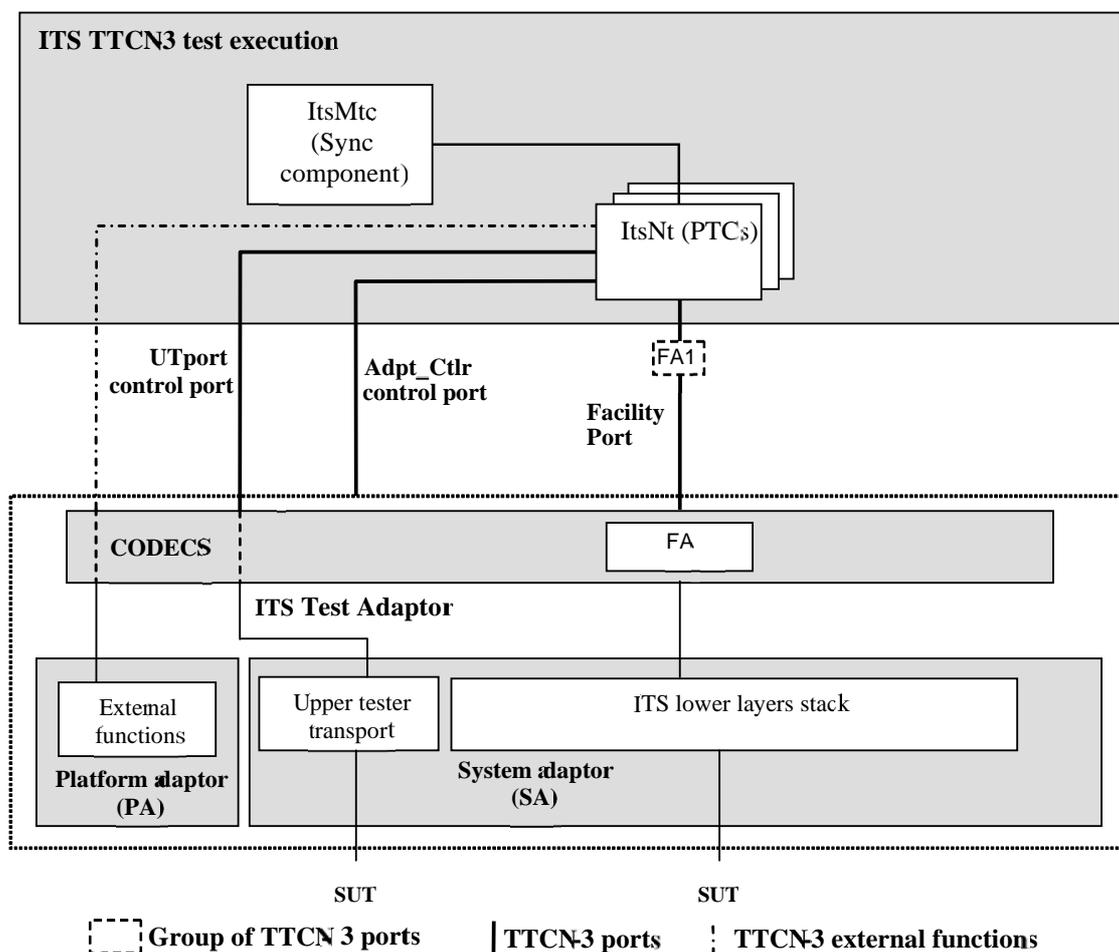


Figure 2: Test system architecture

4.4 Ports and ASPs (Abstract Services Primitives)

4.4.1 Introduction

Two ports are used by the MAPEM SPATEM ATS:

- The mapemSpatemPort, of type MapemSpatemPort.
- The utPort, of type UpperTesterPort.

Two ports are used by the IVIM ATS:

- The ivimPort, of type IvimPort.
- The utPort, of type UpperTesterPort.

Two ports are used by the SREM SSEM ATS:

- The sremSsemPort, of type SremSsemPort.
- The utPort, of type UpperTesterPort.

4.4.2 MAPEM SPATEM ATS

4.4.2.1 Primitives of the mapemSpatemPort

Four types of primitives are used in the mapSpatPort:

- The MapemInd primitive used to receive messages of type MapemMsg (MAPEM_PDU + RawData).
- The SpatemInd primitive used to receive messages of type SpatemMsg (SPATEM_PDU + RawData).
- The MapemReq primitive used to send messages of type MAPEM_PDU.
- The SpatemReq primitive used to send messages of type SPATEM_PDU.

These four primitives use the MAPEM type and the SPATEM type, which is declared in the ETSI_TS_103301.asn ASN.1 module, following the ASN.1 definition from CEN ISO/TS 19091 [2].

4.4.2.2 Primitives of the utPort

This port uses six types of primitives:

- The UtInitialize primitive used to initialize IUT.
- The UtMapemSpatemTrigger primitive used to trigger upper layer events in IUT.
- The UtInitializeResult primitive used to receive upper layer result of initialization in IUT.
- The UtMapemSpatemTriggerResult primitive used to receive upper layer result of triggering MAPEM-SPATEM in IUT.
- The UtMapemEventInd primitive used to receive upper layer event of MAPEM_PDU in IUT.
- The UtSpatemEventInd primitive used to receive upper layer event of SPATEM_PDU in IUT.

4.4.3 IVIM ATS

4.4.3.1 Primitives of the ivimPort

Two types of primitives are used in the ivimPort:

- The ivimInd primitive used to receive messages of type IvimMsg (IVIM_PDU + RawData).
- The IvimReq primitive used to send messages of type IVIM_PDU.

These two primitives use the IVIM_PDU type, which is declared in the ETSI_TS_103301.asn ASN.1 module contained in the archive ts_10319103v010301p0.zip which accompanies the present document, following the ASN.1 definition from CEN ISO/TS 19321 [3].

4.4.3.2 Primitives of the utPort

This port uses five types of primitives:

- The UtInitialize primitive used to initialize IUT.
- The UtIvimtrigger primitive used to trigger upper layer events in IUT.
- The UtInitializeResult primitive used to receive upper layer result of initialization in IUT.
- The UtIvimTriggerResult primitive used to receive upper layer result of triggering IVIM in IUT.
- The UtIvimEventInd primitive used to receive upper layer event of IVIEM_PDU in IUT.

4.4.4 SREM SSEM ATS

4.4.4.1 Primitives of the mapemSsemPort

Four types of primitives are used in the mapSpatPort:

- The SremInd primitive used to receive messages of type SremMsg (SREM_PDU + RawData).
- The SsemInd primitive used to receive messages of type SsemMsg (SSEM_PDU + RawData).
- The SremReq primitive used to send messages of type SREM_PDU.
- The SsemReq primitive used to send messages of type SSEM_PDU.

These four primitives use the SREM type and the SSEM type, which is declared in the ETSI_TS_103301.asn ASN.1 module, following the ASN.1 definition from CEN ISO/TS 19091 [2].

4.4.4.2 Primitives of the utPort

This port uses six types of primitives:

- The UtInitialize primitive used to initialize IUT.
- The UtSremSsemTrigger primitive used to trigger upper layer events in IUT.
- The UtInitializeResult primitive used to receive upper layer result of initialization in IUT.
- The UtSremSsemTriggerResult primitive used to receive upper layer result of triggering SREM-SSEM in IUT.
- The UtSremEventInd primitive used to receive upper layer event of SREM_PDU in IUT.
- The UtSsemEventInd primitive used to receive upper layer event of SSEM_PDU in IUT.

4.4.5 RTCMEM ATS

4.4.5.1 Primitives of the rtcmemPort

Two types of primitives are used in the mapSpatPort:

- The RtcmemInd primitive used to receive messages of type RtcmmMsg (RTCMEM_PDU + RawData).
- The RtcmmReq primitive used to send messages of type RTCMEM_PDU.

These two primitives use the RTCMEM_PDU type, which is declared in the ETSI_TS_103301.asn ASN.1 module contained in the archive ts_10319103v010301p0.zip which accompanies the present document, following the ASN.1 definition from CEN ISO/TS 19091 [2].

4.4.5.2 Primitives of the utPort

This port uses five types of primitives:

- The UtInitialize primitive used to initialize IUT.
- The UtRtcmemTrigger primitive used to trigger upper layer events in IUT.
- The UtInitializeResult primitive used to receive upper layer result of initialization in IUT.
- The UtRtcmemTriggerResult primitive used to receive upper layer result of triggering RTCMEM in IUT.
- The UtRtcmemEventInd primitive used to receive upper layer event of RTCMEM_PDU in IUT.

4.5 Executing CA tests in secured mode

All the CA tests, with the exception of the SSP tests, can be executed with security enabled or with security disabled. The choice of running the CA tests in secured or non-secured mode has no impact on the result of the CA tests because the test verdicts assess CA protocol behaviour only.

The SSP tests can only be executed in secured mode.

The choice of running the CA tests in secured or non-secured mode can be controlled via the test suite parameter PICS_IS_IUT_SECURED, see table A.4/1 in ETSI TS 103 191-1 [4].

Before running the CA tests in secured mode, the following steps need to be executed:

- security certificates need to be generated for the tester as well as for the IUT, see ETSI TS 103 096-3 [i.2], clause 5.3.2.5;
- security certificates need to be installed onto the IUT, see ETSI TS 103 096-3 [i.2] clause 5.3.2.6;
- in case of usage of the ETSI test adapter, the following test adapter parameters need to be configured:

Table 0

Test adapter parameter	Default value	Comment
TsSecuredRootPath	data/certificates	The path to the location where all certificates (tester and IUT certificates) are installed
TsSecuredConfigId	void	Name of the subfolder in TsSecuredRootPath in order to organize multiple IUTs

4.6 ETSI test adapter

All information of the ETSI test adapter is described in ETSI TR 103 099 [i.3].

5 Untestable Test Purposes

Table 1 gives a list of TPs, which are not implemented in the ATS Road & Lane Topology due to the chosen ATM or other restrictions.

Table 1: Untestable TPs for Road & Lane Topology

Test purpose	Reason
TC_IS_RLT_GEN_COM_BV_02	Removed
TP_IS_RLT_GEN_SEC_BV_02	Security elements to be verified are part of Network & Transport layer

Table 2 gives a list of TPs, which are not implemented in the ATS Traffic Lights Control due to the chosen ATM or other restrictions.

Table 2: Untestable TPs for Traffic Lights Control

Test purpose	Reason
TP_IS_TLCR_GEN_SEC_BV_02	Security elements to be verified are part of Network & Transport layer
TP_IS_TLCR_GEN_SEC_BO_02	
TP_IS_TLCR_GEN_SEC_BO_02	
TP_IS_TLCR_GEN_SEC_BV_05	
TP_IS_TLCR_GEN_SEC_BV_06	
TP_IS_TLCS_RCV_SSP_BV_05	

Table 3 gives a list of TPs, which are not implemented in the ATS Infrastructure to Vehicle Information due to the chosen ATM or other restrictions.

Table 3: Untestable TPs for Infrastructure to Vehicle Information

Test purpose	Reason
TC_IS_IVI_GEN_SEC_BV_02	Security elements to be verified are part of Network & Transport layer
TC_IS_IVI_GEN_SSP_BV_02	
TC_IS_IVI_GEN_SSP_BV_03	
TC_IS_IVI_GEN_SSP_BV_04	
TC_IS_IVI_GEN_SSP_BV_05	
TC_IS_IVI_GEN_SSP_BV_06	

6 ATS conventions

6.1 Introduction

The ATS conventions are intended to give a better understanding of the ATS but they also describe the conventions made for the development of the ATS. These conventions shall be considered during any later maintenance or further development of the ATS.

The ATS conventions contain two clauses, the testing conventions and the naming conventions. The testing conventions describe the functional structure of the ATS. The naming conventions describe the structure of the naming of all ATS elements.

To define the ATS, the guidelines of ETSI ETS 300 406 [i.8] were considered.

6.2 Testing conventions

6.2.1 Testing states

6.2.1.1 Initial state

All test cases start with the function `f_prInitialState`. This function brings the IUT in an "initialized" state by invoking the upper tester primitive `UtInitialize`.

6.2.1.2 Final state

All test cases end with the function `f_poDefault`. This function brings the IUT back in an "idle" state. As no specific actions are required for the idle state in ETSI TS 103 301 [1], the function `f_poDefault` does not invoke any action.

As necessary, further actions may be included in the `f_poDefault` function.

6.2.2 Message types - ASN.1 definitions

ASN.1 definitions from ETSI TS 103 301 [1] are directly imported in TTCN-3 using the ASN.1 import method specified in ETSI ES 201 873-7 [i.10].

The following example shows the TTCN-3 import statement used to import ASN.1 definitions in the TTCN-3 modules:

```
import from DSRC language "ASN.1:1997" all;
```

Generic ASN.1 definitions (message header, station Id, etc.), are defined in the Common Data Dictionary ETSI TS 102 894-2 [6] ASN.1 module. Thus the MAPEM SPATEM ASN.1 modules shall import these definitions from the Common Data Dictionary ETSI TS 102 894-2 [6] ASN.1 module.

6.3 Naming conventions

6.3.1 Introduction

This test suite follows the naming convention guidelines provided in the ETSI EG 202 798 [i.1].

6.3.2 General guidelines

The naming convention is based on the following underlying principles:

- in most cases, identifiers should be prefixed with a short alphabetic string (specified in table 4) indicating the type of TTCN-3 element it represents;
- suffixes should not be used except in those specific cases identified in table 2;
- prefixes and suffixes should be separated from the body of the identifier with an underscore ("_");

EXAMPLE 1: `c_sixteen`, `t_wait`.

- only module names, data type names and module parameters should begin with an upper-case letter. All other names (i.e. the part of the identifier following the prefix) should begin with a lower-case letter;
- the start of second and subsequent words in an identifier should be indicated by capitalizing the first character. Underscores should not be used for this purpose.

EXAMPLE 2: `f_initialState`.

Table 4 specifies the naming guidelines for each element of the TTCN-3 language indicating the recommended prefix, suffixes (if any) and capitalization.

Table 4: ETSI TTCN-3 generic naming conventions

Language element	Naming convention	Prefix	Example identifier
Module	Use upper-case initial letter	none	IPv6Templates
Group within a module	Use lower-case initial letter	none	messageGroup
Data type	Use upper-case initial letter	none	SetupContents
Message template	Use lower-case initial letter	m_	m_setupInit
Message template with wildcard or matching expression	Use lower-case initial letters	mw_	mw_anyUserReply
Signature template	Use lower-case initial letter	s_	s_callSignature
Port instance	Use lower-case initial letter	none	signallingPort
Test component instance	Use lower-case initial letter	none	userTerminal
Constant	Use lower-case initial letter	c_	c_maxRetransmission
Constant (defined within component type)	Use lower-case initial letter	cc_	cc_minDuration
External constant	Use lower-case initial letter	cx_	cx_macId
Function	Use lower-case initial letter	f_	f_authentication()
External function	Use lower-case initial letter	fx_	fx_calculateLength()
Altstep (incl. Default)	Use lower-case initial letter	a_	a_receiveSetup()
Test case	Use ETSI numbering	TC_	TC_COR_0009_47_ND
Variable (local)	Use lower-case initial letter	v_	v_macId
Variable (defined within a component type)	Use lower-case initial letters	vc_	vc_systemName
Timer (local)	Use lower-case initial letter	t_	t_wait
Timer (defined within a component)	Use lower-case initial letters	tc_	tc_authMin
Module parameters for PICS	Use all upper case letters	PICS_	PICS_DOOROPEN
Module parameters for other parameters	Use all upper case letters	PX_	PX_TESTER_STATION_ID
Formal Parameters	Use lower-case initial letter	p_	p_macId
Enumerated Values	Use lower-case initial letter	e_	e_syncOk

6.3.3 ITS specific TTCN-3 naming conventions

Next to such general naming conventions, table 5 shows specific naming conventions that apply to the ITS TTCN-3 test suite.

Table 5: ITS specific TTCN-3 naming conventions

Language element	Naming convention	Prefix	Example identifier
ITS Module	Use upper-case initial letter	Its"IUTname"_"	ItsMapemSpatem_
Module containing types and values	Use upper-case initial letter	Its"IUTname"_"TypesAndValues	ItsMapemSpatem_"TypesAndValues
Module containing Templates	Use upper-case initial letter	Its"IUTname"_"Templates	ItsMapemSpatem_"Templates
Module containing test cases	Use upper-case initial letter	Its"IUTname"_"TestCases	ItsMapemSpatem_"TestCases
Module containing functions and external functions	Use upper-case initial letter	Its"IUTname"_"Functions	ItsMapemSpatem_"Functions
Module containing main component definitions components, ports and message definitions	Use upper-case initial letter	Its"IUTname"_"TestSystem	ItsMapemSpatem_"TestSystem
Module containing the control part	Use upper-case initial letter	Its"IUTname"_"TestControl	ItsMapemSpatem_"TestControl

6.3.4 Usage of Log statements

All TTCN-3 log statements use the following format using the same order:

- Three asterisks.
- The TTCN-3 test case or function identifier in which the log statement is defined.
- One of the categories of log: INFO, WARNING, ERROR, PASS, FAIL, INCONC, TIMEOUT.
- Free text.
- Three asterisks.

EXAMPLE 1: `log("*** " & testcasename() & ": INFO: No more IVIM shall be set.
***")`.

Furthermore, the following rules are applied for the whole ATSS:

- Log statements are used in the body of the functions, so that invocations of functions are visible in the test logs.
- All TTCN-3 setverdict statements are combined (as defined in ETSI ES 201 873-1 [i.9]) with a log statement following the same above rules (see example 2).

EXAMPLE 2: `setverdict(pass, "*** " & testcasename() & ": PASS: Expected IVIM
received ***")`.

6.3.5 Test Case (TC) identifier

Table 6 shows the test case naming convention, which follows the same naming convention as the test purposes.

Table 6: TC naming convention

Identifier	TP_<root>_<gr>_<dir>_<x>_<nn>		
	<root> = root	IS_TLM	
	<dir> = direction	GEN	Message Generation behaviour
		RCV	Message Receiving behaviour
	<gr> = group	MSGF	Message Format
		EVGN	Event Generation
		COM	Communication
	<x> = type of testing	BV	Valid Behaviour tests
		BO	Invalid Syntax or Behaviour Tests
	<nn> = sequential number		01 to 99
	<root> = root	IS_RLT	
	<dir> = direction	GEN	Message Generation behaviour
		RCV	Message Receiving behaviour
	<gr> = group	MSGF	Message Format
		EVGN	Event Generation
		COM	Communication
	<x> = type of testing	BV	Valid Behaviour tests
		BO	Invalid Syntax or Behaviour Tests
	<nn> = sequential number		01 to 99
	<root> = root	IS_IVI	
	<dir> = direction	GEN	Message Generation behaviour
		RCV	Message Receiving behaviour
	<gr> = group	MSGF	Message Format
		EVGN	Event Generation
		EVUP	Event Update
		EVTR	Event Termination
		GFQ	Generation Frequency
		COM	Communication
	<x> = type of testing	BV	Valid Behaviour tests
		BO	Invalid Syntax or Behaviour Tests
		TI	Timer
	<nn> = sequential number		01 to 99
	<root> = root	IS_TLC	
	<dir> = direction	GEN	Message Generation behaviour
		RCV	Message Receiving behaviour
	<gr> = group	MSGF	Message Format
		EVGN	Event Generation
		COM	Communication
	<x> = type of testing	BV	Valid Behaviour tests
		BI	Invalid Syntax or Behaviour Tests
	<nn> = sequential number		01 to 99

EXAMPLE: TP identifier: TP_IS_GEN_RLT_MSGF_BV_01
 TC identifier: TC_IS_GEN_RLT_MSGF_BV_01

Annex A (normative): TTCN-3 library modules

A.1 Electronic annex, zip file with TTCN-3 code

This test suite has been produced using the Testing and Test Control Notation (TTCN) according to ETSI ES 201 873-1 [i.9].

ETSI TS 103 301 [1], ETSI TS 103 191-1 [4] and ETSI TS 103 191-2 [5] have been applied to develop this test suite.

This test suite has been compiled error-free using two different commercial TTCN-3 compilers.

The TTCN-3 library modules, which form parts of the present document, are contained in the archive `ts_10319103v010301p0.zip` which accompanies the present document.

Annex B (normative): Partial PIXIT pro forma

B.1 Partial cancellation of copyright

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the Partial PIXIT pro forma in this annex so that it can be used for its intended purposes and may further publish the completed Partial PIXIT.

B.2 Introduction

The PIXIT pro forma is based on ISO/IEC 9646-6.

B.3 Identification summary

The Identification summary shall be as specified in table B.1.

Table B.1: Identification summary

PIXIT Number:	
Test Laboratory Name:	
Date of Issue:	
Issued to:	

B.4 ATS summary

The ATS summary shall be as specified in table B.2.

Table B.2: ATS summary

Protocol Specification:	ETSI TS 103 301
Protocol to be tested:	MAPEM-SPATEM, IVIM, SREM-SSEM and RTCMEM
ATS Specification:	ETSI TS 103 191-3
Abstract Test Method:	Clause 4

B.5 Test laboratory

The Test laboratory info shall be specified as in table B.3.

Table B.3: Test laboratory info

Test Laboratory Identification:	
Test Laboratory Manager:	
Means of Testing:	
SAP Address:	

B.6 Client identification

The Client identification shall be specified as in table B.4.

Table B.4: Client identification

Client Identification:	
Client Test manager:	
Test Facilities required:	

B.7 SUT

SUT shall be specified as in table B.5.

Table B.5: SUT

Name:	
Version:	
SCS Number:	
Machine configuration:	
Operating System Identification:	
IUT Identification:	
PICS Reference for IUT:	
Limitations of the SUT:	
Environmental Conditions:	

B.8 Protocol layer information

B.8.1 Protocol identification

Protocol identification shall be as specified in table B.6.

Table B.6: Protocol identification

Name:	ETSI TS 103 301
Version:	
PICS References:	ETSI TS 103 191-1

B.8.2 IUT information

B.8.2.1 MAPEM/SPATEM

MAPEM/SPATEM PIXITs shall be as in table B.7.

Table B.7: MAPEM SPATEM PIXITs

Identifier	Description	
PX_MSG_ISSUE_REVISION	Comment	MsgCount of MAPEM sent by tester
	Type	MsgCount
	Default value	10
PX_INTERSECTIONSTATE_REVISION	Comment	Revision in IntersectionState of SPATEM sent by tester
	Type	MsgCount
	Default value	20
PX_INTERSECTION_ID	Comment	Id of Intersection of SPATEM sent by tester
	Type	IntersectionId
	Default value	'ABAB'O
PX_SIGNAL_GROUP_ID	Comment	SignalGroup of MovementState of SPATEM sent by tester
	Type	SignalGroupId
	Default value	128
PX_3D_REF_POINT_LATITUDE	Comment	3D Reference point latitude
	Type	Latitude
	Default value	0

B.8.2.2 IVIM

IVIM PIXITs shall be as in table B.8.

Table B.8: IVIM PIXITs

Identifier	Description	
PX_PROVIDER	Comment	Provider description of tester
	Type	Provider
	Default value	{ countryCode := '0000000000'B, providerIdentifier := 0 }
PX_IVI_ID	Comment	IVI identification number
	Type	integer
	Default value	2
PX_ZONEID_1	Comment	Zoneld 1 used in IVIM messages sent by the tester
	Type	Zid
	Default value	1
PX_ZONEID_2	Comment	Zoneld 2 used in IVIM messages sent by the tester
	Type	Zid
	Default value	2
PX_LANE	Comment	Laneld used in IVIM messages sent by the tester
	Type	LanePosition
	Default value	1 //innermostDrivingLane(1)
PX_RELAVANCE_ZONEID	Comment	RelavanceZoneld used in IVIM messages sent by the tester
	Type	Zid
	Default value	1
PX_DETECTION_ZONEID	Comment	DetectionZoneld used in IVIM messages sent by the tester
	Type	Zid
	Default value	1
PX_DRIVER_AWARENES_ZONEID	Comment	DriverAwarenesZoneld used in IVIM messages sent by the tester
	Type	Zid
	Default value	1
PX_LAYOUTID	Comment	LayoutId used in IVIM messages sent by the tester
	Type	Integer
	Default value	1

B.8.2.3 SREM/SSEM

SREM/SSEM PIXITs shall be as in table B.9.

Table B.9: SREM/SSEM PIXITs

Identifier	Description	
PX_BASICVEHICLEROLE	Comment	Used by tester in SREM trigger request
	Type	BasicVehicleRole
	Default value	emergency
PX_REQUESTIMPORTANCELEVEL	Comment	Used by tester in SREM trigger request
	Type	RequestImportanceLevel
	Default value	requestImportanceLevel13
PX_SECOND	Comment	Used in SREM and SSEM sent by tester
	Type	DSecond
	Default value	0
PX_STATUS	Comment	Used in SSEM sent by tester
	Type	IntersectionStatusObject
	Default value	'1 000'

B.8.2.4 RTCMEM

RTCMEM PIXITs shall be as in table B.10.

Table B.10: RTCMEM PIXITs

Identifier	Description	
PX_BASICVEHICLEROLE	Comment	Used by tester in SREM trigger request
	Type	BasicVehicleRole
	Default value	emergency
PX_REQUESTIMPORTANCELEVEL	Comment	Used by tester in SREM trigger request
	Type	RequestImportanceLevel
	Default value	requestImportanceLevel13
PX_SECOND	Comment	Used in SREM and SSEM sent by tester
	Type	DSecond
	Default value	0
PX_STATUS	Comment	Used in SSEM sent by tester
	Type	IntersectionStatusObject
	Default value	'1 000'

B.8.2.5 Generic

Generic PIXITs shall be as in table B.11.

Table B.11: Generic PIXITs

Identifier	Description	
PX_IUT_STATION_ID	Comment	Station Id sent by the IUT
	Type	Integer
	Default value	1
PX_IUT_STATION_TYPE	Comment	Station Type sent by the IUT
	Type	Integer
	Default value	1
PX_TESTER_STATION_ID	Comment	Station Id sent by the tester
	Type	Integer
	Default value	111 111
PX_TESTER_STATION_TYPE	Comment	Station Type sent by the tester
	Type	Integer
	Default value	1
PX_TS_LATITUDE	Comment	The Latitude of the tester (microdegrees)
	Type	Integer
	Default value	436 175 790
PX_TS_LONGITUDE	Comment	The Longitude of the tester (microdegrees)
	Type	Integer
	Default value	70 546 480
PX_TIME_DELTA	Comment	Tolerance to be applied when checking timestamps (ms)
	Type	Integer
	Default value	1 000
PX_GNSS_SCENARIO_SUPPORT	Comment	Does the IUT support GNSS scenarios?
	Type	Boolean
	Default value	FALSE
PX_CERT_FOR_TS	Comment	The certificate identifier that the tester (TS) shall use in case of secured IUT
	Type	Charstring
	Default value	"CERT_TS_A_AT"

Annex C (normative): PCTR pro forma

C.1 Partial cancellation of copyright

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PCTR pro forma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

C.2 Introduction

The PCTR pro forma is based on ISO/IEC 9646-6.

C.3 Identification summary

C.3.1 Protocol conformance test report

A protocol conformance test report shall be as in table C.1.

Table C.1: Protocol conformance test report

PCTR Number:	
PCTR Date:	
Corresponding SCTR Number:	
Corresponding SCTR Date:	
Test Laboratory Identification:	
Test Laboratory Manager:	
Signature:	

C.3.2 IUT identification

An IUT shall be identified as specified in table C.2.

Table C.2: IUT identification

Name:	
Version:	
Protocol specification:	
PICS:	
Previous PCTR if any:	

C.3.3 Testing environment

The testing environment shall be as specified in table C.3.

Table C.3: Testing environment

PIXIT Number:	
ATS Specification:	
Abstract Test Method:	
Means of Testing identification:	
Date of testing:	
Conformance Log reference(s):	
Retention Date for Log reference(s):	

C.3.4 Limits and reservation

Additional information relevant to the technical contents or further use of the test report, or the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

.....

.....

.....

.....

.....

C.3.5 Comments

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

.....

.....

.....

.....

.....

.....

C.4 IUT Conformance status

This IUT has or has not been shown by conformance assessment to be non-conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in clause C.3 in the present document) and there are no "FAIL" verdicts to be recorded (in clause C.6 in the present document) strike the words "has or", otherwise strike the words "or has not".

C.5 Static conformance summary

The PICS for this IUT is or is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

C.6 Dynamic conformance summary

The test campaign did or did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded in this clause, strike the words "did or" otherwise strike the words "or did not".

Summary of the results of groups of test:

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

C.7 Static conformance review report

If clause C.3 indicates non-conformance, this clause itemizes the mismatches between the PICS and the static conformance requirements of the specified protocol specification.

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

C.8 Test campaign report

Table C.4: MAPEM and SPATEM test cases

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause C.7)
TC_IS_RLT_GEN_MSGF_BV_01	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_02	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_03	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_04	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_05	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_06	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_07	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_08	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_09	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_10	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_11	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_12	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_13	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_14	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_15	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_16	Yes/No	Yes/No		
TC_IS_RLT_GEN_MSGF_BV_17	Yes/No	Yes/No		
TC_IS_RLT_GEN_FRAG_BV_01	Yes/No	Yes/No		
TC_IS_RLT_GEN_FRAG_BV_02	Yes/No	Yes/No		
TC_IS_RLT_GEN_COM_BV_01	Yes/No	Yes/No		
TC_IS_RLT_GEN_COM_BV_03	Yes/No	Yes/No		
TC_IS_RLT_GEN_COM_BV_04	Yes/No	Yes/No		
TP_IS_RLT_GEN_SEC_BV_01	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BV_01	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BV_02	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BO_03	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BV_04	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BO_05	Yes/No	Yes/No		
TP_IS_RLT_GEN_RATE_BV_01	Yes/No	Yes/No		
TP_IS_RLT_GEN_RCV_BV_03	Yes/No	Yes/No		
TP_IS_RLT_RCV_SEC_BV_01	Yes/No	Yes/No		
TP_IS_RLT_RCV_SEC_BO_02	Yes/No	Yes/No		
TP_IS_RLT_RCV_SEC_BO_03	Yes/No	Yes/No		
TP_IS_RLT_RCV_SEC_BO_04	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BV_01	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BV_02	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BO_03	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BV_04	Yes/No	Yes/No		
TP_IS_RLT_GEN_SSP_BO_05	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_02	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_03	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_04	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_05	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_06	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_07	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_08	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_09	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_10	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_11	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_12	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_13	Yes/No	Yes/No		
TP_IS_TLM_GEN_MSGF_BV_14	Yes/No	Yes/No		
TP_IS_TLM_GEN_EVGN_BV_01	Yes/No	Yes/No		
TP_IS_TLM_GEN_EVGN_BV_02	Yes/No	Yes/No		
TP_IS_TLM_GEN_EVGN_BV_03	Yes/No	Yes/No		

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause C.7)
TP_IS_TLM_GEN_EVGN_BV_04	Yes/No	Yes/No		
TP_IS_TLM_GEN_COM_BV_01	Yes/No	Yes/No		
TP_IS_TLM_GEN_COM_BV_02	Yes/No	Yes/No		
TP_IS_TLM_GEN_COM_BV_03	Yes/No	Yes/No		
TP_IS_TLM_GEN_SEC_BV_01	Yes/No	Yes/No		
TP_IS_TLM_GEN_SEC_BV_02	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BV_01	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BV_02	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BO_03	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BV_04	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BO_05	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BV_06	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BV_07	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BO_08	Yes/No	Yes/No		
TP_IS_TLM_GEN_SSP_BO_09	Yes/No	Yes/No		
TP_IS_TLM_GEN_RATE_BV_01	Yes/No	Yes/No		
TP_IS_TLM_RCV_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_TLM_RCV_SEC_BV_01	Yes/No	Yes/No		
TP_IS_TLM_RCV_SEC_BO_01	Yes/No	Yes/No		
TP_IS_TLM_RCV_SSP_BV_01	Yes/No	Yes/No		
TP_IS_TLM_RCV_SSP_BO_02	Yes/No	Yes/No		
TP_IS_TLM_RCV_SSP_BV_03	Yes/No	Yes/No		
TP_IS_TLM_RCV_SSP_BO_04	Yes/No	Yes/No		
TP_IS_TLM_RCV_SSP_BV_05	Yes/No	Yes/No		
TP_IS_TLM_RCV_SSP_BO_06	Yes/No	Yes/No		

Table C.5: IVIM test cases

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause C.7)
TP_IS_IVI_GEN_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_LOC_BV_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_LOC_BV_02	Yes/No	Yes/No		
TP_IS_IVI_GEN_LOC_BV_03	Yes/No	Yes/No		
TP_IS_IVI_GEN_LOC_BV_04	Yes/No	Yes/No		
TP_IS_IVI_GEN_LOC_BV_05	Yes/No	Yes/No		
TP_IS_IVI_GEN_LOC_BV_06	Yes/No	Yes/No		
TP_IS_IVI_GEN_MANC_BV_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_MANC_BV_02	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVGN_BV_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVGN_BV_02	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVGN_BV_03	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVGN_BV_04	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVGN_BV_05	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVUP_BV_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVUP_BV_02	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVUP_BV_03	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVUP_BV_04	Yes/No	Yes/No		
TP_IS_IVI_GEN_EVUP_BV_05	Yes/No	Yes/No		
TP_IS_IVI_GEN_GENAPP_BV_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_GENAPP_BV_02	Yes/No	Yes/No		
TP_IS_IVI_GEN_GENAPP_BV_03	Yes/No	Yes/No		
TP_IS_IVI_GEN_GENAPP_BV_04	Yes/No	Yes/No		
TP_IS_IVI_GEN_GENAPP_BV_05	Yes/No	Yes/No		
TP_IS_IVI_GEN_RCC_BV_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_RCC_BV_02	Yes/No	Yes/No		
TP_IS_IVI_GEN_RCC_BV_03	Yes/No	Yes/No		
TP_IS_IVI_GEN_TEXT_BV_01	Yes/No	Yes/No		

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause C.7)
TP_IS_IVI_GEN_TEXT_BV_02	Yes/No	Yes/No		
TP_IS_IVI_GEN_TEXT_BV_03	Yes/No	Yes/No		
TP_IS_IVI_GEN_TEXT_BV_04	Yes/No	Yes/No		
TP_IS_IVI_GEN_GFQ_TI_01	Yes/No	Yes/No		
TP_IS_IVI_GEN_GFQ_TI_02	Yes/No	Yes/No		
TC_IS_IVI_GEN_EVRP_BV_01	Yes/No	Yes/No		
TC_IS_IVI_GEN_EVRP_BV_02	Yes/No	Yes/No		
TC_IS_IVI_GEN_EVTR_BV_01	Yes/No	Yes/No		
TC_IS_IVI_GEN_EVTR_BV_02	Yes/No	Yes/No		
TC_IS_IVI_GEN_EVTR_BV_03	Yes/No	Yes/No		
TC_IS_IVI_GEN_EVTR_BV_04	Yes/No	Yes/No		
TC_IS_IVI_GEN_COM_BV_01	Yes/No	Yes/No		
TC_IS_IVI_GEN_COM_BV_02	Yes/No	Yes/No		
TC_IS_IVI_GEN_SEC_BV_01	Yes/No	Yes/No		
TC_IS_IVI_GEN_SSP_BV_01	Yes/No	Yes/No		
TC_IS_IVI_GEN_SSP_BO_01	Yes/No	Yes/No		
TC_IS_IVI_GEN_SSP_BO_02	Yes/No	Yes/No		
TC_IS_IVI_GEN_SSP_BO_03	Yes/No	Yes/No		
TC_IS_IVI_GEN_SSP_BO_04	Yes/No	Yes/No		
TC_IS_IVI_GEN_SSP_BO_05	Yes/No	Yes/No		
TC_IS_IVI_GEN_SSP_BO_06	Yes/No	Yes/No		
TP_IS_IVI_RCV_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_IVI_RCV_DATA_BV_01	Yes/No	Yes/No		
TP_IS_IVI_RCV_DATA_BV_02	Yes/No	Yes/No		
TP_IS_IVI_RCV_DATA_BV_03	Yes/No	Yes/No		
TP_IS_IVI_RCV_DATA_BV_04	Yes/No	Yes/No		
TP_IS_IVI_RCV_DATA_BV_05	Yes/No	Yes/No		
TP_IS_IVI_RCV_EVUP_BV_01	Yes/No	Yes/No		
TP_IS_IVI_RCV_EVUP_BV_02	Yes/No	Yes/No		
TP_IS_IVI_RCV_EVUP_BV_03	Yes/No	Yes/No		
TP_IS_IVI_RCV_EVUP_BV_04	Yes/No	Yes/No		
TP_IS_IVI_RCV_EVUP_BV_05	Yes/No	Yes/No		
TP_IS_IVI_RCV_EVUP_BV_06	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BV_01	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BO_01	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BO_02	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BO_03	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BO_04	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BO_05	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BO_06	Yes/No	Yes/No		
TC_IS_IVI_RCV_SSP_BO_07	Yes/No	Yes/No		

Table C.6: SREM and SSEM test cases

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause C.7)
TP_IS_TLCR_GEN_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_GEN_EVGN_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_GEN_EVGN_BV_02	Yes/No	Yes/No		
TP_IS_TLCR_GEN_EVGN_BV_03	Yes/No	Yes/No		
TP_IS_TLCR_GEN_EVGN_BV_04	Yes/No	Yes/No		
TP_IS_TLCR_GEN_EVGN_BV_05	Yes/No	Yes/No		
TP_IS_TLCR_GEN_EVUP_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_GEN_COM_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_GEN_COM_BV_02	Yes/No	Yes/No		
TP_IS_TLCR_GEN_CANC_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_GEN_SEC_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_GEN_SSP_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_GEN_SSP_BV_02	Yes/No	Yes/No		
TP_IS_TLCR_GEN_SSP_BV_02_X	Yes/No	Yes/No		
TP_IS_TLCR_GEN_SEC_BO_03	Yes/No	Yes/No		
TP_IS_TLCR_GEN_SEC_BO_04	Yes/No	Yes/No		
TP_IS_TLCR_GEN_RATE_TI_01	Yes/No	Yes/No		
TP_IS_TLCR_RCV_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_RCV_SSP_BV_01	Yes/No	Yes/No		
TP_IS_TLCR_RCV_SSP_BV_02	Yes/No	Yes/No		
TP_IS_TLCR_RCV_SSP_BV_02_X	Yes/No	Yes/No		
TP_IS_TLCR_RCV_SSP_BO_01	Yes/No	Yes/No		
TP_IS_TLCR_RCV_SSP_BO_02	Yes/No	Yes/No		
TP_IS_TLCS_RCV_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_TLCS_GEN_MSGF_BV_02	Yes/No	Yes/No		
TP_IS_TLCS_GEN_MSGF_BV_03	Yes/No	Yes/No		
TP_IS_TLCS_GEN_COM_BV_01	Yes/No	Yes/No		
TP_IS_TLCS_GEN_COM_BV_02	Yes/No	Yes/No		
TP_IS_TLCS_GEN_EVUP_BV_01	Yes/No	Yes/No		
TP_IS_TLCS_GEN_EVUP_BV_02	Yes/No	Yes/No		
TP_IS_TLCS_GEN_SEC_BV_01	Yes/No	Yes/No		
TP_IS_TLCS_GEN_SSP_BV_01	Yes/No	Yes/No		
TP_IS_TLCS_GEN_RATE_TI_01	Yes/No	Yes/No		
TP_IS_TLCS_GEN_RATE_TI_02	Yes/No	Yes/No		
TP_IS_TLCS_RCV_MSGF_BV_04	Yes/No	Yes/No		
TP_IS_TLCS_RCV_SSP_BO_05	Yes/No	Yes/No		

Table C.7: GPC test cases

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause C.7)
TP_IS_GPC_GEN_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_GPC_GEN_EVGN_BV_01	Yes/No	Yes/No		
TP_IS_GPC_GEN_COM_BV_02	Yes/No	Yes/No		
TP_IS_GPC_GEN_COM_BV_03	Yes/No	Yes/No		
TP_IS_GPC_GEN_SEC_BV_01	Yes/No	Yes/No		
TP_IS_GPC_GEN_SEC_BV_02	Yes/No	Yes/No		
TP_IS_GPC_GEN_SSP_BV_01	Yes/No	Yes/No		
TP_IS_GPC_GEN_SSP_BV_02	Yes/No	Yes/No		
TP_IS_GPC_RCV_MSGF_BV_01	Yes/No	Yes/No		
TP_IS_GPC_RCV_SSP_BV_01	Yes/No	Yes/No		
TP_IS_GPC_RCV_SSP_BO_02	Yes/No	Yes/No		

History

Document history		
V1.1.1	September 2015	Publication
V1.2.1	March 2017	Publication
V1.3.1	November 2021	Publication