

ETSI TS 124 371 V13.2.0 (2016-03)



**Universal Mobile Telecommunications System (UMTS);  
LTE;  
Web Real-Time Communications (WebRTC)  
access to the IP Multimedia (IM) Core Network (CN)  
subsystem (IMS);  
Stage 3;  
Protocol specification  
(3GPP TS 24.371 version 13.2.0 Release 13)**



---

Reference

RTS/TSGC-0124371vd20

---

Keywords

LTE, UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

The present document can be downloaded from:  
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at  
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:  
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016.  
All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.  
**3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.  
**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

|   |    |
|---|----|
| Intellectual Property Rights .....                          | 2  |
| Foreword.....   | 2  |
| Modal verbs terminology.....                                | 2  |
| Foreword.....   | 6  |
| 1 Scope .....   | 7  |
| 2 References .....  | 7  |
| 3 Definitions and abbreviations.....                        | 9  |
| 3.1 Definitions .....                                       | 9  |
| 3.2 Abbreviations .....                                     | 9  |
| 4 Overview of WebRTC access to IMS .....                    | 9  |
| 4.1 General .....   | 9  |
| 5 Functional entities .....                                 | 10 |
| 5.1 General .....   | 10 |
| 5.2 WIC (WebRTC IMS Client) .....                           | 10 |
| 5.3 WWSF (WebRTC Web Server Function) .....                 | 10 |
| 5.4 WAF (WebRTC Authorisation Function) .....               | 10 |
| 5.5 eP-CSCF (P-CSCF enhanced for WebRTC) .....              | 11 |
| 5.6 eIMS-AGW (IMS Access Gateway enhanced for WebRTC) ..... | 11 |
| 5A Data transport .....                                     | 11 |
| 5A.1 General .....  | 11 |
| 5A.2 UE .....   | 11 |
| 5A.3 WWSF (WebRTC Web Server Function) .....                | 11 |
| 5A.4 eP-CSCF (P-CSCF enhanced for WebRTC) .....             | 11 |
| 5B Data framing and securing .....                          | 12 |
| 5B.1 General .....  | 12 |
| 5B.2 UE .....   | 12 |
| 5B.3 WWSF (WebRTC Web Server Function) .....                | 12 |
| 5B.4 eP-CSCF (P-CSCF enhanced for WebRTC) .....             | 12 |
| 5C Data formats .....                                       | 12 |
| 5C.1 General .....  | 12 |
| 5C.2 UE .....   | 12 |
| 5C.3 WWSF (WebRTC Web Server Function) .....                | 13 |
| 5C.4 eP-CSCF (P-CSCF enhanced for WebRTC) .....             | 13 |
| 5D Connection management .....                              | 13 |
| 5D.1 General .....  | 13 |
| 5D.2 UE .....   | 13 |
| 5D.3 WWSF (WebRTC Web Server Function) .....                | 14 |
| 5D.4 eP-CSCF (P-CSCF enhanced for WebRTC) .....             | 14 |
| 5E Presentation and control .....                           | 14 |
| 5E.1 General .....  | 14 |
| 5E.2 UE .....   | 14 |
| 5E.3 WWSF (WebRTC Web Server Function) .....                | 14 |
| 5E.4 eP-CSCF (P-CSCF enhanced for WebRTC) .....             | 14 |
| 5F Local system support functions.....                      | 14 |
| 5F.1 General .....  | 14 |
| 5F.2 UE .....   | 14 |
| 5F.3 WWSF (WebRTC Web Server Function) .....                | 15 |
| 5F.4 eP-CSCF (P-CSCF enhanced for WebRTC) .....             | 15 |

|          |   |    |
|----------|---|----|
| 6        | Registration and authentication .....   | 15 |
| 6.1      | General .....   | 15 |
| 6.2      | WIC (WebRTC IMS Client) .....   | 16 |
| 6.2.1    | WIC registration of individual Public User Identity using IMS authentication .....              | 16 |
| 6.2.1.1  | General .....   | 16 |
| 6.2.1.2  | W2 using SIP Digest credentials .....   | 16 |
| 6.2.1.3  | W2 using IMS-AKA .....  | 16 |
| 6.2.2    | WIC registration of individual public user identity based on web authentication .....           | 16 |
| 6.2.3    | WIC registration of individual public user identity from a pool of public user identities ..... | 17 |
| 6.3      | WWSF (WebRTC Web Server Function) and WAF (WebRTC Authorisation Function) .....                 | 17 |
| 6.3.1    | WIC registration of individual public user identity using web credentials .....                 | 17 |
| 6.3.2    | WIC registration of individual public user identity from a pool of public user identities ..... | 17 |
| 6.4      | eP-CSCF (P-CSCF enhanced for WebRTC) .....  | 17 |
| 6.4.1    | WIC registration of individual Public User Identity using IMS authentication .....              | 17 |
| 6.4.1.1  | Determination of IMS authentication mechanism .....   | 17 |
| 6.4.1.2  | W2 using SIP Digest credentials .....   | 17 |
| 6.4.1.3  | W2 using IMS-AKA .....  | 18 |
| 6.4.2    | WIC registration of individual public user identity using web credentials .....                 | 19 |
| 6.4.3    | WIC registration of individual public user identity from a pool of public user identities ..... | 19 |
| 6A       | Deregistration .....  | 20 |
| 6A.1     | General .....   | 20 |
| 6A.2     | WIC (WebRTC IMS Client) .....   | 20 |
| 6A.3     | eP-CSCF (P-CSCF enhanced for WebRTC) .....  | 20 |
| 7        | Call origination and termination .....  | 20 |
| 7.1      | General .....   | 20 |
| 7.2      | WIC (WebRTC IMS Client) .....   | 21 |
| 7.2.1    | General .....   | 21 |
| 7.2.2    | WIC originating call .....  | 21 |
| 7.2.3    | WIC terminating call .....  | 21 |
| 7.2.4    | WIC emergency call .....  | 21 |
| 7.3      | WWSF (WebRTC Web Server Function) .....   | 22 |
| 7.4      | eP-CSCF (P-CSCF enhanced for WebRTC) .....  | 22 |
| 7.4.1    | General .....   | 22 |
| 7.4.2    | WIC originating call .....  | 22 |
| 7.4.3    | WIC terminating call .....  | 23 |
| 7.4.4    | WIC emergency call .....  | 24 |
| 7.4.5    | Media optimization procedure .....  | 24 |
| 7.4.5.1  | WIC originating call .....  | 24 |
| 7.4.5.2  | WIC terminating call .....  | 26 |
| 8        | Data channel open and close .....   | 28 |
| 8.1      | General .....   | 28 |
| 8.2      | WIC (WebRTC IMS Client) .....   | 28 |
| 8.2.1    | General .....   | 28 |
| 8.2.2    | WIC originating call .....  | 28 |
| 8.2.3    | WIC terminating call .....  | 28 |
| 8.3      | WWSF (WebRTC Web Server Function) .....   | 29 |
| 8.4      | eP-CSCF (P-CSCF enhanced for WebRTC) .....  | 29 |
| 8.4.1    | General .....   | 29 |
| 8.4.2    | WIC originating call .....  | 29 |
| 8.4.3    | WIC terminating call .....  | 29 |
| 9        | Call modification .....   | 30 |
| 10       | IP multimedia application support in the IM CN subsystem using webRTC .....                     | 30 |
| 10.1     | General .....   | 30 |
| 10.2     | Access to MMTel and supplementary services using webRTC .....                                   | 30 |
| 10.2.1   | General .....   | 30 |
| 10.2.2   | WIC (WebRTC IMS Client) .....   | 31 |
| 10.2.2.1 | SIP based protocol used by the WIC .....  | 31 |
| 10.2.2.2 | non-SIP based protocol used by the WIC .....  | 31 |

|  |  |           |
|--|--|-----------|
| 10.2.3   | WWSF (WebRTC Web Server Function) .....  | 31        |
| 10.2.4   | eP-CSCF (P-CSCF enhanced for WebRTC) .....   | 31        |
| <b>Annex A (informative): Example signalling flows .....</b> |  | <b>32</b> |
| A.1  | Scope of signalling flows .....  | 32        |
| A.2  | Void.....  | 32        |
| A.3  | Signalling flows for registration.....   | 32        |
| A.3.1  | Void.....  | 32        |
| A.3.2  | WIC registration of individual public user identity based on web authentication..... | 32        |
| A.3.3  | Void.....  | 34        |
| A.4  | Void.....  | 34        |
| A.5  | Void.....  | 34        |
| <b>Annex B (informative): Change history .....</b>           |  | <b>35</b> |
| History .....  |  | 37        |

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document provides the details for allowing Web Real-Time Communication (WebRTC) IMS Clients (WIC) to access the IP Multimedia (IM) Core Network (CN) subsystem.

The present document is applicable to WebRTC IMS client (WIC), eP-CSCF, eIMS-AGW, WebRTC Web Server Function (WWSF) and WebRTC Authorization Function (WAF).

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] IETF RFC 7118: "The WebSocket Protocol as a Transport for the Session Initiation Protocol (SIP)".
- [3] 3GPP TS 24.229: "IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3".
- [4] 3GPP TS 23.228: "IP Multimedia Subsystem (IMS); Stage 2".
- [5] IETF RFC 5763: "Framework for Establishing a Secure Real-time Transport Protocol (SRTP) Security Context Using Datagram Transport Layer Security (DTLS)".
- [6] IETF RFC 5764: "Datagram Transport Layer Security (DTLS) Extension to Establish Keys for the Secure Real-time Transport Protocol (SRTP)".
- [7] 3GPP TS 22.173: "IP Multimedia Core Network Subsystem (IMS) Multimedia Telephony Service and supplementary services; Stage 1".
- [8] 3GPP TS 24.173: "IMS multimedia telephony communication service and supplementary services; Stage 3".
- [9] 3GPP TS 33.203: "Access security for IP based services".
- [10] RFC 6750 (October 2012): "The OAuth 2.0 Authorization Framework: Bearer Token Usage".
- [11] 3GPP TS 23.292: "IP Multimedia Subsystem (IMS) Centralized Services; Stage 2".
- [12] RFC 5009 (September 2007): "Private Header (P-Header) Extension to the Session Initiation Protocol (SIP) for Authorization of Early Media".
- [13] 3GPP TS 23.334: "IMS Application Level Gateway (IMS-ALG) – IMS Access Gateway (IMS-AGW) interface".
- [14] RFC 4145 (September 2005): "TCP-Based Media Transport in the Session Description Protocol (SDP)".
- [15] RFC 4572 (July 2006): "Connection-Oriented Media Transport over the Transport Layer Security (TLS) Protocol in the Session Description Protocol (SDP)".
- [16] draft-ietf-rtcweb-data-channel-13 (January 2015): "WebRTC Data Channels".



Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[17] draft-ietf-rtcweb-data-protocol-09 (January 2015): "WebRTC Data Channel Establishment Protocol".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[18] draft-ietf-mmusic-sctp-sdp-15 (September 2015): "Stream Control Transmission Protocol (SCTP)-Based Media Transport in the Session Description Protocol (SDP)".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[19] RFC 3261 (June 2002): "SIP: Session Initiation Protocol".

[20] RFC 3264 (June 2002): "An Offer/Answer Model with the Session Description Protocol (SDP)".

[21] RFC 7675 (October 2015): "STUN Usage for Consent Freshness".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[22] RFC 5245 (April 2010): "Interactive Connectivity Establishment (ICE): A Protocol for Network Address Translator (NAT) Traversal for Offer/Answer Protocols".

[23] draft-ietf-tsvwg-sctp-dtls-encaps-09 (January 2015): "DTLS Encapsulation of SCTP Packets".

Editor's note (WI: IMS\_WebRTC): The above document cannot be formally referenced until it is published as an RFC.

[24] RFC 6455 (December 2011): "The WebSocket Protocol".

[25] draft-ietf-mmusic-sdp-bundle-negotiation-23 (July 2015): "Negotiating Media Multiplexing Using the Session Description Protocol (SDP)".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[26] RFC 3581 (August 2003): "An Extension to the Session Initiation Protocol (SIP) for Symmetric Response Routing".

[27] draft-yusef-sipcore-sip-oauth-02 (April 2015): "The Session Initiation Protocol (SIP) OAuth".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[28] RFC 6544 (March 2012): "TCP Candidates with Interactive Connectivity Establishment (ICE)".

[29] Void.

[30] draft-ietf-rtcweb-overview-14 (June 2015): "Overview: Real Time Protocols for Browser-based Applications".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[31] draft-ietf-rtcweb-gateways-01 (July 2015): "WebRTC Gateways".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[32] RFC 3310 (September 2002): "Hypertext Transfer Protocol (HTTP) Digest Authentication Using Authentication and Key Agreement (AKA)".

[33] RFC 4169 (November 2005): "Hypertext Transfer Protocol (HTTP) Digest Authentication Using Authentication and Key Agreement (AKA) Version-2".

[34] 3GPP TS 26.114: "IP multimedia subsystem (IMS); Multimedia telephony, Media handling and interaction".

[35] RFC 7519 (May 2015): "JSON Web Token (JWT)".

[36] draft-ietf-mmusic-data-channel-sdpneg-06 (October 2015): "SDP-based Data Channel Negotiation".

Editor's note [WI: eWebRTC<sub>i</sub>\_CT, CR#0042]: The above document cannot be formally referenced until it is published as an RFC.

[37] draft-ietf-mmusic-msrp-usage-data-channel-02 (September 2015): "MSRP over Data Channels".

Editor's note [WI: eWebRTC<sub>i</sub>\_CT, CR#0042]: The above document cannot be formally referenced until it is published as an RFC.

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.228 [4] annex U apply:

**P-CSCF enhanced for WebRTC (eP-CSCF)**  
**WebRTC Authorization Function (WAF)**  
**WebRTC IMS Client (WIC)**  
**WebRTC Web Server Function (WWSF)**

Editor's note: Terminology from draft-ietf-rtcweb-overview needs to be endorsed as part of the terminology of this document. This document uses the terms "WebRTC device" which it is understood will be changed to "non-WebRTC browser".

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

|         |                                     |
|---------|-------------------------------------|
| CN      | Core Network                        |
| CSCF    | Call Session Control Function       |
| DCEP    | Data Channel Establishment Protocol |
| eP-CSCF | enhanced Proxy CSCF                 |
| IM      | IP Multimedia                       |
| IP      | Internet Protocol                   |
| WAF     | WebRTC Authorization Function       |
| WebRTC  | Web Real-Time Communication         |
| WWSF    | WebRTC Web Server Function          |

## 4 Overview of WebRTC access to IMS

### 4.1 General

The relationship between functional entities for the interface at the W1 reference point, between the WWSF and the UE, the interface at the W2 reference point, between the eP-CSCF and the UE, the interface at the W3 reference point, between the UE and the eIMS-AGW, and the interface at the W4 reference point, between the WWSF and the WAF, are defined in annex U of 3GPP TS 23.228 [4].

The relationship between the functional entities for interface at the Mw reference point, between the eP-CSCF and the remainder of the IP multimedia core network subsystem, is defined in 3GPP TS 23.228 [4].

A number of appropriate mechanisms exist for signalling communication between the WIC and the eP-CSCF. Successful use of a mechanism other than those specified in this document will require some form of prior agreement between the operator of the WWSF and the operator of the eP-CSCF, as to the nature of the signalling mechanism that is to be adopted, and therefore the interworking required at the eP-CSCF. The mechanism of prior agreement and the nature of such agreement is not defined in this document.

A signalling transport mechanism for SIP is standardised in this release of this document, i.e. SIP over websockets (see RFC 7118 [2]), but this is not a mechanism that has to be supported by all eP-CSCFs.

When SIP over websockets is used, it can be appropriate for the SIP used to conform to the definitions for SIP on the Gm reference point as specified in 3GPP TS 24.229 [3]. Such a requirement is not mandatory, but where other SIP mechanisms are used:

- a) the usage will require some form of prior agreement with the operator of the eP-CSCF, as to the nature of the signalling mechanism that is to be adopted; and
- b) the SIP mechanisms will have to enable the eP-CSCF to conform to the SIP requirements over the Mw reference point to the remainder of the IP multimedia core network subsystem as specified in 3GPP TS 24.229 [3].

SDP is used for the signalling session information between the WIC and the eP-CSCF. Such SDP conforms to requirements for SDP on the Gm reference point.

---

## 5 Functional entities

### 5.1 General

### 5.2 WIC (WebRTC IMS Client)

A WebRTC IMS Client (WIC) establishing the service control signalling path over W2 interface, that is compliant with this specification shall implement the role of WIC capabilities defined in subclause 6.2, subclause 7.2 and subclause 8.2.

Where SIP over websockets is used, as specified in RFC 7118 [2], and no alternative SIP profiles have been agreed between the operator of the eP-CSCF and the operator of the WWSF, then the SIP used by the WIC over the W2 reference point shall conform to the requirements for UE over the Gm reference point as specified in 3GPP TS 24.229 [3].

When the WebSocket protocol is used, the WIC shall act as a WebSocket Client, as defined in RFC 6455 [24].

The SDP used shall conform to the requirements for UE over the Gm reference point as specified in 3GPP TS 24.229 [3] and further specified in the present document.

### 5.3 WWSF (WebRTC Web Server Function)

The WebRTC Web Server Function (WWSF) is the initial point of contact in the Web that controls access to the IMS communications services for the WIC as specified in 3GPP TS 23.228 [4].

### 5.4 WAF (WebRTC Authorisation Function)

The WebRTC Authorisation Function (WAF) issues authorization tokens that are provided to the WIC via the WWSF as specified in 3GPP TS 23.228 [4] and 3GPP TS 33.203 [9].

NOTE: The WWSF and the WAF realisations can be physically co-located or physically separate.

## 5.5 eP-CSCF (P-CSCF enhanced for WebRTC)

For the Mw reference point, the eP-CSCF shall conform to the requirements for the P-CSCF as specified in 3GPP TS 24.229 [3].

Where SIP over websockets is used, as specified in RFC 7118 [2], and no alternative SIP profile have been agreed between the operator of the eP-CSCF and the operator of the WWSF, then the SIP used by the eP-CSCF over the W2 reference point shall conform to the requirements for P-CSCF over the Gm reference point as specified in 3GPP TS 24.229 [3].

The SDP used by the eP-CSCF over the W2 reference point shall conform to the requirements for UE over the Gm reference point as specified in 3GPP TS 24.229 [3] and further specified in the present document.

## 5.6 eIMS-AGW (IMS Access Gateway enhanced for WebRTC)

The functionality of the eIMS-AGW is specified in 3GPP TS 23.228 [4] and in 3GPP TS 23.334 [13].

---

# 5A Data transport

## 5A.1 General

Data transport is the support of TCP, UDP and the means to securely set up connections between entities, as well as the functions for deciding when to send data: Congestion management, bandwidth estimation and so on.

## 5A.2 UE

A UE supporting WebRTC shall support the WebRTC device functionality as specified in draft-ietf-rtcweb-overview [30] clause 4, excluding requirements, if any, relating to specific audio and video codecs that are indirectly referenced within the draft-ietf-rtcweb-overview [30] clause 4.

**Editor's note:** This clause references draft-ietf-rtcweb-transports-06 which uses the terminology "WebRTC browser", "WebRTC endpoint" and "WebRTC device" for both ends of the transport. STUN and TURN introduce further "server" and "client" terminology that has to be allowed for.

## 5A.3 WWSF (WebRTC Web Server Function)

There are no data transport requirements for the WWSF.

**NOTE:** Any application downloaded from the WWSF that requires data transport is expected to use it in accordance with WebRTC device support of data transport.

## 5A.4 eP-CSCF (P-CSCF enhanced for WebRTC)

The eP-CSCF and eIMS-AGW in conjunction shall support the WebRTC gateway functionality as specified in draft-ietf-rtcweb-overview [30] clause 4 as modified by draft-ietf-rtcweb-gateways [31], excluding requirements, if any, relating to specific audio and video codecs that are indirectly referenced within the draft-ietf-rtcweb-overview [30] clause 4.

---

## 5B Data framing and securing

### 5B.1 General

Data framing RTP and other data formats that serve as containers, and their functions for data confidentiality and integrity.

### 5B.2 UE

A UE supporting WebRTC shall support the WebRTC endpoint functionality as specified in draft-ietf-rtcweb-overview [30] clause 5, excluding requirements, if any, relating to specific audio and video codecs that are indirectly referenced within the draft-ietf-rtcweb-overview [30] clause 5.

**Editor's note:** This clause references RFC 3550 which uses the terminology "RTP implementation" for both ends of the RTP. This clause references draft-ietf-rtcweb-rtp-usage which uses the terminology "WebRTC endpoint" for both ends of the RTP, but also uses other terms e.g. "RTP endpoint".

### 5B.3 WWSF (WebRTC Web Server Function)

There are no data framing requirements for the WWSF.

**NOTE:** Any application downloaded from the WWSF that requires data framing is expected to use it in accordance with WebRTC device support of data framing.

### 5B.4 eP-CSCF (P-CSCF enhanced for WebRTC)

The eP-CSCF and eIMS-AGW in conjunction shall support the WebRTC gateway functionality as specified in draft-ietf-rtcweb-overview [30] clause 5 as modified by draft-ietf-rtcweb-gateways [31] and excluding requirements, if any, relating to specific audio and video codecs that are indirectly referenced within the draft-ietf-rtcweb-overview [30] clause 5.

---

## 5C Data formats

### 5C.1 General

Data format is codec specifications, format specifications and functionality specifications for the data passed between systems. audio and video codecs, as well as formats for data and document sharing, belong in this category.

### 5C.2 UE

A UE supporting WebRTC shall support the WebRTC device functionality as specified in draft-ietf-rtcweb-overview [30] clause 6, excluding requirements to implement specific audio and video codecs.

A UE offering WebRTC access to the IMS via GPRS IP-CAN (as described in 3GPP TS 24.229 [3], annex B), EPS IP-CAN (as described in 3GPP TS 24.229 [3], annex L), or EPC via WLAN IP-CAN (as described in 3GPP TS 24.229 [3], annex R) shall support the speech codecs according to 3GPP TS 26.114 [34] clause 5 and the front-end handling as specified in 3GPP TS 26.114 [34] clause 11.

A UE offering WebRTC access to the IMS via xDSL, Fiber or Ethernet IP-CAN (as described in 3GPP TS 24.229 [3], annex E) shall support the speech codecs according to 3GPP TS 26.114 [34] clause 18.

A UE supporting WebRTC access to the IMS via GPRS IP-CAN (as described in 3GPP TS 24.229 [3], annex B), EPS IP-CAN (as described in 3GPP TS 24.229 [3], annex L), or EPC via WLAN IP-CAN (as described in 3GPP TS 24.229 [3], annex R) and supporting video communication shall support the video codecs according to 3GPP TS 26.114 [34].

A UE supporting WebRTC access to the IMS via xDSL, Fiber or Ethernet IP-CAN (as described in 3GPP TS 24.229 [3], annex E) and supporting video communication shall support the video codecs according to 3GPP TS 26.114 [34] clause 18.

**Editor's note:** This clause references draft-ietf-rtcweb-audio which uses the terminology "WebRTC clients" for both ends of the RTP. The terminology used here needs to be aligned to cater for these inconsistencies.

**NOTE:** Media related requirements related to specific codecs, if any, to be supported by a UE supporting WebRTC access to the IMS via IP-CAN other than GPRS IP-CAN, other than EPS IP-CAN, other than EPC via WLAN IP-CAN and other than xDSL, Fiber or Ethernet IP-CAN are out of scope of this specification.

## 5C.3 WWSF (WebRTC Web Server Function)

There are no data format requirements for the WWSF.

**NOTE:** Any application downloaded from the WWSF that requires data formats is expected to use it in accordance with WebRTC device support of data formats.

## 5C.4 eP-CSCF (P-CSCF enhanced for WebRTC)

The eP-CSCF and eIMS-AGW in conjunction shall support the WebRTC gateway functionality as specified in draft-ietf-rtcweb-overview [30] clause 6 as modified by draft-ietf-rtcweb-gateways [31], excluding requirements to implement specific audio and video codecs.

An eP-CSCF and eIMS-AGW supporting UEs offering WebRTC access to the IMS via GPRS IP-CAN (as described in 3GPP TS 24.229 [3], annex B), EPS IP-CAN (as described in 3GPP TS 24.229 [3], annex L), or EPC via WLAN IP-CAN (as described in 3GPP TS 24.229 [3], annex R) shall support the codecs according to 3GPP TS 26.114 [34] clause 5.

An eP-CSCF and eIMS-AGW supporting UEs offering WebRTC access to the IMS via xDSL, Fiber or Ethernet IP-CAN (as described in 3GPP TS 24.229 [3], annex E) shall support the codecs according to 3GPP TS 26.114 [34] clause 18.

An eP-CSCF receiving an SDP offer from the IMS core network should retain the received codecs in the SDP offer it sends towards the UE to avoid transcoding.

**NOTE:** Media related requirements related to specific codecs, if any, to be supported by a eP-CSCF supporting WebRTC access to the IMS via IP-CAN other than GPRS IP-CAN, other than EPS IP-CAN, other than EPC via WLAN IP-CAN, and other than xDSL, Fiber or Ethernet IP-CAN are out of scope of this specification.

---

# 5D Connection management

## 5D.1 General

Connection management is setting up connections, agreeing on data formats, changing data formats during the duration of a call; SIP and Jingle/XMPP belong in this category.

## 5D.2 UE

A UE supporting WebRTC shall support the WebRTC browser or WebRTC device functionality as specified in draft-ietf-rtcweb-overview [30] clause 7 as appropriate, excluding requirements, if any, relating to specific audio and video codecs that are indirectly referenced within the draft-ietf-rtcweb-overview [30] clause 7.

**Editor's note:** This clause references draft-ietf-rtcweb-jsep which uses the terminology "browser". The terminology used here needs to be aligned to cater for these inconsistencies.

## 5D.3 WWSF (WebRTC Web Server Function)

There are no connection management requirements for the WWSF.

NOTE: Any application downloaded from the WWSF that requires connection management is expected to use it in accordance with WebRTC device support of connection management.

## 5D.4 eP-CSCF (P-CSCF enhanced for WebRTC)

The eP-CSCF and eIMS-AGW in conjunction shall support the WebRTC gateway functionality as specified in draft-ietf-rtcweb-overview [30] clause 7 as modified by draft-ietf-rtcweb-gateways [31] and excluding requirements, if any, relating to specific audio and video codecs that are indirectly referenced within the draft-ietf-rtcweb-overview [30] clause 7.

---

# 5E Presentation and control

## 5E.1 General

Presentation and control is what needs to happen in order to ensure that interactions behave in a non-surprising manner. This can include floor control, screen layout, voice activated image switching and other such functions - where part of the system require the cooperation between parties.

## 5E.2 UE

A UE supporting WebRTC as a WebRTC browser shall support the WebRTC browser functionality as specified in draft-ietf-rtcweb-overview [xx] clause 8.

*Editor's note: This clause only references APIs produced by W3C.*

## 5E.3 WWSF (WebRTC Web Server Function)

There are no presentation and control requirements for the WWSF.

NOTE: Any application downloaded from the WWSF that requires presentation and control is expected to use it in accordance with WebRTC browser support of presentation and control.

## 5E.4 eP-CSCF (P-CSCF enhanced for WebRTC)

There are no presentation and control requirements for the eP-CSCF.

---

# 5F Local system support functions

## 5F.1 General

Local system support functions is what needs to happen in order to ensure that interactions behave in a non-surprising manner. This can include floor control, screen layout, voice activated image switching and other such functions - where part of the system require the cooperation between parties.

## 5F.2 UE

*Editor's note (WID:IMS-WebRTC, CR#0003): reference to the draft-ietf-rtcweb-overview [30], clause 9 is FFS. The current version of the draft-ietf-rtcweb-overview [30], clause 9 does not contain any requirements that need to be referenced.*

Void.

## 5F.3 WWSF (WebRTC Web Server Function)

Editor's note (WID:IMS-WebRTC, CR#0003): reference to the draft-ietf-rtcweb-overview [30], clause 9 is FFS. The current version of the draft-ietf-rtcweb-overview [30], clause 9 does not contain any requirements that need to be referenced.

There are no local system support requirements for the WWSF.

## 5F.4 eP-CSCF (P-CSCF enhanced for WebRTC)

There are no local system support functions for the eP-CSCF.

---

# 6 Registration and authentication

## 6.1 General

This clause specifies procedures that are related to registration of a WIC in the IM CN subsystem that are required for support of WebRTC.

There are the following IMS registration scenarios defined in 3GPP TS 23.228 [4] Annex U. 3GPP TS 33.203 [9] specifies the following authentication methods applying to different IMS registration scenarios separately.

a) Scenario 1: The WIC registration of individual public user identity using IMS authentication. There are two authentication methods specified in 3GPP TS 33.203 [9], corresponding to this scenario:

- 1) SIP Digest authentication scheme; and
- 2) use of IMS AKA authentication scheme.

b) scenario 2: The WIC registration of individual public user identity based on web authentication.

- 1) Web authentication scheme: The registration procedure between the eP-CSCF and the IM CN subsystem reuses the Trusted Node Authentication (TNA) procedure specified in 3GPP TS 33.203 [9]; or

c) scenario 3: The WIC registration of individual public user identity from a pool of public user identities.

1) Web authentication scheme: The registration procedure between the eP-CSCF and the IM CN subsystem reuses the Trusted Node Authentication (TNA) procedure specified in 3GPP TS 33.203 [9]. The registration procedure of scenario 3 is basically the same with scenario 2, with the difference that, in scenario 3 it is assumed that the WWSF is provided with a pool of public user identities and can assign public user identities within this pool. In all the registration scenarios, it is assumed that HTTP or HTTPS connection is used between the WIC and the WWSF, where HTTPS connection is recommended due to the security considerations.

The structure of subclause 6 is divided by functional entity as the first level, and in each subclause of a specific functional entity, all the authentication solutions are described in the sequence of registration scenarios.

As the media plane security mechanisms for WebRTC, i.e. DTLS-SRTP for RTP based media and DTLS/SCTP for non-RTP based media, are mandatory to be supported in WIC and eP-CSCF, there is no need to indicate the media plane security mechanisms in the Security-Client header field of the REGISTER request and in the Security-Server header field of the 200 (OK) response to the REGISTER request.

The WIC and the eP-CSCF using Gm shall follow the registration procedures as described in 3GPP TS 24.229 [3] and the procedures as described in this document in addition. For the WIC and eP-CSCF using Gm, the appropriate signalling protocol is defined in 3GPP TS 24.229 [3] and this document.

For the WIC and eP-CSCF using non-Gm or non-SIP, the registration procedures and the signalling protocol are out of scope of this document.



## 6.2 WIC (WebRTC IMS Client)

### 6.2.1 WIC registration of individual Public User Identity using IMS authentication

#### 6.2.1.1 General

When using SIP over Websockets as signalling protocol on the W2 interface:

- 1) when the WIC uses registration using SIP Digest it shall follow the procedures as described in subclause 6.2.1.2; and
- 2) when the WIC uses registration using IMS-AKA it shall follow the procedures described in subclause 6.2.1.3.

#### 6.2.1.2 W2 using SIP Digest credentials

When using SIP over Websockets as signalling protocol on the W2 interface and using registration based on SIP Digest credentials, the WIC shall use the procedures for "SIP Digest without TLS" as specified in 3GPP TS 24.229 [3].

NOTE: The WIC uses the TLS connection that was established during the WebSocket connection setup.

#### 6.2.1.3 W2 using IMS-AKA

When using SIP over Websockets as signalling protocol on the W2 interface and when IMS AKA is used for authenticating the WIC, the WIC shall use the IMS-AKA procedures defined in 3GPP TS 24.229 [3] with the following modifications:

- 1) HTTP Digest AKA<sub>v2</sub> as defined in RFC 4169 [yy] is used instead of HTTP Digest AKA defined in RFC 3310 [xx]; and
- 2) IPsec security association set-up is not performed at the final stage of the authentication.

NOTE: The WIC uses the TLS connection that was established during the WebSocket connection setup to protect the IMS signalling between the WIC and the eP-CSCF.

On sending a REGISTER request as defined in 3GPP TS 24.229 [3] for IMS AKA, the WIC shall:

- 1) additionally populate the Authorization header field with the "algorithm" header field parameter set to "AKAv2-SHA-256" as defined in RFC 4169 [yy]; and
- 2) not include the Security-Client header in the REGISTER request.

On receiving the 200 (OK) response to the REGISTER request the WIC shall not set the IPsec security association and associated lifetime.

### 6.2.2 WIC registration of individual public user identity based on web authentication

In this subclause it is assumed that SIP over Websockets is used as the signalling protocol on the W2 interface and the user has a subscription with an individual IMPU, but uses a web identity and authentication scheme, e.g. OAuth 2.0, to authenticate with the WWSF or the WAF.

As specified in 3GPP TS 33.203 [9], after receiving the authorization token from WWSF, which is issued by WAF, the WIC shall:

- send a SIP REGISTER request to the eP-CSCF via the Websockets connection, which includes:
  - i) the authorization token as described in draft-yusef-sipcore-sip-oauth [27]; and
  - ii) values for the To header field and the From header field decided by the UE implementation.

NOTE: The WIC can use the authorization token to form the values of the To header field and the From header field.

Editor's note: The draft-yusef-sipcore-sip-oauth has not been well defined yet, so how to include the authorization token in SIP REGISTER request message still needs ffs.

### 6.2.3 WIC registration of individual public user identity from a pool of public user identities

In this scenario it is assumed that the WWSF is provided with a pool of public user identities and can assign public user identities within this pool. The WIC procedure is as specified in subclause 6.2.2, with the difference that the public user identity (and private user identity) is temporarily assigned to the user and there is no linkage between the user's web identity that may be authenticated by an authentication service and the assigned IMS identities.

## 6.3 WWSF (WebRTC Web Server Function) and WAF (WebRTC Authorisation Function)

### 6.3.1 WIC registration of individual public user identity using web credentials

The WWSF pushes WebRTC JavaScript to the WIC, authenticates the WIC's web credentials and forwards the authorization token to the WIC which is issued by WAF. Detailed web authentication procedures related to the WWSF in W1 and W4 interface are described in 3GPP TS 33.203 [9] and will not be specified in this document.

### 6.3.2 WIC registration of individual public user identity from a pool of public user identities

The WWSF and the WAF procedure is the same as specified in subclause 6.3.1, with the exception that in this scenario the WAF authenticates only the WWSF without user involvement, and the WWSF may choose not to authenticate the user if the user is to remain anonymous.

## 6.4 eP-CSCF (P-CSCF enhanced for WebRTC)

### 6.4.1 WIC registration of individual Public User Identity using IMS authentication

#### 6.4.1.1 Determination of IMS authentication mechanism

When the eP-CSCF receives a REGISTER request using SIP over Websockets as signalling protocol on the W2 interface, the eP-CSCF determines which IMS authentication mechanism to use as described in annex P of 3GPP TS 33.203 [9].

#### 6.4.1.2 W2 using SIP Digest credentials

When the eP-CSCF receives a REGISTER request for "SIP Digest with TLS" using SIP over Websockets as signalling protocol on the W2 interface, then the procedures as defined in 3GPP TS 24.229 [3] subclause 5.2.2 apply. In addition the eP-CSCF shall:

- 1) if the REGISTER request was received on a pre-established TLS then:
  - a) if the REGISTER request does not map to an existing TLS association, and does not contain a challenge response, not include the "integrity-protected" header field parameter;
  - b) if the REGISTER request does not map to an existing TLS association, and does contain a challenge response, include an "integrity-protected" header field parameter with the value set to "tls-pending";

- c) if the REGISTER request does map to an existing TLS association, include an "integrity-protected" header field parameter with the value set to "tls-protected";
- d) if the "rport" header field parameter is included in the Via header field, set the value of the "rport" header field parameter in the Via header field to the source port of the received REGISTER request; and
- e) insert the "received" header field parameter in the Via header field containing the source IP address that the request came from, as defined in RFC 3581 [26].

NOTE: As defined in RFC 3581 [26], the P-CSCF will insert a "received" header field parameter containing the source IP address that the request came from, even if it is identical to the value of the "sent-by" component.

When the eP-CSCF receives a 401 (Unauthorized) response to a REGISTER request, the eP-CSCF shall:

- 1) send the 401 (Unauthorized) response to the UE using the TLS session with which the associated REGISTER request was protected.

When the eP-CSCF receives a 200 (OK) response to a REGISTER request as defined, and the registration expiration interval value is different than zero, the eP-CSCF shall additionally:

- create an TLS association by storing and associating the UEs IP address and port of the TLS connection with the TLS Session ID, the private user identity and all the successfully registered public user identities related to that private user identity; and
- send the 200 (OK) response to the REGISTER request within the same TLS session to that in which the request was protected.

### 6.4.1.3 W2 using IMS-AKA

When the eP-CSCF receives a REGISTER request from the WIC for IMS-AKA over a TLS session set-up prior registration:

- 1) not including the Security Client header field; and
- 2) containing an Authorization header field with an "algorithm" header field parameter set to "AKAv2-SHA-256";

the eP-CSCF shall:

- a) include the "integrity-protected" header field parameter with the value set to "tls-connected" in the Authorization header field;
- b) if the "rport" header field parameter is included in the Via header field, then set the value of the "rport" header field parameter in the Via header field to the source port of the received REGISTER request; and
- c) insert the "received" header field parameter in the Via header field containing the source IP address that the request came from, as defined in RFC 3581 [26]:

NOTE: As defined in RFC 3581 [26], the P-CSCF will insert a "received" header field parameter containing the source IP address that the request came from, even if it is identical to the value of the "sent-by" component.

before forwarding the REGISTER request.

When the eP-CSCF receives a 401 (Unauthorized) response to a REGISTER request, the eP-CSCF shall:

- 1) send the 401 (Unauthorized) response to the UE using the TLS session with which the associated REGISTER request was protected.

When the eP-CSCF receives a 200 (OK) response to a REGISTER request, and the registration expiration interval value is different than zero, the eP-CSCF shall additionally:

- create an association by storing and associating the UEs IP address and port of the TLS connection with the TLS Session ID, the private user identity and all the successfully registered public user identities related to that private user identity; and

- protect the 200 (OK) response to the REGISTER request within the same TLS session to that in which the request was protected.

## 6.4.2 WIC registration of individual public user identity using web credentials

In this subclause it is assumed that SIP over Websockets is used as the signalling protocol on the W2 interface. Upon receiving the SIP REGISTER request from the WIC, the eP-CSCF shall extract the authorization token and validate it as specified in 3GPP TS 33.203 [9] Annex X. If the authorization token is verified valid, the eP-CSCF obtains the associated authorization information, including the private user identity and public user identity of the associated user, the WAF and WWSF identities, and the authorization information scope.

The eP-CSCF inserts the obtained private user identity and public user identity in the SIP REGISTER request, where the Authorization header in SIP REGISTER request, as specified in 3GPP TS 33.203 [9] Annex U, contains the private user identity, and the To and From header fields in the SIP REGISTER request contains the public user identity.

NOTE: The eP-CSCF will overwrite the To header field and From header field values received in the SIP REGISTER request from the WIC.

Then the eP-CSCF performs as the trusted node in TNA scheme specified in 3GPP TS 33.203 [9] Annex U. The eP-CSCF forwards the SIP REGISTER request to the S-CSCF as specified in 3GPP TS 24.229 [3], where the Authorization header in SIP REGISTER request, as specified in 3GPP TS 33.203 [9] Annex U, contains the user's private user identity, an "integrity-protected" header field set to "auth-done ", and an empty "response" header field.

If the WAF, which authorizes the WIC to access the IMS core and issues the authorization token, is located in third party domain, the eP-CSCF shall also include the WAF identity in the REGISTER request, using a JSON Web Token [35] with a "3gpp-waf" JSON Web Token claim [3] set to the value of the WAF identity. The eP-CSCF shall include the JSON Web Token in the REGISTER request as a MIME body with an "application/jwt" MIME value [35].

If the WWSF, which authorizes the WIC to access the IMS core and issues the authorization token, is located in third party domain, the eP-CSCF shall also include the WWSF identity in the REGISTER request, using a JSON Web Token with a "3gpp-wwsf" JSON Web Token claim [3] set to the value of the WWSF identity. The eP-CSCF shall include the JSON Web Token in the REGISTER request as a MIME body with an "application/jwt" MIME value [35].

If the eP-CSCF includes a JSON Web Token in the REGISTER request, it shall include a JSON Web Token header "alg" property with a "none" value. In addition, the eP-CSCF shall not calculate and include a signature in the JSON Web Token, as described in [35].

NOTE: If the eP-CSCF includes both the WAF identity and the WWSF identity in the REGISTER request then both identities are placed in the same JSON Web Token.

Upon receiving the SIP 200 (OK) response from the S-CSCF, the eP-CSCF forwards SIP 200 (OK) response to the WIC. When TLS is used between the WIC and the eP-CSCF, the eP-CSCF shall additionally create an association between the UE and the TLS connection as specified in 3GPP TS 24.229 [3] subclause 5.2.2.4.

## 6.4.3 WIC registration of individual public user identity from a pool of public user identities

As specified in subclause 6.4.2 with the following addition:

- An as option, upon receiving the SIP REGISTER request from the WIC, if the registration expiration interval (specified in 3GPP TS 24.229 [3]) contains a value higher than the lifetime of the authorization token, then in order to allow the WWSF to know when to re-assign a public user identity and private user identity to another user, the eP-CSCF may set a value for the registration expiration interval in the SIP REGISTER request equal to the lifetime of the authorization token. Other options may exist.

---

## 6A Deregistration

### 6A.1 General

This clause specifies procedures that are related to deregistration in the IM CN subsystem that are required for support of WebRTC.

The WIC and the eP-CSCF using Gm shall follow the deregistration procedures as described in 3GPP TS 24.229 [3] and the procedures as described in this document in addition. For the WIC and the eP-CSCF using Gm, the appropriate signalling protocol is defined in 3GPP TS 24.229 [3] and this document.

For the WIC and eP-CSCF using non-Gm or non-SIP, the deregistration procedures and the signalling protocol are out of scope of this document.

### 6A.2 WIC (WebRTC IMS Client)

It is assumed that the WIC has previously registered, and the signalling protocol between the WIC and the eP-CSCF applies SIP over WebSockets where the SIP procedures conform to the definitions for SIP on the Gm reference point as specified in 3GPP TS 24.229 [3].

The WIC shall follow the deregistration procedures specified in 3GPP TS 24.229 [3] subclause 5.1.1.6 and subclause 5.1.1.7.

If the WIC have no more public user identities registered in the IM CN subsystem, the WebSockets connection between the WIC and the eP-CSCF shall be removed.

### 6A.3 eP-CSCF (P-CSCF enhanced for WebRTC)

The eP-CSCF shall follow the deregistration procedures specified in 3GPP TS 24.229 [3] subclause 5.2.5.1 and subclause 5.2.5.2.

**NOTE:** In the scenario that individual public user identity is assigned by the WWSF or the WAF from a pool of public user identities, as an implementation specific option, when the public user identity has been deregistered in the IM CN subsystem, the eP-CSCF can indicate to the WAF that a certain public user identity can be re-assigned, while the procedures for the interface between the eP-CSCF and the WAF is out of scope of this specification.

---

## 7 Call origination and termination

### 7.1 General

This clause specifies procedures that are related to call origination and termination in the IM CN subsystem that are required for support of WebRTC.

It is assumed that prior to the call origination and termination procedure, a WebSockets connection has been established between the WIC and the eP-CSCF. The call control signalling between the WIC and the eP-CSCF is transport over the WebSockets connection.

The WIC shall support ICE procedures as described in RFC 5245 [22] and RFC 6544 [28], with the additions specified in RFC 7675 [21]. The WIC shall perform ICE procedures when initiated by other subclauses in this document.

## 7.2 WIC (WebRTC IMS Client)

### 7.2.1 General

The WIC shall support RFC 5763 [5] and RFC 5764 [6].

The WIC using Gm shall follow the procedures as described in 3GPP TS 24.229 [3]. For the WIC using Gm, the appropriate signalling protocol is defined in 3GPP TS 24.229 [3].

The WIC using non-Gm SIP shall support RFC 3261 [19]. For the WIC using non-Gm, the appropriate signalling protocol is defined in RFC 3261 [19].

The WIC using non-SIP shall support RFC 3264 [20]. For the WIC using non-SIP, the appropriate signalling protocol is out of scope of this specification.

### 7.2.2 WIC originating call

When the WIC originates a call, the WIC shall:

- a) perform the ICE procedures as defined in RFC 5245 [22] and possibly RFC 6544 [28]; and
- b) generate an SDP offer and send it towards the eP-CSCF using the appropriate signalling protocol as described in subclause 7.2.1.

Upon generating an SDP offer with RTP based media, for each RTP based media, the WIC

- a) shall offer UDP transport protocol according RFC 5763 [5], with the proto field in the "m=" line containing the "UDP/TLS/RTP/SAVPF" value according to RFC 5764 [6];
- b) may additionally, within the same "m=" line, offer TCP transport protocol with appropriate ICE candidates according to RFC 6544 [28]; and
- c) shall additionally, within the same "m=" line, indicate an SDP "a=3ge2ae:requested" attribute.

### 7.2.3 WIC terminating call

Upon receipt of an SDP offer, the WIC shall:

- a) perform the ICE procedures as defined in RFC 5245 [22] and possibly RFC 6544 [28]; and
- b) generate an SDP answer and send it towards the eP-CSCF using the appropriate signalling protocol as described in subclause 7.2.1.

Upon receiving an SDP offer containing an RTP based media:

- transported using RFC 5763 [5], with the proto field in the "m=" line containing the "UDP/TLS/RTP/SAVPF" value according to RFC 5764 [6]; and
- with the SDP "a=3ge2ae:applied" attribute;

and if the UE accepts the RTP based media, then the UE shall generate the SDP answer with the related RTP based media transported. In order to do so, the UE:

- a) shall use RFC 5763 [5], and provide the proto field in the "m=" line containing the "UDP/TLS/RTP/SAVPF" value according to RFC 5764 [6]; and
- b) may additionally, within the same "m=" line, offer TCP transport protocol with appropriate ICE candidates according to RFC 6544 [28].

### 7.2.4 WIC emergency call

A WIC shall not attempt to establish a session when the WIC can detect that the number dialled is an emergency number.

NOTE 1: Emergency calls originated from a WIC are not supported in this version of the specification.

If a WIC

- a) receives a response indicating that a UE non detected emergency call has happened and was not supported by the network; and
- b) supports detecting such responses as indicating UE non detected emergency call;

then the WIC shall:

- 1) indicate to the user that an attempt for an UE non detected emergency call has happened and was not supported by the network; and
- 2) not retry the emergency call via W2 interface.

If Gm based W2 is used, then the response indicating rejection of a request for a UE non detected emergency call is a 380 (Alternative Service) response with contents as specified in 3GPP TS 24.229 [3] subclause 5.2.10.4.

NOTE 2: The details how to indicate the rejection of a UE non detected emergency call to the user are not specified.

## 7.3 WWSF (WebRTC Web Server Function)

No additional procedure is specified for WWSF.

## 7.4 eP-CSCF (P-CSCF enhanced for WebRTC)

### 7.4.1 General

The eP-CSCF using Gm towards the WIC shall follow the procedures as described in 3GPP TS 24.229 [3]. For the eP-CSCF using Gm, the appropriate signalling protocol is defined in 3GPP TS 24.229 [3].

The eP-CSCF using non-Gm SIP towards the WIC shall support RFC 3261 [19]. For the eP-CSCF using non-Gm, the appropriate signalling protocol is defined in RFC 3261 [19].

The eP-CSCF using non-SIP towards the WIC shall support RFC 3264 [20]. For the eP-CSCF using non-SIP, the appropriate signalling protocol is out of scope of this specification.

The eP-CSCF shall support RFC 5763 [5] and RFC 5764 [6].

Support of media plane optimization as specified in 3GPP TS 23.228 [4] is optional. If the eP-CSCF supports media plane optimization, then the eP-CSCF shall in addition to the procedures in subclauses 7.4.2 and 7.4.3 apply the procedures in subclause 7.4.5.

### 7.4.2 WIC originating call

Upon receipt of an SDP offer, the eP-CSCF shall:

- a) perform ICE procedures as defined in 3GPP TS 24.229 [3];
- b) not perform OMR procedures; and
- c) generate an SDP offer based on the SDP offer received from the WIC and forward it using the appropriate signalling protocol as described in subclause 7.4.1. The eP-CSCF shall replace the SDP offer with updated SDP provided by eIMS-AGW, which contains the eIMS-AGW IP addresses and ports. The eP-CSCF shall not use bundled media as described in draft-ietf-mmusic-sdp-bundle-negotiation [25], i.e. the eP-CSCF shall remove the SDP group attribute BUNDLE value, and any m- line that in the received SDP offer contained an SDP "bundle-only" attribute, from the SDP offer.

NOTE: At this point, the eP-CSCF interacts with eIMS-AGW to reserve resources and provide the information needed for media handling. The details of the interaction between eP-CSCF and eIMS-AGW are out of scope of this document.

Upon receiving an SDP offer from the served WIC containing an DTLS-SRTP based media stream with end-to-access-edge protection, i.e. an "m=" line:

- with the proto field containing the "UDP/TLS/RTP/SAVPF" value as specified in RFC 5764 [6]; and
- with the SDP "a=3ge2ae:requested" attribute or, if permitted by operator policy, without the SDP "a=3ge2ae:requested" attribute;

the eP-CSCF shall invoke IMS-ALG procedures, shall remove the SDP "a=3ge2ae:requested" attribute, if included, and the SDP fingerprint attribute and shall act as defined in 3GPP TS 24.229 [3] as far as SDP and RTP is concerned.

Upon receiving an SDP answer over the Mw interface, for each DTLS-SRTP based media stream with end-to-access-edge protection of the SDP offer from the served WIC which is accepted in the received SDP answer, the eP-CSCF shall invoke IMS-ALG procedures. In the SDP answer to served WIC, the eP-CSCF

- a) shall use RFC 5763 [5] and shall provide the proto field in the "m=" line with the "UDP/TLS/RTP/SAVPF" value according to RFC 5764 [6]; and
- b) may additionally, within the same "m=" line, offer TCP transport protocol with appropriate ICE candidates according to RFC 6544 [28].

If the SDP offer contained bundled media as described in draft-ietf-mmusic-sdp-bundle-negotiation [25], the eP-CSCF shall reject the bundling of media, i.e. the eP-CSCF shall not add a SDP group BUNDLE attribute to the SDP answer, and the eP-CSCF shall assign a zero port value to any m- line that in the SDP offer contained an SDP "bundle-only" attribute.

NOTE: Stage 2 has specified that the architecture does not support media multiplexing that is defined for WebRTC, so the SDP answer sent to the served WIC will not contain bundled media.

### 7.4.3 WIC terminating call

Upon receiving an SDP offer over the Mw interface with an RTP based media, for each RTP based media, the eP-CSCF:

- 1) shall invoke IMS-ALG procedures;
- 2) shall perform ICE procedures as defined in 3GPP TS 24.229 [3];
- 3) shall not perform OMR procedures; and
- 4) in the SDP offer to served WIC:
  - shall indicate the transport protocol according to RFC 5763 [5], with the proto field in the "m=" line containing the "UDP/TLS/RTP/SAVPF" value according to RFC 5764 [6];
  - may additionally, within the same "m=" line, offer TCP transport protocol with appropriate ICE candidates according to RFC 6544 [28]; and
  - shall include the SDP "a=3ge2ae:applied" attribute.

NOTE: Stage-2 has specified that the architecture does not support media multiplexing that is defined for WebRTC, so the SDP offer sent to the served WIC will not contain bundled media.

Upon receipt of an SDP answer, the eP-CSCF:

- a) shall perform ICE procedures as defined in 3GPP TS 24.229 [3];
- b) shall generate an SDP answer based on the SDP answer received from the WIC and forward it using the appropriate signalling protocol as described in subclause 7.4.1;
- c) for each RTP based media of the SDP offer from the remote UE which is accepted in the SDP answer shall remove the SDP fingerprint attribute; and



d) shall act as defined in 3GPP TS 24.229 [3] as far as SDP and RTP is concerned.

## 7.4.4 WIC emergency call

If the eP-CSCF receives an initial request for a dialog, or a standalone transaction, or an unknown method, for a registered user, the eP-CSCF shall inspect the Request-URI. The eP-CSCF shall consider the Request URI of the initial request as a emergency service identifier, if it is an emergency numbers or an emergency service URN from the configurable lists that are associated with:

- 1) the country of the operator to which the eP-CSCF belongs to; and
- 2) the country of roaming partners, if the request originates from a different country then the country of the network to which the eP-CSCF belongs to. If Gm based W2 is used, then access technology specific procedures are described in each access technology specific annex of 3GPP TS 24.229 [3] to determine from which country and roaming partner the request was originated; and
- 3) if the country from which the request originates cannot be determined then all lists are associated.

If the eP-CSCF detects that the Request-URI of the initial request for a dialog, or a standalone transaction, or an unknown method matches one of the emergency service identifiers in the associated lists then the eP-CSCF shall:

- A) If item 1) applies then determine whether the request originates from the same country as the country of the network to which the eP-CSCF belongs. If Gm based W2 is used, then access technology specific procedures are used as described in each access technology specific annex of 3GPP TS 24.229 [3] to determine from which country and roaming partner the request was originated. If the request originates from the same country, then the eP-CSCF depending on operator policy shall:
  - a) reject the request as appropriate for the signalling in use. If Gm based W2 is used, then send 380 (Alternative Service) response with the contents as specified in 3GPP TS 24.229 [3] subclause 5.2.10.4; or
  - b) proceed the request as specified in of 3GPP TS 24.229 [3] sub-clause 5.2.10.4 for the case where the request is not rejected; or
- B) in all other cases the eP-CSCF shall reject the request as appropriate for the signalling in use. If Gm based W2 is used, then send a 380 (Alternative Service) response with the contents as specified in 3GPP TS 24.229 [3] subclause 5.2.10.4.

## 7.4.5 Media optimization procedure

### 7.4.5.1 WIC originating call

If an eP-CSCF forwards an SDP offer from the WIC, and supports media plane optimization, and does not need to perform legal interception, then the eP-CSCF shall in addition to the SDP information described in subclause 7.4.2, encapsulate the previously received SDP offer from the WIC. In order to do so, the eP-CSCF shall:

- 1) encapsulate each received session level SDP attribute into an "tra-att" attribute and add this attribute as a session level attribute;
- 2) encapsulate each received session-level bandwidth line into an "tra-bw" attribute and add this attribute as a session level attribute;
- 3) if the eP-CSCF decides to include a session level contact line in the SDP offer, include the address information as received from the eIMS-AGW in that contact line and also encapsulate the address information into an "tra-contact" attribute and add this attribute as a session level attribute;
- 4) provide the total number of media lines in the SDP offer the eP-CSCF forwards, excluding any media lines with port zero, in the "tra-media-line-number" attribute;
- 5) for all media lines in the SDP offer sent on the Mw interface that relate to media stream(s) that are transported within data channel(s) within the same SCTP association between the eP-CSCF and the WIC, provide the "tra-SCTP-association" SDP attribute with a number designating the SCTP association that shall be assigned by the eP-CSCF and that shall be unique within the related SIP dialogue;

- 6) for each media line in the SDP offer sent on the Mw interface that does not relate to a data channel, encapsulate each received media level attribute of the corresponding received media line into an "tra-att" attribute", and add this attribute as a media level attribute for the media line;
- 7) for each media line in the SDP offer sent on the Mw interface that is the first media line within the SDP offer that relates to a data channel within one SCTP association, encapsulate each received media level attribute of the corresponding received media line, except for "dcmmap" and "dcsa" attributes corresponding to media steams described in different media lines on the Mw interface, into an "tra-att" attribute", and add this attribute as a media level attribute for the media line;
- 8) for each media line in the SDP offer sent on the Mw interface that is a subsequent media line within the SDP offer that relates to a data channel within one SCTP association, encapsulate each received "dcmmap" and "dcsa" media level attribute of the corresponding received media line corresponding to the media steam described in this media lines on the Mw interface, into an "tra-att" attribute", and add this attribute as a media level attribute for this media line; and
- 9) for each media line in the SDP offer sent on the Mw interface that does not relate to a data channel or that is the first media line within the SDP offer that relates to a data channel within one SCTP association:
  - a) if the eP-CSCF decides to include a media level contact line in the SDP offer, include the address information as received from the eIMS-AGW in that contact line and also encapsulate the address information into an "tra-contact" attribute and add this attribute as a media level attribute for the media line;
  - b) encapsulate the corresponding received media line into an "tra-m-line" attribute and add this attribute as a media level attribute for the media line; and
  - c) encapsulate each received bandwidth line for the corresponding received media line into an "tra-bw" attribute, and add this as a media level attribute for the media line.

NOTE 1: When interacting with the eIMS-AGW to reserve resources and provide the information needed for media handling the eP-CSCF will ask for resources suitable for the media described in the SDP offer outside the "tra-m-line", "tra-att" and "tra-bw" SDP attributes. The details of the interaction between the eP-CSCF and the eIMS-AGW are out of scope of this document.

If an ePCSCF receives an SDP answer over Mw interface and the SDP answer includes "tra-m-line" media level SDP attributes, the eP-CSCF shall:

- 1) when invoking the IMS-ALG procedures, use the media information received in "tra-m-line", "tra-att", and "tra-bw" SDP attributes;
- 2) remove all received SDP attributes and bandwidth lines from the forwarded SDP answer;

NOTE 2: This also includes the "tra-m-line", "tra-att", "tra-SCTP-association", "tra-media-line-number" and "tra-bw" SDP attributes.

- 3) de-encapsulate any SDP attributes received within session level "tra-att" SDP attributes and provide them as session level attributes in the SDP answer towards the WIC;
- 4) de-encapsulate any bandwidth lines received within session level "tra-bw" SDP attributes and provide them as session level bandwidth lines in the SDP answer towards the WIC;
- 5) for all media lines marked to belong to the same SCTP association by the "tra-SCTP-association" media level SDP attribute, provide a single media line in the SDP answer sent towards the WIC;
- 6) for each media line in the SDP answer sent towards the WIC:
  - a) de-encapsulate the media line received within the "tra-m-line" SDP attribute and provide it as media line in the SDP answer towards the WIC, replacing the port number with the port allocated by its eIMS-AGW;
  - b) de-encapsulate any media level SDP attributes received within "tra-att" SDP attributes for the corresponding media line and provide them as media level attributes for the media line in the SDP answer towards the WIC; and
  - c) de-encapsulate any media level bandwidth lines received within "tra-bw" SDP attributes for the corresponding media line and provide them as media level bandwidth line for the media line in the SDP answer towards the WIC; and

7) use the so generated SDP answer to invoke IMS-ALG procedures.

NOTE 3: When interacting with eIMS-AGW the eP-CSCF will deactivate media plane interworking in the eIMS-AGW. The details of this interaction are out of scope of this document. The eP-CSCF will use the "tra-SCTP-association" SDP attributes to determine which media streams need to be multiplexed into the same SCTP association.

### 7.4.5.2 WIC terminating call

If an eP-CSCF receives an SDP offer over the Mw interface and the eP-CSCF supports media plane optimization, then the eP-CSCF shall determine for each media line whether media plane optimization is to be applied. Media plane optimization is to be applied when all of the following conditions are met:

- 1) the eP-SCSCF forwards the SDP offer towards a WIC;
- 2) the eP-SCSCF does not need to perform legal interception;
- 3) for each media line, either a "tra-m-line" or a "tra-SCTP-association" media level SDP attribute has been received;
- 4) if a session level contact line is included in the received SDP, a "tra-contact" session level SDP attribute is also included in the received SDP, and the "contact-line" is the same as encapsulated within the "tra-contact" attribute;
- 5) if a media level contact line is included in the received SDP for any media line, a "tra-contact" media level SDP attribute is also included in the received SDP for that media line, and the "contact-line" is the same as encapsulated within the "tra-contact" attribute;
- 6) a "tra-media-line-number" SDP attribute is included in the received SDP offer and the number in the received "tra-media-line-number" SDP attribute matches the real number of media lines in the SDP, excluding any media lines with port zero.

If media plane optimization is to be applied, then the eP-CSCF shall:

- 1) when invoking the IMS-ALG procedures, use the media information received in "tra-contact", "tra-m-line", "tra-att", "tra-SCTP-association" and "tra-bw" SDP attributes;

NOTE 1: When interacting with eIMS-AGW the eP-CSCF will deactivate media plane interworking in the eIMS-AGW. The details of this interaction are out of scope of this document. The eP-CSCF will use the "tra-SCTP-association" SDP attribute to determine which media streams need to be multiplexed into the same SCTP association.

- 2) remove all received SDP attributes and bandwidth lines from the forwarded SDP offer;

NOTE 2: This also includes the "tra-contact", "tra-m-line", "tra-att", "tra-SCTP-association", "tra-media-line-number" and "tra-bw" SDP attributes.

- 3) de-encapsulate any SDP attributes received within session level "tra-att" SDP attributes and provide them as session level attributes in the SDP offer towards the WIC;
- 4) de-encapsulate any bandwidth lines received within session level "tra-bw" SDP attributes and provide them as session level bandwidth lines in the SDP offer towards the WIC;
- 5) for all media lines marked to belong to the same SCTP association by the "tra-SCTP-association" media level SDP attribute, provide a single media line in the SDP offer sent towards the WIC; and
- 6) for each media line in the SDP offer sent towards the WIC:
  - a) de-encapsulate the media line received within the "tra-m-line" SDP attribute and provide it as media line in the SDP offer towards the WIC, replacing the port number with the port allocated by its eIMS-AGW;
  - b) de-encapsulate any media level SDP attributes received within "tra-att" SDP attributes for the corresponding media line and provide them as media level attributes for the media line in the SDP offer towards the WIC; and

- c) de-encapsulate any media level bandwidth lines received within "tra-bw" SDP attributes for the corresponding media line and provide them as media level bandwidth line for the media line in the SDP offer towards the WIC.

If media plane optimization is not to be applied, then the eP-CSCF shall:

- 1) remove all received the "tra-contact", "tra-m-line", "tra-att", "tra-SCTP-association", "tra-media-line-number" and "tra-bw" SDP attributes from the forwarded SDP offer;
- 2) when invoking the IMS-ALG procedures, use the media information received outside "tra-contact", "tra-m-line", "tra-att", "tra-SCTP-association" and "tra-bw" SDP attributes; and
- 3) not include any "tra-contact", "tra-m-line", "tra-att", "tra-SCTP-association", "tra-media-line-number" and "tra-bw" SDP attributes in the SDP answer over the Mw interface.

If the eP-CSCF receives an SDP answer from the WIC and the eP-CSCF decided to apply media plane optimization when processing the corresponding SDP offer, then the eP-CSCF shall:

- 1) generate an SDP answer based on the related SDP offer and the SDP answer received from the WIC which is compliant with RFC 3264 [20];

NOTE 3: The selected formats of the answer need to be compliant with the offered formats. Media lines are disabled via port 0 if the corresponding media lines are disabled in the answer from the WIC. If data channels within one SCTP association are offered via dcmmap attributes, the WIC can reject a data channel by excluding the corresponding dcmmap attribute from the answer. The eP-CSCF then disables the media line, where the corresponding "tra-att:dcmmap" attribute has been received in the SDP offer.

- 2) encapsulate each received session level SDP attribute into an "tra-att" attribute and add this attribute as a session level attribute;
- 3) encapsulate each received session-level bandwidth line into an "tra-bw" attribute and add this attribute as a session level attribute; and
- 4) for all media line in the SDP answer sent on the Mw interface that relate to media stream(s) that are transported within the data channels within the same SCTP association between the eP-CSCF and the WIC, provide the "tra-SCTP-association" SDP attribute with a number designating the SCTP association that shall be the same as received for the corresponding media line in the SDP offer on the Mw interface; and
- 5) for each media line in the SDP answer sent on the Mw interface that does not relate to a data channel, encapsulate each received media level attribute of the corresponding received media line into an "tra-att" attribute", and add this attribute as a media level attribute for the media line;
- 6) for each media line in the SDP answer sent on the Mw interface that is the first media line within the SDP answer that relates to a data channel within one SCTP association, encapsulate each received media level attribute of the corresponding received media line, except for "dcmmap" and "dcsa" attributes corresponding to media steams described in different media lines on the Mw interface, into an "tra-att" attribute", and add this attribute as a media level attribute for the media line;
- 7) for each media line in the SDP answer sent on the Mw interface that is a subsequent media line within the SDP answer that relates to a data channel within one SCTP association, encapsulate each received "dcmmap" and "dcsa" media level attribute of the corresponding received media line corresponding to the media steam described in this media lines on the Mw interface, into an "tra-att" attribute", and add this attribute as a media level attribute for this media line; and
- 8) for each media line in the SDP answer sent on the Mw interface that does not relate to a data channel or that is the first media line within the SDP answer that relates to a data channel within one SCTP association:
  - a) encapsulate the corresponding received media line into an "tra-m-line" attribute and add this attribute as a media level attribute for the media line; and
  - b) encapsulate each received bandwidth line for the corresponding received media line within into an "tra-bw" attribute, and add this as a media level attribute for the media line.

## 8 Data channel open and close

### 8.1 General

This clause specifies the procedures for negotiating usage of, and opening and closing of, a WebRTC data channel between the WIC and the eP-CSCF.

WebRTC data channels are realized using an SCTP association running on top of DTLS, as described in draft-ietf-tsvwg-sctp-dtls-encaps [23] and draft-ietf-rtcweb-data-channel [16].

Once the SCTP association has been negotiated (using draft-ietf-mmusic-sctp-sdp [18]) and established, the WIC and eIMS-AGW (controlled by the eP-CSCF) either use the Data Channel Establishment Protocol (DCEP) for opening data channels, as described in draft-ietf-rtcweb-data-protocol [17], or they use the SDP negotiation based on draft-ietf-mmusic-data-channel-sdpneg [36].

Closing of a data channel is signalled via SCTP and, if SDP negotiation was used for the data channel establishment, also using draft-ietf-mmusic-data-channel-sdpneg [36].

**Editor's note:** Use of data channel to transport other protocols, e.g. BFCP and T.140 is ffs.

### 8.2 WIC (WebRTC IMS Client)

#### 8.2.1 General

The WIC shall follow the general call establishment procedures in subclause 7. This subclause defines the additional procedures for establishing WebRTC data channels within the call.

#### 8.2.2 WIC originating call

Upon generating an SDP offer, the WIC shall insert an "m=" line with the proto value set to "UDP/DTLS/SCTP" or "TCP/DTLS/SCTP", and the fmt value set to "webrtc-datachannel" according to draft-ietf-mmusic-sctp-sdp [18], in the SDP offer. In addition, the WIC shall insert an SDP sctp-port attribute according to draft-ietf-mmusic-sctp-sdp [18].

The procedures of draft-ietf-mmusic-data-channel-sdpneg [36] should be used as follows:

- a) If MSRP is transported over the data channel, then draft-ietf-mmusic-msrp-usage-data-channel [zz] shall be used.

**NOTE:** Alternatively, if a single data channel is to be used, then knowledge of the usage of the data channel could be based on configuration, or could be implicitly determined based on proprietary information carried in the signalling protocol. Such mechanisms are outside the scope of this specification.

#### 8.2.3 WIC terminating call

Upon receiving an SDP offer, with an "m=" line with the proto value set to "UDP/DTLS/SCTP" or "TCP/DTLS/SCTP", and the "m=" line fmt value set to "webrtc-datachannel", the WIC shall follow the procedures in draft-ietf-mmusic-sctp-sdp [18] for generating the associated SDP answer. In addition, the WIC shall insert an SDP sctp-port attribute according to draft-ietf-mmusic-sctp-sdp [18].

The procedures of draft-ietf-mmusic-data-channel-sdpneg [36] should be used as follows:

- a) If MSRP is transported over the data channel, then draft-ietf-mmusic-msrp-usage-data-channel [37] shall be used.

**NOTE:** Alternatively, if a single data channel is to be used, then knowledge of the usage of the data channel could be based on configuration, or could be implicitly determined based on proprietary information carried in the signalling protocol. Such mechanisms are outside the scope of this specification.

## 8.3 WWSF (WebRTC Web Server Function)

## 8.4 eP-CSCF (P-CSCF enhanced for WebRTC)

### 8.4.1 General

The eP-CSCF shall follow the general call establishment procedures in clause 7. This subclause defines the additional procedures for establishing WebRTC data channels within the call.

In the current release of the specification, the eIMS-AGW will act as an endpoint for all WebRTC data channels established between the eIMS-AGW and the served WIC. If the eIMS-AGW is able to perform transport protocol interworking for a media transported between the eIMS-AGW and the served WIC using a data channel, and between the eIMS-AGW and the remote user using another transport protocol, the eP-CSCF can instruct the eIMS-AGW to perform transport protocol interworking between the data channel and the other transport protocol.

**Editor's note: The H.248 procedures needed for the eP-CSCF to establish and control a data channel in the eIMS-AGW are still to be defined.**

### 8.4.2 WIC originating call

Upon receiving an SDP offer from the served WIC, with an "m=" line with the proto value set to "UDP/DTLS/SCTP" or "TCP/DTLS/SCTP", and the fmt value set to "webrtc-datachannel", according to draft-ietf-mmusic-sctp-sdp [18], the eP-CSCF shall:

- remove the "m=" line from the SDP offer; and
- for each media transported between the WIC and the eIMS-AGW using a data channel, and for which the eIMS-AGW is able to perform transport protocol interworking between a data channel and another transport protocol, insert an "m=" line describing the media and the transport protocol used for the media in the SDP offer;

before forwarding the SDP offer towards the remote user.

Upon receiving an SDP answer to the SDP offer, the eP-CSCF shall:

- remove each "m=" line associated with an "m=" line that the eP-CSCF inserted in the associated SDP offer from the SDP answer;
- insert an "m=" line with the proto value set to "UDP/DTLS/SCTP" or "TCP/DTLS/SCTP", and the fmt value set to "webrtc-datachannel" according to draft-ietf-mmusic-sctp-sdp [18], in the SDP answer;
- insert an SDP sctp-port attribute according to draft-ietf-mmusic-sctp-sdp [18], in the SDP answer; and
- for each media accepted by the remote user, for which the eIMS-AGW can perform transport protocol interworking between a data channel and another transport protocol, instruct the eIMS-AGW to perform the transport protocol interworking;

before forwarding the SDP answer towards the served WIC.

The procedures of draft-ietf-mmusic-data-channel-sdpneg [36] should be used as follows:

- a) If MSRP is transported over the data channel, then draft-ietf-mmusic-msrp-usage-data-channel [37] shall be used.

**NOTE:** Alternatively, if a single data channel is to be used, then knowledge of the usage of the data channel could be based on configuration, or could be implicitly determined based on proprietary information carried in the signalling protocol. Such mechanisms are outside the scope of this specification.

### 8.4.3 WIC terminating call

Upon receiving an SDP offer from the remote user, the eP-CSCF shall:

- remove each "m=" line that describes media which is transported between the WIC and the eIMS-AGW using a data channel from the SDP offer;
- insert an "m=" line with the proto value set to "UDP/DTLS/SCTP" or "TCP/DTLS/SCTP", and the fmt value set to "webrtc-datachannel" according to draft-ietf-mmusic-sctp-sdp [18], in the SDP offer; and
- insert an SDP sctp-port attribute according to draft-ietf-mmusic-sctp-sdp [18], in the SDP answer;

before forwarding the SDP offer towards the served WIC.

Upon receiving an SDP answer to the SDP offer, with an "m=" line with the proto value set to "UDP/DTLS/SCTP" or "TCP/DTLS/SCTP", and the fmt value set to "webrtc-datachannel", according to draft-ietf-mmusic-sctp-sdp [18], the eP-CSCF shall:

- remove the the "m=" line from the SDP answer;
- for each media which the eIMS-AGW is able to perform transport protocol interworking between a data channel and another transport protocol, and for which the SDP offer contained an "m=" line, insert an "m=" line describing the media and the transport protocol used for the media in the SDP answer; and
- for each media accepted by the remote user, for which the eIMS-AGW can perform transport protocol interworking between a data channel and another transport protocol, instruct the eIMS-AGW to perform the transport protocol interworking;

before forwarding the SDP answer towards the remote user.

The procedures of draft-ietf-mmusic-data-channel-sdpneg [36] should be used as follows:

- a) If MSRP is transported over the data channel, then draft-ietf-mmusic-msrp-usage-data-channel [37] shall be used.

NOTE: Alternatively, if a single data channel is to be used, then knowledge of the usage of the data channel could be based on configuration, or could be implicitly determined based on proprietary information carried in the signalling protocol. Such mechanisms are outside the scope of this specification.

---

## 9 Call modification

WIC and eP-CSCF shall behave in accordance with the procedures specified in subclause 7. There is no additional requirement specified within this release.

---

## 10 IP multimedia application support in the IM CN subsystem using webRTC

### 10.1 General

### 10.2 Access to MMTel and supplementary services using webRTC

#### 10.2.1 General

This clause describes the procedures for interaction of WebRTC based access to the IM CN subsystem and the execution of supplementary service as described in 3GPP TS 22.173 [7].

## 10.2.2 WIC (WebRTC IMS Client)

### 10.2.2.1 SIP based protocol used by the WIC

If the protocol between the WIC and the eP-CSCF is based on SIP, then in order to support an MMTel supplementary service, the SIP procedures shall conform to the SIP procedures specified in the 24 series specification of the respective supplementary service. 3GPP TS 24.173 [8] lists the documents defining the MMTel supplementary services.

### 10.2.2.2 non-SIP based protocol used by the WIC

The support of MMTel supplementary services when accessing the IM CN subsystem with non-SIP based protocol is not specified in this version of the specification.

## 10.2.3 WWSF (WebRTC Web Server Function)

### 10.2.4 eP-CSCF (P-CSCF enhanced for WebRTC)

When a SIP is used on the W2 interface, then there are no supplementary specific requirements defined for the eP-CSCF.

When a non-SIP protocol is used on the W2 interface, then the eP-CSCF has to map information elements from non-SIP based protocol on W2 interface to the corresponding SIP information elements on the Mw reference point.



---

## Annex A (informative): Example signalling flows

### A.1 Scope of signalling flows

This annex gives examples of signalling flows for IMS based WebRTC, and the W2 interface is based on SIP protocol.

---

### A.2 Void


---

### A.3 Signalling flows for registration

#### A.3.1 Void

#### A.3.2 WIC registration of individual public user identity based on web authentication

Figure A.3.2-1 shows the registration signalling flow for the scenario when the user has a subscription with an individual public user identity, but uses a web identity and authentication scheme, e.g. OAuth 2.0, to authenticate with the WWSF or the WAF.

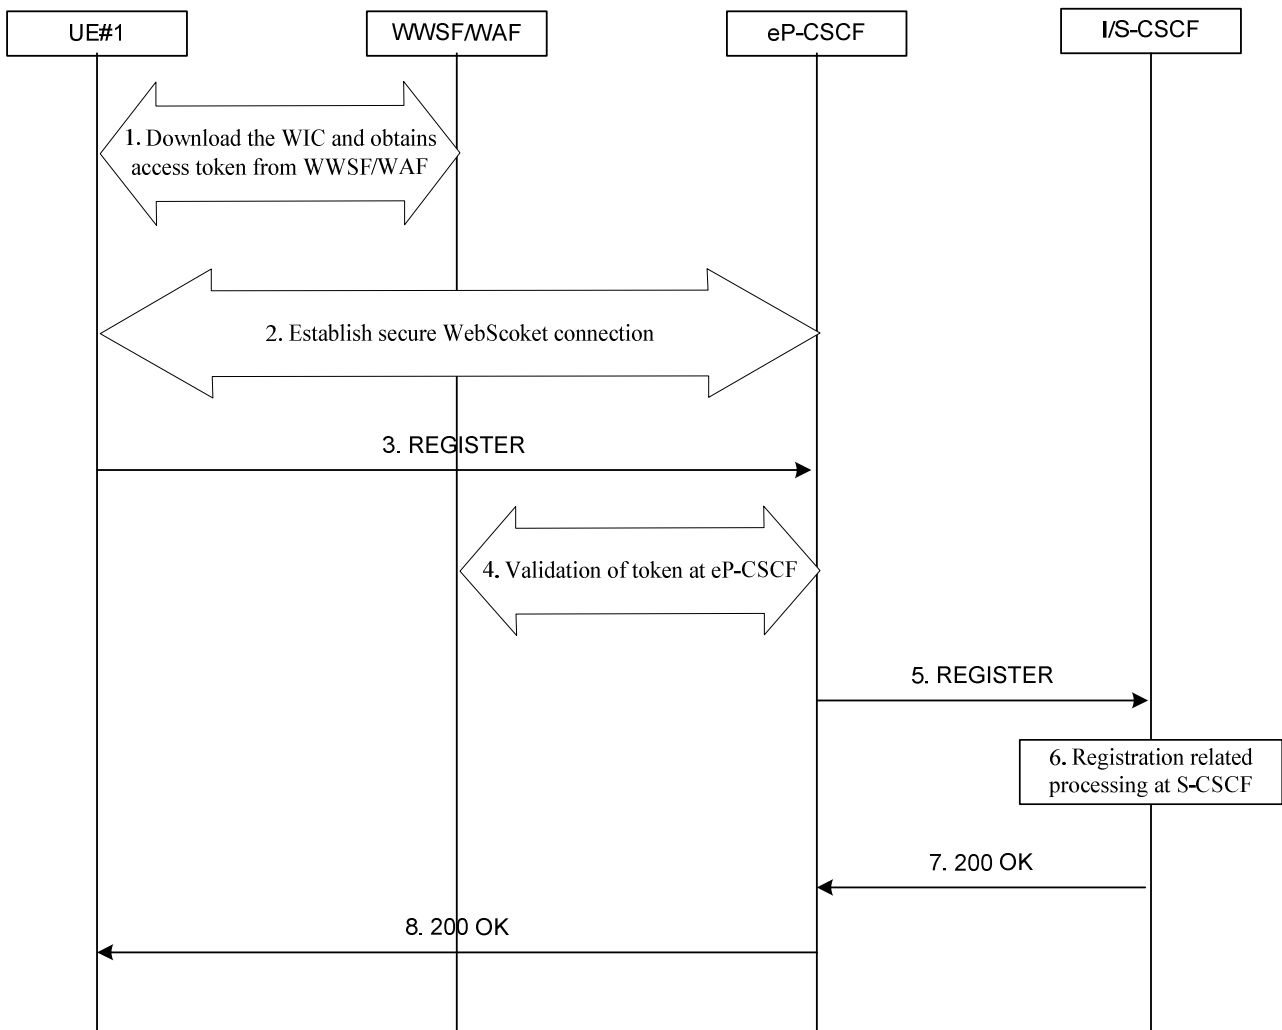

**Figure A.3.2-1: WIC registration of individual public user identity based on web authentication**

**1. Download WIC and obtain access token**

The user accesses a WebRTC URI to the WWSF. The browser downloads and initializes the WIC from the WWSF. The WAF or WWSF, depending on the authorization flow (e.g. OAuth 2.0) used, authenticates the user via 'web credentials', i.e. credentials as commonly used for access to web based services, for example a username and password. The user's web identity is mapped to the corresponding IMS subscriber identity (i.e. private user identity and public user identity). The WWSF forwards the authorization token and the IMS identity to the WIC.

**2. Establishment of secure connection between WIC and eP-CSCF**

The WIC opens a WSS (secure Web Socket) connection to the eP-CSCF. The TLS connection provides one-way authentication of the server based on the server certificate.

**3. REGISTER request (WebRTC IMS Client to eP-CSCF)**

The WebRTC IMS Client sends a REGISTER request to eP-CSCF. The REGISTER request includes an authorization token, which the WebRTC IMS Client has previously obtained.

**Table A.3.2-1: Authorization header field in the REGISTER request (WIC to eP-CSCF)**

Authorization: Bearer access\_token="O91G451HZ0V83opz6udiSEjchPynd2Ss9....." **Authorization:** It carries the authorization token previously obtained from WWSF/WAF in the web authentication procedure, and the type of the authorization token (i.e. bearer token in this example).

**4. Validation of security token at eP-CSCF**

The eP-CSCF extracts the authorization token and validates it in some unspecified manner ensuring that only an authorized source can have generated the authorization token. If the authorization token is valid the eP-CSCF obtains the associated authorization information, including the private user identity and public user identity of the associated user, the WWSF identity, and the authorization token scope.

### 5. REGISTER request (eP-CSCF to S-CSCF)

The eP-CSCF proceeds if the previous step has provided it with private user identity and public user identity(s) of the user requesting registration, an assurance that the user is authorised to use this private user identity and public user identity, and an identity of the WWSF and WAF. Then, the eP-CSCF generates a Authorization header and forwards the request to the S-CSCF (via the I-CSCF).

**Table A.3.2-2: Authorization header field in the REGISTER request (eP-CSCF to I/S-CSCF)**

|   |
|---|
| <pre>Authorization: Digest username="user1_private@home1.net", realm="registrar.home1.net", nonce="", uri="sip:registrar.home1.net", response="", integrity-protected="auth-done"</pre> |
|---|

**Authorization:** It contains the user's private user identity, an "integrity-protected" header field set to "auth-done ", and an empty "response" header field.

### 6. S-CSCF Registration

Based on the presence of the "integrity-protected" directive set to indicate that authentication has already been performed, the S-CSCF knows that user's authorization has already been validated by the Trusted Node. The S-CSCF informs the HSS that the user has been registered. Upon being requested by the S-CSCF, the HSS will also include the user profile in the response sent to the S-CSCF. If the S-CSCF receives the identity of the WAF in the authorization header field, the S-CSCF shall further checks whether the identity of the authorization entity received from the eP-CSCF, if any, is not barred, as described in 3GPP TS 33.203 [9] Annex U.

### 7. 200 (OK) response (S-CSCF to eP-CSCF)

The S-CSCF sends a 200 (OK) response to the eP-CSCF (via I-CSCF) indicating that Registration was successful.

When TLS is used between WIC and eP-CSCF, then, similar to the registration procedure for SIP Digest with TLS, the eP-CSCF associates the private user identity and all successfully registered public user identities with the TLS Session ID when the 200 (OK) is received.

### 8. 200 (OK) response (eP-CSCF to UE)

The eP-CSCF forwards the 200 (OK) response to the WebRTC IMS Client indicating that Registration was successful.

## A.3.3 Void

---

## A.4 Void

## A.5 Void

## Annex B (informative): Change history

| Change history |           |   |      |     |   |        |        |
|----------------|-----------|---|------|-----|---|--------|--------|
| Date           | TSG #     | TSG Doc.  | CR   | Rev | Subject/Comment   | Old    | New    |
| 2014-04        | CT1#86bis | C1-141590<br>C1-141591  |      |     | Initial version   |        | 0.1.0  |
| 2014-05        | CT1#87    | C1-142082<br>C1-142326<br>C1-142327<br>C1-142328<br>C1-142408<br>C1-142409<br>C1-142433<br>C1-142435<br>C1-142523   |      |     | This version contains the changes of agreed CRs at CT1#87   |        | 0.2.0  |
| 2014-07        | CT1#88    | C1-142859<br>C1-142861<br><a href="#">C1-142863</a><br><a href="#">C1-143208</a><br><a href="#">C1-143209</a><br><a href="#">C1-143210</a><br><a href="#">C1-143211</a><br><a href="#">C1-143213</a><br><a href="#">C1-143220</a><br><a href="#">C1-143279</a><br><a href="#">C1-143280</a><br><a href="#">C1-143281</a><br><a href="#">C1-143328</a><br><a href="#">C1-143330</a><br><a href="#">C1-143332</a><br><a href="#">C1-143377</a><br><a href="#">C1-143378</a> |      |     | This version contains the changes of agreed CRs at CT1#88   |        | 0.3.0  |
| 2014-09        | CT-65     | CP-140627   |      |     | Version 1.0.0 presented for information at CT plenary   | 0.3.0  | 1.0.0  |
| 2014-10        | CT1#88bis | C1-144087<br>C1-144094<br>C1-144187<br>C1-144190<br>C1-144227<br>C1-144258<br>C1-144272<br>C1-144273  |      |     | This version contains the changes of agreed CRs at CT1#88bis  | 1.0.0  | 1.1.0  |
| 2014-11        | CT1#89    | C1-144313<br>C1-144894<br>C1-144915<br>C1-144916<br>C1-144917<br>C1-144993<br>C1-144994   |      |     | This version contains the changes of agreed CRs at CT1#89   | 1.1.0  | 1.2.0  |
| 2014-12        | CT-66     | CP-140808   |      |     | Version 2.0.0 presented for approval at CT plenary  | 1.2.0  | 2.0.0  |
| 2014-12        | CT-66     | CP-140990   |      |     | Version 2.1.0 after approval and integration of CR in CP-141004   | 2.0.0  | 2.1.0  |
| 2014-12        | CT-66     |   |      |     | Version 12.0.0 after approval at CT plenary   | 2.1.0  | 12.0.0 |
| 2015-03        | CT-67     | CP-150072   | 0001 | 1   | IMS WebRTC reference updates  | 12.0.0 | 12.1.0 |
| 2015-03        | CT-67     | CP-150072   | 0003 | 3   | Codec support in IMS-WebRTC   | 12.0.0 | 12.1.0 |
| 2015-06        | CT-68     | CP-150317   | 0004 | 2   | WebRTC codec when using EPC via WLAN IP-CAN and fixed access  | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0005 | 1   | Data channel usage  | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0006 | 2   | Contents of To and From headers for WIC registration based on web-authentication                                    | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0007 | 2   | Coordination between the IMS Provider and WWSF Provider on lifetime of the REGISTER.                                | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0008 | 1   | Clarification about when eP-CSCF obtains the WAF identity and some editorial corrections                            | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0011 |     | W2 using SIP Digest credentials   | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0012 | 1   | Update reference version of gateways draft  | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0013 | 1   | 380 handling for eP-CSCF and WIC  | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150317   | 0014 | 1   | eIMS-AGW to be documented   | 12.1.0 | 12.2.0 |
| 2015-06        | CT-68     | CP-150328   | 0010 |     | Editorial corrections   | 12.2.0 | 13.0.0 |
| 2015-09        | CT-69     | CP-150518   | 0016 |     | WebRTC codec in IP-CANs other than EPS IP-CAN, GPRS IP-CAN, EPC via WLAN IP-CAN, and xDSL, Fiber or Ethernet IP-CAN | 13.0.0 | 13.1.0 |

|         |       |           |      |   |   |        |        |
|---------|-------|-----------|------|---|---|--------|--------|
| 2015-09 | CT-69 | CP-150518 | 0019 |   | SDP usage for WebRTC  | 13.0.0 | 13.1.0 |
| 2015-09 | CT-69 | CP-150518 | 0021 | 3 | UE undetected emergency call  | 13.0.0 | 13.1.0 |
| 2015-12 | CT-70 | CP-150712 | 0022 | 1 | Media Plane Optimization procedures                                   | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0024 | 1 | JSON Web Token Claims for transport of WAF and WWSF identities        | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0026 |   | Reference update: RFC 7675 (draft-ietf-rtcweb-stun-consent-freshness) | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0028 |   | Reference update: draft-ietf-mmusic-sdp-bundle-negotiation            | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0030 | 1 | Reference update: draft-yusef-sipcore-sip-oauth                       | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0032 | 1 | Reference update: draft-ietf-mmusic-sctp-sdp                          | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0034 | 1 | Reference update: draft-ietf-mmusic-proto-iana-registration           | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0036 |   | Reference update: draft-ietf-tsvwg-sctp-dtls-encaps                   | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0038 |   | Reference update: draft-ietf-rtcweb-overview                          | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150693 | 0040 |   | Reference update: draft-ietf-rtcweb-gateways                          | 13.1.0 | 13.2.0 |
| 2015-12 | CT-70 | CP-150712 | 0042 | 1 | Negotiation of contents of data channels (MSRP)                       | 13.1.0 | 13.2.0 |

---

# History

| <b>Document history</b> |            |             |
|-------------------------|------------|-------------|
| V13.2.0                 | March 2016 | Publication |
|                         |            |             |
|                         |            |             |
|                         |            |             |
|                         |            |             |