

ETSI TS 124 535 V19.0.0 (2025-10)



**5G;
5G System (5GS);
Device-Side Time Sensitive Networking (TSN)
Translator (DS-TT) to Network-Side TSN Translator (NW-TT)
protocol aspects;
Stage 3
(3GPP TS 24.535 version 19.0.0 Release 19)**



ReferenceRTS/TSGC-0124535vj00

Keywords5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope	6
2 References	6
3 Definitions of terms, symbols and abbreviations	6
3.1 Terms.....	6
3.2 Abbreviations	6
4 General	7
5 (g)PTP message delivery.....	7
5.1 Overview	7
5.2 Signalling of ingress time for time synchronization and delay measurements.....	7
5.3 Encoding of organization specific TLV extensions.....	8
5.3.1 General.....	8
5.3.2 Ingress timestamp	9
Annex A (informative): Change history	10
History	11

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, certain modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

NOTE 1: The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

NOTE 2: The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

NOTE 3: The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

NOTE 4: The constructions "can" and "cannot" shall not to be used as substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

NOTE 5: The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the protocols of communication between a DS-TT and a NW-TT as specified in 3GPP TS 23.501 [2] for:

- a) (g)PTP message delivery.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] IEEE Std 1588-2019: "IEEE Standard for a Precision Clock Synchronization Protocol for Networked Measurement and Control Systems".
- [4] IEEE Std 802.1AS-2020: "IEEE Standard for Local and metropolitan area networks--Timing and Synchronization for Time-Sensitive Applications".

3 Definitions of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

example: text used to clarify abstract rules by applying them literally.

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.501 [2] apply:

5G System
Time Sensitive Communication
TSN working domain

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

5GS	5G System
DS-TT	Device-Side TSN Translator
gPTP	Generalized Precision Time Protocol
NW-TT	Network-Side TSN Translator
OUI	Organizational Unique Identifier
PTP	Precision Time Protocol

TSC	Time Sensitive Communication
TSN	Time Sensitive Networking
TT	TSN Translator

4 General

For time synchronization and time sensitive communication (TSC), the device-side TSN translator (DS-TT) is deployed at the UE-side edge and the network-side TSN translator (NW-TT) is deployed at the network-side edge (see 3GPP TS 23.501 [2]).

The DS-TT and NW-TT fulfil all functions related to IEEE Std 802.1AS [4] or IEEE Std 1588-2019 [3], which include delivery of (g)PTP messages. Clause 5 describes details of the (g)PTP message delivery.

5 (g)PTP message delivery

5.1 Overview

For time synchronization, a 5G system (5GS) can be configured to operate in one of the following modes (3GPP TS 23.501 [2]):

- a) a time-aware system, for which the 5GS needs to support implementation of (g)PTP requirements (see IEEE Std 802.1AS [4]);
- b) a boundary clock, for which the 5GS needs to support implementation of PTP requirements (see IEEE Std 1588-2019 [3];
- c) a peer-to-peer transparent clock, for which the 5GS needs to support implementation of PTP requirements (see IEEE Std 1588-2019 [3]; and
- d) an end-to-end transparent clock, for which the 5GS needs to support implementation of PTP requirements (see IEEE Std 1588-2019 [3].

Within a 5GS, a (g)PTP message is delivered over the user plane. While the generic mechanisms for the (g)PTP message delivery are according to IEEE Std 802.1AS [4] and IEEE Std 1588-2019 [3], a specific requirement for the DS-TT and the NW-TT is available in terms of the signalling of ingress time. See clause 5.2 for further details.

5.2 Signalling of ingress time for time synchronization and delay measurements

3GPP TS 23.501 [2] describes how to convey an ingress timestamp (TS_i) for a (g)PTP event message, where the ingress TT creates a Suffix field with TS_i encoded as specified in clause 5.3.1.

For a gPTP message, if the ingress TT is:

- a) a NW-TT, support for these operations by the NW-TT is mandatory; or
- b) a DS-TT, support for these operations by the DS-TT is optional.

For a PTP message, if the ingress TT is:

- a) a NW-TT, support for these operations by the NW-TT is optional; or
- b) a DS-TT, support for these operations by the DS-TT is optional.

The DS-TT or NW-TT (i.e. egress TT) creates an egress timestamping (TS_e) for every (g)PTP event message. The egress TT uses TS_i from the Suffix field of the (g)PTP message to calculate the residence time as specified in 3GPP TS 23.501 [2].

For a gPTP message, if the egress TT is:

- a) a NW-TT, support for these operations by the NW-TT is optional; or
- b) a DS-TT, support for these operations by the DS-TT is mandatory.

For a PTP message, if the egress TT is:

- a) a NW-TT, support for these operations by the NW-TT is optional; or
- b) a DS-TT, support for these operations by the DS-TT is optional.

5.3 Encoding of organization specific TLV extensions

5.3.1 General

Organization specific TLV extensions are included the Suffix field of a (g)PTP message as specified in clause 14.3 of IEEE Std 1588-2019 [3]. The Suffix field is coded as shown in figure 5.3.1.1 and table 5.3.1.1.

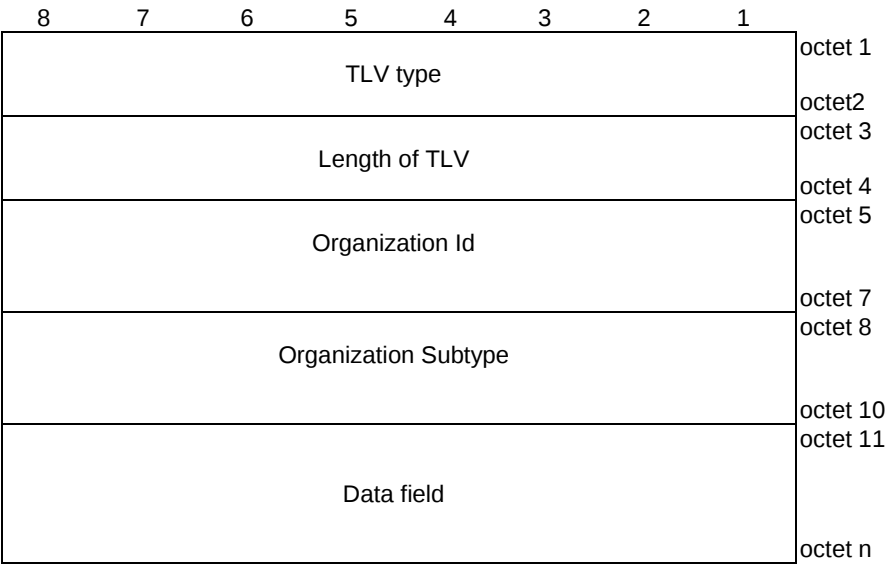


Figure 5.3.1.1: Suffix field

Table 5.3.1.1: Suffix field

TLV type (octets 1 to 2)
This field indicates the type of TLV extension and shall be coded as follows:
- 00003H ORGANIZATION_EXTENSION;
All other values are reserved.
Length of TLV (octets 3 to 4)
This field indicates the length of the value part of the TLV extension (i.e. octets 5 to n) coded in binary over 2 octets.
Organization Id (octets 5 to 7)
This field indicates the value of the Organizational Unique Identifier (OUI) assigned to 3GPP by the IEEE, coded in binary over 3 octets.
Organization Subtype (octets 8 to 10)
This field identifies the type of TLV extension included in the Data field and shall be coded as follows:
- 00000H Reserved;
- 00001H Ingress timestamp
All other values are spare.
Data field (octets 11 to n)
This field contains the contents of the specific TLV extension. Its encoding is specified in the corresponding clause.

Editor's note: The value of the OUI for 3GPP needs to be assigned by the IEEE.

5.3.2 Ingress timestamp

The Data field of a TLV extension carrying an Ingress timestamp is coded as shown in figure 5.3.2.1 and table 5.3.2.1.

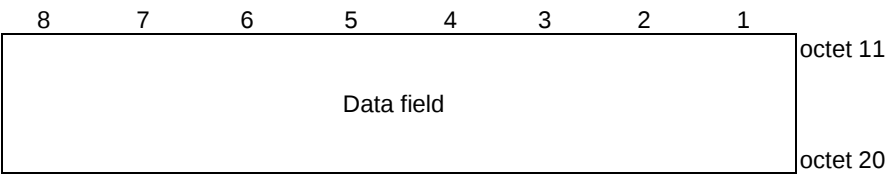


Figure 5.3.2.1: Data field for Ingress timestamp (Organization Subtype = 0001H)

Table 5.3.2.1: Data field for Ingress timestamp (Organization Subtype = 0001H)

Data field (octets 11 to 20)
For Organization Subtype = 0001H, the data field contains the ingress timestamp of the (g)PTP event (Sync) message, encoded over 10 octets as specified in clause 5.3.3. of IEEE Std 1588-2019 [3].

Annex A (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-08	CT1#119	C1-194647				Draft skeleton provided by the rapporteur	0.0.0
2019-09	CT1#119 CT#85	C1-194650 CP-192258				Implementation of an agreed pseudo CR (C1-194650) Addition of the TS number assigned in CT#85	0.1.0
2019-11	CT1#121					Implementation of the following pseudo CRs agreed by CT1: C1-198476, C1-198749, C1-198750, and C1-199023 Corrections made by the rapporteur	0.2.0
2019-12	CT#86	CP-193151				Presentation for information to TSG CT	1.0.0
2019-12	CT#86	CP-183288				A title corrected	1.0.1
2020-03	CT1#122					Implementation of the following pseudo CR agree by CT1: C1-200734 Corrections made by the rapporteur	1.1.0
2020-03	CT-87e	CP-200167				Presentation for approval to TSG CT	2.0.0
2020-03	CT-87e					Version 16.0.0 created after approval	16.0.0
2020-06	CT-88e	CP-201137	0002	1	F	TSN working domain	16.1.0
2020-09	CT-89e	CP-202170	0003		D	Editorial correction	16.2.0
2020-12	CT-90e	CP-203219	0004	1	F	Update handling of suffix field	16.3.0
2020-12	CT-90e	CP-203219	0006	1	F	TSi handling when the NW-TT generates the gPTP event messages	16.3.0
2021-06	CT-92e	CP-211136	0007	2	B	Support for PTP message delivery	17.0.0
2021-09	CT-93e	CP-212134	0008	1	C	Correction of timestamping the messages for time synchronization and delay measurements	17.1.0
2021-12	CT-94e	CP-213035	0009		C	Removing unnecessary text in clause 5.2	17.2.0
2024-04	-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0
2025-10	-	-	-	-	-	Update to Rel-19 version (MCC)	19.0.0

History

Document history		
V19.0.0	October 2025	Publication