


ETSI TS 125 423 V3.0.0 (2000-01)

Technical Specification

**Universal Mobile Telecommunications System (UMTS);
UTRAN Iur Interface RNSAP Signalling
(3G TS 25.423 version 3.0.0 Release 1999)**

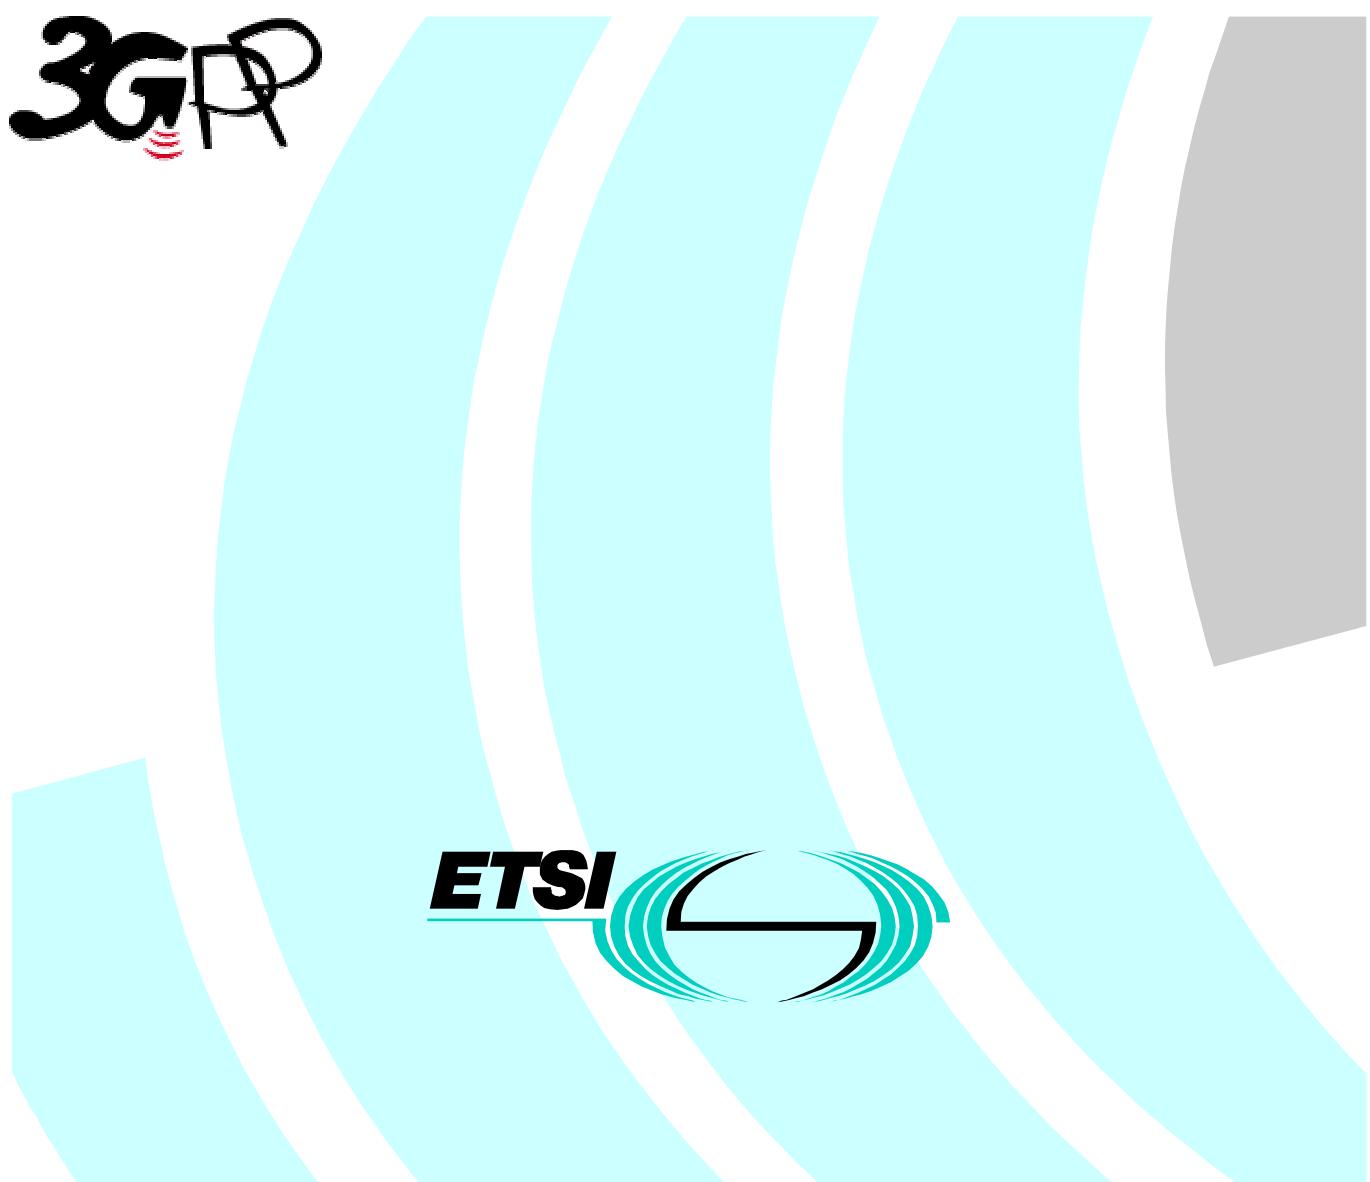

Reference

DTS/TSGR-0325423U

Keywords

UMTS

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCETel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr

Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables. The mapping of document identities is as follows:

For 3GPP documents:

3G TS | TR nn.nnn "<title>" (with or without the prefix 3G)

is equivalent to

ETSI TS | TR 1nn nnn "[Digital cellular telecommunications system (Phase 2+) (GSM);] Universal Mobile Telecommunications System; <title>

For GSM document identities of type "GSM xx.yy", e.g. GSM 01.04, the corresponding ETSI document identity may be found in the Cross Reference List on www.etsi.org/key

Contents

Foreword	9
1 Scope.....	10
2 References.....	10
3 Definitions, symbols and abbreviations.....	11
3.1 Definitions	11
3.2 Symbols	11
3.3 Abbreviations.....	11
4 General.....	12
4.1 Procedure Specification Principles	12
4.2 Forwards and Backwards Compatibility.....	12
4.3 Source Signalling Address Handling.....	12
5 RNSAP Services	12
5.1 RNSAP Procedure Modules	12
5.2 Parallel Transactions.....	13
6 Services Expected from Signalling Transport	13
7 Functions of RNSAP	13
8 RNSAP Procedures.....	14
8.1 Elementary Procedures	14
8.2 Basic Mobility Procedures.....	16
8.2.1 Uplink SignallingTransfer.....	16
8.2.1.1 General	16
8.2.1.2 Successful Operation	16
8.2.1.3 Abnormal Conditions	17
8.2.2 Downlink SignallingTransfer.....	17
8.2.2.1 General	17
8.2.2.2 Successful Operation	17
8.2.2.3 Abnormal Conditions	17
8.2.3 Relocation Commit	18
8.2.3.1 General	18
8.2.3.2 Successful Operation	18
8.2.3.3 Abnormal Conditions	19
8.2.4 Paging.....	18
8.2.4.1 General	18
8.2.4.2 Successful Operation	18
8.2.4.3 Abnormal Conditions	19
8.3 DCH procedures	19
8.3.1 Radio Link Setup.....	19
8.3.1.1 General	19
8.3.1.2 Successful Operation	19
8.3.1.3 Unsuccessful Operation	20
8.3.1.4 Abnormal Conditions	21
8.3.2 Radio Link Addition.....	21
8.3.2.1 General	21
8.3.2.2 Successful Operation	21
8.3.2.3 Unsuccessful Operation	23
8.3.2.4 Abnormal Conditions	23
8.3.3 Radio Link Deletion	23
8.3.3.1 General	23
8.3.3.2 Successful Operation	24
8.3.3.3 Unsuccessful Operation	24
8.3.3.4 Abnormal Conditions	24
8.3.4 Synchronised Radio Link Reconfiguration Preparation.....	24
8.3.4.1 General	24

8.3.4.2	Successful Operation	24
8.3.4.3	Unsuccessful Operation	27
8.3.4.4	Abnormal Conditions	27
8.3.5	Synchronised Radio Link Reconfiguration Commit	28
8.3.5.1	General	28
8.3.5.2	Successful Operation	28
8.3.5.3	Abnormal Conditions	28
8.3.6	Synchronised Radio Link Reconfiguration Cancellation	28
8.3.6.1	General	28
8.3.6.2	Successful Operation	28
8.3.6.3	Abnormal Conditions	28
8.3.7	Unsynchronised Radio Link Reconfiguration	29
8.3.7.1	General	29
8.3.7.2	Successful Operation	29
8.3.7.3	Unsuccessful Operation	31
8.3.7.4	Abnormal Conditions	31
8.3.8	Physical Channel Reconfiguration	31
8.3.8.1	General	31
8.3.8.2	Successful Operation	32
8.3.8.3	Unsuccessful Operation	32
8.3.8.4	Abnormal Conditions	32
8.3.9	Radio Link Failure	32
8.3.9.1	General	32
8.3.9.2	Successful Operation	33
8.3.9.3	Abnormal Conditions	33
8.3.10	Radio Link Restoration	33
8.3.10.1	General	33
8.3.10.2	Successful Operation	34
8.3.10.3	Abnormal Conditions	34
8.3.11	Measurement Initiation	34
8.3.11.1	General	34
8.3.11.2	Successful Operation	34
8.3.11.3	Unsuccessful Operation	35
8.3.11.4	Abnormal Conditions	36
8.3.12	Measurements Reporting	36
8.3.12.1	General	36
8.3.12.2	Successful Operation	36
8.3.12.3	Abnormal Conditions	36
8.3.13	Measurement Termination	37
8.3.13.1	General	37
8.3.13.2	Successful Operation	37
8.3.13.3	Abnormal Conditions	37
8.3.14	Measurement Failure	37
8.3.14.1	General	37
8.3.14.2	Successful Operation	37
8.3.14.3	Abnormal Conditions	38
8.3.15	Down Link Power Control [FDD]	38
8.3.15.1	General	38
8.3.15.2	Successful Operation	38
8.3.15.3	Abnormal Conditions	38
8.3.16	Compressed Mode Preparation [FDD]	38
8.3.16.1	General	38
8.3.16.2	Successful Operation	39
8.3.16.3	Unsuccessful Operation	39
8.3.16.4	Abnormal Conditions	39
8.3.17	Compressed Mode Commit [FDD]	39
8.3.17.1	General	39
8.3.17.2	Successful Operation	40
8.3.17.3	Abnormal Conditions	40
8.3.18	Compressed Mode Cancellation [FDD]	40
8.3.18.1	General	40
8.3.18.2	Successful Operation	40

8.3.18.3	Abnormal Conditions	40
8.4	Common Transport Channel Procedures	40
8.4.1	Common Transport Channel Resources Initialisation.....	40
8.4.1.1	General	40
8.4.1.2	Successful Operation	41
8.4.1.3	Unsuccessful Operation.....	41
8.4.1.4	Abnormal Conditions	41
8.4.2	Common Transport Channel Resources Release.....	42
8.4.2.1	General	42
8.4.2.2	Successful Operation.....	42
8.4.2.3	Abnormal Conditions	42
8.5	Global Procedures.....	42
8.5.1	Error Indication	42
8.5.1.1	General	42
8.5.1.2	Successful Operation.....	43
8.5.1.3	Abnormal Conditions	43
9	Elements for RNSAP Communication	43
9.1	Message Functional Definition and Content.....	43
9.1.1	General	43
9.1.2	Message Contents.....	44
9.1.3	RADIO LINK SETUP REQUEST	46
9.1.3.1	FDD Message	46
9.1.3.2	TDD Message	48
9.1.4	RADIO LINK SETUP RESPONSE.....	49
9.1.4.1	FDD Message	49
9.1.4.2	TDD Message.....	51
9.1.5	RADIO LINK SETUP FAILURE.....	53
9.1.5.1	FDD Message	53
9.1.5.2	TDD Message.....	54
9.1.6	RADIO LINK ADDITION REQUEST	54
9.1.6.1	FDD Message	54
9.1.6.2	TDD Message.....	55
9.1.7	RADIO LINK ADDITION RESPONSE	56
9.1.7.1	FDD Message	56
9.1.7.2	TDD Message.....	58
9.1.8	RADIO LINK ADDITION FAILURE	60
9.1.8.1	FDD Message	60
9.1.8.2	TDD Message.....	61
9.1.9	RADIO LINK DELETION REQUEST	61
9.1.10	RADIO LINK DELETION RESPONSE	61
9.1.11	RADIO LINK RECONFIGURATION PREPARE	62
9.1.11.1	FDD Message	62
9.1.11.2	TDD Message.....	64
9.1.12	RADIO LINK RECONFIGURATION READY	65
9.1.12.1	FDD Message	65
9.1.12.2	TDD Message.....	66
9.1.13	RADIO LINK RECONFIGURATION COMMIT	67
9.1.14	RADIO LINK RECONFIGURATION FAILURE	67
9.1.15	RADIO LINK RECONFIGURATION CANCEL.....	67
9.1.16	RADIO LINK RECONFIGURATION REQUEST	68
9.1.16.1	FDD Message	68
9.1.16.2	TDD Message.....	69
9.1.17	RADIO LINK RECONFIGURATION RESPONSE.....	70
9.1.18	RADIO LINK FAILURE INDICATION	70
9.1.19	RADIO LINK RESTORE INDICATION.....	71
9.1.20	DL POWER CONTROL REQUEST [FDD].....	71
9.1.21	PHYSICAL CHANNEL RECONFIGURATION REQUEST.....	71
9.1.21.1	FDD Message	71
9.1.21.2	TDD Message.....	72
9.1.22	PHYSICAL CHANNEL RECONFIGURATION COMMAND	72
9.1.23	PHYSICAL CHANNEL RECONFIGURATION FAILURE.....	73

9.1.24	UPLINK SIGNALLING TRANSFER INDICATION	73
9.1.25	DOWNLINK SIGNALLING TRANSFER REQUEST.....	73
9.1.26	RELOCATION COMMIT.....	73
9.1.27	PAGING REQUEST.....	74
9.1.28	DEDICATED MEASUREMENT INITIATION REQUEST	74
9.1.29	DEDICATED MEASUREMENT INITIATION RESPONSE	75
9.1.30	DEDICATED MEASUREMENT INITIATION FAILURE	75
9.1.31	DEDICATED MEASUREMENT REPORT	76
9.1.32	DEDICATED MEASUREMENT TERMINATION REQUEST	76
9.1.33	DEDICATED MEASUREMENT FAILURE INDICATION.....	76
9.1.34	COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST	76
9.1.35	COMMON TRANSPORT CHANNEL RESOURCES REQUEST	77
9.1.36	COMMON TRANSPORT CHANNEL RESOURCES RESPONSE	78
9.1.36.1	FDD Message	78
9.1.36.2	TDD Message.....	79
9.1.37	COMMON TRANSPORT CHANNEL RESOURCES FAILURE	80
9.1.38	COMPRESSED MODE PREPARE [FDD].....	80
9.1.39	COMPRESSED MODE READY [FDD].....	80
9.1.40	COMPRESSED MODE FAILURE [FDD].....	81
9.1.41	COMPRESSED MODE COMMIT [FDD]	81
9.1.42	COMPRESSED MODE CANCEL [FDD]	81
9.1.43	ERROR INDICATION.....	81
9.2	Information Element Functional Definition and Contents.....	81
9.2.1	Common Parameters	81
9.2.1.1	Allocation/Retention Priority.....	81
9.2.1.2	Allowed Queuing Time	82
9.2.1.3	Binding ID	82
9.2.1.4	BLER.....	82
9.2.1.5	Cause	82
9.2.1.6	Cell Identifier (C-Id).....	83
9.2.1.7	Cell Parameter ID	83
9.2.1.8	CFN	84
9.2.1.9	CN CS Domain Identifier	84
9.2.1.10	CN PS Domain Identifier	84
9.2.1.11	Criticality Diagnostics	85
9.2.1.12	C-RNTI.....	86
9.2.1.13	DCH Combination Indicator	86
9.2.1.14	DCH ID	86
9.2.1.15	Dedicated Measurement Object Type	86
9.2.1.16	Dedicated Measurement Type	86
9.2.1.17	Dedicated Measurement Value.....	87
9.2.1.18	Downlink Eb/No Target	87
9.2.1.19	D-RNTI	87
9.2.1.20	D-RNTI Release Indication	87
9.2.1.21	DRX Parameter	87
9.2.1.22	FACH Initial Window Size	88
9.2.1.23	FACH Priority Indicator.....	88
9.2.1.24	Frame Handling Priority.....	88
9.2.1.25	Frame Offset.....	88
9.2.1.26	MAC-c SDU Length.....	88
9.2.1.27	Mean Bit Rate.....	89
9.2.1.28	Measurement Characteristics.....	89
9.2.1.29	Measurement ID	89
9.2.1.30	Message Type.....	89
9.2.1.31	Multiple URAs Indicator	90
9.2.1.32	Payload CRC Present Indicator	90
9.2.1.33	Primary CPICH Power	91
9.2.1.34	Primary Scrambling Code	91
9.2.1.35	PSCH Time Slot	91
9.2.1.36	Puncture Limit	91
9.2.1.37	RANAP Relocation Information	91
9.2.1.38	Report Characteristics.....	91

9.2.1.39	RL ID.....	93
9.2.1.40	RLC Mode.....	93
9.2.1.41	RNC-Id	94
9.2.1.42	Service Area Identifier (SAI)	94
9.2.1.43	S-RNTI	94
9.2.1.44	Sync Case	95
9.2.1.45	TFCI Presence	95
9.2.1.46	Time Slot	95
9.2.1.47	ToAWE	95
9.2.1.48	ToAWS.....	95
9.2.1.49	Transaction ID	96
9.2.1.50	Transport Bearer ID.....	96
9.2.1.51	Transport Bearer Request Indicator.....	96
9.2.1.52	Transport Layer Address	96
9.2.1.53	Transport Format Combination Set	96
9.2.1.54	Transport Format Set.....	97
9.2.1.55	UARFCN.....	98
9.2.1.56	UL FP Mode	98
9.2.1.57	Uplink Eb/No	98
9.2.1.58	UL Interference Level	98
9.2.1.59	URA ID	99
9.2.1.60	UTRAN Cell Identifier (UC-Id).....	99
9.2.1.61	L3 Information.....	99
9.2.2	FDD Specific Parameters.....	99
9.2.2.1	Chip Offset	99
9.2.2.2	Compressed Mode Method.....	99
9.2.2.3	D-Field Length	99
9.2.2.4	Diversity Control Field.....	100
9.2.2.5	Diversity Indication	100
9.2.2.6	Diversity Mode	100
9.2.2.7	DL DPCCH Slot Format	100
9.2.2.8	DL Scrambling Code	100
9.2.2.9	Downlink Frame Type.....	101
9.2.2.10	FDD DL Channelisation Code Number.....	101
9.2.2.11	Gap Position Mode	101
9.2.2.12	Gap Period (TGP).....	101
9.2.2.13	Gap Starting Slot Number (SN).....	101
9.2.2.14	Max Number of UL DPDCHs	101
9.2.2.15	Min UL Channelisation Code Length.....	102
9.2.2.16	Multiplexing Position	102
9.2.2.17	Pattern Duration (PD).....	102
9.2.2.18	Power Control Mode (PCM)	102
9.2.2.19	Power Offset.....	102
9.2.2.20	Power Resume Mode (PRM).....	102
9.2.2.21	Primary CPICH Ec/No	103
9.2.2.22	Propagation Delay (PD).....	103
9.2.2.23	S-Field Length	103
9.2.2.24	Scrambling Code Change	103
9.2.2.25	Slot Number (SN).....	103
9.2.2.26	SSDT Cell Identity	103
9.2.2.27	SSDT Cell Identity Length	104
9.2.2.28	SSDT Indication	104
9.2.2.29	SSDT Support Indicator	104
9.2.2.30	TFCI Signalling Mode.....	104
9.2.2.31	TPC Downlink Step Size	104
9.2.2.32	Transmission Gap Distance (TGD)	105
9.2.2.33	Transmit Gap Length (TGL)	105
9.2.2.34	UL/DL Compressed Mode Selection.....	105
9.2.2.35	UL DPCCH Slot Format.....	105
9.2.2.36	UL Scrambling Code	105
9.2.2.37	Uplink Delta Eb/No	106
9.2.2.38	Uplink Delta Eb/No After.....	106

9.2.3	TDD Specific Parameters.....	106
9.2.3.1	Burst Type	106
9.2.3.2	CCTrCH ID	106
9.2.3.3	DPCH ID	106
9.2.3.4	Midamble Shift.....	106
9.2.3.5	Primary CCPCH RSCP	107
9.2.3.6	Repetition Length	107
9.2.3.7	Repetition Period	107
9.2.3.8	TDD Channelisation Code.....	107
9.2.3.9	TDD Physical Channel Offset	107
9.2.3.10	TFCI Coding.....	108
9.3	Message and Information element abstract syntax (with ASN.1).....	109
9.3.1	Usage of Protocol Extension Mechanism for non-standard use	109
9.3.2	Elementary Procedure Definitions	109
9.3.3	PDU Definitions.....	118
9.3.4	Information Element Definitions.....	189
9.3.5	Common Definitions	207
9.3.6	Constant Definitions.....	208
9.3.7	Container Definitions	213
9.4	Message Transfer Syntax.....	217
9.5	Timers	217
10	Handling of Unknown, Unforeseen and Erroneous Protocol Data.....	217
10.1	General.....	217
10.2	Transfer Syntax Error	217
10.3	Abstract Syntax Error	217
10.3.1	General	217
10.3.2	Handling of the Criticality Information at Reception.....	218
10.3.2.1	Procedure Code	218
10.3.2.2	IEs other than the Procedure Code	218
10.3.3	Logical Error Handling	218
	Annex A (informative): Change history.....	220
	History.....	221

Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the radio network layer signalling procedures between RNCs in UTRAN.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.413: "UTRAN Iu Interface RANAP Signalling".
- [2] 3G TS 25.426: "UTRAN Iur and Iub Interface Data Transport & Transport Layer Signalling for DCH Data Streams".
- [3] 3G TS 25.427: "UTRAN Iur and Iub Interface User Plane Protocols for DCH Data Streams" ..
- [4] 3G TS xx.yyy: "Specification containing different Identifiers for UMTS (to be identified)".
- [5] 3G TS 25.105: "UTRA (BS) TDD; Radio Transmission and Reception".
- [6] 3G TS 25.211: "Physical Channels and Mapping of Transport Channels onto Physical Channels (FDD)".
- [7] 3G TS 25.212: "Multiplexing and Channel Coding (FDD)
- [8] UMTS 25.214, Physical Layer Procedures (FDD)".
- [9] 3G TS 25.215: "Physical Layer – Measurements (FDD)".
- [10] 3G TS 25.221: "Physical Channels and Mapping of Transport Channels onto Physical Channels (TDD)".
- [11] 3G TS 25.223: "Spreading and Modulation (TDD)".
- [12] 3G TS 25.225: "Physical Layer – Measurements (TDD)".
- [13] 3G TS 25.331: "RRC Protocol Specification".
- [14] 3G TS 25.402: "Synchronisation in UTRAN, Stage 2".
- [15] X.680 (12/94): "Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
- [16] X.681 (12/94): "Information technology - Abstract Syntax Notation One (ASN.1): Information object specification
- [17] X.691 (12/94), Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)".

[Editor's note: The dating of reference [17] needs to be verified. It has been included from the ITU-T list of recommendations in force. The dating of the reference is FFS.]

[Editor's note: The reference [4] needs to be identified. Until then the description of the parameters CN PS Domain Identifier, CN CS Domain Identifier, and CRNC ID contains more information than otherwise may be needed.]

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

Elementary Procedure: The RNSAP protocol consists of Elementary Procedures (EPs). An Elementary Procedure is a unit of interaction between two RNCs. An EP consists of an initiating message and possibly a response message. Two kinds of EPs are used:

- **Class 1:** Elementary Procedures with response (success or failure).
- **Class 2:** Elementary Procedures without response.

For Class 1 EPs, the types of responses can be as follows:

Successful

- A signalling message explicitly indicates that the elementary procedure successfully completed with the receipt of the response.

Unsuccessful

- A signalling message explicitly indicates that the EP failed.
- On time supervision expiry (i.e. absence of expected response). Whether or not any Class 1 procedure will have a timer on RNSAP is FFS. To be sorted out when discussing the details of the error cases.

Class 2 EPs are considered always successful.

3.2 Symbols

No special symbols are defined in this document.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
ATM	Asynchronous Transfer Mode
BCCH	Broadcast Control Channel
BLER	Block Error Rate
CCPCH	Common Control Physical Channel
CCTrCH	Coded Composite Transport Channel
CFN	Connection Frame Number
CN	Core Network
CRNC	Controlling RNC
CPICH	Common Pilot Channel
DCH	Dedicated Channel
DL	Downlink
DPCCH	Dedicated Physical Control Channel
DPCH	Dedicated Physical Channel
DRNC	Drift RNC
DRNS	Drift RNS
DRX	Discontinuous Reception
DSCH	Downlink Shared Channel
FN	Frame Number
FP	Frame Protocol
MAC	Medium Access Control
PDU	Protocol Data Unit

PSCH	Physical Synchronisation Channel
RAB	Radio Access Bearer
RL	Radio Link
RLC	Radio Link Control
RNS	Radio Network Subsystem
RNSAP	Radio Network Subsystem Application Part
RNTI	Radio Network Temporary Identifier
RRC	Radio Resource Control
RSCP	Received Signal Code Power
SFN	System Frame Number
SRNC	Serving RNC
SRNS	Serving RNS
SSDT	Site Selection Diversity Transmit
TFCI	Transport Format Combination Indicator
TFCS	Transport Format Combination Set
TFS	Transport Format Set
UARFCN	UMTS Absolute Radio Frequency Channel Number
UE	User Equipment
UL	Uplink
URA	UTRAN Registration Area
UTRAN	UMTS Terrestrial Radio Access Network

4 General

4.1 Procedure Specification Principles

The principle for specifying the procedure logic is to specify the functional behaviour of the CRNC exactly and completely. The SRNC functional behaviour is left unspecified. The EP Physical Channel Reconfiguration is an exception from this principle.

4.2 Forwards and Backwards Compatibility

The forwards and backwards compatibility of the protocol is assured by a mechanism where all current and future messages, and IEs or groups of related IEs, include Id and criticality fields that are coded in a standard format that will not be changed in the future. These parts can always be decoded regardless of the standard version.

4.3 Source Signalling Address Handling

The sender of an RNSAP messages shall include the Source Signalling Address, i.e. the Signalling Address of the sending node.

5 RNSAP Services

The RNSAP offers the following services:

5.1 RNSAP Procedure Modules

The Iur interface RNSAP procedures are divided into four modules as follows:

1. RNSAP Basic Mobility Procedures
2. RNSAP DCH Procedures
3. RNSAP Common Transport Channel Procedures

4. RNSAP Global Procedures

The Basic Procedures module contains procedures used to handle the mobility within UTRAN.

The DCH Procedures module contains procedures that are used to handle DCHs between two RNSs. If procedures from this module are not used in a specific Iur, then the usage of DCH traffic between corresponding RNSs is not possible.

The Common Transport Channel Procedures module contains procedures that are used to control common transport channel data streams over Iur interface.

The Global Procedures module contains procedures that are not related to a specific UE. The procedures in this module are in contrast to the above modules involving two peer CRNCs.

5.2 Parallel Transactions

Unless explicitly indicated in the procedure description, at any instance in time one protocol peer shall have initiated maximum one ongoing RNSAP DCH procedure related to a certain UE.

6 Services Expected from Signalling Transport

Signalling transport shall provide two different service modes for the RNSAP.

1. Connection oriented data transfer service. This service is supported by a signalling connection between two RNCs. It shall be possible to dynamically establish and release signalling connections based on the need. Each active UE shall have its own signalling connection. The signalling connection shall provide in sequence delivery of RNSAP messages. RNSAP shall be notified if the signalling connection breaks.
2. Connectionless data transfer service. RNSAP shall be notified in case a RNSAP message did not reach the intended peer RNSAP entity.

7 Functions of RNSAP

The RNSAP protocol has the following functions:

- Radio Link Management. This function allows the SRNC to manage radio links using dedicated resources in a DRNS.
- Physical Channel Reconfiguration. This function allows the DRNC to reallocate the physical channel resources for a Radio Link.
- Radio Link Supervision. This function allows the DRNC to report failures and restorations of a Radio Link.
- Compressed Mode Control [FDD]. This function allows the SRNC to control the usage of compressed mode within a DRNS
- Measurements on Dedicated Resources. This function allows the SRNC to initiate measurements on dedicated resources in the DRNS. The function also allows the DRNC to report the result of the measurements.
- DL Power Drifting Correction [FDD]. This function allows the SRNC to adjust the DL power level of one or more Radio Links in order to avoid DL power drifting between the Radio Links.
- CCCH Signalling Transfer. This function allows the SRNC and DRNC to pass information between the UE and the SRNC on a CCCH controlled by the DRNS.
- Paging. This function allows the SRNC to page a UE in a URA or a cell in the DRNS.
- Common Transport Channel Resources Management. This function allows the SRNC to utilise Common Transport Channel Resources within the DRNS (excluding DSCH resources for FDD).
- Relocation Execution. This function allows the SRNC to finalise a Relocation previously prepared via other interfaces.

- Reporting general error situations. This function allows reporting of general error situations, for which function specific error messages have not been defined.

The mapping between the above functions and RNSAP elementary procedures is shown in the table 1:

Table 1: Mapping between functions and RNSAP elementary procedures

Function	Procedure(s)
Radio Link Management	a) Radio Link Setup b) Radio Link Addition c) Radio Link Deletion d) Unsynchronised Radio Link Reconfiguration e) Synchronised Radio Link Reconfiguration Preparation f) Synchronised Radio Link Reconfiguration Commit g) Synchronised Radio Link Reconfiguration Cancellation
Physical Channel Reconfiguration	Physical Channel Reconfiguration
Radio Link Supervision	a) Radio Link Failure b) Radio Link Restoration
Compressed Mode Control [FDD]	a) Compressed Mode Preparation b) Compressed Mode Commit c) Compressed Mode Cancellation
Measurements on Dedicated Resources	a) Measurement Initiation b) Measurement Reporting c) Measurement Termination d) Measurement Failure
DL Power Drifting Correction [FDD]	Down Link Power Control
CCCH Signalling Transfer	a) Uplink Signalling Transfer b) Downlink Signalling Transfer
Paging	Paging
Common Transport Channel Resources Management	a) Common Transport Channel Resources Initiation b) Common Transport Channel Resources Release
Relocation Execution	Relocation Commit
Reporting General Error Situations	Error Indication

These functions are implemented by one or several RNSAP elementary procedures described in the following section.

8 RNSAP Procedures

8.1 Elementary Procedures

In the following tables, all EPs are divided into Class 1 and Class 2 EPs:

Table 2: Class 1

Elementary Procedure	Initiating Message	Successful Outcome	Unsuccessful Outcome	
		Response message	Response message	Timer
Radio Link Setup	RADIO LINK SETUP REQUEST	RADIO LINK SETUP RESPONSE	RADIO LINK SETUP FAILURE	
Radio Link Addition	RADIO LINK ADDITION REQUEST	RADIO LINK ADDITION RESPONSE	RADIO LINK ADDITION FAILURE	
Radio Link Deletion	RADIO LINK DELETION REQUEST	RADIO LINK DELETION RESPONSE		
Synchronised Radio Link Reconfiguration Preparation	RADIO LINK RECONFIGURATION PREPARE	RADIO LINK RECONFIGURATION READY	RADIO LINK RECONFIGURATION FAILURE	
Unsynchronised Radio Link Reconfiguration	RADIO LINK RECONFIGURATION REQUEST	RADIO LINK RECONFIGURATION RESPONSE	RADIO LINK RECONFIGURATION FAILURE	
Physical Channel Reconfiguration	PHYSICAL CHANNEL RECONFIGURATION REQUEST	PHYSICAL CHANNEL RECONFIGURATION COMMAND	PHYSICAL CHANNEL RECONFIGURATION FAILURE	
Measurement Initiation	DEDICATED MEASUREMENT INITIATION REQUEST	DEDICATED MEASUREMENT INITIATION RESPONSE	DEDICATED MEASUREMENT INITIATION FAILURE	
Compressed Mode Preparation [FDD]	COMPRESSED MODE PREPARE	COMPRESSED MODE READY	COMPRESSED MODE FAILURE	
Common Transport Channel Resources Initiation	COMMON TRANSPORT CHANNEL RESOURCES REQUEST	COMMON TRANSPORT CHANNEL RESOURCES RESPONSE	COMMON TRANSPORT CHANNEL RESOURCES FAILURE	

The need for Timers will be defined on a per procedure basis. The content of this column is thus FFS.

Table 3: Class 2

Elementary Procedure	Initiating Message
Uplink Signalling Transfer	UPLINK SIGNALLING TRANSFER INDICATION
Downlink Signalling Transfer	DOWNLINK SIGNALLING TRANSFER REQUEST
SRNS Relocation Commit	SRNS RELOCATION COMMIT
Paging	PAGING REQUEST
Synchronised Radio Link Reconfiguration Commit	RADIO LINK RECONFIGURATION COMMIT
Synchronised Radio Link Reconfiguration Cancellation	RADIO LINK RECONFIGURATION CANCEL
Radio Link Failure	RADIO LINK FAILURE INDICATION
Radio Link Restoration	RADIO LINK RESTORE INDICATION
Measurement Reporting	DEDICATED MEASUREMENT REPORT
Measurement Termination	DEDICATED MEASUREMENT TERMINATION REQUEST
Measurement Failure	DEDICATED MEASUREMENT FAILURE INDICATION
Downlink Power Control [FDD]	DL POWER CONTROL REQUEST
Compressed Mode Commit [FDD]	COMPRESSED MODE COMMIT
Compressed Mode Cancellation [FDD]	COMPRESSED MODE CANCEL
Common Transport Channel Resources Release	COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST

8.2 Basic Mobility Procedures

8.2.1 Uplink Signalling Transfer

8.2.1.1 General

The procedure is used by the SRNC to request to the DRNC the transfer of a Uu message. When used, the procedure is in response to a received Uplink Signalling Transfer procedure.

This procedure shall use the connectionless mode of the signalling bearer.

8.2.1.2 Successful Operation

When the CRNC receives an Uu message where the UE addressing information is S-RNTI and SRNC-ID, and the SRNC ID identifies another RNC than the CRNC, the CRNC shall send the UPLINK SIGNALLING TRANSFER message to the SRNC identified by the SRNC-ID received from the UE.

The CRNC shall include in the message the URA Identity of the URA where the Uu message was received, an indication on whether or not the accessed cell belongs to multiple URAs, and the RNC Identity of all other RNCs that are having at least one cell within the URA where the Uu message was received.

If the message received from the UE was the first message from that UE in the CRNC, the CRNC shall include the D-RNTI and the identifiers for the CN CS Domain and CN PS Domain that the CRNC is connected to in the UPLINK SIGNALLING TRANSFER INDICATION message. These CN Domain Identifiers shall be based on the LAC and RAC respectively of the cell where the message was received from the UE.

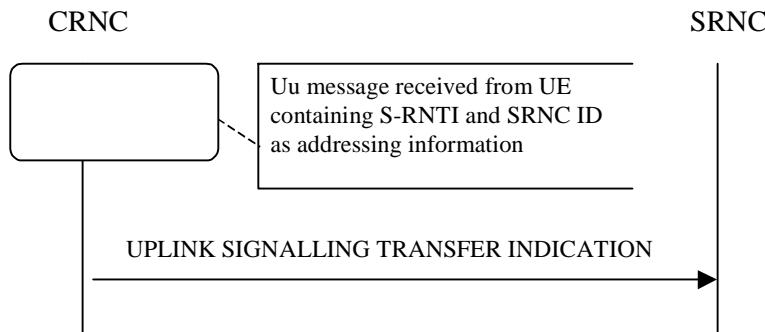


Figure 1: Uplink Signalling Transfer procedure, Successful Operation.

8.2.1.3 Abnormal Conditions

8.2.2 Downlink Signalling Transfer

8.2.2.1 General

The procedure is used by the SRNC to request to the DRNC the transfer of a Uu message. When used, the procedure is in response to a received Uplink Signalling Transfer procedure.

This procedure shall use the connectionless mode of the signalling bearer.

8.2.2.2 Successful Operation

The procedure consists of the DOWNLINK SIGNALLING TRANSFER REQUEST message sent by the SRNC to the DRNC.

The message contains the Cell Identifier (C-Id) contained in the received UPLINK SIGNALLING TRANSFER message and the D-RNTI.

At the reception of the message, the DRNC shall send the L3 Information to the UE identified by the D-RNTI.

If the D-RNTI release indication parameters indicates 'release D-RNTI', the D-RNTI and thus the UE Context and any DRNS resource allocated to the UE Context shall be released at the reception of the message.

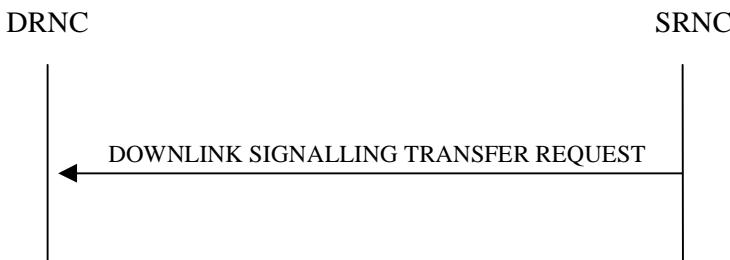


Figure 2: Downlink Signalling Transfer procedure, Successful Operation

8.2.2.3 Abnormal Conditions

If the user identified by the D-RNTI is not camping in the cell identified by the C-Id in the RNSAP message, the message shall be ignored.

If the D-RNTI is allocated to one UE context whose status does not allow the sending of the L3 information from the DRNC, then the message shall be ignored.

8.2.3 Relocation Commit

8.2.3.1 General

The RELOCATION COMMIT procedure is used by target RNC to execute the Relocation. This procedure supports the Relocation procedures described in [1].

This procedure shall use the signalling bearer mode specified below.

8.2.3.2 Successful Operation

The source RNC sends the RELOCATION COMMIT message to the target RNC to request the target RNC to proceed with the Relocation. When the UE is utilising one or more radio links in the DRNC the message shall be sent using the connection oriented service of the signalling bearer and no further identification of the UE context in the DRNC is required. If on the other hand, the UE is not utilising any radio link the message shall be sent using the connectionless service of the signalling bearer and the *D-RNTI* IE shall be included in the message to identify the UE context in the DRNC.

At reception of the RELOCATION COMMIT message from the source RNC the target RNC finalises the Relocation. If the message contains the transparent *RANAP Relocation Information* IE the target RNC shall use this information when finalising the Relocation.



Figure 3: Relocation Commit procedure, Successful Operation

8.2.4 Paging

8.2.4.1 General

This procedure is used by the SRNC to indicate to a CRNC that a UE shall be paged in a cell or URA that is under the control of the CRNC.

This procedure shall use the connectionless mode of the signalling bearer.

8.2.4.2 Successful Operation



Figure 4: Paging procedure, Successful Operation

The procedure is initiated with a PAGING REQUEST message sent from the SRNC to the CRNC.

If the message contains the *C-Id* IE, the CRNC shall page in the indicated cell. Alternatively, if the message contains the *URA-Id* IE, the CRNC shall page in all cells that it controls in the indicated URA.

[Editor's note: If the *DRX parameter* IE is required, and any explanation is required for how to react to it, then this should be included here.]

8.2.4.3 Abnormal Conditions

8.3 DCH procedures

8.3.1 Radio Link Setup

8.3.1.1 General

This procedure is used for establishing the necessary resources in the DRNS for one or more radio links.

This procedure shall use the connection-oriented service of the signalling bearer.

8.3.1.2 Successful Operation

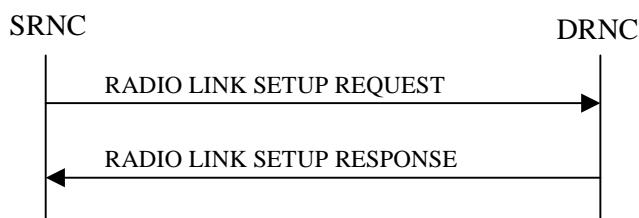


Figure 5: Radio Link Setup procedure: Successful Operation

When the SRNC makes an algorithmic decision to add the first cell or set of cells from a DRNS to the active set of a specific RRC connection, the RADIO LINK SETUP REQUEST message is sent to the corresponding DRNC to request setup of the radio link(s).

The message is also used to establish the connection-oriented service of the signalling bearer in the DRNC. The message includes the S-RNTI associated to the UE, and, if the UE context is already present in the DRNC, the corresponding D-RNTI.

[FDD - The Diversity Control Field indicates for each RL except for the first RL whether the DRNS shall combine the RL with any of the other RLs or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When an RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the RADIO LINK SETUP REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

If the *Initial DL TX Power* IE and *UL Eb/No Target* IE [FDD] are present in the message, the DRNS shall use the indicated DL TX Power and UL Eb/No Target [FDD] as initial value.

If the *Primary CPICH Eb/No* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] is present, the DRNC should use them when deciding the Initial DL TX Power.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH, the DRNS shall treat all DCHs with the same value of this IE as a set of co-ordinated DCHs. The included *RLC Mode* IE of the DCH may be used by the DRNS to optimise the power control.

The *Allocation/Retention Priority* IE defines the priority level that should be used by the DRNS to prioritise the allocation and the retention of the resources used by the DCH. The *Frame Handling Priority* IE defines the priority level that should be used by the DRNS to prioritise the discard/delay of the data frames of the DCH.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH as the new DCH FP Mode in the Uplink of the user plane for this DCH.

The DRNS shall use the included *ToAWS* IE for a DCH as the new Time of Arrival Window Start Point in the user plane for this DCH.

The DRNS shall use the included *ToAWE IE* for a DCH as the new Time of Arrival Window End Point in the user plane for this DCH.

[FDD - If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity IE*, the DRNS may activate SSDT using the *SSDT Cell Identity IE* and *SSDT Cell Identity Length IE*.]

At the reception of the RADIO LINK SETUP REQUEST message, DRNS allocates requested type of channelisation codes and other physical channel resources for each RL and assigns a binding identifier and a transport layer address for each DCH or set of co-ordinated DCHs. This information shall be sent to the SRNS in the message RADIO LINK SETUP RESPONSE when all the RLs have been successfully setup.

If the *Initial DL TX Power* and the *UL Eb/No Target* IEs are not present in the RADIO LINK SETUP REQUEST message, then DRNC shall include the suggested initial UL Eb/No Target and the DL Eb/No Target in the RADIO LINK SETUP RESPONSE message.

In the case of combining one or more RLs the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that the RL is combined with another RL. In this case the Reference RL ID shall be included to indicate with which RL the combination is performed. The Reference RL ID shall be included for all but one of the combined RLs, for which the *Transport Layer Address IE* and the *Binding ID IE* shall be included.

In the case of not combining an RL with another RL, the DRNC shall indicate in the RADIO LINK SETUP RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the *Transport Layer Address IE* and the *Binding ID IE* for the transport bearer to be established for each DCH of the RL in the RADIO LINK SETUP RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *Binding Identifier IE* and the *Transport Layer Address IE* shall be included only for one of the DCH in the set of co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSDT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

The DRNS shall also provide the SRNC with the UTRAN Cell Identifier (UC-Id) and information of the neighbouring cells to the cell(s) where the radio link(s) are added.

If a neighbouring cell is controlled by another RNC, the DRNC shall report also the node identifications (i.e. RNC, CN domain nodes) of the RNC controlling the neighbouring cell.

If there was no UE context for this UE in the DRNS before the RADIO LINK SETUP REQUEST message was received the DRNC shall include the node identifications of the CN Domain nodes that the RNC is connected to (using LAC and RAC of the current cell), and the D-RNTI in the RADIO LINK SETUP RESPONSE message.

8.3.1.3 Unsuccessful Operation

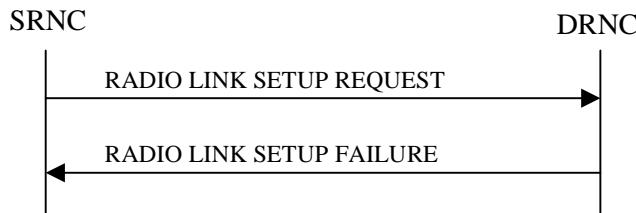


Figure 6: Radio Link Setup procedure: Unsuccessful Operation

In unsuccessful case (i.e. one or more RLs can not be setup) the RADIO LINK SETUP FAILURE message shall be sent to the SRNC, indicating the reason for failure. If some radio links were established successfully, the DRNC shall indicate this in the RADIO LINK SETUP FAILURE message in the same way as in the RADIO LINK SETUP RESPONSE message.

Typical cause values are:

Radio Network Layer Causes:

- UL Scrambling Code Already in Use
- DL Radio Resources not Available
- UL Radio Resources not Available
- Unknown C-ID
- Macrodiversity Combining not Possible
- Requested Configuration not Supported
- Cell not Available
- Power Level not Supported

Transport Layer Causes:

- Transport Link Failure

Protocol Causes:

- Transaction not Allowed

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- Not enough User Plane Processing Resources

8.3.1.4 Abnormal Conditions

If the DRNC receives either an S-RNTI or a D-RNTI which already has RL(s) established the DRNC shall send the RADIO LINK SETUP FAILURE message to the SRNC, indicating the reason for failure.

8.3.2 Radio Link Addition

8.3.2.1 General

This procedure is used for establishing the necessary resources in the DRNS for one or more additional RLs towards a UE when there is already at least one RL established to the concerning UE via this DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.2.2 Successful Operation

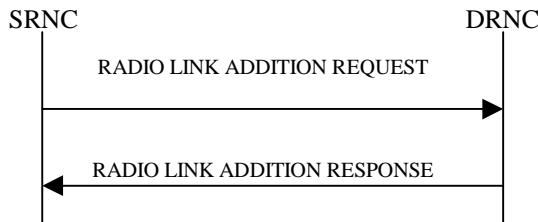


Figure 7: Radio Link Addition procedure: Successful Operation

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the SRNC to the DRNC.

Upon reception, the DRNS shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

[FDD - The Diversity Control Field indicates for each RL whether the DRNS shall combine the new RL with existing RL(s) or not on the Iur. If the *Diversity Control Field* IE is set to "May" (be combined with another RL), then the DRNS shall decide for any of the alternatives. When a new RL is to be combined the DRNS shall choose which RL(s) to combine it with.]

If the *Primary CCPCH Ec/Io* IE [FDD] or the *Primary CCPCH RSCP* IE [TDD] measured by the UE is included in the RADIO LINK ADDITION REQUEST message, the DRNS shall use this in the calculation of the Initial DL TX Power. If the *Primary CCPCH Ec/Io* IE is not present, the DRNS sets the Initial DL TX Power accordingly to the power used by the existing RLs.

[FDD - The DRNS shall use the provided UL Eb/No Target value as the current target for the inner-loop power control.]

[FDD - If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE, SSDT may be activated for the concerned new RL, with the indicated SSDT Cell Identity used for that RL.]

The DRNS shall activate any feedback mode diversity according to the received settings.

If all requested RLs are successfully added, the DRNC shall respond with a RADIO LINK ADDITION RESPONSE message.

In the case of combining an RL with existing RL(s) the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.

In the case of not combining an RL with existing RL(s), the DRNC shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the DRNC shall include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH of the RL in the RADIO LINK ADDITION RESPONSE message.

In case of co-ordinated DCH, the binding ID and the transport address shall be included for only one of the co-ordinated DCHs.

[FDD - Irrespective of SSDT activation, the DRNS shall include in the RADIO LINK ADDITION RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK ADDITION REQUEST message requested SSDT activation and the RADIO LINK ADDITION RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the DRNS.]

For any cell neighbouring of a cell in which a RL was added, the DRNC shall provide in the RADIO LINK ADDITION RESPONSE message the UTRAN Cell Identifier (UC-Id), the Frequency Number, the Primary Scrambling Code and the node identification of CN nodes connected to the RNC controlling the neighbouring cell if the neighbouring cell is not controlled by the DRNC. In addition, if the information is available, the DRNC shall also provide the CPICH Power level and Frame Offset of the neighbouring cell.

The DRNC shall also provide the configured uplink Maximum Eb/No and UL Minimum Eb/No for every new RL to the SRNC in the RADIO LINK ADDITION RESPONSE message. These values are taken into consideration by DRNS admission control and shall be used by the SRNC as limits for the UL inner-loop power control target.

The DRNC shall also provide the selected scrambling- and channelisation codes of the new RLs in order to enable the SRNC to inform the UE about the selected codes.

After sending of the RADIO LINK ADDITION RESPONSE message the DRNS shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The DRNS shall start transmission on the new RL after synchronisation is achieved in the Iur user plane as specified in ref. [3].

8.3.2.3 Unsuccessful Operation

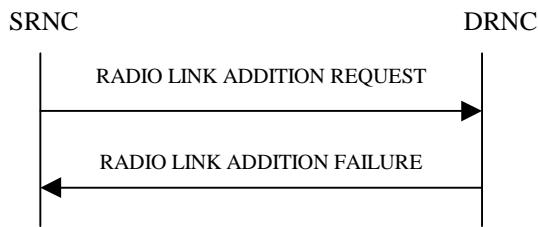


Figure 8: Radio Link Addition procedure: Unsuccessful Operation

If the establishment of at least one RL is unsuccessful, the DRNC shall send a RADIO LINK ADDITION FAILURE as response.

If some RL(s) were established successfully, the DRNC shall indicate this in the RADIO LINK ADDITION FAILURE message in the same way as in the RADIO LINK ADDITION RESPONSE message.

Typical cause values are:

Radio Network Layer Causes:

- DL Radio Resources not Available
- UL Radio Resources not Available
- Unknown C-ID
- Macrodiversity Combining not Possible
- Cell not Available
- Power Level not Supported

Transport Layer Causes:

- Transport Link Failure

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- Not enough User Plane Processing Resources

8.3.2.4 Abnormal Conditions

8.3.3 Radio Link Deletion

8.3.3.1 General

The Radio Link Deletion procedure is used to release the resources in a DRNS for one or more established radio links towards a UE.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.3.2 Successful Operation

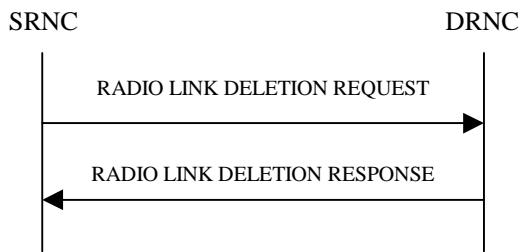


Figure 9: Radio Link Deletion procedure, Successful Operation

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the SRNC to the DRNC.

Upon receipt of this message, the DRNS shall delete the radio link(s) identified in the message and release all associated resources and respond to the SRNC with a RADIO LINK DELETION RESPONSE message.

If the radio link(s) to be deleted represent the last radio link(s) for the UE in the DRNS then the DRNC shall also release the UE context, unless the UE is using common resources in the DRNS.

8.3.3.3 Unsuccessful Operation

8.3.3.4 Abnormal Conditions

8.3.4 Synchronised Radio Link Reconfiguration Preparation

8.3.4.1 General

The Synchronised Radio Link Reconfiguration Preparation procedure is used to prepare a new configuration of all Radio Links related to one UE-UTRAN connection within a DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.4.2 Successful Operation

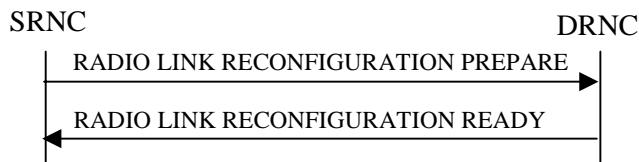


Figure 10: Synchronised Radio Link Reconfiguration Preparation procedure, Successful Operation

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION PREPARE message to the DRNC.

Upon reception, the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification :

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Allocation/Retention Priority IE* for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority IE* is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Frame Handling Priority IE* for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (UL) IE* for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (DL) IE* for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL DCH FP Mode IE* for a DCH to be modified, the DRNS shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWS IE* for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes on the *ToAWE IE* for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *DCH Combination Indicator IE* for a DCH to be added, the DRNS shall

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator IE* in the new configuration

The DRNS should use the *Allocation/Retention Priority IE* received for a DCH to be added when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority IE* is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority IE* received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

The DRNS may use the included *RLC Mode IE* to optimise the power control.

The DRNS shall use the included *UL DCH FP Mode IE* for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS IE* for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE IE* for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration

Physical Channel Modification:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Uplink Scrambling Code* IE, the DRNS shall apply this Uplink Scrambling Code to the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Uplink Channelisation Code* IEs, the DRNS shall apply the new Uplink Channelisation Code(s) in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Spreading Factor of Channelisation Code (DL)* IE, for each *Spreading Factor of Channelisation Code (DL)* IE the DRNS shall allocate one new Downlink Channelisation Code per Radio Link and apply the new Downlink Channelisation Code(s) to the new configuration. Each Downlink Channelisation Code allocated for the new configuration shall be included as a *Channelisation Code (DL)* IE in the RADIO LINK RECONFIGURATION READY message when sent to the SRNC.]

The DRNS shall use the *TFCS (UL)* IE when reserving resources for the uplink of the new configuration. The DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

The DRNS shall use the *TFCS (DL)* IE when reserving resources for the downlink of the new configuration. The DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate (UL)* IE, the DRNS should use this information when reserving resources for the Uplink of the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Mean Bit Rate (DL)* IE, the DRNS should use this information when reserving resources for the Downlink of the new configuration.

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes on the *UL DPCCH Structure* IE, group the DRNS shall apply the new Uplink DPCCH Structure to the new configuration.]

SSDT Activation/Deactivation:

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT Active in the UE", the DRNS may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the SSDT Indication IE set to "SSDT not Active in the UE", the DRNS shall deactivate SSDT in the new configuration.]

If the requested modifications are allowed by the DRNS, and the DRNS has successfully reserved the required resources for the new configuration of the Radio Link(s) it shall respond to the SRNC with the RADIO LINK RECONFIGURATION READY message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the *Maximum Uplink Eb/No* IE and *Minimum Uplink Eb/No* IE for each Radio Link in the RADIO LINK RECONFIGURATION READY message.

[TDD – The DRNC shall include all the IEs corresponding to the new physical channel parameters for the DL DPCH and/or the UL DPCH to be reconfigured in the RADIO LINK RECONFIGURATION READY message.]

[Editor's note: Which information in the RL RECONFIGURATION PREPARE message triggers the DRNC to include any of the following *Optional* TDD information?:

- a) DL DPCCH Group
- b) UL DPCCH Group
- c) TDD Physical Channel Offset, *Repetition Length*, and TFCI Presence IEs as part of the DL DPCCH Group
- d) TDD Physical Channel Offset, *Repetition Length*, and TFCI Presence IEs as part of the UL DPCCH Group.]

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCHs in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

8.3.4.3 Unsuccessful Operation

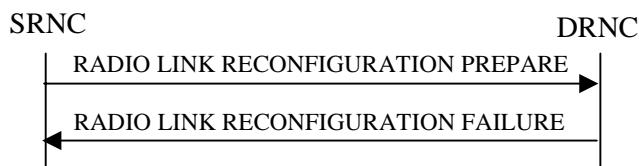


Figure 11: Synchronised Radio Link Reconfiguration Preparation procedure, Unsuccessful Operation

If the DRNS cannot reserve the necessary resources for all the new DCHs of one set of co-ordinated DCHs requested to be added, it shall regard the Synchronised Radio Link Reconfiguration procedure as having failed.

- If the requested Synchronised Radio Link Reconfiguration procedure fails for one or more RLs the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC, indicating the reason for failure.

In which cases to include only the *Cause* IE on message level and in which cases the *Cause* IE also shall be included for a specific RL is FFS.

Typical cause values are:

Radio Network Layer Causes:

- UL Scrambling Code Already in Use
- DL Radio Resources not Available
- UL Radio Resources not Available
- Requested Configuration not Supported

Protocol Causes:

- Transaction not Allowed

Miscellaneous Causes:

- Control Processing Overload
- Not enough User Plane Processing Resources

8.3.4.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the DRNS shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC.

8.3.5 Synchronised Radio Link Reconfiguration Commit

8.3.5.1 General

This procedure is used to order the DRNS to switch to the new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.5.2 Successful Operation



Figure 12: Synchronised Radio Link Reconfiguration Commit procedure, Successful Operation

The DRNS shall switch to the new configuration previously prepared by the Synchronised RL Reconfiguration procedure at the CFN requested by the SRNC when receiving the RADIO LINK RECONFIGURATION COMMIT message from the SRNC.

8.3.5.3 Abnormal Conditions

8.3.6 Synchronised Radio Link Reconfiguration Cancellation

8.3.6.1 General

This procedure is used to order the DRNS to release the new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.6.2 Successful Operation



Figure 13: Synchronised Radio Link Reconfiguration Cancellation procedure, Successful Operation

The DRNS shall release the new configuration previously prepared by the Synchronised RL Reconfiguration Preparation procedure and continue using the old configuration when receiving the RADIO LINK RECONFIGURATION CANCEL message from the SRNC.

8.3.6.3 Abnormal Conditions

If the DRNS receives the RADIO LINK RECONFIGURATION CANCEL message from the SRNC when there is no new configuration for the Radio Link(s) within the DRNS, previously prepared by the Synchronised Radio Link Preparation procedure, the message shall be ignored.

8.3.7 Unsynchronised Radio Link Reconfiguration

8.3.7.1 General

The Unsynchronised Radio Link Reconfiguration procedure is used to reconfigure Radio Link(s) related to one UE-UTRAN connection within a DRNS.

The procedure is used when there is no need to synchronise the time of the switching from the old to the new radio link configuration in the cells used by the UE-UTRAN connection within the DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.7.2 Successful Operation

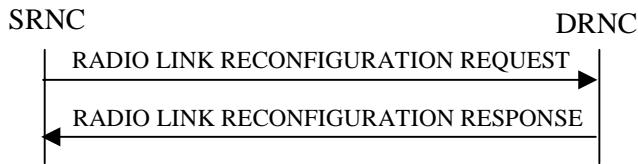


Figure 14: Unsynchronised Radio Link Reconfiguration procedure, Successful Operation

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the SRNC by sending the RADIO LINK RECONFIGURATION REQUEST message to the DRNC.

Upon reception, the DRNS shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Allowed Queuing Time* IE the DRNS may queue the request before providing a response to the SRNC.

DCH Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Allocation/Retention Priority* IE for a DCH to be modified, the DRNS should use this information when reserving resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Frame Handling Priority* IE for a DCH to be modified, the DRNS should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (UL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Transport Format Set (DL)* IE for a DCH to be modified, the DRNS shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *UL DCH FP Mode* IE for a DCH to be modified, the DRNS shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWS* IE for a DCH to be modified, the DRNS shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *ToAWE* IE for a DCH to be modified, the DRNS shall apply the new ToAWE in the user plane for this DCH in the new configuration.

DCH Addition:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be added to the Radio Link(s), the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall:

1. treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
 2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration
- The DRNS should use the *Allocation/Retention Priority* IE received for a DCH to be added when allocating resources for this DCH in the new configuration.

[Editor's note: The priority handling in the DRNS has not been discussed in RAN WG3. Neither has the possibilities for pre-emption (not retaining a resource) of DCHs/RLs. The handling of the *Allocation/Retention Priority* IE is thus not clear and is regarded as FFS.]

The DRNS should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *RLC Mode* IE, the DRNS may use this information to optimise the power control.

The DRNS shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The DRNS shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

DCH Deletion:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the DRNS shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the DRNS shall not include this set of co-ordinated DCHs in the new configuration.

Physical Channel Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (UL)* IE, the DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (DL)* IE, the DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate (UL)* IE, the DRNS should use this information when reserving resources for the Uplink of the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Mean Bit Rate (DL)* IE, the DRNS should use this information when reserving resources for the Downlink of the new configuration.

[Editor's note: There is presently no clear definition of the *Mean Bit Rate* IEs. The handling of these IEs is thus regarded as FFS.]

If the requested modifications are allowed by the DRNS, the DRNS has successfully allocated the required resources, and changed to the new configuration it shall respond to the SRNC with the RADIO LINK RECONFIGURATION RESPONSE message.

The DRNS decides the maximum and minimum Eb/No for the uplink of the Radio Link(s) and shall return this in the IEs *Maximum Uplink Eb/No* and *Minimum Uplink Eb/No* for each Radio Link in the RADIO LINK RECONFIGURATION RESPONSE message.

In case of a set of co-ordinated DCHs requiring a new transport bearer on Iur the *DCH to be Added* IE group or the *DCH to be Modified* IE group shall be included only for one of the DCH in the set of co-ordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the DRNS the *DCH to be Added* IE group and the *DCH to be Modified* IE group shall be included only for one of the combined Radio Links.

8.3.7.3 Unsuccessful Operation

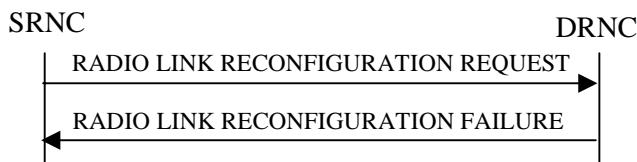


Figure 15: Unsynchronised Radio Link Reconfiguration procedure, Unsuccessful Operation

If the DRNS cannot allocate the necessary resources for all the new DCHs of a set of co-ordinated DCHs requested to be added it shall regard the Synchronised Radio Link Reconfiguration procedure as having failed.

If the requested Unsynchronised Radio Link Reconfiguration procedure fails for one or more Radio Link(s) the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC, indicating the reason for failure.

Typical cause values are:

Radio Network Layer Causes:

- UL Scrambling Code Already in Use
- DL Radio Resources not Available
- UL Radio Resources not Available
- Requested Configuration not Supported

Protocol Causes:

- Transaction not Allowed

Miscellaneous Causes:

- Control Processing Overload
- Not enough User Plane Processing Resources

8.3.7.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the the DRNS shall regard the Synchronised Radio Link Reconfiguration procedure as having failed and the DRNC shall send the RADIO LINK RECONFIGURATION FAILURE message to the SRNC.

8.3.8 Physical Channel Reconfiguration

8.3.8.1 General

Physical Channel Reconfiguration procedure is used by the DRNC to request to SRNC the reconfiguration of one of its physical channels.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.8.2 Successful Operation

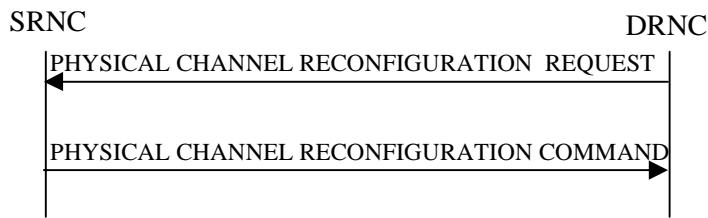


Figure 16: Physical Channel Reconfiguration procedure, Successful Operation

When the DRNC detects the need to modify one of its physical channels, it sends a PHYSICAL CHANNEL RECONFIGURATION REQUEST to the SRNC.

The message contains the new value of the physical channel parameter(s) that shall be reconfigured and in which radio link.

Upon reception of the PHYSICAL CHANNEL RECONFIGURATION REQUEST, the SRNC decides appropriate execution time for the change. It informs the UE and responds with the PHYSICAL CHANNEL RECONFIGURATION COMMAND to the DRNC that includes the CFN indicating the execution time. The message is sent over the dedicated signalling connection.

At the specified time, DRNS shall switch to the new configuration that has been requested, and release the resources related to the old physical channel configuration.

8.3.8.3 Unsuccessful Operation

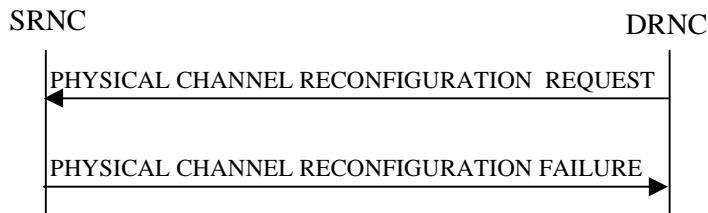


Figure 17: Physical Channel Reconfiguration procedure, Unsuccessful Operation

If the SRNC can not accept the reconfiguration request it will send the PHYSICAL CHANNEL RECONFIGURATION FAILURE message to the DRNC, that included the cause for the failure.

Typical cause values are:

Radio Network Layer Causes:

- Reconfiguration not Allowed

8.3.8.4 Abnormal Conditions

If the DRNC receives any of the messages RADIO LINK RECONFIGURATION PREPARE, RADIO LINK RECONFIGURATION REQUEST, or RADIO LINK DELETION REQUEST while waiting for the PHYSICAL CHANNEL RECONFIGURATION COMMAND message, this shall be regarded as a Physical Channel Reconfiguration failure. These messages thus override the DRNC request for physical channel reconfiguration.

8.3.9 Radio Link Failure

8.3.9.1 General

This procedure is started by the DRNS when one or more radio links are no longer available.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Radio Link Failure procedure at any time after establishing a Radio Link.

8.3.9.2 Successful Operation

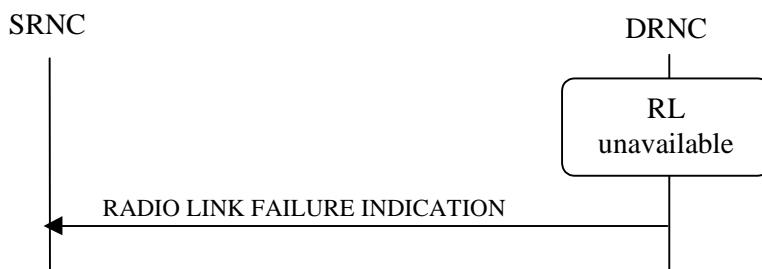


Figure 18: RL Failure procedure, Successful Operation

When DRNC detects that one or more Radio Links are no longer available, it shall send the RL FAILURE INDICATION message to the SRNC. The message indicates the failed radio links with the most appropriate cause values defined in the *Cause* IE.

When the RL Failure procedure is used to notify the non achievement or loss of UL synchronisation: the message shall be sent when the UL synchronisation of the radio link is not achieved after any of the procedures RL Setup or RL Addition. The message shall also be sent if the UL synchronisation is lost during an active connection.

Typical cause values are:

Radio Network Layer Causes:

- Synchronisation Failure

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- O&M Intervention

8.3.9.3 Abnormal Conditions

8.3.10 Radio Link Restoration

8.3.10.1 General

This procedure is used to notify of re-establishment of UL synchronisation after that the RL Failure procedure has been used to notify the loss of the synchronisation.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Radio Link Restoration procedure after establishing a Radio Link.

8.3.10.2 Successful Operation



Figure 19: RL Restoration procedure, Successful Operation

If the UL synchronisation is re-established, the DRNC shall send the RADIO LINK RESTORE INDICATION message to the SRNC. The message shall be sent only if the RL Failure procedure has been previously used to notify the loss of UL synchronisation of the same Radio Link(s), and it shall not be sent if a RL Deletion procedure have been activated in the DRNC after the RL Failure has been sent.

8.3.10.3 Abnormal Conditions

8.3.11 Measurement Initiation

[Editor's note: According to TSGR#5 (99)564, the following measurements shall also be considered:

- * Time of Arrival
- * Frequency Offset
- * Round Trip Time
- * RX Timing Deviation

Whether these measurements shall be dedicated or common measurements have so far not been considered by TSG RAN WG3 and are thus not incorporated.]

8.3.11.1 General

This procedure is used by an SRNS to request the initiation of measurements in a DRNS.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.11.2 Successful Operation

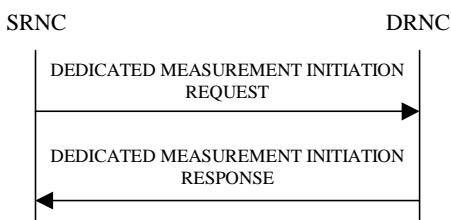


Figure 20: Measurement Initiation procedure, Successful Operation

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the SRNC to the DRNC.

Upon reception, the DRNC shall initiate the requested measurement according to the parameters given in the request. Unless specified below, the meaning of the parameters are given in other specifications.

If no RL Information is provided in the *Dedicated Measurement Object* IE, the measurement reports shall give the aggregated result for all radio links within the requested UE Context. If RL Information is provided in the request, the measurement request shall apply for the requested radio links individually.

The *Report Characteristics* IE indicates how the reporting of the measurement shall be performed.

If the *Report Characteristics* IE indicates 'On-Demand', the DRNS shall report the measurement result immediately.

If the *Report Characteristics* IE indicates 'Periodic', the DRNS shall periodically initiate a Measurement Report procedure for this measurement, with the requested report frequency.

If the *Report Characteristics* IE indicates 'Event A', the DRNS shall initiate a Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the DRNC shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE indicates 'Event B', the DRNS shall initiate a Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the DRNC shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE indicates 'Event C', the DRNS shall initiate a Measurement Reporting procedure when the measured entity rises more than the requested threshold within the requested time.

If the *Report Characteristics* IE indicates 'Event D', the DRNS shall initiate a Measurement Reporting procedure when the measured entity falls more than the requested threshold within the requested time.

If the *Report Characteristics* IE indicates 'Event E', the DRNS shall initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The DRNS shall also initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Frequency* IE is provided, the DRNS shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the DRNS shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the DRNC shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE indicates 'Event F', the DRNS shall initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The DRNS shall also initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Frequency* IE is provided, the DRNS shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the DRNS shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the DRNC shall use the value zero as hysteresis times for both Report A and Report B.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the DRNS shall initiate a Measurement Reporting procedure immediately, and then continue with the measurements as in normal operation.

If the DRNS was able to initiate the measurement requested by the SRNS it shall respond with the DEDICATED MEASUREMENT INITIATION RESPONSE message using the connection-oriented service of the signalling bearer. The message shall include the same Measurement Id that was used in the measurement request.

Only in the case the *Report Characteristics* IE indicated "On-Demand", the DEDICATED MEASUREMENT INITIATION RESPONSE message shall contain the measurement result. In this case also the *Dedicated Measurement Object* IE shall be included if it was included in the request message.

8.3.11.3 Unsuccessful Operation

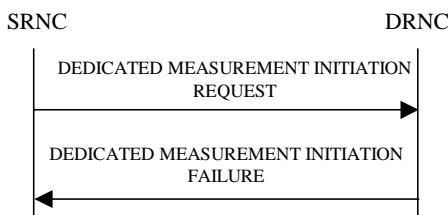


Figure 21: Measurement Initiation procedure, Unsuccessful Operation

If the requested measurement can not be initiated, the DRNC shall send a DEDICATED MEASUREMENT INITIATION FAILURE message using the connection-oriented service of the signalling bearer. The message shall include the same Measurement Id that was used in the measurement request and the *Cause* IE set to an appropriate value.

Typical cause values are:

Radio Network Layer Causes:

- Measurement not Supported For The Object

Miscellaneous Causes:

- Control Processing Overload
- HW Failure

8.3.11.4 Abnormal Conditions

8.3.12 Measurements Reporting

8.3.12.1 General

This procedure is used by the DRNS to report results of measurements requested by the SRNS with the Measurement Initiation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Measurement Reporting procedure at any time after establishing a Radio Link.

8.3.12.2 Successful Operation

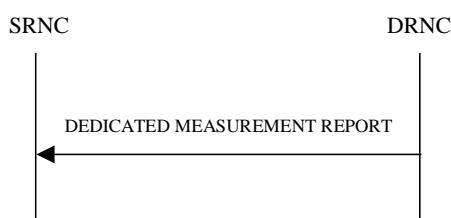


Figure 22: Measurement Reporting procedure, Successful Operation

If the requested measurement reporting criteria are met, the DRNS shall initiate a Measurement Reporting procedure. Unless specified below, the meaning of the parameters are given in other specifications.

The *Dedicated Measurement Id* IE shall be set to the Dedicated Measurement Id provided by the SRNS when initiating the measurement with the Measurement Initiation procedure.

8.3.12.3 Abnormal Conditions

8.3.13 Measurement Termination

8.3.13.1 General

This procedure is used by the SRNS to terminate a measurement previously requested by the Measurement Initiation procedure.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.13.2 Successful Operation

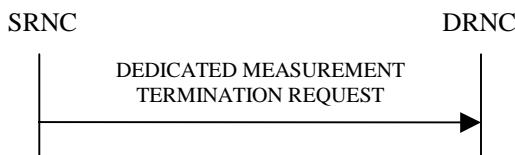


Figure 23: Measurement Termination procedure, Successful Operation

This procedure is initiated with a DEDICATED MEASUREMENT TERMINATION REQUEST message, sent from the SRNC to the DRNC.

Upon reception, the DRNS shall terminate reporting of measurements corresponding to the Dedicated Measurement Id.

8.3.13.3 Abnormal Conditions

-

8.3.14 Measurement Failure

8.3.14.1 General

This procedure is used by the DRNS to notify the SRNS that a measurement previously requested by the Measurement Initiation procedure can no longer be reported.

This procedure shall use the signalling bearer connection for the relevant UE context.

The DRNC may initiate the Measurement Failure procedure at any time after establishing a Radio Link.

8.3.14.2 Successful Operation

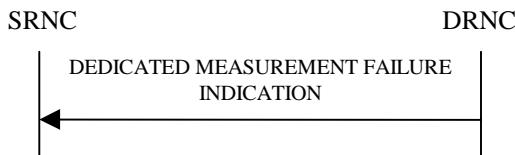


Figure 24: Measurement Failure procedure, Successful Operation

This procedure is initiated with a DEDICATED MEASUREMENT FAILURE INDICATION message, sent from the DRNC to the SRNC, to inform the SRNC that a previously requested measurement no longer can be reported.

Typical cause values are:

Miscellaneous Causes:

- Control Processing Overload
- HW Failure

- O&M Intervention

8.3.14.3 Abnormal Conditions

8.3.15 Down Link Power Control [FDD]

8.3.15.1 General

The purpose of this procedure is to balance the DL transmission powers of the radio links for one UE.

This procedure shall use the signalling bearer connection for the relevant UE context.

The Down Link Power Control procedure may be initiated by the SRNC at any time after establishing a Radio Link. If the SRNC has initiated deletion of the last Radio Link in this DRNS the Down Link Power Control procedure shall not be initiated.

8.3.15.2 Successful Operation



Figure 25: Down Link Power Control procedure, Successful Operation

The Down Link Power Control procedure is initiated by the SRNC sending a DL POWER CONTROL REQUEST message to the DRNC.

If the message contains the *DL Reference Power IE*, the DRNC shall perform the power balancing (see below) for all radio links for the UE context.

Alternatively, if the message contains the *DL Reference Power Information IE*, the DRNC shall perform the power balancing (see below) for all radio links addressed in the message.

The DRNS performs the power balancing by using the received desired DL Reference Power as a reference for adjusting the applied DL power.

[Editor's note: The exact mechanism is FFS.]

8.3.15.3 Abnormal Conditions

If the DRNC receives the DL POWER CONTROL REQUEST message after a request to delete the last radio link in the DRNC has been received, the DRNC shall ignore the message.

8.3.16 Compressed Mode Preparation [FDD]

8.3.16.1 General

The Compressed Mode Preparation procedure is used to prepare the compressed mode in the DRNS for one UE-UTRAN connection.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.16.2 Successful Operation

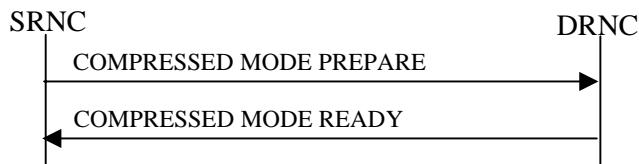


Figure 26: Compressed Mode Preparation procedure, Successful Operation

The Compressed Mode Preparation procedure is initiated by the SRNC by sending the COMPRESSED MODE PREPARE message to the DRNC.

If the proposed modifications are allowed by the DRNS and the DRNC has successfully initialised the required resources, the DRNC shall respond to the SRNC with COMPRESSED MODE READY message.

If the *Compressed Mode Method IE* is set to 'None', the DRNS shall terminate the compressed mode even if the COMPRESSED MODE PREPARE message was received before the end of the compressed mode period.

8.3.16.3 Unsuccessful Operation

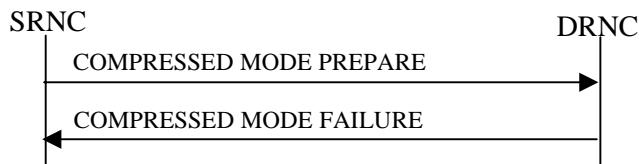


Figure 27: Compressed Mode Preparation procedure, unsuccessful case

If the requested reconfiguration fails for one or more RLs the DRNC shall abort the procedure and send the COMPRESSED MODE FAILURE message to the SRNC, indicating the reason for failure.

Typical cause values are:

Radio Network Layer Causes:

- Requested Configuration not Supported

Miscellaneous Causes:

- Not enough User Plane Processing Resources

8.3.16.4 Abnormal Conditions

8.3.17 Compressed Mode Commit [FDD]

8.3.17.1 General

The Compressed Mode Commit procedure is used to activate the compressed mode in the DRNS for one UE-UTRAN connection. This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.17.2 Successful Operation



Figure 28: Compressed Mode Commit procedure, Successful Operation

The DRNS shall initiate the compressed mode in accordance with the settings prepared by the Compressed Mode Preparation procedure at the CFN requested by the SRNC when receiving the COMPRESSED MODE COMMIT message from the SRNC.

8.3.17.3 Abnormal Conditions

8.3.18 Compressed Mode Cancellation [FDD]

8.3.18.1 General

The Compressed Mode Cancellation procedure is used to cancel the compressed mode in the DRNS for one UE-UTRAN connection.

This procedure shall use the signalling bearer connection for the relevant UE context.

8.3.18.2 Successful Operation

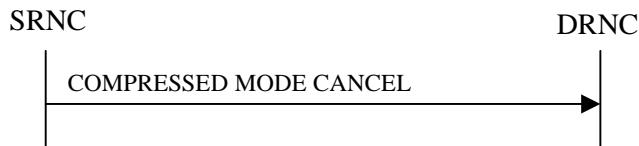


Figure 29: Compressed Mode Cancellation procedure, Successful Operation

The DRNS shall abort the compressed mode if it receives the COMPRESSED MODE CANCEL message.

8.3.18.3 Abnormal Conditions

8.4 Common Transport Channel Procedures

8.4.1 Common Transport Channel Resources Initialisation

8.4.1.1 General

The Common Transport Channel Resources Initialisation procedure is used by the SRNC for the initialisation of the Common Transport Channel user plane towards the DRNC and/or for the initialisation of the UE context in the DRNC.

This procedure shall use the connectionless mode of the signalling bearer.

8.4.1.2 Successful Operation

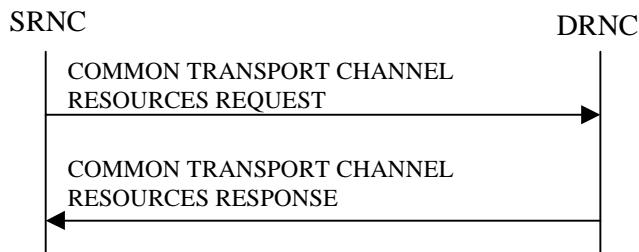


Figure 30: Common Transport Channel Resources Initialisation procedure, Successful Operation

The SRNC initiates the procedure by sending the message COMMON TRANSPORT CHANNEL RESOURCES REQUEST to the DRNC.

Upon reception of the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message, the DRNC shall respond by sending a COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message to the SRNC.

If the value of the *Transport Bearer Request Indicator* IE is set to "Bearer Requested", the DRNC shall store the received *Transport Bearer ID* IE and include the *Binding Identity* and *Transport Layer Address* IEs in the COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message.

If the value of the *Transport Bearer Request Indicator* IE is set to "Bearer not Requested", the DRNC shall use the transport bearer for the indicated by the *Transport Bearer ID* IE.

The DRNC shall include the *FACH Priority Indicator* IE and *FACH Initial Window Size* IE for each priority class that the DRNC has determined shall be used. The DRNC may include several *MAC-c SDU Length* IEs for each priority class.

If there exists multiple Secondary CCPCHs in the cell where the UE is located, the DRNC may include in the COMMON TRANSPORT CHANNEL RESOURCES RESPONSE message the *FACH Info for optional S-CCPCH* IE group to be used by the UE which is different from the Secondary CCPCH used by the UE at reception of the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message. If the DRNC includes the *FACH Info for optional S-CCPCH* IE group, then it shall also include the *FACH Priority Indicator* IE and *FACH Initial Window Size* IE for each priority class for the new Secondary CCPCH.

8.4.1.3 Unsuccessful Operation

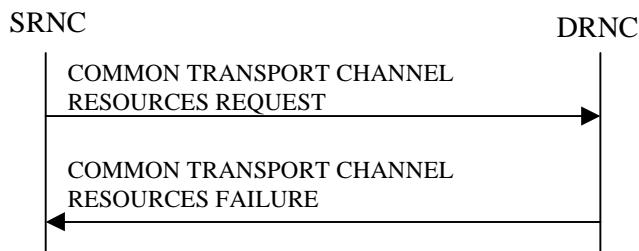


Figure 31: Common Transport Channel Resources Initialisation procedure, Unsuccessful Operation

If the *Transport Bearer Request Indicator* IE is set to "Bearer Requested" and the DRNC is not able to provide a Transport Bearer, the DRNC shall respond to the SRNC with the COMMON TRANSPORT CHANNEL RESOURCES FAILURE message, indicating the cause of the failure.

8.4.1.4 Abnormal Conditions

If the DRNC receives the COMMON TRANSPORT CHANNEL RESOURCES REQUEST message for an unknown D-RNTI it shall respond to the SRNC with the COMMON TRANSPORT CHANNEL RESOURCES FAILURE message, indicating the cause of the failure.

8.4.2 Common Transport Channel Resources Release

8.4.2.1 General

This procedure is used by the SRNC to request release of Common Transport Channel Resources for a given UE in the DRNS. The SRNC uses this procedure either to release the UE context from the DRNC (and thus both the D-RNTI and the C-RNTI) or to release only the C-RNTI.

This procedure shall use the connectionless mode of the signalling bearer.

8.4.2.2 Successful Operation



Figure 32: Common Transport Channel Resources Release procedure, Successful Operation

The SRNC initiates the Common Transport Channel Resources Release procedure by sending the message COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST to the DRNC. The SRNC may include the C-RNTI in the message to request the release of an individual C-RNTI.

At the reception of the message, if the C-RNTI is not present in the message, the DRNC shall release the whole UE context identified by the D-RNTI.

If the C-RNTI is included in the message, the DRNC shall release only the indicated C-RNTI.

8.4.2.3 Abnormal Conditions

If the DRNC receives the COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST messages for an unknown D-RNTI the message shall be ignored.

If the D-RNTI is known but the C-RNTI does not exist for that D-RNTI (UE context) the message shall be ignored.

8.5 Global Procedures

8.5.1 Error Indication

8.5.1.1 General

The Error Indication procedure is initiated by a node to report detected errors in one incoming message, provided they cannot be reported by an appropriate failure message

This procedure shall use the signalling bearer mode specified below.

8.5.1.2 Successful Operation

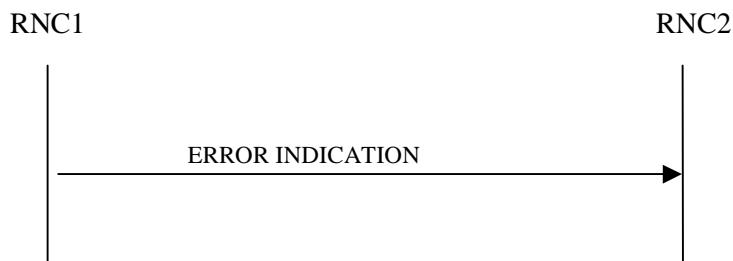


Figure 33: Error Indication procedure, Successful Operation

When the conditions defined in chapter 10 are fulfilled, the Error Indication procedure is initiated by an ERROR INDICATION message sent from the receiving node. This message shall use the same mode of the signalling bearer and the same signalling bearer connection (if connection oriented) as the message that triggers the procedure.

Typical cause values for the ERROR INDICATION message are:

Protocol Causes:

- Transfer Syntax Error
- Abstract Syntax Error ('Reject')
- Abstract Syntax Error (Ignore and Notify)
- Message not Compatible with Receiver State
- Unspecified

8.5.1.3 Abnormal Conditions

9 Elements for RNSAP Communication

9.1 Message Functional Definition and Content

9.1.1 General

This chapter defines the structure of the messages required for the RNSAP protocols.

For each message there is, a table listing the signalling elements in their order of appearance in the transmitted message.

All the RNSAP messages are listed in the following table:

Message name	Reference
RADIO LINK SETUP REQUEST	9.1.3
RADIO LINK SETUP RESPONSE	9.1.4
RADIO LINK SETUP FAILURE	9.1.5
RADIO LINK ADDITION REQUEST	9.1.6
RADIO LINK ADDITION RESPONSE	9.1.7
RADIO LINK ADDITION FAILURE	9.1.8
RADIO LINK DELETION REQUEST	9.1.9
RADIO LINK DELETION RESPONSE	9.1.10
RADIO LINK RECONFIGURATION PREPARE	9.1.11
RADIO LINK RECONFIGURATION READY	9.1.12
RADIO LINK RECONFIGURATION COMMIT	9.1.13
RADIO LINK RECONFIGURATION FAILURE	9.1.14
RADIO LINK RECONFIGURATION CANCEL	9.1.15
RADIO LINK RECONFIGURATION REQUEST	9.1.16
RADIO LINK RECONFIGURATION RESPONSE	9.1.17
RADIO LINK FAILURE INDICATION	9.1.18
RADIO LINK RESTORE INDICATION	9.1.19
DL POWER CONTROL REQUEST	9.1.20
PHYSICAL CHANNELRECONFIGURATION REQUEST	9.1.21
PHYSICAL CHANNELRECONFIGURATION COMMAND	9.1.22
PHYSICAL CHANNELRECONFIGURATION FAILURE	9.1.23
UPLINK SIGNALLING TRANSFER INDICATION	9.1.24
DOWNLINK SIGNALLING TRANSFER REQUEST	9.1.25
RELOCATION COMMIT	9.1.26
PAGING REQUEST	9.1.27
DEDICATED MEASUREMENT INITIATION REQUEST	9.1.28
DEDICATED MEASUREMENT INITIATION RESPONSE	9.1.29
DEDICATED MEASUREMENT INITIATION FAILURE	9.1.30
DEDICATED MEASUREMENT REPORT	9.1.31
DEDICATED MEASUREMENT TERMINATION REQUEST	9.1.32
DEDICATED MEASUREMENT FAILURE INDICATION	9.1.33
COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST	9.1.34
COMMON TRANSPORT CHANNEL RESOURCES REQUEST	9.1.35
COMMON TRANSPORT CHANNEL RESOURCES RESPONSE	9.1.36
COMMON TRANSPORT CHANNEL RESOURCES FAILURE	9.1.37
COMPRESSED MODE PREPARE	9.1.38
COMPRESSED MODE READY	9.1.39
COMPRESSED MODE FAILURE	9.1.40
COMPRESSED MODE COMMIT	9.1.41
COMPRESSED MODE CANCEL	9.1.42
ERROR INDICATION	9.1.43

9.1.2 Message Contents

An information element can be of the following *types*:

M	The information element is mandatory, i.e. always present in the message
O	The information element is optional, i.e. may or may not be present in the message independently on the presence or value of other information elements in the same message
C#	The presence of the information element is conditional to the presence or to the value of another information element, as reported in the correspondent note below the message description.

In case of an information element group, the group is preceded by a name for the info group (in bold). It is also indicated whether the group is mandatory, optional or conditional. Each group may be also repeated within one message. The presence field of the information elements inside one group defines if the information element is mandatory, optional or conditional if the group is present.

9.1.3 RADIO LINK SETUP REQUEST

9.1.3.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
UL DPCH Information		1		
UL Scrambling Code	M			
Min UL Channelisation Code Length	M			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	M			For the UL.
UL Transport Format Combination Set	M			
UL DPCCH Slot Format	M			
UL Eb/No Target	O			
Diversity mode	M			
D Field Length	C-FB			
SSDT Cell ID Length	O			
S Field Length	O			
Mean Bit Rate	O			For the UL.
DL DPCH Information		1		
Transport Format Combination Set	M			
DL DPCH Slot Format	M			
TFCI Signalling Mode	M			
TFCI Presence	C-SlotFormat			
Multiplexing Position	M			
Power Offset Information		1		
PO1	M		Power Offset	Power offset for the TFCI bits.
PO2	M		Power Offset	Power offset for the TPC bits.
PO3	M		Power Offset	Power offset for the pilot bits.
TPC Downlink Step Size	M			
Mean Bit Rate	O			For the DL.
DCH Information		1..<maxnoofDCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
RL Information		1...<maxnoofRLs>		

	>		
RL ID	M		
C-ID	M		
Frame Offset	M		
Chip Offset	M		
Propagation Delay	O		
Diversity Control Field	C – NotFirstRL		
Initial DL TX Power	O	DL Power	
Primary CPICH Ec/Io	O		
SSDT Cell ID	O		

Condition	Explanation
CodeLen	This IE is present only if "Min UL Channelisation Code len"th equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
SlotFormat	This IE is only present if the DL DPCP Slot Format is equal to any of the values 12 to 16.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information .

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.3.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
D-RNTI	O			
Allowed Queuing time	O			
Mean Bit Rate	O			For the UL.
Mean Bit Rate	O			For the DL.
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	M			For the UL.
TFCI Coding	M			
Puncture Limit	M			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	M			For the DL.
TFCI Coding	M			
Puncture Limit	M			
DCH Information		1..<maxnoofDCHs>		
DCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
RL Information		1		
RL ID	M			
C-ID	M			
Frame Offset	M			
Primary CCPCH RSCP	O			

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofCCTrCHs	Maximum no. of CCTrCH for one UE.

9.1.4 RADIO LINK SETUP RESPONSE

9.1.4.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1..<maxnoofRLs>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodeS>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	C-NotFirstRL			
<i>CHOICE diversity Indication Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	0..<maxnoofTDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	

Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell.
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell.

9.1.4.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
Maximum Uplink Eb/No	M		Uplink Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Uplink Eb/No Target	O		Uplink Eb/No	
Downlink Eb/No Target	O			
UL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPCHs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Neighbouring FDD Cell Information	O	0..<maxnoofFDDneighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			

Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O	<i>0..<maxnoofTDDneighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CCTrCH.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofFDDneighbours	Maximum number of neighbouring FDD cell for one cell
MaxnoofTDDneighbours	Maximum number of neighbouring TDD cell for one cell
MaxnoofCCTrCHs	Maximum no. of CCTrCH for one UE.

9.1.5 RADIO LINK SETUP FAILURE

9.1.5.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
Unsuccessful RL Information Response		1...<maxnoofRLs>		
RL ID	M			
Cause	M			
Successful RL Information Response		0..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Diversity Indication	M			
<i>CHOICE diversity Indication</i>				
Combining				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				"IE not present" is equivalent to "First RL".
DCH Information Response		0..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Neighbouring FDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information	O			
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case3			
PSCH Time Slot	C-Case2&3			
Uplink Eb/No Target	O		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink	

			Eb/No	
Minimum Uplink Eb/No	M		Uplink Eb/No	
Downlink Eb/No Target	O			
Criticality Diagnostics	O			

Condition	Explanation
IfComb	This IE is present if the 'Diversity Indication' IE indicates 'combining' in the Node B.
IfNotComb	This IE is present if the 'Diversity Indication' IE indicates 'non combining' in the Node B.
NotFirstRL	The IE is present only if the RL is not the first RL in the RL Information
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.

9.1.5.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.6 RADIO LINK ADDITION REQUEST

9.1.6.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Uplink Eb/No Target	M		Uplink Eb/No	
RL Information		1..<maxnoofRLs-1>		
RL ID	M			
C-Id	M			
Frame Offset	M			
Chip Offset	M			
Diversity Control Field	M			
Primary CPICH Ec/Io	O			
SSDT Cell Identity	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

9.1.6.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
RL ID	M			
C-Id	M			
Frame Offset	M			
Diversity Control Field	M			
Primary CCPCH RSCP	O			

9.1.7 RADIO LINK ADDITION RESPONSE

9.1.7.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL Scrambling Code	M			
DL Channelisation Code	M			
Diversity Indication	M			
<i>CHOICE diversity indication</i>				
Combining				
RL ID	M			Reference RL-Id
Non combining				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.7.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information Response		1		
RL ID	M			
SAI	M			
UL Interference Level	M			
UL CCTrCH Information		1..<maxnoof CCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<maxnoOfDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
DL CCTrCH Information		1..<maxnoof CCTrCHs>		
CCTrCH ID	M			
DL DPCH information		1..<maxnoOfDPC Hs>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
Diversity Indication	M			
<i>CHOICE diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			

Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		<i>0..<maxnoofTDD Neighbours></i>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range Bound	Explanation
MaxnofDCHs	Maximum number of dedicated channels on one RL
MaxnofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnofDLCodes	Maximum number of DL code information
MaxnofDPCHs	Maximum number of DPCH in one CCTrCH
MaxnofCCTrCHs	no. of CCTrCH for one UE.

9.1.8 RADIO LINK ADDITION FAILURE

9.1.8.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1..<maxnoofRLs-1>		
RL ID	M			
Cause	M			
Succesfull RL Information Response		1..<maxnoofRLs-2>		
RL ID	M			
SAI	M			
UL Interference Level	M			
DL Code Information		1..<maxnoofDLCodes>		
DL scrambling code	M			
DL channelisation code	M			
Diversity Indication	M			
<i>CHOICE diversity indication</i>				
Combining				
RL ID	M			Reference RL-Id
Non combining				
DCH Information Response		1..<maxnoofDCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Minimum Uplink Eb/No	M		Uplink Eb/No	
Maximum Uplink Eb/No	M		Uplink Eb/No	
Neighbouring FDD Cell Information		0..<maxnoofFDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Primary Scrambling Code	M			
Primary CPICH Power	O			
Neighbouring TDD Cell Information		0..<maxnoofTDD Neighbours>		
UC-Id	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
UARFCN	M			
Frame Offset	O			
Cell Parameter ID	M			
Sync Case	M			
Time Slot	C-Case1			
PSCH Time Slot	C-Case2&3			
Criticality Diagnostics	O			

Condition	Explanation
Case1	This IE is present only if Sync Case = Case1.
Case2&3	This IE is present only if Sync Case = Case2 or Case3.

Range bound	Explanation
MaxnoofDCHs	Maximum number of dedicated channels on one RL
MaxnoofRLs	Maximum number of radio links for one UE
MaxnoofFDDNeighbours	Maximum number of neighbouring FDD cells for one cell
MaxnoofTDDNeighbours	Maximum number of neighbouring TDD cells for one cell
MaxnoofDLCodes	Maximum number of DL code information

9.1.8.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Unsuccessful RL Information Response		1		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.9 RADIO LINK DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1..<maxnoofRLs>		
RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

9.1.10 RADIO LINK DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Criticality Diagnostics	O			

9.1.11 RADIO LINK RECONFIGURATION PREPARE

9.1.11.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCCH Information		0..1		
UL Scrambling code	O			
Min UL Channelisation Code Length	O			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	O			For the UL.
TFCS	O			TFCS for the UL.
UL DPCCH Slot Format	O			
SSDT Cell Identity Length	O			
S-Field Length	O			
Mean Bit Rate	O			For the UL.
DL DPCCH Information		0..1		
TFCS	O			TFCS for the DL.
DL DPCCH Slot Format	O			
TFCI Signalling Mode	O			
TFCI Presence	C- SlotFormat			
MultiplexingPosition	O			
Mean Bit Rate	O			For the DL.
DCHs to Modify		0..<maxnoofDCHs>		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		0..<maxnoofDCHs>		
DCH ID	M			
DCH Combination Indicator	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs>		
DCH ID	M			
RL Information		0..<maxnoofRLs>		
RL ID	M			

SSDT Indication	O			
SSDT Cell Identity	C - SSDTIndON			

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH Slot Format is equal to any of the values 12 to 16.

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.11.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	O			For the UL.
TFCI Coding	O			
Puncture Limit	O			
DL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	O			For the DL.
TFCI Coding	O			
Puncture Limit	O			
DCHs to Modify		0..<maxnoofDCHs>		
DCH ID	M			
CCTrCH Id	O			UL CCTrCH in which the DCH is mapped.
CCTrCH Id	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		0..<maxnoofDCHs>		
DCH ID	M			
CCTrCH Id	M			UL CCTrCH in which the DCH is mapped.
CCTrCH Id	M			DL CCTrCH in which the DCH is mapped
DCH Combination Indicator	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
BLER	M			For the UL.
BLER	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs>		
DCH ID	M			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.12 RADIO LINK RECONFIGURATION READY

9.1.12.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		0..<maxnoofRLs>		
RL ID	M			
Maximum Uplink Eb/No	O		Uplink Eb/No	
Minimum Uplink Eb/No	O		Uplink Eb/No	
Downlink Code Information		0..<maxnoofDLCo des>		
DL Scrambling Code	M			
DL Channelisation Code	M			
DCH to be Added		0..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
DCH to be Modified		0..<maxnoofDCHs >		Only one DCH per set of co-ordinated DCHs shall be included. The IE group shall be included only once per DCH per set of combined RLs.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs.
MaxnoofRLs	Maximum number of RLs for a UE.
MaxnoofDLCodes	Maximum number of Downlink Channelisation Codes.

9.1.12.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		0..1		
RL ID	M			
Maximum Uplink Eb/No	O		Uplink Eb/No	
Minimum Uplink Eb/No	O		Uplink Eb/No	
UL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<maxnoofDPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
DL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<maxnoofDPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
DCH to be Added		0..<maxnoofDCHs>		<p>Only one DCH per set of co-ordinated DCHs shall be included.</p> <p>The IE group shall be included only once per DCH per set of combined RLs.</p>
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
DCH to be Modified		0..<maxnoofDCHs>		<p>Only one DCH per set of co-ordinated DCHs shall be included.</p> <p>The IE group shall be included only once per DCH per set of combined RLs.</p>
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			

Criticality Diagnostics	O			
-------------------------	---	--	--	--

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.
Maxnoof DPCHs	Maximum number of DPCHs in one CCTrCH.

9.1.13 RADIO LINK RECONFIGURATION COMMIT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
CFN	M			

9.1.14 RADIO LINK RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Cause	M			
RLs Causing Reconfiguration Failure		0..<maxnoofRLs>		
RL ID	M			
Cause	M			
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.15 RADIO LINK RECONFIGURATION CANCEL

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			

9.1.16 RADIO LINK RECONFIGURATION REQUEST

9.1.16.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
UL DPCH Information		0..1		
TFCS	O			TFCS for the UL.
Mean Bit Rate	O			
DL DPCH Information		0..1		
TFCS	O			TFCS for the DL.
TFCI Signalling Mode	O			
Mean Bit Rate	O			
DCHs to Modify		0..<maxnoofDCHs>		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to add		0..<maxnoofDCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs>		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.

9.1.16.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
Allowed Queuing Time	O			
Mean Bit Rate	O			For the UL
Mean Bit Rate	O			For the DL
UL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	M			
DL CCTrCH Information		0..<maxnoofCCTrCHs>		
CCTrCH ID	M			
TFCS	M			
DCHs to Modify		0..<maxnoofDCHs>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Allocation/Retention Priority	O			
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
DCHs to Add		0..<maxnoofDCHs>		
DCH ID	M			
RLC Mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Allocation/Retention Priority	M			
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
DCHs to Delete		0..<maxnoofDCHs>		
DCH ID	M			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.17 RADIO LINK RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction ID	M			
RL Information Response		<i>0..<maxnoofRLs></i>		
RL ID	M			
Maximum Uplink Eb/No	O		Uplink Eb/No	
Minimum Uplink Eb/No	O		Uplink Eb/No	
DCH to be Added		<i>0..<maxnoofDCHs></i>		<p>Only one DCH per set of co-ordinated DCHs shall be included.</p> <p>The IE group shall be included only once per DCH per set of combined RLs.</p>
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
DCH to be Modified		<i>0..<maxnoofDCHs></i>		<p>Only one DCH per set of co-ordinated DCHs shall be included.</p> <p>The IE group shall be included only once per DCH per set of combined RLs.</p>
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.18 RADIO LINK FAILURE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information	M	<i>1 .. <MaxnoofRLs></i>		
RL ID	M			
Cause	M			

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.19 RADIO LINK RESTORE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1 .. <MaxnoofRLs>		
RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.

9.1.20 DL POWER CONTROL REQUEST [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
<i>CHOICE procedure scope</i>				
" <i>ALL RL</i> "				
DL Reference Power	M			
" <i>Individual RLs</i> "				
DL Reference Power Information		1..<maxnoofRLs>		
RL ID	M			
DL Reference Power	M		DL Power	The SRNS requested downlink power to be used by the downlink inner loop power control to eliminate the power drifting problem.

Range Bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.

9.1.21 PHYSICAL CHANNEL RECONFIGURATION REQUEST

9.1.21.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
RL ID	M			
DL Code Information		1 .. <maxnoofDLCode S>		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			

Range bound	Explanation
MaxnoofDLcodes	Maximum number of DL codes for one UE

9.1.21.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
RL Information		1		
RL ID	M			
UL CCTrCH Information		1.. <maxnoofCCTrCHs>		
CCTrCH ID	M			
UL DPCH Information		1..<MaxnoofDPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
DL CCTrCH Information		1..<maxnoofCCTrCHs>		
CCTrCH ID	M			
DL DPCH Information		1..<MaxnoofDPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			

Range bound	Explanation
MaxnoofDPCHs	Maximum no. of DPCHs for one CCTrCH.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.22 PHYSICAL CHANNEL RECONFIGURATION COMMAND

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CFN	M			
Criticality Diagnostics	O			

9.1.23 PHYSICAL CHANNEL RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.24 UPLINK SIGNALLING TRANSFER INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
UC-ID	M			
SAI	M			
C-RNTI	M			
S-RNTI	M			
D-RNTI	O			
L3 Information	M			
CN PS Domain Identifier	O			
CN CS Domain Identifier	O			
URA ID	M			
Multiple URAs Indicator	M			
RNCs with Cells in the Accessed URA		0 .. <MaxRNCinURA-1>		
RNC-Id	M			

Range bound	Explanation
MaxRNCinURA	Maximum number of RNC in one URA

9.1.25 DOWLINK SIGNALLING TRANSFER REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
C-Id	M			
D-RNTI	M			
L3 Information	M			
D-RNTI Release Indication	M			

9.1.26 RELOCATION COMMIT

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	O			
RANAP Relocation Information	O			

9.1.27 PAGING REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CHOICE paging area "URA"				
URA-Id	M			
"Cell"				
C-Id	M			
SRNC-Id	M		RNC-Id	
S-RNTI	M			
DRX Parameter	M			

9.1.28 DEDICATED MEASUREMENT INITIATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Dedicated Measurement Object Type	M			
CHOICE Dedicated Measurement Object Type				
"RL"				
RL Information		1..<maxnoofRLs>		
RL-id	M			
DPCH Id	O			
Dedicated Measurement Type	M			
Measurement Characteristics	M			
Report Characteristics	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs a measurement can be started on.

9.1.29 DEDICATED MEASUREMENT INITIATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			Are both transaction id and Measurement id needed ?
Measurement Id	M			
CHOICE Dedicated Measurement Object Type				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
RL Information		1..<maxnoofRLs>		
RL-id	M			
DPCH Id	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference
Criticality Diagnostics	O			

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs the measurement can be started on.

9.1.30 DEDICATED MEASUREMENT INITIATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			
Criticality Diagnostics	O			

9.1.31 DEDICATED MEASUREMENT REPORT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
CHOICE Dedicated Measurement Object Type				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
RL Information		1..<maxnoofRLs>		
RL-Id	M			
DPCH Id	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference

Range bound	Explanation
MaxnoofRLs	Maximum number of individual RLs the measurement can be started on.

9.1.32 DEDICATED MEASUREMENT TERMINATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			

9.1.33 DEDICATED MEASUREMENT FAILURE INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			

9.1.34 COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	M			
C-RNTI	O			Release of an individual C-RNTI.

9.1.35 COMMON TRANSPORT CHANNEL RESOURCES REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
D-RNTI	M			
Transport Bearer Request Indicator	M			Request a new transport bearer or to use an existing bearer for the user plane.
Transport Bearer ID	M			Indicates the Iur transport bearer to be used for the user plane.

9.1.36 COMMON TRANSPORT CHANNEL RESOURCES RESPONSE

9.1.36.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCH coupled to PRACH				
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
MAC-c SDU Length		1..<MaxNbMACcSDULength>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
FACH Info for optional S-CCPCH	O			
FDD S-CCPCH Offset	M			Corresponds to: $\tau_{S-CCPCH,k}$, see ref. [6]
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
TFCS	M			For the DL.
Secondary CCPCH Slot Format	M			
Pilot Bits Used Indicator	M			
MultiplexingPosition	M			
STTD Indicator	M			
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
Data Frame Size		1..<MaxNbMACcSDULength>		
.....MAC-c SDU Length	M			
FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.

9.1.36.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
FACH Info for S-CCPCHs coupled to PRACH		0 .. 1		
Priority Indicator & Initial Window Size		1 .. 16		Provide Information for each priority class used
FACH Priority Indicator	M			
MAC-c SDU Length		1..< MaxNbMACcSDU Length>		
MAC-c SDU Length	M			
FACH Initial Window Size	M			
FACH Info for optional group of S-CCPCHs		0 .. 1		
TFCS	M			For DL CCTrCH supporting several Secondary CCPCHs
Secondary CCPCH	M	1..< MaxnoofSCCPCHs>		
TDD Channelisation Code	M			
Time Slot	M			
Burst Type	M			
Midamble shift	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
STTD Indicator	M			
Priority Indicator & Initial Window Size		1..16		Provide Information for each priority class used
FACH Priority Indicator	M			
Data Frame Size		1..< MaxNbMACcSDU Length>		
.....MAC-c SDU Length	M			
FACH Initial Window Size	M			
Transport Layer Address	O			
Binding Identity	O			
Criticality Diagnostics	O			

Range Bound	Explanation
MaxNbMACcSDULength	Maximum number of different MAC-c SDU Lengths.
MaxnoofSCCPCHs	TBD

9.1.37 COMMON TRANSPORT CHANNEL RESOURCES FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
S-RNTI	M			
Cause	M			
Criticality Diagnostics	O			

9.1.38 COMPRESSED MODE PREPARE [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type				
Transaction ID				
TGP1	M		Gap Period	Applies only to the first and all the subsequent odd gaps if TGP2 is present, see ref. [9].
TGP2	O		Gap Period	
TGL	M			
TGD	M			
PD	M			
UL/DL Compressed Mode Selection	M			
Compressed Mode Method	M			
Gap Position Mode	M			
SN	C-Flex			
Downlink Frame Type	M			
Scrambling Code Change	C-SF/2			
Power Control Mode	M			
Power Resume Mode	M			
Uplink Delta Eb/No	M			
Uplink Delta Eb/No After	M			

Condition	Explanation
Flex	This IE is present only if "Gap position Mode" equals to 'flexible'.
SF/2	This IE is present only if Compressed Mode Method equals toSF/2

9.1.39 COMPRESSED MODE READY [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Criticality Diagnostics	O			

9.1.40 COMPRESSED MODE FAILURE [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality Diagnostics	O			

9.1.41 COMPRESSED MODE COMMIT [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			
CFN	M			

9.1.42 COMPRESSED MODE CANCEL [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type	M			
Transaction ID	M			

9.1.43 ERROR INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Transaction Id	M			
Cause	C_ifalone			
Criticality Diagnostics	C_ifalone			

Condition	Explanation
C_ifalone	At least either of Cause IE or Criticality Diagnostics IE shall be present.

9.2 Information Element Functional Definition and Contents

9.2.1 Common Parameters

This chapter contains parameters that are common to FDD and TDD.

9.2.1.1 Allocation/Retention Priority

This parameter indicates the priority level in the allocation and retention of DCI resources in DRNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
9.2.1.1 Allocation/Retention Priority			Frame Handling Priority	

9.2.1.2 Allowed Queuing Time

This parameter specifies the maximum queuing time that is allowed in the DRNS. The default value is no queuing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Allowed Queuing Time			INTEGER(0..60)	Seconds

9.2.1.3 Binding ID

The Binding ID is the identifier of a user data stream. It is allocated at the DRNS and it is unique for each transport bearer under establishment to/from the DRNS. The length of this parameter is variable.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Binding ID			Octetstring (1..4,...)	

9.2.1.4 BLER

This Block Error Rate defines the radio interface Transport Block Error Rate that shall be guaranteed to the DCH by the SRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
BLER			INTEGER (-63..0)	Step 0.1. (Range -6.3...0). It is the Log10 of the BLER

9.2.1.5 Cause

The purpose of the cause information element is to indicate the reason for a particular event for the whole protocol.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cause Group	M		ENUMERATED (Radio Network Layer, Transport Layer, Protocol, Misc)	
<i>CHOICE cause group</i>				
<i>Radio Network Layer</i>				
Radio Network Layer Cause	M		ENUMERATED (Unknown C-ID, Cell not Available, Power Level not Supported, UL Scrambling Code Already in Use, DL Radio Resources not Available, UL Radio Resources not Available, Measurement not Supported For The Object, Macrodiversity Combining Not Possible, Reconfiguration not Allowed, Requested Configuration not Supported Synchronisation Failure, Unspecified)	
<i>Transport Layer</i>				
Transport Layer Cause	M		ENUMERATED (Transport link failure, Transmission port not available, Unspecified)	
<i>Protocol</i>				
Protocol Cause			ENUMERATED (Transaction not Allowed, Transfer Syntax Error, Abstract Syntax Error (Reject), Abstract Syntax Error (Ignore and Notify), Message not Compatible with Receiver State, Semantic Error, Unspecified)	
<i>Misc</i>				
Miscellaneous Cause	M		ENUMERATED (Control Processing Overload Hardware Failure, O&M Intervention, Not enough User Plane Processing Resources, Unspecified)	

9.2.1.6 Cell Identifier (C-Id)

The C-ID (Cell Identifier) is the identifier of a cell in one RNS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-ID			INTEGER (0...65535)	

9.2.1.7 Cell Parameter ID

The Cell Parameter ID identifies unambiguously the Code Groups, Scrambling Codes, Midambles and Toffset (see table 9 of ref. [11]).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Parameter ID			INTEGER (0...127)	

9.2.1.8 CFN

Connection Frame Number for the radio connection, see ref. [14].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CFN			INTEGER (0... 255)	

9.2.1.9 CN CS Domain Identifier

Identification of the CN node in the CS Domain.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CN PS Domain Identifier				
PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).</p>
LAC	M		OCTET STRING (3)	0000 and FFFE not allowed

9.2.1.10 CN PS Domain Identifier

Identification of the CN Node in the PS Domain.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CN PS Domain Identifier				
PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).</p>
LAC	M		OCTET STRING (2)	0000 and FFFE not allowed
RAC	M		OCTET STRING (1)	

9.2.1.11 Criticality Diagnostics

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Criticality Diagnostics				
Procedure Code	O		INTEGER (0..255)	Procedure code is to be used if Criticality diagnostics is part of Error Indication procedure, and not within the response message of the same operation that caused the error
Triggering Message	O		ENUMERATED(initiating message, successful outcome, unsuccessful outcome, outcome)	The Triggering Message is used only if the Criticality diagnostics is part of Error Indication except when the procedure code is not understood.
Criticality Response	O		ENUMERATED(reject, ignore, notify)	This Criticality response IE is used for reporting the Criticality of the Triggering message
Transaction Id	O		INTEGER (0..255)	
Information Element Criticality Diagnostics		1..<maxnoof errors>		
Criticality Response	M		ENUMERATED(reject, ignore, notify)	The Criticality response IE is used for reporting the criticality of the triggering IE. The value "Ignore" shall never be used.
IE Id	M		INTEGER (0..65535)	The IE Id of the not understood IE as defined in the ASN.1 part of the specification.

Range bound	Explanation
maxnoferrors	Maximum no. of IE errors allowed to be reported with a single message. The value for maxnoferrors is 256.

9.2.1.12 C-RNTI

C-RNTI (Cell RNTI) is the UE identifier in the CRNC to be used over the radio interface. It is unique in the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-RNTI			INTEGER(0..65535)	

9.2.1.13 DCH Combination Indicator

The DCH Combination Indicator is used to indicate the multiplexing of more than one DCH on transport bearer. The value should be unique for each group of coordinated DCH's per request message.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH Combination Ind			INTEGER(0..255)	

9.2.1.14 DCH ID

The DCH ID is the identifier of an active dedicated transport channel. It is unique for each active DCH among the active DCHs simultaneously allocated for the same UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH ID			INTEGER(0..255)	

9.2.1.15 Dedicated Measurement Object Type

The Dedicated Measurement Object type indicates the type of object that the measurement is to be performed on.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERATED (RL, ALLRL, ...)	

9.2.1.16 Dedicated Measurement Type

The Dedicated Measurement Type identifies the type of measurement that shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Type			ENUMERATED (SIR, SIR Error, Transmitted Code Power, RSCP,...)	RSCP is used by TDD only.

NOTE: For definitions of the measurement types refer to ref. [9] and [12].

9.2.1.17 Dedicated Measurement Value

The Dedicated Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated measurement Value				
SIR value	O		Enumerated(-10 .. 20), step 0.1 dB	
SIR error Value	O		Enumerated (-10 .. 10), step 0.1 dB	If SIRerror<=-10, SIR error Value shall be set to -10 If SIRerror=>10, SIR error Value shall be set to 10
Transmitted Code Power Value	O		Enumerated (-35 .. 15), step 0.1 dB	Relative to CPICH
RSCP	O		TBD	TDD only.

<Editors Note: Some adjustment of the ranges for these measurements might be needed as they await a decision on range for this measurement in TSG RAN WG1>

9.2.1.18 Downlink Eb/No Target

It is the Target Downlink Eb/No that shall be used as initial value by the UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Eb/No Target			Uplink Eb/No	

9.2.1.19 D-RNTI

D-RNTI is the UE context identifier in the DRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D-RNTI			Integer(0..2^20 -1)	

9.2.1.20 D-RNTI Release Indication

The D-RNTI Release Indication indicates whether or not a CRNC shall release the D-RNTI allocated for a particular UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D-RNTI Release Indication			ENUMERATED (Release D-RNTI, not Release D-RNTI)	

9.2.1.21 DRX Parameter

[Editor's note: This parameter needs to be defined. Contributions are invited.]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DRX Parameter			TBD	

9.2.1.22 FACH Initial Window Size

Indicates the initial number of MAC-c SDUs that may be transmitted before an acknowledgement is received from the DRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FACH Initial Window Size			INTEGER (0..255)	Number of framesMAC-c SDUs. 255 = Unlimited number of FACH data frames.

9.2.1.23 FACH Priority Indicator

Indicates the relative priority of the FACH data frame. Used by the DRNC when scheduling FACH traffic.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FACH Priority Indicator			INTEGER (0..15)	Relative priority of the FACH data frame: 0=Lowest Priority ... 15=Highest Priority

9.2.1.24 Frame Handling Priority

This parameter indicates the priority level to be used during the lifetime of the DCH/DSCH for temporary restriction of the allocated resources due overload reason.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Handling Priority			INTEGER (0..15)	0=Lowest Priority, ... 15=Highest Priority

9.2.1.25 Frame Offset

Frame Offset is the required offset between the dedicated channel downlink transmission frames (CFN, Connection Frame Number) and the broadcast channel frame offset (Cell Frame Number). The Frame_offset is used in the translation between Connection Frame Number (CFN) on Iub/Iur and least significant 8 bits of SFN (System Frame Number) on Uu. The Frame Offset is UE and cell specific.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Offset			INTEGER (0..255)	Frames

9.2.1.26 MAC-c SDU Length

Indicates the MAC-c SDU Length. There may be multiple data frame sizes per priority class.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
MAC-c SDU Length			INTEGER (1..5000)	Size of the MAC-c SDU in number of bits.

9.2.1.27 Mean Bit Rate

It is the mean user data rate that is expected to be carried by the transport channels of one radio link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Mean Bit Rate			INTEGER (1...2000)	Kbit/seconds

9.2.1.28 Measurement Characteristics

The Measurement Characteristics indicates how the measurement shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement Characteristics				
Measurement Frequency	M		TBD	
Averaging Duration	M		TBD	

Editors Note: The exact definition and structure is this information element awaits decisions in TSG RAN WG2.

9.2.1.29 Measurement ID

The Measurement Id uniquely identifies any measurement on dedicated resources requested over RNSAP.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement ID			Integer(0 .. 2^20-1)	

9.2.1.30 Message Type

The Message Type uniquely identifies the message being sent.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type			ENUMERATED (RL Setup Request, RL Setup Response, RL Setup Failure, RL Addition Request, RL Addition Response, RL Addition Failure, RL Deletion Request, RL Deletion Response, RL Reconfiguration Prepare, RL Reconfiguration Ready, RL Reconfiguration Commit, RL Reconfiguration Failure, RL Reconfiguration Cancel, RL Reconfiguration Request, RL Reconfiguration Response, RL Failure Indication, RL Restore Indication, DL Power Control Request, Physical Channel Reconfiguration Request, Physical Channel Reconfiguration Command, Physical Channel Reconfiguration Failure, UL Signalling Transfer Indication, DL Signalling Transfer Request, Relocation Commit, Paging Request, Dedicated Measurement Initiation Request, Dedicated Measurement Initiation Response, Dedicated Measurement Initiation Failure, Dedicated Measurement Report, Dedicated Measurement Termination Request, Dedicated Measurement Failure Indication, Common Transport Channel Resources Release Request, Common Transport Channel Resources Request, Common Transport Channel Resources Response, Common Transport Channel Resources Failure, Compressed Mode Prepare, Compressed Mode Ready, Compressed Mode Failure, Compressed Mode Commit, Compressed Mode Cancel, Error Indication, ...)	Future extensions shall be possible

9.2.1.31 Multiple URAs Indicator

The Multiple URAs Indicator indicates whether the accessed cell has multiple URAs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiple URAs Indicator			Enumerated (Multiple URA s exist, Single URA Exists)	

9.2.1.32 Payload CRC Present Indicator

This parameter indicates whether FP payload 16 bit CRC is used or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Payload CRC Presence Indicator			ENUMERATED (CRC Included, CRC not included)	

9.2.1.33 Primary CPICH Power

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH power			ENUMERATED (-15..40)	Unit dBm Granularity 0.1 dB.

9.2.1.34 Primary Scrambling Code

The Primary scrambling code to be used in the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary Scrambling Code			INTEGER (0 .. 511)	

9.2.1.35 PSCH Time Slot

The PSCH Time Slot is only applicable if the value of *Sync Case* IE is Case 2 or 3.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PSCHTime Slot			INTEGER(0..6)	

9.2.1.36 Puncture Limit

The maximum amount of puncturing for a transport channel in rate matching.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Puncture Limit			INTEGER (0..100)	%

9.2.1.37 RANAP Relocation Information

This parameter is transparent to the RNSAP. The parameter contains information for the Relocation procedure as defined in [1].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RANAP Relocation Information			Bit String	The contents is defined in ref. [1].

9.2.1.38 Report Characteristics

The report characteristics, defines how the reporting shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Report characteristics				
Report characteristics type			ENUMERATED(On Demand, Periodic, Event A, Event B, Event C, Event D, Event E, Event F)	
..Periodic Report Information	C – Periodic			
Report Periodicity	M		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports. First working assumption!
..Event A	C – Event A			
Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
Event B	C – Event B			
Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	
Event C	C – Event C			
Measurement Increase Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time the measurement entity shall rise on (in ms), in order to trigger a measurement report.
Event D	C – Event D			
Measurement Decrease Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED (10ms...1min) step 10ms,...	The time the measurement entity shall fall (in ms), in order to trigger a measurement report.
Event E	C – Event E			
Measurement Threshold 1	M		TBD	
Measurement Threshold 2	O		TBD	

Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.
Event F	C – Event F			
Measurement Threshold 1	M		TBD	
Measurement Threshold 2	O		TBD	
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.

Editors note: Encoding of threshold TBD.

Condition	Explanation
C-Periodic	Valid if <i>Report Characteristics Type IE</i> indicates "periodic"
C-Event A	Valid if <i>Report Characteristics Type IE</i> indicates "Event A"
C-Event B	Valid if <i>Report Characteristics Type IE</i> indicates "Event B"
C-Event C	Valid if <i>Report Characteristics Type IE</i> indicates "Event C"
C-Event D	Valid if <i>Report Characteristics Type IE</i> indicates "Event D"
C-Event E	Valid if <i>Report Characteristics Type IE</i> indicates "Event E"
C-Event F	Valid if <i>Report Characteristics Type IE</i> indicates "Event F"

9.2.1.39 RL ID

The RL ID is the unique identifier for one RL associated with a UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RL ID			INTEGER (0..31)	

9.2.1.40 RLC Mode

This parameter defines the RLC mode of the logical channels multiplexed on the transport channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RLC Mode			ENUMERATED(Acknowledged Mode, Unacknowledged Mode, Transparent Mode)	

9.2.1.41 RNC-Id

This is the identifier of one RNC in UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RNC Id			INTEGER (0..4095)	

9.2.1.42 Service Area Identifier (SAI)

This information element is used to uniquely identify an area consisting of one or more cells belonging to the same Location Area. Such an area is called a Service Area and can be used for indicating the location of a UE to the CN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SAI				
PLMN Id	M		OCTET STRING (3)	<ul style="list-style-type: none"> - digits 0 to 9, two digits per octet, - each digit encoded 0000 to 1001, - 1111 used as filler - bit 4 to 1 of octet n encoding digit 2n-1 - bit 8 to 5 of octet n encoding digit 2n <p>-The PLMN-ID consists of 3 digits from MCC followed by either -a filler plus 2 digits from MNC (in case of 2 digit MNC) or -3 digits from MNC (in case of a 3 digit MNC).</p>
LAC	M		OCTET STRING (2)	0000 and FFFE not allowed
SAC	M		OCTET STRING (2)	

9.2.1.43 S-RNTI

S-RNTI is the UE context identifier in the SRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S-RNTI			Integer(0..2^20 -1)	

9.2.1.44 Sync Case

The PSCH and PCCPCH in a TDD cell are mapped on one or two downlink slots per frame. There are three cases of Sync Case as follows:

- Case 1) PSCH and PCCPCH allocated in a single TS#k
- Case 2) PSCH in two TS and PCCPCH in the same two TS: TS#k and TS#k+8
- Case 3) PSCH in two TS, TS#k and TS#k+8, and the PCCPCH in TS#i, pointed by PSCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Case			ENUMERATED (Case1, Case2, Case3)	

9.2.1.45 TFCI Presence

The TFCI Presence parameter indicates whether the TFCI shall be included.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI presence			ENUMERATED (Present, not present)	

9.2.1.46 Time Slot

The Time Slot represents the time interval assigned to a Physical Channel referred to the start of a Radio Frame.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot			INTEGER (0..14)	

9.2.1.47 ToAWE

ToAWE is the window endpoint. DL data frames are expected to be received before this window endpoint. ToAWE is defined with a positive value relative Latest Time of Arrival (LToA). A data frame arriving after ToAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWE			INTEGER (0..2559)	msec.

9.2.1.48 ToAWS

ToAWS is the window startpoint. DL data frames are expected to be received after this window startpoint. ToAWS is defined with a positive value relative Time of Arrival Window Endpoint (ToAWE). A data frame arriving before ToAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWS			INTEGER (0..1279)	msec.

9.2.1.49 Transaction ID

The Transaction ID is used to associate all the messages belonging to the same pending procedure of the same RNSAP procedure type (e.g. Radio Link Addition), i.e. the Request-, Response-, Confirm-type of messages have the same Transaction ID. The messages belonging to different pending procedures have different Transaction IDs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transaction ID			INTEGER (0..255)	Since the scope is not clear, the range of this parameter is to be considered a working assumption

9.2.1.50 Transport Bearer ID

The Transport Bearer ID uniquely identifies an Iur transport bearer.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Bearer ID			INTEGER (0..4095)	

9.2.1.51 Transport Bearer Request Indicator

Indicates whether an Iur transport bearer needs to be established for carrying the FACH data stream(s), or whether an existing transport bearer will be used.

IE/Group Name	Presence	Mult	IE type and reference	Semantics description
Transport Bearer Request Indicator			ENUMRATE D(Bearer Requested, Bearer not Requested)	

9.2.1.52 Transport Layer Address

Transport Layer Address defines the transport address of the DRNS. For details on the Transport Address used see [2].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Layer Address			Bit string(1...160, ...)	

9.2.1.53 Transport Format Combination Set

The Transport Format Combination Set is defined as a set of Transport Format Combinations on a Coded Composite Transport Channel. It is the allowed Transport Format Combinations of the corresponding Transport Channels. The DL Transport Format Combination Set is applicable for DL Transport Channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCS		1 to <maxnoofTFCs>		The first instance of the parameter corresponds to TFC zero, the second to 1 and so on.
CTFC	M		INTEGER(0..MaxCTFC-1)	Integer number calculated according to ref. [13].

Range bound	Explanation
MaxnoofTFCs	The maximum number of Transport Format Combinations (1024).
MaxCTFC	Maximum number of the CTFC value is calculated according to the following: $\sum_{i=1}^I (L_i - 1)P_i$ with the notation according to ref. [13].

9.2.1.54 Transport Format Set

The Transport Format Set is defined as the set of Transport Formats associated to a Transport Channel, e.g. DCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Format Set				
Dynamic Transport Format Information		1..<maxTFcount>		
Number of Transport blocks	M		INTEGER (0..4095)	
Transport Block Size	C – Blocks		INTEGER (1..5000)	Bits
CHOICE mode				
TDD				
Transmission time interval	C-TTIdynamic	1..<maxTTIcount>	Enumerated(10, 20, 40, 80)	
Semi-static Transport Format Information				
Transmission time interval	C-TTIsemistatic		ENUMERATED (10, 20, 40, 80)	msec
Type of channel coding	M		ENUMERATED (No coding, Convolutional, Turbo)	
Coding Rate	C – Coding		ENUMERATED (1/2, 1/3)	
Rate matching attribute	M		INTEGER (1..maxRM)	
CRC size	M		ENUMERATED (0, 8, 12, 16, 24)	
CHOICE mode				
TDD				
2 nd interleaving mode	M		Enumerated (Frame related, Timeslot related)	

Condition	Explanation
Blocks	This IE is only present if "Number of Transport Blocks" is greater than 0.
Coding	This IE is only present if IE "Type of channel coding" is "Convolutional" or "Turbo"
TTIdynamic	This IE is mandatory if not defined as semistatic parameter. Otherwise it is absent.
TTIsemistatic	This IE is mandatory if not defined as dynamic parameter. Otherwise it is absent.

Range bound	Explanation
<i>MaxTFcount</i>	The maximum number of different transport formats that can be included in the Transport format set for one transport channel is 32.
<i>MaxRM</i>	The maximum number that could be set as rate matching attribute for a transport channel is 256.
<i>MaxTTIcount</i>	The amount of different TTI that are possible for that transport format is 4.

9.2.1.55 UARFCN

The UTRAN Absolute Radio Frequency Channel Number defines the carrier.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UARFCN			INTEGER (0..698, ...)	Corresponds to: 1885.2MHz..2024.8MHz see ref. [5].

9.2.1.56 UL FP Mode

This parameter defines if normal or silent mode of the Frame Protocol shall be used for the UL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL FP mode			ENUMERATED(Normal, Silent)	

9.2.1.57 Uplink Eb/No

The UL Eb/No indicates a received UL Eb/No.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Eb/No			INTEGER (0..255)	Resolution is 0.1 dB, range 0-25.5 dB.

9.2.1.58 UL Interference Level

The parameter indicates the UL Interference Level in a cell. The UL Interference Level is used by the UE to calculate its initial UL power for the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL Interference Level			ENUMERATED (-128..-60)	Unit: dBm, Step size=0.1 dB

9.2.1.59 URA ID

IE/Group Name	Presence	Range	IE type and reference	Semantics description
URA ID			INTEGER (0..65 535)	

9.2.1.60 UTRAN Cell Identifier (UC-Id)

The UC-ID (UTRAN Cell identifier) is the identifier of a cell in one UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UC-ID		1		
RNC-ID	M		INTEGER (0...4095)	
C-ID	M		C-ID	

9.2.1.61 L3 Information

This parameter contains the Layer 3 Information from a Uu message as received from the UE over the Uu interface or the Layer 3 Information for a Uu message to be sent to a UE by the CRNC, as defined in ref. [13].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
L3 Information			Bit String	The content is defined in ref. [13].

9.2.2 FDD Specific Parameters

This chapter contains parameters that are specific to FDD.

9.2.2.1 Chip Offset

The Chip Offset is defined as the radio timing offset inside a radio frame. The Chip Offset is used as offset for the DL DPCCH relative to the Primary CPICH timing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Chip Offset			INTEGER (0..38399)	Chips

9.2.2.2 Compressed Mode Method

Defines the method for generating the downlink compressed mode gap, as described in ref. [7].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Compressed Mode Method			ENUMERATED (None, Puncturing, SF/2, Gating)	None = restore the normal mode

9.2.2.3 D-Field Length

Defines the D Field size of the UL DPCCH slot.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D Field Length			ENUMERATED (1, 2)	

9.2.2.4 Diversity Control Field

The Diversity Control Field indicates if the current RL may, must or must not be combined with the already existing RLs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Control Field			ENUMERATED ED(May, Must, Must not)	

9.2.2.5 Diversity Indication

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Indication			ENUMERATED ED (Combined, Not Combined)	

Define the diversity mode to be applied.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Mode			ENUMERATED ED(None, STTD, Closed loop mode 1, Closed loop mode2)	

9.2.2.7 DL DPCH Slot Format

Indicates the slot format used in DPCH in DL, according to ref. [6].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL DPCH Slot Format			INTEGER (0..16)	

9.2.2.8 DL Scrambling Code

DL Scrambling code to be used by the RL. One cell may have multiple DL Scrambling codes available.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Scrambling Code			INTEGER (0..15)	0= Primary scrambling code of the cell 1...15= Secondary scrambling code

The Diversity Indication indicates if the RL has been or has not been combined with another RL.

9.2.2.6 Diversity Mode

9.2.2.9 Downlink Frame Type

This parameter defines if frame type 'A' or 'B' shall be used in downlink compressed mode. This is defined in [7].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Frame Type			ENUMERATED (TypeA, TypeB)	

9.2.2.10 FDD DL Channelisation Code Number

The DL Channelisation Code Number indicates the DL Channelisation Code number for a specific DL physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD DL Channelisation Code Number	M		INTEGER(0..255)	The maximum value is equal to the DL spreading factor –1

9.2.2.11 Gap Position Mode

The gap position can be fixed or adjustable, as defined in ref. [7].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Position Mode			ENUMERATED (Fixed, Flexible)	

9.2.2.12 Gap Period (TGP)

Gap Period is the period of repetition of a set of consecutive frames containing up to 2 transmission gaps.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Period			INTEGER(0..255)	Frames

9.2.2.13 Gap Starting Slot Number (SN)

It defines the slot number when the transmission gap starts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SN			Time Slot	

9.2.2.14 Max Number of UL DPDCHs

This parameter is an UE Radio Access Capability parameter which is needed in rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of UL DPDCHs			INTEGER (1..6)	

9.2.2.15 Min UL Channelisation Code Length

Minimum UL channelisation code length (spreading factor) of a DPDCH which is supported by UE. Needed by rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Min UL Channelisation Code Length			ENUMERATED(4,8,16, 32,64,128, 256)	

9.2.2.16 Multiplexing Position

Multiplexing Position specifies whether fixed or flexible positions of transport channels shall be used in the physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiplexing Position Position			ENUMERATED(Fixed, Flexible)	

9.2.2.17 Pattern Duration (PD)

Pattern duration is the total time of then compressed mode pattern (all consecutive TGP) expressed in number of frames.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(0..2047, ...)	Frames

9.2.2.18 Power Control Mode (PCM)

Power Control Mode specifies the uplink power mode applied during recovery period after each transmission gap in compressed mode. PCM can take 2 values (0 or 1). The different power control modes are described in ref. [8].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Control Mode			ENUMERATED (0, 1,...)	

9.2.2.19 Power Offset

This IE defines a power offset respect the Downlink transmission power of a DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Offset			INTEGER (0...24)	Step 0.25 dB, range 0-6 dB

9.2.2.20 Power Resume Mode (PRM)

Power Resume Mode selects the uplink power control method to calculate the initial transmit power after the gap. PRM can take two values (0 or 1) and is described in ref. [8].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Resume Mode			ENUMERATED (0, 1,...)	Described in ref. [8].

9.2.2.21 Primary CPICH Ec/No

Energy per chip divided by the power density per band measured on the Primary CPICH by the terminal.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH Ec/No			INTEGER (-30...+30)	dB, step 1 dB

9.2.2.22 Propagation Delay (PD)

Propagation delay is the one-way propagation delay of the radio signal from the MS to the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Propagation Delay			INTEGER (0..255)	Chips. Step size is 3 chips. 0=0 chips, 1=3 chips, ...

9.2.2.23 S-Field Length

The UE uses the S Field of the UL DPCCH slot to send the SSDT Cell ID to the network.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S Field Length			ENUMERATED (1, 2)	

9.2.2.24 Scrambling Code Change

This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Change			ENUMERATED (Change, No change)	

9.2.2.25 Slot Number (SN)

It defines the slot number when the transmission gap starts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SN			Time Slot	

9.2.2.26 SSDT Cell Identity

The SSDT Cell ID is a temporary ID for SSDT assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Cell Identity			ENUMERATED (a, b..., h)	

9.2.2.27 SSDT Cell Identity Length

The SSDT Cell ID Length parameter shows the length of the SSDT Cell ID.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell ID Length			ENUMERATED (Short, Medium, Long)	

9.2.2.28 SSDT Indication

The SSDT Indication indicates whether SSDT is in use by the UE or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Indication			ENUMERATED (SSDT Active in the UE, SSDT not Active in the UE)	

9.2.2.29 SSDT Support Indicator

The SSDT Support Indicator indicates whether a RL supports SSDT or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Support Indicator			ENUMERATED (SSDT Supported, SSDT not supported).	

9.2.2.30 TFCI Signalling Mode

This parameter indicates if the normal or split mode is used for the TFCI.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Signalling Mode			ENUMERATED (Normal, Split)	

9.2.2.31 TPC Downlink Step Size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TPC Downlink step size			ENUMERATED (0.5, 1)	

9.2.2.32 Transmission Gap Distance (TGD)

Transmission Gap Distance is the duration of transmission between two consecutive transmission gaps within a transmission gap period, expressed in number of frames. In case there is only one transmission gap in the transmission gap period, this parameter shall be set to zero.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGD			INTEGER(0..255)	Frames

9.2.2.33 Transmit Gap Length (TGL)

Transmission Gap Length is the duration of no transmission, expressed in number of slots.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGL			INTEGER (3,4,7,10,14)	Slot

9.2.2.34 UL/DL Compressed Mode Selection

This parameter specifies whether compressed mode is used in UL only, DL only or both UL and DL

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL/DL Compressed Mode Selection			ENUMERATED (in UL only, DL only or both UL and DL)	

9.2.2.35 UL DPCCH Slot Format

Indicates the slot format used in DPCCH in UL, according to ref. [6].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL DPCCH Slot Format			INTEGER (0..5)	

9.2.2.36 UL Scrambling Code

The UL Scrambling Code is the scrambling code used by UE. Every UE has its specific UL Scrambling Code.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL_scrambling_code				
UL Scrambling Code Number	M		INTEGER (0.. 2 ²⁴ -1)	
UL Scrambling Code Length	M		ENUMERATED (Short, Long)	

9.2.2.37 Uplink Delta Eb/No

The delta in uplink Eb/No that shall be added to the Eb/No target used during compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.2.38 Uplink Delta Eb/No After

The delta in uplink Eb/No target that shall be added to the Eb/No target used one frame after the compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No after			Enumerated (-6..+10dB)	Step 0.1 dB.

9.2.3 TDD Specific Parameters

This chapter contains parameters that are specific to TDD.

9.2.3.1 Burst Type

Defines the burst type of the physical channel, see ref. [10].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Burst Type			ENUMERATED (Type1, Type2)	

9.2.3.2 CCTrCH ID

The CCTrCH ID identifies unambiguously a CCTrCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CCTrCH ID			INTEGER (0..15)	

9.2.3.3 DPCH ID

The DPCH ID identifies unambiguously a DPCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DPCH ID			INTEGER (0..239)	

9.2.3.4 Midamble Shift

Different bursts transmitted simultaneously, using the same midamble code shall use different Midamble Shifts.

The 256 chip midamble supports 3 different time shifts, the 512 chips midamble may support 8 or even 16 time shifts.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Midamble Shift			INTEGER (0..15)	

9.2.3.5 Primary CCPCH RSCP

Received Signal Code Power is the received power on PCCPCH of the target cell after despread. The reference point for the RSCP is the antenna connector at the UE, see ref. [12].

9.2.3.6 Repetition Length

The Repetition Length represents the number of consecutive Radio Frames inside a Repetition Period in which the same Time Slot is assigned to the same Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Length			INTEGER(1..63)	

9.2.3.7 Repetition Period

The Repetition Period represents the number of consecutive Radio Frames after which the same assignment scheme of Time Slots to a Physical Channel is repeated. This means that if the Time Slot K is assigned to a physical channel in the Radio Frame J , it is assigned to the same physical channel also in all the Radio Frames $J+n \cdot \text{Repetition Period}$ (where n is an integer).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Period			ENUMERATED (1,2,4,8,16,32,64)	

9.2.3.8 TDD Channelisation Code

The Channelisation Code Number indicates which Channelisation Code is used for a given Physical Channel. In TDD the Channelisation Code is an Orthogonal Variable Spreading Factor code, that can have a spreading factor of 1, 2, 4, 8 or 16.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Channelisation Code			ENUMERATED ((1/1), (2/1), (2/2), (4/1), ..., (4/4), (8/1), (8/8), (16/1) ... (16/16))	

9.2.3.9 TDD Physical Channel Offset

The TDD Physical Channel Offset represents the phase information for the allocation of a physical channel. (SFN mod Repetition Period = TDD Physical Channel Offset).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Physical Channel Offset			INTEGER (0..63)	

9.2.3.10 TFCI Coding

The TFCI Coding describes how the TFCI bits are coded. By default 1 TFCI bit is coded with 4 bits, 2 TFCI bits are coded with 8 bits, 3-5 TFCI bits are coded with 16 bits and 6-10 TFCI bits are coded with 32 bits.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Coding	M		Enumerated (4, 8, 16, 32)	

9.3 Message and Information element abstract syntax (with ASN.1)

This chapter is for the time being only **INFORMATIVE**.

In case of misalignment with the tabular format of the messages in chapter 9.1 the ASN.1 needs to be aligned with the tabular format.

The setting of the criticality field and the level on which criticality is set for the IEs and sequences of IEs is still to be decided upon.

9.3.1 Usage of Protocol Extension Mechanism for non-standard use

The protocol extension mechanism for non-standard use may be used:

- for special operator (and/or vendor) specific features considered not to be part of the basic functionality, i.e. the functionality required for a complete and high-quality specification in order to guarantee multivendor inter-operability.
- by vendors for research purposes, e.g. to implement and evaluate new algorithms/features before such features are proposed for standardisation.

The extension mechanism shall not be used for basic functionality. Such functionality shall be standardised.

9.3.2 Elementary Procedure Definitions

```
-- ****
-- Elementary Procedure definitions
--
-- ****
RNSAP-PDU-Descriptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- IE parameter types from other modules.
--
-- ****

IMPORTS
    Criticality,
    ProcedureID,
    TransactionID
FROM RNSAP-CommonDataTypes
```

```
CommonTransportChannelResourcesFailure,  
CommonTransportChannelResourcesRequest,  
CommonTransportChannelResourcesReleaseRequest,  
CommonTransportChannelResourcesResponseFDD,  
CommonTransportChannelResourcesResponseTDD,  
CompressedModeCancel,  
CompressedModeCommit,  
CompressedModeFailure,  
CompressedModePrepare,  
CompressedModeReady,  
DedicatedMeasurementFailureIndication,  
DedicatedMeasurementInitiationFailure,  
DedicatedMeasurementInitiationRequest,  
DedicatedMeasurementInitiationResponse,  
DedicatedMeasurementReport,  
DedicatedMeasurementTerminationRequest,  
DL-PowerControlRequest,  
DownlinkSignallingTransferRequest,  
ErrorIndication,  
PagingRequest,  
PhysicalChannelReconfigurationCommand,  
PhysicalChannelReconfigurationFailure,  
PhysicalChannelReconfigurationRequestFDD,  
PhysicalChannelReconfigurationRequestTDD,  
PrivateMessage,  
RadioLinkAdditionFailureFDD,  
RadioLinkAdditionFailureTDD,  
RadioLinkAdditionRequestFDD,  
RadioLinkAdditionRequestTDD,  
RadioLinkAdditionResponseFDD,  
RadioLinkAdditionResponseTDD,  
RadioLinkDeletionRequest,  
RadioLinkDeletionResponse,  
RadioLinkFailureIndication,  
RadioLinkReconfigurationCancel,  
RadioLinkReconfigurationCommit,  
RadioLinkReconfigurationFailure,  
RadioLinkReconfigurationPrepareFDD,  
RadioLinkReconfigurationPrepareTDD,  
RadioLinkReconfigurationReadyFDD,  
RadioLinkReconfigurationReadyTDD,  
RadioLinkReconfigurationRequestFDD,  
RadioLinkReconfigurationRequestTDD,  
RadioLinkReconfigurationResponseFDD,  
RadioLinkReconfigurationResponseTDD,  
RadioLinkRestoreIndication,  
RadioLinkSetupFailureFDD,  
RadioLinkSetupFailureTDD,  
RadioLinkSetupRequestFDD,  
RadioLinkSetupRequestTDD,  
RadioLinkSetupResponseFDD,
```

```

RadioLinkSetupResponseTDD,
RelocationCommit,
UplinkSignallingTransferIndication
FROM RNSAP-PDU-Contents

id-commonTransportChannelResourcesInitiationFDD,
id-commonTransportChannelResourcesInitiationTDD,
id-commonTransportChannelResourcesRelease,
id-compressedModeCancellationFDD,
id-compressedModeCommitFDD,
id-compressedModePrepareFDD,
id-downlinkPowerControl,
id-downlinkSignallingTransfer,
id-errorIndication,
id-measurementFailure,
id-measurementInitiation,
id-measurementReporting,
id-measurementTermination,
id-pagingRequest,
id-physicalChannelReconfiguration,
id-privateMessage,
id-radioLinkAddition,
id-radioLinkDeletion,
id-radioLinkFailure,
id-radioLinkRestoration,
id-radioLinkSetup,
id-srnsRelocationCommit,
id-synchronisedRadioLinkReconfigurationCancellation,
id-synchronisedRadioLinkReconfigurationCommit,
id-synchronisedRadioLinkReconfigurationPrepare,
id-unSynchronisedRadioLinkReconfiguration,
id-uplinkSignallingTransfer
FROM RNSAP-Constants;

-- ****
-- 
-- Interface Elementary Procedure Class
-- 
-- ****

RNSAP-ELEMENTARY-PROCEDURE ::= CLASS {
  &InitiatingMessage           ,
  &SuccessfulOutcome          OPTIONAL,
  &UnsuccessfulOutcome        OPTIONAL,
  &Outcome                     OPTIONAL,
  &procedureID                ProcedureID   UNIQUE,
  &criticality                Criticality   DEFAULT ignore
}
WITH SYNTAX {
  INITIATING MESSAGE      &InitiatingMessage
  [ SUCCESSFUL OUTCOME    &SuccessfulOutcome]
}

```

```

[UNSUCCESSFUL OUTCOME      &UnsuccessfulOutcome]
[OUTCOME                  &Outcome]
PROCEDURE ID              &procedureID
[CRITICALITY              &criticality]
}

-- ****
-- Interface PDU Definition
--
-- ****

RNSAP-PDU ::= CHOICE {
    initiatingMessage   InitiatingMessage,
    succesfulOutcome    SuccessfulOutcome,
    unsuccesfulOutcome  UnsuccessfulOutcome,
    outcome              Outcome,
    ...
}

InitiatingMessage ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID     TransactionID,
    value             RNSAP-ELEMENTARY-PROCEDURE.&InitiatingMessage ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

SuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID     TransactionID,
    value             RNSAP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

UnsuccessfulOutcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID     TransactionID,
    value             RNSAP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

Outcome ::= SEQUENCE {
    procedureID RNSAP-ELEMENTARY-PROCEDURE.&procedureID      ( {RNSAP-ELEMENTARY-PROCEDURES} ),
    criticality RNSAP-ELEMENTARY-PROCEDURE.&criticality      ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} ),
    transactionID     TransactionID,
    value             RNSAP-ELEMENTARY-PROCEDURE.&Outcome       ( {RNSAP-ELEMENTARY-PROCEDURES} {@procedureID} )
}

-- ****
-- Interface Elementary Procedure List

```

```

-- ****
RNSAP-ELEMENTARY-PROCEDURES RNSAP-ELEMENTARY-PROCEDURE ::= {
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-1
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-2
    RNSAP-ELEMENTARY-PROCEDURES-CLASS-3
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-1 RNSAP-ELEMENTARY-PROCEDURE ::= {
    radioLinkSetupFDD
    radioLinkSetupTDD
    radioLinkAdditionFDD
    radioLinkAdditionTDD
    radioLinkDeletion
    synchronisedRadioLinkReconfigurationPreparationFDD
    synchronisedRadioLinkReconfigurationPreparationTDD
    unSynchronisedRadioLinkReconfigurationFDD
    unSynchronisedRadioLinkReconfigurationTDD
    physicalChannelReconfigurationFDD
    physicalChannelReconfigurationTDD
    measurementInitiation
    compressedModePreparationFDD
    commonTransportChannelResourcesInitiationFDD
    commonTransportChannelResourcesInitiationTDD
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-2 RNSAP-ELEMENTARY-PROCEDURE ::= {
    uplinkSignallingTransfer
    downlinkSignallingTransfer
    srnsRelocationCommit
    paging
    synchronisedRadioLinkReconfigurationCommit
    synchronisedRadioLinkReconfigurationCancellation
    radioLinkFailure
    radioLinkRestoration
    measurementReporting
    measurementTermination
    measurementFailure
    downlinkPowerControlFDD
    compressedModeCommitFDD
    compressedModeCancellationFDD
    commonTransportChannelResourcesRelease
    errorIndication
    privateMessage
    ...
}

RNSAP-ELEMENTARY-PROCEDURES-CLASS-3 RNSAP-ELEMENTARY-PROCEDURE ::= {
}

```

```

}
...
-- *****
-- Interface Elementary Procedures
-- *****
radioLinkSetupFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkSetupRequestFDD
    SUCCESSFUL OUTCOME RadioLinkSetupResponseFDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureFDD
    PROCEDURE ID      { procedureCode id-radioLinkSetup, ddMode fdd }
    CRITICALITY     ignore
}

radioLinkSetupTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkSetupRequestTDD
    SUCCESSFUL OUTCOME RadioLinkSetupResponseTDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureTDD
    PROCEDURE ID      { procedureCode id-radioLinkSetup, ddMode tdd }
    CRITICALITY     ignore
}

radioLinkAdditionFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkAdditionRequestFDD
    SUCCESSFUL OUTCOME RadioLinkAdditionResponseFDD
    UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureFDD
    PROCEDURE ID      { procedureCode id-radioLinkAddition, ddMode fdd }
    CRITICALITY     ignore
}

radioLinkAdditionTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkAdditionRequestTDD
    SUCCESSFUL OUTCOME RadioLinkAdditionResponseTDD
    UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureTDD
    PROCEDURE ID      { procedureCode id-radioLinkAddition, ddMode tdd }
    CRITICALITY     ignore
}

radioLinkDeletion RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkDeletionRequest
    SUCCESSFUL OUTCOME RadioLinkDeletionResponse
    PROCEDURE ID      { procedureCode id-radioLinkDeletion, ddMode common }
    CRITICALITY     ignore
}

synchronisedRadioLinkReconfigurationPreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkReconfigurationPrepareFDD
    SUCCESSFUL OUTCOME RadioLinkReconfigurationReadyFDD
}
```

```

UNSUCCESSFUL OUTCOME    RadioLinkReconfigurationFailure
PROCEDURE ID           { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode fdd }
CRITICALITY          ignore
}

synchronisedRadioLinkReconfigurationPreparationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationPrepareTDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationReadyTDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID         { procedureCode id-synchronisedRadioLinkReconfigurationPrepare, ddMode tdd }
  CRITICALITY          ignore
}

unSynchronisedRadioLinkReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationRequestFDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponseFDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID         { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode fdd }
  CRITICALITY          ignore
}

unSynchronisedRadioLinkReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  RadioLinkReconfigurationRequestTDD
  SUCCESSFUL OUTCOME  RadioLinkReconfigurationResponseTDD
  UNSUCCESSFUL OUTCOME  RadioLinkReconfigurationFailure
  PROCEDURE ID         { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode tdd }
  CRITICALITY          ignore
}

physicalChannelReconfigurationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  PhysicalChannelReconfigurationRequestFDD
  SUCCESSFUL OUTCOME  PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME  PhysicalChannelReconfigurationFailure
  PROCEDURE ID         { procedureCode id-physicalChannelReconfiguration, ddMode fdd }
  CRITICALITY          ignore
}

physicalChannelReconfigurationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  PhysicalChannelReconfigurationRequestTDD
  SUCCESSFUL OUTCOME  PhysicalChannelReconfigurationCommand
  UNSUCCESSFUL OUTCOME  PhysicalChannelReconfigurationFailure
  PROCEDURE ID         { procedureCode id-physicalChannelReconfiguration, ddMode tdd }
  CRITICALITY          ignore
}

measurementInitiation RNSAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE  DedicatedMeasurementInitiationRequest
  SUCCESSFUL OUTCOME  DedicatedMeasurementInitiationResponse
  UNSUCCESSFUL OUTCOME  DedicatedMeasurementInitiationFailure
  PROCEDURE ID         { procedureCode id-measurementInitiation, ddMode common }
  CRITICALITY          ignore
}

```

```

}

compressedModePreparationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModePrepare
    SUCCESSFUL OUTCOME CompressedModeReady
    UNSUCCESSFUL OUTCOME CompressedModeFailure
    PROCEDURE ID      { procedureCode id-compressedModePrepareFDD, ddMode fdd }
    CRITICALITY      ignore
}

commonTransportChannelResourcesInitiationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonTransportChannelResourcesRequest
    SUCCESSFUL OUTCOME CommonTransportChannelResourcesResponseFDD
    UNSUCCESSFUL OUTCOME CommonTransportChannelResourcesFailure
    PROCEDURE ID      { procedureCode id-commonTransportChannelResourcesInitiationFDD, ddMode common }
    CRITICALITY      ignore
}

commonTransportChannelResourcesInitiationTDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonTransportChannelResourcesRequest
    SUCCESSFUL OUTCOME CommonTransportChannelResourcesResponseTDD
    UNSUCCESSFUL OUTCOME CommonTransportChannelResourcesFailure
    PROCEDURE ID      { procedureCode id-commonTransportChannelResourcesInitiationTDD, ddMode common }
    CRITICALITY      ignore
}

uplinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE UplinkSignallingTransferIndication
    PROCEDURE ID      { procedureCode id-uplinkSignallingTransfer, ddMode common }
    CRITICALITY      ignore
}

downlinkSignallingTransfer RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DownlinkSignallingTransferRequest
    PROCEDURE ID      { procedureCode id-downlinkSignallingTransfer, ddMode common }
    CRITICALITY      ignore
}

srnsRelocationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RelocationCommit
    PROCEDURE ID      { procedureCode id-srnsRelocationCommit, ddMode common }
    CRITICALITY      ignore
}

paging RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE PagingRequest
    PROCEDURE ID      { procedureCode id-pagingRequest, ddMode common }
    CRITICALITY      ignore
}

synchronisedRadioLinkReconfigurationCommit RNSAP-ELEMENTARY-PROCEDURE ::= {
}

```

```

INITIATING MESSAGE RadioLinkReconfigurationCommit
PROCEDURE ID          { procedureCode id-synchronisedRadioLinkReconfigurationCommit, ddMode common }
CRITICALITY      ignore
}

synchronisedRadioLinkReconfigurationCancellation RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkReconfigurationCancel
    PROCEDURE ID          { procedureCode id-synchronisedRadioLinkReconfigurationCancellation, ddMode common }
    CRITICALITY      ignore
}

radioLinkFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkFailureIndication
    PROCEDURE ID          { procedureCode id-radioLinkFailure, ddMode common }
    CRITICALITY      ignore
}

radioLinkRestoration RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkRestoreIndication
    PROCEDURE ID          { procedureCode id-radioLinkRestoration, ddMode common }
    CRITICALITY      ignore
}

measurementReporting RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DedicatedMeasurementReport
    PROCEDURE ID          { procedureCode id-measurementReporting, ddMode common }
    CRITICALITY      ignore
}

measurementTermination RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DedicatedMeasurementTerminationRequest
    PROCEDURE ID          { procedureCode id-measurementTermination, ddMode common }
    CRITICALITY      ignore
}

measurementFailure RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DedicatedMeasurementFailureIndication
    PROCEDURE ID          { procedureCode id-measurementFailure, ddMode common }
    CRITICALITY      ignore
}

downlinkPowerControlFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DL-PowerControlRequest
    PROCEDURE ID          { procedureCode id-downlinkPowerControl, ddMode fdd }
    CRITICALITY      ignore
}

compressedModeCommitFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModeCommit
    PROCEDURE ID          { procedureCode id-compressedModeCommitFDD, ddMode fdd }
    CRITICALITY      ignore
}

```

```

}

compressedModeCancellationFDD RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModeCancel
    PROCEDURE ID      { procedureCode id-compressedModeCancellationFDD, ddMode fdd }
    CRITICALITY      ignore
}

commonTransportChannelResourcesRelease RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonTransportChannelResourcesReleaseRequest
    PROCEDURE ID      { procedureCode id-commonTransportChannelResourcesRelease, ddMode common }
    CRITICALITY      ignore
}

errorIndication RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE ErrorIndication
    PROCEDURE ID      { procedureCode id-errorIndication, ddMode common }
    CRITICALITY      ignore
}

privateMessage RNSAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE PrivateMessage
    PROCEDURE ID      { procedureCode id-privateMessage, ddMode common }
    CRITICALITY      ignore
}

END

```

9.3.3 PDU Definitions

```

-- *****
-- 
-- PDU definitions for RNSAP.
-- 
-- *****

RNSAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS :=

BEGIN

-- *****
-- 
-- IE parameter types from other modules.
-- 
-- *****

IMPORTS
    AllocationRetentionPriority,
    AllowedQueuingTime,
    BLER,

```

BindingID,
BurstType,
C-ID,
C-RNTI,
CCTrCH-ID,
CFN,
CN-CS-DomainIdentifier,
CN-PS-DomainIdentifier,
CPICH-EcIo,
CPICH-Power,
Cause,
CellParameterID,
ChipOffset,
CompressedModeMethod,
CriticalityDiagnostics,
D-FieldLength,
D-RNTI,
D-RNTI-ReleaseIndication,
DCH-CombinationInd,
DCH-ID,
DL-ChannelisationCode,
DL-DPCCH-SlotFormat,
DL-DPCH-SlotNumber,
DL-EbNo,
DL-EbNoTarget,
DL-FrameType,
DL-Power,
DL-ScramblingCode,
DPCH-ID,
DRX-Parameter,
DedicatedMeasurementValue,
DiversityControlField,
DiversityMode,
FACH-DataFrameSize,
FACH-InitialWindowSize,
FACH-PriorityIndicator,
FDD-DL-ChannelisationCodeNumber,
FDD-S-CCPCH-Offset,
FrameHandlingPriority,
FrameOffset,
GapPeriod,
GapPositionMode,
L3-Information,
MAC-c-SDU-Length,
MaxNrOfUL-DPCHs,
MeanBitRate,
MeasurementCharacteristics,
MeasurementID,
MidambleShift,
MinUL-ChannelisationCodeLength,
MultipleURAsIndicator,

MultiplexingPosition,
Offset,
PD,
PSCH-PCCPCH-TimeSlot,
PSCH-TimeSlot,
PayloadCRC-PresenceIndicator,
PilotBitsUsedIndicator,
PowerControlMode,
PowerOffset,
PowerResumeMode,
PrimaryCCPCH-RSCP,
PrimaryCPICH-EcNo,
PrimaryCPICH-Power,
PrimaryScramblingCode,
PropagationDelay,
PunctureLimit,
RANAP-RelocationInformation,
RL-ID,
RLC-Mode,
RNC-ID,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
S-FieldLength,
S-RNTI,
SAI,
SN,
SRNC-ID,
SSDT-CellID,
SSDT-CellID-Length,
SSDT-Indication,
SSDT-SupportIndicator,
ScaledUL-InterferenceLevel,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SyncCase,
TDD-ChannelisationCode,
TDD-PhysicalChannelOffset,
TFCI-Coding,
TFCI-Presence,
TFCI-SignallingMode,
TGD,
TGL,
TPC-StepSize,
TimeSlot,
ToAWE,
ToAWS,
TransportBearerID,
TransportBearerRequestIndicator,
TransportFormatCombinationSet,

```

TransportFormatSet,
TransportLayerAddress,
UARFCN,
UC-ID,
UL-DL-CompressedModeSelection,
UL-DPCCH-SlotFormat,
UL-EbNo,
UL-EbNoTarget,
UL-FP-Mode,
UL-ScramblingCode,
URA-ID
FROM RNSAP-IES

PrivateExtensionContainer{},
ProtocolExtensionContainer{},
ProtocolIE-ContainerList{},
ProtocolIE-ContainerPair{},
ProtocolIE-ContainerPairList{},
ProtocolIE-Container{},
RNSAP-PRIVATE-EXTENSION,
RNSAP-PROTOCOL-EXTENSION,
RNSAP-PROTOCOL-IES,
RNSAP-PROTOCOL-IES-PAIR
FROM RNSAP-Containers

maxNoOfDL-Codes,
maxNrOfCCTrCHs,
maxNrOfDCHs,
maxNrOfDL-Codes,
maxNrOfDPCHs,
maxNrOfFACH-FD-Size,
maxNrOfFDD-Neighbours,
maxNrOfMACcSDU-Length,
maxNrOfTDD-Neighbours,
maxNrOfRLs,
maxNrOfSCCPCHs,
maxRNCinURA,

id-AllowedQueuingTime,
id-BindingID,
id-C-ID,
id-C-RNTI,
id-CCTrCH-ID,
id-CFN,
id-CN-CS-DomainIdentifier,
id-CN-PS-DomainIdentifier,
id-Cause,
id-CompressedModeMethod,
id-CriticalityDiagnostics,
id-D-RNTI,
id-D-RNTI-ReleaseIndication,

```

id-DCH-AddItem,
id-DCH-AddItem-RL-ReconfPrepFDD,
id-DCH-AddItem-RL-ReconfPrepTDD,
id-DCH-AddItem-RL-ReconfReadyFDD,
id-DCH-AddItem-RL-ReconfRqstFDD,
id-DCH-AddItem-RL-ReconfRqstTDD,
id-DCH-AddList-RL-ReconfPrepFDD,
id-DCH-AddList-RL-ReconfPrepTDD,
id-DCH-AddList-RL-ReconfRqstFDD,
id-DCH-AddList-RL-ReconfRqstTDD,
id-DCH-DeleteItem-RL-ReconfPrepFDD,
id-DCH-DeleteItem-RL-ReconfPrepTDD,
id-DCH-DeleteItem-RL-ReconfRqstFDD,
id-DCH-DeleteItem-RL-ReconfRqstTDD,
id-DCH-DeleteList-RL-ReconfPrepFDD,
id-DCH-DeleteList-RL-ReconfPrepTDD,
id-DCH-DeleteList-RL-ReconfRqstFDD,
id-DCH-DeleteList-RL-ReconfRqstTDD,
id-DCH-Information-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqFDD,
id-DCH-InformationItem-RL-SetupReqTDD,
id-DCH-InformationList-RL-SetupReqTDD,
id-DCH-ModifyItem,
id-DCH-ModifyItem-RL-ReconfPrepFDD,
id-DCH-ModifyItem-RL-ReconfPrepTDD,
id-DCH-ModifyItem-RL-ReconfReadyFDD,
id-DCH-ModifyItem-RL-ReconfRqstFDD,
id-DCH-ModifyItem-RL-ReconfRqstTDD,
id-DCH-ModifyList-RL-ReconfPrepFDD,
id-DCH-ModifyList-RL-ReconfPrepTDD,
id-DCH-ModifyList-RL-ReconfRqstFDD,
id-DCH-ModifyList-RL-ReconfRqstTDD,
id-DL-CCTrCH-Information-RL-ReconfPrepTDD,
id-DL-CCTrCH-Information-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-DL-CCTrChInformationItem-RL-SetupReqTDD,
id-DL-CCTrChInformationList-RL-SetupReqTDD,
id-DL-CodeInformation-PhyChReconfRqstFDD,
id-DL-DPCH-Information,
id-DL-DPCH-Information-RL-SetupReqFDD,
id-DL-DPCH-InformationList-PhyChReconfRqstTDD,
id-DL-DPCH-InformationList-RL-ReconfReadyTDD,
id-DL-EbNoTarget,
id-DL-FrameType,
id-DL-MeanBitRate,
id-DL-ReferencePowerInformation-DL-PC-Rqst,
id-DRX-Parameter,
id-DedicatedMeasurementObjectType-DM-Rprt,
id-DedicatedMeasurementObjectType-DM-Rqst,
id-DedicatedMeasurementObjectType-DM-Rspns,

id-FACH-InfoForOptionalGroupS-CCPCH,
id-FACH-InfoForOptionalS-CCPCH,
id-FACH-InfoForS-CCPCH-CoupledToPRACH,
id-GapPositionMode,
id-L3-Information,
id-MeasurementCharacteristics,
id-MeasurementID,
id-MultipleURAsIndicator,
id-PD,
id-PagingArea-PagingRqst,
id-PowerControlMode,
id-PowerResumeMode,
id-ProcedureScope-DL-PC-Rqst,
id-RANAP-RelocationInformation,
id-RL-Information-PhyChReconfRqstFDD,
id-RL-Information-PhyChReconfRqstTDD,
id-RL-Information-RL-AdditionRqstFDD,
id-RL-Information-RL-AdditionRqstTDD,
id-RL-Information-RL-DeletionRqst,
id-RL-Information-RL-FailureInd,
id-RL-Information-RL-ReconfPrepFDD,
id-RL-Information-RL-RestoreInd,
id-RL-Information-RL-SetupReqFDD,
id-RL-Information-RL-SetupReqTDD,
id-RL-InformationItem-DM-Rprt,
id-RL-InformationItem-DM-Rqst,
id-RL-InformationItem-DM-Rspns,
id-RL-InformationItem-RL-SetupReqFDD,
id-RL-InformationList-RL-AdditionRqstFDD,
id-RL-InformationList-RL-DeletionRqst,
id-RL-InformationList-RL-FailureInd,
id-RL-InformationList-RL-ReconfPrepFDD,
id-RL-InformationList-RL-RestoreInd,
id-RL-InformationResponse-RL-AdditionRspTDD,
id-RL-InformationResponse-RL-ReconfReadyTDD,
id-RL-InformationResponse-RL-SetupRspTDD,
id-RL-InformationResponseItem-RL-AdditionRspFDD,
id-RL-InformationResponseItem-RL-ReconfReadyFDD,
id-RL-InformationResponseItem-RL-SetupRspFDD,
id-RL-InformationResponseList-RL-AdditionRspFDD,
id-RL-InformationResponseList-RL-ReconfReadyFDD,
id-RL-InformationResponseList-RL-SetupRspFDD,
id-RL-ReconfigurationFailure-RL-ReconfFail,
id-RL-ReconfigurationFailureList-RL-ReconfFail,
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind,
id-ReportCharacteristics,
id-S-RNTI,
id-SAI,
id-SN,
id-SRNC-ID,
id-ScramblingCodeChange,

```

id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD,
id-TGD,
id-TGL,
id-TGP1,
id-TGP2,
id-TransportBearerID,
id-TransportBearerRequestIndicator,
id-TransportLayerAddress,
id-UC-ID,
id-UL-CCTrCH-Information-RL-ReconfPrepTDD,
id-UL-CCTrCH-Information-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD,
id-UL-CCTrChInformationItem-RL-SetupReqTDD,
id-UL-CCTrChInformationList-RL-SetupReqTDD,
id-UL-DL-CompressedModeSelection,
id-UL-DPCH-Information,
id-UL-DPCH-Information-RL-SetupReqFDD,
id-UL-DPCH-InformationList-PhyChReconfRqstTDD,
id-UL-DPCH-InformationList-RL-ReconfReadyTDD,
id-UL-DeltaEbNo,
id-UL-DeltaEbNoAfter,
id-UL-EbNoTarget,
id-UL-MeanBitRate,
id-URA-ID,
id-UnsuccessfulRL-InformationResponse,
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD,
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD,
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD,
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
FROM RNSAP-Constants;

-- ****
-- Common Container List
--
-- ****

DCH-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam} ::= ProtocolIE-ContainerList { 1, maxNrOfDCHs, { IEsSetParam } }
RL-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam} ::= ProtocolIE-ContainerList { 1, maxNrOfRLs, { IEsSetParam } }
CCTrCH-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam} ::= ProtocolIE-ContainerList { 1, maxNrOfCCTrCHs, { IEsSetParam } }
DL-Code-IE-ContainerList { RNSAP-PROTOCOL-IES : IEsSetParam} ::= ProtocolIE-ContainerList { 1, maxNrOfDL-Codes, { IEsSetParam } }

-- ****
-- RADIO LINK SETUP REQUEST FDD
--

```

```

-- ****
RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkSetupRequestFDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}
} OPTIONAL,
    ...

RadioLinkSetupRequestFDD-IES RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI           CRITICALITY ignore TYPE S-RNTI           PRESENCE mandatory } |
    { ID id-D-RNTI           CRITICALITY ignore TYPE D-RNTI           PRESENCE optional } |
    { ID id-AllowedQueueingTime   CRITICALITY ignore TYPE AllowedQueueingTime   PRESENCE optional } |
    { ID id-UL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE UL-DPCH-Information-RL-SetupReqFDD   PRESENCE mandatory } |
    { ID id-DL-DPCH-Information-RL-SetupReqFDD CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqFDD   PRESENCE mandatory } |
    { ID id-DCH-Information-RL-SetupReqFDD   CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqFDD   PRESENCE mandatory } |
    { ID id-RL-Information-RL-SetupReqFDD   CRITICALITY ignore TYPE RL-InformationList-RL-SetupReqFDD   PRESENCE mandatory },
} |

UL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    ul-ScramblingCode        UL-ScramblingCode,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
    maxNrOfUL-DPCHs          MaxNrOfUL-DPCHs OPTIONAL
} -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 -- ,
    ul-PunctureLimit         PunctureLimit,
    ul-TransportFormatCombinationSet TransportFormatCombinationSet,
    ul-DPCCH-SlotFormat      UL-DPCCH-SlotFormat,
    ul-EbNoTarget             UL-EbNoTarget OPTIONAL,
    diversityMode              DiversityMode,
    d-FieldLength              D-FieldLength OPTIONAL
} -- This IE is present only if Feed Back mode diversity is activated -- ,
    ssDT-CellIDLength        SSDT-CellID-Length OPTIONAL,
    s-FieldLength              S-FieldLength OPTIONAL,
    ul-meanBitRate            MeanBitRate OPTIONAL,
    iE-Extensions             ProtocolExtensionContainer { UL-DPCH-Information-RL-SetupReqFDD-ExtIEs } OPTIONAL,
} |

UL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
} |

DL-DPCH-Information-RL-SetupReqFDD ::= SEQUENCE {
    transportFormatCombinationSet   TransportFormatCombinationSet,
    dl-DPCH-SlotNumber             DL-DPCH-SlotNumber,
    tFCI-SignallingMode            TFCI-SignallingMode,
    tFCI-Presence                  TFCI-Presence OPTIONAL
} -- This IE is present if Slot Format is from 12 to 16 --,
    multiplexingPosition          MultiplexingPosition,
    powerOffsetInformation         PowerOffset,
    pol-ForTFCI-Bits
}

```

```

    po2-ForTPC-Bits          PowerOffset,
    po3-ForPilotBits         PowerOffset,
    ...
},
dl-TPC-StepSize           TPC-StepSize,
meanBitRate                MeanBitRate      OPTIONAL,
iE-Extensions              ProtocolExtensionContainer { {DL-DPCH-Information-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-Information-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-InformationList-RL-SetupReqFDD       ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqFDD} }

DCH-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE DCH-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
...
}

DCH-InformationItem-RL-SetupReqFDD ::= SEQUENCE {
  dCH-ID                  DCH-ID,
  dCH-CombinationInd     DCH-CombinationInd      OPTIONAL,
  rLC-Mode                RLC-Mode,
  ul-transportFormatSet   TransportFormatSet,
  dl-transportFormatSet   TransportFormatSet,
  ul-BLER                 BLER,
  dl-BLER                 BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority   FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode               UL-FP-Mode,
  toAWS                   ToAWS,
  toAWE                   ToAWE,
  iE-Extensions            ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RL-InformationList-RL-SetupReqFDD       ::= RL-IE-ContainerList { {RL-InformationItemIEs-RL-SetupReqFDD} }

RL-InformationItemIEs-RL-SetupReqFDD RNSAP-PROTOCOL-IES ::= {
{ ID id-RL-InformationItem-RL-SetupReqFDD CRITICALITY ignore TYPE RL-InformationItem-RL-SetupReqFDD PRESENCE mandatory },
...
}

RL-InformationItem-RL-SetupReqFDD ::= SEQUENCE {

```

```

rL-ID                      RL-ID,
uC-ID                      C-ID,
frameOffset                FrameOffset,
chipOffset                 ChipOffset,
propagationDelay           PropagationDelay      OPTIONAL,
diversityControlField      DiversityControlField OPTIONAL
-- This IE is present only if the RL is not the first one in the RL-InformationList-RL-SetupReqFDD --,
dl-InitialTX-Power         DL-Power          OPTIONAL
-- Initial DL transmission power -- ,
cPICH-EcIo                CPICH-EcIo        OPTIONAL,
ssDT-CellID                SSDT-CellID       OPTIONAL,
iE-Extensions               ProtocolExtensionContainer { {RL-InformationItem-RL-SetupReqFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationItem-RL-SetupReqFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkSetupRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- RADIO LINK SETUP REQUEST TDD
-- 
-- *****

RadioLinkSetupRequestTDD ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container    {{RadioLinkSetupRequestTDD-IEs}},
  protocolExtensions            ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}}           OPTIONAL,
  ...
}

RadioLinkSetupRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-S-RNTI             CRITICALITY ignore TYPE S-RNTI           PRESENCE mandatory } |
  { ID id-D-RNTI             CRITICALITY ignore TYPE D-RNTI           PRESENCE optional } |
  { ID id-AllowedQueuingTime CRITICALITY ignore TYPE AllowedQueuingTime PRESENCE optional } |
  { ID id-UL-MeanBitRate     CRITICALITY ignore TYPE MeanBitRate      PRESENCE optional } |
  { ID id-DL-MeanBitRate     CRITICALITY ignore TYPE MeanBitRate      PRESENCE optional } |
  { ID id-UL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE UL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-DL-CCTrChInformationList-RL-SetupReqTDD CRITICALITY ignore TYPE DL-CCTrChInformationList-RL-SetupReqTDD PRESENCE mandatory } |
  { ID id-DCH-InformationList-RL-SetupReqTDD   CRITICALITY ignore TYPE DCH-InformationList-RL-SetupReqTDD  PRESENCE mandatory } |
  { ID id-RL-Information-RL-SetupReqTDD       CRITICALITY ignore TYPE RL-Information-RL-SetupReqTDD    PRESENCE mandatory },
  ...
}

UL-CCTrChInformationList-RL-SetupReqTDD      ::= CCTrCH-IE-ContainerList { {UL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

UL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {

```

```

{ ID id-UL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore   TYPE UL-CCTrChInformationItem-RL-SetupReqTDD  PRESENCE mandatory  },
...
}

UL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
  cCTrCH-ID           CCTrCH-ID,
  ul-TFCS             TransportFormatCombinationSet,
  tFCI-Coding         TFCI-Coding,
  ul-PunctureLimit    PunctureLimit,
  iE-Extensions       ProtocolExtensionContainer { {UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
...
}

UL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DL-CCTrChInformationList-RL-SetupReqTDD      ::= CCTrCH-IE-ContainerList { {DL-CCTrChInformationItemIEs-RL-SetupReqTDD} }

DL-CCTrChInformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrChInformationItem-RL-SetupReqTDD CRITICALITY ignore   TYPE DL-CCTrChInformationItem-RL-SetupReqTDD  PRESENCE mandatory  },
...
}

DL-CCTrChInformationItem-RL-SetupReqTDD ::= SEQUENCE {
  cCTrCH-ID           CCTrCH-ID,
  dl-TFCS             TransportFormatCombinationSet,
  tFCI-Coding         TFCI-Coding,
  dl-PunctureLimit    PunctureLimit,
  iE-Extensions       ProtocolExtensionContainer { {DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
...
}

DL-CCTrChInformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-InformationList-RL-SetupReqTDD      ::= DCH-IE-ContainerList { {DCH-InformationItemIEs-RL-SetupReqTDD} }

DCH-InformationItemIEs-RL-SetupReqTDD RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-InformationItem-RL-SetupReqTDD  CRITICALITY ignore   TYPE DCH-InformationItem-RL-SetupReqTDD      PRESENCE mandatory  },
...
}

DCH-InformationItem-RL-SetupReqTDD ::= SEQUENCE {
  dCH-ID              DCH-ID,
  ul-cCTrCH-ID        CCTrCH-ID, -- UL CCTrCH in which the DCH is mapped
  dl-cCTrCH-ID        CCTrCH-ID, -- DL CCTrCH in which the DCH is mapped
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  rLC-Mode            RLC-Mode,
  ul-transportFormatSet TransportFormatSet,
}

```

```

dl-transportFormatSet          TransportFormatSet,
ul-BLER                      BLER,
dl-BLER                      BLER,
allocationRetentionPriority   AllocationRetentionPriority,
frameHandlingPriority        FrameHandlingPriority,
payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
ul-FP-Mode                   UL-FP-Mode,
toAWS                        ToAWS,
toAWE                        ToAWE,
iE-Extensions                ProtocolExtensionContainer { {DCH-InformationItem-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationItem-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RL-Information-RL-SetupReqTDD ::= SEQUENCE {
  rL-ID                         RL-ID,
  c-ID                          C-ID,
  frameOffset                  FrameOffset,
  primaryCCPCH-RSCP            PrimaryCCPCH-RSCP      OPTIONAL,
  iE-Extensions                 ProtocolExtensionContainer { {RL-Information-RL-SetupReqTDD-ExtIEs} } OPTIONAL,
...
}

RL-Information-RL-SetupReqTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
-- 
-- RADIO LINK SETUP RESPONSE FDD
-- 
-- *****

RadioLinkSetupResponseFDD ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container    {{RadioLinkSetupResponseFDD-IEs}},
  protocolExtensions           ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}           OPTIONAL,
...
}

RadioLinkSetupResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-D-RNTI               CRITICALITY ignore  TYPE D-RNTI                           PRESENCE optional } |
{ ID id-CN-PS-DomainIdentifier CRITICALITY ignore  TYPE CN-PS-DomainIdentifier       PRESENCE optional } |
{ ID id-CN-CS-DomainIdentifier CRITICALITY ignore  TYPE CN-CS-DomainIdentifier       PRESENCE optional } |
{ ID id-RL-InformationResponseList-RL-SetupRspFDD

```

```

    CRITICALITY ignore  TYPE RL-InformationResponseList-RL-SetupRspFDD
                           PRESENCE mandatory } |
{ ID id-UL-EbNoTarget          CRITICALITY ignore  TYPE UL-EbNoTarget      PRESENCE optional } |
{ ID id-DL-EbNoTarget          CRITICALITY ignore  TYPE DL-EbNoTarget      PRESENCE optional } |
{ ID id-CriticalityDiagnostics CRITICALITY ignore  TYPE CriticalityDiagnostics PRESENCE optional },
...
}

RL-InformationResponseList-RL-SetupRspFDD ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-SetupRspFDD} }

RL-InformationResponseItemIEs-RL-SetupRspFDD RNSAP-PROTOCOL-IES ::= {
{ ID id-RL-InformationResponseItem-RL-SetupRspFDD
    CRITICALITY ignore  TYPE RL-InformationResponseItem-RL-SetupRspFDD  PRESENCE mandatory },
...
}

RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
  rL-ID           RL-ID,
  sAI             SAI,
  ul-InterferenceLevel   ScaledUL-InterferenceLevel,
  dl-CodeInformation     DL-CodeInformationList-RL-SetupRspFDD,
  ssDT-SupportIndicator SSDT-SupportIndicator,
  maxUL-EbNo        UL-EbNo,
  minUL-EbNo        UL-EbNo,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
  iE-Extensions     ProtocolExtensionContainer { {RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupRspFDD

DL-CodeInformationItem-RL-SetupRspFDD ::= SEQUENCE {
  dl-ScramblingCode       DL-ScramblingCode,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
-- ** NOTE: How many alternatives are there, 2 or 3? **
  diversityIndication     CHOICE {
    combining               SEQUENCE {
      rL-ID                 RL-ID
    },
    nonCombiningOrIENotPresent SEQUENCE {
      dCH-InformationResponse-RL-SetupRspFDD DCH-InformationResponseList-RL-SetupRspFDD OPTIONAL
    }
  }
  OPTIONAL
-- This IE is present only if the RL is not the first one in the RL Information -- ,
  iE-Extensions           ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
}

```

```

}

DL-CodeInformationItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspFDD

DCH-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    dCH-ID           DCH-ID,
    bindingID       BindingID,
    transportLayerAddress TransportLayerAddress,
    iE-Extensions   ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-SetupRsp

NeighbouringFDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    uC-ID           C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN          UARFCN,
    frameOffset     FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
    iE-Extensions   ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-SetupRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-SetupRsp

NeighbouringTDD-CellInformationItem-RL-SetupRsp ::= SEQUENCE {
    c-ID           C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN          UARFCN,
    frameOffset     FrameOffset OPTIONAL,
}

```

```

cellParameterID           CellParameterID,
syncCase                 SyncCase,
timeSlot                 TimeSlot          OPTIONAL
-- This IE is present only if SyncCase is Case1 -- ,
pSCH-TimeSlot            PSCH-TimeSlot      OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
ul-EbNo                  UL-EbNo           OPTIONAL,
dl-EbNo                  DL-EbNo           OPTIONAL,
iE-Extensions            ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-SetupRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkSetupResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ****
-- 
-- RADIO LINK SETUP RESPONSE TDD
-- 
-- ****

RadioLinkSetupResponseTDD ::= SEQUENCE {
  protocolIEs             ProtocolIE-Container    {{RadioLinkSetupResponseTDD-IEs}},
  protocolExtensions       ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}           OPTIONAL,
...
}

RadioLinkSetupResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-D-RNTI           CRITICALITY ignore   TYPE D-RNTI           PRESENCE optional } |
{ ID id-CN-PS-DomainIdentifier   CRITICALITY ignore   TYPE CN-PS-DomainIdentifier   PRESENCE optional } |
{ ID id-CN-CS-DomainIdentifier   CRITICALITY ignore   TYPE CN-CS-DomainIdentifier   PRESENCE optional } |
{ ID id-RL-InformationResponse-RL-SetupRspTDD   CRITICALITY ignore   TYPE RL-InformationResponse-RL-SetupRspTDD PRESENCE mandatory } |
{ ID id-CriticalityDiagnostics   CRITICALITY ignore   TYPE CriticalityDiagnostics   PRESENCE optional },
...
}

RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE {
  rL-ID                   RL-ID,
  sAI                     SAI,
  ul-InterferenceLevel   ScaledUL-InterferenceLevel,
  maxUL-EbNo              UL-EbNo,
  minUL-EbNo              UL-EbNo,
  ul-EbNoTarget            UL-EbNo           OPTIONAL,
  dl-EbNoTarget            DL-EbNo           OPTIONAL,
  ul-CCTrCHInformation    UL-CCTrCHInformationList-RL-SetupRsPTDD,
  dl-CCTrCHInformation    DL-CCTrCHInformationList-RL-SetupRsPTDD,
}

```

```

dCH-InformationResponse      DCH-InformationResponseList-RL-SetupRspTDD,
neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
iE-Extensions                 ProtocolExtensionContainer { {RL-InformationResponse-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponse-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-SetupRspTDD

UL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
  cCTrCH-ID           CCTrCH-ID,
  ul-DPCH-Information UL-DPCH-InformationList-RL-SetupRspTDD,
  iE-Extensions        ProtocolExtensionContainer { {UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

UL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-SetupRspTDD

-- **NOTE: UL-DPCH-InformationItem-RL-SetupRspTDD and DL-DPCH-InformationItem-RL-SetupRspTDD
--       are currently similar. Combine them? **
UL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
  dPCH-ID             DPCH-ID,
  tDD-ChannelisationCode TDD-ChannelisationCode,
  burstType            BurstType,
  midambleShift        MidambleShift,
  timeSlot             TimeSlot,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod     RepetitionPeriod,
  repetitionLength     RepetitionLength,
  tFCI-Presence        TFCI-Presence,
  iE-Extensions         ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
...
}

UL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-SetupRspTDD

```

```

DL-CCTrCHInformationItem-RL-SetupRspTDD ::= SEQUENCE {
    cCTrCH-ID                  CCTrCH-ID,
    dl-DPCH-Information        DL-DPCH-InformationList-RL-SetupRspTDD,
    iE-Extensions               ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CCTrCHInformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-SetupRspTDD

DL-DPCH-InformationItem-RL-SetupRspTDD ::= SEQUENCE {
    dPCH-ID                    DPCH-ID,
    tDD-ChannelisationCode     TDD-ChannelisationCode,
    burstType                  BurstType,
    midambleShift              MidambleShift,
    timeSlot                   TimeSlot,
    tDD-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
    repetitionPeriod           RepetitionPeriod,
    repetitionLength           RepetitionLength,
    tFCI-Presence              TFCI-Presence,
    iE-Extensions               ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DL-DPCH-InformationItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DCH-InformationResponseList-RL-SetupRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupRspTDD

DCH-InformationResponseItem-RL-SetupRspTDD ::= SEQUENCE {
    dCH-ID                     DCH-ID,
    bindingID                  BindingID,
    transportLayerAddress       TransportLayerAddress,
    iE-Extensions               ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-SetupRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****

```

```

--  

-- RADIO LINK SETUP FAILURE FDD  

--  

-- ****  

RadioLinkSetupFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkSetupFailureFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}}                                OPTIONAL,
    ...
}

RadioLinkSetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI           CRITICALITY ignore TYPE D-RNTI                      PRESENCE mandatory } |
    { ID id-CN-PS-DomainIdentifier   CRITICALITY ignore TYPE CN-PS-DomainIdentifier   PRESENCE mandatory } |
    { ID id-CN-CS-DomainIdentifier   CRITICALITY ignore TYPE CN-CS-DomainIdentifier   PRESENCE mandatory } |
    { ID id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD
        PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
        CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-SetupFailureFDD
        PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics   CRITICALITY ignore TYPE CriticalityDiagnostics   PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD
        PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-SetupFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs} }

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD
        CRITICALITY ignore TYPE SuccessfulRL-InformationResponse-RL-SetupFailureFDD
        PRESENCE mandatory },
    ...
}

```

```

}

SuccessfulRL-InformationResponse-RL-SetupFailureFDD ::= SEQUENCE {
    rL-ID                      RL-ID,
    sAI                         SAI,
    ul-InterferenceLevel        ScaledUL-InterferenceLevel,
    dl-CodeInformation          DL-CodeInformationList-RL-SetupFailureFDD,
    sSDT-SupportIndicator       SSDT-SupportIndicator,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupFailureFDD OPTIONAL,
    ul-EbNoTarget                UL-EbNo,
    maxUL-EbNo                  UL-EbNo,
    minUL-EbNo                  UL-EbNo,
    dl-EbNoTarget                DL-EbNo,
    iE-Extensions                ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-SetupFailureFDD

SuccessfulRL-InformationResponse-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CodeInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    dl-ScramblingCode           DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication         CHOICE {
        combining                SEQUENCE {
            rL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-SetupFailureFDD      DCH-InformationResponseList-RL-SetupFailureFDD OPTIONAL
        }
    }
    OPTIONAL
    -- This IE is present only if the RL is not the first one in the RL Information -- ,
    iE-Extensions                ProtocolExtensionContainer { {DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-SetupFailureFDD

DCH-InformationResponseItem-RL-SetupFailureFDD ::= SEQUENCE {
    dCH-ID                      DCH-ID,
    ...
}

```

```

bindingID          BindingID,
transportLayerAddress TransportLayerAddress,
iE-Extensions      ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringFDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID           C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN          UARFCN,
    frameOffset      FrameOffset OPTIONAL,
    primaryScramblingCode PrimaryScramblingCode,
    primaryCPICH-Power PrimaryCPICH-Power OPTIONAL,
    iE-Extensions    ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringFDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

NeighbouringTDD-CellInformationList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD ::= SEQUENCE {
    uC-ID           C-ID,
    cN-PS-DomainIdentifier CN-PS-DomainIdentifier OPTIONAL,
    cN-CS-DomainIdentifier CN-CS-DomainIdentifier OPTIONAL,
    uARFCN          UARFCN,
    frameOffset      FrameOffset OPTIONAL,
    cellParameterID CellParameterID,
    syncCase         SyncCase,
    timeSlot         TimeSlot,
    pSCH-TimeSlot    PSCH-TimeSlot OPTIONAL
-- This IE is present only if pSCH-PCCPCH-Allocation = Case3 --
    iE-Extensions    ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs} } OPTIONAL,
...
}

NeighbouringTDD-CellInformationItem-RL-SetupFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

RadioLinkSetupFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK SETUP FAILURE TDD
-- 

-- *****

RadioLinkSetupFailureTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkSetupFailureTDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkSetupFailureTDD-IES RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD
                                PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics      CRITICALITY ignore TYPE CriticalityDiagnostics      PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    cause                Cause,
    iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkSetupFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK ADDITION REQUEST FDD
-- 

-- *****

RadioLinkAdditionRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkAdditionRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionRequestFDD-Extensions}} OPTIONAL,
    ...
}

```

```

RadioLinkAdditionRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-EbNoTarget           CRITICALITY ignore   TYPE UL-EbNo                  PRESENCE mandatory } |
    { ID id-RL-InformationList-RL-AdditionRqstFDD   CRITICALITY ignore   TYPE RL-InformationList-RL-AdditionRqstFDD  PRESENCE mandatory },
    ...
}

RL-InformationList-RL-AdditionRqstFDD      ::= RL-IE-ContainerList { {RL-Information-RL-AdditionRqstFDD-IEs} }

RL-Information-RL-AdditionRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstFDD   CRITICALITY ignore   TYPE RL-Information-RL-AdditionRqstFDD   PRESENCE mandatory },
    ...
}

RL-Information-RL-AdditionRqstFDD ::= SEQUENCE {
    rL-ID,
    c-ID,
    frameOffset,
    chipOffset,
    diversityControlField,
    primaryCPICH-EcNo          PrimaryCPICH-EcNo      OPTIONAL,
    SSDT-CellID                SSDT-CellID        OPTIONAL,
    iE-Extensions               ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-RL-AdditionRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK ADDITION REQUEST TDD
-- 
-- *****

RadioLinkAdditionRequestTDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container     { {RadioLinkAdditionRequestTDD-IEs} },
    protocolExtensions     ProtocolExtensionContainer { {RadioLinkAdditionRequestTDD-Extensions} }
                                OPTIONAL,
    ...
}

RadioLinkAdditionRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-AdditionRqstTDD   CRITICALITY ignore   TYPE RL-Information-RL-AdditionRqstTDD   PRESENCE mandatory },
    ...
}

RL-Information-RL-AdditionRqstTDD ::= SEQUENCE {

```

```

rL-ID                      RL-ID,
c-ID                       C-ID,
frameOffset                FrameOffset,
chipOffset                 ChipOffset,
diversityControlField      DiversityControlField,
primaryCCPCH-RSCP          PrimaryCCPCH-RSCP,
iE-Extensions               ProtocolExtensionContainer { {RL-Information-RL-AdditionRqstTDD-ExtIEs} } OPTIONAL,
...
}

RL-Information-RL-AdditionRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkAdditionRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ****
-- 
-- RADIO LINK ADDITION RESPONSE FDD
-- 
-- ****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
  protocolIEs           ProtocolIE-Container     {{RadioLinkAdditionResponseFDD-IEs}},
  protocolExtensions     ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}                               OPTIONAL,
...
}

RadioLinkAdditionResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-D-RNTI          CRITICALITY ignore   TYPE D-RNTI                           PRESENCE optional } |
  { ID id-RL-InformationResponseList-RL-AdditionRspFDD
    CRITICALITY ignore   TYPE RL-InformationResponseList-RL-AdditionRspFDD
                           PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics   CRITICALITY ignore   TYPE CriticalityDiagnostics   PRESENCE optional },
...
}

RL-InformationResponseList-RL-AdditionRspFDD      ::= RL-IE-ContainerList { {RL-InformationResponseItemIEs-RL-AdditionRspFDD} }

RL-InformationResponseItemIEs-RL-AdditionRspFDD RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseItem-RL-AdditionRspFDD
    CRITICALITY ignore   TYPE RL-InformationResponseItem-RL-AdditionRspFDD   PRESENCE mandatory },
...
}

RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
  rL-ID                  RL-ID,
  SAI                   SAI,
  ul-InterferenceLevel ScaledUL-InterferenceLevel,
}

```

```

dl-CodeInformation          DL-CodeInformationList-RL-AdditionRspFDD,
ssDT-SupportIndicator      SSDT-SupportIndicator,
maxUL-EbNo                  UL-EbNo,
minUL-EbNo                  UL-EbNo,
neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-SetupRsp OPTIONAL,
neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-SetupRsp OPTIONAL,
iE-Extensions                ProtocolExtensionContainer { {RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionRspFDD

DL-CodeInformationItem-RL-AdditionRspFDD ::= SEQUENCE {
    dl-ScramblingCode          DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    -- ** NOTE: How many alternatives are there, 2 or 3? **
    diversityIndication        CHOICE {
        combining               SEQUENCE {
            rL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionRspFDD      DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
        }
    }
    OPTIONAL
    -- This IE is present only if the RL is not the first one in the RL Information -- ,
    iE-Extensions                ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

DL-CodeInformationItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionRspFDD

DCH-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    dCH-ID                    DCH-ID,
    bindingID                 BindingID,
    transportLayerAddress     TransportLayerAddress,
    iE-Extensions              ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} } OPTIONAL,
...
}

DCH-InformationResponseItem-RL-AdditionRspFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

}

-- ** NOTE: Both FDD and TDD messages use these definitions **
NeighbouringFDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionRsp

NeighbouringFDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                               C-ID,
    cN-PS-DomainIdentifier             CN-PS-DomainIdentifier      OPTIONAL,
    cN-CS-DomainIdentifier             CN-CS-DomainIdentifier      OPTIONAL,
    uARFCN                             UARFCN,
    frameOffset                         FrameOffset      OPTIONAL,
    primaryScramblingCode              PrimaryScramblingCode,
    primaryCPICH-Power                PrimaryCPICH-Power      OPTIONAL,
    iE-Extensions                      ProtocolExtensionContainer { NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRsp ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionRsp

NeighbouringTDD-CellInformationItem-RL-AdditionRsp ::= SEQUENCE {
    uC-ID                               C-ID,
    cN-PS-DomainIdentifier             CN-PS-DomainIdentifier      OPTIONAL,
    cN-CS-DomainIdentifier             CN-CS-DomainIdentifier      OPTIONAL,
    uARFCN                             UARFCN,
    frameOffset                         FrameOffset      OPTIONAL,
    cellParameterID                   CellParameterID,
    syncCase                            SyncCase,
    timeSlot                           TimeSlot,
    pSCH-TimeSlot                      PSCH-TimeSlot      OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 --
    iE-Extensions                      ProtocolExtensionContainer { NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRsp-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkAdditionResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- RADIO LINK ADDITION RESPONSE TDD

```

```

-- ****
-- RadioLinkAdditionResponseTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkAdditionResponseTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-Extensions}}           OPTIONAL,
  ...
}

RadioLinkAdditionResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-D-RNTI           CRITICALITY ignore TYPE D-RNTI           PRESENCE optional } |
  { ID id-RL-InformationResponse-RL-AdditionRspTDD
    CRITICALITY ignore TYPE RL-InformationResponse-RL-AdditionRspTDD PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics   CRITICALITY ignore TYPE CriticalityDiagnostics   PRESENCE optional },
  ...
}

RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
  rL-ID                  RL-ID,
  sAI                    SAI,
  ul-InterferenceLevel  ScaledUL-InterferenceLevel,
  ul-CCTrCHInformation  UL-CCTrCHInformationList-RL-AdditionRspTDD,
  dl-CCTrCHInformation  DL-CCTrCHInformationList-RL-AdditionRspTDD,
  diversityIndication   CHOICE {
    combining             SEQUENCE {
      rL-ID
    },
    nonCombiningOrIENotPresent  SEQUENCE {
      dCH-InformationResponse-RL-AdditionRspFDD   DCH-InformationResponseList-RL-AdditionRspFDD OPTIONAL
    }
  }
  maxUL-EbNo              UL-EbNo,           OPTIONAL,
  minUL-EbNo              UL-EbNo,
  neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
  neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionRspTDD OPTIONAL,
  iE-Extensions           ProtocolExtensionContainer {{RL-InformationResponse-RL-AdditionRspTDD-ExtIEs}} OPTIONAL,
  ...
}

RL-InformationResponse-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCHInformationItem-RL-AdditionRspTDD

UL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  cCTrCH-ID               CCTrCH-ID,
  ul-DPCH-Information     UL-DPCH-InformationList-RL-AdditionRspTDD,
  iE-Extensions            ProtocolExtensionContainer {{UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs}} OPTIONAL,
  ...
}

```

```

}

UL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
UL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationItem-RL-AdditionRspTDD

UL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode   TDD-ChannelisationCode,
  burstType        BurstType,
  midambleShift   MidambleShift,
  timeSlot         TimeSlot,
  offset           Offset,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod RepetitionPeriod,
  repetitionLength RepetitionLength,
  tFCI-Presence   TFCI-Presence,
  iE-Extensions    ProtocolExtensionContainer { {UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}

UL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CCTrCHInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCHInformationItem-RL-AdditionRspTDD

DL-CCTrCHInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  cCTrCH-ID       CCTrCH-ID,
  dl-DPCH-Information   DL-DPCH-InformationList-RL-AdditionRspTDD,
  iE-Extensions    ProtocolExtensionContainer { {DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-CCTrCHInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-DPCH-InformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationItem-RL-AdditionRspTDD

DL-DPCH-InformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode   TDD-ChannelisationCode,
  burstType        BurstType,
  midambleShift   MidambleShift,
  timeSlot         TimeSlot,
}

```

```

tDD-PhysicalChannelOffset          TDD-PhysicalChannelOffset,
repetitionPeriod                 RepetitionPeriod,
repetitionLength                  RepetitionLength,
tFCI-Presence                    TFCI-Presence,
iE-Extensions                     ProtocolExtensionContainer { {DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-InformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

NeighbouringFDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
  NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  uC-ID                           C-ID,
  cN-PS-DomainIdentifier          CN-PS-DomainIdentifier      OPTIONAL,
  cN-CS-DomainIdentifier          CN-CS-DomainIdentifier      OPTIONAL,
  uARFCN                          UARFCN,
  frameOffset                      FrameOffset      OPTIONAL,
  primaryScramblingCode           PrimaryScramblingCode,
  primaryCPICH-Power              PrimaryCPICH-Power      OPTIONAL,
  iE-Extensions                    ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

NeighbouringTDD-CellInformationList-RL-AdditionRspTDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
  NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD ::= SEQUENCE {
  uC-ID                           C-ID,
  cN-PS-DomainIdentifier          CN-PS-DomainIdentifier      OPTIONAL,
  cN-CS-DomainIdentifier          CN-CS-DomainIdentifier      OPTIONAL,
  uARFCN                          UARFCN,
  frameOffset                      FrameOffset      OPTIONAL,
  cellParameterID                 CellParameterID,
  syncCase                         SyncCase,
  timeSlot                         TimeSlot,
  pSCH-TimeSlot                   PSCH-TimeSlot      OPTIONAL
  -- This IE is present only if pSCH-PCPCH-Allocation = Case3 --
  iE-Extensions                    ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
  ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionRspTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

}

RadioLinkAdditionResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- RADIO LINK ADDITION FAILURE FDD
-- ****

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkAdditionFailureFDD-IES RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        PRESENCE mandatory } |
    { ID id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        CRITICALITY ignore TYPE SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD
        PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IES} }

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IES RNSAP-PROTOCOL-IES ::= {
    { ID id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
        CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD
        PRESENCE mandatory },
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID           RL-ID,
    cause           Cause,
    iE-Extensions   ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIES} } OPTIONAL,
    ...
}

UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD ::= RL-IE-ContainerList { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IES} }

```

```

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-IES RNSAP-PROTOCOL-IES ::= {
    { ID id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
        CRITICALITY ignore   TYPE SuccessfulRL-InformationResponse-RL-AdditionFailureFDD
                                PRESENCE mandatory  },
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD ::= SEQUENCE {
    rL-ID                      RL-ID,
    sAI                         SAI,
    ul-InterferenceLevel       ScaledUL-InterferenceLevel,
    dl-CodeInformation          DL-CodeInformationList-RL-AdditionFailureFDD,
    ssDT-SupportIndicator      SSDT-SupportIndicator,
    maxUL-EbNo                  UL-EbNo,
    minUL-EbNo                  UL-EbNo,
    neighbouringFDD-CellInformation NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    neighbouringTDD-CellInformation NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD OPTIONAL,
    iE-Extensions               ProtocolExtensionContainer { {SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIES} } OPTIONAL,
    ...
}

SuccessfulRL-InformationResponse-RL-AdditionFailureFDD-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DL-CodeInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNoOfDL-Codes)) OF DL-CodeInformationItem-RL-AdditionFailureFDD

DL-CodeInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dl-ScramblingCode           DL-ScramblingCode,
    dl-ChannelisationCode       DL-ChannelisationCode,
    diversityIndication         CHOICE {
        combining                SEQUENCE {
            rL-ID                  RL-ID
        },
        nonCombiningOrIENotPresent SEQUENCE {
            dCH-InformationResponse-RL-AdditionFailureFDD      DCH-InformationResponseList-RL-AdditionFailureFDD  OPTIONAL
        }
    }
    OPTIONAL
-- This IE is present only if the RL is not the first one in the RL Information -- ,
    iE-Extensions               ProtocolExtensionContainer { {DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIES} } OPTIONAL,
    ...
}

DL-CodeInformationItem-RL-AdditionFailureFDD-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** NOTE: Shall this be made as an IE container? **
DCH-InformationResponseList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem-RL-AdditionFailureFDD

```

```

DCH-InformationResponseItem-RL-AdditionFailureFDD ::= SEQUENCE {
    dCH-ID                               DCH-ID,
    bindingID                            BindingID,
    transportLayerAddress                TransportLayerAddress,
    iE-Extensions                         ProtocolExtensionContainer { {DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

DCH-InformationResponseItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringFDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfFDD-Neighbours)) OF
    NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                                C-ID,
    cN-PS-DomainIdentifier               CN-PS-DomainIdentifier      OPTIONAL,
    cN-CS-DomainIdentifier               CN-CS-DomainIdentifier      OPTIONAL,
    uARFCN                               UARFCN,
    frameOffset                           FrameOffset      OPTIONAL,
    primaryScramblingCode                PrimaryScramblingCode,
    cPICH-Power                          CPICH-Power      OPTIONAL,
    iE-Extensions                         ProtocolExtensionContainer { {NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringFDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

NeighbouringTDD-CellInformationList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfTDD-Neighbours)) OF
    NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD ::= SEQUENCE {
    uC-ID                                C-ID,
    cN-PS-DomainIdentifier               CN-PS-DomainIdentifier      OPTIONAL,
    cN-CS-DomainIdentifier               CN-CS-DomainIdentifier      OPTIONAL,
    uARFCN                               UARFCN,
    frameOffset                           FrameOffset      OPTIONAL,
    cellParameterID                      CellParameterID,
    syncCase                             SyncCase,
    timeSlot                             TimeSlot,
    pSCH-TimeSlot                        PSCH-TimeSlot      OPTIONAL
    -- This IE is present only if pSCH-PCCPCH-Allocation = Case3 -- ,
    iE-Extensions                         ProtocolExtensionContainer { {NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs} } OPTIONAL,
    ...
}

NeighbouringTDD-CellInformationItem-RL-AdditionFailureFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}

RadioLinkAdditionFailureFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****
-- RADIO LINK ADDITION FAILURE TDD
--
-- ****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{RadioLinkAdditionFailureTDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkAdditionFailureTDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-UnsuccessfulRL-InformationResponse CRITICALITY ignore TYPE UnsuccessfulRL-InformationResponse PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics      CRITICALITY ignore TYPE CriticalityDiagnostics    PRESENCE optional },
  ...
}

UnsuccessfulRL-InformationResponse ::= SEQUENCE {
  rL-ID                RL-ID,
  cause                Cause,
  iE-Extensions        ProtocolExtensionContainer { {UnsuccessfulRL-InformationResponse-ExtIEs} } OPTIONAL,
  ...
}

UnsuccessfulRL-InformationResponse-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkAdditionFailureTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****
-- RADIO LINK DELETION REQUEST
--
-- ****

RadioLinkDeletionRequest ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{RadioLinkDeletionRequest-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionRequest-Extensions}} OPTIONAL,
  ...
}

```

```

RadioLinkDeletionRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationList-RL-DeletionRqst CRITICALITY ignore TYPE RL-InformationList-RL-DeletionRqst PRESENCE mandatory },
  ...
}

RL-InformationList-RL-DeletionRqst ::= RL-IE-ContainerList { {RL-Information-RL-DeletionRqst-IEs} }

RL-Information-RL-DeletionRqst-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-DeletionRqst CRITICALITY ignore TYPE RL-Information-RL-DeletionRqst PRESENCE mandatory },
  ...
}

RL-Information-RL-DeletionRqst ::= SEQUENCE {
  rL-ID,
  iE-Extensions ProtocolExtensionContainer { {RL-Information-RL-DeletionRqst-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-DeletionRqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkDeletionRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- RADIO LINK DELETION RESPONSE
-- 

-- *****

RadioLinkDeletionResponse ::= SEQUENCE {
  protocolIEs ProtocolIE-Container { {RadioLinkDeletionResponse-IEs} },
  protocolExtensions ProtocolExtensionContainer { {RadioLinkDeletionResponse-Extensions} } OPTIONAL,
  ...
}

RadioLinkDeletionResponse-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
  ...
}

RadioLinkDeletionResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION PREPARE FDD
-- 

```

```

-- ****
RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkReconfigurationPrepareFDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareFDD-IES RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueueingTime      CRITICALITY ignore TYPE AllowedQueueingTime      PRESENCE mandatory } |
    { ID id-UL-DPCH-Information     CRITICALITY ignore TYPE UL-DPCH-Information     PRESENCE optional } |
    { ID id-DL-DPCH-Information     CRITICALITY ignore TYPE DL-DPCH-Information     PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfPrepFDD  CRITICALITY ignore TYPE DCH-ModifyList-RL-ReconfPrepFDD  PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfPrepFDD  CRITICALITY ignore TYPE DCH-AddList-RL-ReconfPrepFDD  PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepFDD CRITICALITY ignore TYPE DCH-DeleteList-RL-ReconfPrepFDD  PRESENCE optional } |
    { ID id-RL-InformationList-RL-ReconfPrepFDD CRITICALITY ignore TYPE RL-InformationList-RL-ReconfPrepFDD PRESENCE mandatory },
    ...
}

UL-DPCH-Information ::= SEQUENCE {
    ul-ScramblingCode           UL-ScramblingCode OPTIONAL,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
    maxNrOfUL-DPDCHs            MaxNrOfUL-DPDCHs OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4 --,
    ul-PunctureLimit             PunctureLimit OPTIONAL,
    tFCS                        TransportFormatCombinationSet OPTIONAL,
    ul-DPCCH-SlotFormat          UL-DPCCH-SlotFormat OPTIONAL,
    sSDT-CellIDLength            SSDT-CellID-Length OPTIONAL,
    s-FieldLength                S-FieldLength OPTIONAL,
    meanBitRate                  MeanBitRate OPTIONAL,
    iE-Extensions                ProtocolExtensionContainer { {UL-DPCH-Information-ExtIES} } OPTIONAL,
    ...
}

UL-DPCH-Information-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-DPCH-Information ::= SEQUENCE {
    tFCS                      TransportFormatCombinationSet OPTIONAL,
    dl-DPCCH-SlotFormat        DL-DPCCH-SlotFormat OPTIONAL,
    tFCI-SignallingMode        TFCI-SignallingMode OPTIONAL,
    tFCI-Presence              TFCI-Presence OPTIONAL
    -- This IE is present if Slot Format is from 12 to 16 --,
    multiplexingPosition       MultiplexingPosition OPTIONAL,
    meanBitRate                 MeanBitRate OPTIONAL,
    iE-Extensions               ProtocolExtensionContainer { {DL-DPCH-Information-ExtIES} } OPTIONAL,
    ...
}

DL-DPCH-Information-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {

```

```

}
  ...
}

DCH-ModifyList-RL-ReconfPrepFDD      ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepFDD-IES} }

DCH-Modify-RL-ReconfPrepFDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfPrepFDD      CRITICALITY ignore   TYPE DCH-ModifyItem-RL-ReconfPrepFDD      PRESENCE mandatory   },
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  ul-TransportformatSet   TransportFormatSet   OPTIONAL,
  dl-TransportformatSet   TransportFormatSet   OPTIONAL,
  allocationRetentionPriority AllocationRetentionPriority   OPTIONAL,
  frameHandlingPriority   FrameHandlingPriority   OPTIONAL,
  ul-FP-Mode        UL-FP-Mode     OPTIONAL,
  toAWS            ToAWS        OPTIONAL,
  toAWE            ToAWE        OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepFDD-ExtIES} } OPTIONAL,
  ...
}

DCH-ModifyItem-RL-ReconfPrepFDD-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-AddList-RL-ReconfPrepFDD      ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepFDD-IES} }

DCH-Add-RL-ReconfPrepFDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfPrepFDD      CRITICALITY ignore   TYPE DCH-AddItem-RL-ReconfPrepFDD      PRESENCE mandatory   },
  ...
}

DCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  rLC-Mode         RLC-Mode,
  dCH-CombinationInd   DCH-CombinationInd   OPTIONAL,
  ul-TransportformatSet   TransportFormatSet,
  dl-TransportformatSet   TransportFormatSet,
  ul-BLER          BLER,
  dl-BLER          BLER,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority   FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode        UL-FP-Mode,
  toAWS            ToAWS,
  toAWE            ToAWE,
  iE-Extensions    ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepFDD-ExtIES} } OPTIONAL,
  ...
}

```

```

DCH-AddItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-DeleteList-RL-ReconfPrepFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepFDD-IES} }

DCH-Delete-RL-ReconfPrepFDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfPrepFDD   CRITICALITY ignore   TYPE DCH-DeleteItem-RL-ReconfPrepFDD   PRESENCE mandatory },
  ...
}

DCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  iE-Extensions    ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-InformationList-RL-ReconfPrepFDD ::= RL-IE-ContainerList { {RL-Information-RL-ReconfPrepFDD-IES} }

RL-Information-RL-ReconfPrepFDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-ReconfPrepFDD   CRITICALITY ignore   TYPE RL-Information-RL-ReconfPrepFDD   PRESENCE mandatory },
  ...
}

RL-Information-RL-ReconfPrepFDD ::= SEQUENCE {
  rL-ID            RL-ID,
  sSDT-Indication  SSDT-Indication   OPTIONAL,
  sSDT-CellIdentity SSDT-CellID   OPTIONAL
  -- The IE may be present if the sSDT-Indication is set to 'sSDT-active-in-the-UE' --,
  iE-Extensions    ProtocolExtensionContainer { {RL-Information-RL-ReconfPrepFDD-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-ReconfPrepFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationPrepareFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION PREPARE TDD
-- 
-- ****

```

```

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkReconfigurationPrepareTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}}
} OPTIONAL,
    ...

RadioLinkReconfigurationPrepareTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueueingTime      CRITICALITY ignore  TYPE AllowedQueueingTime      PRESENCE optional } |
    { ID id-UL-MeanBitRate          CRITICALITY ignore  TYPE MeanBitRate          PRESENCE optional } |
    { ID id-DL-MeanBitRate          CRITICALITY ignore  TYPE MeanBitRate          PRESENCE optional } |
    { ID id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD
        CRITICALITY ignore  TYPE UL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD
        CRITICALITY ignore  TYPE DL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE mandatory } |
    { ID id-DCH-ModifyList-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE DCH-ModifyList-RL-ReconfPrepTDD  PRESENCE mandatory } |
    { ID id-DCH-AddList-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE DCH-AddList-RL-ReconfPrepTDD  PRESENCE mandatory } |
    { ID id-DCH-DeleteList-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE DCH-DeleteList-RL-ReconfPrepTDD  PRESENCE mandatory },
} ...
}

UL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

UL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE UL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
} ...

UL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
    cCTrCH-ID           CCTrCH-ID,
    tFCS                TransportFormatCombinationSet  OPTIONAL,
    tFCI-Coding          TFCI-Coding                   OPTIONAL,
    punctureLimit        PunctureLimit                 OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer {{UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs}} OPTIONAL,
} ...

UL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs} }

DL-CCTrCH-Information-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDD  CRITICALITY ignore  TYPE DL-CCTrCH-Information-RL-ReconfPrepTDD PRESENCE mandatory },
} ...

DL-CCTrCH-Information-RL-ReconfPrepTDD ::= SEQUENCE {
    cCTrCH-ID           CCTrCH-ID,
    tFCS                TransportFormatCombinationSet  OPTIONAL,
}

```

```

tFCI-Coding          OPTIONAL,
punctureLimit        OPTIONAL,
iE-Extensions       ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
...
}

DL-CCTrCH-Information-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-ModifyList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfPrepTDD-IES} }

DCH-Modify-RL-ReconfPrepTDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfPrepTDD      CRITICALITY ignore   TYPE DCH-ModifyItem-RL-ReconfPrepTDD      PRESENCE mandatory  },
  ...
}

DCH-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  ul-CCTrCH-ID    CCTrCH-ID      OPTIONAL,
  dl-CCTrCH-ID    CCTrCH-ID      OPTIONAL,
  ul-TransportformatSet TransportFormatSet OPTIONAL,
  dl-TransportformatSet TransportFormatSet OPTIONAL,
  allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
  frameHandlingPriority FrameHandlingPriority OPTIONAL,
  ul-FP-Mode       UL-FP-Mode     OPTIONAL,
  toAWS            ToAWS         OPTIONAL,
  toAWE            ToAWE         OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-ModifyItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-AddList-RL-ReconfPrepTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfPrepTDD-IES} }

DCH-Add-RL-ReconfPrepTDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfPrepTDD      CRITICALITY ignore   TYPE DCH-AddItem-RL-ReconfPrepTDD      PRESENCE mandatory  },
  ...
}

DCH-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  rLC-Mode         RLC-Mode,
  ul-CCTrCH-ID    CCTrCH-ID,
  dl-CCTrCH-ID    CCTrCH-ID,
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  ul-TransportformatSet TransportFormatSet,
  dl-TransportformatSet TransportFormatSet,
}

```

```

ul-BLER           BLER,
dl-BLER           BLER,
allocationRetentionPriority AllocationRetentionPriority,
frameHandlingPriority   FrameHandlingPriority,
payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
ul-FP-Mode        UL-FP-Mode,
toAWS            ToAWS,
toAWE            ToAWE,
iE-Extensions    ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-DeleteList-RL-ReconfPrepTDD          ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfPrepTDD-IEs} }

DCH-Delete-RL-ReconfPrepTDD-IEs RNSAP-PROTOCOL-IEs ::= {
  { ID id-DCH-DeleteItem-RL-ReconfPrepTDD      CRITICALITY ignore  TYPE DCH-DeleteItem-RL-ReconfPrepTDD      PRESENCE mandatory } ,
  ...
}

DCH-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  iE-Extensions    ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationPrepareTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION READY FDD
-- 
-- ****

RadioLinkReconfigurationReadyFDD ::= SEQUENCE {
  protocolIEs        ProtocolIE-Container { {RadioLinkReconfigurationReadyFDD-IEs} },
  protocolExtensions ProtocolExtensionContainer { {RadioLinkReconfigurationReadyFDD-Extensions} }
  OPTIONAL,
  ...
}

RadioLinkReconfigurationReadyFDD-IEs RNSAP-PROTOCOL-IEs ::= {
  { ID id-RL-InformationResponseList-RL-ReconfReadyFDD

```

```

    CRITICALITY ignore  TYPE RL-InformationResponseList-RL-ReconfReadyFDD
                           PRESENCE optional  } |
{ ID id-CriticalityDiagnostics      CRITICALITY ignore  TYPE CriticalityDiagnostics      PRESENCE optional },
...
}

RL-InformationResponseList-RL-ReconfReadyFDD ::= RL-IE-ContainerList { {RL-InformationResponse-RL-ReconfReadyFDD-IEs} }

RL-InformationResponse-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-RL-InformationResponseItem-RL-ReconfReadyFDD
    CRITICALITY ignore  TYPE RL-InformationResponseItem-RL-ReconfReadyFDD
                           PRESENCE mandatory },
...
}

RL-InformationResponseItem-RL-ReconfReadyFDD ::= SEQUENCE {
  rL-ID
          RL-ID,
  max-UL-EbNo
          UL-EbNo,
  min-UL-EbNo
          UL-EbNo,
  dCHsToBeAdded
          DCH-AddList-RL-ReconfReadyFDD      OPTIONAL,
  dCHsToBeModified
          DCH-ModifyList-RL-ReconfReadyFDD      OPTIONAL,
  iE-Extensions
          ProtocolExtensionContainer { {RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
...
}

RL-InformationResponseItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyFDD-IEs} }

DCH-Add-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem-RL-ReconfReadyFDD      CRITICALITY ignore  TYPE DCH-AddItem-RL-ReconfReadyFDD      PRESENCE mandatory },
...
}

DCH-AddItem-RL-ReconfReadyFDD ::= SEQUENCE {
  dCH-ID
          DCH-ID,
  bindingID
          BindingID,
  transportLayerAddress
          TransportLayerAddress,
  iE-Extensions
          ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-ModifyList-RL-ReconfReadyFDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyFDD-IEs} }

DCH-Modify-RL-ReconfReadyFDD-IEs RNSAP-PROTOCOL-IES ::= {

```

```

{ ID id-DCH-ModifyItem-RL-ReconfReadyFDD   CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfReadyFDD   PRESENCE mandatory  },
...
}

DCH-ModifyItem-RL-ReconfReadyFDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  bindingID       BindingID,
  transportLayerAddress TransportLayerAddress,
  iE-Extensions    ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfReadyFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkReconfigurationReadyFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION READY TDD
-- 
-- ****

RadioLinkReconfigurationReadyTDD ::= SEQUENCE {
  protocolIEs        ProtocolIE-Container { {RadioLinkReconfigurationReadyTDD-IEs} },
  protocolExtensions ProtocolExtensionContainer { {RadioLinkReconfigurationReadyTDD-Extensions} }
  OPTIONAL,
...
}

RadioLinkReconfigurationReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponse-RL-ReconfReadyTDD
      CRITICALITY ignore  TYPE RL-InformationResponse-RL-ReconfReadyTDD  PRESENCE optional  } |
  { ID id-CriticalityDiagnostics       CRITICALITY ignore  TYPE CriticalityDiagnostics  PRESENCE optional  },
...
}

RL-InformationResponse-RL-ReconfReadyTDD ::= SEQUENCE {
  rL-ID             RL-ID,
  max-UL-EbNo       UL-EbNo,
  min-UL-EbNo       UL-EbNo,
  ul-CCTrCH-Information UL-CCTrCH-InformationList-RL-ReconfReadyTDD  OPTIONAL,
  dl-CCTrCH-Information DL-CCTrCH-InformationList-RL-ReconfReadyTDD  OPTIONAL,
  dCHsToBeAdded     DCH-AddList-RL-ReconfReadyTDD  OPTIONAL,
  dCHsToBeModified  DCH-ModifyList-RL-ReconfReadyTDD  OPTIONAL,
  iE-Extensions     ProtocolExtensionContainer { {RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
...
}

```

```

RL-InformationResponse-RL-ReconfReadyTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

UL-CCTrCH-InformationList-RL-ReconfReadyTDD      ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }

UL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID           CRITICALITY ignore  TYPE CCTrCH-ID           PRESENCE mandatory } |
  { ID id-UL-DPCH-InformationList-RL-ReconfReadyTDD
    CRITICALITY ignore  TYPE UL-DPCH-InformationList-RL-ReconfReadyTDD
    PRESENCE mandatory },
  ...
}

UL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
  burstType        BurstType OPTIONAL,
  midambleShift   MidambleShift OPTIONAL,
  timeSlot         TimeSlot OPTIONAL,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
  repetitionPeriod RepetitionPeriod OPTIONAL,
  repetitionLength RepetitionLength OPTIONAL,
  tFCI-Presence   TFCI-Presence OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {UL-DPCH-InformationList-RL-ReconfReadyTDD-IEs} } OPTIONAL,
  ...
}

UL-DPCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DL-CCTrCH-InformationList-RL-ReconfReadyTDD      ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs} }

DL-CCTrCH-InformationList-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID           CRITICALITY ignore  TYPE CCTrCH-ID           PRESENCE mandatory } |
  { ID id-DL-DPCH-InformationList-RL-ReconfReadyTDD
    CRITICALITY ignore  TYPE DL-DPCH-InformationList-RL-ReconfReadyTDD
    PRESENCE mandatory },
  ...
}

DL-DPCH-InformationList-RL-ReconfReadyTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  dPCH-ID          DPCH-ID,
  tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
  burstType        BurstType OPTIONAL,
  midambleShift   MidambleShift OPTIONAL,
  timeSlot         TimeSlot OPTIONAL,
  tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
}

```

```

repetitionPeriod           RepetitionPeriod          OPTIONAL,
repetitionLength          RepetitionLength         OPTIONAL,
tFCI-Presence             TFCI-Presence          OPTIONAL,
iE-Extensions              ProtocolExtensionContainer { {DL-DPCH-InformationList-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-InformationList-RL-ReconfReadyTDD RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-AddList-RL-ReconfReadyTDD          ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfReadyTDD-IEs} }

DCH-Add-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-AddItem           CRITICALITY ignore   TYPE DCH-AddItem-RL-ReconfReadyTDD      PRESENCE mandatory },
...
}

DCH-AddItem-RL-ReconfReadyTDD ::= SEQUENCE {
dCH-ID                      DCH-ID,
bindingID                    BindingID,
transportLayerAddress        TransportLayerAddress,
iE-Extensions                ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-ModifyList-RL-ReconfReadyTDD          ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfReadyTDD-IEs} }

DCH-Modify-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-ModifyItem        CRITICALITY ignore   TYPE DCH-ModifyItem-RL-ReconfReadyTDD     PRESENCE mandatory },
...
}

DCH-ModifyItem-RL-ReconfReadyTDD ::= SEQUENCE {
dCH-ID                      DCH-ID,
bindingID                    BindingID,
transportLayerAddress        TransportLayerAddress,
iE-Extensions                ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfReadyTDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfReadyTDD-IEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkReconfigurationReadyTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

}

-- *****
-- 
-- RADIO LINK RECONFIGURATION COMMIT
-- 
-- *****

RadioLinkReconfigurationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkReconfigurationCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationCommit-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CFN           CRITICALITY ignore TYPE CFN             PRESENCE mandatory },
    ...
}

RadioLinkReconfigurationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION FAILURE
-- 
-- *****

RadioLinkReconfigurationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkReconfigurationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationFailure-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause          CRITICALITY ignore TYPE Cause           PRESENCE mandatory } |
    { ID id-RL-ReconfigurationFailureList-RL-ReconfFail
        CRITICALITY ignore TYPE RL-ReconfigurationFailureList-RL-ReconfFail
        PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics   CRITICALITY ignore TYPE CriticalityDiagnostics   PRESENCE optional },
    ...
}

RL-ReconfigurationFailureList-RL-ReconfFail ::= RL-IE-ContainerList { {RL-ReconfigurationFailure-RL-ReconfFail-IEs} }

RL-ReconfigurationFailure-RL-ReconfFail-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-ReconfigurationFailure-RL-ReconfFail CRITICALITY ignore TYPE RL-ReconfigurationFailure-RL-ReconfFail PRESENCE mandatory },
    ...
}

```

```

RL-ReconfigurationFailure-RL-ReconfFail ::= SEQUENCE {
    rL-ID                               RL-ID,
    cause                                Cause,
    iE-Extensions           ProtocolExtensionContainer { {RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs} } OPTIONAL,
    ...
}

RL-ReconfigurationFailure-RL-ReconfFail-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

RadioLinkReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION CANCEL
-- 
-- *****

RadioLinkReconfigurationCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container { {RadioLinkReconfigurationCancel-IEs} },
    protocolExtensions   ProtocolExtensionContainer { {RadioLinkReconfigurationCancel-Extensions} }
    OPTIONAL,
    ...
}

RadioLinkReconfigurationCancel-IEs RNSAP-PROTOCOL-IES ::= {
    ...
}

RadioLinkReconfigurationCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION REQUEST FDD
-- 
-- *****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container { {RadioLinkReconfigurationRequestFDD-IEs} },
    protocolExtensions   ProtocolExtensionContainer { {RadioLinkReconfigurationRequestFDD-Extensions} }
    OPTIONAL,
    ...
}

RadioLinkReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-AllowedQueueingTime      CRITICALITY ignore  TYPE AllowedQueueingTime      PRESENCE mandatory } |
    { ID id-UL-DPCH-Information     CRITICALITY ignore  TYPE UL-DPCH-Information-RL-ReconfRqstFDD  PRESENCE optional } |
    { ID id-DL-DPCH-Information     CRITICALITY ignore  TYPE DL-DPCH-Information-RL-ReconfRqstFDD  PRESENCE optional } |
}

```

```

{ ID id-DCH-ModifyList-RL-ReconfRqstFDD   CRITICALITY ignore  TYPE DCH-ModifyList-RL-ReconfRqstFDD   PRESENCE mandatory } |
{ ID id-DCH-AddList-RL-ReconfRqstFDD     CRITICALITY ignore  TYPE DCH-AddList-RL-ReconfRqstFDD   PRESENCE mandatory } |
{ ID id-DCH-DeleteList-RL-ReconfRqstFDD  CRITICALITY ignore  TYPE DCH-DeleteList-RL-ReconfRqstFDD  PRESENCE mandatory },
...
}

UL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCs                  TransportFormatCombinationSet   OPTIONAL,
    meanBitRate            MeanBitRate      OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DL-DPCH-Information-RL-ReconfRqstFDD ::= SEQUENCE {
    tFCs                  TransportFormatCombinationSet   OPTIONAL,
    tFCI-SignallingMode   TFCI-SignallingMode OPTIONAL,
    meanBitRate            MeanBitRate      OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-ModifyList-RL-ReconfRqstFDD      ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstFDD-IEs} }

DCH-Modify-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IEs ::= {
{ ID id-DCH-ModifyItem-RL-ReconfRqstFDD   CRITICALITY ignore  TYPE DCH-ModifyItem-RL-ReconfRqstFDD   PRESENCE mandatory } ,
...
}

DCH-ModifyItem-RL-ReconfRqstFDD ::= SEQUENCE {
    dCH-ID                DCH-ID,
    ul-TransportformatSet TransportFormatSet  OPTIONAL,
    dl-TransportformatSet TransportFormatSet  OPTIONAL,
    allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority  FrameHandlingPriority OPTIONAL,
    ul-FP-Mode             UL-FP-Mode      OPTIONAL,
    toAWS                 ToAWS        OPTIONAL,
    toAWE                 ToAWE        OPTIONAL,
    iE-Extensions          ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
...
}

DCH-ModifyItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

}

DCH-AddList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstFDD-IEs} }

DCH-Add-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfRqstFDD      CRITICALITY ignore   TYPE DCH-AddItem-RL-ReconfRqstFDD      PRESENCE mandatory  },
  ...
}

DCH-AddItem-RL-ReconfRqstFDD ::= SEQUENCE {
  dCH-ID                      DCH-ID,
  rLC-Mode                     RLC-Mode,
  dCH-CombinationInd          DCH-CombinationInd OPTIONAL,
  ul-TransportformatSet        TransportFormatSet,
  dl-TransportformatSet        TransportFormatSet,
  allocationRetentionPriority AllocationRetentionPriority,
  frameHandlingPriority       FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode                   UL-FP-Mode,
  toAWS                        ToAWS,
  toAWE                        ToAWE,
  iE-Extensions                ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-AddItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-DeleteList-RL-ReconfRqstFDD ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstFDD-IEs} }

DCH-Delete-RL-ReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-DeleteItem-RL-ReconfRqstFDD      CRITICALITY ignore   TYPE DCH-DeleteItem-RL-ReconfRqstFDD      PRESENCE mandatory  },
  ...
}

DCH-DeleteItem-RL-ReconfRqstFDD ::= SEQUENCE {
  dCH-ID                      DCH-ID,
  iE-Extensions                ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****

```

```

-- 
-- RADIO LINK RECONFIGURATION REQUEST TDD
-- 
-- ****
RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkReconfigurationRequestTDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationRequestTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationRequestTDD-IES RNSAP-PROTOCOL-IES ::= {
{ ID id-AllowedQueueingTime      CRITICALITY ignore  TYPE AllowedQueueingTime           PRESENCE optional } |
{ ID id-UL-MeanBitRate          CRITICALITY ignore  TYPE MeanBitRate                 PRESENCE optional } |
{ ID id-DL-MeanBitRate          CRITICALITY ignore  TYPE MeanBitRate                 PRESENCE optional } |
{ ID id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore  TYPE UL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
{ ID id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD
    CRITICALITY ignore  TYPE DL-CCTrCH-InformationList-RL-ReconfRqstTDD PRESENCE mandatory } |
{ ID id-DCH-ModifyList-RL-ReconfRqstTDD  CRITICALITY ignore  TYPE DCH-ModifyList-RL-ReconfRqstTDD  PRESENCE mandatory } |
{ ID id-DCH-AddList-RL-ReconfRqstTDD  CRITICALITY ignore  TYPE DCH-AddList-RL-ReconfRqstTDD  PRESENCE mandatory } |
{ ID id-DCH-DeleteList-RL-ReconfRqstTDD  CRITICALITY ignore  TYPE DCH-DeleteList-RL-ReconfRqstTDD  PRESENCE mandatory },
    ...
}

UL-CCTrCH-InformationList-RL-ReconfRqstTDD      ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-Information-RL-ReconfRqstTDD-IES} }

UL-CCTrCH-Information-RL-ReconfRqstTDD-IES RNSAP-PROTOCOL-IES ::= {
{ ID id-UL-CCTrCH-Information-RL-ReconfRqstTDD  CRITICALITY ignore  TYPE UL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
    ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {
    cCTrCH-ID            CCTrCH-ID,
    tFCS                 TransportFormatCombinationSet,
    iE-Extensions        ProtocolExtensionContainer { {UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIES} } OPTIONAL,
    ...
}

UL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CCTrCH-InformationList-RL-ReconfRqstTDD      ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-Information-RL-ReconfRqstTDD-IES} }

DL-CCTrCH-Information-RL-ReconfRqstTDD-IES RNSAP-PROTOCOL-IES ::= {
{ ID id-DL-CCTrCH-Information-RL-ReconfRqstTDD  CRITICALITY ignore  TYPE DL-CCTrCH-Information-RL-ReconfRqstTDD PRESENCE mandatory },
    ...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD ::= SEQUENCE {

```

```

cCTrCH-ID          CCTrCH-ID,
tFCS               TransportFormatCombinationSet,
iE-Extensions      ProtocolExtensionContainer { {DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DL-CCTrCH-Information-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-ModifyList-RL-ReconfRqstTDD ::= DCH-IE-ContainerList { {DCH-Modify-RL-ReconfRqstTDD-IES} }

DCH-Modify-RL-ReconfRqstTDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-ModifyItem-RL-ReconfRqstTDD      CRITICALITY ignore   TYPE DCH-ModifyItem-RL-ReconfRqstTDD      PRESENCE mandatory  },
  ...
}

DCH-ModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  ul-CCTrCH-ID    CCTrCH-ID      OPTIONAL,
  dl-CCTrCH-ID    CCTrCH-ID      OPTIONAL,
  ul-TransportformatSet TransportFormatSet OPTIONAL,
  dl-TransportformatSet TransportFormatSet OPTIONAL,
  allocationRetentionPriority AllocationRetentionPriority OPTIONAL,
  frameHandlingPriority FrameHandlingPriority OPTIONAL,
  ul-FP-Mode       UL-FP-Mode     OPTIONAL,
  toAWS            ToAWS         OPTIONAL,
  toAWE            ToAWE         OPTIONAL,
  iE-Extensions    ProtocolExtensionContainer { {DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

DCH-ModifyItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DCH-AddList-RL-ReconfRqstTDD ::= DCH-IE-ContainerList { {DCH-Add-RL-ReconfRqstTDD-IES} }

DCH-Add-RL-ReconfRqstTDD-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-DCH-AddItem-RL-ReconfRqstTDD      CRITICALITY ignore   TYPE DCH-AddItem-RL-ReconfRqstTDD      PRESENCE mandatory  },
  ...
}

DCH-AddItem-RL-ReconfRqstTDD ::= SEQUENCE {
  dCH-ID           DCH-ID,
  rLC-Mode         RLC-Mode,
  ul-CCTrCH-ID    CCTrCH-ID,
  dl-CCTrCH-ID    CCTrCH-ID,
  dCH-CombinationInd DCH-CombinationInd OPTIONAL,
  ul-TransportformatSet TransportFormatSet,
  dl-TransportformatSet TransportFormatSet,
}

```

```

allocationRetentionPriority      AllocationRetentionPriority,
frameHandlingPriority          FrameHandlingPriority,
ul-FP-Mode                     UL-FP-Mode,
toAWS                          ToAWS,
toAWE                          ToAWE,
iE-Extensions                  ProtocolExtensionContainer { {DCH-AddItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-AddItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DCH-DeleteList-RL-ReconfRqstTDD           ::= DCH-IE-ContainerList { {DCH-Delete-RL-ReconfRqstTDD-IEs} }

DCH-Delete-RL-ReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-DCH-DeleteItem-RL-ReconfRqstTDD      CRITICALITY ignore   TYPE DCH-DeleteItem-RL-ReconfRqstTDD      PRESENCE mandatory },
...
}

DCH-DeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
dCH-ID                         DCH-ID,
iE-Extensions                  ProtocolExtensionContainer { {DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs} } OPTIONAL,
...
}

DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

RadioLinkReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION RESPONSE FDD
-- 
-- ****

RadioLinkReconfigurationResponseFDD ::= SEQUENCE {
protocolIEs                    ProtocolIE-Container { {RadioLinkReconfigurationResponseFDD-IEs} },
protocolExtensions             ProtocolExtensionContainer { {RadioLinkReconfigurationResponseFDD-Extensions} }
                                         OPTIONAL,
...
}

RadioLinkReconfigurationResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostics      CRITICALITY ignore   TYPE CriticalityDiagnostics      PRESENCE optional },
...
}

```

```

RadioLinkReconfigurationResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION RESPONSE TDD
-- 

-- ****

RadioLinkReconfigurationResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkReconfigurationResponseTDD-IEs}} ,
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationResponseTDD-Extensions}} } OPTIONAL,
    ...
}

RadioLinkReconfigurationResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostics      CRITICALITY ignore   TYPE CriticalityDiagnostics      PRESENCE optional },
    ...
}

RadioLinkReconfigurationResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- RADIO LINK FAILURE INDICATION
-- 

-- ****

RadioLinkFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkFailureIndication-IEs}} ,
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkFailureIndication-Extensions}} } OPTIONAL,
    ...
}

RadioLinkFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationList-RL-FailureInd   CRITICALITY ignore   TYPE RL-InformationList-RL-FailureInd   PRESENCE mandatory   },
    ...
}

RL-InformationList-RL-FailureInd           ::= RL-IE-ContainerList { {RL-Information-RL-FailureInd-IEs} }

RL-Information-RL-FailureInd-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-FailureInd       CRITICALITY ignore   TYPE RL-Information-RL-FailureInd       PRESENCE mandatory   },
    ...
}

RL-Information-RL-FailureInd ::= SEQUENCE {
    rL-ID             RL-ID,
    ...
}

```

```

cause                                Cause,
iE-Extensions      ProtocolExtensionContainer { {RL-Information-RL-FailureInd-ExtIEs} } OPTIONAL,
...
}

RL-Information-RL-FailureInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****
-- 
-- RADIO LINK RESTORE INDICATION
-- 
-- ****

RadioLinkRestoreIndication ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkRestoreIndication-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkRestoreIndication-Extensions}}           OPTIONAL,
  ...
}

RadioLinkRestoreIndication-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationList-RL-RestoreInd   CRITICALITY ignore   TYPE RL-InformationList-RL-RestoreInd   PRESENCE mandatory   },
  ...
}

RL-InformationList-RL-RestoreInd       ::= RL-IE-ContainerList { {RL-Information-RL-RestoreInd-IEs} }

RL-Information-RL-RestoreInd-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-Information-RL-RestoreInd   CRITICALITY ignore   TYPE RL-Information-RL-RestoreInd   PRESENCE mandatory   },
  ...
}

RL-Information-RL-RestoreInd ::= SEQUENCE {
  rL-ID                RL-ID,
  iE-Extensions        ProtocolExtensionContainer { {RL-Information-RL-RestoreInd-ExtIEs} } OPTIONAL,
  ...
}

RL-Information-RL-RestoreInd-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkRestoreIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- ****
-- DOWNLINK POWER CONTROL REQUEST
-- ****

DL-PowerControlRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{DL-PowerControlRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DL-PowerControlRequest-Extensions}} OPTIONAL,
    ...
}

DL-PowerControlRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-ProcedureScope-DL-PC-Rqst      CRITICALITY ignore   TYPE ProcedureScope-DL-PC-Rqst      PRESENCE mandatory   },
    ...
}

ProcedureScope-DL-PC-Rqst ::= CHOICE {
    allRLs                  DL-Power,
    individualRLs           DL-ReferencePowerInformationList-DL-PC-Rqst,
    ...
}

DL-ReferencePowerInformationList-DL-PC-Rqst      ::= RL-IE-ContainerList { {DL-ReferencePowerInformation-DL-PC-Rqst-IEs} }

DL-ReferencePowerInformation-DL-PC-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-ReferencePowerInformation-DL-PC-Rqst CRITICALITY ignore   TYPE DL-ReferencePowerInformation-DL-PC-Rqst   PRESENCE mandatory   },
    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst ::= SEQUENCE {
    rL-ID                   RL-ID,
    dl-Power                DL-Power,
    iE-Extensions           ProtocolExtensionContainer { {DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs} } OPTIONAL,
    ...
}

DL-ReferencePowerInformation-DL-PC-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-PowerControlRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST FDD
-- ****

```

```

PhysicalChannelReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{PhysicalChannelReconfigurationRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestFDD-Extensions}}                                OPTIONAL,
    ...
}

PhysicalChannelReconfigurationRequestFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-PhyChReconfRqstFDD   CRITICALITY ignore   TYPE RL-Information-PhyChReconfRqstFDD   PRESENCE mandatory   },
    ...
}

RL-Information-PhyChReconfRqstFDD ::= SEQUENCE {
    rL-ID                RL-ID,
    dl-CodeInformations DL-CodeInformationList-PhyChReconfRqstFDD,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DL-CodeInformationList-PhyChReconfRqstFDD      ::= DL-Code-IE-ContainerList { {DL-CodeInformation-PhyChReconfRqstFDD-IEs} }

DL-CodeInformation-PhyChReconfRqstFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-DL-CodeInformation-PhyChReconfRqstFDD   CRITICALITY ignore   TYPE DL-CodeInformation-PhyChReconfRqstFDD   PRESENCE mandatory   },
    ...
}

DL-CodeInformation-PhyChReconfRqstFDD ::= SEQUENCE {
    dl-scramblingCode     DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    iE-Extensions         ProtocolExtensionContainer { {DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs} } OPTIONAL,
    ...
}

DL-CodeInformation-PhyChReconfRqstFDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PhysicalChannelReconfigurationRequestFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- PHYSICAL CHANNEL RECONFIGURATION REQUEST TDD
-- 
-- *****

```

```

PhysicalChannelReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{PhysicalChannelReconfigurationRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{PhysicalChannelReconfigurationRequestTDD-Extensions}} OPTIONAL,
    ...
}

PhysicalChannelReconfigurationRequestTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-PhyChReconfRqstTDD   CRITICALITY ignore  TYPE RL-Information-PhyChReconfRqstTDD   PRESENCE mandatory },
    ...
}

RL-Information-PhyChReconfRqstTDD ::= SEQUENCE {
    rL-ID                RL-ID,
    ul-CCTrCH-Information UL-CCTrCH-InformationList-PhyChReconfRqstTDD,
    dl-CCTrCH-Information DL-CCTrCH-InformationList-PhyChReconfRqstTDD,
    iE-Extensions        ProtocolExtensionContainer { {RL-Information-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

RL-Information-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCH-InformationList-PhyChReconfRqstTDD      ::= CCTrCH-IE-ContainerList { {UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs} }

UL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CCTrCH-ID           CRITICALITY ignore  TYPE CCTrCH-ID           PRESENCE mandatory } |
    { ID id-UL-DPCH-InformationList-PhyChReconfRqstTDD
        CRITICALITY ignore  TYPE UL-DPCH-InformationList-PhyChReconfRqstTDD
        PRESENCE mandatory },
    ...
}

-- List items have same criticality as parent
UL-DPCH-InformationList-PhyChReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
    dPCH-ID              DPCH-ID,
    tDD-ChannelisationCode TDD-ChannelisationCode OPTIONAL,
    burstType            BurstType OPTIONAL,
    midambleShift        MidambleShift OPTIONAL,
    timeSlot              TimeSlot OPTIONAL,
    tDD-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
    repetitionPeriod     RepetitionPeriod OPTIONAL,
    repetitionLength     RepetitionLength OPTIONAL,
    tFCI-Presence       TFCI-Presence OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
    ...
}

UL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}

DL-CCTrCH-InformationList-PhyChReconfRqstTDD      ::= CCTrCH-IE-ContainerList { {DL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs} }

DL-CCTrCH-InformationList-PhyChReconfRqstTDD-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CCTrCH-ID           CRITICALITY ignore TYPE CCTrCH-ID          PRESENCE mandatory } |
  { ID id-DL-DPCH-InformationList-PhyChReconfRqstTDD
    CRITICALITY ignore TYPE DL-DPCH-InformationList-PhyChReconfRqstTDD
    PRESENCE mandatory },
  ...
}

-- List items have same criticality as parent
DL-DPCH-InformationList-PhyChReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF
SEQUENCE {
  DPCH-ID,
  tDD-ChannelisationCode   OPTIONAL,
  burstType                OPTIONAL,
  midambleShift            OPTIONAL,
  timeSlot                 OPTIONAL,
  tDD-PhysicalChannelOffset OPTIONAL,
  repetitionPeriod          OPTIONAL,
  repetitionLength          OPTIONAL,
  tFCI-Presence            OPTIONAL,
  iE-Extensions             ProtocolExtensionContainer { {DL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs} } OPTIONAL,
  ...
}

DL-DPCH-InformationList-PhyChReconfRqstTDD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

PhysicalChannelReconfigurationRequestTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION COMMAND
-- ****

PhysicalChannelReconfigurationCommand ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container { {PhysicalChannelReconfigurationCommand-IEs} },
  protocolExtensions           ProtocolExtensionContainer { {PhysicalChannelReconfigurationCommand-Extensions} }
  OPTIONAL,
  ...
}

PhysicalChannelReconfigurationCommand-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-CFN                   CRITICALITY ignore TYPE CFN               PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
}

```

```

}
}

PhysicalChannelReconfigurationCommand-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
}
-- *****
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
-- *****
PhysicalChannelReconfigurationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{PhysicalChannelReconfigurationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{PhysicalChannelReconfigurationFailure-Extensions}} OPTIONAL,
}
PhysicalChannelReconfigurationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause           CRITICALITY ignore TYPE Cause           PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics   CRITICALITY ignore TYPE CriticalityDiagnostics   PRESENCE optional },
}
PhysicalChannelReconfigurationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
}
-- *****
-- UPLINK SIGNALLING TRANSFER INDICATION
-- *****
UplinkSignallingTransferIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{UplinkSignallingTransferIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{UplinkSignallingTransferIndication-Extensions}} OPTIONAL,
}
UplinkSignallingTransferIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-UC-ID           CRITICALITY ignore TYPE UC-ID           PRESENCE mandatory } |
    { ID id-SAI              CRITICALITY ignore TYPE SAI             PRESENCE mandatory } |
    { ID id-C-RNTI           CRITICALITY ignore TYPE C-RNTI         PRESENCE mandatory } |
    { ID id-S-RNTI           CRITICALITY ignore TYPE S-RNTI         PRESENCE mandatory } |
    { ID id-D-RNTI           CRITICALITY ignore TYPE D-RNTI         PRESENCE optional } |
    { ID id-L3-Information    CRITICALITY ignore TYPE L3-Information  PRESENCE mandatory } |
    { ID id-CN-PS-DomainIdentifier CRITICALITY ignore TYPE CN-PS-DomainIdentifier  PRESENCE optional } |
    { ID id-CN-CS-DomainIdentifier CRITICALITY ignore TYPE CN-CS-DomainIdentifier  PRESENCE optional } |
    { ID id-URA-ID           CRITICALITY ignore TYPE URA-ID         PRESENCE mandatory } |
}

```

```

{ ID id-MultipleURAsIndicator          CRITICALITY ignore  TYPE MultipleURAsIndicator      PRESENCE mandatory } |
{ ID id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
  CRITICALITY ignore  TYPE RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind
  PRESENCE mandatory },
}

-- All RNC-IDs share same criticality!
RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind ::= SEQUENCE (SIZE (1..maxRNCinURA)) OF
SEQUENCE {
  rNC-ID
  iE-Extensions
  ...
}
RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

UplinkSignallingTransferIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- DOWNLINK SIGNALLING TRANSFER REQUEST
-- 
-- *****

DownlinkSignallingTransferRequest ::= SEQUENCE {
  protocolIEs           ProtocolIE-Container   {{DownlinkSignallingTransferRequest-IEs}},
  protocolExtensions    ProtocolExtensionContainer {{DownlinkSignallingTransferRequest-Extensions}}
  ...
}
DownlinkSignallingTransferRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-C-ID           CRITICALITY ignore  TYPE C-ID             PRESENCE mandatory } |
  { ID id-D-RNTI          CRITICALITY ignore  TYPE D-RNTI          PRESENCE mandatory } |
  { ID id-L3-Information   CRITICALITY ignore  TYPE L3-Information  PRESENCE mandatory } |
  { ID id-D-RNTI-ReleaseIndication CRITICALITY ignore  TYPE D-RNTI-ReleaseIndication  PRESENCE mandatory },
  ...
}
DownlinkSignallingTransferRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- RELOCATION COMMIT
-- 

```

```
-- ****
RelocationCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RelocationCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RelocationCommit-Extensions}} OPTIONAL,
    ...
}

RelocationCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI           CRITICALITY ignore TYPE D-RNTI           PRESENCE mandatory } |
    { ID id-RANAP-RelocationInformation   CRITICALITY ignore TYPE RANAP-RelocationInformation   PRESENCE mandatory },
    ...
}

RelocationCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- PAGING REQUEST
-- ****

PagingRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{PagingRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{PagingRequest-Extensions}} OPTIONAL,
    ...
}

PagingRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-PagingArea-PagingRqst      CRITICALITY ignore TYPE PagingArea-PagingRqst      PRESENCE mandatory } |
    { ID id-SRNC-ID                  CRITICALITY ignore TYPE SRNC-ID                  PRESENCE mandatory } |
    { ID id-S-RNTI                  CRITICALITY ignore TYPE S-RNTI                  PRESENCE mandatory } |
    { ID id-DRX-Parameter            CRITICALITY ignore TYPE DRX-Parameter            PRESENCE mandatory },
    ...
}

PagingArea-PagingRqst ::= CHOICE {
    uRA                      URA-ID,
    cell                     C-ID,
    ...
}

PagingRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- DEDICATED MEASUREMENT INITIATION REQUEST
-- ****
```

```

-- ****
DedicatedMeasurementInitiationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{DedicatedMeasurementInitiationRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationRequest-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementInitiationRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID           CRITICALITY ignore TYPE MeasurementID             PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObject-Type-DM-Rqst  CRITICALITY ignore TYPE DedicatedMeasurementObject-Type-DM-Rqst PRESENCE mandatory } |
    { ID id-MeasurementCharacteristics  CRITICALITY ignore TYPE MeasurementCharacteristics  PRESENCE mandatory } |
    { ID id-ReportCharacteristics     CRITICALITY ignore TYPE ReportCharacteristics    PRESENCE mandatory },
    ...
}

DedicatedMeasurementObjectType-DM-Rqst ::= CHOICE {
    rLs                  RL-InformationList-DM-Rqst,
    ...
}

RL-InformationList-DM-Rqst ::= RL-IE-ContainerList { {RL-Information-DM-Rqst-IEs} }

RL-Information-DM-Rqst-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-DM-Rqst   CRITICALITY ignore TYPE RL-InformationItem-DM-Rqst   PRESENCE mandatory },
    ...
}

RL-InformationItem-DM-Rqst ::= SEQUENCE {
    rL-ID                RL-ID,
    dPCH-ID              DPCH-ID   OPTIONAL,
    iE-Extensions        ProtocolExtensionContainer { {RL-InformationItem-DM-Rqst-ExtIEs} } OPTIONAL,
    ...
}

RL-InformationItem-DM-Rqst-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementInitiationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- DEDICATED MEASUREMENT INITIATION RESPONSE
-- ****

DedicatedMeasurementInitiationResponse ::= SEQUENCE {

```

```

protocolIEs                               ProtocolIE-Container      {{DedicatedMeasurementInitiationResponse-IEs}},
protocolExtensions                         ProtocolExtensionContainer {{DedicatedMeasurementInitiationResponse-Extensions}}
                                         OPTIONAL,
...
}

DedicatedMeasurementInitiationResponse-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID          CRITICALITY ignore  TYPE MeasurementID           PRESENCE mandatory } |
  { ID id-DedicatedMeasurementObjectType-DM-Rspns CRITICALITY ignore  TYPE DedicatedMeasurementObjectType-DM-Rspns  PRESENCE mandatory } |
  { ID id-CFN                  CRITICALITY ignore  TYPE CFN                 PRESENCE mandatory } |
  { ID id-CriticalityDiagnostics    CRITICALITY ignore  TYPE CriticalityDiagnostics  PRESENCE optional },
...
}

DedicatedMeasurementObjectType-DM-Rspns ::= CHOICE {
  rLs                      RL-InformationList-DM-Rspns,
  allRL                    AllRL-Information-DM-Rspns,
...
}

RL-InformationList-DM-Rspns             ::= RL-IE-ContainerList { {RL-Information-DM-Rspns-IEs} }

RL-Information-DM-Rspns-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationItem-DM-Rspns   CRITICALITY ignore  TYPE RL-InformationItem-DM-Rspns   PRESENCE mandatory },
...
}

RL-InformationItem-DM-Rspns ::= SEQUENCE {
  rL-ID                   RL-ID,
  dPCH-ID                DPCH-ID           OPTIONAL,
  dedicatedMeasurementValue DedicatedMeasurementValue,
  iE-Extensions           ProtocolExtensionContainer { {RL-InformationItem-DM-Rspns-ExtIEs} } OPTIONAL,
...
}

RL-InformationItem-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

AllRL-Information-DM-Rspns ::= SEQUENCE {
  dedicatedMeasurementValue DedicatedMeasurementValue,
  iE-Extensions           ProtocolExtensionContainer { {AllRL-Information-DM-Rspns-ExtIEs} } OPTIONAL,
...
}

AllRL-Information-DM-Rspns-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

DedicatedMeasurementInitiationResponse-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
...
}

```

```

-- ****
-- DEDICATED MEASUREMENT INITIATION FAILURE
--

DedicatedMeasurementInitiationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{DedicatedMeasurementInitiationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationFailure-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementInitiationFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID           CRITICALITY ignore TYPE MeasurementID           PRESENCE mandatory } |
    { ID id-Cause                  CRITICALITY ignore TYPE Cause                  PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

DedicatedMeasurementInitiationFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- DEDICATED MEASUREMENT REPORT
--

DedicatedMeasurementReport ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{DedicatedMeasurementReport-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementReport-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementReport-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID           CRITICALITY ignore TYPE MeasurementID           PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-DM-Rprt CRITICALITY ignore TYPE DedicatedMeasurementObjectType-DM-Rprt PRESENCE mandatory } |
    { ID id-CFN                     CRITICALITY ignore TYPE CFN                   PRESENCE optional },
    ...
}

DedicatedMeasurementObjectType-DM-Rprt ::= CHOICE {
    rLs                      RL-InformationList-DM-Rprt,
    allRL                    AllRL-Information-DM-Rprt,
    ...
}

RL-InformationList-DM-Rprt      ::= RL-IE-ContainerList { {RL-Information-DM-Rprt-IEs} }

```

```

RL-Information-DM-Rprt-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationItem-DM-Rprt      CRITICALITY ignore  TYPE RL-InformationItem-DM-Rprt      PRESENCE mandatory  },
  ...
}

RL-InformationItem-DM-Rprt ::= SEQUENCE {
  rL-ID                  RL-ID,
  dPCH-ID                DPCH-ID          OPTIONAL,
  dedicatedMeasurementValue DedicatedMeasurementValue,
  iE-Extensions           ProtocolExtensionContainer { {RL-InformationItem-DM-Rprt-ExtIEs} } OPTIONAL,
  ...
}

RL-InformationItem-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

AllRL-Information-DM-Rprt ::= SEQUENCE {
  dedicatedMeasurementValue DedicatedMeasurementValue,
  iE-Extensions           ProtocolExtensionContainer { {AllRL-Information-DM-Rprt-ExtIEs} } OPTIONAL,
  ...
}

AllRL-Information-DM-Rprt-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

DedicatedMeasurementReport-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- DEDICATED MEASUREMENT TERMINATION REQUEST
-- 
-- *****

DedicatedMeasurementTerminationRequest ::= SEQUENCE {
  protocolIEs            ProtocolIE-Container    {{DedicatedMeasurementTerminationRequest-IEs}},
  protocolExtensions     ProtocolExtensionContainer {{DedicatedMeasurementTerminationRequest-Extensions}} OPTIONAL,
  ...
}

DedicatedMeasurementTerminationRequest-IEs RNSAP-PROTOCOL-IES ::= {
  { ID id-MeasurementID      CRITICALITY ignore  TYPE MeasurementID      PRESENCE mandatory  },
  ...
}

DedicatedMeasurementTerminationRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- ****
-- DEDICATED MEASUREMENT FAILURE INDICATION
-- ****

DedicatedMeasurementFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{DedicatedMeasurementFailureIndication-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{DedicatedMeasurementFailureIndication-Extensions}} } OPTIONAL,
    ...
}

DedicatedMeasurementFailureIndication-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID      CRITICALITY ignore TYPE MeasurementID      PRESENCE mandatory } |
    { ID id-Cause              CRITICALITY ignore TYPE Cause            PRESENCE mandatory },
    ...
}

DedicatedMeasurementFailureIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- COMMON TRANSPORT CHANNEL RESOURCES RELEASE REQUEST
-- ****

CommonTransportChannelResourcesReleaseRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{CommonTransportChannelResourcesReleaseRequest-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{CommonTransportChannelResourcesReleaseRequest-Extensions}} } OPTIONAL,
    ...
}

CommonTransportChannelResourcesReleaseRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI          CRITICALITY ignore TYPE D-RNTI           PRESENCE mandatory } |
    { ID id-C-RNTI          CRITICALITY ignore TYPE C-RNTI           PRESENCE optional },
    ...
}

CommonTransportChannelResourcesReleaseRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- COMMON TRANSPORT CHANNEL RESOURCES REQUEST
-- ****

```

```

CommonTransportChannelResourcesRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelResourcesRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesRequest-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelResourcesRequest-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-D-RNTI           CRITICALITY ignore TYPE D-RNTI                  PRESENCE mandatory } |
    { ID id-TransportBearerRequestIndicator CRITICALITY ignore TYPE TransportBearerRequestIndicator PRESENCE mandatory } |
    { ID id-TransportBearerID      CRITICALITY ignore TYPE TransportBearerID     PRESENCE mandatory },
    ...
}

CommonTransportChannelResourcesRequest-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE FDD
-- 
-- *****

CommonTransportChannelResourcesResponseFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelResourcesResponseFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseFDD-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelResourcesResponseFDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI           CRITICALITY ignore TYPE S-RNTI                  PRESENCE mandatory } |
    { ID id-FACH-InfoForS-CCPCH-CoupledToPRACH CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACH PRESENCE mandatory } |
    { ID id-FACH-InfoForOptionals-CCPCH       CRITICALITY ignore TYPE FACH-InfoForOptionals-CCPCH    PRESENCE optional } |
    { ID id-TransportLayerAddress     CRITICALITY ignore TYPE TransportLayerAddress  PRESENCE optional } |
    { ID id-BindingID            CRITICALITY ignore TYPE BindingID             PRESENCE optional } |
    { ID id-CriticalityDiagnostics CRITICALITY ignore TYPE CriticalityDiagnostics PRESENCE optional },
    ...
}

FACH-InfoForS-CCPCH-CoupledToPRACH ::= SEQUENCE {
    priorityIndicatorAndInitialWindowSizees PriorityIndicatorAndInitialWindowSizeList,
    iE-Extensions               ProtocolExtensionContainer {{FACH-InfoForS-CCPCH-CoupledToPRACH-ExtIEs}} OPTIONAL,
    ...
}

FACH-InfoForS-CCPCH-CoupledToPRACH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PriorityIndicatorAndInitialWindowSizeList ::= SEQUENCE (SIZE (1..16)) OF
SEQUENCE {

```

```

fACH-PriorityIndicator,
mAC-c-SDU-Lengths
fACH-InitialWindowSize
iE-Extensions
...
}

PriorityIndicatorAndInitialWindowSizeList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

MAC-c-SDU-LengthList ::= SEQUENCE (SIZE (1..maxNrOfMACcSDU-Length)) OF
SEQUENCE {
    mAC-c-SDU-Length
    iE-Extensions
}
MAC-c-SDU-LengthList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

FACH-InfoForOptionals-CCPCH ::= SEQUENCE {
    fDD-S-CCPCH-Offset
    dl-ScrabblingCode
    fDD-DL-ChannelisationCodeNumber
    dl-TFCs
    secondaryCCPCHs
    pilotBitsUsedIndicator
    multiplexingPosition
    ssDT-Indication
    priorityIndicatorAndInitialWindowSizeList
    fACH-DataFrameSize
    fACH-InitialWindowSize
    iE-Extensions
...
}
FACH-InfoForOptionals-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
...
}

SecondaryCCPCH-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tDD-ChannelisationCode
    timeSlot
    burstType
    midambleShift
    offset
    repetitionPeriod
    repetitionLength
}

```

```

    iE-Extensions
    ProtocolExtensionContainer { {SecondaryCCPCH-List-ExtIEs} } OPTIONAL,
    ...
}

SecondaryCCPCH-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonTransportChannelResourcesResponseFDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- COMMON TRANSPORT CHANNEL RESOURCES RESPONSE TDD
-- *****

CommonTransportChannelResourcesResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelResourcesResponseTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelResourcesResponseTDD-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelResourcesResponseTDD-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI           CRITICALITY ignore TYPE S-RNTI           PRESENCE mandatory } |
    { ID id-FACH-InfoForS-CCPCH-CoupledToPRACH CRITICALITY ignore TYPE FACH-InfoForS-CCPCH-CoupledToPRACH PRESENCE optional } |
    { ID id-FACH-InfoForOptionalGroupS-CCPCH     CRITICALITY ignore TYPE FACH-InfoForOptionalGroupOfS-CCPCH     PRESENCE optional } |
    { ID id-TransportLayerAddress      CRITICALITY ignore TYPE TransportLayerAddress      PRESENCE optional } |
    { ID id-BindingID            CRITICALITY ignore TYPE BindingID            PRESENCE optional } |
    { ID id-CriticalityDiagnostics    CRITICALITY ignore TYPE CriticalityDiagnostics    PRESENCE optional },
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH ::= SEQUENCE {
    dl-TFCS                  TransportFormatCombinationSet,
    secondaryCCPCHs          SecondaryCCPCH-TDD-List,
    iE-Extensions            ProtocolExtensionContainer { {FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs} } OPTIONAL,
    ...
}

FACH-InfoForOptionalGroupOfS-CCPCH-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

SecondaryCCPCH-TDD-List ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF
SEQUENCE {
    tDD-ChannelisationCode      TDD-ChannelisationCode,
    timeSlot                   TimeSlot,
    burstType                  BurstType,
    midambleShift              MidambleShift,
}

```

```

    tDD-PhysicalChannelOffset      TDD-PhysicalChannelOffset,
    repetitionPeriod             RepetitionPeriod,
    repetitionLength              RepetitionLength,
    SSDT-Indication               SSDT-Indication,
    priorityIndicatorAndInitialWindowSizeList PriorityIndicatorAndInitialWindowSizeList,
    iE-Extensions                  ProtocolExtensionContainer { {SecondaryCCPCH-TDD-List-ExtIEs} } OPTIONAL,
    ...
}

SecondaryCCPCH-TDD-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonTransportChannelResourcesResponseTDD-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- COMMON TRANSPORT CHANNEL RESOURCES FAILURE
-- 
-- *****

CommonTransportChannelResourcesFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{CommonTransportChannelResourcesFailure-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{CommonTransportChannelResourcesFailure-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelResourcesFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-S-RNTI           CRITICALITY ignore TYPE S-RNTI           PRESENCE mandatory } |
    { ID id-Cause            CRITICALITY ignore TYPE Cause            PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics   CRITICALITY ignore TYPE CriticalityDiagnostics   PRESENCE optional },
    ...
}

CommonTransportChannelResourcesFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- COMPRESSED MODE PREPARE
-- 
-- *****

CompressedModePrepare ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{CompressedModePrepare-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{CompressedModePrepare-Extensions}} OPTIONAL,
    ...
}

```

```

CompressedModePrepare-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-TGP1           CRITICALITY ignore  TYPE GapPeriod          PRESENCE mandatory } |
  { ID id-TGP2           CRITICALITY ignore  TYPE GapPeriod          PRESENCE optional  } |
  { ID id-TGL            CRITICALITY ignore  TYPE TGL              PRESENCE mandatory } |
  { ID id-TGD            CRITICALITY ignore  TYPE TGD              PRESENCE mandatory } |
  { ID id-PD             CRITICALITY ignore  TYPE PD               PRESENCE mandatory } |
  { ID id-UL-DL-CompressedModeSelection   CRITICALITY ignore  TYPE UL-DL-CompressedModeSelection  PRESENCE mandatory } |
  { ID id-CompressedModeMethod          CRITICALITY ignore  TYPE CompressedModeMethod        PRESENCE mandatory } |
  { ID id-GapPositionMode            CRITICALITY ignore  TYPE GapPositionMode       PRESENCE mandatory } |
  { ID id-SN                CRITICALITY ignore  TYPE SN               PRESENCE conditional      } |
-- This IE is present only if "GapPositionMode" equals to "flexible" --
  { ID id-DL-FrameType          CRITICALITY ignore  TYPE DL-FrameType         PRESENCE mandatory } |
  { ID id-ScramblingCodeChange    CRITICALITY ignore  TYPE ScramblingCodeChange  PRESENCE conditional      } |
-- This IE is present only if "CompressedModeMethod" equals to "SF/2" --
  { ID id-PowerControlMode      CRITICALITY ignore  TYPE PowerControlMode     PRESENCE mandatory } |
  { ID id-PowerResumeMode        CRITICALITY ignore  TYPE PowerResumeMode      PRESENCE mandatory } |
  { ID id-UL-DeltaEbNo          CRITICALITY ignore  TYPE UL-EbNo            PRESENCE mandatory } |
  { ID id-UL-DeltaEbNoAfter     CRITICALITY ignore  TYPE UL-EbNo            PRESENCE mandatory },

}

CompressedModePrepare-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- COMRESSED MODE READY
-- 

-- *****

CompressedModeReady ::= SEQUENCE {
  protocolIES          ProtocolIE-Container    {{CompressedModeReady-IES}},           OPTIONAL,
  protocolExtensions   ProtocolExtensionContainer {{CompressedModeReady-Extensions}}
  ...
}

CompressedModeReady-IES RNSAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostics   CRITICALITY ignore  TYPE CriticalityDiagnostics  PRESENCE optional },
  ...
}

CompressedModeReady-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- COMRESSED MODE FAILURE
-- 

```

```
-- ****
CompressedModeFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CompressedModeFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeFailure-Extensions}} OPTIONAL,
    ...
}

CompressedModeFailure-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause           CRITICALITY ignore  TYPE Cause                  PRESENCE mandatory } |
    { ID id-CriticalityDiagnostics   CRITICALITY ignore  TYPE CriticalityDiagnostics  PRESENCE optional },
    ...
}

CompressedModeFailure-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- COMRESSED MODE COMMIT
-- 
-- ****

CompressedModeCommit ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CompressedModeCommit-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCommit-Extensions}} OPTIONAL,
    ...
}

CompressedModeCommit-IEs RNSAP-PROTOCOL-IES ::= {
    { ID id-CFN            CRITICALITY ignore  TYPE CFN                  PRESENCE mandatory },
    ...
}

CompressedModeCommit-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- COMRESSED MODE CANCEL
-- 
-- ****

CompressedModeCancel ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CompressedModeCancel-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCancel-Extensions}} OPTIONAL,
    ...
}
```

```

CompressedModeCancel-IES RNSAP-PROTOCOL-IES ::= {
    ...
}

CompressedModeCancel-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- ERROR INDICATION
-- 
-- ****

ErrorIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{ErrorIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{ErrorIndication-Extensions}} OPTIONAL,
    ...
}

ErrorIndication-IES RNSAP-PROTOCOL-IES ::= {
    { ID id-Cause           CRITICALITY ignore TYPE Cause             PRESENCE conditional
        -- At least either of Cause IE or Criticality IE shall be present --
        { ID id-CriticalityDiagnostics   CRITICALITY ignore TYPE CriticalityDiagnostics   PRESENCE conditional
            -- At least either of Cause IE or Criticality IE shall be present --
            },
        ...
    }
}

ErrorIndication-Extensions RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- PRIVATE MESSAGE
-- 
-- ****

PrivateMessage ::= SEQUENCE {
    privateExtensions     PrivateExtensionContainer {{PrivateExtensions}},
    ...
}

PrivateExtensions RNSAP-PRIVATE-EXTENSION ::= {
    ...
}

END

```

9.3.4 Information Element Definitions

```
-- ****
-- Information Element Definitions
--
-- ****

RNSAP-IEs -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    maxNrOfErrors,
    maxRateMatching,
    maxNrOfTFCs,
    maxNrOfTFs,
    maxTTI-Count
FROM RNSAP-Constants

    Criticality,
    ProcedureCode,
    ProtocolIE-ID,
    TransactionID,
    TriggeringMessage
FROM RNSAP-CommonDataTypes

    ProtocolExtensionContainer{},
    RNSAP-PROTOCOL-EXTENSION
FROM RNSAP-Containers;

-- A

AllocationRetentionPriority      ::= FrameHandlingPriority

AllowedQueuingTime            ::= INTEGER (0..60)
-- seconds

-- B

-- ** NOTE: Size in tabular 1..4,... **
BindingID                    ::= OCTET STRING (SIZE (1..MAX))

BLER                         ::= INTEGER (-63..0)
-- Step 0.1 (Range -6.3..0). It is the Log10 of the BLER

BurstType ::= ENUMERATED {
    type1 (1),
    type2 (2)
```

```

}

-- C

Cause ::= CHOICE {
    radioNetwork      CauseRadioNetwork,
    transmissionNetwork CauseTransmissionNetwork,
    protocol          CauseProtocol,
    misc              CauseMisc,
    ...
}

CauseMisc ::= ENUMERATED {
    control-processing-overload,
    hardware-failure,
    om-intervention,
    not-enough-user-plane-processing-resources,
    unspecified,
    ...
}

CauseProtocol ::= ENUMERATED {
    transaction-not-allowed,
    transfer-syntax-error,
    abstract-syntax-error-reject,
    abstract-syntax-error-ignore-and-notify,
    unspecified,
    ...
}

CauseRadioNetwork ::= ENUMERATED {
    unknown-C-ID,
    cell-not-available,
    power-level-not-supported,
    ul-scrambling-code-already-in-use,
    dl-radio-resources-not-available,
    ul-radio-resources-not-available,
    measurement-not-supported-for-the-object,
    macrodiversity-combining-not-possible,
    reconfiguration-not-allowed,
    Synchronisation-failure,
    unspecified,
    ...
}

CauseTransmissionNetwork ::= ENUMERATED {
    transmission-link-failure,
    transmission-port-not-available,
    unspecified,
    ...
}

```

```

C-ID ::= INTEGER (0..65535)

CCTrCH-ID ::= INTEGER (0..15)

CellParameterID ::= INTEGER (0..127)

CFN ::= INTEGER (0..255)

ChannelCodingType ::= ENUMERATED {
    no-coding,
    convolutional-coding,
    turbo-coding--,
--    ...
}

-- ** TODO **
ChipOffset ::= INTEGER

CodingRate ::= ENUMERATED {
    half,
    third--,
--    ...
}

CompressedModeMethod ::= ENUMERATED {
    none,
    puncturing,
    sF2,
    gating
}

CPICH-EcIo ::= INTEGER

CRC-Size ::= INTEGER (0 | 8 | 12 | 16 | 24)

CriticalityDiagnostics ::= SEQUENCE {
    procedureCode      ProcedureCode      OPTIONAL,
    triggeringMessage TriggeringMessage  OPTIONAL,
    criticalityResponse Criticality       OPTIONAL,
    transactionID     TransactionID    OPTIONAL,
    iEsCriticalityResponses CriticalityDiagnostics-IE-List OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {CriticalityDiagnostics-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF

```

```

SEQUENCE {
    criticalityResponse      Criticality,
    iE-ID                   ProtocolIE-ID,
    iE-Extensions           ProtocolExtensionContainer { {CriticalityDiagnostics-IE-List-ExtIEs} } OPTIONAL,
    ...
}

CriticalityDiagnostics-IE-List-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
CTFC                      ::= INTEGER
-- See formula (must be resolved)

CN-CS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID            PLMN-ID,
    iE-Extensions       ProtocolExtensionContainer { {CN-CS-DomainIdentifier-ExtIEs} } OPTIONAL,
    LAC                LAC
}
CN-CS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

CN-PS-DomainIdentifier ::= SEQUENCE {
    pLMN-ID            PLMN-ID,
    LAC                LAC,
    iE-Extensions       ProtocolExtensionContainer { {CN-PS-DomainIdentifier-ExtIEs} } OPTIONAL,
    rAC                RAC
}
CN-PS-DomainIdentifier-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- **TODO**
CPICH-Power               ::= INTEGER
C-RNTI                    ::= INTEGER (0..65535)
-- D

DCH-CombinationInd        ::= INTEGER (0..255)
DCH-ID                     ::= INTEGER (0..255)

DedicatedMeasurementObjectType ::= ENUMERATED {
    rl,
    all-rl,
    ...
}

```

```

}

-- ** OR:
-- DedicatedMeasurementObjectType ::= INTEGER {
--   rL(0),
--   allRL(1)
-- } (0..255)
-- **

DedicatedMeasurementType ::= ENUMERATED {
  sir,
  sir-error,
  transmitted-code-power,
  rSCP,
  ...
}
-- timeslotTSCP is used by TDD only

-- ** OR:
-- DedicatedMeasurementType ::= INTEGER {
--   sIR(0),
--   sIR-Error(1),
--   transmittedCodePower(2),
--   rSCP(3)
-- } (0..255)
-- **

-- ** NOTE: Extensibility added **
-- **TODO**

DedicatedMeasurementValue ::= SEQUENCE {
  sIR-Value          ScaledSIR-Value      OPTIONAL,
  sIR-ErrorValue     ScaledSIR-ErrorValue  OPTIONAL,
  transmittedCodePowerValue ScaledTransmittedCodePowerValue OPTIONAL, -- Relative to CPICH
  rSCP                TBD                 OPTIONAL, -- TDD only
  iE-Extensions       ProtocolExtensionContainer { {DedicatedMeasurementValue-ExtIEs} } OPTIONAL,
  ...
}

DedicatedMeasurementValue-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ** TODO **
DiversityControlField ::= INTEGER

-- ** TODO **
DiversityMode ::= INTEGER

-- ** TODO **
DL-ChannelisationCode ::= INTEGER

```

```

-- ** TODO **
DL-DPCCH-SlotFormat      ::= INTEGER

-- ** TODO **
DL-DPCH-SlotNumber       ::= INTEGER

DL-EbNo                  ::= ScaledUL-EbNo

DL-EbNoTarget             ::= ScaledUL-EbNo

-- ** TODO **
DL-Power                 ::= INTEGER

D-RNTI                   ::= INTEGER (0..1048576)
-- ** OR:
-- D-RNTI                  ::= BIT STRING (SIZE (20))
-- **

D-RNTI-ReleaseIndication ::= ENUMERATED {
    not-release-D-RNTI,
    release-D-RNTI
}

-- ** TODO **
DL-ScramblingCode         ::= INTEGER

DL-FrameType   ::= ENUMERATED {
    typeA,
    typeB,
    ...
}

DPCH-ID          ::= INTEGER (0..239)

-- **TODO**
DRX-Parameter    ::= TBD

-- **TODO**
DSCH-TransportFormatCombinationSet ::= INTEGER

-- **TODO**
DSCH-TFS          ::= INTEGER

-- **TODO**
D-FieldLength     ::= INTEGER

-- E

EventA ::= SEQUENCE {
    measurementThreshold      MeasurementThreshold,
    measurementHysteresisTime ScaledMeasurementHysteresisTime      OPTIONAL,
}

```

```

iE-Extensions          ProtocolExtensionContainer { {EventA-ExtIEs} } OPTIONAL,
...
}

EventA-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

EventB ::= SEQUENCE {
  measurementThreshold      MeasurementThreshold,
  measurementHysteresisTime   ScaledMeasurementHysteresisTime   OPTIONAL,
  iE-Extensions          ProtocolExtensionContainer { {EventB-ExtIEs} } OPTIONAL,
  ...
}

EventC ::= SEQUENCE {
  measurementIncreaseThreshold   MeasurementIncreaseThreshold,
  measurementChangeTime        ScaledMeasurementChangeTime,
  ...
}

EventB-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

EventD ::= SEQUENCE {
  measurementDecreaseThreshold   MeasurementDecreaseThreshold,
  measurementChangeTime        ScaledMeasurementChangeTime,
  iE-Extensions          ProtocolExtensionContainer { {EventD-ExtIEs} } OPTIONAL,
  ...
}

EventD-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

EventE ::= SEQUENCE {
  measurementThreshold1      MeasurementThreshold,
  measurementThreshold2      MeasurementThreshold          OPTIONAL,
  measurementHysteresisTime   ScaledMeasurementHysteresisTime   OPTIONAL,
  reportPeriodicity        ReportPeriodicity          OPTIONAL,
  iE-Extensions          ProtocolExtensionContainer { {EventE-ExtIEs} } OPTIONAL,
  ...
}

EventE-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

EventF ::= SEQUENCE {
  measurementThreshold1      MeasurementThreshold,

```

```

measurementThreshold2      MeasurementThreshold          OPTIONAL,
measurementHysteresisTime ScaledMeasurementHysteresisTime    OPTIONAL,
reportPeriodicity        ReportPeriodicity           OPTIONAL,
iE-Extensions            ProtocolExtensionContainer { {EventF-ExtIES} } OPTIONAL,
...
}

EventF-ExtIES RNSAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- F

FACH-DataFrameSize       ::= INTEGER (1..5000)
-- Size of data frame in number of bits

FACH-InitialWindowSize   ::= INTEGER { unlimited(255) } (0..255)
-- Number of FACH data frames.
-- 255 = Unlimited number of FACH data frames

-- ** TODO **
FACH-InfoForOptionalsS-CCPCH   ::= INTEGER

-- ** TODO **
FACH-InfoForS-CCPCH-CoupledToPRACH  ::= INTEGER

-- ** TODO **
FDD-DL-ChannelisationCodeNumber  ::= INTEGER

-- ** TODO **
FDD-FL-ChannelisationCodeNumber  ::= INTEGER

-- ** TODO **
FDD-S-CCPCH-Offset           ::= INTEGER

FACH-PriorityIndicator      ::= INTEGER { lowest(0), highest(15) } (0..15)
FrameHandlingPriority        ::= INTEGER { lowest(0), highest(15) } (0..15)

FrameOffset                 ::= INTEGER (0..255)
-- Frames

-- G

GapPositionMode ::= ENUMERATED {
  fixed,
  flexible
}

GapPeriod                  ::= INTEGER (0..255)

```

```

-- H
-- I

-- **TODO**
InitialDL-TX-Power      ::= INTEGER

-- J
-- K
-- L

LAC                      ::= OCTET STRING (SIZE (2)) --(EXCEPT ('0000'H|'FFFF'H))

-- ** TODO **
L3-Information          ::= INTEGER

-- M

-- ** TODO **
MaxNrOfUL-DPCHs         ::= INTEGER

MAC-c-SDU-Length        ::= INTEGER (1..5000)

-- **TODO**
MACd-MACsh-TransportFormatSet ::= INTEGER

-- **NOTE: extensibility**
MeasurementCharacteristics ::= SEQUENCE {
    measurementFrequency   TBD,
    averagingDuration     TBD,
    iE-Extensions         ProtocolExtensionContainer { {MeasurementCharacteristics-ExtIEs} } OPTIONAL,
    ...
}

MeasurementCharacteristics-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
MeanBitRate               ::= INTEGER

MeasurementID             ::= INTEGER (0..1048576)
-- **OR:
-- MeasurementID          ::= BIT STRING (SIZE (20))
-- **

MultipleURAsIndicator ::= ENUMERATED {
    single-URA-exists,
    multiple-URAs-exist
}

-- ** TODO **

```

```

MCC-Digit           ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

-- ** TODO **
MNC-Digit           ::= OCTET STRING (SIZE (3))
-- FFS
-- Reference: 24.008

ScaledMeasurementChangeTime    ::= INTEGER (1..1000)
-- MeasurementChangeTime = ScaledMeasurementChangeTime * 10
-- Unis is ms

-- ** TODO **
MeasurementDecreaseThreshold  ::= INTEGER

ScaledMeasurementHysteresisTime ::= INTEGER (1..1000)
-- MeasurementHysteresisTime = ScaledMeasurementHysteresisTime * 10
-- Unit is ms

-- ** TODO **
MeasurementIncreaseThreshold  ::= INTEGER

-- ** TODO **
MeasurementThreshold          ::= INTEGER

MidambleShift           ::= INTEGER (0..15)

MinUL-ChannelisationCodeLength ::= INTEGER

MultiplexingPosition ::= ENUMERATED {
  fixed,
  flexible
}

-- N

NrOfTransportBlocks       ::= INTEGER (0..4095)

-- O

Offset                  ::= INTEGER (0..63)

-- P

PD                      ::= INTEGER (0..2047, ...)

PayloadCRC-PresenceIndicator ::= ENUMERATED {
  crc-not-included,
  crc-included--,
}
-- ...

```

```

}

PSCH-TimeSlot           ::= INTEGER (0..6)

Periodic ::= SEQUENCE {
    reportPeriodicity      ReportPeriodicity,
    iE-Extensions          ProtocolExtensionContainer { {Periodic-ExtIEs} } OPTIONAL,
    ...
}

Periodic-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
PilotBitsUsedIndicator   ::= INTEGER

-- ** TODO **
PLMN-ID ::= SEQUENCE {
    mCC-digit              MCC-Digit,
    iE-Extensions          ProtocolExtensionContainer { {PLMN-ID-ExtIEs} } OPTIONAL,
    mNC-digit              MNC-Digit
}
-- FFS

PLMN-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

PowerControlMode ::= ENUMERATED {
    v0,
    v1,
    ...
}

PowerOffset             ::= INTEGER (0..24)

PowerResumeMode ::= ENUMERATED {
    v0,
    v1,
    ...
}

-- ** TODO **
PrimaryCPICH-Power      ::= INTEGER

PrimaryCPICH-EcNo        ::= INTEGER (-30..30)

-- ** TODO **
PrimaryCCPCH-RSCP       ::= INTEGER

```

```

PrimaryScramblingCode      ::= ScramblingCode

PropagationDelay          ::= INTEGER (0..255)

SyncCase ::= ENUMERATED {
    case1,
    case2,
    case3--,
-- ...
}

-- ** TODO **
PSCH-CCPCH-TimeSlot       ::= TimeSlot

-- ** TODO **
PSCH-PCCPCH-TimeSlot      ::= TimeSlot

-- ** TODO **
P-CPICH-Power             ::= INTEGER

PunctureLimit              ::= INTEGER (0..100)
-- Unit is %

-- Q
-- R

-- ** TODO **
RAC                         ::= INTEGER

-- ** TODO **
-- OCTET STRING?
RANAP-RelocationInformation ::= BIT STRING

RateMatchingAttribute       ::= INTEGER (1..maxRateMatching)

RepetitionLength           ::= INTEGER (1..63)

RepetitionPeriod ::= ENUMERATED {
    v1,
    v2,
    v4,
    v8,
    v16,
    v32,
    v64--,
-- ...
}

-- This is changed from the tabular format because it seems that
-- this is what is wanted.
ReportCharacteristics ::= CHOICE {

```

```

onDemand           NULL,
periodic          Periodic,
eventA            EventA,
eventB            EventB,
eventC            EventC,
eventD            EventD,
eventE            EventE,
eventF            EventF--,
-- ...
}

-- Changed
ReportPeriodicity ::= CHOICE {
    msec      INTEGER (1..1000),
    min       INTEGER (1..60)
}

RLC-Mode ::= ENUMERATED {
    acknowledged-mode,
    unacknowledged-mode,
    transparent-mode
}

RL-ID             ::= INTEGER (0..31)

RNC-ID            ::= INTEGER (0..4095)

-- S

-- Changed BIT STRING -> OCTET STRING
SAC               ::= OCTET STRING (SIZE (2))

SAI ::= SEQUENCE {
    pLMN-ID        PLMN-ID,
    lAC            LAC,
    sAC            SAC,
    iE-Extensions  ProtocolExtensionContainer { {SAI-ExtIEs} } OPTIONAL
}

SAI-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ** TODO **
ScramblingCode     ::= INTEGER

ScramblingCodeChange ::= ENUMERATED {
    no-code-change,
    code-change
}

```

```

ScaledSIR-ErrorValue      ::= INTEGER (-100..100)
-- ScaledSIR-ErrorValue = SIR-ErrorValue * 10
-- If SIR-ErrorValue <= -10 ScaledSIR-ErrorValue shall be set to -100
-- If SIR-ErrorValue >= 10 ScaledSIR-ErrorValue shall be set to 100
-- SIR-ErrorValue step 0.1 dB

ScaledSIR-Value          ::= INTEGER (-100..200)
-- ScaledSIR-Value = SIR-Value * 10
-- SIR-Value step 0.1 dB

ScaledTransmittedCodePowerValue ::= INTEGER (-350..150)
-- ScaledTransmittedCodePowerValue = TransmittedCodePowerValue * 10
-- TransmittedCodePowerValue step 0.1 dB

-- ** TODO **
SharedChannelType        ::= INTEGER

-- ** TODO **
SecondaryCCPCH-SlotFormat ::= INTEGER

SN                      ::= TimeSlot

SpreadingFactorOfChannelisationCode ::= ENUMERATED {
    v256,
    v128,
    v64,
    v32,
    v16,
    v8,
    v4,
    v2,
    v1
}

-- Changed
S-FieldLength           ::= INTEGER (1..2)

S-RNTI                 ::= INTEGER (0..1048575)
-- From 0 to 2^20-1

-- ** TODO **
SRNC-ID                ::= INTEGER

SSDT-CellID             ::= ENUMERATED {
    a,
    b,
    c,
    d,
    e,
    f,
    g,
}

```

```

    h
}

SSDT-CellID-Length ::= ENUMERATED {
    short,
    medium,
    long
}

SSDT-Indication ::= ENUMERATED {
    SSDT-active-in-the-UE,
    SSDT-not-active-in-the-UE
}

SSDT-SupportIndicator ::= ENUMERATED {
    SSDT-not-supported,
    SSDT-supported
}

-- T

-- ** TODO **
TBD ::= NULL
-- Remove this type

TDD-ChannelisationCode ::= INTEGER (1..31)

TDD-PhysicalChannelOffset ::= INTEGER (0..63)

TFCI-Coding ::= ENUMERATED {
    v4,
    v8,
    v16,
    v32
}

TFCI-Presence ::= ENUMERATED {
    not-present,
    present
}

TFCI-SignallingMode ::= ENUMERATED {
    normal,
    split
}

-- ** TODO **
TimeReference ::= INTEGER
-- TimeReference ::= INTEGER (0..255)

TimeSlot ::= INTEGER (0..14)

```

```

ToAWE          ::= INTEGER (0..2559)

ToAWS         ::= INTEGER (0..1279)

TPC-StepSize ::= ENUMERATED {
    half,
    one
}

TGD           ::= INTEGER (0..255)

TGL           ::= INTEGER (3| 4| 7| 10| 14)

TransmissionTimeInterval ::= ENUMERATED {
    msec-10,
    msec-20,
    msec-40,
    msec-80--,
-- ...
}

TransportBearerID      ::= INTEGER (0..4095)

-- Compare title and IE name in table TransportBearerRequestIndicator vs.
-- FACH-PriorityIndicator
TransportBearerRequestIndicator ::= INTEGER { lowest (0), highest (15) } (0..15)

TransportBlockSize      ::= INTEGER (1..5000)
-- Unit is bits

TransportFormatCombinationSet ::= SEQUENCE (SIZE (1..maxNrOfTFCs)) OF
    SEQUENCE {
        cTFC          CTFC,
        iE-Extensions ProtocolExtensionContainer { {TransportFormatCombinationSet-ExtIEs} } OPTIONAL,
        ...
    }

TransportFormatCombinationSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet ::= SEQUENCE {
    dynamicParts      TransportFormatSet-DynamicPartList,
    semi-staticPart   TransportFormatSet-Semi-staticPart,
    iE-Extensions     ProtocolExtensionContainer { {TransportFormatSet-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}

TransportFormatSet-DynamicPartList ::= SEQUENCE (SIZE (1..maxNrOfTFs)) OF
SEQUENCE {
    nrOfTransportBlocks      NrOfTransportBlocks,
    transportBlockSize       TransportBlockSize      OPTIONAL
    -- This IE is only present if nrOfTransportBlocks is greater than 0 --,
    mode                    TransportFormatSet-ModeDP,
    iE-Extensions           ProtocolExtensionContainer { {TransportFormatSet-DynamicPartList-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-DynamicPartList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-ModeDP ::= CHOICE {
    tdd                      TransmissionTimeIntervalList,
    -- This IE is mandatory if not defined as semistatic parameter, otherwise it is absent --
    ...
}

TransmissionTimeIntervalList ::= SEQUENCE (SIZE (1..maxTTI-Count)) OF
SEQUENCE {
    transmissionTimeInterval   TransmissionTimeInterval,
    iE-Extensions             ProtocolExtensionContainer { {TransmissionTimeIntervalList-ExtIEs} } OPTIONAL,
    ...
}

TransmissionTimeIntervalList-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-Semi-staticPart ::= SEQUENCE {
    transmissionTime          TransmissionTimeInterval,
    channelCoding              ChannelCodingType,
    codingRate                 CodingRate            OPTIONAL
    -- This IE is only present if channelCoding is 'convolutional' or 'turbo' --,
    rateMatcingAttribute      RateMatchingAttribute,
    CRC-Size                  CRC-Size,
    mode                      TransportFormatSet-ModeSSP      OPTIONAL,
    iE-Extensions             ProtocolExtensionContainer { {TransportFormatSet-Semi-staticPart-ExtIEs} } OPTIONAL,
    ...
}

TransportFormatSet-Semi-staticPart-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

TransportFormatSet-ModeSSP ::= CHOICE {
    tdd                      SecondInterleavingMode,

```

```

}

SecondInterleavingMode ::= ENUMERATED {
    frame-related,
    timeslot-related,
    ...
}

-- TransportLayerAddress          ::= BIT STRING (1..160, ...)
TransportLayerAddress          ::= OCTET STRING (SIZE (1..20, ...))

-- U

UARFCN                         ::= INTEGER (0..698, ...)

UL-DL-CompressedModeSelection ::= ENUMERATED {
    ul-only,
    dl-only,
    both
}

UL-DeltaEbNo                    ::= INTEGER (-60..100)

UL-DeltaEbNoAfter               ::= INTEGER (-60..100)

-- ** TODO **
UL-EbNo                         ::= INTEGER

-- ** TODO **
UL-EbNoTarget                   ::= INTEGER

UC-ID ::= SEQUENCE {
    rNC-ID           RNC-ID,
    c-ID             C-ID,
    iE-Extensions    ProtocolExtensionContainer { {UC-ID-ExtIEs} } OPTIONAL,
    ...
}

UC-ID-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCCH-SlotFormat            ::= INTEGER (0..5)

ScaledUL-EbNo                   ::= INTEGER (0..255)
-- Ul-EbNo = ScaledUL-EbNo / 10

UL-FP-Mode ::= ENUMERATED {
    normal,
    silent--,
}

```

```

-- ...
}

ScaledUL-InterferenceLevel ::= INTEGER (-1280..-600)
-- UL-InterferenceLevel = UL-InterferenceLevel / 10

-- Relation to the ScramblingCode??
UL-ScramblingCode ::= SEQUENCE {
    ul-ScramblingCodeNumber      UL-ScramblingCodeNumber,
    ul-ScramblingCodeLength      UL-ScramblingCodeLength,
    iE-Extensions                ProtocolExtensionContainer { {UL-ScramblingCode-ExtIEs} } OPTIONAL
}
UL-ScramblingCode-ExtIEs RNSAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-ScramblingCodeLength ::= ENUMERATED {
    short,
    long
}
UL-ScramblingCodeNumber ::= INTEGER (0..16777215)

URA-ID ::= INTEGER (0..65535)

-- V
-- W
-- X
-- Y
-- Z

END

```

9.3.5 Common Definitions

```

-- ****
-- 
-- Common definitions
-- 
-- ****

RNSAP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

Criticality ::= ENUMERATED { reject, ignore, notify }

Presence ::= ENUMERATED { optional, conditional, mandatory }

```

```

PrivateExtensionID ::= CHOICE {
    local           INTEGER (0..65535),
    global          OBJECT IDENTIFIER
}

ProcedureCode      ::= INTEGER (0..255)

ProcedureID ::= SEQUENCE {
    procedureCode      ProcedureCode,
    ddMode            ENUMERATED { tdd, fdd, common }
}

ProtocolExtensionID ::= INTEGER (0..65535)

ProtocolIE-ID      ::= INTEGER (0..65535)

TransactionID      ::= INTEGER (0..65535)

TriggeringMessage   ::= ENUMERATED { initiating-message, successful-outcome, unsuccessful-outcome, outcome }

END

```

9.3.6 Constant Definitions

```

-- *****
-- 
-- Constant definitions
-- 
-- *****

RNSAP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS :=

BEGIN

-- *****
-- 
-- Elementary Procedures
-- 
-- *****

id-commonTransportChannelResourcesInitiationFDD           INTEGER ::= 0
id-commonTransportChannelResourcesInitiationTDD          INTEGER ::= 1
id-commonTransportChannelResourcesRelease                INTEGER ::= 2
id-compressedModeCancellationFDD                      INTEGER ::= 3
id-compressedModeCommitFDD                           INTEGER ::= 4
id-compressedModePrepareFDD                         INTEGER ::= 5
id-downlinkPowerControl                            INTEGER ::= 6
id-downlinkSignallingTransfer                     INTEGER ::= 7
id-errorIndication                                 INTEGER ::= 8

```

```

id-measurementFailure           INTEGER ::= 9
id-measurementInitiation       INTEGER ::= 10
id-measurementReporting        INTEGER ::= 11
id-measurementTermination      INTEGER ::= 12
id-pagingRequest               INTEGER ::= 13
id-physicalChannelReconfiguration INTEGER ::= 14
id-privateMessage              INTEGER ::= 15
id-radioLinkAddition           INTEGER ::= 16
id-radioLinkDeletion            INTEGER ::= 17
id-radioLinkFailure             INTEGER ::= 18
id-radioLinkRestoration         INTEGER ::= 19
id-radioLinkSetup                INTEGER ::= 20
id-srnsRelocationCommit        INTEGER ::= 21
id-synchronisedRadioLinkReconfigurationCancellation INTEGER ::= 22
id-synchronisedRadioLinkReconfigurationCommit          INTEGER ::= 23
id-synchronisedRadioLinkReconfigurationPrepare          INTEGER ::= 24
id-unSynchronisedRadioLinkReconfiguration                INTEGER ::= 25
id-uplinkSignallingTransfer     INTEGER ::= 26

-- ****
-- 
-- Extension constants
-- 
-- ****

maxPrivateExtensions           INTEGER ::= 65535
maxProtocolExtensions          INTEGER ::= 65535
maxProtocolsIES                INTEGER ::= 65535

-- ****
-- 
-- Lists
-- 
-- ****

maxRateMatching                 INTEGER ::= 10
maxNrOfTFCs                     INTEGER ::= 10
maxNrOfTFs                      INTEGER ::= 10

maxNoOfDL-Codes                 INTEGER ::= 10
maxNrOfCCTrCHs                  INTEGER ::= 10
maxNrOfDCHs                      INTEGER ::= 10
maxNrOfDL-Codes                  INTEGER ::= 10
maxNrOfDPCHs                     INTEGER ::= 10
maxNrOfErrors                     INTEGER ::= 10
maxNrOfFACH-FD-Size              INTEGER ::= 10
maxNrOfFDD-Neighbours             INTEGER ::= 10
maxNrOfMACcSDU-Length             INTEGER ::= 10
maxNrOfTDD-Neighbours              INTEGER ::= 10
maxNrOfRLs                        INTEGER ::= 10
maxNrOfSCCPCHs                   INTEGER ::= 10

```

```

maxRNCinURA           INTEGER ::= 10
maxTTI-Count          INTEGER ::= 10

-- ****
-- IEs
--
-- ****

id-AllowedQueueingTime      INTEGER ::= 0
id-BindingID                INTEGER ::= 1
id-C-ID                      INTEGER ::= 2
id-C-RNTI                   INTEGER ::= 3
id-CCTrCH-ID                 INTEGER ::= 4
id-CFN                       INTEGER ::= 5
id-CN-CS-DomainIdentifier   INTEGER ::= 6
id-CN-PS-DomainIdentifier   INTEGER ::= 7
id-Cause                     INTEGER ::= 8
id-CompressedModeMethod     INTEGER ::= 9
id-D-RNTI                    INTEGER ::= 10
id-D-RNTI-ReleaseIndication  INTEGER ::= 11
id-DCH-AddItem               INTEGER ::= 12
id-DCH-AddItem-RL-ReconfPrepFDD  INTEGER ::= 13
id-DCH-AddItem-RL-ReconfPrepTDD  INTEGER ::= 14
id-DCH-AddItem-RL-ReconfReadyFDD  INTEGER ::= 15
id-DCH-AddItem-RL-ReconfRqstFDD  INTEGER ::= 16
id-DCH-AddItem-RL-ReconfRqstTDD  INTEGER ::= 17
id-DCH-AddList-RL-ReconfPrepFDD  INTEGER ::= 18
id-DCH-AddList-RL-ReconfPrepTDD  INTEGER ::= 19
id-DCH-AddList-RL-ReconfRqstFDD  INTEGER ::= 20
id-DCH-AddList-RL-ReconfRqstTDD  INTEGER ::= 21
id-DCH-DeleteItem-RL-ReconfPrepFDD  INTEGER ::= 22
id-DCH-DeleteItem-RL-ReconfPrepTDD  INTEGER ::= 23
id-DCH-DeleteItem-RL-ReconfRqstFDD  INTEGER ::= 24
id-DCH-DeleteItem-RL-ReconfRqstTDD  INTEGER ::= 25
id-DCH-DeleteList-RL-ReconfPrepFDD  INTEGER ::= 26
id-DCH-DeleteList-RL-ReconfPrepTDD  INTEGER ::= 27
id-DCH-DeleteList-RL-ReconfRqstFDD  INTEGER ::= 28
id-DCH-DeleteList-RL-ReconfRqstTDD  INTEGER ::= 29
id-DCH-Information-RL-SetupReqFDD  INTEGER ::= 30
id-DCH-InformationItem-RL-SetupReqFDD  INTEGER ::= 31
id-DCH-InformationItem-RL-SetupReqTDD  INTEGER ::= 32
id-DCH-InformationList-RL-SetupReqTDD  INTEGER ::= 33
id-DCH-ModifyItem             INTEGER ::= 34
id-DCH-ModifyItem-RL-ReconfPrepFDD  INTEGER ::= 35
id-DCH-ModifyItem-RL-ReconfPrepTDD  INTEGER ::= 36
id-DCH-ModifyItem-RL-ReconfReadyFDD  INTEGER ::= 37
id-DCH-ModifyItem-RL-ReconfRqstFDD  INTEGER ::= 38
id-DCH-ModifyItem-RL-ReconfRqstTDD  INTEGER ::= 39
id-DCH-ModifyList-RL-ReconfPrepFDD  INTEGER ::= 40
id-DCH-ModifyList-RL-ReconfPrepTDD  INTEGER ::= 41

```

id-DCH-ModifyList-RL-ReconfRqstFDD	INTEGER ::= 42
id-DCH-ModifyList-RL-ReconfRqstTDD	INTEGER ::= 43
id-DL-CCTrCH-Information-RL-ReconfPrepTDD	INTEGER ::= 44
id-DL-CCTrCH-Information-RL-ReconfRqstTDD	INTEGER ::= 45
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 46
id-DL-CCTrCH-InformationList-RL-ReconfRqstTDD	INTEGER ::= 47
id-DL-CCTrChInformationItem-RL-SetupReqTDD	INTEGER ::= 48
id-DL-CCTrChInformationList-RL-SetupReqTDD	INTEGER ::= 49
id-DL-CodeInformation-PhyChReconfRqstFDD	INTEGER ::= 50
id-DL-DPCH-Information	INTEGER ::= 51
id-DL-DPCH-Information-RL-SetupReqFDD	INTEGER ::= 52
id-DL-DPCH-InformationList-PhyChReconfRqstTDD	INTEGER ::= 53
id-DL-DPCH-InformationList-RL-ReconfReadyTDD	INTEGER ::= 54
id-DL-EbNoTarget	INTEGER ::= 55
id-DL-FrameType	INTEGER ::= 56
id-DL-MeanBitRate	INTEGER ::= 57
id-DL-ReferencePowerInformation-DL-PC-Rqst	INTEGER ::= 58
id-DRX-Parameter	INTEGER ::= 59
id-DedicatedMeasurementObjectType-DM-Rprt	INTEGER ::= 60
id-DedicatedMeasurementObjectType-DM-Rqst	INTEGER ::= 61
id-DedicatedMeasurementObjectType-DM-Rspns	INTEGER ::= 62
id-FACH-InfoForOptionalGroupS-CCPCH	INTEGER ::= 63
id-FACH-InfoForOptionalsS-CCPCH	INTEGER ::= 64
id-FACH-InfoForS-CCPCH-CoupledToPRACH	INTEGER ::= 65
id-GapPositionMode	INTEGER ::= 66
id-L3-Information	INTEGER ::= 67
id-MeasurementCharacteristics	INTEGER ::= 68
id-MeasurementID	INTEGER ::= 69
id-MultipleURAsIndicator	INTEGER ::= 70
id-PD	INTEGER ::= 71
id-PagingArea-PagingRqst	INTEGER ::= 72
id-PowerControlMode	INTEGER ::= 73
id-PowerResumeMode	INTEGER ::= 74
id-ProcedureScope-DL-PC-Rqst	INTEGER ::= 75
id-RANAP-RelocationInformation	INTEGER ::= 76
id-RL-Information-PhyChReconfRqstFDD	INTEGER ::= 77
id-RL-Information-PhyChReconfRqstTDD	INTEGER ::= 78
id-RL-Information-RL-AdditionRqstFDD	INTEGER ::= 79
id-RL-Information-RL-AdditionRqstTDD	INTEGER ::= 80
id-RL-Information-RL-DeletionRqst	INTEGER ::= 81
id-RL-Information-RL-FailureInd	INTEGER ::= 82
id-RL-Information-RL-ReconfPrepFDD	INTEGER ::= 83
id-RL-Information-RL-RestoreInd	INTEGER ::= 84
id-RL-Information-RL-SetupReqFDD	INTEGER ::= 85
id-RL-Information-RL-SetupReqTDD	INTEGER ::= 86
id-RL-InformationItem-DM-Rprt	INTEGER ::= 87
id-RL-InformationItem-DM-Rqst	INTEGER ::= 88
id-RL-InformationItem-DM-Rspns	INTEGER ::= 89
id-RL-InformationItem-RL-SetupReqFDD	INTEGER ::= 90
id-RL-InformationList-RL-AdditionRqstFDD	INTEGER ::= 91
id-RL-InformationList-RL-DeletionRqst	INTEGER ::= 92

id-RL-InformationList-RL-FailureInd	INTEGER ::= 93
id-RL-InformationList-RL-ReconfPrepFDD	INTEGER ::= 94
id-RL-InformationList-RL-RestoreInd	INTEGER ::= 95
id-RL-InformationResponse-RL-AdditionRspTDD	INTEGER ::= 96
id-RL-InformationResponse-RL-ReconfReadyTDD	INTEGER ::= 97
id-RL-InformationResponse-RL-SetupRspTDD	INTEGER ::= 98
id-RL-InformationResponseItem-RL-AdditionRspFDD	INTEGER ::= 99
id-RL-InformationResponseItem-RL-ReconfReadyFDD	INTEGER ::= 100
id-RL-InformationResponseItem-RL-SetupRspFDD	INTEGER ::= 101
id-RL-InformationResponseList-RL-AdditionRspFDD	INTEGER ::= 102
id-RL-InformationResponseList-RL-ReconfReadyFDD	INTEGER ::= 103
id-RL-InformationResponseList-RL-SetupRspFDD	INTEGER ::= 104
id-RL-ReconfigurationFailure-RL-ReconfFail	INTEGER ::= 105
id-RL-ReconfigurationFailureList-RL-ReconfFail	INTEGER ::= 106
id-RNCsWithCellsInTheAccessedURA-List-UL-ST-Ind	INTEGER ::= 107
id-ReportCharacteristics	INTEGER ::= 108
id-S-RNTI	INTEGER ::= 109
id-SAI	INTEGER ::= 110
id-SN	INTEGER ::= 111
id-SRNC-ID	INTEGER ::= 112
id-ScramblingCodeChange	INTEGER ::= 113
id-SuccessfulRL-InformationResponse-RL-AdditionFailureFDD	INTEGER ::= 114
id-SuccessfulRL-InformationResponse-RL-SetupFailureFDD	INTEGER ::= 115
id-SuccessfulRL-InformationResponseList-RL-AdditionFailureFDD	INTEGER ::= 116
id-SuccessfulRL-InformationResponseList-RL-SetupFailureFDD	INTEGER ::= 117
id-TGD	INTEGER ::= 118
id-TGL	INTEGER ::= 119
id-TGP1	INTEGER ::= 120
id-TGP2	INTEGER ::= 121
id-TransportBearerID	INTEGER ::= 122
id-TransportBearerRequestIndicator	INTEGER ::= 123
id-TransportLayerAddress	INTEGER ::= 124
id-UC-ID	INTEGER ::= 125
id-UL-CCTrCH-Information-RL-ReconfPrepTDD	INTEGER ::= 126
id-UL-CCTrCH-Information-RL-ReconfRqstTDD	INTEGER ::= 127
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 128
id-UL-CCTrCH-InformationList-RL-ReconfRqstTDD	INTEGER ::= 129
id-UL-CCTrChInformationItem-RL-SetupReqTDD	INTEGER ::= 130
id-UL-CCTrChInformationList-RL-SetupReqTDD	INTEGER ::= 131
id-UL-DL-CompressedModeSelection	INTEGER ::= 132
id-UL-DPCH-Information	INTEGER ::= 133
id-UL-DPCH-Information-RL-SetupReqFDD	INTEGER ::= 134
id-UL-DPCH-InformationList-PhyChReconfRqstTDD	INTEGER ::= 135
id-UL-DPCH-InformationList-RL-ReconfReadyTDD	INTEGER ::= 136
id-UL-DeltaEbNo	INTEGER ::= 137
id-UL-DeltaEbNoAfter	INTEGER ::= 138
id-UL-EbNoTarget	INTEGER ::= 139
id-UL-MeanBitRate	INTEGER ::= 140
id-URA-ID	INTEGER ::= 141
id-UnsuccessfulRL-InformationResponse	INTEGER ::= 142
id-UnsuccessfulRL-InformationResponse-RL-AdditionFailureFDD	INTEGER ::= 143

```

id-UnsuccessfulRL-InformationResponse-RL-SetupFailureFDD      INTEGER ::= 144
id-UnsuccessfulRL-InformationResponse-RL-SetupFailureTDD      INTEGER ::= 145
id-UnsuccessfulRL-InformationResponseList-RL-AdditionFailureFDD  INTEGER ::= 146
id-UnsuccessfulRL-InformationResponseList-RL-SetupFailureFDD      INTEGER ::= 147
id-CriticalityDiagnostics          INTEGER ::= 148

```

END

9.3.7 Container Definitions

```

-- ****
-- 
-- Container definitions
-- 
-- ****

RNSAP-Containers -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- 
-- IE parameter types from other modules.
-- 
-- ****

IMPORTS
    Criticality,
    Presence,
    PrivateExtensionID,
    ProtocolExtensionID,
    ProtocolIE-ID
FROM RNSAP-CommonDataTypes

    maxPrivateExtensions,
    maxProtocolExtensions,
    maxProtocolIEs
FROM RNSAP-Constants;

-- ****
-- 
-- Class Definition for Protocol IEs
-- 
-- ****

RNSAP-PROTOCOL-IES ::= CLASS {
    &id          ProtocolIE-ID
    &criticality   Criticality,
    &Value,
    &presence       Presence
        UNIQUE,
}

```

```

}

WITH SYNTAX {
    ID          &id
    CRITICALITY   &criticality
    TYPE         &Value
    PRESENCE     &presence
}

-- ****
-- 
-- Class Definition for Protocol IEs
-- 
-- ****

RNSAP-PROTOCOL-IES-PAIR ::= CLASS {
    &id          ProtocolIE-ID           UNIQUE,
    &firstCriticality Criticality,
    &FirstValue,
    &secondCriticality Criticality,
    &SecondValue,
    &presence      Presence
}
WITH SYNTAX {
    ID          &id
    FIRST CRITICALITY   &firstCriticality
    FIRST TYPE        &FirstValue
    SECOND CRITICALITY &secondCriticality
    SECOND TYPE       &SecondValue
    PRESENCE         &presence
}

-- ****
-- 
-- Class Definition for Protocol Extensions
-- 
-- ****

RNSAP-PROTOCOL-EXTENSION ::= CLASS {
    &id          ProtocolExtensionID      UNIQUE,
    &criticality Criticality,
    &Extension
}
WITH SYNTAX {
    ID          &id
    CRITICALITY   &criticality
    EXTENSION     &Extension
}

-- ****
-- 
-- Class Definition for Private Extensions
-- 
```

```

-- ****
-- **** RNSAP-PRIVATE-EXTENSION ::= CLASS {
  &id          PrivateExtensionID,
  &criticality Criticality,
  &Extension
}
WITH SYNTAX {
  ID          &id
  CRITICALITY &criticality
  EXTENSION   &Extension
}

-- ****
-- Container for Protocol IEs
-- ****

ProtocolIE-Container {RNSAP-PROTOCOL-IES : IEsSetParam} ::=
SEQUENCE (SIZE (0..maxProtocolIES)) OF
ProtocolIE-Field {{IESSetParam}}


ProtocolIE-Field {RNSAP-PROTOCOL-IES : IEsSetParam} ::= SEQUENCE {
  id          RNSAP-PROTOCOL-IES.&id          {{IESSetParam}},
  criticality RNSAP-PROTOCOL-IES.&criticality {{IESSetParam}{@id}},
  value        RNSAP-PROTOCOL-IES.&Value       {{IESSetParam}{@id}}
}

-- ****
-- Container for Protocol IE Pairs
-- ****

ProtocolIE-ContainerPair {RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=
SEQUENCE (SIZE (0..maxProtocolIES)) OF
ProtocolIE-FieldPair {{IESSetParam}}


ProtocolIE-FieldPair {RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::= SEQUENCE {
  id          RNSAP-PROTOCOL-IES-PAIR.&id          {{IESSetParam}},
  firstCriticality RNSAP-PROTOCOL-IES-PAIR.&firstCriticality {{IESSetParam}{@id}},
  firstValue    RNSAP-PROTOCOL-IES-PAIR.&FirstValue    {{IESSetParam}{@id}},
  secondCriticality RNSAP-PROTOCOL-IES-PAIR.&secondCriticality {{IESSetParam}{@id}},
  secondValue   RNSAP-PROTOCOL-IES-PAIR.&SecondValue   {{IESSetParam}{@id}}
}

-- ****
-- Container Lists for Protocol IE Containers

```

```

-- ****
ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES : IEsSetParam} ::=

SEQUENCE (SIZE (lowerBound..upperBound)) OF
ProtocolIE-Container {{IEsSetParam}}


ProtocolIE-ContainerPairList {INTEGER : lowerBound, INTEGER : upperBound, RNSAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=

SEQUENCE (SIZE (lowerBound..upperBound)) OF
ProtocolIE-ContainerPair {{IEsSetParam}}


-- ****
-- Container for Protocol Extensions
-- ****

ProtocolExtensionContainer {RNSAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::=

SEQUENCE (SIZE (1..maxProtocolExtensions)) OF
ProtocolExtensionField {{ExtensionSetParam}}


ProtocolExtensionField {RNSAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
    id          RNSAP-PROTOCOL-EXTENSION.&id          ({ExtensionSetParam}),
    criticality   RNSAP-PROTOCOL-EXTENSION.&criticality   ({ExtensionSetParam}{@id}),
    extensionValue   RNSAP-PROTOCOL-EXTENSION.&Extension   ({ExtensionSetParam}{@id})
}

-- ****
-- Container for Private Extensions
-- ****

PrivateExtensionContainer {RNSAP-PRIVATE-EXTENSION : ExtensionSetParam} ::=

SEQUENCE (SIZE (1..maxPrivateExtensions)) OF
PrivateExtensionField {{ExtensionSetParam}}


PrivateExtensionField {RNSAP-PRIVATE-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
    id          RNSAP-PRIVATE-EXTENSION.&id          ({ExtensionSetParam}),
    criticality   RNSAP-PRIVATE-EXTENSION.&criticality   ({ExtensionSetParam}{@id}),
    extensionValue   RNSAP-PRIVATE-EXTENSION.&Extension   ({ExtensionSetParam}{@id})
}

END

```

9.4 Message Transfer Syntax

RNSAP shall use the ASN.1 Packed Encoding Rules (PER) Aligned Variant as transfer syntax as specified in ref. [17].

[Editor's note: The dating of reference [17] needs to be verified. It has been included from the ITU-T list of recommendations in force. The dating of the reference is FFS.]

9.5 Timers

10 Handling of Unknown, Unforeseen and Erroneous Protocol Data

10.1 General

Protocol Error cases can be divided into two classes:

1. Transfer Syntax error
2. Abstract Syntax error

10.2 Transfer Syntax Error

A Transfer Syntax Error occurs when the receiver is not able to decode the received message i.e. the transfer syntax can not be opened. If Transfer Syntax Error occurs, the receiver should initiate Error Indication procedure with appropriate cause value for the protocol error.

10.3 Abstract Syntax Error

10.3.1 General

In the RANAP messages there is criticality information set for individual IEs and/or sequences of IEs. This criticality information instructs the receiver how to act when receiving an IE that is not comprehended. An IE shall be regarded as not comprehended if the receiving node either cannot decode the IE or does not comprehend the function represented by the IE value. The case of the not comprehended IE is an Abstract Syntax Error.

If an Abstract Syntax Error occurs, the receiver shall read the remaining message and shall then for each detected Abstract Syntax Error act according to the Criticality Information for the IE or sequences of IEs due to which Abstract Syntax Error occurred in accordance with chapter 10.3.2.

The receiving node shall take different actions depending on the value of the Criticality Information. The three possible values of the Criticality Information are:

1. Reject IE
2. Ignore IE and Notify Sender
3. Ignore IE

10.3.2 Handling of the Criticality Information at Reception

10.3.2.1 Procedure Code

The receiving node shall treat the different types of criticality information of the *Procedure Code* according to the following:

Reject IE:

- If a message is received with a *Procedure Code* marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall reject the procedure using the Error Indication procedure.

Ignore IE and Notify Sender:

- If a message is received with a *Procedure Code* marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the procedure and initiate the Error Indication procedure.

Ignore IE:

- If a message is received with a *Procedure Code* marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the procedure.

10.3.2.2 IEs other than the Procedure Code

The receiving node shall treat the different types of criticality information of an IE other than the *Procedure Code* according to the following:

Reject IE:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Reject IE*" which the receiving node does not comprehend; none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the rejection of one or more IEs using the message normally used to report unsuccessful outcome of the procedure.
- If a message *initiating* a procedure that does not have a message to report unsuccessful outcome is received containing one or more IEs marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall initiate the Error Indication procedure.
- If a *response* message is received containing one or more IEs marked with "*Reject IE*", the receiving node shall initiate local error handling.

Ignore IE and Notify Sender:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs and report that one or more IEs have been ignored in the response message of the procedure.
- If a *response* message is received containing one or more IEs marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the IE and initiate the Error Indication procedure.

Ignore IE:

- If a message *initiating* a procedure is received containing one or more IEs marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs.

10.3.3 Logical Error Handling

Logical error situations occur when a message is comprehended correctly, but the information contained within the message is not valid (i.e. semantic error), or describes a procedure which is not compatible with the state of the receiver.

In these conditions, the following behaviour shall be performed as defined by the class of the elementary procedure, irrespective of the criticality of the IEs containing the erroneous values.

Class 1:

Where the logical error occurs in a request message of a class 1 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value. Typical cause values are:

Protocol Causes:

1. Semantic Error
2. Message not Compatible with Receiver State

Where the logical error is contained in a request message of a class 1 procedure, and the procedure does not have a failure message, the Error Indication procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 1 procedure, local error handling shall be initiated.

Class 2:

Where the logical error occurs in a message of a class 2 procedure, the Error Indication procedure shall be initiated with an appropriate cause value.

Annex A (informative): Change history

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_06	-	-	RP-99755	3.0.0	Approved at TSG RAN #6 and placed under Change Control

Rapporteur for TS25.423 is:

Göran Rune
Ericsson Radio Systems AB

Tel.: +46 13 284200
Fax : +46 13 277373
Email : goran.rune@era.ericsson.se

History

Document history		
V3.0.0	January 2000	Publication