

ETSI TS 126 517 V17.5.0 (2024-04)



**LTE;
5G;
5G Multicast-Broadcast User Services;
Protocols and Formats
(3GPP TS 26.517 version 17.5.0 Release 17)**



Reference

RTS/TSGS-0426517vh50

Keywords

5G,LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope	8
2 References	8
3 Definitions of terms, symbols and abbreviations	9
3.1 Terms.....	9
3.2 Symbols.....	9
3.3 Abbreviations	10
3.4 Syntax documentation conventions	10
4 System overview	10
5 Announcement of MBS User Services.....	11
5.0 Overview	11
5.1 User Service Description data model	11
5.1.1 General.....	11
5.1A Encoding.....	13
5.2 Syntax and associated semantics	13
5.2.1 General.....	13
5.2.2 User Service Bundle Descriptions document.....	14
5.2.3 User Service Description data type.....	14
5.2.4 Distribution Session Description data type.....	15
5.2.5 Session Description document.....	16
5.2.6 Application Service Description data type.....	16
5.2.6A Application Service Entry Point document.....	16
5.2.7 Service Schedule Description data type.....	17
5.2.8 Object Repair Parameters data type	18
5.2.9 Availability Information data type.....	18
5.2.10 Security Description data type	19
5.3 Delivery of User Service Descriptions	19
5.3.1 General.....	19
5.3.1A User Service Descriptions Bundle	20
5.3.2 Delivery of User Service Descriptions Bundle Entity in object carousel	20
5.3.3 Delivery of User Service Descriptions Bundle Entity via unicast PDU Session	20
6 Object Distribution Method.....	21
6.1 General	21
6.1.1 Overview	21
6.1.2 Object manifest.....	21
6.2 Usage of FLUTE for Object Distribution Method	22
6.2.1 General.....	22
6.2.2 Session Description document for FLUTE.....	22
6.2.2.1 General	22
6.2.2.2 MBS service type of MBS Session	23
6.2.2.3 SDP examples for FLUTE Session	24
6.2.3 Operating modes for FLUTE-based Object Distribution Method.....	24
6.2.3.1 Introduction	24
6.2.3.2 Single object operating mode	25
6.2.3.3 Object collection operating mode	25
6.2.3.4 Object carousel operating mode	25
6.2.3.5 Segment streaming operating mode	25
6.2.4 Object Repair mechanism for FLUTE.....	26
6.2.4.1 General	26

6.2.4.2	Post-session Object Repair procedure.....	27
6.2.4.3	In-session object repair procedure.....	28
6.2.4.4	Network location of repair object.....	28
6.2.4.5	Byte range determination.....	28
6.2.4.6	Object recovery procedure.....	29
7	Packet Distribution Method.....	29
7.1	General.....	29
7.2	Re-using MBMS Delivery Method as Packet Distribution Method.....	30
7.2.1	General.....	30
7.2.2	Void.....	30
7.2.3	Session Description.....	30
7.2.3.1	General.....	30
7.2.3.2	SDP examples for Packet Distribution Method.....	31
8	General aspects of APIs for MBS User Services.....	32
8.1	HTTP resource URIs and paths.....	32
8.2	Usage of HTTP.....	32
8.2.1	HTTP protocol version.....	32
8.2.1.1	General.....	32
8.2.1.2	MBSF.....	32
8.2.1.3	MBSTF.....	33
8.2.1.4	MBS AF.....	33
8.2.1.5	MBS AS.....	33
8.2.1.6	MBSSF.....	33
8.2.2	HTTP message bodies for API resources.....	33
8.2.3	Usage of HTTP headers.....	34
8.2.3.1	General.....	34
8.2.3.2	User Agent identification.....	34
8.2.3.2.1	General.....	34
8.2.3.2.2	MBSF identification.....	34
8.2.3.2.3	MBSTF identification.....	34
8.2.3.2.4	MBSF Client identification.....	34
8.2.3.2.5	MBSTF Client identification.....	34
8.2.3.3	Server identification.....	35
8.2.3.3.1	General.....	35
8.2.3.3.2	MBSF identification.....	35
8.2.3.3.3	MBSTF identification.....	35
8.2.3.3.4	MBS AF identification.....	35
8.2.3.3.5	MBS AS identification.....	35
8.2.3.4	Support for conditional HTTP GET requests.....	35
8.2.3.5	Support for conditional HTTP POST, PUT, PATCH and DELETE requests.....	36
8.2.3.3.6	MBSSF identification.....	36
8.3	HTTP response codes.....	36
9	MBS AF APIs (MBS-5).....	36
9.1	General.....	36
9.2	User Service Description retrieval API.....	36
9.2.1	General.....	36
9.2.2	Resource structure.....	37
9.2.3	Response format.....	38
9.2.3.1	User Service Descriptions result.....	38
9.2.3.2	User Service Description result.....	38
10	MBS AS protocols (MBS-4-UC).....	38
10.1	General.....	38
10.2	Unicast Object Repair protocol.....	39
10.2.1	Overview.....	39
10.2.2	MBSTF Client procedures.....	39
10.2.2.1	General.....	39
10.2.2.2	Parameters.....	39
10.2.2.3	Back-off time computation.....	39
10.2.2.4	MBSTF Client unicast repair request.....	40

10.2.3	MBS AS requirements	40
11	MBSSF security protocols (MBS-10)	40
11.1	General	40
11.2	MBS Service Key retrieval from MBSSF	41
11.2.1	Overview	41
11.2.2	MBSF Client procedures	41
11.2.2.1	MBSSF endpoint selection by MBSF Client	41
11.2.2.2	Back-off time computation	41
12	Conformance profiles for MBS Distribution Sessions	41
12.1	Definition	41
12.2	Identification of conformance profile.....	42
12.3	Semantics of conformance signalling in User Service Description.....	42
12.4	Baseline MBS Distribution Session Profile.....	42
Annex A (normative): Syntax for Service Announcement		43
A.1	Void.....	43
A.2	JSON-based representation	43
A.2.1	MBS User Service Announcement schema.....	43
Annex B (informative): Service Announcement examples		48
B.1	XML-based representation	48
B.2	JSON-based representation	48
Annex C (normative): 3GPP Registered URIs		49
C.1	General	49
C.2	Controlled vocabulary of conformance profile identifiers	49
Annex D (normative): Syntax for object manifest		50
D.1	Object manifest schema.....	50
Annex E (normative): IANA registration		52
E.1	General	52
E.2	Registration of MIME media type "application/mbs-user-service-descriptions+json"	52
E.2.1	General	52
E.2.2	Profiles parameter.....	52
Annex F (informative): Change history		54
History		55

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document defines protocols and formats for User Services as defined in TS 26.502 [6] and conveyed using the 5G multicast–broadcast capabilities of the 5G System defined in TS 23.501 [2], TS 23.502 [3] and TS 23.247 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System architecture for the 5G System (5GS)".
- [3] 3GPP TS 23.502: "Procedures for the 5G System (5GS)".
- [4] 3GPP TS 23.503: "Policy and charging control framework for the 5G System (5GS); Stage 2".
- [5] 3GPP TS 23.247: "Architectural enhancements for 5G multicast-broadcast services; Stage 2".
- [6] 3GPP TS 26.502: "5G multicast–broadcast services; User Service architecture".
- [7] 3GPP TS 26.346: "MBMS; Protocols and Codecs".
- [8] IETF RFC 8866: "Session Description Protocol".
- [9] Void.
- [10] 3GPP TS 23.003: "Numbering, addressing and identification".
- [11] 3GPP TS 24.008: "Mobile radio interface Layer 3 specification; Core network protocols; Stage 3".
- [12] IETF RFC 3926: "FLUTE - File Delivery over Unidirectional Transport".
- [13] Void.
- [14] OpenAPI: "OpenAPI 3.0.0 Specification", <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.0.md>.
- [15] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [16] 3GPP TS 29.501: "5G System: Principles and Guidelines for Services Definition; Stage 3".
- [17] 3GPP TS 29.580: "5G System; Multicast/Broadcast Service Function services; Stage 3".
- [18] 3GPP TS 29.581: "5G System; Multicast/Broadcast Service transport services; Stage 3".
- [19] IETF RFC 9110: "HTTP Semantics", June 2022.
- [20] IETF RFC 9111: "HTTP Caching", June 2022.
- [21] IETF RFC 9112: "HTTP/1.1", June 2022.
- [22] IETF RFC 9113: "HTTP/2", June 2022.
- [23] Reserved for future use.

- [24] IETF RFC 8446: "The Transport Layer Security (TLS) Protocol Version 1.3", August 2018.
- [25] Open Mobile Alliance: "OMNA BCAST Service Class Registry", <https://technical.openmobilealliance.org/OMNA/bcast/bcast-service-class-registry.html>.
- [26] IETF RFC 3629: "UTF-8, a transformation format of ISO 10646".
- [27] IETF RFC 8141: "Uniform Resource Names (URNs)".
- [28] ISO 639-2: "Codes for the representation of names of languages - Part 2: Alpha-3 code".
- [29] IETF RFC 6381: "The 'Codecs' and 'Profiles' Parameters for "Bucket" Media Types".
- [30] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [31] 3GPP TS 26.512: "5G Media Streaming (5GMS); Protocols".
- [32] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [33] 3GPP TS 33.246: "3G Security; Security of Multimedia Broadcast/Multicast Service (MBMS)".
- [34] IETF RFC 3986: "Uniform Resource Identifier (URI): Generic Syntax".
- [35] 3GPP TR 26.946: "Multimedia Broadcast/Multicast Service (MBMS) user service guidelines".
- [36] 3GPP TS 26.247: "Transparent end-to-end Packet-switched Streaming Service (PSS); Progressive Download and Dynamic Adaptive Streaming over HTTP (3GP-DASH)".
- [37] IETF RFC 2046, "Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types".
- [38] IETF RFC 2387: "The MIME Multipart/Related Content-type".
- [39] IETF RFC 2557: "MIME Encapsulation of Aggregate Documents, such as HTML (MHTML)".
- [40] IETF RFC 2017: "Definition of the URL MIME External-Body Access-Type".
- [41] IETF RFC 1952: "GZIP file format specification version 4.3".

3 Definitions of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1], TS 23.501 [2], TS 23.502 [3], TS 23.247 [5], TS 26.502 [6] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

User Service Descriptions document: a version-controlled document that conveys one or more User Service Description objects.

User Service Description object: a JSON object carrying information about a single MBS User Service corresponding to an MBS User Service Announcement.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1], TS 23.501 [2], TS 23.502 [3], TS 23.247 [4] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

ALC	Asynchronous Layered Coding
CMAF	Common Media Application Format
DASH	Dynamic Adaptive Streaming over HTTP
ESI	Encoding Symbol Identifier
FDT	File Delivery Table
FLUTE	File Delivery over Unidirectional Transport
FSA	Frequency Selection Area
GBA	Generic Bootstrapping Architecture
HTTP	HyperText Transfer Protocol
HTTPS	HTTP over TLS
JSON	JavaScript Object Notation
MBMS	Multimedia Broadcast Multicast Service
MBS	Multicast–Broadcast Services
MB-SMF	Multicast–Broadcast Session Management Function
MB-UPF	Multicast–Broadcast User Plane Function
MBSF	Multicast–Broadcast Service Function
MBSTF	Multicast–Broadcast Service Transport Function
MPD	Media Presentation Description
MSK	MBS Service Key
PCF	Policy and Charging Function
NEF	Network Exposure Function
OTI	Object Transmission Information
ROHC	Robust Header Compression
RTP	Real-Time Protocol
SDP	Session Description Protocol
TMGI	Temporary Mobile Group Identity
TOI	Transmission Object Identifier
UDP	User Datagram Protocol
UE	User Equipment
UML	Unified Markup Language
XML	eXtensible Markup Language
YAML	Yet Another Markup Language

3.4 Syntax documentation conventions

The conventions from TS 29.501 [16] apply to this document with the following extensions for OpenAPI [14] structured data type definitions as defined in clause 5.2.4.1 of TS 29.501 [16]:

1. Data types are annotated in **Bold face**.
2. Properties of data types are noted in *codestyle*.

4 System overview

The present document defines protocols and formats for MBS User Services as defined in TS 26.502 [6] and conveyed using the 5G Multicast-Broadcast capabilities of the 5G System defined in TS 23.501 [2], TS 23.502 [3] and TS 23.247 [5].

MBS User Services enable high-level applications to make use of the low-level features of the MBS System. An MBS User Service is provided by the MBSF and MBSTF working in combination to support configuration option 2 and configuration option 3 defined in annex A of TS 23.247 [5]. The MBS User Services architecture is defined in clause 4.2.2 of TS 26.502 [6] and shows the MBS-related entities involved in providing MBS User Services delivery and control.

The MBSF and MBSTF offer service layer functionality for sending MBS data via MBS Sessions. The MBSF offers control plane functionality while the MBSTF offers user plane functionality. The MBSTF acts as a User Plane anchor when it sources IP multicast traffic. Clause 4.3.1 of TS 26.502 [6] defines the set of functional entities involved in supporting MBS User Services, including client functions in the UE.

5 Announcement of MBS User Services

5.0 Overview

MBS User Service Announcement is needed in order to advertise MBS User Services in advance of, and potentially during, the MBS User Service Sessions described. MBS User Service Announcement (as defined in clauses 4.5.7 and 4.5.8 of TS 26.502 [3]) is provided by means of an *MBS User Service Description*, the syntax of which is defined in this clause.

The MBS User Service Announcement plays an equivalent role to the MBMS User Service announcement as defined in TS 26.346 [7], but it is simplified and extended for the needs of Multicast-Broadcast Services.

5.1 User Service Description data model


5.1.1 General

An MBS User Service Description is described by a set of metadata documents that are delivered as described in clause 4.3.2 of TS 26.502 [3]. The data model defined in this clause subdivides the parameters defined in [3] and groups them into a set of *metadata documents*.

The metadata consists of:

- A *User Service Descriptions* document (see clause 5.2.2) describing a set of one or more MBS User Services, and containing:
 - One or more *User Service Description* objects (see clause 5.2.3), each describing an MBS User Service Session that is associated with:
 - One or more *Distribution Session Description* objects (see clause 5.2.4), each of which references a Session Description document [8] (see clause 5.2.5) that may be packaged with the User Service Descriptions document for delivery to the MBS Client in the same User Service Bundle (see clause 5.3.4), and each of which may optionally reference an Object Repair Parameters object (see clause 5.2.7) describing the object repair parameters for the MBS Distribution Session in question.
 - Zero or more alternative *Application Service Description* objects (see clause 5.2.5), each of which references an Application Service Entry Point document (see clause 5.2.6) that may be packaged with the User Service Description document for delivery to the MBS Client in the same User Service Bundle (see clause 5.3.4). Additional resources referenced by the Application Service Entry Point document may also be packaged into the User Service Bundle.
 - Zero or more *Service Schedule Description* objects (see clause 5.2.7) advertising the delivery schedule for the MBS User Service Session.

Figure 5.1 1 illustrates the relationships between these metadata entities using UML for a User Service Descriptions document.

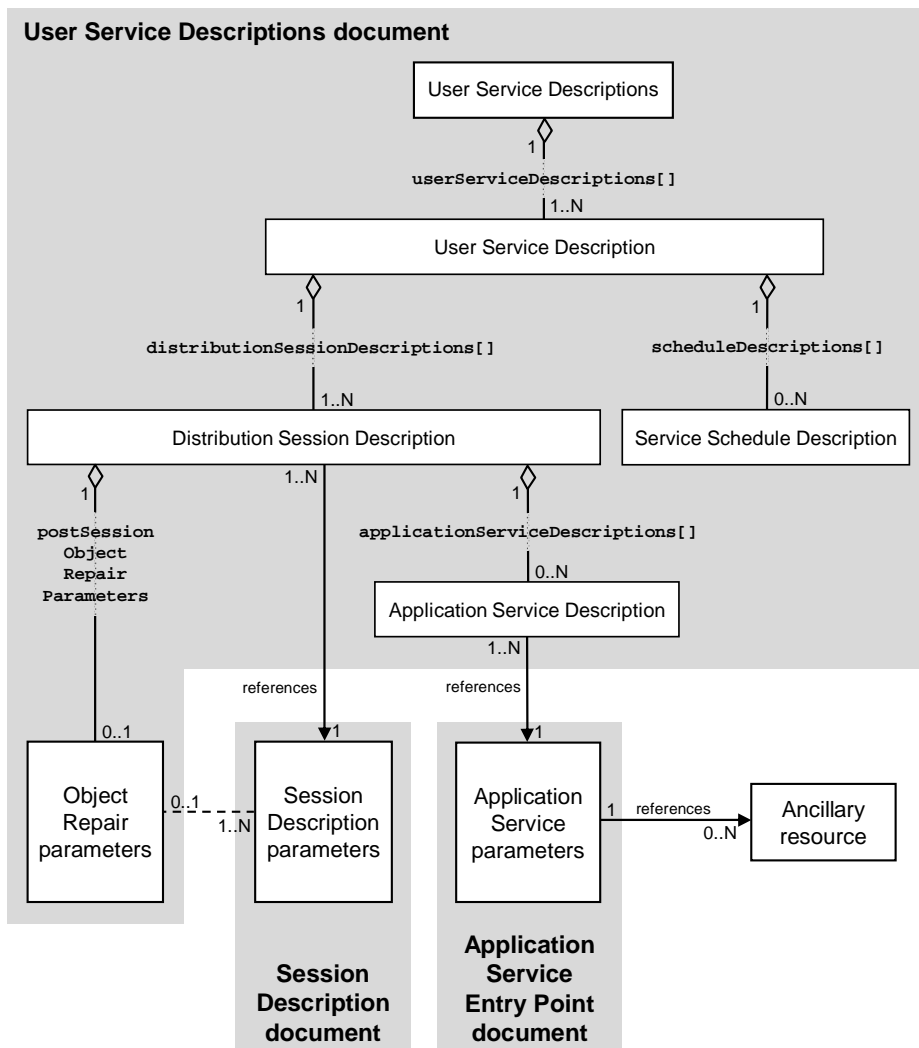

NOTE: "N" means any number in each instance.

Figure 5.1-1: User Service Data Model simple description

A *User Service Description* document shall contain one or more *User Service Description* objects, each of which describes a single MBS User Service Session.

Each *User Service Description* object shall include at least one *Distribution Service Description* object describing the set of MBS Distribution Sessions currently associated with the MBS User Service Session.

- The *Distribution Session Description* object shall refer to one *Session Description document*.
- Each *Distribution Session Description* object may include an *Object Repair Parameters* object.
- Each *Distribution Session Description* object may include zero or more alternative *Application Service Description* object, optionally referencing an *Application Service Entry Point* document (e.g. a DASH MPD, HLS Master Playlist or HTML document) which describes the root of the Application Service associated with this MBS Distribution Session. When multiple *Application Service Entry Point* documents are referenced by the same *Distribution Session Description* (not permitted in this release), an MBS Client shall select only one on the basis of a distinct MIME content type indicated in the *Application Service Description* object.

Each User Service Description object may include *Service Schedule Description* objects. If included, the UE can expect to receive MBS User Service data during the time periods described in the Service Schedule Description object.

5.1A Encoding

The User Service Descriptions document shall be a JSON instance document formatted according to the schema specified in clause A.2 with the following constraints:

- The MIME type of the User Service Description document is specified in clause D.2.
- The encoding of the User Service Description document shall be UTF-8 as defined in IETF RFC 3629 [26].
- The extension of the schemas specified in clause A.2, in particular the addition of information elements, is reserved to 3GPP.
- Additional rules for schema extension are for future study.

5.2 Syntax and associated semantics

5.2.1 General

The following description in this clause presumes a JSON encoding of the information comprising the MBS User Service Announcement as specified in clause 5.1A.

The data types in table 5.2.1-1 from other 3GPP specifications are reused in the remainder of the present document.

Table 5.2.1 1: Externally defined data types used by User Service Description schema

Data type	Comments	Reference
<i>Uri</i>	A Uniform Resource Locator	TS 29.571 [30]
<i>DateTime</i>	A date-time value.	
<i>MbsServiceArea</i>	An MBS Service Area.	
<i>MbsFsald</i>	An MBS Frequency Selection Area identifier.	
<i>DurationSec</i>	A time duration expressed in seconds.	
<i>AbsoluteUrl</i>	An absolute URL	TS 29 512 [31]

The data types in table 5.2.1-2 are defined in the present document.

Table 5.2.1 2: User Service Description schema data types defined in the present document

Data type	Clause
<i>UserServiceDescriptions</i>	5.2.2
<i>UserServiceDescription</i>	5.2.3
<i>DistributionSessionDescription</i>	5.2.4
<i>ApplicationServiceDescription</i>	5.2.6
<i>ServiceScheduleDescription</i>	5.2.7
<i>ObjectRepairParameters</i>	5.2.8
<i>AvailabilityInformation</i>	5.2.9
<i>SecurityDescription</i>	5.2.10

5.2.2 User Service Bundle Descriptions document

The MBS User Service Descriptions document conveys one or more *User Service Description* objects. Table 5.2.2-1 provides the detailed semantics for the **UserServiceDescriptions** data type that conveys these objects.

Table 5.2.2-1: Semantics of UserServiceDescriptions data type

Property name	Data Type	P	Cardinality	Description
version	<i>integer</i>	O	0..1	Provides the version number of the MBS User Service Descriptions document. Any two documents that are different shall have different version numbers. A higher number overwrites a lower version number. Minimum value: 1. If not present, the latest delivered document overwrites any previously delivered ones.
userServiceDescriptions	<i>array(UserServiceDescription)</i>	M	1..N	A set of one or more <i>User Service Description</i> objects (see clause 5.2.3).

5.2.3 User Service Description data type

The **UserServiceDescription** data type carries information about a single MBS User Service corresponding to an MBS User Service Announcement as defined in clause 4.5.7 of TS 26.502 [6]. Table 5.2.3-1 provides the detailed semantics for this data type.

Table 5.2.3-1: Semantics of UserServiceDescription data type

Property name	Data Type	P	Cardinality	Description
serviceIds	<i>array(Uri)</i>	M	1..N	The set of <i>External service identifiers</i> for the MBS User Service as defined in table 4.5.7-1 of TS 26.502 [6]. Each value is expressed as a URI.
class	<i>Uri</i>	M	1	The <i>Service class</i> of the MBS User Service as defined in table 4.5.7-1 of TS 26.502 [6]. The value is expressed as a fully-qualified term identifier URI.
names	<i>array(object)</i>	O	1..N	The <i>Service names</i> of the MBS User Service as defined in table 4.5.7-1 of TS 26.502 [6]. Each service name is differentiated by a language as defined in the <i>lang</i> property.
name	<i>string</i>	M	1	One of the <i>Service names</i> .
lang	<i>string</i>	M	1	Language of the service name encoded using an ISO "alpha-3" language code according to ISO 639-2 [28].
descriptions	<i>array(object)</i>	O	1..N	The <i>Service descriptions</i> of the MBS User Service as defined in table 4.5.7-1 of TS 26.502 [6].
description	<i>string</i>	M	1	One of the <i>Service descriptions</i> .
lang	<i>string</i>	M	1	Language of the service description encoded using an ISO "alpha-3" language code according to ISO 639-2 [28].
serviceLanguage	<i>string</i>	O	0..1	The <i>Main service language</i> of the MBS User Service as defined in table 4.5.7-1 of TS 26.502 [6], encoded using an ISO "alpha-3" language code according to ISO 639-2 [28].
distribution Session Descriptions	<i>array(Distribution SessionDescription)</i>	M	1..N	One or more MBS Distribution Session Descriptions for the MBS User Service (see clause 5.2.4).

Property name	Data Type	P	Cardinality	Description
serviceSchedule Descriptions	<i>array(Service Schedule Description)</i>	O	1..N	The <i>Active periods</i> of the MBS User Data Ingest Session as defined in clause 4.5.5 of TS 26.502 [6]. An array of service schedules indicating when the MBS User Service is scheduled to be active (see clause 5.2.7). If omitted, the MBS User Service is always active (see NOTE).
NOTE: The current active period for an individual MBS Distribution Session may be further restricted by information in its Session Description document (<i>t</i> and/or <i>r</i> lines in the SDP) specified in clause 5.2.5.				

5.2.4 Distribution Session Description data type

The **DistributionSessionDescription** data type describes one *MBS Distribution Session* associated with an MBS User Service and carries the MBS Distribution Session Parameters as defined in clause 4.5.8 of TS 26.502 [6]. Table 5.2.4-1 provides the detailed semantics of this data type.

Table 5.2.4-1: Semantics of *DistributionSessionDescription* data type

Property name	Data Type	P	Cardinality	Description
distribution Method	<i>DistributionMethod</i>	M	1	The distribution method used for this MBS Distribution Session. For details, refer to table 5.2.4-2.
conformance Profiles	<i>array(Uri)</i>	O	1..N	A list of profiles indicating the set of features that this MBS Distribution Session conforms to and which the MBS Client needs to support in order to fully decode the MBS Distribution Session. For details refer to clause 12. If not present, the MBS Distribution Session is assumed to conform to the "Baseline MBS Distribution Session Profile" specified in clause C.2.
session Description Locator	<i>AbsoluteUrl</i>	M	1	URL to a Session Description document carrying the <i>Session Description parameters</i> for this MBS Distribution Session as defined in table 4.5.8-1 of TS 26.502 [6]. For details, refer to clause 5.2.5.
application Service Descriptions	<i>array(Application ServiceDescription)</i>	O	1..1	If present, an array containing a set of one or more Application Service Descriptions for the MBS User Service (see clause 5.2.6 and text below this table).
postSession ObjectRepair Parameters	<i>ObjectRepair Parameters</i>	O	0..1	Parameters to be used by the MBSTF Client at reference point MBS-4-UC for post-session unicast object repair of this MBS Distribution Session, as defined in table 4.5.8-2 of TS 26.502 [6]. For details, refer to clause 5.2.8.
availability Infos	<i>array(Availability Information)</i>	O	1..N	Additional information pertaining to the availability of this MBS Distribution Session within the MBS System. For details, refer to clause 5.2.9.
security Description	<i>SecurityDescription</i>	O	0..1	The security parameters for this MBS Distribution Session, as defined in table 4.5.8-1 of TS 26.502 [6]. For details, refer to clause 5.2.10.

Table 5.2.4-2: Semantics of *DistributionMethod* enumeration

Enumerated value	Description
<i>OBJECT</i>	The Object Distribution Method.
<i>PACKET</i>	The Packet Distribution Method.

If the `applicationServiceDescriptions` array is present:

1. The `distributionMethod` property of the `DistributionSessionDescription` shall be set to *OBJECT*.
2. All members of the `applicationServiceDescription` array shall reference an Application Service Entry Point document (see clause 5.2.6A) that describes an MBS Distribution Session using the Object Distribution Method as specified in clause 6.
3. The `sessionDescriptionLocator` property shall point to a Session Description document (see clause 5.2.5) describing an MBS Distribution Session according to clause 6 delivering objects that are directly or indirectly referenced by the Application Service Entry Point document.

5.2.5 Session Description document

Each MBS Distribution Session shall be described by a Session Description document that shall be formatted according to RFC 8866 [8]. The Session Description document may be packaged in the same MBS User Service Bundle (see clause 5.3.1A) as the MBS User Service Descriptions document.

- The session description for the MBS Object Distribution Method is specified in clause 6.2.2
- The session description for the MBS Packet Distribution Method is specified in clause 7.2.3.

5.2.6 Application Service Description data type

Table 5.2.6-1 provides the detailed semantics for the `ApplicationServiceDescription` data type.

Table 5.2.6-1: Semantics of `ApplicationServiceDescription` data type

Property name	Data Type	P	Cardinality	Description
<code>entryPointLocator</code>	<i>Uri</i>	M	1	Reference to an <i>Application Service Entry Point</i> document, for example to a DASH MPD.
<code>contentType</code>	<i>string</i>	M	1	Format of the document referenced by <code>entryPointLocator</code> . This shall be a MIME content type, for example <code>application/dash+xml</code> .

5.2.6A Application Service Entry Point document

The Application Service Entry Point document shall follow a format consistent with the value of `contentType` indicated as specified in clause 5.2.6.

In the case of 3GP-DASH formatted content as defined in TS 26.247 [36], the Application Service Entry Point document may be a unified media manifest which describes Representations available for both MBS reception and unicast retrieval, and this shall be used by MBS Clients compliant with the present document. In practical deployments, different subsets of the Representations described by the unified manifest document may be specified for:

- Availability via MBS delivery only,
- Availability via both unicast and MBS delivery,
- Availability via unicast only, and the Representation is redundant in MBS area coverage, i.e. the usage of these resources does not provide an improved user experience. As an example, this may be a lower bitrate Representation of a media component for which a higher bitrate is available over MBS distribution, and
- Availability always via unicast, and the Representation is supplementary in MBS area coverage, i.e. even in MBS area coverage these resources provide an improved user experience. As an example, this may be a secondary language that is only accessible over unicast.

All resources that are directly or indirectly referenced in the Application Service Entry Point document of this metadata unit that are expected to be retrieved by HTTP GET shall be delivered by at least one of the MBS Distribution Sessions associated with the MBS User Service Description.

5.2.7 Service Schedule Description data type

A Service Schedule Description object describes the distribution schedule of a single instance of the MBS User Service and the availability of content via unicast delivery in terms of:

- Start/stop time point.

The MBS Client can expect to receive MBS data during the described time period(s).

The Schedule Description object may be delivered to the MBS Client prior to the MBS Distribution Session as part of the User Service Description document (see clause 5.2.2) and may be updated subsequently along with that document.

The Service Schedule Description object with the highest version number shall take priority, such that schedule parameters received prior to the MBS Distribution Session are regarded as "initial defaults", and schedule parameters received during the MBS Distribution Session overwrite the earlier received schedule parameters.

The MBS Distribution Session shall be available to the MBS Client during the time interval(s) announced by the session schedule. The MBS Client shall not activate reception of that MBS Distribution Session outside this time window.

Schedule information received in the Schedule Description object shall take precedence over timing information that may have been received in the Session Description object (*t* and/or *r* lines in the SDP).

Table 5.2.7-1 provides the detailed semantics for the **ServiceScheduleDescription** data type which describes a single scheduled instance of the MBS User Service Session.

Table 5.2.7-1: Semantics of ServiceScheduleDescription data type

Property name	Type	P	Cardinality	Description
id	<i>string</i>	M	1	An identifier for the MBS User Service Session instance described by this object, unique within the scope of the MBS System. This value is invariant across all versions of the object.
version	<i>integer</i>	M	1	The version number of this scheduled MBS User Service Session instance. The value increases monotonically whenever a change to the remaining properties needs to be signalled to the MBS Client. Minimum value: 1.
start	<i>DateTime</i>	M	1	The start date–time of this MBS User Service Session instance.
stop	<i>DateTime</i>	M	1	The stop date–time of this MBS User Service Session instance.
cancelled	<i>boolean</i>	O	0..1	When set to <i>true</i> , indicates that this MBS User Service Session instance is cancelled and the MBS Client shall terminate all ongoing MBS User Service procedures, including object reception, object repair and reporting. The MBS Client shall not attempt to join an MBS User Service Session that is marked as cancelled. If omitted the value is <i>false</i> .

5.2.8 Object Repair Parameters data type

Object Repair Parameters configure the Object Repair as defined in clause 6.2.4.

Table 5.2.8-1 provides the detailed semantics for the **ObjectRepairParameters** data type.

Table 5.2.8-1: Semantics of ObjectRepairParameters data type

Property name	Data Type	P	Cardinality	Description
backOffParameters	<i>BackOffParameters</i>	O	0..1	The back-off behaviour of the MBSTF Client when using the Object Repair mechanism (see clause 10.2.2.3). If present, at least one of the contained parameters shall be present. If omitted, no back-off delay is required.
offsetTime	<i>DurationSec</i>	C	1..1	The minimum time that an MBSTF Client shall wait after completion of the download delivery session before making an Object Repair request. If not present the value is assumed to be zero.
randomTimePeriod	<i>DurationSec</i>	C	1..1	The maximum time window length over which an MBSTF Client shall calculate the value of <i>RandomTime</i> to be used as a delay to its Object Repair request in addition to <i>offsetTime</i> . If not present the value is assumed to be zero.
objectDistributionBaseLocator	<i>Uri</i>	O	0..1	The <i>Object distribution base URL</i> of the MBS Distribution as defined in table 4.5.6-2 of TS 26.502 [6].
objectRepairBaseLocators	<i>array(AbsoluteUrl)</i>	M	0..1	The <i>Object repair base URL</i> of the MBS Distribution as defined in table 4.5.6-2 of TS 26.502 [6].

5.2.9 Availability Information data type

The **AvailabilityInformation** data type provides additional information pertaining to the availability of the MBS Distribution Session within the 5G Network:

- The *serviceArea* property declares the one or more service areas in which the MBS Session corresponding to this MBS Distribution Session is currently available.
- In the case of a broadcast MBS Session corresponding to this MBS Distribution Session, the *mbsFSAId* property identifies a preconfigured area within which, and in proximity to, the cell(s) announce the MBS Frequency Selection Area (FSA) ID and its associated frequency.

NOTE: This is used to guide frequency selection by the UE for a broadcast MBS Session.

- The *radioFrequency* property indicates the one or more radio frequencies in the NG-RAN downlink which transmit the MBS Session corresponding to this MBS Distribution Session in the service area(s) identified by the *serviceArea* property.

Table 5.2.9-1 provides the detailed semantics for the **AvailabilityInformation** data type.

Table 5.2.9-1: Semantics of AvailabilityInformation data type

Property name	Type	P	Cardinality	Description
mbsServiceArea	<i>array(MbsServiceArea)</i>	O	1..N	The <i>Target service areas</i> of this MBS Distribution Session, as defined in table 4.5.8-1 of TS 26.502 [6].
mbsFSAId	<i>MbsFsald</i>	O	0..1	The <i>MBS Frequency Selection Area (FSA) Identifier</i> of the (broadcast) MBS Distribution Session in the parent service area, as defined in table 4.5.8-1 of TS 26.502 [6].

Property name	Type	P	Cardinality	Description
radioFrequency	<i>array(Uinteger)</i>	M	1..N	The transmission frequency (expressed in Hertz) associated with the <i>MBS Frequency Selection Area (FSA) Identifier</i> in the parent service area.

5.2.10 Security Description data type

In order to support the transport security for MBS, the **DistributionSessionDescription** object may contain an object of type **SecurityDescription** indicating the User Plane security parameters for the MBS Distribution Session as defined in table 4.5.8-1 of TS 26.502 [6]. The User Plane security mechanisms between the MBS client and the MBSSF are defined in clause W.4.1.3 of TS 33.501 [32] and clause 6 of TS 33.246 [33].

Table 5.2.10-1: Semantics of SecurityDescription object

Property name	Type	P	Cardinality	Description
mBSSFAddresses	<i>array(AbsoluteURL)</i>	M	1..1	A list of key management servers (i.e., MBSSF instances). At least one endpoint address shall be listed.
mBSSServiceKeyInfo	<i>object</i>	M	1..1	Information about the MBS Service Key (MSK).
mSKId	<i>string</i>	M	1..1	Identifies the MSK, as defined in clause 6.3.2.1 of TS 33.246 [33].
mSKDomainId	<i>string</i>	M	1..1	Identifies the MSK domain, as defined in clause 6.3.2.1 of TS 33.246 [33].
uICCKeyManagement	<i>boolean</i>	O	0..1	Indicates whether UICC-based key management is required for the parent MBS Distribution Session. If <i>false</i> or omitted, this is not required.
2GGBAallowed	<i>boolean</i>	O	0..1	Indicates whether the 2G GBA is permitted for the parent MBS Distribution Session. If <i>false</i> or omitted, this is not permitted.
backOffParameters	<i>BackOffParameters</i>	O	0..1	The back-off behaviour of the MBSF Client when requesting MBS Service Keys (MSKs) from the MBSSF (see clause 11.2.2.2). If present, at least one of the contained parameters shall be present. If omitted, no back-off delay is required.
offsetTime	<i>DurationSec</i>	C	1..1	The minimum time that an MBSF Client shall wait after initiating reception of the parent MBS User Distribution Session before sending its first MSK request.
randomTimePeriod	<i>DurationSec</i>	C	1..1	The maximum time window length over which an MBSF Client shall calculate the value of <i>RandomTime</i> to be used as a delay to its first MSK request in addition to <i>offsetTime</i> .

5.3 Delivery of User Service Descriptions

5.3.1 General

This clause defines the delivery of User Service Descriptions, i.e. the delivery of a User Service Descriptions document, as well as additional resources (documents and possibly ancillary media objects) that are necessary to provide all necessary parameters required by an MBS Client to initiate one or more MBS User Services.

The collection of all necessary resources associated with a User Service Descriptions document is referred to as a *User Service Descriptions Bundle* and is specified in clause 5.3.1A.

A User Service Descriptions Bundle may be delivered to the MBS Client via an MBS Distribution Session at reference point MBS-4-MC (see clause 5.3.2) and/or via a regular unicast PDU Session at reference point MBS-5 (see clause 5.3.3) and/or via application-private means at reference point MBS-8.

5.3.1A User Service Descriptions Bundle

The User Service Descriptions Bundle includes a single MBS User Service Descriptions document as well as all other associated resources that are directly referenced by the MBS User Service Description(s) included in that document or indirectly referenced by other resources in the same User Service Bundle. Each associated resource included in the User Service Bundle shall have a URL and shall have a MIME content type.

The set of resources comprising a User Service Bundle shall be aggregated into a single multipart entity, referred to as a *User Service Descriptions Bundle Entity*. Each such resource shall be encapsulated as a distinct body part of this multipart entity. The headers and body of this entity may be conveyed by different application protocols, for example as the headers and body of an HTTP message or as a multicast transmission object. Individual body parts or the entire entity body may be compressed in transit (e.g. using GZip [41]) if the application protocol supports this.

A User Service Descriptions Bundle Entity (hereafter "entity") shall conform to the following requirements:

- The `Content-Type` header of the entity shall be *multipart/related* as specified in RFC 2387 [38].
- The root body part of the entity shall be a User Service Descriptions document as defined in clause 5.2.2.
 - The `type` parameter of this root body part shall be present as specified in RFC 2387 [38] and shall be set to the MIME content type of the User Service Descriptions document specified in clause E.2.
 - The User Service Descriptions document shall be the first body part of the *multipart/related* entity, and hence the `start` parameter specified in RFC 2387 [38] should be absent. If present, the `start` parameter shall be set to the `content-id` of the MBS User Service Description body part.
- Every other body part in the entity shall have a URI indicated in its `Content-Location` header per RFC 2557 [39] so that it may be cross-referenced by other resources in the same entity. The value of this header may be an absolute URI, or it may be expressed as a path that can be resolved relative to the base URI of the enclosing body part using the rules specified in section 5 of [39].
- All dependent resources of the User Service Descriptions described in the User Service Descriptions document shall be included as body parts in the entity. The User Service Descriptions document shall not use external references to any resource that it directly references.

5.3.2 Delivery of User Service Descriptions Bundle Entity in object carousel

In this case, one or more User Service Bundle Entities are delivered repeatedly by the MBSTF to the MBSTF Client via a suitable MBS Distribution Session at reference point MBS-4-MC using the Object Distribution Method, as defined in clause 4.2.4 of TS 26.502 [6]. This is the realisation of the MBS User Service Announcement Channel. The operating mode of this MBS Distribution Session shall be set to *OBJECT_CAROUSEL* and relies on an object manifest to characterize the repetition and the update pattern of the User Service Bundle Entities in the carousel. The object manifest is specified in clause 6.1.2. The objects described by this manifest shall be User Service Bundle Entities formatted as specified in clause 5.3.1A.

As defined in clause 5.4 of TS 26.502 [6], the MBSTF Client announces the arrival of an MBS User Service Description to the MBSF Client using a suitable notification at internal reference point MBS-7', and the MBSF Client may subsequently retrieve the MBS User Service Description from the MBSTF Client via internal reference point MBS-6'. It may do so using procedures equivalent to those specified for unicast retrieval at reference point MBS-5 (see clause 5.3.3). In this case, the MBSTF Client acts as a proxy for the MBS AF.

5.3.3 Delivery of User Service Descriptions Bundle Entity via unicast PDU Session

In this case, a result set of one or more User Service Descriptions Bundle Entities is retrieved by the MBSF Client from the MBS AF at reference point MBS-5 via a regular unicast PDU Session.

The API at this reference point is specified in clause 9.2 and the format of the response is specified in clause 9.2.3. The OpenAPI [14] specification of the User Service Description retrieval API can be found in clause A.2.

6 Object Distribution Method

6.1 General

6.1.1 Overview

The Object Distribution Method supports the transmission of media segments, e.g. CMAF media segments [7] and also non-real-time objects.

The MBS Distribution Session shall be provisioned to accommodate the bit rate of the aggregated object flow, accounting for in-band carriage of metadata units, protocol header overheads, and FEC redundancy (if configured).

6.1.2 Object manifest

An object manifest document describes a list of objects to be distributed in an MBS Distribution Session. The syntax of the object manifest is specified in clause D.1. The semantics of the document are specified in table 6.1.2-1 below.

For each object to be delivered in the MBS Distribution session, the attributes under the *objects* property in table 6.1.2-1 shall be maintained by the MBSTF.

Table 6.1.2-1: Properties of object manifest

Property name	Cardinality	Description
updateInterval	Optional	The time interval, expressed in seconds, according to which the MBSTF attempts to re-acquire the object manifest when pull-based object acquisition is provisioned. Ignored by the MBSTF for push-based object acquisition.
objects	Mandatory	The list of objects to be carouselled from the MBSTF to the MBSTF Client.
locator	Mandatory	The URL from which the object is to be ingested by the MBSTF.
repetitionInterval	Optional	The time interval, expressed in milliseconds, according to which the object is to be periodically sent to the MBSTF Client. If omitted, the MBSTF determines the repetition interval for the object. Ignored by the MBSTF in Object Collection operating mode.
keepUpdatedInterval	Optional	The time interval, expressed in seconds, according to which the MBSTF is expected to check for updates made to the object at its origin (as indicated by <i>locator</i> or a redirect from there to another location). In case of conflicting information, the MBSTF should give precedence in determining the update interval to the HTTP cache control metadata included in the HTTP response from the object origin. Any changes to the origin object that are detected by the MBSTF shall be reflected in the MBS Distribution Session at the earliest opportunity and the replacement of one object with another shall be signalled to the MBSTF Client by means of the object transport protocol provisioned at reference point MBS-4-MC. If omitted, the MBSTF shall not attempt to check for updates to the object. Ignored by the MBSTF in Object Collection operating mode.
earliestFetchTime	Optional	The MBSTF shall fetch the object no sooner than this UTC timestamp. If absent, then the object shall be present at its origin (as indicated by <i>locator</i> or a redirect from there to another location) and the MBSTF may fetch it at a time of its choosing.
latestFetchTime	Optional	The MBSTF shall fetch the object no later than this UTC timestamp. If absent, then the object shall be present at its origin (as indicated by <i>locator</i> or a redirect from there to another location) and the MBSTF may fetch it at a time of its choosing.

6.2 Usage of FLUTE for Object Distribution Method

6.2.1 General

If FLUTE [12] is used to realise the Object Distribution Method, the MBS Distribution Session shall conform to the MBMS Download Profile as defined in clause L.4 of TS 26.346 [7] with the additional requirements in clause 6.2 of the present document.

The usage of this distribution method is identified in the MBS Session Description metadata unit as defined in clause 6.2.3, in particular by the indication of the protocol FLUTE/UDP in combination with the MBS service type.

The MBSTF shall use the Profiled FDT Schema according to clause L.6 of TS 26.346 [7] to describe the object list currently being transmitted in the MBS Distribution Session.

Generally, the end of transmission of an object is the expiry time for the latest FDT instance describing the object. Objects shall be described in an FDT Instance with the *Expires* attribute. Depending on the operating mode (clause 6.2.4), different settings of the expiry time and different numbers of objects per FDT Instance are recommended.

Inclusion of the @Content-MD5 and @File-ETag FDT Instance attributes is optional.

The @File-ETag represents the value of the HTTP entity tag as defined in clause 8.8.3 of RFC 9110 [19] which may also serve as the version identifier of the **File** object described by the FDT Instance.

In order to fetch missing portions of an object, the MBS Client may use the Object Repair mechanism for FLUTE specified in clause 6.2.4. This mechanism is provided by the MBS AS at reference point MBS-4-UC, using the User Service Announcement parameters specified in clause 5.2.8 to identify its endpoint address.

6.2.2 Session Description document for FLUTE

6.2.2.1 General

The Session Description document for FLUTE contains the information needed to activate the reception of an MBS Distribution Session using the FLUTE protocol [12] when this is used to realise the Object Distribution Method. The Session Description document is formatted according to the Session Description Protocol [8] and its content is based on the Session Description parameters specified in clause 7.3 of TS 26.346 [7] with the following restrictions and extensions.

Restrictions:

- The *Mode of MBMS bearer per media* parameter (clause 7.3.2.7 of [7]) shall not be used.
- The *QoE Metrics* (as defined in clauses 7.3.2.0 of [7]) shall not be used
- The *Service-language(s) per media* (clause 7.3.2.9 of [7]) shall not be used. It is assumed that the service languages are described within an application manifest.
- The *Alternative TMGI* (clause 7.3.2.12 of [7]) shall not be used.
- The *Start time* and *End time* of the session (SDP *t*-line) shall indicate a superset of the active times specified in the MBS Schedule Description metadata unit, if present. If there is no schedule specified, both values should be set to zero indicating undefined times.

Extensions:

- When an MBS Session is of MBS Service Type *Broadcast* or when the Multicast MBS Session Type uses a TMGI as MBS Session ID, the *MBS service type of MBS Session* declaration attribute as defined in clause 6.2.2.2 shall be present in the Session Description.

6.2.2.2 MBS service type of MBS Session

A new MBS service type declaration attribute *mbs-servicetype* is defined which results in, e.g.:

- *a=mbs-servicetype:broadcast 123869108302929*

or:

- *a=mbs-servicetype:multicast 123869108302929*

The MBS service type declaration attribute shall be used in Session Description metadata to indicate the type of the corresponding MBS Distribution Session as defined in table 6.2.2.2-1.

Table 6.2.2.2-1: Assignment of mbs-servicetype attribute value

Attribute value	Meaning
<i>multicast</i>	The MBS Distribution Session is delivered using a Multicast MBS Session.
<i>broadcast</i>	The MBS Distribution Session is delivered using a Broadcast MBS Session.

The MBS service type attribute shall be declared at session level in the Session Description metadata unit. The session level attribute applies to all media entries without a media-level occurrence of the *mbs-servicetype* attribute. The Session Description metadata unit shall include only a single instance of MBS service type declaration attribute.

Definition:

- *mbs-service-type-declaration-line* = "a=mbs-servicetype:" ("broadcast"/"multicast" SP *tmgi*) CRLF
- *tmgi* = 1*15DIGIT

EXAMPLE:

UK MCC = 234 (*MCC Digit 1* = 2; *MCC Digit 2* = 3 and *MCC Digit 3* = 4)

Vodafone UK MNC = 15

and, with padding, Vodafone UK MNC = 15F (*MNC Digit 1* = 1; *MNC Digit 2* = 5 and *MNC Digit 3* = F)

MBS Service ID = 70A886

Therefore, TMGI = 70A886 32F451 (Hex) or 123869108302929 (Decimal)

The Temporary Mobile Group Identity (*tmgi*) information element is defined in TS 24.008 [11] including the coding of the fields. Octets 3 to 8 (MBS Service ID, MCC and MNC) shall be placed in the *tmgi* attribute of the MBS service type declaration line, and are encoded as a decimal number. Octet 3 is the most significant octet. Because this is encoded as a decimal number, leading zeros of the MBS Service ID field may be omitted.

6.2.2.3 SDP examples for FLUTE Session

Listing 6.2.2.3-1 provides a full example of an SDP description describing a FLUTE-based MBS Distribution Session using the Object Distribution Method with a TMGI as MBS Session Id.

Listing 6.2.2.3-1: Session Description metadata unit for FLUTE-based MBS Distribution Session with TMGI

```
v=0
o=user123 2890844526 2890842807 IN IP6 2201:056D::112E:144A:1E24
s=Object Distribution session example
i=More information
t=2873397496 2873404696
a=mbs-servicetype:broadcast 123869108302929
a=FEC-declaration:0 encoding-id=1
a=source-filter: incl IN IP6 * 2001:210:1:2:240:96FF:FE25:8EC9
a=flute-tsi:3
m=application 12345 FLUTE/UDP 0
c=IN IP6 FF1E:03AD::7F2E:172A:1E24/1
b=1000
a=lang:EN
a=FEC:0
```

Listing 6.2.2.3-2 provides a second example of an SDP description describing a FLUTE-based MBS Distribution Session using the Object Distribution Method and which indicates that 25% redundant FEC protection is applied to the FEC encoding of the video Segments of the associated DASH-formatted content.

Listing 6.2.2.3-2: Session Description metadata unit for FLUTE-based MBS Distribution Session with TMGI and 25% FEC redundancy

```
v=0
o=user123 2890844526 2890842807 IN IP6 2201:056D::112E:144A:1E24
s=Object Distribution session carrying 2-hour DASH-packaged programme
i=More information
t=3615124600 3615131800
a=mbs-servicetype:broadcast 123869108302929
a=FEC-declaration:0 encoding-id=1
a=FEC-redundancy-level:0 redundancy-level=25
a=source-filter: incl IN IP6 * 2001:210:1:2:240:96FF:FE25:8EC9
a=flute-tsi:5
m=video 10111 FLUTE/UDP 0
c=IN IP6 FF1E:03AD::7F2E:172A:1E24/1
b=2048
a=lang:EN
```

6.2.3 Operating modes for FLUTE-based Object Distribution Method

6.2.3.1 Introduction

The operating modes for the Object Distribution Method are defined in clause 6.1 of TS 26.502 [6]. Operating modes primarily describe the operation of the MBSTF to convert ingest data into an MBS Distribution Session. The following clauses specify how FLUTE is used for each operating mode.

The Object Repair mechanism for FLUTE specified in clause 6.2.4 may be used with the following operating modes:

- *OBJECT_SINGLE*, as specified in clause 6.2.3.2;
- *OBJECT_COLLECTION*, as specified in clause 6.2.3.3; or
- *OBJECT_CAROUSEL*, as specified in clause 6.2.3.4.

The Object Repair mechanism for FLUTE shall not be used with the *OBJECT_STREAMING* mode (as specified in clause 6.2.3.5) in this Release.

6.2.3.2 Single object operating mode

Single object operating mode (*OBJECT_SINGLE*) refers to the case in which a single object is distributed via the Object Distribution Method.

No specific aspects beyond the general provisions in clauses 6.1, 6.2.1 and 6.2.2 apply to this operating mode.

6.2.3.3 Object collection operating mode

Object collection operating mode (*OBJECT_COLLECTION*) refers to the case in which multiple objects are distributed via the Object Distribution Method. The list of objects to be distributed is described by an object manifest document as specified in clause 6.1.2. The objects listed in the manifest are distributed only once. Each object listed in the manifest is pulled by the MBSTF from the location indicated prior to inclusion in the FLUTE Session corresponding to the MBS Distribution Session.

In this operating mode, each FDT Instance delivered in the FLUTE Session should describe all objects that are currently part of the collection.

6.2.3.4 Object carousel operating mode

Object carousel operating mode (*OBJECT_CAROUSEL*) refers to the case in which one or multiple objects are distributed via the Object Distribution Method in a repeated fashion. The list of objects to be distributed is described by an object manifest document as specified in clause 6.1.2. Each object listed in the manifest is pulled by the MBSTF from the location indicated prior to inclusion in the FLUTE Session corresponding to the MBS Distribution Session.

The list of objects described in the manifest may be updated over time by providing a replacement object manifest.

In this operating mode, the FDT Instance should describe all objects that are currently available in the FLUTE Session, considering the potential object update interval.

6.2.3.5 Segment streaming operating mode

Segment streaming operating mode (*OBJECT_STREAMING*) refers to the case for which a sequence of objects, typically representing timed segments from a timed presentation, are distributed using the Object Distribution Method. The sequence of objects is referred to as an *object flow*. This operating mode is recommended for streaming DASH or HLS content to a Media Player in the UE using MBS User Services.

NOTE: This operating mode may also be used for non-media object flows, e.g. in the absence of an Application Service Description.

For each object associated with the object flow to be delivered in the MBS Distribution Session the following information shall be maintained by the MBSTF in an object list:

- The URL used by the MBS-Aware Application to request the object, derived from the object ingest URL.
- The object's *latest availability start time* at the MBS Client. After this time, the MBS-Aware Application may request the full object from the MBSTF Client by using the URL of the object.

This value is determined for each object based on an availability start time at the point of ingest (i.e. reception of first byte of the object) combined with a configured distribution offset.

- The object's *availability end time* from the MBSTF Client. After this time, the object may no longer be requested by the MBS-Aware Application.

This value is determined for each object based on an availability start time at the point of ingest (i.e. reception of first byte of the object) combined with a configured clean-up time.

The object list is typically extended over time, for example as new objects (e.g. media segments) become available.

The object list may, for example, be provided by an explicit object distribution manifest.

NOTE: An object distribution manifest format is not defined in the present document.

The object list may also be defined by a presentation manifest (e.g. DASH MPD), for example in the case of an Application Service, for which the manifest is provided as part of the User Service Description.

When the Application Service Entry Point document is a DASH MPD, this document is used by the MBSTF to update the object list. The DASH MPD may itself be included in the object list, and hence be delivered in band with the media segment objects it describes on the same MBS Distribution Session. If the content of the Application Service Entry Point document changes during an MBS User Data Ingest Session, the updated document shall be reflected in the MBS Distribution Session at the soonest opportunity.

For the segment streaming operating mode, the MBSTF acts as follows based on the object list:

- The MBSTF shall transmit each object in the object list such that the last packet of the delivered FLUTE transmission object (including any FEC recovery packets, when configured) is available at the MBSTF Client no later than its *availability start time*. When the Application Service Entry Point document is a DASH MPD, the availability start time is signalled in this document.
- An FDT Instance object should be sent frequently by the MBSTF, describing all objects of the object list that are not yet fully transmitted.
- The **Content-Location** element in the FDT Instance shall match the URL of the corresponding object in the object list. When the Application Service Entry Point document is a DASH MPD, this shall also match the URL of a DASH Representation described by that document after any template identifiers have been substituted.

The URL may be rewritten by the MBSTF using the Object distribution base URL property of the MBS Distribution Session.

- If an update to the Application Service Entry Point document is delivered as a FLUTE transmission object then the Content-Location element in the FLUTE File Delivery Table for the delivered object shall match the URL of the referenced Application Service Entry Point document.
- The **File@Expires** attribute for each object shall be set such that it is equal to or earlier than its *latest availability start time*.
- The **Cache-Control@Expires** attribute shall be used to indicate the *availability end time of the object*.
- **Content-MD5** and **File-ETag** may optionally be used.

6.2.4 Object Repair mechanism for FLUTE

6.2.4.1 General

In order to fetch missing portions of an object, the MBS Client shall support the post-session Object Repair procedure as specified in clause 6.2.4.2.

If the User Service Description provides the Object Repair parameters specified in clause 5.2.8, then:

- An MBS AS instance assigned to each active MBS User Service Session shall host all objects transmitted on its MBS Distribution Session(s) at the network location *location*.
- An MBS Client shall initiate the post-session Object Repair procedure as needed according to the procedure specified in clause 6.2.4.2.

NOTE: The use of **File@Alternate-Content-Location-1** and **File@Alternate-Content-Location-2** to advertise the Object Repair parameters in the FLUTE FDT instance as defined in TS 26.346 [7] is not supported in MBS User Services.

6.2.4.2 Post-session Object Repair procedure

The post-session Object Repair procedure is aligned with the File Repair procedures defined in clause 9.3 of TS 26.346 [7].

It is assumed that a FLUTE File Delivery Table (FDT) Instance document as defined in clauses L.4 and L.6 of TS 26.346 [7] is available in the MBS Client that contains at least the following information:

- **FDT@Expires** attribute indicating the expiry date of the FDT Instance.
- For one or multiple transmission objects in the FLUTE session, a **File** element with:
 - **File@TOI** attribute indicating the ALC Transport Object Identifier of the transmission object.
 - **File@Content-Location** attribute indicating the URI of the transmission object.
 - **File@Content-Length** attribute indicating the size (in bytes) of the transmission object.
 - **File@File-ETag** attribute indicating the entity tag value of the transmission object.

NOTE: Object Repair without the FDT as, for example, defined in clause 9.3.9 of TS 26.346 [7], is not specified by the present document.

Then, based on the introduction in clause 9.3.1 of TS 26.346 [7], the MBS Client generally acts as follows.

1. The MBS Client identifies the end of the MBS Distribution Session. The latest time for this is the value of the **@Expires** attribute indicated in the root element of the FDT Instance document. However, according to clause 9.3.2 of TS 26.346 [7], an MBS Client may determine an earlier end of transmission of files,
 - a) if an end-of-session signal (A-flag) is received in an ALC/FLUTE header in the ongoing Object Distribution Session before the FDT instance expires; or
 - b) if the end of file transmission time is reached according to the service schedule description specified in clause 5.2.7.
2. The MBS Client identifies that data is missing from an MBS Object Distribution Session for one or multiple FLUTE transmission objects delivered in the Object Distribution Session following the principles in clause 9.3.3 of TS 26.346 [7].
3. The MBS Client shall select an MBS AS instance *repair URL* randomly from the list of **objectRepairBaseLocators** if present in the **ObjectRepair** object defined in table 5.2.8-1.
4. For each incomplete FLUTE transmission object defined by a **File** element in the FDT Instance document and as identified in step 2:
 - a) The MBS Client shall form the network location *location* (URL) of the repair object as defined in clause 6.4.2.4 using (i) the value of the **File@Content-Location** attribute, (ii) the *repair URL* selected in step 3 (if any) and (iii) the value of **objectDistributionBaseLocator** as *distribution URL* if present in the **ObjectRepair** object defined in table 5.2.8-1.
 - b) The MBS Client shall define an appropriate *list of byte ranges Range[M]* with *M* the number of independent ranges and *Range[m].start* the start of the *m*th range and *Range[m].end* the end of the *m*th range from the repair object using the list of received symbols and additional information from the FDT as defined in clause 6.4.2.5.
5. The MBS Client shall then use the object repair procedures as defined as defined in clause 10.2.2 using the following parameters:
 - The **offsetTime** and **randomTimePeriod** parameters indicated in the **ObjectRepair** object as defined in table 5.2.8-1.
 - For each incomplete FLUTE transmission object in the FDT Instance document, the MBSTF Client shall use from the corresponding FDT **File** entry the network location *location* formed in step 4a, the size of the transmission object (in bytes), the entity tag value and the minimal *list of byte ranges Range[M]* determined in step 4b.

6. The MBS Client uses the received *list of byte ranges* and the received data in the MBS Object Distribution Session to recover the missing object as defined in clause 6.4.2.6.

6.2.4.3 In-session object repair procedure

This procedure is for future study.

6.2.4.4 Network location of repair object

The determination of the network location *location* of the repair object uses the **File@Content-Location** attribute in the FDT Instance document, a *repair base URL* (if present) and a *distribution base URL* (if present) as follows:

- If the *repair base URL* is not present, then the network location of the repair object is the value of **File@Content-Location**.
- If the *repair base URL* is present, but not the *distribution base URL*, then the network location of the repair object is the value of **File@Content-Location** with the Retrieval URI according to RFC 3986 [34] replaced with the *repair base URL*.
- If both the *repair base URL* and the *distribution base URL* are both present, then the network location of the repair object is the value of **File@Content-Location** with the Base URI according to RFC 3986 [34] being the *distribution base URL* replaced with the *repair base URL*.

Additionally, if the **File@Content-Encoding** attribute is present in the FDT Instance document and is set to the value *gzip*, then a ".gz" extension shall be appended to the path part of the repair object's *location* prior to the query part of the URL, if any. In this case, the GZipped [41] version of the repair object shall be hosted on the MBS AS. The MBSTF Client shall only use this in connection with a byte range request if the **@File-ETag** attribute is present in the FDT Instance of that object, for use as the entity-tag in the request. Otherwise, the MBSTF Client shall request the complete object from the MBS AS.

6.2.4.5 Byte range determination

The selection of the byte range is aligned with clause 9.3.6.2 of TS 26.346 [7]. This clause focuses on the selection of a sufficient byte range for an individual FLUTE transmission object requiring repair. For each damaged transmission object, FDT parameters are assumed to be available.

NOTE: This clause does not address protocol-related aspects specified in clause 9.3.6.2 of TS 26.346 [7]; these are specified in clause 10 of the present document.

The MBS Client shall identify a *minimal set of source symbols* identified by a list of Encoding Symbol Identifiers (ESIs) that, combined with the already received symbols, allows the FEC decoder to recover the file as follows:

- When the Compact No-Code FEC scheme is used (i.e., if the FDT parameter **@FEC-OTI-FEC-Encoding-ID** is set to 0), the MBS Client shall consider already received source symbols when making the determination of the repair byte range symbols. The MBS Client shall identify the ESIs of the missing source symbols which constitute the minimal set.
- When the Raptor FEC scheme is used (i.e., if the FDT parameter **@FEC-OTI-FEC-Encoding-ID** is set to 1), the MBS Client shall consider already received source and repair symbols when making the determination of the repair byte range required. In particular, the MBS Client shall identify a minimal set of source symbols that, combined with the already received symbols, allows the Raptor FEC decoder to recover the file.

NOTE: One way to determine a minimum set of source symbols for repair is described in clause 6.1.3.1 of TR 26.946 [35]. However, any set of symbols that has the same number of necessary source symbols as the set determined according to clause 6.1.3.1 of [35] may be considered a minimal set.

Once a minimal set of sufficient source symbols for recovery is determined as an ordered list of ESIs, $SS[0], \dots, SS[N-1]$, with N the total number of source symbols, the list of source symbols is converted to an ordered list of M independent byte ranges $Range[M]$ indexed from 0 in which $Range[m].start$ is the start of the m th range and $Range[m].end$ is the end of the m th, range. In the pseudocode presented in listing 6.2.4.5-1, T is the value of the **File@FEC-OTI-Encoding-Symbol-Length** FDT attribute, and F is the value of the **File@Content-Length** FDT attribute.

Listing 6.2.4.5-1: Pseudocode for determining repair byte ranges

```

m=-1;
for (n=0; n < N; n++) {
  if (n > 0 && SS[n] == (SS[n-1] + 1)) { // Extend same range
    Range[m].end += T
  }
  else { // New Range
    m++;
    Range[m].start = SS[n] * T;
    Range[m].end = Range[m].start + T;
  }
}
Range[m].end = min(F, Range[m].end)

```

$Range[M]$ then describes the smallest list of byte ranges needed to recover the damaged FLUTE transmission object.

NOTE: When $M = 1$, $Range[0].start = 0$ and $Range[0].end = F$ the range describes the entire object.

6.2.4.6 Object recovery procedure

Using the byte ranges recovered from the MBS AS, the MBSTF Client shall:

1. Convert the received data into source symbols with appropriate ESIs.
2. Apply FEC decoding using the originally received symbols and those recovered from the MBS AS.
3. Recover the transmission object together with the corresponding metadata in the FDT.
4. Make the recovered object (along with its metadata) available to the MBS-Aware Application from its Media Server via reference point MBS-7.

7 Packet Distribution Method

7.1 General

The Packet Distribution Method reuses different delivery concepts from TS 26.346 [7]. Additional distribution methods may be defined in future.

7.2 Re-using MBMS Delivery Method as Packet Distribution Method

7.2.1 General

The Packet Distribution Method combines three different delivery methods of TS 26.346 [7] (namely the MBMS Streaming Delivery Method, Group Communication Delivery Method and Transparent Delivery Method) into a single distribution method, with a set of modifications.

For the Packet Distribution Method, the MBSTF may handle the ingested content on two different protocol layers according to the operating mode provisioned for the MBS Distribution Session:

- *Proxy mode*: The MBSTF handles UDP packet payloads and forwards UDP packet payloads from ingest into the MBS Distribution Session. The MBSTF may use different UDP ports for the MBS Distribution Session. The MBSTF re-uses the Proxy Mode of the Transparent Delivery Method as defined in clause 8B of [7].
- *Forward-only mode*: The MBSTF receives complete IP packets and forwards the ingested packets as MBS PDUs. The MBSTF re-uses the Group Communication Delivery Method as defined in clause 8A of [7] and the Forward-Only Mode of the Transparent Delivery Method as defined in clause 8B of [7].

NOTE: A specific treatment of RTP sessions, for example as provided by the MBMS Streaming Delivery Method, is not provided by MBS User Services. However, RTP sessions may be delivered in proxy or forward-only mode.

7.2.2 Void

7.2.3 Session Description

7.2.3.1 General

The Session Description document contains the needed information to activate the reception of a Packet Distribution Method. The Session Description document is formatted according to the Session Description Protocol [8]. The Session Description document for the Packet Distribution Method is based on the Session Description parameters as defined in clauses 8.3, 8A.3 and 8B.3 of TS 26.346 [7] with the following restrictions and extensions.

Restrictions:

- The *Mode of MBMS bearer per media* parameter (clauses 8.3.1.5 and 8B.3.2 of [7]) shall not be used.
- The *QoE Metrics* (as defined in clauses 8.3.2.1 and 8.4 of [7]) shall not be used.
- ROHC header compression (as defined in clauses 8A.4 and 8B.4 of [7]) shall not be used.

NOTE: ROHC is handled by RAN in 5MBS.

- The *Alternative TMGI* (clause 7.3.2.12 of [7]) shall not be used.
- The *Start time* and *End time* of the session (SDP *t* line) shall indicate a superset of the active times specified in the MBS Schedule Description metadata unit, if present. If there is no schedule specified, both values should be set to zero indicating undefined times.

Extensions:

- When the MBS User Service is of MBS Service Type *Broadcast* or when an MBS User Service of type *Multicast* uses a TMGI as its MBS Session ID, the *MBS service type of MBS Session* declaration attribute as defined in clause 6.2.2.2 shall be present in the Session Description.

7.2.3.2 SDP examples for Packet Distribution Method

Below is a full example of SDP description describing the media streams part of an MBS Packet Distribution session for RTP streaming:

Listing 7.2.3.2-1: Session description for RTP streaming

```
v=0
o=ghost 2890844526 2890842807 IN IP4 192.168.10.10
s=3GPP MBS Packet Distribution SDP Example
i=Example of MBS Packet Distribution SDP file
u=http://www.infoserver.example.com/ae600
e=ghost@mailserver.example.com
c=IN IP6 FF1E:03AD::7F2E:172A:1E24
t=0 0
b=AS:77
a=mbs-mode:broadcast 123869108302929
a=source-filter: incl IN IP6 * 2001:210:1:2:240:96FF:FE25:8EC9
m=video 4002 RTP/AVP 96
b=TIAS:62000
b=RR:0
b=RS:600
a=maxprate:17
a=rtpmap:96 H264/90000
a=fmtp:96 profile-level-id=42A01E; packetization-mode=1; sprop-parameter-sets=Z0IACpZTBYmI,aMljiA==
```


The following is a full example of SDP description for transparent streaming with two MPEG-2 Transport Streams:

Listing 7.2.3.2-2: Session description for MPEG-2 Transport Stream

```
v=0
o=ghost 2890844526 2890842807 IN IP4 192.168.10.10
s=3GPP MBS Transport-only SDP Example
i=Example of MBS transport-only SDP file
u=http://www.infoserver.example.com/ae600
e=ghost@mailserver.example.com
c=IN IP6 FF1E:03AD::7F2E:172A:1E24
t=3034423619 3042462419
b=AS:8000000
a=mbs-mode:broadcast 123869108302929

a=source-filter: incl IN IP6 * 2001:210:1:2:240:96FF:FE25:8EC9
m=video 4002 UDP/RTP/AVP 96
b=TIAS:4000000
a=mms-framing-header:0 2
a=rtpmap:100 MP2T/90000
m=video 4002 RTP/AVP 98
b=TIAS:4000000
a=rtpmap:100 MP2T/90000
a=MBS-framing-trailer:0 2
```

8 General aspects of APIs for MBS User Services

8.1 HTTP resource URIs and paths

The resource URI used in each HTTP request to the API provider shall have the structure defined in subclause 4.4.1 of TS 29.501 [16], i.e.:

{apiRoot}/ {apiName}/ {apiVersion}/ {apiSpecificResourceUriPart}

with the following components:

- *{apiRoot}* shall be set as described in TS 29.501 [16].
- *{apiName}* shall be set as defined by the following clauses.
- *{apiVersion}* shall be set to "v1" in this release.
- *{apiSpecificResourceUriPart}* shall be set as described in the following clauses.

8.2 Usage of HTTP

8.2.1 HTTP protocol version

8.2.1.1 General

Content interfaces at reference points specified in the present document shall expose an HTTP/1.1 [21] endpoint to API clients. They may additionally expose an HTTP/2 [22] endpoint, including support for the HTTP/2 starting mechanisms specified in section 3 of [22]. The API client may choose any supported HTTP protocol version. TLS [24] shall be supported on these interfaces and, where the option to use cleartext HTTP is available in the version of HTTP selected by the API client, it should opt for HTTPS interactions in preference.

8.2.1.2 MBSF

The HTTP protocol version used to invoke *Nmbsf* service operations on the MBSF at reference point Nbm10 is specified in clauses 6.1.2.1 and 6.2.2.1 of TS 29.580 [17].

8.2.1.3 MBSTF

The HTTP protocol version used to invoke *Nmbstf* service operations on the MBSTF at reference point Nmb2 is specified in clause 6.1.2.1 of TS 29.581 [18].

The endpoint exposed by the MBSTF to the MBSF at reference point Nmb2 for the purpose of pushing object manifests into the MBSTF shall comply with the general provisions specified in clause 8.2.1.1.

The endpoint exposed by the MBSTF to the MBS Application Provider (AF/AS) at reference point Nmb8 for the purpose of pushing objects into the MBSTF shall comply with the general provisions specified in clause 8.2.1.1.

8.2.1.4 MBS AF

The endpoint exposed by the MBS AF to the MBSF Client at reference point MBS-5 for the purpose of retrieving User Service Descriptions using the API specified in clause 9.2 shall comply with the general provisions specified in clause 8.2.1.1.

Editor's Note: Possibly add MBS-10 here to specify the use of HTTP in the User Plane security procedure, or else specify the use of this reference point in a new clause 8.2.1.6 specifically for the MBSSF.

The endpoint exposed by the MBS AF to the MBSTF at reference point MBS-11 for the purpose of retrieving object manifests and User Service Descriptions shall comply with the general provisions specified in clause 8.2.1.1.

All responses from the MBS AF that carry a message body shall include a strong entity tag in the form of an `ETag` response header field and a modification timestamp in the form of a `Last-Modified` response header per section 8.8 of RFC 9110 [19].

All endpoints exposed by the MBS AF shall support conditional HTTP requests using the header fields `If-none-Match` and `If-Modified-Since` per section 13 of RFC 9110 [19].

8.2.1.5 MBS AS

The endpoint exposed by the MBS AS to the MBSTF Client at reference point MBS-4-UC for the purpose of unicast object repair shall comply with the general provisions specified in clause 8.2.1.1.

Byte range requests per section 14 of RFC 9110 [19] shall be supported by the MBS AS at reference point MBS-4-UC for the purpose of efficient unicast object repair by the MBSTF Client.

8.2.1.6 MBSSF

The endpoint exposed by the MBSSF to the MBSF Client at reference point MBS 10 for the purpose of MBS Service Key (MSK) retrieval shall comply with the general provisions specified in clause 8.2.1.1.

All responses from the MBSSF that carry a message body shall include a strong entity tag in the form of an `ETag` response header field and a modification timestamp in the form of a `Last-Modified` response header per clause 8.8 of RFC 9110 [19].

All endpoints exposed by the MBSSF shall support conditional HTTP requests using the header fields `If-none-Match` and `If-Modified-Since` per clause 13 of RFC 9110 [19].

8.2.2 HTTP message bodies for API resources

Individual APIs in the present document specify the syntax and encoding of HTTP request and response message bodies. MIME content types for a subset of these are registered in annex E.

Message bodies compressed using GZip [41] content encoding may be returned by HTTP servers if the client indicates that this is acceptable per clause 12.5.3 of RFC 9110 [19]. In this case the content encoding is indicated as specified in clause 8.4 of RFC 9110 [19].

8.2.3 Usage of HTTP headers

8.2.3.1 General

Standard HTTP headers shall be used in accordance with clause 5.2.2 of TS 29.500 [15], encoded appropriately for the version of HTTP in use.

8.2.3.2 User Agent identification

8.2.3.2.1 General

When one of the MBS User Services functions defined in TS 26.502 [6] makes requests to an HTTP endpoint specified in the present document, it shall identify itself to the HTTP server using a *User-Agent* request header field (see section 10.1.5 of RFC 9110 [19]) that includes a *product* identifier indicating the type of client function making the request in its *token* element.

The optional *product-version* suffix shall be present and should indicate the version number of the present document (without the leading "V") with which the client implementation complies and shall, at minimum, indicate the 3GPP release number with which the implementation complies.

The *User-Agent* request header field may also include *comment* elements (see section 5.6.5 of RFC 9110 [19]) following the above specified *product* identifier, as well as additional vendor-specific *product* identifiers and *comment* elements compliant with the syntax and guidance provided in section 10.1.5 of RFC 9110 [19].

EXAMPLE 1: MBSTF/17.4.0 (build2114) libhttp/1.23.2

EXAMPLE 2: MBSFClient/17

8.2.3.2.2 MBSF identification

When invoking the *Nmbstf* service at reference point Nmb2, the MBSF identifies itself to the MBSTF using a *User-Agent* request header as specified in clauses 6.1.2.2.1 and 6.2.2.2.1 of TS 29.580 [17].

8.2.3.2.3 MBSTF identification

When ingesting content using the pull-based object acquisition method (see table 4.5.6-2 of TS 26.502 [6]), the MBSTF shall identify itself to the MBS Application Provider (AF/AS) at reference point Nmb8 and to the MBS AF at reference point MBS-11 using a *User-Agent* request header field that complies with the general provisions specified in clause 8.2.3.2.1. The product identifier *token* shall be set to the value MBSTF.

8.2.3.2.4 MBSF Client identification

The MBSF Client shall identify itself to the MBS AF at reference point MBS-5 and to the MBSSF at reference point MBS-10 using a *User-Agent* request header field that complies with the general provisions specified in clause 8.2.3.2.1. The product identifier *token* shall be set to the value MBSFClient.

8.2.3.2.5 MBSTF Client identification

The MBSTF Client shall identify itself to the MBS AS at reference point MBS-4-UC using a *User-Agent* request header field that complies with the general provisions specified in clause 8.2.3.2.1. The product identifier *token* shall be set to the value MBSTFClient.

8.2.3.3 Server identification

8.2.3.3.1 General

When one of the MBS User Services functions defined in TS 26.502 [6] responds to an HTTP request, it shall identify itself to the requesting client using a *Server* response header (see section 10.2.4 of RFC 9110 [19]) that includes a *product* identifier indicating the type and host name of the responding server in its *token* element. The server type and host name shall be separated by a single hyphen ('-') character.

The optional *product-version* suffix shall be present and should indicate the version number of the present document (without the leading "V") with which the server implementation complies and shall, at minimum, indicate the 3GPP release number with which the implementation complies.

The *Server* response header field may also include *comment* elements (see section 5.6.5 of RFC 9110 [19]) following the above specified *product* identifier, as well as additional vendor-specific *product* identifiers and *comment* elements compliant with the syntax and guidance provided in section 10.2.4 of RFC 9110 [19].

EXAMPLE 1: MBSTF-vm10665.mno.net/17.4.0 (api=1.0.0) libsbi/2.1 libnf/1.2

EXAMPLE 2: MBSAF-vm10240.mno.net/17 (api=1.0.0) libsbi/2.1 libnf/1.2

8.2.3.3.2 MBSF identification

When responding to *Nmbssf* service operations made by the MBS Application Provider (AF/AS) at reference point Nmb10, the MBSF's *Server* response header is set as specified in clauses 6.1.2.2.1 and 6.2.2.2.1 of TS 29.580 [17].

8.2.3.3.3 MBSTF identification

When responding to *Nmbstf* service operations made by the MBSF at reference point Nmb2, the MBSTF's *Server* response header is set as specified in clause 6.1.2.2.1 of TS 29.581 [18].

When acknowledging objects published using the push-based object acquisition method by the MBSF at reference point Nmb2 or by the MBS Application Provider (AF/AS) at reference point Nmb10, the MBSTF shall identify itself using a *Server* response header field that complies with the general provisions specified in clause 8.2.3.3.1. The product identifier token shall be set to the value MBSTF.

8.2.3.3.4 MBS AF identification

The MBS AF shall identify itself to the MBSF Client at reference point MBS-5 and to the MBSTF at reference point MBS-11 using a *Server* response header field that complies with the general provisions specified in clause 8.2.3.3.1. The product identifier token shall be set to the value MBSAF.

8.2.3.3.5 MBS AS identification

The MBS AS shall identify itself to the MBSTF Client at reference point MBS-4-UC using a *Server* response header field that complies with the general provisions specified in clause 8.2.3.3.1. The product identifier token shall be set to the value MBSAS.

8.2.3.4 Support for conditional HTTP GET requests

The provisions in clause 5.2.2 of TS 29.500 [15] relating to conditional GET requests using the *If-None-Match* and *If-Modified-Since* request headers apply to all Network Functions in the MBS System. In particular:

- This is specified for invocations of the *Nmbssf* service at reference point Nmb10 in clauses 6.1.2.2.1 and 6.2.2.2.1 of TS 29.580 [17].
- This is specified for invocations of the *Nmbstf* service at reference point Nmb2 in clause 6.1.2.2.1 of TS 29.581 [18].

All responses from the MBS AF at reference points MBS-5 and MBS-11 that carry a resource message body shall include:

- a strong entity tag for the resource, conveyed in an `ETag` response header per section 8.8.3 of RFC 9110 [19],
- a resource modification timestamp, conveyed in a `Last-Modified` response header per section 8.8.2 of RFC 9110 [19], and
- a predicted time-to-live period for the resource, conveyed in a `Cache-Control: max-age` response header per section 5.2 of RFC 9111 [20].

All API endpoints on the MBS AF that expose the HTTP `GET` method shall support conditional requests using the `If-None-Match` and `If-Modified-Since` request headers per section 13.1.2 and 13.1.3 respectively of RFC 9110 [19]. API clients should not attempt to revalidate their cached copy of a resource using a conditional `GET` request before the indicated time-to-live period has elapsed.

8.2.3.5 Support for conditional HTTP POST, PUT, PATCH and DELETE requests

The provisions in clause 5.2.2 of TS 29.500 [15] relating to conditional `POST`, `PUT`, `PATCH` and `DELETE` requests using the `If-Match` request header apply to all Network Functions in the MBS System. In particular:

- This is specified for invocations of the *Nmbssf* service at reference point Nmb10 in clauses 6.1.2.2.1 and 6.2.2.2.1 of TS 29.580 [17].
- This is specified for invocations of the *Nmbstf* service at reference point Nmb2 in clause 6.1.2.2.1 of TS 29.581 [18].

8.2.3.3.6 MBSSF identification

The MBSSF shall identify itself to the MBSF Client at reference point MBS 10 using a `Server` response header field that complies with the general provisions specified in clause 8.2.3.3.1. The product identifier token shall be set to the value MBSSF.

8.3 HTTP response codes

Guidelines for error responses to the invocation of APIs of NF services are specified in clause 4.8 of TS 29.501 [16]. API-specific error responses are specified in the respective technical specifications.

9 MBS AF APIs (MBS-5)

9.1 General

This clause specifies the network APIs exposed by the MBS AF with reference to the general provisions of clause 8 as they apply to the reference point in question.

9.2 User Service Description retrieval API

9.2.1 General

In the case where *Service announcement modes* (see table 4.5.3-1 of TS 26.502 [6]) indicates that the MBS User Service Announcement for an MBS User Service is advertised at reference point MBS-5, the User Service Description retrieval API is used by the MBSF Client to retrieve a User Service Descriptions Bundle from the MBS AF that enable reception of the MBS User Service(s) to be initiated by the MBSF Client.

In the case where *Service announcement modes* (see table 4.5.3-1 of TS 26.502 [6]) indicates that the MBS User Service Announcement for an MBS User Service is advertised via the User Service Announcement Channel at reference point MBS-4-MC, the User Service Description retrieval API is used by the MBSF Client at reference point

MBS-7' to retrieve a User Service Descriptions Bundle from the MBSTF Client that enable reception of the MBS User Service(s) to be initiated by the MBSF Client.

In the absence of prior knowledge about which Service announcement mode(s) are configured for currently provisioned MBS User Services, an MBSF Client may use either or both of the above procedures to proactively retrieve User Service Descriptions Bundles.

9.2.2 Resource structure

The User Service Description retrieval API is accessible from the MBS AF at reference point MBS-5 and from the MBSTF Client at reference point MBS-7' through the following URL base path:

{apiRoot}/3gpp-mbs-user-service-discovery/{apiVersion}/

The operations and the corresponding HTTP methods in table 9.2.2-1 are supported through the above API base path. In each case, the sub-resource path specified in the second column shall be appended to the URL base path. The provisions of clause 8.2.3.4 shall apply to all operations.

Table 9.2.2-1: Operations supported by the User Service Description retrieval API

Operation	Sub-resource path	Allowed HTTP method(s)	Description
Discover User Service Descriptions	<i>user-service-descriptions?{queryParameters}</i>	GET	Used to discover a set of User Service Descriptions that match a set of filtering criteria corresponding to at least one of the query parameters specified in table 9.2.2-2. Multiple query parameters may be concatenated using the ampersand ('&') character as a separator with the resulting semantics of logical conjunction (i.e., Boolean AND). It is an error to invoke this operation with no query parameters. A User Service Descriptions Bundle (see clause 9.2.3.1) is returned containing User Service Descriptions matching all of the specified filtering criteria and their dependent resources, which may be empty if none match all of the criteria.
Retrieve User Service Description	<i>user-service-descriptions/{externalServiceId}</i>	GET	The <i>{externalServiceId}</i> uniquely identifies a single User Service Description resource in the MBS AF. If the requested User Service is known to the MBS AF, a User Service Descriptions Bundle (see clause 9.2.3.2) is returned comprising a single User Service Description and its dependent resources. Otherwise, a suitable HTTP error response code is returned.

Table 9.2.2-2 specifies the query parameters that may be combined with the operations specified in table 9.2.2-1.

Table 9.2.2-2: Query parameters supported by the User Service Description retrieval API

Applicable operation	Filter name	Query parameter	Description
Discover User Service Descriptions	Service class	<i>service-class={serviceClassTermId}</i>	Used to select User Service Descriptions that are tagged with the supplied service class term identifier (see table 4.5.3-1 of TS 26.502 [6]), which is expressed as a fully-qualified URI string from a controlled vocabulary (e.g., OMNA BCASST Service Class [25]) with appropriate URL encoding applied.
	Conformance profile	<i>profile={conformanceProfileTermId}</i>	Used to select User Service Descriptions that include Distribution Session Descriptions tagged with the supplied conformance profile term identifier (see clause 12), which is expressed as a fully-qualified URI string from a controlled vocabulary (e.g., clause C.2) with appropriate URL encoding applied.

9.2.3 Response format

9.2.3.1 User Service Descriptions result

The HTTP response message shall convey a User Service Descriptions Bundle Entity as specified in clause 5.3.1A in which the root body part is a User Service Descriptions document that includes a User Service Description for each User Service that matches the filtering criteria. This response message shall conform to the following requirements:

- The User Service Descriptions Bundle Entity shall include any dependent resources as additional body parts per clause 5.3.1A.
- The headers of the User Service Descriptions Bundle Entity shall be conveyed in the headers of the HTTP response message.
- A strong entity tag shall additionally be conveyed in the headers of the HTTP response per clause 8.2.3.4.
- The body of the User Service Descriptions Bundle Entity shall be conveyed in the body of the HTTP response message.
- The MBS AF may apply GZip [41] encoding to individual body parts of the User Service Descriptions Bundle Entity, or to the entity as a whole, subject to the provisions of clause 8.2.2.

9.2.3.2 User Service Description result

The HTTP response message shall convey a User Service Bundle Entity as specified in clause 5.3.1A in which the root body part is a User Service Descriptions document that includes a single User Service Description. This response message shall conform to the following requirements:

- The User Service Descriptions Bundle Entity shall include any dependent resources as additional body parts per clause 5.3.1A.
- The headers of the User Service Descriptions Bundle Entity shall be conveyed in the headers of the HTTP response message.
- A strong entity tag shall additionally be conveyed in the headers of the HTTP response per clause 8.2.3.4.
- The body of the User Service Descriptions Bundle Entity shall be conveyed in the body of the HTTP response message.
- The MBS AF may apply GZip [41] encoding to individual body parts of the User Service Descriptions Bundle Entity, or to the entity as a whole, subject to the provisions of clause 8.2.2.

10 MBS AS protocols (MBS-4-UC)

10.1 General

This clause specifies the protocols between the MBSTF Client and the MBS AS with reference to the general provisions of clause 8 as they apply to these functional entities at reference point MBS-4-UC.

The following protocols are defined in this release:

- Unicast Object Repair protocol (clause 10.2) between the MBSTF Client and the MBS AS when the delivery of one of several objects in an MBS download delivery session using the Object Distribution Method was not completely successful.

10.2 Unicast Object Repair protocol

10.2.1 Overview

This clause defines the unicast Object Repair retrieval protocol between the MBSTF Client and the MBS AS at reference point MBS-4-UC when the delivery of one of several objects in an MBS User Service Session was not completely successful. The unicast Object Repair protocol is based on HTTP [19] and the general requirements specified in clause 8.2 and 8.3 of the present document shall apply to all interactions between these two functional entities at this reference point.

- An MBSTF Client shall implement the procedures defined in clause 10.2.2 to support the object repair protocol.
- An MBS AS shall implement the procedures defined in clause 10.2.3 to support the object repair protocol.

10.2.2 MBSTF Client procedures

10.2.2.1 General

This clause defines the MBSTF Client procedures for the unicast Object Repair protocol.

It is assumed that at a specific time instance, the MBSTF Client is triggered to initiate the Object Repair procedures based on the parameters defined in clause 10.2.2.2.

Once initiated, the MBSTF Client shall calculate a random *back-off time* using the *offsetTime* and *randomTimePeriod* parameters as defined in clause 10.2.2.3. The MBSTF Client shall start making repair requests as described in clause 10.2.2.3 at the computed *back-off time*. The MBSTF Client shall not start sending any repair request messages before this calculated time *back-off time* has elapsed.

10.2.2.2 Parameters

The following parameters are assumed to be available to the MBSTF Client for unicast Object Repair:

- The *offsetTime* parameter and the *randomTimePeriod* parameter for the back-off time computation.
- For each object with missing data:
 - If available to the MBSTF Client in the MBS Distribution Session metadata, an *entity tag* value for the damaged object.
 - The *length* (in bytes) of the damaged object.
 - The network location *location* referring to a corresponding object hosted on the MBS AS.
 - A minimally sized *list of byte ranges* of dimension *Range[M]* with *M* the number of independent ranges and *Range[m].start* the start of the range and *Range[m].end* the end of the range from the repair object.

10.2.2.3 Back-off time computation

The computation of the *back-off time* uses the *offsetTime* parameter and the *randomTimePeriod* parameter. In particular, the MBS Client shall implement the back-off timing computation specified in clause 9.3.4 of TS 26.346 [7] as follows:

- The value of the *offsetTime* parameter is used as the *OffsetTime* as defined in clause 9.3.4.1 of TS 26.346 [7].
- The value of the *randomTimePeriod* parameter is used as the *Random Time Period* as defined in clause 9.3.4.2 of TS 26.346 [7] to determine a *RandomTime*.
- The back-off time is the sum of *OffsetTime* and *RandomTime*.

10.2.2.4 MBSTF Client unicast repair request

The MBSTF Client sends one or more requests to an MBS AS instance requesting transmission of data that allows recovery of missing object data. All unicast Object Repair requests and responses for a particular MBS Distribution Session shall take place in a single HTTP session [19].

The MBSTF Client shall start the initial request once initiated after the back-off time, if any, has elapsed (see clause 10.2.2.3). If there is more than one repair request to be made, these are sent one straight after another without further delay.

The MBSTF Client shall send separate HTTP GET requests for each damaged object.

For each damaged object, based on the parameters in clause 10.2.2.2, the MBSTF Client shall act as follows:

1. If the requested range is the entire object, i.e. $M = 1$, $Range[0].start = 0$ and $Range[0].end = F$, with F the value of the *content length*, then the HTTP GET method shall be used.
2. If the requested range is only a subset of the object, a HTTP partial GET request shall be used with the Range request header (as specified in section 14.1.2 of RFC 9110 [19]) present.
 - If $M > 1$, the MBSTF Client shall include multiple byte range requests within a single partial GET request. In particular, the MBSTF Client shall include as many byte ranges as possible in a single HTTP request message without exceeding 2048 bytes for all request headers. If this length is exceeded, the request shall be split into as few requests as possible without any of those exceeding the 2048-byte limit.
3. If the *entity tag* is available to the MBSTF Client for the damaged object, it shall be used as the entity tag value in the If-Match or If-Range header of a conditional byte-range file request.
4. If the *entity tag* is not available to the MBSTF Client for the damaged object, the MBSTF Client may omit the If-Match or If-Range header from its byte range request.

NOTE 1: The nominal objective of the MBSTF Client using the If-Match header is to receive the requested range(s) of the HTTP resource representation associated with the entity tag, or no repair data if the request cannot be satisfied by the MBS AS.

NOTE 2: The nominal objective of the MBSTF Client using the If-Range header is to receive the latest version of the entire HTTP resource representation in case the version associated with the entity tag that was transmitted in the MBS User Service Session and partially received by the MBSTF Client is no longer available on the MBS AS.

10.2.3 MBS AS requirements

An MBS AS instance is assigned to an MBS User Service Session and hosts all objects at a location as specified in clause 6.2.4.4.

An MBS AS shall be an HTTP server that complies with the general provisions in clause 8.2 and 8.3 of the present document and shall respond to all requests as specified in clause 10.2.2.4.

11 MBSSF security protocols (MBS-10)

11.1 General

This clause is applicable when the MBS User Plane Security mechanism is provisioned for an MBS User Service. This provisioning is indicated to the MBS Client by the presence of the **SecurityDescription** object in a **Distribution**

SessionDescription object (see clause 5.2.10) of a User Service Description it has obtained by one of the methods specified in clause 5.3.

11.2 MBS Service Key retrieval from MBSSF

11.2.1 Overview

Whenever it needs an MBS Service Key (MSK), the MBSF Client shall interact with the MBSSF at reference point MBS-10 using the protocol specified in clause 6.3 of TS 33.246 [33]. The key retrieval protocol is based on HTTP [19] and the general requirements specified in clause 8.2 and 8.3 of the present document shall apply to all interactions between these two functional entities at this reference point.

11.2.2 MBSF Client procedures

11.2.2.1 MBSSF endpoint selection by MBSF Client

Aligned with TS 26.346 [7], before communicating with the MBSSF as part of an MBS User Service Session, the MBSF Client shall first choose an MBSSF endpoint address from those listed in the **mBSSFAddresses** property of the **SecurityDescription** object specified in table 5.2.10-1. The MBSF Client shall use the same endpoint address for all subsequent requests to the MBSSF relating to that MBS User Service Session.

If the MBSSF at the chosen endpoint address proves to be unresponsive after a number of retry attempts, a different endpoint shall be chosen by the MBSF Client from those listed, if any.

11.2.2.2 Back-off time computation

When the back-off mode parameters are present in the **SecurityDescription** object, these are used to calculate a random back-off time as specified in clause 6.3.2.1A of TS 33.246 [33] and clause 11.3.1 of TS 26.346 [7] in order to avoid overloading the MBSSF.

In case of an MSK request, the MBSF Client shall calculate the random *back-off time* according to clause 10.2.2.3 of the present document, using the **offsetTime** and **randomTimePeriod** parameters indicated in the **backOffParameters** object as specified in table 5.2.10-1.

12 Conformance profiles for MBS Distribution Sessions

12.1 Definition

This clause defines conformance profiles used to characterise MBS Distribution Sessions.

MBS Distribution Sessions are characterized by features that are required for the consumption of the MBS Distribution Session. An MBS Client needs to support all features of the MBS Distribution Session in order to consume the MBS Distribution Session.

Conformance profiles are defined to enable interoperability and the signalling of the use of features.

A conformance profile imposes a set of specific restrictions:

- It may constrain features of the MBS Distribution Session, i.e. the Distribution Method in use.
- It may constrain the content delivered within the MBS Distribution Session, such as the media content types, media format(s), codec(s), and protection formats.
- It may constrain quantitative parameters, such as bit rate.

NOTE: A conformance profile can also be understood as permission for an MBS Client that only implements the features required by the profile to process the MBS Distribution Session.

Conformance profiles defined in the present document constrain features specified in the present document. Externally defined conformance profiles may additionally impose restrictions on other aspects.

12.2 Identification of conformance profile

A conformance profile is uniquely identified by a fully-qualified term identifier URI from a controlled vocabulary. The term identifiers in the controlled vocabulary shall conform to either the *pro-simple* or *pro-fancy* productions specified in section 4.5 of IETF RFC 6381 [29], without the enclosing *DQUOTE* characters, i.e. only the *unencodedv* or *encodedv* productions respectively.

- Profile identifiers defined in the present document shall be URNs conforming to IETF RFC 8141 [27]. A controlled vocabulary of conformance profiles defined in the present document is specified in clause C.2.
- Externally defined conformance profiles may use profile identifiers that are URNs conforming to IETF RFC 8141 [27] or URLs conforming to IETF RFC 3986 [34].
- When a URL is used, it should also contain a date specifier in the form YYYY-MM. The assignment of the URL shall be authorized by the owner of the domain name in the *authority* part of the URL on or very close to that date, to avoid problems when domain names change ownership.

12.3 Semantics of conformance signalling in User Service Description

The `conformanceProfiles` property as defined in clause 5.2.4 indicates a list of profiles to which an MBS Distribution Session conforms.

The MBS Distribution Session shall conform to every profile listed.

An MBS Client conforming to any of the listed profiles is permitted to access and process the MBS Distribution Session and shall process the MBS Distribution Session according to the client requirements defined by its chosen conformance profile.

MBS Distribution Sessions conforming to the *Baseline MBS Distribution Session Profile* defined in clause 12.4 may omit the `conformanceProfiles` property.

12.4 Baseline MBS Distribution Session Profile

The Baseline MBS Distribution Session Profile characterises MBS Distribution Sessions as specified in the present document.

For MBS Distribution Sessions conforming to the Baseline MBS Distribution Session Profile, the following applies:

- If the User Service Description indicates the Object Distribution Method then the MBS Distribution Session shall conform to the requirements in clause 6.
- If the User Service Description indicates the Packet Distribution Method then the MBS Distribution Session shall conform to the requirements in clause 7.

An MBS Client conforming to this profile shall support the MBS Client requirements for the Object Distribution Method as defined in clause 6 and the MBS Client requirements for the Packet Distribution Method as defined in clause 7.

The Baseline MBS Distribution Session Profile is identified by the URI `urn:3GPP:26517:17:baseline` as specified in annex C.2.

Annex A (normative): Syntax for Service Announcement

A.1 Void

A.2 JSON-based representation

A.2.1 MBS User Service Announcement schema

Below is the schema specifying the format of User Service Descriptions instance documents using a JSON-based representation. Documents following this schema shall be identified with the MIME type *application/mbs-user-service-descriptions+json* as registered in clause E.2.1. The schema filename is *TS26517_MBSUserServiceAnnouncement.yaml*.

```

openapi: 3.0.0

info:
  title: 'MBS User Service Announcement'
  version: 1.3.0
  description: |
    MBS User Service Announcement Element units.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 26.517 V17.5.0; 5G Multicast-Broadcast User Services; Protocols and Formats
  url: http://www.3gpp.org/ftp/Specs/archive/26_series/26.517/

paths:
  /user-service-descriptions:
    get:
      operationId: discoverUserServiceDescriptions
      summary: 'Discover User Service Descriptions'
      description: 'Discover User Service Descriptions that match the supplied query filter(s). At
least one filter query parameter must be included in the request URL.'
      parameters:
        - in: query
          name: service-class
          schema:
            type: string
            required: true
            description: 'Filter for User Service Descriptions tagged with the supplied service
class term identifier expressed as a fully-qualified URI string from a controlled vocabulary'
      responses:
        '200':
          # OK
          description: "Success"
          content:
            multipart/related:
              schema:
                type: string
        '204':
          # No Content (no matching User Service Descriptions)
          description: "No Matches Found"
        '500':
          # Internal Server Error
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '503':
          # Service Unavailable
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'

  /user-service-descriptions/{externalServiceId}:

```

```

get:
  operationId: retrieveUserServiceDescription
  summary: 'Retrieve User Service Description'
  description: 'Retrieve the User Service Description of a single service by supplying its
external service identifier.'
  parameters:
    - name: externalServiceId
      in: path
      required: true
      schema:
        type: string
      description: 'The external service identifier of a User Service provisioned in the
MBSF.'
  responses:
    '200':
      # OK
      description: "Success"
      content:
        multipart/related:
          schema:
            type: string
    '404':
      # Not Found
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '500':
      # Internal Server Error
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      # Service Unavailable
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

components:
  schemas:
    UserServiceDescriptions:
      description: 'A document announcing one or more MBS User Services.'
      type: object
      properties:
        version:
          type: integer
          minimum: 1
        userServiceDescriptions:
          type: array
          items:
            $ref: '#/components/schemas/UserServiceDescription'
          minItems: 1
      required:
        - userServiceDescriptions

    UserServiceDescription:
      description: 'A description of a single MBS User Service.'
      type: object
      properties:
        serviceIds:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
          minItems: 1
        class:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        names:
          type: array
          items:
            type: object
            properties:
              name:
                type: string
              lang:
                type: string
                pattern: '^[a-zA-Z]{3}$'
                example: 'eng'
            required:
              - name
              - lang
          minItems: 1
        descriptions:
          type: array

```

```

    items:
      type: object
      properties:
        description:
          type: string
          lang:
            type: string
            pattern: '^[a-zA-Z]{3}$'
            example: 'eng'
        required:
          - description
          - lang
      minItems: 1
    serviceLanguage:
      type: string
      pattern: '^[a-zA-Z]{3}$'
      example: 'eng'
    distributionSessionDescriptions:
      type: array
      items:
        $ref: '#/components/schemas/DistributionSessionDescription'
      minItems: 1
    serviceScheduleDescriptions:
      type: array
      items:
        $ref: '#/components/schemas/ServiceScheduleDescription'
      minItems: 1
    required:
      - serviceIds
      - class
      - distributionSessionDescriptions

DistributionSessionDescription:
  type: object
  properties:
    distributionMethod:
      $ref: '#/components/schemas/DistributionMethod'
    conformanceProfiles:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      minItems: 1
    sessionDescriptionLocator:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    applicationServiceDescriptions:
      type: array
      items:
        $ref: '#/components/schemas/ApplicationServiceDescription'
      minItems: 1
    postSessionObjectRepairParameters:
      $ref: '#/components/schemas/ObjectRepairParameters'
    availabilityInfos:
      type: array
      items:
        $ref: '#/components/schemas/AvailabilityInformation'
      minItems: 1
    securityDescription:
      $ref: '#/components/schemas/SecurityDescription'
  required:
    - distributionMethod
    - sessionDescriptionLocator

DistributionMethod:
  anyOf:
    - type: string
      enum:
        - OBJECT
        - PACKET
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.

ApplicationServiceDescription:
  type: object
  properties:
    entryPointLocator:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  contentType:
    type: string
    pattern: '^[a-zA-Z]+\.[a-zA-Z]+$'
    example: 'application/dash+xml'
  required:
    - entryPointLocator
    - contentType

AvailabilityInformation:
  type: object
  properties:
    mbsServiceArea:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
      minItems: 1
    mbsFSAId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsFsaId'
    radioFrequency:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
      minItems: 1
  required:
    - radioFrequency

ObjectRepairParameters:
  type: object
  properties:
    backOffParameters:
      $ref: '#/components/schemas/BackOffParameters'
    objectDistributionBaseLocator:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    objectRepairBaseLocator:
      $ref: 'TS26512_CommonData.yaml#/components/schemas/AbsoluteUrl'

BackOffParameters:
  type: object
  properties:
    offsetTime:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    randomTimePeriod:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
  anyOf:
    - required: [offsetTime]
    - required: [randomTimePeriod]

ServiceScheduleDescription:
  type: object
  properties:
    id:
      type: string
    version:
      type: integer
      minimum: 1
    start:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
    stop:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  required:
    - id
    - version
    - start
    - stop

SecurityDescription:
  type: object
  properties:
    mBSSAddresses:
      type: array
      items:
        $ref: 'TS26512_CommonData.yaml#/components/AbsoluteUrl'
      minItems: 1
    mBSSServiceKeyInfo:
      type: object
      properties:
        mBSId:

```

```
    type: string
  mBSDomainId:
    type: string
  required:
    - mBSId
    - mBSDomainId
  uICCKeyManagement:
    type: boolean
  2GGBAallowed:
    type: boolean
  backOffParameters:
    $ref: '#/components/schemas/BackOffParameters'
  required:
    - mBSSFAddresses
    - mBSSessionKeyInfo
```

Annex B (informative): Service Announcement examples

B.1 XML-based representation

B.2 JSON-based representation

This example is for future study.

Annex C (normative): 3GPP Registered URIs

C.1 General

This annex documents the registered URIs in the present document following the process in <https://www.3gpp.org/3gpp-groups/core-network-terminals-ct/ct-wg1/uniform-resource-identifier-uri-list>.

As required by this process, the tables in the following clauses list all registered URI values as well as:

- a brief description of its functionality;
- a reference to the specification or other publicly available document (if any) containing the definition;
- the name and email address of the person making the application; and
- any supplementary information considered necessary to support the application.

C.2 Controlled vocabulary of conformance profile identifiers

Table C.2-1: Controlled vocabulary of conformance profile identifiers

URI	Description	Reference	Contact	Remarks
<i>urn:3GPP:26517:17:baseline</i>	Baseline MBS Distribution Session Profile	TS 26.517, clause 12.4	Thomas Stockhammer tsto@qti.qualcomm.com	None.

Annex D (normative): Syntax for object manifest

D.1 Object manifest schema

Below is the formal syntax of the object manifest for use with the Object Collection or Object Carousel operating mode. The schema shall have the filename "TS26517_MBSObjectManifest.yaml".

```

openapi: 3.0.0
info:
  title: MBS User Services Object Manifest
  version: 1.0.0
  description: |
    MBS User Services Object Manifest syntax
    © 2023, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  tags:
    - name: MBS User Services Object Manifest
      description: '5G Media Streaming: Common Data Types'
  externalDocs:
    description: 'TS 26.517 V17.3.0; 5G Multicast-Broadcast User Services; Protocols and Formats'
    url: 'https://www.3gpp.org/ftp/Specs/archive/26_series/26.517/'
  paths: {}
  components:
    schemas:
      ObjectManifest:
        type: object
        description: A manifest describing a set of binary objects to be transmitted by the MBSTF as
        part of the MBS Distribution Session.
        required:
          - objects
        properties:
          updateInterval:
            type: integer
            format: int32
            description: The time period (in seconds) after which the MBSTF attempts to re-acquire
            the object manifest when pull-based object acquisition is provisioned.
          objects:
            type: array
            description: The list of binary objects to be carouselled from the MBSTF to the MBSTF
            Client.
            items:
              $ref: '#/components/schemas/Object'
          Object:
            type: object
            description: A binary object to be transmitted by the MBSTF as part of the MBS
            Distribution Session.
            required:
              - locator
            properties:
              locator:
                $ref: 'TS26512_CommonData.yaml#/components/schemas/AbsoluteUrl'
              repetitionInterval:
                type: integer
                format: int32
                description: The MBSTF sends the object repeatedly to the MBSTF Client with the given
                interval (in milliseconds). This parameter is ignored in the case of Object Collection operating
                mode.
              keepUpdatedInterval:
                type: integer
                format: int32
                description: The MBSTF checks for changes to the object with the given interval (in
                seconds). This parameter is ignored in the case of Object Collection operating mode.
              earliestFetchTime:
                type: string
                format: date-time
                description: The MBSTF shall pull each object from its origin location no sooner than
                this time or, if this parameter is omitted, at a time of its choosing.
              latestFetchTime:
                type: string
                format: date-time

```

description: The MBSTF shall pull each object from its origin location no later than this time, or, if this parameter is omitted, at a time of its choosing.

Annex E (normative): IANA registration

E.1 General

This annex provides the formal registrations of MIME media types for different resources specified in the present document. It is referenced from the IANA registry at <http://www.iana.org/>.

E.2 Registration of MIME media type "application/mbs-user-service-descriptions+json"

E.2.1 General

The MIME media type *application/mbs-user-service-descriptions+json* denotes that the message body is a JSON instance document compliant with the *UserServiceDescriptions* YAML schema specified in clause A.2.1.

Table E.2.1-1 provides the MIME media type registration for *application/mbs-user-service-descriptions+json*.

Table E.2.1-1: MIME media type registration for *application/mbs-user-service-descriptions+json*

Parameter	Value
MIME media type name	<i>application</i>
MIME subtype name	<i>mbs-user-service-descriptions+json</i>
Required parameters	None
Optional parameters	The ' <i>profiles</i> ' parameter as specified in clause E.2.2.
Encoding considerations	This is a JSON document, and the encoding considerations are the same as for media type <i>application/json</i> defined in IETF RFC 8259.
Security considerations	This media format is used to configure the receiver on how to participate in one or more MBS User Services. This format is highly susceptible to manipulation or spoofing for attacks desiring to mislead a receiver about a session. Both integrity protection and source authentication are recommended to prevent misleading of the receiver.
Interoperability considerations	The specification defines a platform-independent expression of an entry point document, and it is intended that wide interoperability can be achieved.
Published specification	3GPP TS 26.517
Applications which use this media type	3GPP MBS-based applications and services
Additional information	File extension(s): <i>json</i> Intended usage: COMMON
Other information/general comment	None
Person & email address to contact for further information	Thomas Stockhammer (tsto@qti.qualcomm.com) 3GPP TSG SA WG4
Restrictions on usage	None
Author/Change controller	3GPP TSG SA WG4

E.2.2 Profiles parameter

Table E.2.2-1 provides the definition of the *profiles* parameter to be used with the User Service Descriptions instance document as defined in clause E.2.1.

Table E.2.2-1: Definition of profiles parameter

Parameter	Value
Parameter name	<i>profiles</i>
Parameter value	Optional attribute indicating one or more profiles to which the resource representation claims conformance. The contents of this attribute shall conform to either the <i>pro-simple</i> or <i>pro-fancy</i> productions specified in section 4.5 of IETF RFC 6381. The value is a fully-qualified term identifier URI from a controlled vocabulary. The set of profile identifiers indicated in this parameter should match the set indicated in the profiles attribute of the corresponding User Service Description.

EXAMPLE:

```
application/mbs-user-service-description+json
  profiles="urn:3GPP:26517:17:baseline"
```

Annex F (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Re v	C a t	Subject/Comment	New versio n
2022-02	SA4#117-e	S4-200141				Initial skeleton document.	0.0.1
2022-02	SA4#117-e	S4-220285				Revised skeleton document	0.1.0
2022-03	SA4#117-e	SP-220249				Presentation for information at SA#95-e	1.0.0
2022-04	SA4#118-e	S4-220521				S4-220570: Service Announcement specification and schemas. S4-220470: Packet Distribution Method initial specification. S4-220471: Object Distribution Method initial specification	1.1.0
2022-05	SA4#119-e	S4-220867				S4-220864: Service Announcement corrections. S4-220865: Object Distribution Method updates. S4-220866: Packet Distribution Method updates.	1.2.0
2022-06	SA#96	SP-220605				For presentation to Plenary	2.0.0
2022-06	SA#96	SP-220605				Under Change Control	17.0.0
2022-12	SA#98-e	SP-221059	000 3	3	F	[5MBP3] Alignment of User Service Announcement with Stage 2	17.1.0
2023-03	SA#99	SP-230254	000 6	1	F	[5MBP3] Corrections on Headings and Terms	17.2.0
2023-06	SA#100	SP-230744	000 7	7	F	[5MBP3] Manifest format for Object Collection and Carousel	17.3.0
2023-09	SA#101	SP-230916	001 0	3	F	[5MBP3] API for unicast retrieval of MBS User Service Announcement	17.4.0
2024-03	SA#103	SP-240272	000 1	23	F	[5MBP3] General Updates and Corrections	17.5.0

History

Document history		
V17.0.0	July 2022	Publication
V17.1.0	January 2023	Publication
V17.2.0	April 2023	Publication
V17.3.0	July 2023	Publication
V17.4.0	October 2023	Publication
V17.5.0	April 2024	Publication