



**Universal Mobile Telecommunications System (UMTS);  
LTE;  
GPRS Tunnelling Protocol (GTP)  
specification for Gateway Location Register (GLR)  
(3GPP TS 29.119 version 19.0.0 Release 19)**



---

**Reference**

---

RTS/TSGC-0429119vj00

---

---

**Keywords**

---

LTE,UMTS

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

---

The present document can be downloaded from the  
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,  
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to  
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our  
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

**Notice of disclaimer & limitation of liability**

---

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

---

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope .....	5
1.1 References .....	5
2 Definitions and abbreviations.....	5
2.1 Definitions .....	5
2.2 Abbreviations .....	6
3 General .....	6
4 Transmission order and bit definitions.....	7
5 GTP header.....	7
6 GTP Message and Message Formats.....	7
6.1 Signalling Message Formats.....	7
6.2 Path Management messages .....	8
6.3 Tunnel Management messages.....	8
6.4 Location Management message .....	9
6.5 Mobility Management messages .....	9
6.6 Reliable delivery of signalling messages.....	9
6.7 Information element .....	10
7 Signalling Plane (GTP-C) .....	10
8 GTP-U .....	10
9 Path Protocol .....	10
10 Error handling .....	10
11 Inter-PLMN GTP communication over the Gp Interface.....	10
12 IP, the networking technology used by GTP.....	10
13 GTP parameters.....	10
<b>Annex A (informative): Change history .....</b>	<b>11</b>
History .....	12

---

# Foreword

The present document has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document describes the signalling requirements and procedures used at network elements related to the GLR for GTP within the 3GPP system at the application level.

The present document gives the description of the systems needed only in the network utilising GLR as the delta document against 3GPP TS 29.060.

## 1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 23.060: "General Packet Radio Service (GPRS); Service description Stage2".
- [2] 3GPP TS 23.119: "Gateway Location Register (GLR) – stage2".
- [3] 3GPP TS 24.008: "Mobile radio interface layer 3 specification, Core Network Protocols – Stage 3".
- [4] 3GPP TS 29.002: "Mobile Application Part (MAP) specification".
- [5] 3GPP TS 29.060: "General Packet Radio Service (GPRS); GPRS Tunnelling Protocol (GTP) across the Gn and Gp Interface".

---

# 2 Definitions and abbreviations

## 2.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

<b>Gateway Location Register:</b>	this entity handles location management of roaming subscriber in visited network without involving HLR
<b>Intermediate GSN:</b>	this entity is used as serving GSN towards home network and relay some PDU notification messages between serving GSN and Gateway GSN
<b>MM context:</b>	information sets held in MS and GSNs for a GPRS subscriber related to mobility management (MM)
<b>MM Context ID:</b>	IMSI or equivalent for use in conjunction with Anonymous Access (please refer to section GTP Header)
<b>Path:</b>	UDP/IP path and TCP/IP path are examples of paths that may be used to multiplex GTP tunnels
<b>Path Protocol:</b>	path Protocol is the protocol(s) used as a bearer of GTP between GSNs
<b>PDP:</b>	packet Data Protocol (PDP) is a network protocol used by an external packet data network interfacing to GPRS

<b>PDP Context:</b>	information sets held in MS and GSNs for a PDP address
<b>Signalling message:</b>	GTP signalling messages are exchanged between GSN pairs in a path. The signalling messages are used to transfer GSN capability information between GSN pairs and to create, update and delete GTP tunnels
<b>T-PDU:</b>	original packet, for example an IP datagram, from an MS or a network node in an external packet data network. A T-PDU is the payload that is tunnelled in the GTP tunnel
<b>Tunnel Endpoint Identifier (TEID):</b>	this field unambiguously identifies a tunnel endpoint in the receiving GTP-U or GTP-C protocol entity. The receiving end side of a GTP tunnel locally assigns the TEID value the transmitting side has to use. The TEID values are exchanged between tunnel endpoints using GTP-C messages

## 2.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:


GGSN	Gateway GPRS support node
GLR	Gateway Location Register
GPRS	General Packet Radio Service
GTP	GPRS Tunnelling Protocol
IM_GSN	Intermediate GSN
IP	Internet Protocol
GLR	Gateway Location Register
SGSN	Serving GPRS support node
TEID	Tunnel Endpoint Identifier
UDP	User Datagram Protocol

---

## 3 General

The present document defines the GPRS Tunnelling Protocol (GTP) specific to the network with the GLR, i.e. the protocol between IM\_GSN and other nodes (i.e. GGSN, SGSN and GTP-MAP protocol converting GSN). It includes only the GTP signalling but not data transfer procedures.

The interface between IM\_GSM and GGSN is either intra-PLMN interface or inter-PLMN interface.

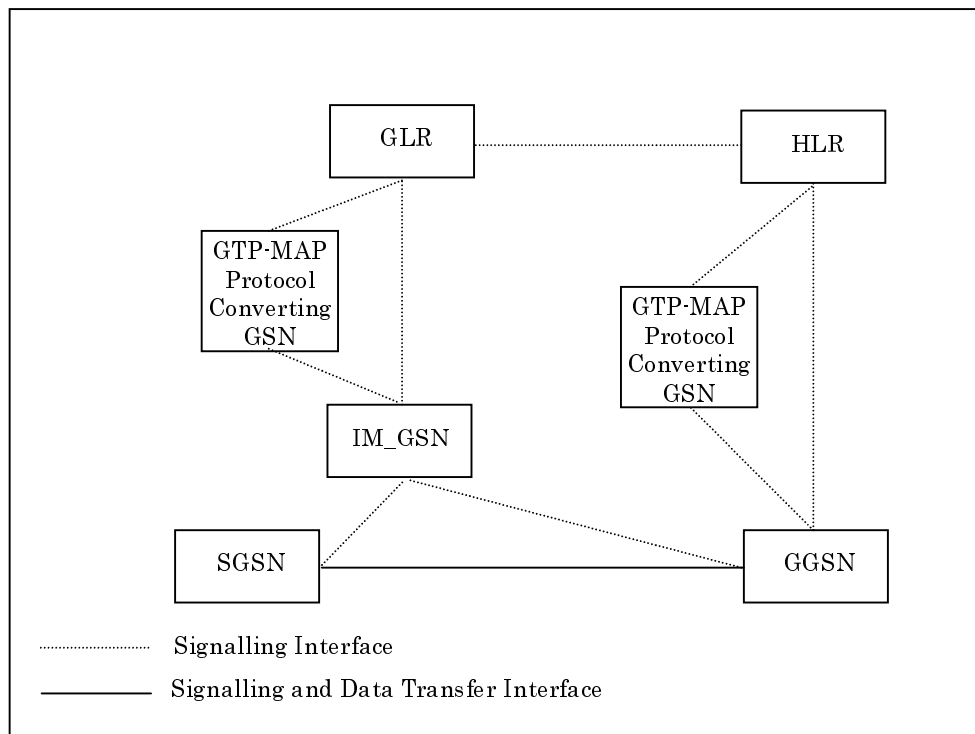

**Figure 1: Logical Architecture for PS domain in the network with GLR**

The GTP protocol is implemented only by IM\_GSNs, SGSNs and GGSNs. No other systems need to be aware of GTP. GPRS MSs are connected to a SGSN without being aware of GTP.

It is assumed that there will be a many-to-many relationship between IM\_GSNs, SGSNs and GGSNs. An IM\_GSN may provide service to many GGSNs. A SGSN may provide service to many IM\_GSNs and GGSNs.

## 4 Transmission order and bit definitions

Transmission order and bit definitions on the interface between the IM\_GSN and other nodes in the network with GLR are the same as that used in the network without the GLR, see 3GPP TS 29.060.

## 5 GTP header

The GTP header used on interface between the IM\_GSN and other nodes in the network with GLR is the same as that used in the network without the GLR, see 3GPP TS 29.060.

## 6 GTP Message and Message Formats

The only signalling plane exists between the IM\_GSN and other nodes (i.e. GGSN, SGSN and GTP-MAP protocol converting GSN).

### 6.1 Signalling Message Formats

GTP defines a set of signalling messages between two associated GSNs. The signalling messages to be used between the IM\_GSN and other nodes are defined in the table below. For the GTP signalling messages to be used on other interfaces see 3GPP TS 29.060.



**Table 1: Signalling messages**

<b>Message Type value (Decimal)</b>	<b>Signalling message</b>	<b>Reference</b>
3	Version Not Supported	7.4.3 in 3GPP TS 29.060
27	PDU Notification Request	7.5.12 in 3GPP TS 29.060
28	PDU Notification Response	7.5.13 in 3GPP TS 29.060
29	PDU Notification Reject Request	7.5.14 in 3GPP TS 29.060
30	PDU Notification Reject Response	7.5.15 in 3GPP TS 29.060
32	Send Routeing Information for GPRS Request	7.6.1 in 3GPP TS 29.060
33	Send Routeing Information for GPRS Response	7.6.2 in 3GPP TS 29.060
34	Failure Report Request	7.6.3 in 3GPP TS 29.060
35	Failure Report Response	7.6.4 in 3GPP TS 29.060

## 6.2 Path Management messages

The messages, which are listed in following table, are used on the interface between the IM\_GSN and other nodes. For the definitions of these messages and other messages used on the other interfaces refer to the corresponding sections in 3GPP TS 29.060.

<b>Messages</b>	<b>Sending node</b>	<b>Receiving node</b>
Version Not Supported	IM_GSN	GGSN, SGSN
	GGSN, SGSN	IM_GSN


## 6.3 Tunnel Management messages

In following table, only the messages used between the IM\_GSN and GGSN and between the IM\_GSN and SGSN are listed. For the definitions of these messages and other messages used on the other interfaces refer to the corresponding sections in 3GPP TS 29.060.

<b>Messages</b>	<b>Sending node</b>	<b>Receiving node</b>
PDU Notification Request	GGSN	IM_GSN
	IM_GSN	SGSN
PDU Notification Response	SGSN	IM_GSN
	IM_GSN	GGSN
PDU Notification Reject Request	SGSN	IM_GSN
	IM_GSN	GGSN
PDU Notification Reject Response	GGSN	IM_GSN
	IM_GSN	SGSN

## 6.4 Location Management message

In the network with the GLR, The optional Location Management messages are defined to support the case when Network-Requested PDP Context Activation procedures are used and an IM\_GSN does not have a SS7 MAP interface. GTP is then used to transfer signalling messages between the IM\_GSN and a GTP-MAP protocol-converting GSN in the GPRS backbone network. The GTP-MAP protocol-converting GSN converts the signalling messages described in this section between GTP and MAP. The MAP messages are sent to and received from the GLR. The GTP-MAP protocol-converting function is described in 3GPP TS 23.060. The MAP protocol describing the corresponding procedures and messages is described in 3GPP TS 29.002. This alternative method is illustrated in Figure 2.

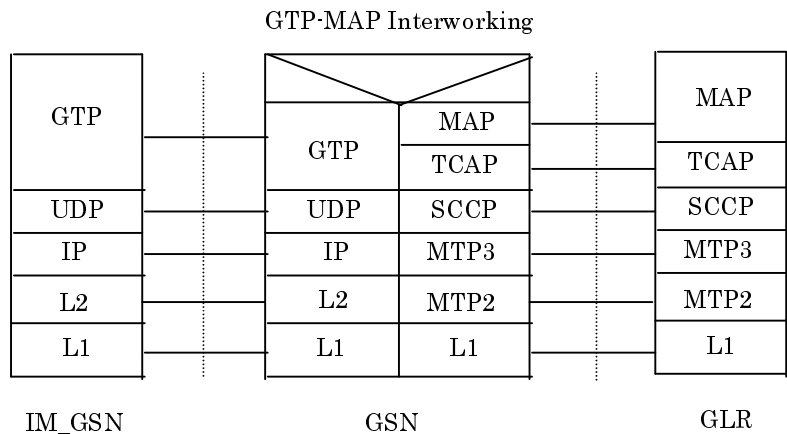

**Figure 2: IM\_GSN - GLR Signalling via a GTP-MAP protocol-converter in a GSN**

In following table, only the messages used between the IM\_GSN and The GTP-MAP protocol-converting GSN are listed. For the definitions of these messages and other messages used on the other interfaces refer to the corresponding sections in 3GPP TS 29.060.

Messages	Sending node	Receiving node
Send Routeing Information for GPRS Request	IM_GSN	GTP-MAP protocol-converting
Send Routeing Information for GPRS Response	GTP-MAP protocol-converting	IM_GSN
Failure Report Request	IM_GSN	GTP-MAP protocol-converting
Failure Report Response	GTP-MAP protocol-converting	IM_GSN

## 6.5 Mobility Management messages

The messages belonging to the mobility management messages are not used on the interface between the IM\_GSN and other nodes in the network with the GLR.

## 6.6 Reliable delivery of signalling messages

For the Reliability mechanism in the IM\_GSN, see section 7.8 in 3GPP TS 29.060.

## 6.7 Information element

The format of information elements in the message used on the interface between the IM\_GSN and other nodes in the network with GLR is the same as that in the network without the GLR. See 3GPP TS 29.060.

---

## 7 Signalling Plane (GTP-C)

The definition of signalling plane used in the network with the GLR is the same as that used in the network without the GLR, see in 3GPP TS 29.060.

---

## 8 GTP-U

GTP-U is not used on the interface between the IM\_GSN and other nodes. For the definition of GTP-U on the other interfaces, see in 3GPP TS 29.060.

---

## 9 Path Protocol

The Path Protocol on the interface between the IM\_GSN and other nodes in the network with the GLR is the same as that used in the network without the GLR. See 3GPP TS 29.060.

---

## 10 Error handling

The error handling on the interface between the IM\_GSN and other nodes is the same as that in the network without the GLR. See 3GPP TS 29.060. One exception is that the IM\_GSN doesn't have a Restart Counter because the IM\_GSM stores no PDP and MM context and therefore the synchronisation of the status of these with other GSNs is not needed.

---

## 11 Inter-PLMN GTP communication over the Gp Interface

Refer to the corresponding section in 3GPP TS 29.060.

---

## 12 IP, the networking technology used by GTP

Refer to the corresponding section in 3GPP TS 29.060.

---

## 13 GTP parameters

The definitions and directions for use of the parameters in GTP (inc. timer values or counter values and so on) on the interface between the IM\_GSN and other nodes is the same as that used in the network without the GLR. See 3GPP TS 29.060.

## Annex A (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
Oct 1999						The GTP protocol part is separated from MAP protocol part, and new specification related to GTP issue is generated.	0.0.1
Nov 1999						For approval by N2#8	0.1.0
Dec 1999						For information and approval by TSG CN#6.	1.0.0
Jan 2000						Only editorial modifications including some alignment with 29.060	1.0.1
Mar 2000						Submitted for approval to TSG CN#07	2.0.0
Mar 2000						Approved by TSG CN#07	3.0.0
Mar 2001						Approved by TSG CN#11	4.0.0
Jun 2002						Rel-5 created after CN#16	5.0.0
Dec 2004						Rel-6 created after CN#26	6.0.0
June 2007						Upgraded unchanged from Rel-6 after CT#36	7.0.0
Dec 2008						Upgraded unchanged from Rel-7 after CT#42	8.0.0
Dec 2009						Update to Rel-9 version (MCC)	9.0.0
Mar 2011						Update to Rel-10 version (MCC)	10.0.0
Sep 2012						Update to Rel-11 version (MCC)	11.0.0
Sep 2014						Update to Rel-12 version (MCC)	12.0.0
Dec 2015						Update to Rel-13 version (MCC)	13.0.0
Mar 2017						Update to Rel-14 version (MCC)	14.0.0
Jun 2018						Update to Rel-15 version (MCC)	15.0.0
07-2020						Update to Rel-16 version (MCC)	16.0.0
2022-03	-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0
2024-03	-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0
2025-10	-	-	-	-	-	Update to Rel-19 version (MCC)	<b>19.0.0</b>

---

# History

Document history		
V19.0.0	October 2025	Publication