

# ETSI TS 129 173 V17.0.0 (2022-04)



**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
LTE;  
Location Services (LCS);  
Diameter-based SLh interface for Control Plane LCS  
(3GPP TS 29.173 version 17.0.0 Release 17)**



---

**Reference**

RTS/TSGC-0429173vh00

---

**Keywords**

GSM,LTE,UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

---

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

---

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope .....	6
2 References .....	6
3 Definitions, symbols and abbreviations .....	7
3.1 Definitions .....	7
3.2 Abbreviations .....	7
4 General Description.....	7
4.1 Introduction .....	7
4.2 Architecture Overview .....	7
4.3 Functional Requirements of SLh Interface.....	8
5 Diameter-based SLh Interface.....	8
5.1 Introduction .....	8
5.2 Procedure Descriptions.....	8
5.2.1 Send Routing Information for LCS.....	8
5.2.1.1 General .....	8
5.2.1.2 Detailed Behaviour of the HSS .....	10
5.2.1.3 Detailed Behaviour of the GLMC.....	11
6 Protocol Specification and Implementations.....	11
6.1 Introduction .....	11
6.1.1 Use of Diameter Base Protocol.....	11
6.1.2 Securing Diameter Messages .....	11
6.1.3 Accounting Functionality .....	12
6.1.4 Use of Sessions .....	12
6.1.5 Transport Protocol .....	12
6.1.6 Routing Considerations.....	12
6.1.7 Advertising Application Support .....	12
6.1.8 Diameter Application Identifier .....	12
6.1.9 User Identity to HSS resolution .....	13
6.2 Commands.....	13
6.2.1 Introduction.....	13
6.2.2 Command-Code values.....	13
6.2.3 LCS-Routing-Info-Request (RIR) Command .....	13
6.2.4 LCS-Routing-Info-Answer (RIA) Command .....	14
6.3 Result-Code AVP and Experimental-Result AVP Values .....	15
6.3.1 General.....	15
6.3.2 Success.....	15
6.3.3 Permanent Failures .....	15
6.3.3.1 DIAMETER_ERROR_USER_UNKNOWN (5001) .....	15
6.3.3.2 DIAMETER_ERROR_UNAUTHORIZED_REQUESTING_NETWORK (5490) .....	15
6.3.4 Transient Failures .....	15
6.3.4.1 DIAMETER_ERROR_ABSENT_USER (4201).....	15
6.4 AVPs .....	15
6.4.1 General.....	15
6.4.2 LMSI.....	16
6.4.3 Serving-Node.....	16
6.4.4 MME-Name.....	17
6.4.5 MSC-Number .....	17
6.4.6 LCS-Capabilities-Sets.....	17
6.4.7 GMLC-Address .....	17

6.4.8 Additional-Serving-Node.....17  
6.4.9 PPR-Address.....18  
6.4.10 Feature-List-ID AVP .....18  
6.4.11 Feature-List AVP.....18  
6.4.12 MME-Realm .....18  
6.4.13 SGSN-Name .....18  
6.4.14 SGSN-Realm .....18

**Annex A (informative): Change history .....20**  
History .....21

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document describes the Diameter-based SLh interface between the GMLC and the HSS defined for the Control Plane LCS in EPC.

LCS procedures over the SLh interface are defined in the 3GPP TS 23.271 [2].

This specification defines the Diameter application for the GMLC-HSS, SLh reference point. The interactions between the HSS and the GMLC are specified, including the signalling flows. As LCS procedures over the Diameter-based SLh interface are identical to the MAP-based Lh interface, the descriptions of the Lh MAP operations defined in the 3GPP TS 29.002 [3] are mapped into the descriptions of the SLh Diameter commands.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.271: "Functional stage 2 description of Location Services (LCS)".
- [3] 3GPP TS 29.002: "Mobile Application Part (MAP) specification".
- [4] 3GPP TS 29.228: "IP multimedia (IM) Subsystem Cx Interface; Signalling flows and Message Elements".
- [5] Void.
- [6] 3GPP TS 33.210: "3G security; Network Domain Security (NDS); IP network layer security".
- [7] IETF RFC 4960: "Stream Control Transport Protocol".
- [8] 3GPP TS 29.229: "Cx and Dx Interfaces based on the Diameter protocol; protocol details".
- [9] 3GPP TS 29.329: "Sh Interface based on the Diameter protocol; protocol details".
- [10] 3GPP TS 23.003: "Numbering, addressing and identification".
- [11] 3GPP TS 23.012: "Location Management Procedures".
- [12] 3GPP TS 29.272: "Mobility Management Entity (MME) and Serving GPRS Support Node (SGSN) related interfaces based on Diameter protocol".
- [13] IETF RFC 2234: "Augmented BNF for syntax specifications".
- [14] Void
- [15] ITU-T Recommendation E.164: "The international public telecommunication numbering plan".
- [16] 3GPP TS 29.273: "Evolved Packet System (EPS); 3GPP EPS AAA interfaces".
- [17] IETF RFC 6733: "Diameter Base Protocol".

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1], 3GPP TS 23.271 [2] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

ABNF	Augmented Backus-Naur form
AVP	Attribute Value Pair
H-GMLC	Home-Gateway Mobile Location Centre
IANA	Internet Assigned Numbers Authority
PMD	Pseudonym mediation device functionality
PPR	Privacy Profile Register
R-GMLC	Requesting-Gateway Mobile Location Centre
RFC	Request For Comments
V-GMLC	Visited-Gateway Mobile Location Centre

---

## 4 General Description

### 4.1 Introduction


The SLh reference point between the GMLC and the HSS is defined in the 3GPP TS 23.271 [2].

This document describes the Diameter-based SLh interface related procedures, message parameters and protocol specifications.

### 4.2 Architecture Overview

The architecture for support of Location Services in GSM, UMTS and EPS has been defined in 3GPP TS 23.271 [2] and the relevant network elements and interfaces are shown in the figure 4.2-1.



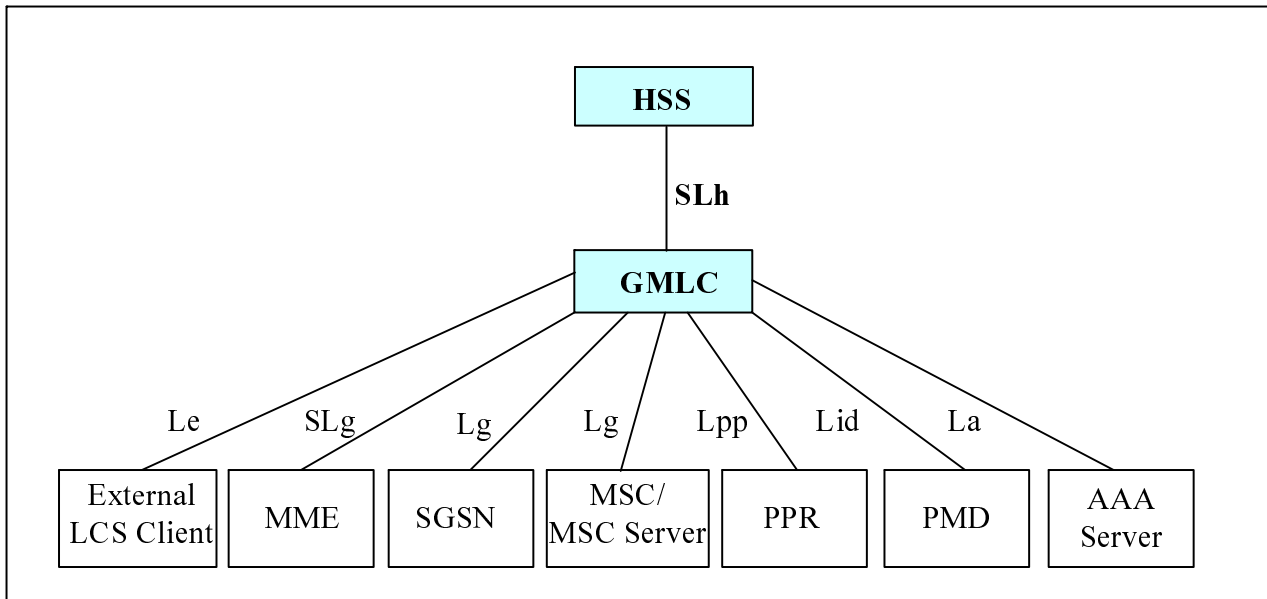

**Figure 4.2-1: Overview of the LCS Functional Architecture**

In this architecture, the SLh interface is defined between the Gateway Mobile Location Center (GMLC) and the Home Subscriber Server (HSS) to allow the GMLC to request routing information from the HLR or HSS.

## 4.3 Functional Requirements of SLh Interface

The requirements for SLh interface are defined in 3GPP TS 23.271 [2].

The SLh interface is used by the GMLC to request routing information from the HSS i.e. the address of the H-GMLC, and/or the address of the visited MSC/MSC server, SGSN, 3GPP AAA server or MME for a particular target UE whose location has been requested.

---

## 5 Diameter-based SLh Interface

### 5.1 Introduction

This section describes the Diameter-based SLh interface related procedures and Information elements exchanged between functional entities.

In the tables that describe the Information Elements transported by each Diameter command, each Information Element is marked as (M) Mandatory, (C) Conditional or (O) Optional in the "Cat." column. For the correct handling of the Information Element according to the category type, see the description detailed in section 6 of the 3GPP TS 29.228 [4].

### 5.2 Procedure Descriptions

#### 5.2.1 Send Routing Information for LCS

##### 5.2.1.1 General

This procedure is used between the GMLC and the HSS. The procedure is invoked by the GMLC and is used:

- To retrieve routing information for LCS for a specified user from the HSS.

This procedure is mapped to the commands LCS-Routing-Info-Request/Answer in the Diameter application specified in chapter 6. Tables 5.2.1.1/1 and 5.2.1.1/2 detail the involved information elements.

**Table 5.2.1.1/1: Send Routing Information for LCS (SLh-LCS-SRI)**

Information element name	Mapping to Diameter AVP	Cat.	Description
IMSI	User-Name	C	This information element shall contain the IMSI of the targeted user. This IE shall be present if the MSISDN is absent.
MSISDN	MSISDN	C	This information element shall contain the MSISDN of the targeted user. This IE shall be present if the IMSI is absent.
GMLC Number	GMLC-Number	O	This information element shall contain the ISDN (E.164) number of the requesting GMLC.
Supported Features (See 3GPP TS 29.229 [8])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.

Table 5.2.1.1/2: Send Routing Information for LCS (SLh-LCS-SRI) Resp

Information element name	Mapping to Diameter AVP	Cat.	Description
Result (See 5.3.5)	Result-Code / Experimental- Result	M	Result of the request. Result-Code AVP shall be used for errors defined in the Diameter base protocol (see IETF RFC 6733 [17]). Experimental-Result AVP shall be used for SLh errors. This is a grouped AVP which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
IMSI	User-Name	C	This information element shall contain the IMSI of the targeted user. This IE shall be present if Result-Code is DIAMETER_SUCCESS and the MSISDN is absent.
MSISDN	MSISDN	C	This information element shall contain the MSISDN of the targeted user. This IE shall be present if Result-Code is DIAMETER_SUCCESS and the IMSI is absent.
LMSI	LMSI	C	This information element shall contain the LMSI allocated by the VLR. This IE should be present if Result-Code is DIAMETER_SUCCESS and LMSI is available in the HSS and MSC-Number is included in the Serving-Node AVP or in an Additional-Serving-Node AVP.
Serving Node	Serving-Node	C	This information element shall contain the information about the network node serving the targeted user i.e. the name/number of the serving node (MME, SGSN, 3GPP AAA server or MSC/MSC server), the LCS capabilities sets supported by the serving node and the IP address of the visited GMLC associated with the serving node. This IE shall be present if the Result- Code is DIAMETER_SUCCESS; otherwise it shall be absent.
Additional Serving Node	Additional-Serving-Node	C	This information element shall contain the information about another network node serving the targeted user. This IE may be present if Result- Code is DIAMETER_SUCCESS; otherwise it shall be absent. There may be multiple instances of this IE in the response provided by the HSS.
Home GMLC Address	GMLC-Address	C	This information element shall contain the IP address of the H-GMLC. This IE should be present if the Result-Code is DIAMETER_SUCCESS; otherwise it shall be absent.
PPR Address	PPR-Address	C	This information element shall contain the IP address of the Privacy Profile Register (PPR). This IE should be present if available in the HSS and the Result-Code is DIAMETER_SUCCESS; otherwise it shall be absent.
RIA Flags	RIA-Flags	O	This Information Element contains a bit mask. See 6.4.15 for the meaning of the bits.
Supported Features (See 3GPP TS 29.229 [8])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.

### 5.2.1.2 Detailed Behaviour of the HSS

Upon reception of the Send Routing Info for LCS request, the HSS shall, in the following order:

1. Check whether the requesting GMLC belongs to a network authorized to request UE location information. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_UNAUTHORIZED\_REQUESTING\_NETWORK in the Send Routing Information for LCS Response.
2. Check that the User Identity for whom data is asked exists in HSS. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_USER\_UNKNOWN in the Send Routing Information for LCS Response.
- 2a. If both IMSI and MSISDN are present in the request, check whether they identify the same User. If not, the HSS Result-Code shall be set to DIAMETER\_CONTRADICTING\_AVPS in the Send Routing Information for LCS Response.
3. Check that there is at least one serving node associated with the targeted user. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_ABSENT\_USER in the Send Routing Information for LCS Response.

If there is an error in any of the above steps then the HSS shall stop processing and shall return the error code specified in the respective step (see 3GPP TS 29.329 [9] and 3GPP TS 29.229 [8] for an explanation of the error codes).

If the HSS cannot fulfil the received request for reasons not stated in the above steps, e.g. due to a database error or empty mandatory data elements, it shall stop processing the request and set Result-Code to `DIAMETER_UNABLE_TO_COMPLY`.

Otherwise, the requested operation shall take place and the HSS shall return the Result-Code AVP set to `DIAMETER_SUCCESS`. The HSS returns one or several of the network addresses of the current MME, SGSN, 3GPP AAA server and/or VMSC/MSC server, the LCS capabilities of the serving nodes if available, the V-GMLC address associated with the serving nodes, if available, and whichever of the IMSI and MSISDN that was not provided in the Send Routing Info for LCS request. If MSISDN was not provided in the Send Routing Info for LCS request and the subscription is MSISDN-less, the HSS shall return the dummy MSISDN value (see 3GPP TS 23.003 [10]). If both MSISDN and IMSI were provided in the Send Routing Info for LCS request, the HSS returns either MSISDN or IMSI or both. The HSS returns the address of the H-GMLC. The HSS also provides the address of the PPR, if available.

The HSS shall include the Diameter Identity of the SGSN (i.e. SGSN-Name and SGSN-Realm), within the Serving-Node AVP or within an Additional-Serving-Node AVP, if and only if the HSS has received an indication that the Lgd interface is supported by the SGSN (see 3GPP TS 29.272 [12]).

The HSS shall include the SGSN Number, within the Serving-Node AVP or Additional Serving-Node AVP, except if the HSS has received an indication that the Lg interface is not supported by the SGSN (see 3GPP TS 29.272 [12]).

If the UE is served by the MME and SGSN parts of the same combined MME/SGSN (see 3GPP TS 29.272 [12] subclause 5.2.2.1.1 for how the HSS determines if the UE is served by the combined MME/SGSN) and if this combined MME/SGSN has indicated the support for optimized LCS procedure (via the Supported-Feature AVP as defined in 3GPP TS 29.272 [12] subclause 7.3.10) and if HSS supports this optimized LCS procedure, then the HSS shall set the "Combined-MME/SGSN-Supporting-Optimized-LCS-Proc" bit of the RIA-Flags.

Regarding the LCS capabilities of the serving nodes, if the HSS registered an SGSN via the S6d reference point (i.e., the registered serving node is an S4-SGSN), the HSS shall set the LCS-Capabilities-Set value to indicate support of Capability Set 5 (i.e., LCS release 7 or later version). If the HSS registered an MME, the HSS shall not indicate any LCS capability value to the GMLC (i.e., the LCS-Capabilities-Set AVP shall be absent over SLh when the serving node is an MME); in this case, the GMLC shall assume that the MME supports LCS Capability Set 5.

### 5.2.1.3 Detailed Behaviour of the GMLC

If there are a serving node as well as additional serving nodes in a successful Send Routing Info for LCS response, the receiving shall use the serving node in preference to the additional serving nodes.

---

## 6 Protocol Specification and Implementations

### 6.1 Introduction

#### 6.1.1 Use of Diameter Base Protocol

The Diameter base protocol as specified in IETF RFC 6733 [17] shall apply except as modified by the defined support of the methods and the defined support of the commands and AVPs, result and error codes as specified in this specification. Unless otherwise specified, the procedures (including error handling and unrecognised information handling) shall be used unmodified.

#### 6.1.2 Securing Diameter Messages

For secure transport of Diameter messages, see 3GPP TS 33.210 [6].

### 6.1.3 Accounting Functionality

Accounting functionality (Accounting Session State Machine, related command codes and AVPs) shall not be used on the SLh interface.

### 6.1.4 Use of Sessions

Between the GMLC and the HSS, Diameter sessions shall be implicitly terminated. An implicitly terminated session is one for which the server does not maintain state information. The client shall not send any re-authorization or session termination requests to the server.

The Diameter base protocol as specified in IETF RFC 6733 [17] includes the Auth-Session-State AVP as the mechanism for the implementation of implicitly terminated sessions.

The client (server) shall include in its requests (responses) the Auth-Session-State AVP set to the value NO\_STATE\_MAINTAINED (1), as described in IETF RFC 6733 [17]. As a consequence, the server shall not maintain any state information about this session and the client shall not send any session termination request. Neither the Authorization-Lifetime AVP nor the Session-Timeout AVP shall be present in requests or responses.

### 6.1.5 Transport Protocol

Diameter messages over the SLh interface shall make use of SCTP IETF RFC 4960 [7] as transport protocol.

### 6.1.6 Routing Considerations

This clause specifies the use of the Diameter routing AVPs Destination-Realm and Destination-Host.

If GMLC knows the address/name of the HSS for a certain user, both the Destination-Realm AVP and the Destination-Host AVP shall be present in the request. Otherwise, only the Destination-Realm AVP shall be present and the command shall be routed to the next Diameter node. Consequently, the Destination-Host AVP is declared as optional in the ABNF for all requests initiated by a GMLC.

Destination-Realm AVP is declared as mandatory in the ABNF for all requests.

If the Vendor-Specific-Application-ID AVP is received in any of the commands defined in this specification, it shall be ignored by the receiving node, and it shall not be used for routing purposes.

### 6.1.7 Advertising Application Support

The HSS and GMLC shall advertise support of the Diameter SLh Application by including the value of the application identifier in the Auth-Application-Id AVP within the Vendor-Specific-Application-Id grouped AVP of the Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands.

The vendor identifier value of 3GPP (10415) shall be included in the Supported-Vendor-Id AVP of the Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands, and in the Vendor-Id AVP within the Vendor-Specific-Application-Id grouped AVP of the Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands.

The Vendor-Id AVP included in Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands that is not included in the Vendor-Specific-Application-Id AVPs as described above shall indicate the manufacturer of the Diameter node as per IETF RFC 6733 [17].

### 6.1.8 Diameter Application Identifier

The SLh interface protocol shall be defined as an IETF vendor specific Diameter application, where the vendor is 3GPP. The vendor identifier assigned by IANA to 3GPP (<http://www.iana.org/assignments/enterprise-numbers>) is 10415.

The Diameter application identifier assigned to the SLh interface application is 16777291 (allocated by IANA).

## 6.1.9 User Identity to HSS resolution

The User identity to HSS resolution mechanism enables the GMLC (for non-roaming case) or Diameter Relay/proxy agents in the home network (for roaming case) to find the identity of the HSS that holds the LCS subscription data and routing information for the target user when multiple and separately addressable HSSs have been deployed in the home network. The resolution mechanism is not required in networks that utilise a single HSS.

This User identity to HSS resolution mechanism may rely on routing capabilities provided by Diameter and be implemented in the home operator network within dedicated Diameter Agents (Redirect Agents or Proxy Agents) responsible for determining the HSS identity based on the provided user identity. If this Diameter based implementation is selected by the Home network operator, the principles described in the 3GPP TS 29.272 [12] shall apply.

NOTE: Alternatives to the user identity to HSS resolution Diameter based implementation are outside the scope of this specification.

## 6.2 Commands

### 6.2.1 Introduction

This section defines the Command code values and related ABNF for each command described in this specification.

### 6.2.2 Command-Code values

This section defines Command-Code values for the SLh interface application as allocated by IANA.

Every command is defined by means of the ABNF syntax IETF RFC 2234 [13], according to the Command Code Format (CCF) specification defined in IETF RFC 6733 [17]. In the case, the definition and use of an AVP is not specified in this document, the guidelines in IETF RFC 6733 [17] shall apply.

The Vendor-Specific-Application-Id AVP shall not be included in any command sent by Diameter nodes supporting applications defined in this specification. If the Vendor-Specific-Application-Id AVP is received in any of the commands defined in this specification, it shall be ignored by the receiving node.

NOTE: The Vendor-Specific-Application-Id AVP is included as an optional AVP in all Command Code Format specifications defined in this specification in order to overcome potential interoperability issues with intermediate Diameter agents non-compliant with IETF RFC 6733 [17].

The following Command Codes are defined in this specification:

**Table 6.2.2/1: Command-Code values for SLh**

Command-Name	Abbreviation	Code	Section
LCS-Routing-Info-Request	RIR	8388622	6.2.3
LCS-Routing-Info-Answer	RIA	8388622	6.2.4

For these commands, the Application-ID field shall be set to 16777291 (application identifier of the SLh interface application, allocated by IANA).

### 6.2.3 LCS-Routing-Info-Request (RIR) Command

The LCS-Routing-Info-Request (RIR) command, indicated by the Command-Code field set to 8388622 and the "R" bit set in the Command Flags field, is sent from GMLC to HSS.

Message Format

```
< LCS-Routing-Info-Request > ::= < Diameter Header: 8388622, REQ, PXY, 16777291 >
< Session-Id >
```

```

[ Vendor-Specific-Application-Id ]
{ Auth-Session-State }
{ Origin-Host }
{ Origin-Realm }
[ Destination-Host ]
{ Destination-Realm }
[ User-Name ]
[ MSISDN ]
[ GMLC-Number ]
*[ Supported-Features ]
*[ Proxy-Info ]
*[ Route-Record ]
*[ AVP ]

```

## 6.2.4 LCS-Routing-Info-Answer (RIA) Command

The LCS-Routing-Info-Answer (RIA) command, indicated by the Command-Code field set to 8388622 and the 'R' bit cleared in the Command Flags field, is sent from HSS to GMLC.

Message Format

```

< LCS-Routing-Info-Answer > ::= < Diameter Header: 8388622, PXY, 16777291 >
    < Session-Id >
    [ Vendor-Specific-Application-Id ]
    [ Result-Code ]
    [ Experimental-Result ]
    { Auth-Session-State }
    { Origin-Host }
    { Origin-Realm }
    *[ Supported-Features ]
    [ User-Name ]
    [ MSISDN ]
    [ LMSI ]
    [ Serving-Node ]
    *[ Additional-Serving-Node ]
    [ GMLC-Address ]
    [ PPR-Address ]
    [ RIA-Flags ]

```

\*[ AVP ]  
[ Failed-AVP ]  
\*[ Proxy-Info ]  
\*[ Route-Record ]

## 6.3 Result-Code AVP and Experimental-Result AVP Values

### 6.3.1 General

This section defines result code values that shall be supported by all Diameter implementations that conform to this specification.

### 6.3.2 Success

Result codes that fall within the Success category shall be used to inform a peer that a request has been successfully completed. The Result-Code AVP values defined in the Diameter base protocol specified in IETF RFC 6733 [17] shall be applied.

### 6.3.3 Permanent Failures

Errors that fall within the Permanent Failures category shall be used to inform the peer that the request has failed, and should not be attempted again. The Result-Code AVP values defined in the Diameter base protocol specified in IETF RFC 6733 [17] shall be applied. When one of the result codes defined here is included in a response, it shall be inside an Experimental-Result AVP and the Result-Code AVP shall be absent.

#### 6.3.3.1 DIAMETER\_ERROR\_USER\_UNKNOWN (5001)

This result code shall be sent by the HSS to indicate that the user identified by the IMSI or the MSISDN is unknown. This error code is defined in 3GPP TS 29.229 [8]

#### 6.3.3.2 DIAMETER\_ERROR\_UNAUTHORIZED\_REQUESTING\_NETWORK (5490)

This result code shall be sent by the HSS to indicate that the requesting GMLC's network is not authorized to request UE location information.

### 6.3.4 Transient Failures

Errors that fall within the transient failures category are those used to inform a peer that the request could not be satisfied at the time that it was received. The request may be able to be satisfied in the future.

#### 6.3.4.1 DIAMETER\_ERROR\_ABSENT\_USER (4201)

This result code shall be sent by the HSS to indicate that the location of the targeted user is not known at this time to satisfy the requested operation.

## 6.4 AVPs

### 6.4.1 General

The following table specifies the Diameter AVPs defined for the SLh interface protocol, their AVP Code values, types, possible flag values and whether or not the AVP may be encrypted. The Vendor-ID header of all AVPs defined in this specification shall be set to 3GPP (10415).



For all AVPs which contain bit masks and are of the type Unsigned32, bit 0 shall be the least significant bit. For example, to get the value of bit 0, a bit mask of 0x00000001 should be used.

**Table 6.4.1/1: SLh specific Diameter AVPs**

Attribute Name	AVP Code	Section defined	Value Type	AVP Flag rules				
				Must	May	Should not	Must not	May Encr.
LMSI	2400	6.4.2	OctetString	M, V				No
Serving-Node	2401	6.4.3	Grouped	M, V				No
MME-Name	2402	6.4.4	DiameterIdentity	M, V				No
MSC-Number	2403	6.4.5	OctetString	M, V				No
LCS-Capabilities-Sets	2404	6.4.6	Unsigned32	M, V				No
GMLC-Address	2405	6.4.7	Address	M, V				No
Additional-Serving-Node	2406	6.4.8	Grouped	M, V				No
PPR-Address	2407	6.4.9	Address	M, V				No
MME-Realm	2408	6.4.12	DiameterIdentity	V			M	No
SGSN-Name	2409	6.4.13	DiameterIdentity	V			M	No
SGSN-Realm	2410	6.4.14	DiameterIdentity	V			M	No
RIA-Flags	2411	6.4.15	Unsigned32	V			M	No

NOTE 1: The AVP header bit denoted as "M", indicates whether support of the AVP is required. The AVP header bit denoted as "V", indicates whether the optional Vendor-ID field is present in the AVP header. For further details, see IETF RFC 6733 [17].

The following table specifies the Diameter AVPs re-used by the SLh interface protocol from existing Diameter Applications, including a reference to their respective specifications and when needed, a short description of their use within SLh.

Any other AVPs from existing Diameter Applications, except for the AVPs from the Diameter base protocol as specified in IETF RFC 6733 [17], do not need to be supported. The AVPs from the Diameter base protocol as specified in IETF RFC 6733 [17] are not included in table 6.4.1/2, but they may be re-used for the SLh protocol.

**Table 6.4.1/2: SLh re-used Diameter AVPs**

Attribute Name	Reference	Comments
MSISDN	3GPP TS 29.329 [9]	
SGSN-Number	3GPP TS 29.272 [12]	
Supported-Features	3GPP TS 29.229 [8]	
Feature-List-ID	3GPP TS 29.229 [8]	See section 6.4.10
Feature-List	3GPP TS 29.229 [8]	See section 6.4.11
GMLC-Number	3GPP TS 29.272 [12]	
3GPP-AAA-Server-Name	3GPP TS 29.273 [16]	

## 6.4.2 LMSI

The LMSI AVP is of type OctetString and it shall contain the Local Mobile Station Identity (LMSI) allocated by the VLR, as defined in 3GPP TS 23.003 [10]. For further details on the encoding of this AVP, see 3GPP TS 23.003[10].

## 6.4.3 Serving-Node

The Serving-Node AVP is of type Grouped. This AVP shall contain the information about the network node serving the targeted user.

AVP format

Serving-Node ::= <AVP header: 2401 10415>

[ SGSN-Number ]  
 [ SGSN-Name ]  
 [ SGSN-Realm ]  
 [ MME-Name ]  
 [ MME-Realm ]  
 [ MSC-Number ]  
 [ 3GPP-AAA-Server-Name ]  
 [ LCS-Capabilities-Sets ]  
 [ GMLC-Address ]  
 \*[AVP]

The GMLC-Address AVP included in the Serving-Node grouped AVP shall contain, if present, the IPv4 or IPv6 address of the GMLC associated with the serving node (i.e., either the home GMLC or the visited GMLC, depending on the location of the serving node).

#### 6.4.4 MME-Name

The MME-Name AVP is of type DiameterIdentity and it shall contain the Diameter identity of the serving MME. For further details on the encoding of this AVP, see IETF RFC 6733 [17].

#### 6.4.5 MSC-Number

The MSC-Number AVP is of type OctetString and it shall contain the ISDN number of the serving MSC or MSC server in international number format as described in ITU-T Rec E.164 [15] and shall be encoded as a TBCD-string. See 3GPP TS 29.002 [3] for encoding of TBCD-strings.

#### 6.4.6 LCS-Capabilities-Sets

The LCS-Capabilities-Sets AVP is of type Unsigned32 and it shall contain a bit mask. The meaning of the bits shall be as defined in 3GPP 29.002 [3].

#### 6.4.7 GMLC-Address

The GMLC-Address AVP is of type Address and shall contain the IPv4 or IPv6 address of H-GMLC or the V-GMLC associated with the serving node.

#### 6.4.8 Additional-Serving-Node

The Additional-Serving-Node AVP is of type Grouped. This AVP shall contain the information about the network node serving the targeted user.

AVP format

Additional-Serving-Node ::= <AVP header: 2406 10415>

[ SGSN-Number ]  
 [ MME-Name ]  
 [ SGSN-Name ]  
 [ SGSN-Realm ]  
 [ MME-Realm ]

[ MSC-Number ]  
[ 3GPP-AAA-Server-Name ]  
[ LCS-Capabilities-Sets ]  
[ GMLC-Address ]  
\*[AVP]

The GMLC-Address AVP included in the Additional-Serving-Node grouped AVP shall contain, if present, the IPv4 or IPv6 address of the GMLC associated with the serving node (i.e., either the home GMLC or the visited GMLC, depending on the location of the serving node).

## 6.4.9 PPR-Address

The PPR-Address AVP is of type Address and contains the IPv4 or IPv6 address of the Privacy Profile Register for the targeted user.

## 6.4.10 Feature-List-ID AVP

The syntax of this AVP is defined in 3GPP TS 29.229 [8]. For this release, the Feature-List-ID AVP value shall be set to 1.

## 6.4.11 Feature-List AVP

The syntax of this AVP is defined in 3GPP TS 29.229 [8]. A null value indicates that there is no feature used by the application.

NOTE: There is no feature defined for this release.

## 6.4.12 MME-Realm

The MME-Realm AVP is of type DiameterIdentity and it shall contain the Diameter Realm Identity of the serving MME. For further details on the encoding of this AVP, see IETF RFC 6733 [17].

## 6.4.13 SGSN-Name

The SGSN-Name AVP is of type DiameterIdentity and it shall contain the Diameter identity of the serving SGSN. For further details on the encoding of this AVP, see IETF RFC 6733 [17].

## 6.4.14 SGSN-Realm

The SGSN-Realm AVP is of type DiameterIdentity and it shall contain the Diameter Realm Identity of the serving SGSN. For further details on the encoding of this AVP, see IETF RFC 6733 [17].

## 6.4.15 RIA-Flags

The RIA-Flags AVP is of type Unsigned32 and it shall contain a bit mask. The meaning of the bits shall be as defined in table 6.4.15/1:

**Table 6.4.15/1: RIA-Flags**

<b>Bit</b>	<b>Name</b>	<b>Description</b>
0	Combined-MME/SGSN-Supporting-Optimized-LCS-Proc	This bit, when set, indicates that the UE is served by the MME and the SGSN parts of the same combined MME/SGSN and this combined MME/SGSN supports the optimized LCS procedure.
NOTE1: Bits not defined in this table shall be cleared by the sending HSS and discarded by the receiving GMLC.		

## Annex A (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2010-03	CT#47	CP-090815				TS presented for approval in CT#47	9.0.0
2010-09	CT#49	CP-100463	000 2	1		Application ID and Command code values	9.1.0
2011-03	-	-	-	-		Update to Rel-10 version (MCC)	10.0.0
2011-12	CT#54	CP-11786	000 4	2		Identifications of MME in location procedures	10.1.0
2012-03	CT#55	CP-120023	000 7	1		MSC-Number format	10.2.0
2012-09	CT#57	CP-120490	000 8	1		LCS-Capabilities-Set AVP	10.3.0
2012-09	-	-	-	-		Update to Rel-11 version (MCC)	11.0.0
2012-12	CT#58	CP-120719	001 3	1		Clarification on the use of Vendor-Specific-Application-Id AVP	11.1.0
2013-03	CT#59	CP-130156	001 4	1		Providing Diameter identity of the SGSN to the GMLC over SLh interface	12.0.0
2013-12	CT#62	CP-130624	001 5	2		HSS and GMLC indicating the support for optimized LCS procedure	12.1.0
2014-09	CT#65	CP-140516	001 6	1		Title Closing TS 29.234 and reused AVP in TS 29.273	12.2.0
2015-03	CT#67	CP-150022	001 7	1		Send Routing Information Behaviour	12.3.0
2015-03	CT#67	CP-150022	001 8	1		Send Routing Information - Conditions for presence of conditional parameters	12.3.0
2015-12	-	-	-	-		Update to Rel-13 version (MCC)	13.0.0
2017-03	CT#75	CP-170036	001 9	-		Bit ordering in Diameter AVPs used as bit-masks	14.0.0
2017-03	CT#75	CP-170048	002 0	-		Update of reference for the Diameter base protocol	14.0.0
2017-03	CT#75	CP-170048	002 1	-		Handling of the Vendor-Specific-Application-Id AVP	14.0.0
2017-03	CT#75	CP-170048	002 2	1		Cardinality of the Failed-AVP AVP in answer	14.0.0
2018-06	CT#80	-	-	-		Update to Rel-15 version (MCC)	15.0.0
2020-07	CT#88e	-	-	-		Update to Rel-16 version (MCC)	16.0.0
2022-04	-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0

---

# History

<b>Document history</b>		
V17.0.0	April 2022	Publication