



**5G;
IP Multimedia Subsystem (IMS) Application Server (AS)
Services Stage 3
(3GPP TS 29.175 version 18.5.0 Release 18)**



Reference

RTS/TSGC-0429175vi50

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope	8
2 References	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions	9
3.2 Symbols.....	9
3.3 Abbreviations	9
4 Overview	9
5 Services offered by the IMS AS.....	10
5.1 Introduction	10
5.2 Nimsas_SessionEventControl Service	10
5.2.1 Service Description.....	10
5.2.2 Service Operations	10
5.2.2.1 Introduction.....	10
5.2.2.1A Subscribe	11
5.2.2.2 Notify	11
5.2.2.2.1 General	11
5.2.2.2.2 Notification for Session Event.....	11
5.3 Nimsas_MediaControl Service.....	12
5.3.1 Service Description.....	12
5.3.2 Service Operations	12
5.3.2.1 Introduction.....	12
5.3.2.2 MediaInstruction	12
5.3.2.2.1 General	12
5.3.2.2.2 Media Instruction.....	12
6 API Definitions	13
6.1 Nimsas_SessionEventControl Service API	13
6.1.1 API URI	13
6.1.2 Usage of HTTP	13
6.1.2.1 General	13
6.1.2.2 HTTP standard headers	14
6.1.2.2.1 General	14
6.1.2.2.2 Content type	14
6.1.2.3 HTTP custom headers	14
6.1.3 Resources.....	14
6.1.3.1 Overview	14
6.1.3.2 Resource: Session Event Subscriptions.....	15
6.1.3.2.1 Description	15
6.1.3.2.2 Resource Definition.....	15
6.1.3.2.3 Resource Standard Methods	15
6.1.3.2.4 Resource Custom Operations	15
6.1.4 Custom Operations without associated resources	15
6.1.5 Notifications	15
6.1.5.1 General	15
6.1.5.2 Session Event Notification.....	16
6.1.5.2.1 Description	16
6.1.5.2.2 Target URI.....	16
6.1.5.2.3 Standard Methods.....	16
6.1.6 Data Model	17

6.1.6.1	General	17
6.1.6.2	Structured data types	18
6.1.6.2.1	Introduction	18
6.1.6.2.2	Type: SessionEventNotification	19
6.1.6.2.3	Type: NotificationEvent	19
6.1.6.2.4	Type: SessionInfo	20
6.1.6.2.5	Type: MediaInfo	20
6.1.6.2.6	Type: DcMediaSpec	21
6.1.6.2.7	Type: QosHintInfo	21
6.1.6.3	Simple data types and enumerations	21
6.1.6.3.1	Introduction	21
6.1.6.3.2	Simple data types	21
6.1.6.3.3	Enumeration: EventType	22
6.1.6.3.4	Enumeration: MediaType	22
6.1.6.3.5	Enumeration: SessionCase	22
6.1.6.3.6	Enumeration: EventInitiator	22
6.1.6.4	Data types describing alternative data types or combinations of data types	23
6.1.6.5	Binary data	23
6.1.7	Error Handling	23
6.1.7.1	General	23
6.1.7.2	Protocol Errors	23
6.1.7.3	Application Errors	23
6.1.8	Feature negotiation	23
6.1.9	Security	23
6.1.10	HTTP redirection	24
6.2	Nimsas_MediaControl Service API	24
6.2.1	API URI	24
6.2.2	Usage of HTTP	24
6.2.2.1	General	24
6.2.2.2	HTTP standard headers	25
6.2.2.2.1	General	25
6.2.2.2.2	Content type	25
6.2.2.3	HTTP custom headers	25
6.2.3	Resources	25
6.2.3.1	Overview	25
6.2.3.2	Resource: Individual call session	26
6.2.3.2.1	Description	26
6.2.3.2.2	Resource Definition	26
6.2.3.2.3	Resource Standard Methods	26
6.2.3.2.4	Resource Custom Operations	26
6.2.4	Custom Operations without associated resources	27
6.2.5	Notifications	27
6.2.6	Data Model	27
6.2.6.1	General	27
6.2.6.2	Structured data types	28
6.2.6.2.1	Introduction	28
6.2.6.2.2	Type: MediaInstructionData	28
6.2.6.2.3	Type: MediaInstructions	29
6.2.6.2.4	Type: DcMediaSpecification	30
6.2.6.2.5	Type: ArMediaSpecification	30
6.2.6.2.6	Type: Mdc2EndpointInfo	31
6.2.6.2.7	Type: AudioVideoReNegotiationInd	31
6.2.6.3	Simple data types and enumerations	32
6.2.6.3.1	Introduction	32
6.2.6.3.2	Simple data types	32
6.2.6.3.3	Enumeration: MediaInstruction	32
6.2.6.3.4	Enumeration: MediaConnSide	32
6.2.6.4	Data types describing alternative data types or combinations of data types	32
6.2.6.5	Binary data	32
6.2.7	Error Handling	33
6.2.7.1	General	33
6.2.7.2	Protocol Errors	33

6.2.7.3	Application Errors	33
6.2.8	Feature negotiation	33
6.2.9	Security	33
6.2.10	HTTP redirection	33
Annex A (normative): OpenAPI specification.....		35
A.1	General	35
A.2	Nimsas_SessionEventControl API.....	35
A.3	Nimsas_MediaControl API	39
Annex B (informative): Change history		43
History		45

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the stage 3 protocol and data model for the Nimsas Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the IMS AS.

The 5G System stage 2 architecture and procedures are specified in TS 23.501 [2] and TS 23.502 [3].

The IP Multimedia Subsystem (IMS) supporting DC architecture and procedures are specified in TS 23.228 [14].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in TS 29.500 [4] and TS 29.501 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 7807: "Problem Details for HTTP APIs".
- [14] 3GPP TS 23.228: "IP Multimedia Subsystem (IMS); Stage 2".
- [15] 3GPP TS 29.562: "5G System; Home Subscriber Server (HSS) Services; Stage 3".
- [16] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [17] 3GPP TS 29.176: "IP Multimedia Subsystems (IMS); Media Function (MF) Services; Stage 3".
- [18] 3GPP TS 24.610: "Communication HOLD (HOLD) using IP Multimedia (IM) Core Network (CN) subsystem; Protocol specification".
- [19] 3GPP TS 24.186: "IMS Data Channel applications; Protocol specification".

- [20] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [21] 3GPP TS 24.604: "Communication Diversion (CDIV) using IP Multimedia (IM); Core Network (CN) subsystem; Protocol specification".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.228 [14] apply:

- **Bootstrap data channel**
- **DC Application Server**

3.2 Symbols

For the purposes of the present document, the following symbols given in 3GPP TS 23.228 [14] apply:

- | | |
|-----|---|
| DC1 | Reference Point between an SBI capable IMS AS and DCSF. |
| DC2 | Reference Point between an SBI capable IMS AS and MF. |

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

- | | |
|------|----------------------------------|
| AR | Augmented Reality |
| DC | Data Channel |
| DCSF | Data Channel Signalling Function |
| MF | Media Function |

4 Overview

The IP Multimedia Subsystem (IMS) architecture supporting the Data Channel services is defined in 3GPP TS 23.228 [14].

The IP Multimedia Subsystem (IMS) Application Server (AS) is enhanced to offer services to DCSF via the Nimsas service-based interface (see 3GPP TS 23.228 [14]) and support the following functionalities:

- The IMS AS interacts with the DCSF via DC1 for event notifications;
- The IMS AS receives the data channel control instructions from the DCSF and accordingly interacts with the MF via DC2 for data channel media resource management.

Figure 4-1 provides the reference model (in service-based interface representation and in reference point representation), with focus on the IMS AS.

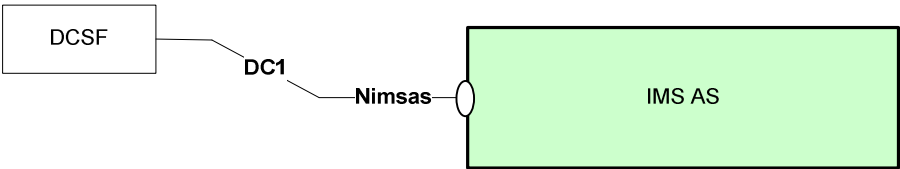


Figure 4-1: Reference model – IMS AS

DC1 is the reference point between an SBI capable IMS AS and DCSF.

5 Services offered by the IMS AS

5.1 Introduction

The IMS AS offers to other NFs the following services:

- Nimsas_SessionEventControl. This service enables the consumer to be notified about session events when served IMS subscribers take part in IMS sessions.
- Nimsas_MediaControl. This service enables the consumer to control IMS AS handling of media flow within an IMS session.

Table 5.1-1 summarizes the SBI services produced by the IMS AS and the corresponding APIs defined for this specification.

Table 5.1-1: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
Nimsas_SessionEventControl	6.1	IMS AS SessionEventControl Service	TS29175_Nimsas_SessionEventControl.yaml	nimsas-sec	A.2
Nimsas_MediaControl	6.2	IMS AS MediaControl Service	TS29175_Nimsas_MediaControl.yaml	nimsas-mc	A.3

5.2 Nimsas_SessionEventControl Service

5.2.1 Service Description

The Nimsas_SessionEventControl service enables the consumer to be notified about session events when served IMS subscribers take part in IMS sessions.

5.2.2 Service Operations

5.2.2.1 Introduction

The Service operations defined for the Nimsas_SessionEventControl service are as follows:

- Notify: It allows the IMS AS to notify the IMS session control events of a specific IMS subscriber to NFs. This service operation reports the event to the consumer that has subscribed implicitly.

NOTE: Explicit subscription to receive session events is another service operation defined in TS 23.228 [14] which has not specified in this Release. In this Release an implicit subscription is assumed where the IMS AS notifies a configured or discovered the NF consumer of a call event through a Notify.

Table 5.2.2.1-1: Service operations supported by the Nimsas_SessionEventControl service

Service Operations	Description	Operation Semantics	Example Consumer(s)
Notify	Notification about IMS session control events of a specific IMS subscriber.	Subscribe/Notify	DCSF

5.2.2.1A Subscribe


This is a pseudo operation, the IMS AS does not actually provide Subscribe service operation through Nimsas_SessionEventControl service in this Release. The actual subscription is implicitly subscribed with the SessionEventNotificationUri.

5.2.2.2 Notify

5.2.2.2.1 General

This service operation is invoked by IMS AS and used to enables the IMS AS to notify the NF service consumers (e.g. DCSF) of IMS session events related to a specific served IMS subscriber requesting use of IMS media (e.g. data channel media).

5.2.2.2.2 Notification for Session Event

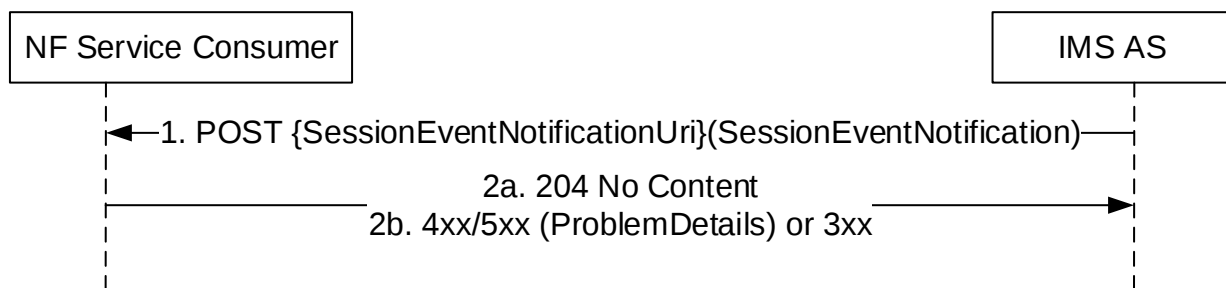**Figure 5.2.2.2-1: Notification for Session Event**

1. If the IMS AS observes the IMS session control events of a specific IMS subscriber that requesting use of IMS data channel media, and it determines based on the IMS subscriber's service profile that the events need to be notified to the DCSF, the IMS AS shall send a POST request to the SessionEventNotificationUri as specified in clause 6.1.5.2.2.

The IMS AS discovers the DCSF and its session event notification URI based on local configuration or via NRF, as specified in clause AC.7.1 of 3GPP TS 23.228 [14].

- 2a. Upon success, the NF Service Consumer responds with "204 No Content". The NF service consumer may invoke the Nimsas_MediaControl service before sending the session event notification response to IMS AS if the NF service consumer determines that media resources for data channel are needed.
- 2b. On failure or redirection:
 - If the NF Service Consumer does not consider the "SessionEventNotificationUri" as a valid notification URI, the NF Service Consumer shall return "404 Not Found" status code with the ProblemDetails IE providing details of the error.
 - In the case of redirection, the NF service consumer shall return 3xx status code, which shall contain a Location header with an URI pointing to the endpoint of another NF service consumer endpoint. A RedirectResponse IE may be included in the content of POST response.

5.3 Nimsas_MediaControl Service

5.3.1 Service Description

The Nimsas_MediaControl service enables the consumer to control IMS AS handling of media flow within an IMS session. The service can be used by the consumer before responding to a Nimsas_SessionEventControl_Notify request.

5.3.2 Service Operations

5.3.2.1 Introduction

The Service operations defined for the Nimsas_MediaControl service are as follows:

- **MediaInstruction:** It provides instructions to the IMS AS for all media flows a consumer wants to control based on its policies for the received IMS session event, and that may require media resource reservation on MF.

NOTE: For the case when a specific media flow needs to be terminated in MF media resource (i.e. termination of a Data Channel media descriptor offered by one of the IMS subscribers) or originated by the MF (i.e. origination of a data channel media descriptor to be offered towards one of the IMS subscribers), the consumer must provide a complete MF media specification including information required by MF to know how to terminate or originate the media flow.

Table 5.3.2.1-1: Service operations supported by the Nimsas_MediaControl service

Service Operations	Description	Operation Semantics	Example Consumer(s)
MediaInstruction	Instructions to the IMS AS for all media flows a consumer wants to control based on its policies for the received IMS session event	Request/Response	DCSF

5.3.2.2 MediaInstruction

5.3.2.2.1 General

This service operation provides instructions to the IMS AS for all media flows a consumer wants to control based on its policies for the received IMS session event, and that may require resource reservation in media resource

The MediaInstruction service operation defined for Nimsas_MediaControl service is used:

- to enable the NF consumer to instruct the IMS AS how to manage the MF media resource. E.g., setting up the bootstrap data channel with MF both for originating and terminating side, terminating the media flow of the originating UE to MF and updating the MF resource with MDC2 media endpoint information of DC Application Server.

5.3.2.2.2 Media Instruction

Figure 5.3.2.2.2-1 shows a scenario where the NF service consumer (e.g. DCSF) sends a request to the IMS AS to instruct the IMS AS how to manage the MF media resource. The request contains the IMS session identity ({sessionId}) which is assigned by the IMS AS during the IMS session setup and will be notified to consumer via Nimsas_SessionEventControl notify service operation. After that, the consumer shall reuse the session ID it received from the IMS AS for referencing the same session.

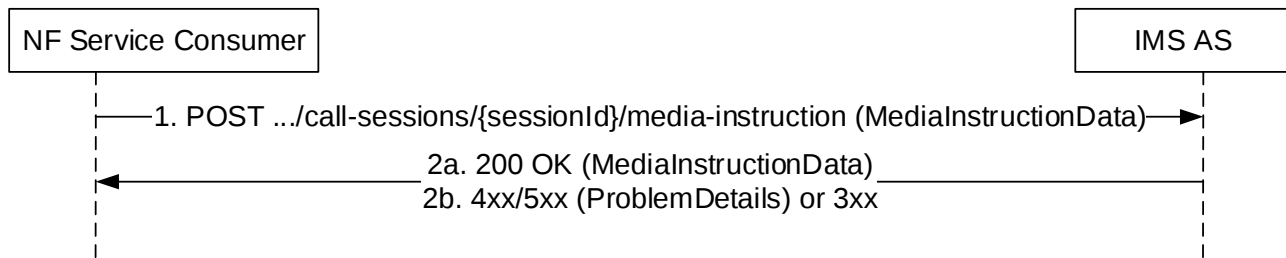


Figure 5.3.2.2.2-1: Media instruction from NF service consumer

1. The NF service consumer shall send a POST request to the resource representing the individual session resource in the IMS AS. The payload body of the POST request shall contain the media instructions for all the media flows that the NF Service Consumer want to control based on its policies for the received IMS session event via Nimsas_SessionEventControl notification.

2a. Upon success, the IMS AS responds with "200 OK" with the message body containing a representation of the created media instruction data.

2b. On failure or redirection:

In the case of failure, one of the HTTP status code listed in Table 6.2.3.2.4.2.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.2.3.2.4.2.2-2.

In the case of redirection, the NF service producer shall return 3xx status code, which shall contain a Location header with an URI pointing to the endpoint of another NF service producer endpoint.

6 API Definitions

6.1 Nimsas_SessionEventControl Service API

6.1.1 API URI

The Nimsas_SessionEventControl service shall use the Nimsas_SessionEventControl API.

The API URI of the Nimsas_SessionEventControl API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nimsas-sec".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.1.3.

6.1.2 Usage of HTTP

6.1.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nimsas_SessionEventControl API is contained in Annex A.

6.1.2.2 HTTP standard headers

6.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

6.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

6.1.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

6.1.3 Resources

6.1.3.1 Overview

This clause describes the structure for the Resource URIs and the resources and methods used for the service.

Figure 6.1.3.1-1 depicts the resource URIs structure for the Nimsas_SessionEventControl service API.

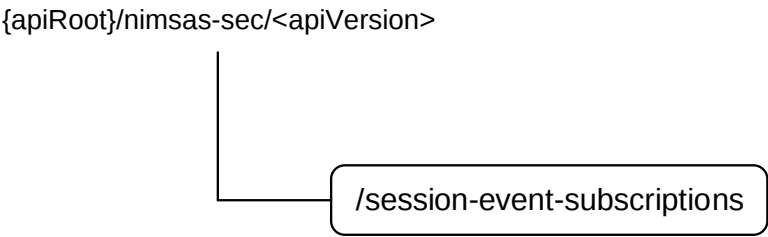


Figure 6.1.3.1-1: Resource URI structure of the Nimsas_SessionEventControl API

Table 6.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.1.3.1-1: Resources and methods overview

Resource purpose/name	Resource URI (relative path after API URI)	HTTP method or custom operation	Description (service operation)
Session Event Subscriptions (Collection)	/session-event-subscriptions	POST	This is a pseudo resource.

6.1.3.2 Resource: Session Event Subscriptions

6.1.3.2.1 Description

6.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nimsas-sec/<apiVersion>/session-event-subscriptions

This resource shall support the resource URI variables defined in table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1

6.1.3.2.3 Resource Standard Methods

6.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.1.3.2.3.1-1.

Table 6.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.2.3.1-2 and the response data structures and response codes specified in table 6.1.3.2.3.1-3.

Table 6.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
Any			

Table 6.1.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a				
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

6.1.3.2.4 Resource Custom Operations

None.

6.1.4 Custom Operations without associated resources

None in this release of the specification.

6.1.5 Notifications

6.1.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

Table 6.1.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Session Event Notification	{SessionEventNotificationUri}	POST	Report the session event observed.

6.1.5.2 Session Event Notification

6.1.5.2.1 Description

The Session Event Notification is used by the IMS AS to report the observed Session Event to notification endpoints.

6.1.5.2.2 Target URI

The Callback URI "{SessionEventNotificationUri}" shall be used with the callback URI variables defined in table 6.1.5.2.2-1.

Table 6.1.5.2.2-1: Callback URI variables

Name	Definition
SessionEventNotificationUri	The notification URI of the Service Consumer (i.e., DCSF) to receive the session events. In this release, the SessionEventNotificationUri of the Service Consumer is locally configured in the IMS AS or discovered by the IMS AS via NRF (in the default notification subscription with the "DC_SESSION_EVENT_NOTIFICATION" notification type).

6.1.5.2.3 Standard Methods

6.1.5.2.3.1 POST

This method shall support the request data structures specified in table 6.1.5.2.3.1-1 and the response data structures and response codes specified in table 6.1.5.2.3.1-1.

Table 6.1.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
SessionEventNotification	M	1	The session event notification to notification endpoints.

Table 6.1.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents a successful notification of the event.
ProblemDetails	O	0..1	404 Not Found	Indicates the session event notification has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - USER_NOT_FOUND, e.g. if the NF Service Consumer (e.g. DCSF) does not serve this service user; - NOTIFICATION_URI_NOT_FOUND, if the NF Service Consumer (e.g. DCSF) considers the "SessionEventNotificationUri" is not recognized.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

Table 6.1.5.2.3-3: Headers supported by the 307 Response Code on this endpoint

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer instance to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF instance ID towards which the notification is redirected

Table 6.1.5.2.3-4: Headers supported by the 308 Response Code on this endpoint

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer instance to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF instance ID towards which the notification is redirected

6.1.6 Data Model

6.1.6.1 General

This clause specifies the application data model supported by the API.

Table 6.1.6.1-1 specifies the data types defined for the Nimsas_SessionEventControl service based interface protocol.

Table 6.1.6.1-1: Nimsas_SessionEventControl specific Data Types

Data type	Clause defined	Description
SessionEventNotification	6.1.6.2.2	The session event notification item.
NotificationEvent	6.1.6.2.3	The notification event information.
SessionInfo	6.1.6.2.4	The session information related to the notification event.
MediaInfo	6.1.6.2.5	The media information related to the notification event.
DcMediaSpec	6.1.6.2.6	The data channel media specification information which includes media description attributes.
QoSHintInfo	6.1.6.2.7	The QoS requirement of the media.
EventType	6.1.6.3.3	The type of the event for which the notification is generated.
MediaType	6.1.6.3.4	The type of the media for which the notification is generated.
SessionCase	6.1.6.3.5	The type of the session case.
EventInitiator	6.1.6.3.6	The initiator of the event for which the notification is generated.

Table 6.1.6.1-2 specifies data types re-used by the Nimsas_SessionEventControl service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nimsas_SessionEventControl service based interface.

Table 6.1.6.1-2: Nimsas_SessionEventControl re-used Data Types

Data type	Reference	Comments
ImsPublicId	3GPP TS 29.562 [15]	IMS Public Identity.
DcStream	3GPP TS 29.571 [16]	Data Channel mapping and configuration information.
MaxMessageSize	3GPP TS 29.571 [16]	Maximum message size of to be expected.
DcEndpoint	3GPP TS 29.571 [16]	local or remote endpoint for the Data Channel.
SessionId	3GPP TS 29.571 [16]	IMS Session Identity.
MediaId	3GPP TS 29.571 [16]	IMS media flow identity.
BdcUsedBy	3GPP TS 29.571 [16]	The party using the bootstrap data channel.
AppBindingInfo	3GPP TS 29.571 [16]	The application binding information of the application data channel.

6.1.6.2 Structured data types

6.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.1.6.2.2 Type: SessionEventNotification

Table 6.1.6.2.2-1: Definition of type SessionEventNotification

Attribute name	Data type	P	Cardinality	Description
notificationEvent	NotificationEvent	M	1	The NotificationEvent corresponds to a report on one subscribed event.
sessionId	SessionId	M	1	The session ID is the identity of the IMS session for which the event relates to. This IE contains the information in the Call-ID header which is the typical header of SIP message.
sessionInfo	SessionInfo	C	0..1	The sessionInfo is the IMS session related information, e.g. the calling and called identity. It shall be contained when the attribute eventType of the notificationEvent is one of the "SESSION_ESTABLISHMENT_REQUEST", "MEDIA_CHANGE_REQUEST", "SESSION_ESTABLISHMENT_SUCCESS" (NOTE).
mediaInfoList	map(MedialInfo)	C	1..N	Media info list includes a list of media related information, e.g. media identity, media type and media specifications. The mediald attribute within the MedialInfo data type is the key of the map. It shall be contained when the attribute eventType of the notificationEvent is one of the "SESSION_ESTABLISHMENT_REQUEST", "SESSION_ESTABLISHMENT_PROGRESS", "SESSION_ESTABLISHMENT_ALERTING", "SESSION_ESTABLISHMENT_SUCCESS", "MEDIA_CHANGE_REQUEST", "MEDIA_CHANGE_SUCCESS", "MEDIA_CHANGE_FAILURE", or "MEDIA_CHANGE_CANCEL".
NOTE: The sessionInfo shall be present when the attribute eventType of the notificationEvent is set to "SESSION_ESTABLISHMENT_SUCCESS" and the originating IMS AS received the redirected-to party identity via the History-Info header field in the 200 OK responses to the initial INVITE request.				

6.1.6.2.3 Type: NotificationEvent

Table 6.1.6.2.3-1: Definition of type NotificationEvent

Attribute name	Data type	P	Cardinality	Description
eventType	EventType	M	1	The event type of the event for which the notification is generated.
eventInitiator	EventInitiator	C	0..1	Event initiator indicates initiator of the event, e.g. "served IMS subscriber" vs "remote IMS subscriber". It shall be contained when the eventType is "SESSION_ESTABLISHMENT_REQUEST" or "MEDIA_CHANGE_REQUEST".

6.1.6.2.4 Type: SessionInfo

Table 6.1.6.2.4-1: Definition of type SessionInfo

Attribute name	Data type	P	Cardinality	Description
callingIdentity	ImsPublicId	O	0..1	The public identity of the calling IMS subscriber. (NOTE 1)
calledIdentity	ImsPublicId	O	0..1	The public identity of the called IMS Subscriber. (NOTE 2)
sessionCase	SessionCase	O	0..1	Indicator to indicate that whether this is an originating or terminating IMS session.
NOTE 1: The callingIdentity shall be set to the value of the P-Asserted-Identity header field of the received initial INVITE request, see 3GPP TS 24.186 [19] clause 9.3.2.2 and clause 9.3.3.2.				
NOTE 2: The calledIdentity shall be set to the Request URI of the received initial INVITE request, see 3GPP TS 24.186 [19] clause 9.3.2.2 and clause 9.3.3.2. If communication diversion occurs and the originating IMS AS received the History-Info header field in the 200 OK responses to the initial INVITE request, the originating IMS AS shall set the calledIdentity attribute based on the received History-Info header field, see 3GPP TS 24.604 [21] clause 4.5.2.7.				

6.1.6.2.5 Type: MediaInfo

Table 6.1.6.2.5-1: Definition of type MediaInfo

Attribute name	Data type	P	Cardinality	Description
mediaId	MediaId	M	1	The media ID uniquely identifies this media item within the list. The identity is allocated by IMS AS.
mediaType	MediaType	M	1	The media type of the media for which the notification is generated.
dcMediaSpec	DcMediaSpec	C	0..1	The data channel media specification includes the relevant media attributes of interest to the consumer. It shall be contained if the mediaType is set to "DC".
mediaSuspended	boolean	C	0..1	This IE indicates whether the media is suspended or not. It shall be contained if the media is suspended or resumed as specified in 3GPP TS 24.610 [18] and 3GPP TS 24.186 [19]. - true: the media is suspended. - false: the media is resumed.
mediaRemovalInd	boolean	C	0..1	This IE indicates whether the media is to be removed or not. It shall be only present with true value if the media is to be removed, e.g. removal of bootstrap data channel media during the interaction with supplementary service, or removal of application data channel in other cases. Presence with false value shall be prohibited.

6.1.6.2.6 Type: DcMediaSpec

Table 6.1.6.2.6-1: Definition of type DcMediaSpec

Attribute name	Data type	P	Cardinality	Description
streams	map(DcStream)	M	1..N	Represents the data channel mapping and configuration information when originating/terminating data channel media flows on the Mb interface. The streamId attribute within the DcStream data type is the key of the map. (NOTE)
maxMessageSize	MaxMessageSize	O	0..1	Represents the maximum message size of to be expected. (NOTE)
receivedDcEndpoint	DcEndpoint	M	0..1	Represents the SCTP and DTLS endpoint information for the Data Channel received from the SDP offer/answer. (NOTE)
bdcUsedby	BdcUsedBy	C	0..1	Represents the party using the bootstrap data channel. It shall be contained when the mediaId in the data type MediaInfo represents bootstrap data channel and the streamId set to 100 and 110.
appBindingInfo	AppBindingInfo	C	0..1	Represents the application binding information of the application data channel. It shall be contained when the mediaId in the data type MediaInfo represents application data channel.
qosHintInfo	QosHintInfo	C	0..1	Represents the QoS information that is provided within the SDP media level attribute "a=3gpp-qos-hint". It shall be included if the received SDP offer and SDP answer contains the "a=3gpp-qos-hint" attribute line.
NOTE: The attribute and the value are derived from the SDP received by the IMS AS in a SIP INVITE or a re-INVITE request and the corresponding response related to an IMS Data Channel.				

6.1.6.2.7 Type: QosHintInfo

Table 6.1.6.2.7-1: Definition of type QosHintInfo

Attribute name	Data type	P	Cardinality	Description
loss	number	O	0..1	Represents the maximum desirable end-to-end transport level packet loss rate in percent (without "%" sign) as a zero-based-integer or as a non-zero-real value.
localLoss	number	O	0..1	Represents the maximum desirable end-to-end transport level packet loss rate applied across the local link. It may be included if the loss is included.
latency	number	O	0..1	Represents the maximum desirable end-to-end transport level packet latency in milliseconds as a zero-based-integer or as a non-zero-real value.
localLatency	number	O	0..1	Represents the maximum desirable end-to-end transport level packet latency applied across the local link. It may be included if the loss is included.

6.1.6.3 Simple data types and enumerations

6.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.1.6.3.2 Simple data types

The simple data types defined in table 6.1.6.3.2-1 shall be supported.

Table 6.1.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

6.1.6.3.3 Enumeration: EventType

The enumeration EventType represents the type of the event for which the notification is generated. It shall comply with the provisions defined in table 6.1.6.3.3-1.

Table 6.1.6.3.3-1: Enumeration EventType

Enumeration value	Description
"SESSION_ESTABLISHMENT_REQUEST"	Session establishment request event.
"SESSION_ESTABLISHMENT_PROGRESS"	Session establishment progress event.
"SESSION_ESTABLISHMENT_ALERTING"	Session establishment alerting event.
"SESSION_ESTABLISHMENT_SUCCESS"	Session establishment success event.
"SESSION_ESTABLISHMENT_FAILURE"	Session establishment failure event.
"SESSION_ESTABLISHMENT_CANCEL"	Session establishment cancel event.
"MEDIA_CHANGE_REQUEST"	Media change request event.
"MEDIA_CHANGE_SUCCESS"	Media change success event.
"MEDIA_CHANGE_FAILURE"	Media change failure event.
"MEDIA_CHANGE_CANCEL"	Media change cancel event.
"SESSION_TERMINATION"	Session termination event.

6.1.6.3.4 Enumeration: MediaType

The enumeration MediaType represents the type of the media for which the notification is generated. It shall comply with the provisions defined in table 6.1.6.3.4-1.

Table 6.1.6.3.4-1: Enumeration MediaType

Enumeration value	Description
"DC"	Data channel media type.
"AUDIO"	Audio media type.
"VIDEO"	Video media type.

6.1.6.3.5 Enumeration: SessionCase

The enumeration SessionCase represents the type of the session to for which the notification is generated. It shall comply with the provisions defined in table 6.1.6.3.5-1.

Table 6.1.6.3.5-1: Enumeration SessionCase

Enumeration value	Description
"ORIGINATING_IMS_SESSION"	Originating IMS session.
"TERMINATING_IMS_SESSION"	Terminating IMS session.

6.1.6.3.6 Enumeration: EventInitiator

The enumeration eventInitiator represents the initiator of the event for which the notification is generated. It shall comply with the provisions defined in table 6.1.6.3.6-1.

Table 6.1.6.3.6-1: Enumeration EventInitiator

Enumeration value	Description
"SERVED_IMS_SUBSCRIBER"	Served IMS subscriber.
"REMOTE_IMS_SUBSCRIBER"	Remote IMS subscriber.

6.1.6.4 Data types describing alternative data types or combinations of data types

None in this release of the specification.

6.1.6.5 Binary data

None in this release of the specification.

6.1.7 Error Handling

6.1.7.1 General

For the Nimsas_SessionEventControl API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nimsas_SessionEventControl API.

6.1.7.2 Protocol Errors

No specific procedures for the Nimsas_SessionEventControl service are specified.

6.1.7.3 Application Errors

The application errors defined for the Nimsas_SessionEventControl service are listed in Table 6.1.7.3-1.

Table 6.1.7.3-1: Application errors

Application Error	HTTP status code	Description
USER_NOT_FOUND	404 Not Found	The service user is not served by this DCSF, e.g. no data channel configurations for this service user is found.
NOTIFICATION_URI_NOT_FOUND	404 Not Found	The session event notification URI is not recognized by the NF service consumer (i.e. DCSF).

6.1.8 Feature negotiation

The optional features in table 6.1.8-1 are defined for the Nimsas_SessionEventControl API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 6.1.8-1: Supported Features

Feature number	Feature Name	Description

6.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nimsas_SessionEventControl API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the

"Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nimsas_SessionEventControl API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nimsas_SessionEventControl service.

The Nimsas_SessionEventControl API defines a single scope "nimsas-sessioneventcontrol" for the entire service, and it does not define any additional scopes at resource or operation level.

6.1.10 HTTP redirection

An HTTP request may be redirected to a different IMS AS service instance when using direct or indirect communications (see 3GPP TS 29.500 [4]).

An SCP that reselects a different NF consumer (e.g. DCSF) instance will return the NF Instance ID of the new NF consumer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of 3GPP TS 29.500 [4].

If an NF consumer (e.g. DCSF) redirects a service request to a different NF consumer using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new NF consumer towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of 3GPP TS 29.500 [4].

6.2 Nimsas_MediaControl Service API

6.2.1 API URI

The Nimsas_MediaControl service shall use the Nimsas_MediaControl API.

The API URI of the Nimsas_MediaControl API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nimsas-mc".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.2.3.

6.2.2 Usage of HTTP

6.2.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nimsas_MediaControl API is contained in Annex A.

6.2.2.2 HTTP standard headers

6.2.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

6.2.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

6.2.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

6.2.3 Resources

6.2.3.1 Overview

This clause describes the structure for the Resource URIs and the resources and methods used for the service.

Figure 6.2.3.1-1 depicts the resource URIs structure for the Nimsas_MediaControl service API.

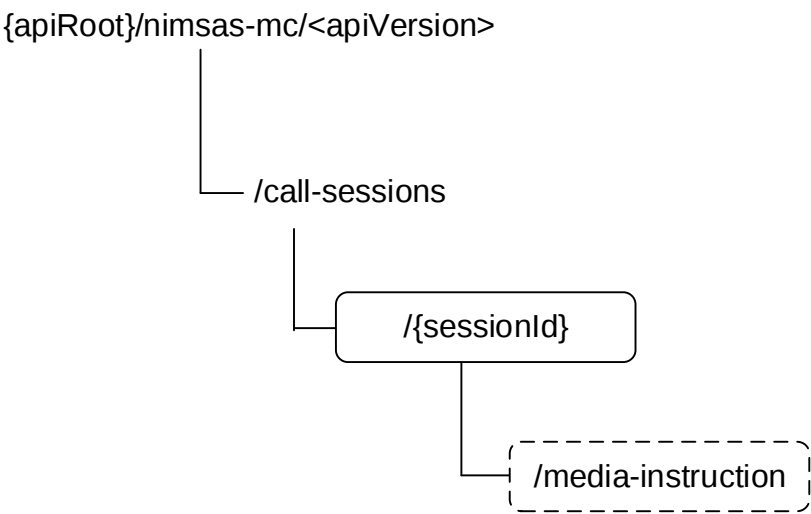


Figure 6.2.3.1-1: Resource URI structure of the Nimsas_MediaControl API

Table 6.2.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.2.3.1-1: Resources and methods overview

Resource purpose/name	Resource URI (relative path after API URI)	HTTP method or custom operation	Description (service operation)
Individual call session (Document)	/call-sessions/{sessionId}/media-instruction	media-instruction (POST)	Instructs the IMS AS on how to control the media resources.

6.2.3.2 Resource: Individual call session

6.2.3.2.1 Description

This resource represents an individual call session created in the IMS AS.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [5]).

6.2.3.2.2 Resource Definition

Resource URI: **{apiRoot}/nimsas-mc/<apiVersion>/call-sessions/{sessionId}**

This resource shall support the resource URI variables defined in table 6.2.3.2.2-1.

Table 6.2.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
sessionId	SessionId	Session ID assigned by the IMS AS during the IMS session setup and will be notified to consumer via Nimsas_SessionEventControl service. The consumer shall reuse the session ID it received from the IMS AS for referencing the same session.

6.2.3.2.3 Resource Standard Methods

None.

6.2.3.2.4 Resource Custom Operations

6.2.3.2.4.1 Overview

Table 6.2.3.2.4.1-1: Custom operations

Operation Name	Custom operation URI	Mapped HTTP method	Description
media-instruction	{resourceUri}/media-instruction	POST	Update call session service operation.

6.2.3.2.4.2 Operation: media-instruction

6.2.3.2.4.2.1 Description

6.2.3.2.4.2.2 Operation Definition

This custom operation updates an individual call session resource and provide a set of media instruction information for a given IMS session, towards IMS AS.

This operation shall support the request data structures specified in table 6.2.3.2.4.2.2-1 and the response data structure and response codes specified in table 6.2.3.2.4.2.2-2.

Table 6.2.3.2.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MediaInstructionData	M	1	Representation of the updates to apply to the call session.

Table 6.2.3.2.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MediaInstructionData	C	0..1	200 OK	Successful update of the call session, when the IMS AS needs to return information in the response.
n/a			204 No Content	Successful update of the call session, when the IMS AS does not need to return information in the response.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	400 Bad Request	Indicates the media instruction has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - MEDIA_ID_NOT_FOUND
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

Table 6.2.3.3.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer instance to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF instance ID towards which the request is redirected.

Table 6.2.3.3.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer instance to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target SMF (service) instance ID towards which the request is redirected.

6.2.4 Custom Operations without associated resources

None in this release of the specification.

6.2.5 Notifications

None in this release of the specification.

6.2.6 Data Model

6.2.6.1 General

This clause specifies the application data model supported by the API.

Table 6.2.6.1-1 specifies the data types defined for the Nimsas_MediaControl service based interface protocol.

Table 6.2.6.1-1: Nimsas_MediaControl specific Data Types

Data type	Clause defined	Description
ArMediaSpecification	6.2.6.2.5	The AR media specification information needed for AR communication services from application layer.
AudioVideoReNegotiationInd	6.2.6.2.7	The audio/video media re-negotiation indication information to connect the UE's audio/video media stream to MF.
DcMediaSpecification	6.2.6.2.4	The data channel media specification information needed for data channel media stream from application layer.
Mdc2EndpointInfo	6.2.6.2.6	The MDC2 media endpoint information.
MediaInstruction	6.2.6.3.3	The media instruction for handling a specific media flow.
MediaInstructionData	6.2.6.2.2	The media instruction data for a specific session.
MediaInstructions	6.2.6.2.3	The media instructions for a specific media flow.
MediaConnSide	6.2.6.3.4	The side that the audio or video media need to be connected to MF. E.g., both the originating and terminating side.

Table 6.2.6.1-2 specifies data types re-used by the Nimsas_MediaControl service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nimsas_MediaControl service based interface.

Table 6.2.6.1-2: Nimsas_MediaControl re-used Data Types

Data type	Reference	Comments
DcStream	3GPP TS 29.571 [16]	Data Channel mapping and configuration information.
MdcEndpoint	3GPP TS 29.571 [16]	The MDC1 and MDC2 Endpoint information.
MaxMessageSize	3GPP TS 29.571 [16]	Maximum SCTP user message size.
Mdc2Protocol	3GPP TS 29.176 [17]	Transport layer protocols for MDC2 interface.
MediaId	3GPP TS 29.571 [16]	IMS media flow identity.
MediaProxy	3GPP TS 29.571 [16]	Media proxy configuration applicable to the media flow.
MediaResourceType	3GPP TS 29.571 [16]	IMS media resource type.
ReplaceHttpUrl	3GPP TS 29.571 [16]	A list of replacement HTTP URL per stream ID.
SessionId	3GPP TS 29.571 [16]	IMS session identity.
Uri	3GPP TS 29.571 [16]	URI
BdcUsedBy	3GPP TS 29.571 [16]	The party using the bootstrap data channel.
AppBindingInfo	3GPP TS 29.571 [16]	The application binding information of the application data channel.
QosHintInfo	6.1.6.2.7	The QoS hint information of the media.

6.2.6.2 Structured data types

6.2.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.2.6.2.2 Type: MediaInstructionData

Table 6.2.6.2.2-1: Definition of type MediaInstructionData

Attribute name	Data type	P	Cardinality	Description
sessionId	SessionId	M	1	The session ID is the identity of the IMS session for which the MediaInstructions applies.
mediaInstructionSet	map(MediaInstructions)	M	1..N	The mediaInstructionSet includes a set of instructions for each media flow to control. The key of the map shall be a (unique) valid JSON string per clause 7 of IETF RFC 8259 [20], with a maximum of 32 characters.

6.2.6.2.3 Type: MediaInstructions

Table 6.2.6.2.3-1: Definition of type MediaInstructions

Attribute name	Data type	P	Cardinality	Description
mediaId	MediaId	M	1	The media ID uniquely identifies this media item within the list and used by the producer (IMS AS) and the consumer for referencing purposes. The consumer reuses the media ID it received from the IMS AS for referencing the same media. This field will be null for instructions related to originating new media.
mediaResourceType	MediaResourceType	M	1	The mediaResourceType identify the Media Resource types the Media instruction is intended for.
mediaInstruction	MediaInstruction	C	0..1	It shall be included if the mediaResourceType is set to "DC". When present, mediaInstruction includes instructions to the producer (IMS AS) for handling the media.
dcMediaSpecification	DcMediaSpecification	C	0..1	dcMediaSpecification includes the description of additional media specification information which are needed for data channel media stream from application layer. It shall be contained if the mediaResourceType is set to "DC".
arMediaSpecification	ArMediaSpecification	C	0..1	arMediaSpecification includes the description of additional media specification information which are needed for AR communication services from application layer. It shall be contained if the media is used for AR communication.
mediaProcessingUrl	Uri	C	0..1	The mediaProcessingURL indicates the address where MF receive service-related media instructions. This field shall be contained in the response when originating a new media.
audioVideoReNegotiationInd	AudioVideoReNegotiationInd	C	0..1	Represents the audio/video media re-negotiation indication information to connect the UE's audio/video media stream to MF which is required by the application data channel. It shall be included if the mediaResourceType is set to "AUDIO" or "VIDEO".

6.2.6.2.4 Type: DcMediaSpecification

Table 6.2.6.2.4-1: Definition of type DcMediaSpecification

Attribute name	Data type	P	Cardinality	Description
mediaProxyConfig	MediaProxy	M	1	Represents the media proxy configuration on the MF. The value shall be set to "HTTP_PROXY" if the mediaId represents the bootstrap data channel.
replaceHttpUrls	map(ReplaceHttp Url)	C	1..N	Represents a list of replacement HTTP URL per stream ID allocated by the application layer for the specific IMS subscriber when requesting the application list (e.g. graphical user interface) via the MDC1 interface. It shall be included if the mediaId represents a bootstrap data channel and streamId is 0 or 100. The streamId attribute within the ReplaceHttpUrl data type is the key of the map.
mdc1EndpointDcsf	MdcEndpoint	C	0..1	Represents the MDC1 media endpoint information reserved on DCSF, e.g., the IP address and port number of DCSF. It shall be included in the request of the media instruction if the mediaId represents a bootstrap data channel. (NOTE)
mdc1EndpointMf	MdcEndpoint	C	0..1	Represents the negotiated MDC1 media endpoint information on MF, e.g., the IP address and port number of DC capable MF. It shall be included in the request of the media instruction if the mediaId represents a bootstrap data channel. (NOTE)
mdc2EndpointInfo	Mdc2EndpointInfo	C	0..1	Represents the negotiated MDC2 media endpoint information, e.g., the protocol stack, IP address and port number. It shall be included if in the request of the media instruction the mediaId represents an application data channel.
streams	map(DcStream)	M	1..N	Represents the data channel mapping and configuration information when originating/terminating data channel media flows on the Mb interface. The streamId attribute within the DcStream data type is the key of the map.
bdcUsedby	BdcUsedBy	C	0..1	Represents the party using the bootstrap data channel. It shall be contained when the mediaId in the data type MediaInstructions represents bootstrap data channel and the streamId sets to 100 and 110.
appBindingInfo	AppBindingInfo	C	0..1	Represents the application binding information of the application data channel. It shall be contained when the mediaId in the data type MediaInstructions represents application data channel.
qosHintInfo	QosHintInfo	O	0..1	Represents the QoS information that is provided within the SDP media level attribute "a=3gpp-qos-hint".
NOTE: The MDC1 interface shall use "TCP/TLS/HTTP" protocol stack and the corresponding IP, TCP, TLS and HTTP related attributes in MdcEndpoint should be included.				

6.2.6.2.5 Type: ArMediaSpecification

Table 6.2.6.2.5-1: Definition of type ArMediaSpecification

Attribute name	Data type	P	Cardinality	Description
mediaProcessingSpec	string	M	1	It specifies how the AR media stream should be processed. It indicates how the MF assists in the AR media rendering function.

6.2.6.2.6 Type: Mdc2EndpointInfo

Table 6.2.6.2.6-1: Definition of type Mdc2EndpointInfo

Attribute name	Data type	P	Cardinality	Description
mdc2Protocol	Mdc2Protocol	C	0..1	Represents the transport layer protocol or protocol stack for MDC2 interface when the "HTTP_PROXY" media proxy configuration is used in MF. It shall be included if the value of the mediaProxyConfig within the data type DcMediaSpecification is set to "HTTP_PROXY".
mdc2EndpointDcAs	MdcEndpoint	C	0..1	Represents the negotiated MDC2 media endpoint information on DC AS. It shall be included in the POST request message for the media control. The attributes "tlsId", "sctpPort" and "fingerprint" within the MdcEndpoint shall be present when the value of the mediaProxyConfig within the DcMediaSpecification is set to "UDP_PROXY". (NOTE)
mdc2EndpointMf	MdcEndpoint	C	0..1	Represents the negotiated MDC2 media endpoint information on MF. It shall be included in the successful POST response message for the media control API. The attributes "tlsId", "sctpPort" and "fingerprint" within the MdcEndpoint shall not be present when the value of the mediaProxyConfig within the data type DcMediaSpecification is set to "UDP_PROXY". (NOTE)
NOTE: When the mdc2Protocol is set to "UDP/DTLS/SCTP", "TCP/TLS" or "SCTP/DTLS", the attributes "tlsId" and "fingerprint" within the data type MdcEndpoint shall be included, and the "securitySetup" may be included. When the value of mdc2Protocol is set to "UDP/DTLS/SCTP", the attribute "sctpPort" within the data type MdcEndpoint shall be included.				

6.2.6.2.7 Type: AudioVideoReNegotiationInd

Table 6.2.6.2.7-1: Definition of type AudioVideoReNegotiationInd

Attribute name	Data type	P	Cardinality	Description
reNegotiation	boolean	M	1	When present, the IE shall indicate whether the audio or video media re-negotiation to connect the UE's media stream to MF is required by the application data channel. The media type will be represented by the value of the mediaResourceType. - true: media re-negotiation to connect the UE's audio or video media stream to MF is required. - false: media re-negotiation to connect the UE's audio or video media stream to MF is not required.
mediaConnSide	MediaConnSide	C	0..1	Represent the audio or video media connection side that the application data channel required. It shall be included if the reNegotiation present and the attribute value is set to true.

6.2.6.3 Simple data types and enumerations

6.2.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.2.6.3.2 Simple data types

The simple data types defined in table 6.2.6.3.2-1 shall be supported.

Table 6.2.6.3.2-1: Simple data types

Type Name	Type Definition	Description

6.2.6.3.3 Enumeration: MediaInstruction

The enumeration MediaInstruction represents the instructions to the producer (IMS AS) for handling the media. It shall comply with the provisions defined in table 6.2.6.3.3-1.

Table 6.2.6.3.3-1: Enumeration MediaInstruction

Enumeration value	Description
"TERMINATE_MEDIA"	Terminate the offered media descriptor of the UE in the media resource.
"ORIGINATE_MEDIA"	Originate and offer a media descriptor from the mediaResource to the UE.
"TERMINATE_AND_ORIGINATE_MEDIA"	Terminate the offered media flow in the mediaResource from the UE and originate the same media flow from the mediaResource to the other UE.
"UPDATE_MEDIA"	Update a media flow of the mediaResource previously allocated by the instructions "TerminateMedia", "OriginateMedia" and "TerminateAndOriginateMedia".
"DELETE_MEDIA"	Delete a media flow of the mediaResource previously allocated by the instructions "TerminateMedia", "OriginateMedia" and "TerminateAndOriginateMedia".
"REJECT_MEDIA"	Remove an offered media flow.

6.2.6.3.4 Enumeration: MediaConnSide

The enumeration MediaConnSide represents the audio or video media connection side. It shall comply with the provisions defined in table 6.2.6.3.4-1.

Table 6.2.6.3.4-1: Enumeration MediaConnSide

Enumeration value	Description
"BOTH"	Both the originating and terminating side of the audio or video media stream shall be connected to the MF.

6.2.6.4 Data types describing alternative data types or combinations of data types

None in this release of the specification.

6.2.6.5 Binary data

None in this release of the specification.

6.2.7 Error Handling

6.2.7.1 General

For the Nimsas_MediaControl API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nimsas_MediaControl API.

6.2.7.2 Protocol Errors

No specific procedures for the Nimsas_MediaControl service are specified.

6.2.7.3 Application Errors

The application errors defined for the Nimsas_MediaControl service are listed in table 6.2.7.3-1.

Table 6.2.7.3-1: Application errors

Application Error	HTTP status code	Description
MEDIA_ID_NOT_FOUND	400 Bad Request	Indicates that the requested mediaId is not found in the IMS AS.

6.2.8 Feature negotiation

The optional features in table 6.2.8-1 are defined for the Nimsas_MediaControl API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 6.2.8-1: Supported Features

Feature number	Feature Name	Description

6.2.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nimsas_MediaControl API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nimsas_MediaControl API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nimsas_MediaControl service.

The Nimsas_MediaControl API defines a single scope " nimsas-mc " for the entire service, and it does not define any additional scopes at resource or operation level.

6.2.10 HTTP redirection

An HTTP request may be redirected to a different IMS AS service instance when using direct or indirect communications (see 3GPP TS 29.500 [4]).

An SCP that reselects a different IMS AS producer instance will return the NF Instance ID of the new IMS AS producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of 3GPP TS 29.500 [4].

If an IMS AS redirects a service request to a different IMS AS using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new IMS AS towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of 3GPP TS 29.500 [4].

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the formal definition of the API(s) defined in the present specification. It consists of OpenAPI specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 1: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see clause 5.3.1 of 3GPP TS 29.501 [5] and clause 5B of 3GPP TR 21.900 [7]).

A.2 Nimsas_SessionEventControl API

openapi: 3.0.0

info:

```
title: 'IMS AS SessionEventControl Service'
version: 1.0.2
description: |
  Nimsas_SessionEventControl Service.
  © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.
```

```
externalDocs:
  description: >
    3GPP TS 29.175 V18.4.0; IP Multimedia Subsystem; IP Multimedia Subsystem (IMS) Application
    Server (AS) Services; Stage 3
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.175/'
```

```
servers:
- url: '{apiRoot}/nimsas-sec/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
```

```
security:
- {}
- oAuth2ClientCredentials:
  - nimsas-sec
```

```
paths:
  /session-event-subscriptions:
    post:
      # This is a pseudo operation, NF service consumers shall NOT invoke this method!
      summary: Nimsas_SessionEventControl Subscribe service operation, pseudo operation
      tags:
        - Session Event Subscriptions (Collection)
      operationId: Subscribe
      requestBody:
        required: true
        content:
          application/json:
            # Unspecified schema for the JSON body, since this is not used by consumer or producer.
            schema: {}
      responses:
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'
```

```
callbacks:
  eeNotification:
    '{SessionEventNotificationUri}':
      # The notification URI is provided by local configuration or via NRF.
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/SessionEventNotification'
        responses:
          '204':
            description: No Content, notification was succesfull.
          '307':
            description: Temporary Redirect
            content:
              application/json:
                schema:
                  $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
            headers:
              Location:
                description: >
                  The URI pointing to the resource located on the redirect target NF
                  service consumer.
                required: true
                schema:
                  type: string
          '308':
            description: Permanent Redirect
            content:
              application/json:
                schema:
                  $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
            headers:
              Location:
                description: >
                  The URI pointing to the resource located on the redirect target NF
                  service consumer.
                required: true
                schema:
                  type: string
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '502':
            $ref: 'TS29571_CommonData.yaml#/components/responses/502'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'
```

components:

```
securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{nrfApiRoot}/oauth2/token'
        scopes:
          nimsas-sec: Access to the Nimsas_SessionEventControl API
```

schemas:

STRUCTURED DATA TYPES

```
SessionEventNotification:
  description: The session event notification item.
  type: object
  required:
    - notificationEvent
    - sessionId
  properties:
    notificationEvent:
      $ref: '#/components/schemas/NotificationEvent'
    sessionId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SessionId'
    sessionInfo:
      $ref: '#/components/schemas/SessionInfo'
    mediaInfoList:
      description: >
        Contains a media related information. The mediaId attribute within the MediaInfo
        data type is the key of the map.
      type: object
      additionalProperties:
        $ref: '#/components/schemas/MediaInfo'
      minItems: 1

NotificationEvent:
  description: The notification event information.
  type: object
  required:
    - eventType
  properties:
    eventType:
      $ref: '#/components/schemas/EventType'
    eventInitiator:
      $ref: '#/components/schemas/EventInitiator'

SessionInfo:
  description: The session information related to the notification event.
  type: object
  properties:
    callingIdentity:
      $ref: 'TS29562_Nhss_imsSDM.yaml#/components/schemas/ImsPublicId'
    calledIdentity:
      $ref: 'TS29562_Nhss_imsSDM.yaml#/components/schemas/ImsPublicId'
    sessionCase:
      $ref: '#/components/schemas/SessionCase'

MediaInfo:
  description: The media information related to the notification event.
  type: object
  required:
    - mediaId
    - mediaType
  properties:
    mediaId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MediaId'
    mediaType:
      $ref: '#/components/schemas/MediaType'
    dcMediaSpec:
      $ref: '#/components/schemas/DcMediaSpec'
    mediaSuspended:
      type: boolean
    mediaRemovalInd:
      type: boolean
      enum:
        - true

DcMediaSpec:
  description: >
    The data channel media specification information contains media description attributes.
  type: object
  required:
    - streams
    - receivedDcEndpoint
  properties:
```

```

streams:
  description: >
    Contains a data channel mapping and configuration information. The streamId
    attribute within the DcStream data type is the key of the map.
  type: object
  additionalProperties:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DcEndpoint'
  minItems: 1
  maxMessageSize:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MaxMessageSize'
  receivedDcEndpoint:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DcEndpoint'
  bdcUsedBy:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BdcUsedBy'
  appBindingInfo:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/AppBindingInfo'
  qosHintInfo:
    $ref: '#/components/schemas/QosHintInfo'

QosHintInfo:
  description: The QoS hint information used for the media.
  type: object
  properties:
    loss:
      description: the maximum desirable end-to-end transport level packet loss rate
      type: number
      format: zero-based-integer or non-zero-real
    localLoss:
      description: the maximum desirable end-to-end transport level packet loss rate applied
      type: number
      format: zero-based-integer or non-zero-real
    latency:
      description: the maximum desirable end-to-end transport level packet latency
      type: number
      format: zero-based-integer or non-zero-real
    localLatency:
      description: the maximum desirable end-to-end transport level packet latency applied
      type: number
      format: zero-based-integer or non-zero-real

```

ENUMS

```

EventType:
  description: The type of the event for which the notification is generated.
  anyOf:
    - type: string
      enum:
        - SESSION_ESTABLISHMENT_REQUEST
        - SESSION_ESTABLISHMENT_PROGRESS
        - SESSION_ESTABLISHMENT_ALERTING
        - SESSION_ESTABLISHMENT_SUCCESS
        - SESSION_ESTABLISHMENT_FAILURE
        - SESSION_ESTABLISHMENT_CANCEL
        - MEDIA_CHANGE_REQUEST
        - MEDIA_CHANGE_SUCCESS
        - MEDIA_CHANGE_FAILURE
        - MEDIA_CHANGE_CANCEL
        - SESSION_TERMINATION
    - type: string
      description: >
        This string provides forward-compatibility with future extensions to the enumeration
        and is not used to encode content defined in the present version of this API.

```

```

MediaType:
  description: The type of the media for which the notification is generated.
  anyOf:
    - type: string
      enum:
        - DC
        - AUDIO
        - VIDEO
    - type: string
      description: >
        This string provides forward-compatibility with future extensions to the enumeration

```

and is not used to encode content defined in the present version of this API.

SessionCase:

description: The type of the session case.

anyOf:

- type: string
 - enum:
 - ORIGINATING_IMS_SESSION
 - TERMINATING_IMS_SESSION
- type: string
 - description: >

This string provides forward-compatibility with future extensions to the enumeration and is not used to encode content defined in the present version of this API.

EventInitiator:

description: The initiator of the event for which the notification is generated.

anyOf:

- type: string
 - enum:
 - SERVED_IMS_SUBSCRIBER
 - REMOTE_IMS_SUBSCRIBER
- type: string
 - description: >

This string provides forward-compatibility with future extensions to the enumeration and is not used to encode content defined in the present version of this API.

A.3 Nimsas_MediaControl API

openapi: 3.0.0

info:

title: 'IMS AS MediaControl Service'
 version: 1.0.2
 description: |
 Nimsas_MediaControl Service.
 © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
 All rights reserved.

externalDocs:

description: >
 3GPP TS 29.175 V18.4.0; IP Multimedia Subsystem; IP Multimedia Subsystem (IMS) Application
 Server (AS) Services; Stage 3
 url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.175'

servers:

- url: '{apiRoot}/nimsas-mc/v1'
 - variables:
 - apiRoot:
 - default: https://example.com
 - description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

security:

- {}
- OAuth2ClientCredentials:
 - nimsas-mc

paths:

/call-sessions/{sessionId}/media-instruction:
 post:
 summary: Update
 operationId: UpdateCallSession
 tags:
 - Individual call session (Document)
 parameters:
 - name: sessionId
 in: path
 description: Session ID assigned by the IMS AS during the IMS session setup.
 required: true
 schema:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/SessionId'
 requestBody:
 description: Representation of the updates to apply to the call session.

```
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MediaInstructionData'
  responses:
    '200':
      description: >
        Successful update of the call session, when the IMS AS needs to return information
        in the response.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MediaInstructionData'
    '204':
      description: >
        Successful update of the call session, when the IMS AS does not need to return
        information in the response.
    '307':
      description: Temporary Redirect
      content:
        application/json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
      headers:
        Location:
          description: The URI pointing to the resource located on the redirect target IMS AS.
          schema:
            type: string
    '308':
      description: Permanent Redirect
      content:
        application/json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
      headers:
        Location:
          description: The URI pointing to the resource located on the redirect target IMS AS.
          schema:
            type: string
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29571_CommonData.yaml#/components/responses/406'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '501':
      $ref: 'TS29571_CommonData.yaml#/components/responses/501'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
```

components:

```
securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{nrfApiRoot}/oauth2/token'
        scopes:
          nimsas-mc: Access to the Nimsas_MediaControl API.
```

schemas:

STRUCTURED DATA TYPES

MediaInstructionData:
description: The media instruction data for a specific session.
type: object
required:
- sessionId
- mediaInstructionSet
properties:
 sessionId:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/SessionId'
 mediaInstructionSet:
 description: >
 Contains a set of instructions for each media flow to control. The mediaId
 attribute within the MediaInstructions data type is the key of the map.
 type: object
 additionalProperties:
 \$ref: '"/components/schemas/MediaInstructions'
 minProperties: 1

MediaInstructions:
description: The media instructions for a specific media flow.
type: object
required:
- mediaId
- mediaResourceType
properties:
 mediaId:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/MediaId'
 mediaResourceType:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/MediaResourceType'
 mediaInstruction:
 \$ref: '"/components/schemas/MediaInstruction'
 dcMediaSpecification:
 \$ref: '"/components/schemas/DcMediaSpecification'
 arMediaSpecification:
 \$ref: '"/components/schemas/ArMediaSpecification'
 mediaProcessingUrl:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
 audioVideoReNegotiationInd:
 \$ref: '"/components/schemas/AudioVideoReNegotiationInd'

DcMediaSpecification:
description: The data channel media specification information.
type: object
required:
- streams
- mediaProxyConfig
properties:
 mediaProxyConfig:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/MediaProxy'
 replaceHttpUrls:
 description: >
 Contains a list of replacement HTTP URLs. The streamId
 attribute within the ReplaceHttpRequest data type is the key of the map.
 type: object
 additionalProperties:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/ReplaceHttpRequest'
 minProperties: 1
 mdc1EndpointDcsf:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/MdcEndpoint'
 mdc1EndpointMf:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/MdcEndpoint'
 mdc2EndpointInfo:
 \$ref: '"/components/schemas/Mdc2EndpointInfo'
 streams:
 description: >
 Contains a data channel mapping and configuration information. The streamId
 attribute within the DcStream data type is the key of the map.
 type: object
 additionalProperties:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/DcStream'
 minProperties: 1
 bdcUsedBy:
 \$ref: 'TS29571_CommonData.yaml#/components/schemas/BdcUsedBy'
 appBindingInfo:

```
$ref: 'TS29571_CommonData.yaml#/components/schemas/AppBindingInfo'
qosHintInfo:
  $ref: 'TS29175_Nimsas_SessionEventControl.yaml#/components/schemas/QosHintInfo'
```

```
ArMediaSpecification:
  description: The AR media specification information.
  type: object
  required:
    - mediaProcessingSpec
  properties:
    mediaProcessingSpec:
      type: string
```

```
Mdc2EndpointInfo:
  description: Represents the negotiated MDC2 media endpoint information.
  type: object
  properties:
    mdc2Protocol:
      $ref: 'TS29176_Nmf_MRM.yaml#/components/schemas/Mdc2Protocol'
    mdc2EndpointDcAs:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MdcEndpoint'
    mdc2EndpointMf:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MdcEndpoint'
```

```
AudioVideoReNegotiationInd:
  description: The audio/video media re-negotiation indication information.
  type: object
  required:
    - reNegotiation
  properties:
    reNegotiation:
      type: boolean
    mediaConnSide:
      $ref: '#/components/schemas/MediaConnSide'
```

ENUMS

```
MediaInstruction:
  description: The media instruction for handling a specific media flow.
  anyOf:
    - type: string
      enum:
        - TERMINATE_MEDIA
        - ORIGINATE_MEDIA
        - TERMINATE_AND_ORIGINATE_MEDIA
        - UPDATE_MEDIA
        - DELETE_MEDIA
        - REJECT_MEDIA
    - type: string
      description: >
        This string provides forward-compatibility with future extensions to the enumeration
        and is not used to encode content defined in the present version of this API.
```

```
MediaConnSide:
  description: The audio or video media connection side.
  anyOf:
    - type: string
      enum:
        - BOTH
    - type: string
      description: >
        This string provides forward-compatibility with future extensions to the enumeration
        and is not used to encode content defined in the present version of this API.
```

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-04	CT4#115e	C4-231514				TS skeleton	0.0.0
2023-04	CT4#115e	C4-231551				Inclusion of pCRs agreed at CT4#115e, including C4-231214, C4-231217, C4-231224, C4-231225, C4-231514, C4-231515, C4-231516, C4-231517.	0.1.0
2023-05	CT4#116	C4-232553				Inclusion of pCRs agreed at CT4#116, including C4-232142, C4-232145, C4-232504, C4-232505.	0.2.0
2023-09	CT4#117	C4-233810				Inclusion of pCRs agreed at CT4#117, including C4-233250, C4-233254, C4-233255, C4-233256, C4-233700, C4-233701, C4-233704, C4-233856.	0.3.0
2023-10	CT4#118	C4-234583				Inclusion of pCRs agreed at CT4#118, including C4-234172, C4-234174, C4-234175, C4-234177, C4-234545, C4-234547.	0.4.0
2023-12	CT4#119	C4-235660				Inclusion of pCRs agreed at CT4#119, including C4-235221, C4-235464, C4-235465, C4-235466, C4-235467, C4-235468, C4-235471.	0.5.0
2023-12	CT#102	CP-233022				TS presented for information	1.0.0
2024-03	CT4#121	C4-240852				Inclusion of pCRs agreed at CT4#121, including C4-240405, C4-240406, C4-240407, C4-240409, C4-240410, C4-240470, C4-240704, C4-240705, C4-240708, C4-240716.	1.1.0
2024-03	CT#103	CP-240025				TS presented for approval	2.0.0
2024-03	CT#103					TS approved in CT#103	18.0.0
2024-06	CT#104	CP-241044	0001		F	Support of SDP attributes a=3gpp-bdc-used-by and a=3gpp-req-app	18.1.0
2024-06	CT#104	CP-241044	0002	1	F	Correction on the Nimsas_MediaControl service	18.1.0
2024-06	CT#104	CP-241044	0003	1	F	Correction on the Nimsas_SessionEventControl service	18.1.0
2024-06	CT#104	CP-241044	0004		F	Correction on the Nimsas_MediaControl OpenAPI	18.1.0
2024-06	CT#104	CP-241044	0006	1	F	Update the presence condition and cardinality for mediaProxyConfig	18.1.0
2024-06	CT#104	CP-241044	0007	1	F	Update the DcMediaSpecification for Nimsas_SessionEventControl Service API	18.1.0
2024-06	CT#104	CP-241044	0008	1	F	Update the DcMediaSpecification Datatype for MdcEndpoint	18.1.0
2024-06	CT#104	CP-241044	0009	1	F	Update the SessionEventNotificationUri for session event notification	18.1.0
2024-06	CT#104	CP-241044	0010	1	F	Report the media HOLD to DCSF	18.1.0
2024-06	CT#104	CP-241044	0011	2	F	Add the Media re-negotiation indication to Nimsas_MediaControl API to support AR	18.1.0
2024-06	CT#104		0012		F	29.175 Rel-18 API version and External doc update	18.1.0
2024-09	CT#105	CP-242048	0013		F	Corrections and Updates to Notify Service Operation	18.2.0
2024-09	CT#105	CP-242048	0014		F	Remove the SecuritySetup in clause 6.1.6.1	18.2.0
2024-09	CT#105	CP-242048	0015	1	F	Update the sessionInfo description for Nimsas_SessionEventControl API	18.2.0
2024-12	CT#106	CP-243027	0017		F	DC resource release due to a CANCEL request	18.3.0
2024-12	CT#106	CP-243027	0023	1	F	Remove the MRF	18.3.0
2024-12	CT#106	CP-243027	0020	1	F	Report the QoS info to DCSF	18.3.0
2024-12	CT#106	CP-243068	0032		F	API version and External doc update	18.3.0
2025-06	CT#108	CP-251049	0051	1	F	Correction on the MediaInstructions data type for AR media	18.4.0
2025-06	CT#108	CP-251049	0060	2	F	Clarify the calling and called party identity	18.4.0
2025-06	CT#108	CP-251049	0064	3	F	Removal of Media in Nimsas_SessionEventControl	18.4.0
2025-06	CT#108	CP-251078	0071		F	API version and External doc update	18.4.0
2025-09	CT#109	CP-252033	0084	2	F	Missing condition for mediaInstruction	18.5.0

History

Document history		
V18.0.0	May 2024	Publication
V18.1.0	August 2024	Publication
V18.2.0	September 2024	Publication
V18.3.0	January 2025	Publication
V18.4.0	July 2025	Publication
V18.5.0	September 2025	Publication