

ETSI TS 132 156 V17.2.0 (2023-01)



**Universal Mobile Telecommunications System (UMTS);  
LTE;  
Telecommunication management;  
Fixed Mobile Convergence (FMC) model repertoire  
(3GPP TS 32.156 version 17.2.0 Release 17)**



---

**Reference**

RTS/TSGS-0532156vh20

---

**Keywords**

LTE,UMTS

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2023.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope .....	7
2 References .....	7
3 Definitions and abbreviations.....	8
3.1 Definitions .....	8
3.2 Abbreviations .....	8
4 Requirements.....	9
5 Model elements and notations.....	9
5.1 General .....	9
5.2 Basic model elements.....	9
5.2.1 Attribute .....	10
5.2.1.1 Description .....	10
5.2.1.2 Example .....	12
5.2.1.3 Name style.....	12
5.2.2 Association relationship.....	13
5.2.2.1 Description .....	13
5.2.2.2 Example .....	13
5.2.2.3 Name style.....	13
5.2.3 Aggregation association relationship.....	14
5.2.3.1 Description .....	14
5.2.3.2 Example .....	14
5.2.3.3 Name style.....	14
5.2.4 Composite aggregation association relationship.....	14
5.2.4.1 Description .....	14
5.2.4.2 Example .....	14
5.2.4.3 Name style.....	15
5.2.5 Generalization relationship .....	15
5.2.5.1 Description .....	15
5.2.5.2 Example .....	15
5.2.5.3 Name style.....	15
5.2.6 Dependency relationship.....	15
5.2.6.1 Description .....	15
5.2.6.2 Example .....	15
5.2.6.3 Name style.....	16
5.2.7 Comment .....	16
5.2.7.1 Description .....	16
5.2.7.2 Example .....	16
5.2.7.3 Name style.....	16
5.2.8 Multiplicity, a.k.a. cardinality in relationships .....	16
5.2.8.1 Description .....	16
5.2.8.2 Example .....	16
5.2.8.3 Name style.....	17
5.2.9 Role.....	17
5.2.9.1 Description .....	17
5.2.9.2 Example .....	18
5.2.9.3 Name style.....	18
5.2.10 Xor constraint .....	18
5.2.10.1 Description .....	18
5.2.10.2 Example .....	18
5.2.10.3 Name style.....	19

5.3	Stereotype.....	19
5.3.0	Description.....	19
5.3.1	<<ProxyClass>>.....	19
5.3.1.1	Description.....	19
5.3.1.2	Example.....	20
5.3.1.3	Name style.....	20
5.3.2	<<InformationObjectClass>>.....	20
5.3.2.1	Description.....	20
5.3.2.2	Example.....	20
5.3.2.3	Name style.....	20
5.3.3	<<names>>.....	21
5.3.3.1	Description.....	21
5.3.3.2	Example.....	21
5.3.3.3	Name style.....	21
5.3.4	<<dataType>>.....	21
5.3.4.1	Description.....	21
5.3.4.2	Example.....	22
5.3.4.3	Name style.....	22
5.3.5	<<enumeration>>.....	23
5.3.5.1	Description.....	23
5.3.5.2	Example.....	23
5.3.5.3	Name style.....	23
5.3.6	<<choice>>.....	23
5.3.6.1	Description.....	23
5.3.6.2	Example.....	23
5.3.6.3	Name style.....	24
5.4	Others.....	24
5.4.1	Association class.....	24
5.4.1.1	Description.....	24
5.4.1.2	Example.....	25
5.4.1.3	Name style.....	25
5.4.2	Abstract class.....	25
5.4.2.1	Description.....	25
5.4.2.2	Example.....	25
5.4.2.3	Name style.....	25
5.4.3	Predefined data types.....	26
5.4.3.1	Description.....	26
5.4.3.2	Example.....	26
5.4.3.3	Name style.....	26
6	Qualifiers.....	27
7	UML Diagram Requirements.....	28
	<b>Annex A (informative): Examples of using &lt;&lt;ProxyClass&gt;&gt;.....</b>	<b>29</b>
A.1	First Example.....	29
A.2	Second Example.....	30
	<b>Annex B (normative): Attribute properties.....</b>	<b>31</b>
	<b>Annex C (normative): Design patterns.....</b>	<b>32</b>
C.1	Intervening class and Association class.....	32
C.1.1	Concept and definition.....	32
C.1.2	Usage in the non-transport domain.....	34
C.1.3	Usage in the transport domain.....	34
C.2	Use of “ExternalXyz” class.....	35
	<b>Annex D (informative): Void.....</b>	<b>36</b>
	<b>Annex E (normative): &lt;&lt;SupportIOC&gt;&gt; stereotype definition.....</b>	<b>37</b>

E.1 Description .....37  
E.2 Example .....37  
E.3 Name style.....37

**Annex F (normative): Application of <<InformationObjectClass>> and  
<SupportIOC>>.....38**

**Annex G(informative): Change history .....41**

History .....42

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

UML provides a rich set of concepts, notations and model elements to model distributive systems. This paper documents the necessary and sufficient set of UML notations and model elements, including the ones built by the UML extension mechanism <<stereotype>> to model network management systems and their managed nodes. This set of notations and model elements is called the FMC (developed by the Converged Management of Fixed/Mobile Networks project) Model Repertoire; see also 3GPP TS 32.107 [5] and 3GPP TS 28.620 [6].

---

# 2 References

- [1] OMG "Unified Modelling Language (OMG UML), Infrastructure", Version 2. 4.
- [2] OMG "Unified Modelling Language (OMG UML), Superstructure", Version 2. 4.
- [3] 3GPP TS 32.300: "Telecommunication management; Configuration Management (CM); Name convention for Managed Objects".
- [4] Void
- [5] 3GPP TS 32.107: " Telecommunication management; Fixed Mobile Convergence (FMC) Federated Network Information Model (FNIM)".
- [6] 3GPP TS 28.620: " Telecommunication management; Fixed Mobile Convergence (FMC) Federated Network Information Model (FNIM) Umbrella Information Model (UIM)".
- [7] ITU-T X.680,"OSI networking and system aspects – Abstract Syntax Notation One (ASN.1)".
- [8] Void
- [9] 3GPP TS 32.602 "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP): Information Service (IS)".
- [10] 3GPP TS 32.612: "Telecommunication management; Configuration Management (CM); Bulk CM Integration Reference Point (IRP): Information Service (IS)".
- [11] 3GPP TS 32.111-2: " Telecommunication management; Fault Management; Part 2: Alarm Integration Reference Point (IRP): Information Service (IS)".
- [12] 3GPP TS 32.302: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Information Service (IS)".
- [13] 3GPP TS 32.404: "Telecommunication management; Performance Management (PM); Performance measurements - Definitions and template".
- [14] 3GPP TS 28.545 "Management and orchestration; Fault Supervision (FS)".
- [15] 3GPP TS 28.541 "Management and orchestration; 5G Network Resource Model (NRM); Stage 2 and stage 3".
- [16] 3GPP TS 28.532 "Management and orchestration; Generic management services".
- [17] 3GPP TS 28.531 "Management and orchestration; Provisioning".
- [18] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".



---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [18] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [18].

**Naming attribute:** It is a class attribute that holds the class instance identifier. See attribute *id* of *Top\_* [6]. See examples of naming attribute in 3GPP TS 32.300 [3].

**Lower Camel Case:** The practice of writing compound words in which the words are joined without spaces and that the initial letter of all except the first word is capitalized.

EXAMPLES: 'managedNodeIdentity' and 'minorDetails' are the LCC for "managed node identity" and "minor details" respectively.

**Upper Camel Case:** The practice of writing compound words in which the words are joined without spaces and that the initial letters of all words are capitalised.

EXAMPLES: 'ManagedNodeIdentity' and 'MinorDetails' are the UCC for "managed node identity" and "minor details" respectively.

**Well Known Abbreviation:** An abbreviation that can be used as the modelled element name or as a component of a modelled element name.

NOTE 1: The abbreviation, when used in such manner, is in the same document where the modelled element is defined.

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [18], 3GPP TS 28.620 [6] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [18], and 3GPP TS 28.620 [6].

CM	Conditional Mandatory
CO	Conditional Optional
IRP	Integration Reference Point
LCC	Lower Camel Case
M	Mandatory
MnS	Management Service
NA	Not Applicable
O	Optional
OMG	Object Management Group
UCC	Upper Camel Case
WKA	Well Known Abbreviation

## 4 Requirements

The UML notations and model elements captured in this repertoire shall be used to model behaviours of the systems/entities such as the Umbrella Information Model (UIM) of the FNIM in 3GPP TS 28.620 [6].

## 5 Model elements and notations

### 5.1 General

Note that the graphical notation in this document is only used to represent particular model elements. Although the graphical notation is a correct representation of the model element, it may not be a valid representation of a UML class diagram.

The examples used in this document are for illustration purposes only and may or may not exist in specifications.

UML properties not described in this document shall not be used in specifications based on this repertoire.


### 5.2 Basic model elements

UML has defined a number of basic model elements. This subclause lists the subset selected for use in specifications based on this repertoire. The semantics of these selected basic model elements are defined in [1].


For each basic model element listed, there are three parts. The first part contains its description. The second part contains its graphical notation examples and the third part contains the rule, if any, recommended for labelling or naming it.

The graphical notation has the following characteristics:


- Subclause 7.2.7 of [2] specifies "A class is often shown with three compartments. The middle compartment holds a list of attributes while the bottom compartment holds a list of operations" and "Additional compartments may be supplied to show other details". This repertoire only allows the use of the name (top) compartment and attribute (middle) compartment. The operation (bottom) compartment may be present but is always empty.



- Classes may or may not have attributes. The graphical notation of a class may show an empty attribute (middle) compartment even if the class has attributes, as shown in figure below.



- The visibility symbol shall not appear along with the class attribute, as shown below.



→ The use of the decoration, i.e. the symbol in the name (top) compartment, is optional.

## 5.2.1 Attribute

### 5.2.1.1 Description

An attribute is a typed element representing a property of a class (Unified Modelling Language (OMG UML), Infrastructure [1], clause 10.2.5.). An element that is typed implies that the element can only refer to a constrained set of values. See clause 10.1.4 of [1] for more information on type.

See clauses 5.3.4 and 5.4.3 for predefined data types and user-defined data types that can apply type information to an attribute.

The properties of an attribute are described by a set of attribute properties categorized as follows:

- Attribute properties defining valid attribute values: type, allowedValues, multiplicity, isOrdered, isUnique, isNullable, passedById.
- Attribute properties defining valid interactions of managers and agents with attributes values: isInvariant, isWritable, isReadable, isNotifiable, defaultValue.
- Other attribute properties: documentation, supportQualifier.

The following tables provide definitions for the attributes of the three categories.

**Table 5.2.1.1-1: Attribute properties defining valid attribute values**

Property name	Description	Legal values
type	Refers to a predefined (subclause 5.4.3) or user defined data type (section 5.3.4). See also subclause 7.3.44 of [2], inherited from StructuralFeature.	NA
allowedValues	Specifies restrictions to the data type defined by type. This property is useful when no dedicated data type, that includes the restriction, shall be defined. The property may be absent when no restrictions are defined.	Dependent on type
defaultValue	Identifies a value at specification time that is used at object creation time under conditions defined in Annex B. If there is no defined default value, the property shall be omitted from the attribute description or specified as 'defaultValue: None.'	None (default) or a value that is dependent on allowedValues
multiplicity	Defines the number of values the attribute can simultaneously have. See subclause 7.3.44 of [2]; inherited from StructuralFeature.	See 5.2.8 Default is 1
isOrdered	For a multi-valued multiplicity, this specifies if the values of this attribute instance are sequentially ordered. See subclause 7.3.44 and its Table 7.1 of [2]. If the property is present for attributes with a multiplicity of greater than "1", it shall be set to either "True" or "False". It shall not be set to "N/A".	True, False (default)
isUnique	For a multi-valued multiplicity, this specifies if the values of this attribute instance are unique (i.e., no duplicate attribute values). See subclause 7.3.44 and its Table 7.1 of [2]. If the property is present for attributes with a multiplicity of greater than "1", it shall be set to either "True" or "False". It shall not be set to "N/A".	True (default), False
isNullable	Identifies if an attribute can carry no information. The implied meaning of carrying "no information" is context sensitive and is not defined in this Model Repertoire. Note, the property "isNullable: True" is semantically identical to adding the value "0" to the "multiplicity" specified. Usage of the "multiplicity" property is preferred to express an attribute can have no value or carry no information.	True, False (default)
passedByld	See Table 5.2.9.1-1: passedByld property	True, False (default)

**Table 5.2.1.1-2: Attribute properties defining valid interactions with attributes**

Property name	Description	Legal values
isInvariant	<p>If an attribute has an "isInvariant: True" property, its value can be set only upon object creation. After object creation, the initial value cannot be modified.</p> <p>If an attribute has an "isInvariant: False" property, its value can be set at object creation time. After object creation, the initial value can be modified.</p> <p>Details on how initial values are provided upon object creation are specified in Annex B.</p>	True, False (default)
isWritable	<p>If an attribute has an "isWritable: True" property, a manager can set its value upon object creation. After object creation, a manager can modify the initial value if "isInvariant: False". If "isInvariant: True", a manager cannot modify the initial value. The "isInvariant" property supersedes hence the "isWritable" property.</p> <p>If an attribute has an "isWritable: False" property, a manager cannot set the value upon object creation nor modify it later.</p> <p>A "isWritable: True" property might be restricted by access control.</p>	True, False (default)
isReadable	<p>Specifies if the attribute can be read by a manager.</p> <p>A "isReadable: True" property might be restricted by access control.</p>	True , False (default)
isNotifiable	Identifies if a notification shall be sent in case of an attribute value change.	True (default), False


**Table 5.2.1.1-3: Attribute properties related to the specification of attributes**

Property name	Description	Legal values
documentation	Contains a textual description of the attribute. Should refer (to enable traceability) to the specific requirement.	Any
supportQualifier	Identifies the required support of the attribute. See also subclause 6.	M, O (default), CM, CO, C

Upon completion of any manipulation of an attribute the attribute properties related to valid attribute values shall be respected. If an interaction results in violating at least one of these properties, the manipulation request shall be rejected.

### 5.2.1.2 Example

This example shows three attributes, i.e., a, b and c, listed in the attribute (the second) compartment of the class Xyz.



**Figure 5.2.1.2-1: Attribute notation**

### 5.2.1.3 Name style

An attribute name shall use the LCC style.

Well Known Abbreviation (WKA) is treated as a word if used in a name. However, WKA shall be used as is (its letter case cannot be changed) except when it is the first word of a name; and if so, its first letter must be in lower case.

## 5.2.2 Association relationship

### 5.2.2.1 Description

It shows a relationship between two classes and describes the reasons for the relationship and the rules that might govern that relationship.

It has ends. Its end, the association end(s), specifies the role that the object at one end of a relationship performs. Each end of a relationship has properties that specify the role (see 5.2.9), multiplicity (see 5.2.8), visibility and navigability (see the arrow symbol used in Figure 5.2.2.2-2: Unidirectional association relationship notation) and may have constraints. Note that visibility shall not be used in models based on this Repertoire (see bullet 3 of 5.2).

See 7.3.3 Association of [2].

Three examples below show a binary association between two model elements. The association can include the possibility of relating a model element to itself.

The first example (Figure 5.2.2.2-1) shows a bi-directional navigable association in that each model element has a pointer to the other. The second example (Figure 5.2.2.2-2) shows a unidirectional association (shown with an open arrow at the target model element end) in that only the source model element has a pointer to the target model element and not vice-versa. The third example (Figure 5.2.2.2-3) shows a bi-directional non-navigable association in that each model element does not have a pointer to the other; i.e., such associations are just for illustration purposes.


### 5.2.2.2 Example

An association shall have an indication of cardinality (see 5.2.8).


It shall, except the case of non-navigable association, have an indication of the role name (see 5.2.9). The model element involved in an association is said to be “playing a role” in that association. The role has a name such as aClass in the first example below. Note that the use of “+” character in front of the role name, indicating visibility, is optional.



**Figure 5.2.2.2-1: Bidirectional association relationship notation**



**Figure 5.2.2.2-2: Unidirectional association relationship notation**



**Figure 5.2.2.2-3: Non-navigable association relationship notation**

Note that some tools do not use arrows in the UML graphical representation for bidirectional associations. Therefore, absence of the two arrows is not an indication of a non-navigable association between the two Information Object Class involved; but the absence of the attributes related to role in the two Information Object Class involved is

### 5.2.2.3 Name style

An Association can have a name. Use of Association name is optional. Its name style is LCC style.

A role name shall use the LCC style.

NOTE: The role name needs not resemble the class name.

## 5.2.3 Aggregation association relationship

### 5.2.3.1 Description


It shows a class as a part of or subordinate to another class.

An aggregation is a special type of association in which objects are assembled or configured together to create a more complex object. Aggregation protects the integrity of an assembly of objects by defining a single point of control called aggregate, in the object that represents the assembly.

See 7.3.2 AggregationKind (from Kernel) of [2].

### 5.2.3.2 Example

A hollow diamond attached to the end of a relationship is used to indicate an aggregation. The diamond is attached to the class that is the aggregate. The aggregation association shall have an indication of cardinality at each end of the relationship (see 5.2.8).



**Figure 5.2.3.2-1: Aggregation association relationship notation**

### 5.2.3.3 Name style

An Association can have a name. Use of Association name is optional. Its name style is LCC.

## 5.2.4 Composite aggregation association relationship

### 5.2.4.1 Description


A composite aggregation association is a strong form of aggregation that requires a part instance be included in at most one composite at a time. If a composite is deleted, all of its parts are deleted as well.

A composite aggregation shall contain a description of its use.

See 7.3.3 Association (from Kernel) of [2].

### 5.2.4.2 Example

A filled diamond attached to the end of a relationship is used to indicate a composite aggregation. The diamond is attached to the class that is the composite. The composite association shall have an indication of cardinality at each end of the relationship (see 5.2.8).



**Figure 5.2.4.2-1: Composite aggregation association relationship notation**

### 5.2.4.3 Name style

An Association can have a name. Use of Association name is optional. Its name style is LCC.

## 5.2.5 Generalization relationship


### 5.2.5.1 Description

It indicates a relationship in which one class (the child) inherits from another class (the parent).

See 7.3.20 Generalization of [2].

### 5.2.5.2 Example

This example shows a generalization relationship between a more general model element (the SubNetwork) and a more specific model element (the NetworkSliceSubnet) that is fully consistent with the first element and that adds additional information.



**Figure 5.2.5.2-1: Generalization relationship notation**

### 5.2.5.3 Name style

It has no name so there is no name style.


## 5.2.6 Dependency relationship

### 5.2.6.1 Description

“A dependency is a relationship that signifies that a single or a set of model elements requires other model elements for their specification or implementation. This means that the complete semantics of the depending elements is either semantically or structurally dependent on the definition of the supplier element(s)...”, an extract from 7.3.12 Dependency of [2].

### 5.2.6.2 Example

This example shows that the BClass instances have a semantic relationship with the AClass instances. It indicates a situation in which a change to the target element (the AClass in the example) will require a change to the source element (the BClass in the example) in the dependency.



**Figure 5.2.6.2-1: Dependency relationship notation**



### 5.2.6.3 Name style

A Dependency can have a name. Use of Dependency name is optional. Its name style is LCC.


## 5.2.7 Comment

### 5.2.7.1 Description

- A comment is a textual annotation that can be attached to a set of elements.
- See 7.3.9 Comment (from Kernel) from [2].

### 5.2.7.2 Example

This example shows a comment, as a rectangle with a "bent corner" in the upper right corner. It contains text. It appears on a particular diagram and may be attached to zero or more modelling elements by dashed lines.



**Figure 5.2.7.2-1: Comment notation**

### 5.2.7.3 Name style

It has no name so there is no name style.

## 5.2.8 Multiplicity, a.k.a. cardinality in relationships

### 5.2.8.1 Description

"A multiplicity is a definition of an inclusive interval of non-negative integers beginning with a lower bound and ending with a (possibly infinite) upper bound. A multiplicity element embeds this information to specify the allowable cardinalities for an instantiation of this element...", an extract from 7.3.32 MultiplicityElement of [2].

**Table 5.2.8.1-1: Multiplicity-string definitions**


Multiplicity	Explanation
1	Attribute has one attribute value.
m	Attribute has <i>m</i> attribute values.
0..1	Attribute has zero or one attribute value.
0..*	Attribute has zero or more attribute values.
*	Attribute has zero or more attribute values.
1..*	Attribute has at least one attribute value.
m..n	Attribute has at least <i>m</i> but no more than <i>n</i> attribute values.

The use of "0..n" is not recommended although it has the same meaning as "0..\*" and "\*".

The use of a standalone symbol zero (0) is not allowed.

### 5.2.8.2 Example

This example shows a multiplicity attached to the end of an association path. The meaning of this multiplicity is one to many. One Class1 instance is associated with zero or more Class2 instances. Other valid examples can show the "many to many" relationship.



**Figure 5.2.8.2-1: Cardinality notation**

The cardinality zero is not used to indicate the IOC’s so-called “transient state” characteristic. For example, it is not used to indicate that the instance is not yet created but it is in the process of being created. The cardinality zero will not be used to indicate this characteristic since such characteristic is considered inherent in all IOCs. All IOCs defined are considered to have such inherent “transient state” characteristics.

The following table shows some valid examples of multiplicity.

**Table 5.2.8.2-1: Multiplicity-string examples**

Multiplicity	Explanation
1	Attribute has exactly one attribute value.
5	Attribute has exactly 5 attribute values.
0..1	Attribute has zero or one attribute value.
0..*	Attribute has zero or more attribute values.
1..*	Attribute has at least one attribute value.
4..12	Attribute has at least 4 but no more than 12 attribute values.

**5.2.8.3 Name style**

It has no name so there is no name style.

**5.2.9 Role**

**5.2.9.1 Description**

It indicates navigation, from one class to another class, involved in an association relationship. A role is named. The direction of navigation is to the class attached to the end of the association relationship with (or near) the role name.

The use of role name in the graphical representation is optional for bidirectional and unidirectional association relationship notations (see Figure 5.2.2.2-1: Bidirectional association relationship notation and Figure 5.2.2.2-2: Unidirectional association relationship notation). Role name shall not be used in non-navigable association relationship notation (see Figure 5.2.2.2-3: Non-navigable association relationship notation).

A role at the navigable end of a relationship becomes (or is mapped into) an attribute (called role-attribute) in the source class of the relationship. Therefore, roles have the same behaviour (or properties) as attributes. See Table 5.2.1.1-1: Attribute properties.

To avoid clutter in UML diagram, the role names can be removed.

The role-attribute shall have all properties defined for attributes in subclause 5.2.1 Attribute and in addition the following property


**Table 5.2.9.1-1: passedByld property**

Property name	Description	Legal values
passedByld	<p>If True, the role-attribute (navigable association source end) contains a DN of the navigable association target end instance.</p> <p>If False, the role-attribute contains (a copy of) the whole target end instance (e.g. X). If X has a role-attribute whose "passedByld==False", then the subject role-attribute contains (a copy of) X's target end instance as well.</p> <p>The above rule is applied repeatedly for all occurrences of "passedByld==False". This application can result in a collection of instances where no ordering can be implied and no instances are duplicated.</p> <p>Use of "passedByld==False" supports the efficient access of target end instances from a source end instance. The mechanism by which such access is achieved is operation model design specific (e.g. not related to resource model design).</p>	True (default), False

:

### 5.2.9.2 Example

This example shows that a Person (say instance John) is associated with a Company (say whose DN is "Company=XYZ"). We navigate the association by using the opposite association-end such that John's Person.company would hold the DN, i.e. "Company=XYZ".



**Figure 5.2.9.2-1: Role notation**

### 5.2.9.3 Name style

A role has a name. Use a noun for the name. The name style follows the attribute name style; see subclause 5.2.1.3.

## 5.2.10 Xor constraint

### 5.2.10.1 Description

“A Constraint represents additional semantic information attached to the constrained elements. A constraint is an assertion that indicates a restriction that must be satisfied by a correct design of the system. The constrained elements are those elements required to evaluate the constraint specification...”, an extract from 7.3.10 Constraint (from Kernel) of [2].

For a constraint that applies to two elements such as two associations, the constraint shall be shown as a dashed line between the elements labeled by the constraint string (in braces). The constraint string, in this case, is xor.

### 5.2.10.2 Example

The figure below shows a ServerObjectClass instance that has relation(s) to multiple instances of a class from the choice of ClientObjectClass\_Alternative1, ClientObjectClass\_Alternative2 or ClientObjectClass\_Alternative3.

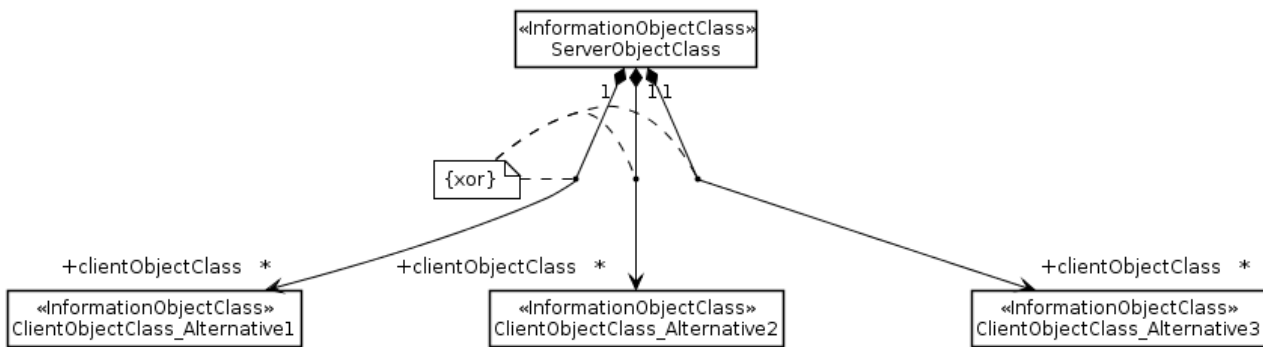


Figure 5.2.10.2-1: {xor} notation

### 5.2.10.3 Name style

It has no name so there is no name style.

## 5.3 Stereotype

### 5.3.0 Description

Subclause 5.1 listed the UML defined basic model elements. UML defined a stereotype concept allowing the specification of simple or complex user-defined model elements.

This subclause lists all allowable stereotypes for this repertoire.

The names of stereotypes shall be chosen such that they do not clash.

For each stereotype model element listed, there are three parts. The first part contains its description. The second part contains its graphical notation examples and the third part contains the rule, if any, recommended for labelling or naming it.

### 5.3.1 <<ProxyClass>>

#### 5.3.1.1 Description

It is a form or template representing a number of <<InformationObjectClass>>. It encapsulates attributes, links, methods (or operations), and interactions that are present in the represented <<InformationObjectClass>>.


The semantics of a <<ProxyClass>> is that all behaviour of the <<ProxyClass>> is present in the represented <<InformationObjectClass>>. Since this class is simply a representation of other classes, this class cannot define its own behaviour other than those already defined by the represented <<InformationObjectClass>>.

A particular <<InformationObjectClass>> can be represented by zero, one or more <<ProxyClass>>. For example, the ManagedElement <<InformationObjectClass>> can have MonitoredEntity <<ProxyClass>> and ManagedEntity <<ProxyClass>>.

The attributes of the <<ProxyClass>> are accessible by the source entity that has an association with the <<ProxyClass>>.

### 5.3.1.2 Example

This shows a <<ProxyClass>> named `MonitoredEntity`. It represents (or its constraints is that it represents) all NRM <<InformationObjectClass>> (e.g. `GgsnFunction` <<InformationObjectClass>>) whose instances are being monitored for alarm conditions. It is mandatory to use a Note to capture the constraint.



**Figure 5.3.1.2-1: <<ProxyClass>> notation**

See Annex A for more examples that use <<ProxyClass>>.

### 5.3.1.3 Name style

For <<ProxyClass>> name, use the same style as <<InformationObjectClass>> (see 5.3.2).

## 5.3.2 <<InformationObjectClass>>

### 5.3.2.1 Description

The <<InformationObjectClass>> is identical to UML *class* except that it does not include/define methods or operations.


A UML *class* represents a capability or concept within the system being modelled. Classes have data structure and behaviour and relationships to other elements.

This class can inherit from zero, one or multiple classes (multiple inheritances).

See more on UML *class* in 10.2.1 of [1].

### 5.3.2.2 Example

This example shows an `AbcFunction` <<InformationObjectClass>>.



**Figure 5.3.2.2-1: <<InformationObjectClass>> notation**

- The following table captures the properties of this modelled element.

**Table 5.3.2.2-1: <<InformationObjectClass>> properties**

Property name	Description	Legal values
documentation	Contains a textual description of this modelled element. Should refer (to enable traceability) to a specific requirement.	Any
isAbstract	Indicates if the class can be instantiated or is just used for inheritance.	True, False (default)
isNotifiable	Identifies the list of the supported notifications.	List of names of notification
supportQualifier	Identifies the required support of the class. See also subclause 6.	M, O (default), CM, CO, C

### 5.3.2.3 Name style

The name shall use UCC style. The name shall end with an underscore if it is an abstract class in the UIM. The name must not end with an underscore if it is a concrete class.

WKA is treated as a word if used in a name. However, WKA shall be used as is (its letter case cannot be changed) except when it is the first word of the name; and if so, its first letter must be in upper case.

Embedded underscore is not allowed except the name is for an Association class (see 5.4.1.)

### 5.3.3 <<names>>

#### 5.3.3.1 Description

The <<names>> is modelled by a composite association where both ends are non-navigable. The source class is the composite and the target class is the component. The target instance is uniquely identifiable, within the namespace of the source entity, among all other targeted instances of the same target class and among other targeted instances of other classes that have the same <<names>> composition with the source.

The source class and target class shall each has its own naming attribute.

The composite aggregation association relationship is used as the act of name containment providing a semantic of a whole-part relationship between the domain and the named elements that are contained, even if only by name. From the management perspective access to the part is through the whole. Multiplicity shall be indicated at both ends of the relationship.

A target instance cannot have multiple <<names>> with multiple source instances s, i.e. a target instance can not participate in or belong to multiple namespaces.

#### 5.3.3.2 Example

This shows that all instances of Class4 are uniquely identifiable within a Class3 instance's namespace.




Figure 5.3.3.2-1: <<names>> notation

#### 5.3.3.3 Name style

It has no name so there is no name style.

### 5.3.4 <<dataType>>

#### 5.3.4.1 Description

It represents an attribute property type (see Table 5.2.1.1-1: Attribute properties).

This repertoire uses two kinds of data types: predefined data types and user-defined data types. The former is defined in subclause 5.4.3. The latter is defined by the specifications authors using this <<dataType>> model element.

The names of predefined data types and user-defined data types must be chosen such that they do not clash.

The user-defined data types support the modelling of structured data types (see <<dataType>> PLMNId in 5.3.4.2).

When a user-defined or predefined data type is used to apply type (see property named type in Table 5.2.1.1-1: Attribute properties) information to a class attribute, the data type name is shown along with the class attribute. See Example below.

### 5.3.4.2 Example

The following examples are two user-defined data types.

The left-most user-defined data type is named `PLMNid`. It has two attributes. One is the Mobile Country Code (MCC) of predefined data type `String`. The other is the Mobile Network Code (MNC) of predefined data type `String` as well.

The right-most user-defined data type is named `XYZ`. It has three attributes. The `attribute1` uses predefined data type `String`. The `attribute2` uses predefined data type `Integer`. The `attribute3` uses user-defined data type `PLMNid`.

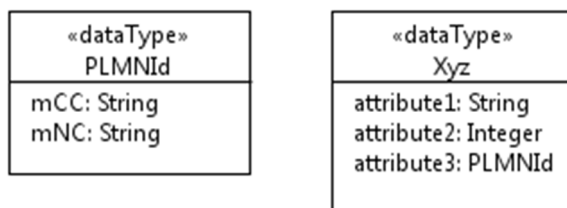


Figure 5.3.4.2-1: `«dataType»` notations

The following example shows a `ZClass` which has four attributes. Two attributes (i.e. `attribute1`, `attribute4`) use the user-defined data types (i.e. `PLMNid`, `XYZ`) and the other two attributes use the predefined data types.




Figure 5.3.4.2-2: Usage example of `«dataType»`

The third column of the following shows some of the properties of an attribute `attribute1` of `ZClass`. It shows the `attribute1` attribute property type is `PLMNid`, a user-defined data type.

<code>attribute1</code>	It is a PLMN identifiers.	type: <code>PLMNid</code> multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
-------------------------	---------------------------	--

### 5.3.4.3 Name style

For `«dataType»` name, use the same style as `«InformationObjectClass»` (see 5.3.2).

For `«dataType»` attribute, use the same style as `Attribute` (see 5.2.1).

## 5.3.5 <<enumeration>>

### 5.3.5.1 Description

An enumeration is a data type. It contains sets of named literals that represent the values of the enumeration. An enumeration has a name.

See 10.3.2 Enumeration of [1].

### 5.3.5.2 Example

This example shows an enumeration model element whose name is `Account` and it has four enumeration literals. The upper compartment contains the keyword `<<enumeration>>` and the name of the enumeration. The lower compartment contains a list of enumeration literals.

Note that the symbol to the right of `<<enumeration>> Account` in the figure below is a feature specific to a particular modelling tool. It is recommended that modelling tool features should be used when appropriate.




Figure 5.3.5.2-1: <<enumeration>> notation

### 5.3.5.3 Name style

For `<<enumeration>>` name, use the same style as `<<InformationObjectClass>>` (see 5.3.2).

For `<<enumeration>>` attribute (the enumeration literal), use the following rules:

- Enumeration literal is composed of one or more words of upper case characters. Words are separated by the underscore character.

## 5.3.6 <<choice>>

### 5.3.6.1 Description

The `<<choice>>` stereotype represents one of a set of classes (when used as an information model element) or one of a set of data types (when used as an operation model element).

This stereotype property, e.g., one out of a set of possible alternatives, is identical to the `{xor}` constraint (see 5.2.10).

### 5.3.6.2 Example

Sometimes the specific kind of class cannot be determined at model specification time. In order to support such scenario, the specification is done by listing all possible classes.

The following diagram lists 3 possible classes. It also shows a `<<choice>>` named `SubstituteObjectClass`. This scenario indicates that only one of the three related `<<InformationObjectClass>>` named `Alternative1ObjectClass`, `Alternative2ObjectClass`, `Alternative3ObjectClass` shall be realised.

The `<<choice>>` stereotype represents one of a set of classes when used as an information model element.



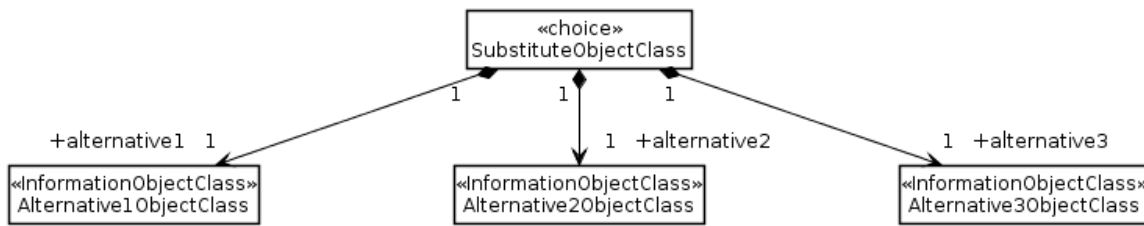


Figure 5.3.6.2-1: Information model element example using «choice» notation

Sometimes the specific kind of data type cannot be determined at model specification time. In order to support such scenario, the specification is done by listing all possible data types.

The following diagram lists 2 possible data types. It also shows a «choice» named ProbableCause. This scenario indicates that only one of the two «dataType» named IntegerProbableCause, StringProbableCause shall be realised.

The «choice» stereotype represents one of a set of data types when used as an operations model element.

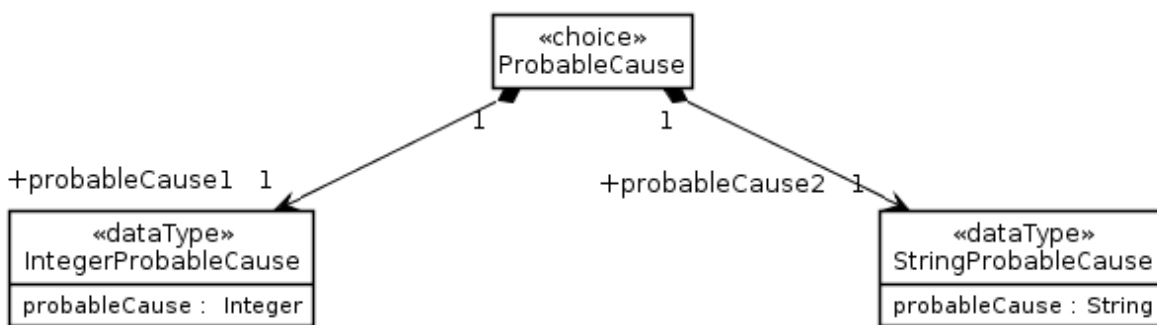


Figure 5.3.6.2-2: Operations model element example using «choice» notation

### 5.3.6.3 Name style

For <<choice>> name, use the same style as <<InformationObjectClass>> (see 5.3.2).

## 5.4 Others

### 5.4.1 Association class

#### 5.4.1.1 Description

An association class is an association that also has class properties (or a class that has association properties). Even though it is drawn as an association and a class, it is really just a single model element.

See 7.3.4 AssociationClass of [2].

Association classes are appropriate for use when an «InformationObjectClass» needs to maintain associations to several other instances of «InformationObjectClass» and there are relationships between the members of the associations within the scope of the "containing" «InformationObjectClass». For example, a namespace maintains a set of bindings, a binding ties a name to an identifier. A NameBinding «InformationObjectClass» can be modelled as an Association Class that provides the binding semantics to the relationship between an identifier and some other «InformationObjectClass» such as Object in the figure. This is depicted in the following figure.

### 5.4.1.2 Example

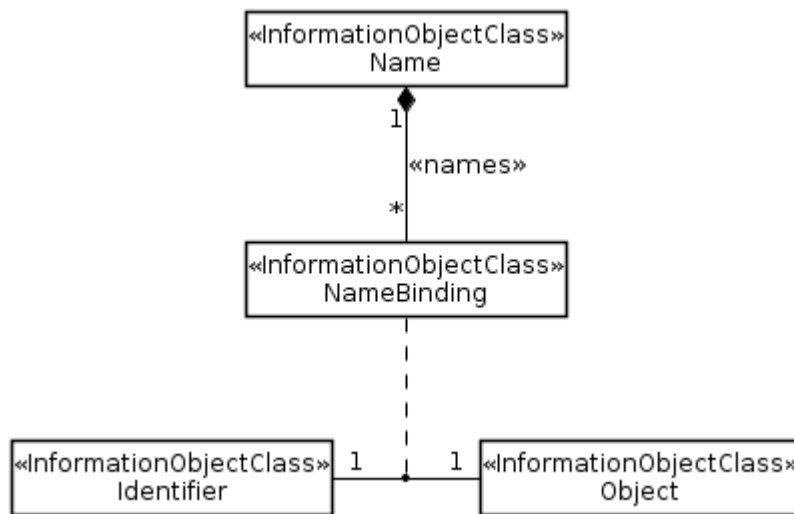


Figure 5.4.1.2-1: Association class notation

### 5.4.1.3 Name style

The name shall use the same style as in <<InformationObjectClass>> (see 5.3.2.3).

## 5.4.2 Abstract class

### 5.4.2.1 Description

It specifies a special kind of <<InformationObjectClass>> as the general model element involved in a generalization relationship (see 5.2.5). An abstract class cannot be instantiated.

This modelled element has the same properties as class. See 5.3.2.

### 5.4.2.2 Example

This shows that *Class5\_* is an abstract class. It is the base class for *SpecializedClass5*.



Figure 5.4.2.2-1: Abstract class notation

### 5.4.2.3 Name style

For abstract class name, use the same style as <<InformationObjectClass>> (see 5.3.2) . The name shall be in italics. In the UOM, its last character shall be an underscore

### 5.4.3 Predefined data types

#### 5.4.3.1 Description

It represents the general notion of being a data type (i.e. a type whose instances are identified only by their values) whose definition is defined by this specification and not by the user (e.g. specification authors).

This repertoire uses two kinds of data types: predefined data types and user-defined data types. The latter is defined in 5.3.4 <<dataType>> and 5.3.5 <<enumeration>>.

The following table lists the UML data types selected for use as predefined data type.

**Table 5.4.3.1-1: UML defined data types**


Name	Description and reference
Boolean	See Boolean type of [7].
Integer	See Integer type of [7].
String	See PrintableString type of [7].

The following table lists data types that are defined by this repertoire.

**Table 5.4.3.1-2: Non-UML defined data types**

Name	Description and reference
AttributeValuePair	This data type defines an attribute name and the attribute's value.
BitString	This data type is defined by Bit string of subclause 3 and subclause G.2.5 of [7].
DateTime	This data type is defined by GeneralizedTime of [7].
DN	This data type defines the DN (see Distinguished Name of [3]) of an object. It contains a sequence of one or more name components. The "initial sub-sequence" (note 1) of a DN is also a DN of an object.  Note 1: Suppose an object's DN is composed of a sequence of 4 name components, i.e. 1 <sup>st</sup> , 2 <sup>nd</sup> , 3 <sup>rd</sup> and 4 <sup>th</sup> components. The "initial sub-sequence" of this DN is composed of the 1 <sup>st</sup> , 2 <sup>nd</sup> and 3 <sup>rd</sup> components.
External	This data type is defined by another organization.
Real	This data type is defined by Real type of [7]

#### 5.4.3.2 Example



**Figure 5.4.3.2-1: Predefined data types usage**

Note: Use of this is optional. Uses of other means, to specify Predefined data types, are allowed.

#### 5.4.3.3 Name style

It shall use the UCC style.

## 6 Qualifiers

This subclause defines the qualifiers applicable for model elements specified in this document, e.g. the IOC (see 5.3.2), the Attribute (see 5.2.1). The possible qualifications are M, O, CM, CO and C. Their meanings are specified in this subclause. This type of qualifier is called Support Qualifier (see supportQualifier of IOC in Table 5.3.2.2-1 and supportQualifier of attribute in Table 5.2.1.1-1).

This subclause also defines the qualifiers applicable to various properties of a model element, e.g. see the IOC properties excepting IOC supportQualifier in Table 5.3.2.2-1 and attributes properties excepting attribute supportQualifier in Table 5.2.1.1-1. The possible qualifications are M, O, CM, CO and "-". Their meanings are specified in this subclause. This type of qualifier is simply called Qualifier.

Definition of M (Mandatory) qualification:

- The capability (e.g. the Attribute named abc of an IOC named Xyz; the write property of Attribute named abc of an IOC named Xyz; the IOC named Xyz) shall be supported.

Definition of O (Optional) qualification:

- The capability may or may not be supported.

Definition of CM (Conditional-Mandatory) qualification:

- The capability shall be supported under certain conditions, specifically:
  - When the qualification is CM, the capability shall have a corresponding constraint defined in the specification. If the specified constraint is met then the capability shall be supported.

– Definition of CO (Conditional-Optional) qualification:

- The capability may be supported under certain conditions, specifically:
  - When the qualification is CO, the capability shall have a corresponding constraint defined in the specification. If the specified constraint is met then the capability may be supported.

Definition of C (Conditional) qualification:

- Used for items that has multiple constraints. Each constraint is worded as a condition for one kind of qualification such as M, O or "-". All constraints must be related to the same qualification. Specifically:
  - Each item having the support qualifier C shall have the corresponding multiple constraints defined in the IS specification. If the specified constraint is met and is related to mandatory, then the item shall be supported. If the specified constraint is met and is related to optional, then the item may be supported. If the specified constraint is met and is related to "no support", then the item shall not be supported.

NOTE: This qualification should only be used when absolutely necessary, as it is more complex to implement.

Definition of SS (SS Conditional) qualification:

- The capability shall be supported by at least one but not all solutions.

Definition of "-" (no support) qualification:

- The capability shall not be supported.

Note that, in this clause, the term "support" refers to the support of standardized model elements by a specific implementation or instance of an agent. It cannot be assumed that unsupported standardized model elements are known to the agent. How an implementation is expected to treat unsupported standardized model elements is not specified, and the behaviour would likely be same as for other unknown or errant model elements.

---

## 7 UML Diagram Requirements

Classes and their relationships shall be presented in class diagrams.

It is recommended to create:

- An overview class diagram containing all object classes related to a specific management area (Class Diagram).
  - The class name compartment should contain the location of the class definition (e.g., "Qualified Name")
  - The class attributes should show the "Signature". (see subclause 7.3.44 of [2] for the signature definition);
- A separate inheritance class diagram in case the overview diagram would be overloaded when showing the inheritance structure (Inheritance Class Diagram);
- A class diagram containing the user defined data types (Type Definitions Diagram);
- Additional class diagrams to show specific parts of the specification in detail;
- State diagrams for complex state attributes.

---

## Annex A (informative): Examples of using <<ProxyClass>>

### A.1 First Example

This shows a <<ProxyClass>> named `YyyFunction`. It represents all IOCs listed in the Note under the UML diagram. All the listed IOCs, in the context of this example, inherit from `ManagedFunction` IOC.

The use of <<ProxyClass>> eliminates the need to draw multiple UML <<InformationObjectClass>> boxes, i.e. those whose names are listed in the Note, in the UML diagram.



**Figure A.1-1: <<ProxyClass>> Notation Example A.1**

## A.2 Second Example

This shows a <<ProxyClass>> named YyyFunction. It represents all IOCs listed in the attached (or associated) Note. All the listed IOCs, in the context of this example, have link (internal and external) relations.

This shows a <<ProxyClass>> InternalYyyFunction. It represents all IOCs listed in the attached (or associated) Note.

This shows a <<ProxyClass>> Link\_a\_z and ExternalLink\_a\_z. They represent all IOCs listed in the attached (or associated) Note.

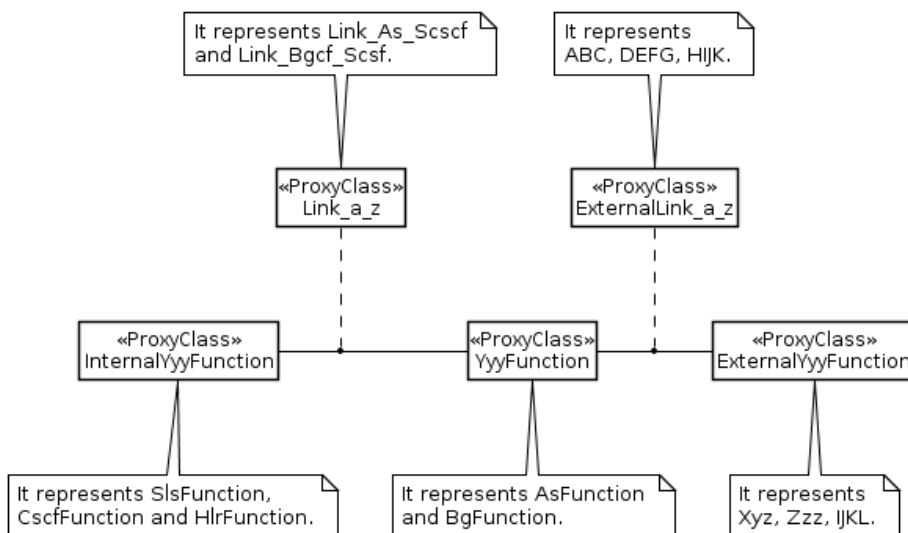


Figure A.2-1: <<ProxyClass>> Notation Example A.2

## Annex B (normative): Attribute properties

**Table B.1 shows the impact of the "isWritable", "defaultValue" and "multiplicity" attribute properties on the behavior of managers and agents upon object creation, and on attribute values directly after object creation**  
**Table B.1: Attribute properties**

isWritable	defaultValue	multiplicity $\geq 1$	Impact of attribute properties on the behaviour of agents and managers upon object creation, and on attribute values directly after object creation
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	The manager <i>may</i> provide a value. If not provided, the agent <i>shall</i> set the value to the default value. -> The attribute has the default value or some other value.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The manager <i>may</i> provide a value. If not provided, the agent <i>shall</i> set the value to the default value. -> The attribute has the default value, or some other value.  Note, if "isInvariant: True", the attribute never has no value, even though this is allowed.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	The manager <i>shall</i> provide an attribute value. -> The attribute has some value.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	The manager <i>may</i> provide a value. If not provided, the agent <i>shall not</i> provide a value. -> The attribute has some value, or no value.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	The manager <i>shall not</i> provide a value. The agent <i>shall</i> set the value to the default value. -> The attribute has the default value.
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The manager <i>shall not</i> provide a value. The agent <i>shall</i> set the value to the default value. -> The attribute has the default value.  Note, if "isInvariant: True", the attribute never has no value, even though this is allowed
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Not valid. Reason: The manager <i>shall not</i> provide a value. The agent <i>shall not</i> provide a value. -> The attribute has no value, which is an invalid state
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	The manager <i>shall not</i> provide a value. The agent <i>shall not</i> provide a value. -> The attribute has no value.  Note, if "isInvariant: True", the attribute has invariantly no value, which is a valid state but may not make sense.



# Annex C (normative): Design patterns


## C.1 Intervening class and Association class

### C.1.1 Concept and definition

Classes may be related via simple direct associations or via associations with related association classes.

However, in situations where the relationships between a number of classes is complex and especially where the relationships between instances of those classes are themselves interrelated there may be a need to encapsulate the complexity of the relationships within a class that sits between the classes that are to be related. The term “intervening class” is used here to name the pattern that describes this approach. The name “intervening class” is used as the additional class “intervenes” in the relationships between other classes.

The “intervening class” differs from the association class as the intervening class does break the association between the classes whereas the association class does not but instead sits to one side. This can be seen in the following figure. A direct association between class A and C appears the same at A and C regardless of the presence or absence of an association class whereas in the case of the “intervening class” there are associations between A and the “intervening class” B and C and the “intervening class” B.

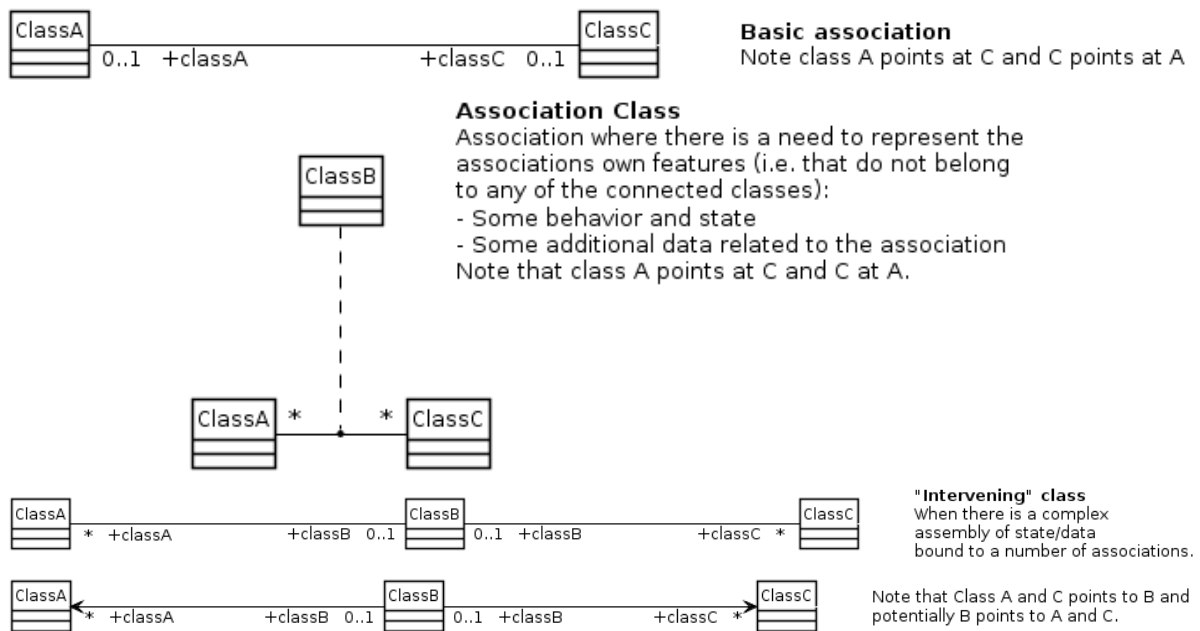

**Figure C.1.1-1: Various association forms**

The “intervening class” is essentially no different to any other class in that it may encapsulate attributes, complex behaviour etc.

The following figure shows an instance view of both an association class form and an “intervening class” form for a complex interrelationship

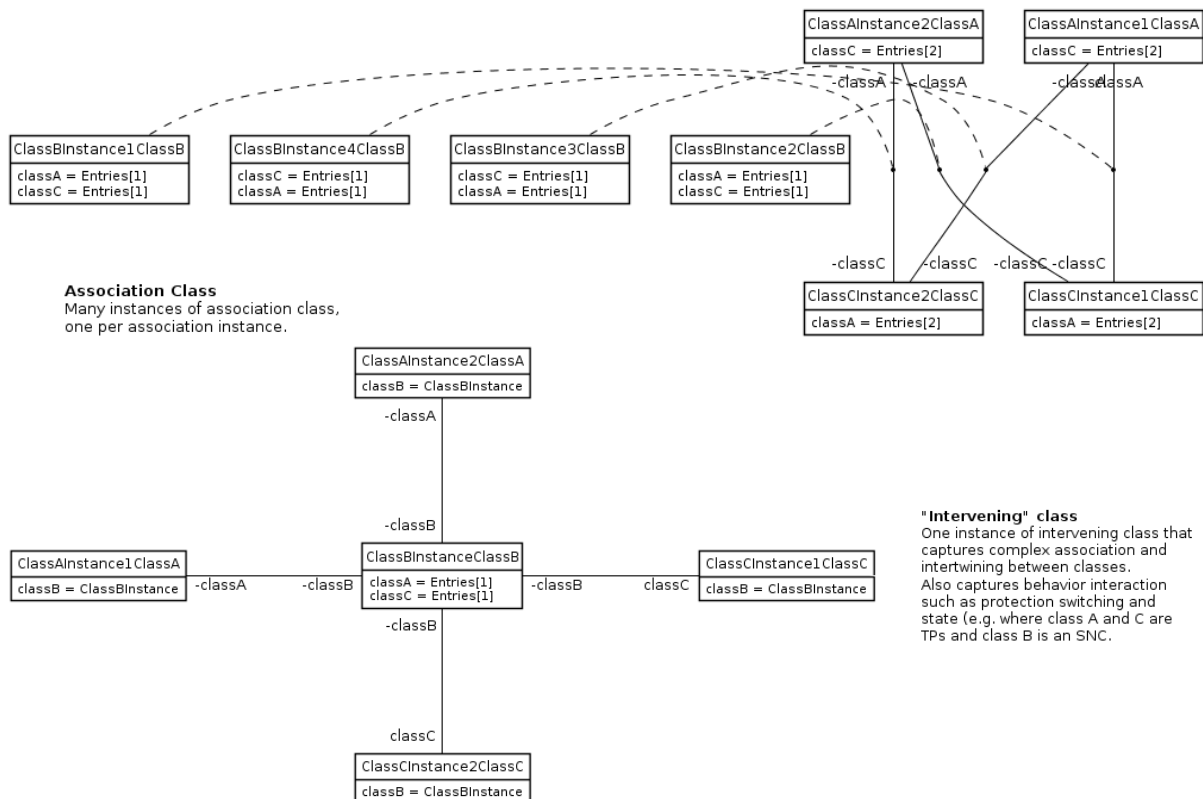


Figure C.1.1-2: Instance view of "intervening class"


The case depicted above does not show interrelationships between the relationships. A practical case from modeling of the relationships between Termination Points in a fixed network does show this relationship interrelationship challenge. In this case the complexity of relationship is between instances of the same class, the Termination Point (TP). The complexity is encapsulated in a SubNetworkConnection (SNC) class.



**Simplified SNC and TP case**

An SNC cannot exist without at least 2 TPs being related.

Some simplifications: In this case TP and SNC model is assumed to be bidirectional only. The TPs have roles with respect to the SNC but these are ignored here. There are many other attributes and properties related to protection that are ignored here..

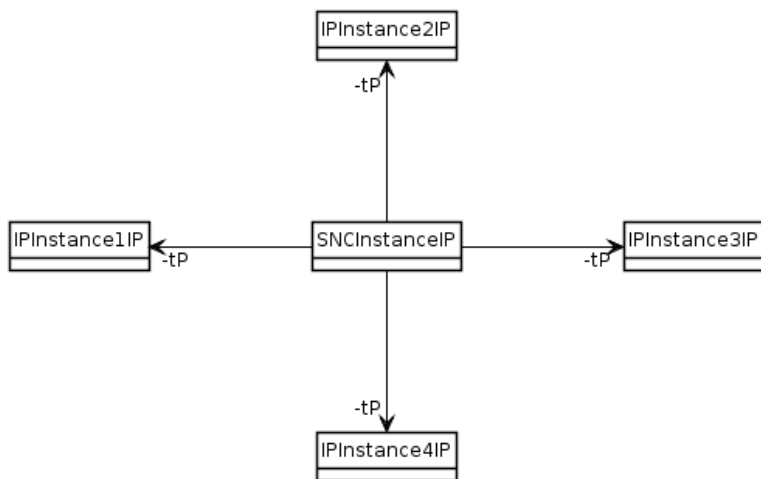

**"Intervening" class**

One instance of intervening class that captures complex association and intertwining between classes. Also captures behavior interaction such as protection switching and state

Figure C.1.1-3: SNC intervening in TP-TP relationship

The SNC also encapsulates the complex behaviour of switching and path selection as depicted below.

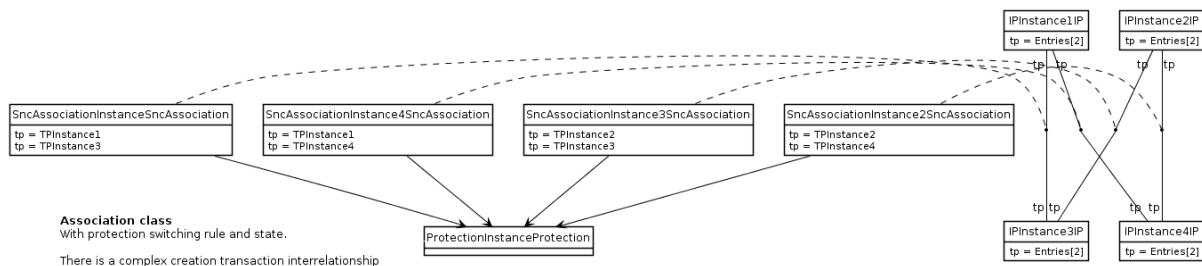


Figure C.1.1-4: Complex relationship interrelationships

### C.1.2 Usage in the non-transport domain

The choice of association class pattern or intervening class pattern is on a case-by-case basis.

The transport domain boundary is highlighted in the following figure.

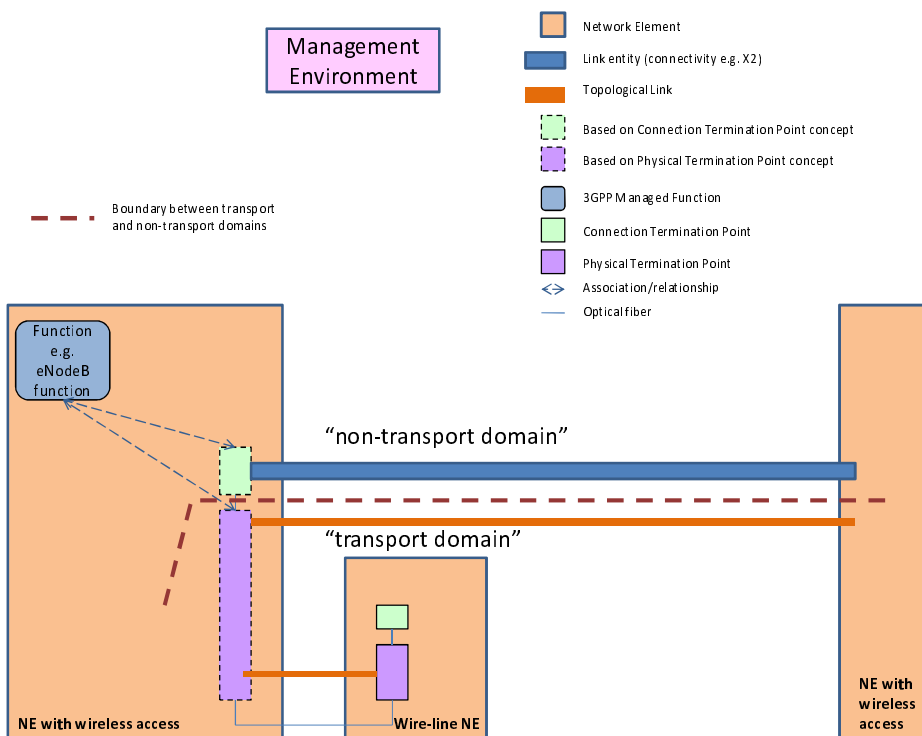


Figure C.1.2-1: Highlighting the boundary between transport and non-transport domains

### C.1.3 Usage in the transport domain

The following guidelines must be applied to the models of the “transport domain”.

When considering interrelationships between classes the following guidelines should be applied:

- If considering all current and recognised potential future cases it is expected that the relationship between two specific classes will be 0..1:0..1 then a simple association should be used
  - This may benefit from an association class to convey rules and parameters about the association behaviour in complex cases.

- If there is recognised potential for cases currently or in future where there is a 0..\*:0..\* between two specific classes then intervening classes should be used to encapsulate the groupings etc. so as to convert it to 0..1:n..\*.
  - Note that the 0..1:n..\* association may benefit from an association class to convey rules and parameters about the association behaviour in complex cases but in the instance form this can probably be ignored or folded into the intervening class
- In general it seems appropriate to use an association class when the properties on the relationship instance cannot be obviously or reasonably folded into one of the classes at either end of the association and when there is no interdependency between association instances between a set of instances of the classes.

An example of usage of intervening class is the case of the TP-TP (TerminationPoint) relationship (0..\*:0..\*) where the SNC (SubNetworkConnection) is added as the intervening class between multiple TPs, i.e. TP-SNC. Note that TP-SNC actually becomes 0..2:n..\* due to directionality encapsulation.

Considering the case of the adjacency relationship between PTPs it is known that although the current common cases are 1:1 there are some current and many potential future case of 0..\*:0..\* and hence a model that has an intervening class, i.e. the TopologicalLink, should be used.

For a degenerate instance cases of 0..\*:0..\* that happens to be 0..1:0..1 the intervening class pattern should still be used:

- • Using the 0..1:0..1 direct association in this degenerate case brings unnecessary variety to the model and hence to the behaviour of the application (the 0..1:n..\* model covers the 0..1:0..1 case with one single code form clearly)
- • An instance of the 0..1:0..1 model may need to be migrated to 0..1:n..\* as a result of some change in the network forcing an unnecessary administrative action to transition the model form where as in the 0..1:n..\* form requires no essential change.

---

## C.2 Use of “ExternalXyz” class

This subclause will be completed for the next release.

## Annex D (informative): Void

---

## Annex E (normative): <<SupportIOC>> stereotype definition

### E.1 Description

It is the descriptor for a set of management capabilities.

The <<SupportIOC>> is an extension of UML *class*. See Annex [F] for the differences between <<InformationObjectClass>> and <<SupportIOC>>.

See more on UML *class* in 10.2.1 of [1].

### E.2 Example

This sample shows an `AlarmList` <<SupportIOC>>.



**<<SupportIOC>> notation**

### E.3 Name style

For <<SupportIOC>> name, use the same style as <<InformationObjectClass>> (see subclause 5.3.2).

---

## Annex F (normative): Application of <<InformationObjectClass>> and <SupportIOC>>

The <<InformationObjectClass>> and <<SupportIOC>> are stereotypes. These two stereotypes serve similar purpose in that each is a named set of network resource properties. However, their applications, in the context of supporting network management over Itf-N or through the use of management services, can be different. This Annex highlights their similarities and differences of such application.

	<<InformationObjectClass>>	<<SupportIOC>>
Can it be an abstract class?	Yes	Yes
Can it be a concrete class?	Yes	Yes
Can it inherit from <<InformationObjectClass>>?	Yes	No, except for <<InformationObjectClass>> Top.
Can it inherit from <<SupportIOC>>?	No	Yes
Can it be name-contained by <<InformationObjectClass>>?	Yes	Yes
Can it be name-contained by <<SupportIOC>>?	No	Yes
Can an instance have a DN?	<<InformationObjectClass>> must be a class of a naming-tree meaning all its instances must have a DN.	<<SupportIOC>> may be used by specification author for a class within a naming-tree. If so, it means that all its instances will have a DN.
Can either 1) IRPManager use operations of Basic CM IRP [9] and Bulk CM IRP [10] or 2) MnS consumer use the Provisioning operations [17] and [16] to access the information in an instance?	Either 1) IRPManager can use the Basic CM IRP and Bulk CM IRP operations or 2) MnS consumer can use the provisioning operations to access information of all <<InformationObjectClass>> defined in all NRM [15], in accordance to the qualifier values of the <<InformationObjectClass>>.	Either 1) IRPManager can use the Basic CM IRP and Bulk CM IRP operations to access information of instances of <<SupportIOC>> defined in their respective Interface IRP (i.e. Basic CM IRP or Bulk CM IRP), in accordance to the qualifier values of the <<SupportIOC>> or 2) MnS consumer can use the provisioning operations to access information of instances of <<SupportIOC>> specified in [16] and [17] in accordance to the qualifier values of the <<SupportIOC>>.  Neither 1) IRPManager can use the Basic CM IRP and Bulk CM IRP operations to access information of instances of <<SupportIOC>> not defined in their respective Interface IRP (i.e. Basic CM IRP or Bulk CM IRP) nor 2) MnS consumer can use the Provisioning operations to access information of instances of <<SupportIOC>> not defined in [16] and [17].
Can either 1) IRPManager use operations of Interface IRP, except Basic CM IRP [9] and Bulk CM IRP [10] (e.g. Alarm IRP [11]), or 2) MnS consumer use non Provisioning operations (e.g. fault supervision operations [14] and [16]) to access the information?	No	<b>Either 1)</b> IRPManager can use the Interface IRP operations to access information of <<SupportIOC>> defined in their respective Interface IRP, in accordance to qualifier values of the <<SupportIOC>> <b>or 2)</b> . MnS consumer can use the Provisioning operations to access information of instances of <<SupportIOC>> specified in [16] and [17] in accordance to the qualifier values of the <<SupportIOC>>.  Neither 1) IRPManager can not use the Interface IRP operations to access information of <<SupportIOC>> not defined in their respective Interface IRP, nor 2) MnS consumer can not use the Provisioning operations to access information of instances of <<SupportIOC>> not defined in [16] and [17].



Can either IRPManager or MnS consumer receive information via Notification [12] whose <code>objectClass</code> and <code>objectInstance</code> parameters carry the instance DN?	Yes. The types of notification emitted are shown by the Notification Table associated with the class definition.	Yes if <code>&lt;&lt;SupportIOC&gt;&gt;</code> is a class of a naming-tree. The types of notification emitted are shown by the Notification Table associated with the class definition.  No if <code>&lt;&lt;SupportIOC&gt;&gt;</code> is not a class of a naming-tree.
Measurement [13]	Measurements can be associated with <code>&lt;&lt;InformationObjectClass&gt;&gt;</code> instances.	Measurements can be associated with <code>&lt;&lt;SupportIOC&gt;&gt;</code> instances if <code>&lt;&lt;SupportIOC&gt;&gt;</code> class is used in a naming-tree.

## Annex G(informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2012-12					New version after approval	2.0.0	11.0.0
2013-01					Fixed layout problems	11.0.0	11.0.1
2013-03					Fixed title of the spec by removing a semi colon	11.0.1	11.0.2
2013-06	SA#60	SP-130304	001	-	Model Repertoire introduce CR S5vTMFa354	11.0.2	11.1.0
2014-09	SA#65	SP-140597	002	-	Introduce the agreed result of MSDO JWG Model Alignment work	11.1.0	11.2.0
2014-10	-	-	-	-	Update to Rel-12 version (MCC)	11.2.0	<b>12.0.0</b>
2016-01	-	-	-	-	Update to Rel-13 version (MCC)	12.0.0	<b>13.0.0</b>

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2016-12	SA#74	SP-160855	0003	-	B	Add missing Annex	14.0.0
2017-04						Editorial fixes (MCC)	14.0.1
2018-06	SA#80	SP-180422	0007	-	A	Clarify the use of datatype	14.1.0
2018-06	SA#80	SP-180423	0015	1	A	Clarification and removal of text	14.1.0
2018-06	-	-	-	-	-	Update to Rel-15 version (MCC)	15.0.0
2018-12	SA#82	SP-181042	0016	1	F	Add producer - consumer interaction to Annex B	15.1.0
2018-12	SA#82	SP-181042	0017	1	F	Add producer - consumer interaction to Annex F	15.1.0
2018-12	SA#82	SP-181042	0018	1	F	Update example of the generalization relationship	15.1.0
2018-12	SA#82	SP-181044	0019	2	D	Inconsistent definition of composition	16.0.0
2018-12	SA#82	SP-181044	0020	-	C	Make the use of roles optional	16.0.0
2018-12	SA#82	SP-181044	0021	-	C	Make the use of the visibility symbol optional	16.0.0
2019-03	SA#83	SP-190132	0023	1	A	Removal of reference to a temporary joint working group	16.1.0
2019-06	SA#84	SP-190377	0028	1	A	Correct style for Definition	16.2.0
2019-12	SA#86	SP-191159	0035	-	F	Add passedByld and other updates	16.3.0
2019-12	SA#86	SP-191172	0036	4	F	Update attribute properties table in clause 5.2.1.1	16.3.0
2020-03	SA#87E	SP-200172	0037	-	F	Correct reference to NOTE in attribute properties table in clause 5.2.1.1	16.4.0
2022-03	SA#95e	SP-220179	0039	1	F	Specifying multivalued attributes	16.5.0
2022-03	SA#95e	SP-220186	0040	-	F	Clarify definition of AllowedValues	17.0.0
2022-06	SA#96	SP-220510	0042	1	A	Clarification of property defaultValue	17.1.0
2022-12	SA#98e	SP-221170	0047	-	A	Correct the wrong example for Generalization relationship notation	17.2.0
2022-12	SA#98e	SP-221168	0048	2	F	Clarify definitions of attribute properties	17.2.0

---

# History

<b>Document history</b>		
V17.0.0	May 2022	Publication
V17.1.0	July 2022	Publication
V17.2.0	January 2023	Publication