

# ETSI TS 132 312 V13.0.0 (2016-02)



**Digital cellular telecommunications system (Phase 2+);  
Universal Mobile Telecommunications System (UMTS);  
LTE;  
Telecommunication management;  
Generic Integration Reference Point (IRP) management;  
Information Service (IS)  
(3GPP TS 32.312 version 13.0.0 Release 13)**



---

Reference

RTS/TSGS-0532312vd00

---

Keywords

GSM,LTE,UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

The present document can be downloaded from:  
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at  
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:  
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016.  
All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.  
**3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.  
**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	5
Introduction .....	5
1 Scope .....	6
2 References .....	6
3 Definitions and abbreviations.....	6
3.1 Definitions .....	6
3.2 Abbreviations .....	7
4 System Overview .....	8
System Context .....	8
5 Information Object Classes (IOCs) .....	9
5.1 Imported information entities and local labels .....	9
5.2 Class Diagram .....	9
5.2.1 Attributes and relationships .....	9
5.2.2 Inheritance .....	9
5.3 Information object class definitions .....	9
5.3.1 ManagedGenericIRP.....	9
5.3.1.1 Definition .....	9
5.3.1.2 Attributes.....	10
5.3.1.3 Notification .....	10
5.4 Information relationship definitions .....	10
5.5 Information attribute definitions.....	10
5.5.1 Definitions and legal values.....	11
6 Interface Definition .....	11
6.1 Class diagram representing interfaces .....	11
6.2 Generic rules .....	12
6.3 genericIRPVersionOperations Interface (M).....	12
6.3.1 Operation getIRPVersion (M).....	12
6.3.1.1 Definition .....	12
6.3.1.2 Input parameters.....	12
6.3.1.3 Output parameters.....	12
6.3.1.4 Pre-condition.....	12
6.3.1.5 Post-condition .....	12
6.3.1.6 Exceptions.....	12
6.4 genericIRPProfileOperations Interface (O).....	13
6.4.1 Operation getOperationProfile (O).....	13
6.4.1.1 Definition .....	13
6.4.1.2 Input parameters.....	13
6.4.1.3 Output parameters .....	13
6.4.1.4 Pre-condition.....	13
6.4.1.5 Post-condition .....	13
6.4.1.6 Exceptions.....	13
6.4.2 Operation getNotificationProfile (O) .....	14
6.4.2.1 Definition .....	14
6.4.2.2 Input parameters.....	14
6.4.2.3 Output parameters.....	14
6.4.2.4 Pre-condition.....	14
6.4.2.5 Post-condition .....	14
6.4.2.6 Exceptions.....	14

**Annex A (informative):**    **Change history** .....15  
History .....16

---

## Foreword

This Technical Specification (TS) has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

## Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

- 32.311: Generic Integration Reference Point (IRP) management; Requirements
- 32.312: Generic Integration Reference Point (IRP) management; Information Service (IS)**
- 32.316: Generic Integration Reference Point (IRP) management; Solution Set (SS) Definitions

The Itf-N interface is built up by a number of IRPs and a related Name Convention, which realise the functional capabilities over this interface. The basic structure of the IRPs is defined in TS 32.101 [1] and TS 32.102 [2].

All IRPs support a set of generic features. Those features allow to retrieve IRP profile and IRP supported versions. The present document contains the specification of those generic features.

---

# 1 Scope

The purpose of the present document is to define a common service supported by all IRPs such as AlarmIRP. The present document is the "Information Service" part. It defines, for the purpose of supporting the common service, the information observable and controllable by management system's client (i.e. IRPManager) via the Itf-N. It also specifies the semantics of and the interactions used to carry this information.

With this common service supported by all IRPs, an IRPManager can retrieve the profile of operations and notifications supported by a given IRP name-contained by an IRPAgent. An IRPManager can also retrieve the IRPVersions supported by a given IRP.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".

[2] 3GPP TS 32.102: "Telecommunication management; Architecture".

[3] 3GPP TS 32.301: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Requirements".

[4] Void.

[5] 3GPP TS 32.311: "Telecommunication management; Generic Integration Reference Point (IRP) management; Requirements".

[6] 3GPP TS 32.150: "Telecommunication management; Integration Reference Point (IRP) Concept and definitions".

[7] 3GPP TS 32.111-2: "Telecommunication management; Fault Management; Part 2: Alarm Integration Reference Point (IRP): Information Service (IS)".

[8] 3GPP TS 32.622: "Generic network resources Integration Reference Point (IRP): Network Resource Model (NRM)".

---

# 3 Definitions and abbreviations

## 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 32.101 [1], TS 32.102 [2], TS 32.301 [3] and the following apply:

**IRP:** see TS 32.102 [2].

**IRPAgent:** see TS 32.102 [2].

**IRPManager:** see TS 32.102 [2].

**IRP document version number string (or "IRPVersion"):** see TS 32.311 [5].

**Iff-N:** see TS 32.102 [2].

**SupportIOC:** see TS 32.150 [6].

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CM	Configuration Management
DN	Distinguished Name
EM	Element Manager
IOC	Information Object Class
IRP	Integration Reference Point
IS	Information Service
ITU-T	International Telecommunication Union Telecommunication standardisation sector
NE	Network Element
NM	Network Manager
NR	Network Resource
NRM	Network Resource Model
OMG	Object Management Group
RDN	Relative Distinguished Name
SS	Solution Set
UML	Unified Modelling Language (OMG)



# 4 System Overview

## System Context

The general definition of the System Context for the present IRP is found in TS 32.150 [6] clause 4.7.

In addition, the set of related IRP(s) relevant to the present IRP is shown in the two diagrams below.

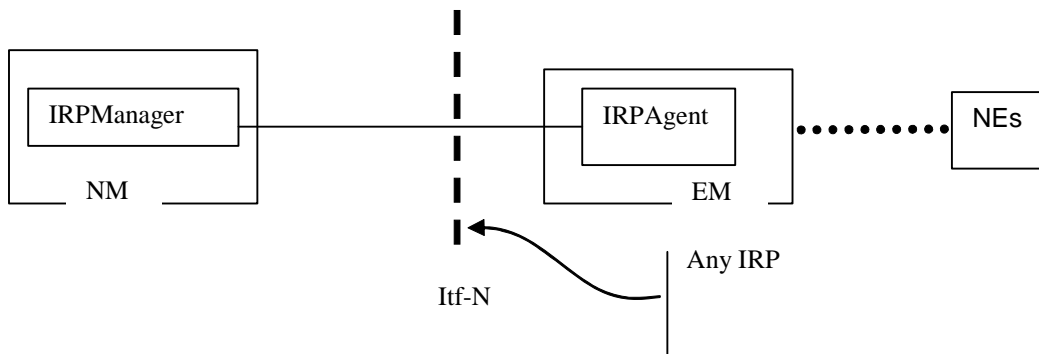


Figure 4.1: System Context A

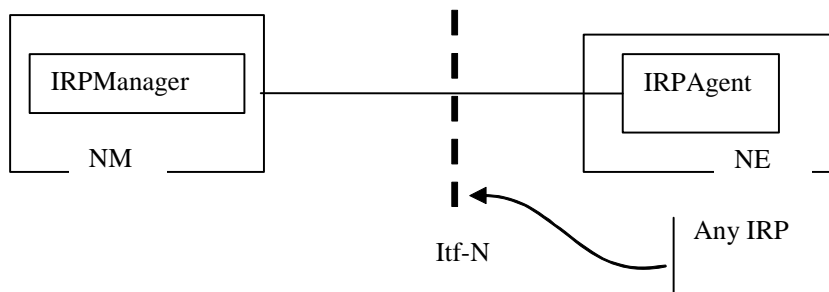


Figure 4.2: System Context B

## 5 Information Object Classes (IOCs)


### 5.1 Imported information entities and local labels

Label reference	Local label
3GPP TS 32.111-2 [7], notification, notifyNewAlarm	notifyNewAlarm
3GPP TS 32.111-2 [7], notification, notifyChangedAlarm	notifyChangedAlarm
3GPP TS 32.111-2 [7], notification, notifyClearedAlarm	notifyClearedAlarm
3GPP TS 32.111-2 [7], notification, notifyAckStateChanged	notifyAckStateChanged
3GPP TS 32.622 [8], information object class, Top	Top

### 5.2 Class Diagram


#### 5.2.1 Attributes and relationships

This clause depicts the set of classes (e.g. IOCs) that encapsulates the information relevant for this IRP. This clause provides an overview of the relationships between relevant classes in UML. Subsequent clauses provide more detailed specification of various aspects of these classes.



#### 5.2.2 Inheritance

This clause depicts the inheritance relationships that exist between SupportIOCs.

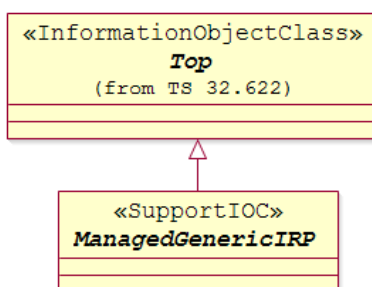

### 5.3 Information object class definitions

#### 5.3.1 ManagedGenericIRP

##### 5.3.1.1 Definition

This SupportIOC represents a generic IRP which supports generic management capabilities associated with each IRPagent. This SupportIOC cannot be instantiated. It is defined for sub-classing purposes.

### 5.3.1.2 Attributes

Attribute name	Support Qualifier	Read Qualifier	Write Qualifier
iRPId	M	M	-
iRPVersions	M	M	-
operationNameProfile	O	M	-
operationParameterProfile	O	M	-
notificationNameProfile	O	M	-
notificationParameterProfile	O	M	-

### 5.3.1.3 Notification

Name	Qualifier	Notes
notifyNewAlarm	O	See Alarm IRP (3GPP TS 32.111-2 [7])
notifyChangedAlarm	O	See Alarm IRP (3GPP TS 32.111-2 [7])
notifyClearedAlarm	O	See Alarm IRP (3GPP TS 32.111-2 [7])
notifyComments	O	See Alarm IRP (3GPP TS 32.111-2 [7])
notifyAckStateChanged	O	See Alarm IRP (3GPP TS 32.111-2 [7])

## 5.4 Information relationship definitions

None

## 5.5 Information attribute definitions


This clause defines the semantics of the attributes used in SupportIOCs.

### 5.5.1 Definitions and legal values

Attribute Name	Definition	Legal Values
iRPId	An attribute whose "name+value" can be used as an RDN when naming an instance of this object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance.	
iRPVersions	This attribute contains a set of IRPVersions. The set contains at least one element.	See definition "IRP document version number string" in clause 3.1.
operationNameProfile	This attribute contains a set of elements. The n-th element of this set contains the set of operation names supported for the IRPVersion identified in the n-th element of iRPVersions attribute.	
notificationNameProfile	This attribute contains a set of elements. The n-th element of this set contains the set of notification names supported for the IRPVersion identified in the n-th element of iRPVersions attribute.	
operationParameterProfile	This attribute contains a set of elements. The n-th element of this set contains the set of set of notification parameters supported by the operations identified in the n-th element of operationNameProfile attribute. The set of operation parameters are placed in the set in the same order as the order followed by the operation names in their set.	
notificationParameterProfile	This attribute contains a set of elements. The n-th element of this set contains the set of set of notification parameters supported by the notifications identified in the n-th element of notificationNameProfile attribute. The set of notification parameters are placed in the set in the same order as the order followed by the notification names in their set.	

## 6 Interface Definition

### 6.1 Class diagram representing interfaces

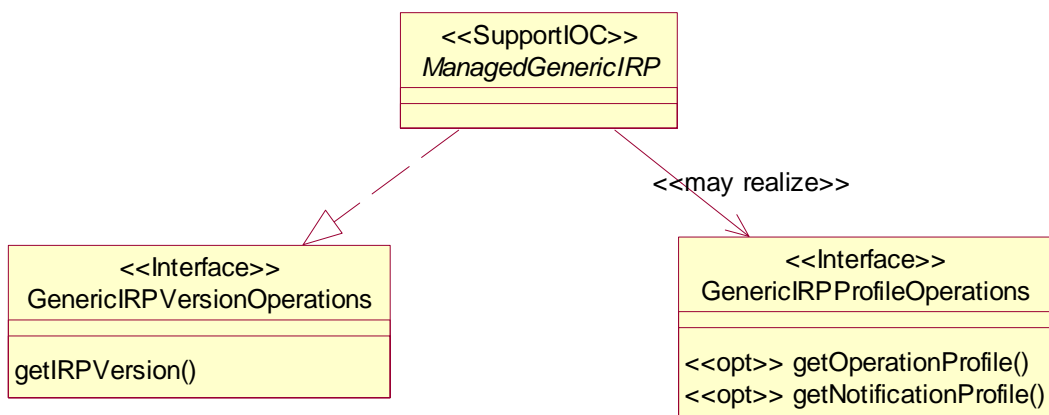

## 6.2 Generic rules

- **Rule 1:** each operation with at least one input parameter supports a pre-condition `valid_input_parameter` which indicates that all input parameters shall be valid with regards to their information type. Additionally, each such operation supports an exception `operation_failed_invalid_input_parameter` which is raised when pre-condition `valid_input_parameter` is false. The exception has the same entry and exit state.
- **Rule 2:** Each operation with at least one optional input parameter supports a set of pre-conditions `supported_optional_input_parameter_xxx` where "xxx" is the name of the optional input parameter and the pre-condition indicates that the operation supports the named optional input parameter. Additionally, each such operation supports an exception `operation_failed_unsupported_optional_input_parameter_xxx` which is raised when (a) the pre-condition `supported_optional_input_parameter_xxx` is false and (b) the named optional input parameter is carrying information. The exception has the same entry and exit state.
- **Rule 3:** each operation shall support a generic exception `operation_failed_internal_problem` which is raised when an internal problem occurs and that the operation cannot be completed. The exception has the same entry and exit state.

## 6.3 genericIRPVersionOperations Interface (M)

### 6.3.1 Operation `getIRPVersion` (M)

#### 6.3.1.1 Definition

`IRPManager` wishes to find out the IRP SS versions supported by an IRP. The IRP shall respond with a set of supported IRP SS version(s). The list of returned `IRPVersions` is such that the `IRPManager` can use any of these versions without having to specify an `IRPVersion` to the `IRPAgent`.

#### 6.3.1.2 Input parameters

None

#### 6.3.1.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
<code>versionNumberSet</code>	M	<code>ManagedGenericIRP.iRPVersions</code> .	It indicates one or more SS version numbers ( <code>IRPVersion</code> , as defined by "IRP document version number string" in clause 3.1) supported by the IRP.
<code>status</code>	M	ENUM (Operation succeeded, Operation failed)	If <code>operation_failed_internal_problem</code> status = <code>OperationFailed</code> .

#### 6.3.1.4 Pre-condition

None specific

#### 6.3.1.5 Post-condition

None specific

#### 6.3.1.6 Exceptions

None specific

## 6.4 genericIRPProfileOperations Interface (O)

### 6.4.1 Operation getOperationProfile (O)

#### 6.4.1.1 Definition

IRPManager invokes this operation to query the detailed profile of an IRP (supported operations and supported parameters) for a specific supported version. The notification profile will provide details about notifications that are specifically defined by this IRP.

#### 6.4.1.2 Input parameters

Parameter Name	Qualifier	Information Type	Comment
iRPVersion	M	Element of ManagedGenericIRP.iRPVersions.	It contains a version number.

#### 6.4.1.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
operationNameProfile	M	Elements of ManagedGenericIRP.operationNameProfile corresponding to the iRPVersion parameter.	If this parameter contains no information, it implies that the IRP does not support any operation.
operationParameterProfile	M	Elements of ManagedGenericIRP.operationParameterProfile corresponding to the iRPVersion parameter.	
status	M	ENUM (Operation succeeded, Operation failed)	If operation_failed_invalid_version status = OperationFailed.

#### 6.4.1.4 Pre-condition

validIRPVersion.

Assertion Name	Definition
validIRPVersion	The iRPVersion input parameter identifies a supported version contained in attribute iRPVersions of the ManagedGenericIRP SupportIOC.

#### 6.4.1.5 Post-condition

None specific

#### 6.4.1.6 Exceptions

Name	Definition
Operation_failed_invalid_version	<b>Condition:</b> validIRPVersion is false <b>Returned Information:</b> The output parameter status <b>Exit state:</b> Entry State

## 6.4.2 Operation `getNotificationProfile` (O)

### 6.4.2.1 Definition

`IRPManager` invokes this operation to query the detailed notification profile of an IRP (supported notifications and supported parameters) for a specific supported version. The notification profile will provide details about notifications that are specifically defined by this IRP. For example, if this IRP is notification IRP R4, then `getNotificationProfile` will not return any information since no notification is defined in notification IRP R4.

### 6.4.2.2 Input parameters

Parameter Name	Qualifier	Information Type	Comment
<code>iRPVersion</code>	M	Element of <code>ManagedGenericIRP.iRPVersion</code>	It contains a version number.

### 6.4.2.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
<code>notificationNameProfile</code>	M	Element of <code>ManagedGenericIRP.notificationNameProfile</code> corresponding to the <code>iRPVersion</code> parameter.	If this parameter contains no information, it implies that the IRP does not support any notification.
<code>notificationParameterProfile</code>	M	Element of <code>ManagedGenericIRP.notificationParameterProfile</code> corresponding to the <code>iRPVersion</code> parameter.	
<code>status</code>	M	ENUM (Operation succeeded, Operation failed)	If <code>operation_failed_invalid_version status = OperationFailed</code> .

### 6.4.2.4 Pre-condition

`validIRPVersion`.

Assertion Name	Definition
<code>validIRPVersion</code>	The <code>iRPVersion</code> input parameter identifies a supported version contained in attribute <code>iRPVersions</code> of the <code>ManagedGenericIRP SupportIOC</code> .

### 6.4.2.5 Post-condition

None specific

### 6.4.2.6 Exceptions

Name	Definition
<code>Operation_failed_invalid_version</code>	<b>Condition:</b> <code>validIRPVersion</code> is false <b>Returned Information:</b> The output parameter <code>status</code> <b>Exit state:</b> Entry State

## Annex A (informative): Change history

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Cat	Old	New
Jun 2001	SA_12	SP-010285	--	--	Approved at TSG SA #12 and placed under Change Control	--	2.0.0	4.0.0
Mar 2002	SA_15	--	--	--	Automatic upgrade to Rel-5 (no Rel-5 CR)	--	4.0.0	5.0.0
Dec 2002	--	--	--	--	Cosmetics	--	5.0.0	5.0.1
Dec 2003	SA_22	SP-030640	0002	--	Align with 32.102 and 32.311	A	5.0.1	5.1.0
Mar 2004	SA_23	SP-040105	--	--	Automatic upgrade to Rel-6 (no CR)	--	5.1.0	6.0.0
Dec 2004	SA_26	SP-040794	0003	--	Update UML diagrams, Add reference to its CORBA/CMIP SSs	F	6.0.0	6.1.0
Jun 2005	SA_28	SP-050329	0004	--	Apply Generic System Context – Align with TS 32.150	F	6.1.0	6.2.0
Dec 2006	SA_34	SP-060708	0005	--	Add missing Notification Table for ManagedGenericIRP	F	6.2.0	6.3.0
Jun 2007	SA_36	--	--	--	Automatic upgrade to Rel-7 (no CR) at freeze of Rel-7. Deleted reference to CMIP SS, discontinued from R7 onwards.	--	6.3.0	7.0.0
Dec 2008	SA_42	--	--	--	Upgrade to Release 8	--	7.0.0	8.0.0
Dec 2009	SA_46	SP-090719	0006	--	Align usage of SupportIOC according to repertoire and template	C	8.0.0	9.0.0
Mar 2011	-	-	-	-	Update to Rel-10 version (MCC)	-	9.0.0	10.0.0
2012-09	-	-	-	-	Update to Rel-11 version (MCC)	-	10.0.0	<b>11.0.0</b>
2013-03	SA_59	SP-130049	0012	-	add missing iRPId etc.	A	11.0.0	<b>11.1.0</b>
2014-10	-	-	-	-	Update to Rel-12 version (MCC)	-	11.1.0	<b>12.0.0</b>
2016-01	-	-	-	-	Update to Rel-13 version (MCC)	-	12.0.0	<b>13.0.0</b>



---

# History

<b>Document history</b>		
V13.0.0	February 2016	Publication