

ETSI TS 132 571 V17.0.0 (2022-04)



**Universal Mobile Telecommunications System (UMTS);  
LTE;  
Telecommunication management;  
Home Node B (HNB) and Home eNode B (HeNB) management;  
Type 2 interface concepts and requirements  
(3GPP TS 32.571 version 17.0.0 Release 17)**



---

**Reference**

RTS/TSGS-0532571vh00

---

**Keywords**

LTE,UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

---

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

---

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

---

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	4
Introduction .....	4
1 Scope .....	5
2 References .....	5
3 Definitions and abbreviations.....	5
3.1 Definitions .....	5
3.2 Abbreviations .....	6
4 Concepts and background .....	6
4.1 Overview .....	6
4.2 Architecture .....	6
4.2.1 Mapping Function.....	7
5 Business Level Requirements .....	8
5.1 Requirements.....	8
5.2 Actor roles .....	8
5.3 Telecommunications resources .....	8
5.4 High-level use cases .....	8
6 Specification level requirements .....	9
6.1 Requirements.....	9
6.1.1 Configuration management.....	9
6.1.2 Fault management.....	9
<b>Annex A (informative): Change history .....</b>	<b>10</b>
History .....	11

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project Technical Specification Group Services and System Aspects, Telecommunication management; as identified below:

**32.571 “Telecommunication management; Home Node B (HNB) and Home eNode B (HeNB) management; Type 2 interface concepts and requirements”;**

32.572: “Telecommunication management; Home Node B (HNB) and Home eNode B (HeNB) management; Type 2 interface models and mapping functions”.

---

# 1 Scope

The present document describes requirements and concepts including architecture supporting Home Node B and Home eNode B OAM&P for interface Type 2.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [3] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [4] 3GPP TS 32.581: "Telecommunications management; Home Node B (HNB) Operations, Administration, Maintenance and Provisioning (OAM&P); Concepts and requirements for Type 1 interface HNB to HNB Management System (HMS)".
- [5] 3GPP TS 32.591: "Telecommunications management; Home eNode B (HeNB) Operations, Administration, Maintenance and Provisioning (OAM&P); Concepts and requirements for Type 1 interface HeNB to HeNB Management System (HMS)".
- [6] 3GPP TS 22.220: Service Requirements for Home NodeBs and Home eNodeBs
- [7] 3GPP TS 32.111-2: "Telecommunications management; Fault Management; Part 2: Alarm Integration Reference Point (IRP): Information Service (IS)
- [8] 3GPP TS 32.583: Telecommunications management; Home Node B (HNB) Operations, Administration, Maintenance and Provisioning (OAM&P); Procedure flows for Type 1 interface HNB to HNB Management System (HMS)

---

## 3 Definitions and abbreviations

For the purposes of this document, the terms and definitions given in TS 21.905 [1], TS 32.101 [2] and TS 32.102 [3] and in the following sub-clause 3.1 apply. Same term may be defined in different documents. The precedence rule, applicable to this document, is in the order of: this document, TS 32.101 [2], TS 32.102 [3], TS 21.905 [1].

### 3.1 Definitions

There is no additional definition defined in this subclause.

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

DM	Domain Manager
EM	Element Manager
HeNB	Home eNode B
HMS	HNB Management System
HeMS	HeNB Management System
HNB	Home Node B
NM	Network Manager
OAM	Operations, Administrator and Maintenance

---

## 4 Concepts and background


### 4.1 Overview

This clause lays out the logical system architecture for the support of HNB and HeNB management via Type 2 interface.

The architecture here takes into consideration of the Type 1 interface for HNB and Type 1 interface for HeNB.

### 4.2 Architecture

This clause describes the logical system architecture.

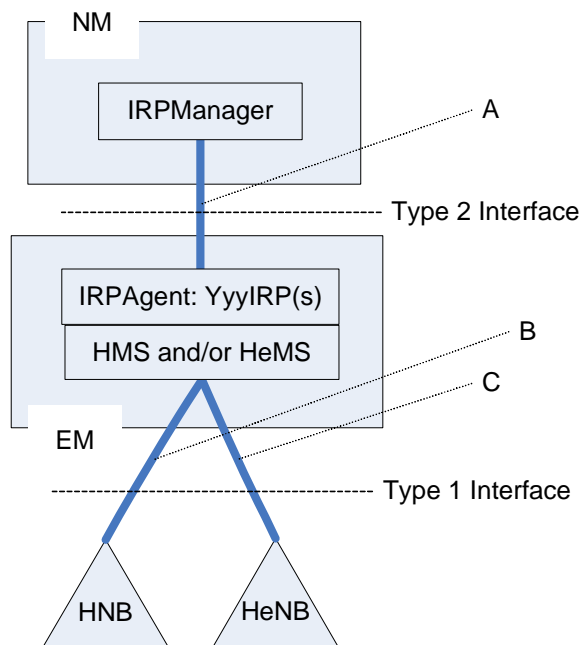

**Figure 1: System context of HNB and HeNB management**

The 'A' denotes the network management protocols (and associated network management data) whose characteristics are to be defined by this TS series.

The 'B' denotes the network management protocols (and associated network management data) whose characteristics are defined in TS series of [4].

The ‘C’ denotes the network management protocols (and associated network management data) whose characteristics are defined in TS series of [5].

The YyyIRPs of the IRPAgent:YyyIRP(s) box denotes the various IRPs such as AlarmIRP, BasicCMIRP, PMIRP, etc.

The triangle boxes represent managed devices such as HNB and HeNB.

IRPManager uses ‘A’ to manage all managed devices.

In this configuration, IRPAgent:YyyIRP(s) plays the role of network management service provider for IRPManager and the role of consumer for HMS and HeMS. Similarly, HMS and HeMS play the role of service provider for IRPAgent:YyyIRP(s) and the role of device management service consumer for HNB(s) and HeNB(s).


The boxes are logical functional entities. Their physical locations and their realization in physical processors cannot be deduced or implied. For example, an implementation can have IRPAgent:YyyIRP(s) and “HMS and/or HeMS” implemented in one physical processor.

The interaction between IRPAgent:YyyIRP(s) and “HMS and/or HeMS” is not visible from the perspective of this specification.

## 4.2.1 Mapping Function

IRPManager manages HNB(s) and HNB(s) using ‘A’. This management activities would trigger (result in) interactions between “HMS and/or HeMS” and HNB(s) and HeNB(s), using ‘B’ and ‘C’. The trigger(s) that relates interactions of ‘A’ and interactions of ‘B’/‘C’ is denoted by ‘F1’ and ‘F2’, the Mediation function.

Because the interaction between IRPAgent:YyyIRP(s) and “HMS and/or HeMS” is not visible, it is of no relevance if ‘F’ should be placed inside one box or another. This document chooses to place ‘F1’ and ‘F2’ arbitrary but embedded within IRPAgent:YyyIRP(s) and “HMS and/or HeMS” boundaries.

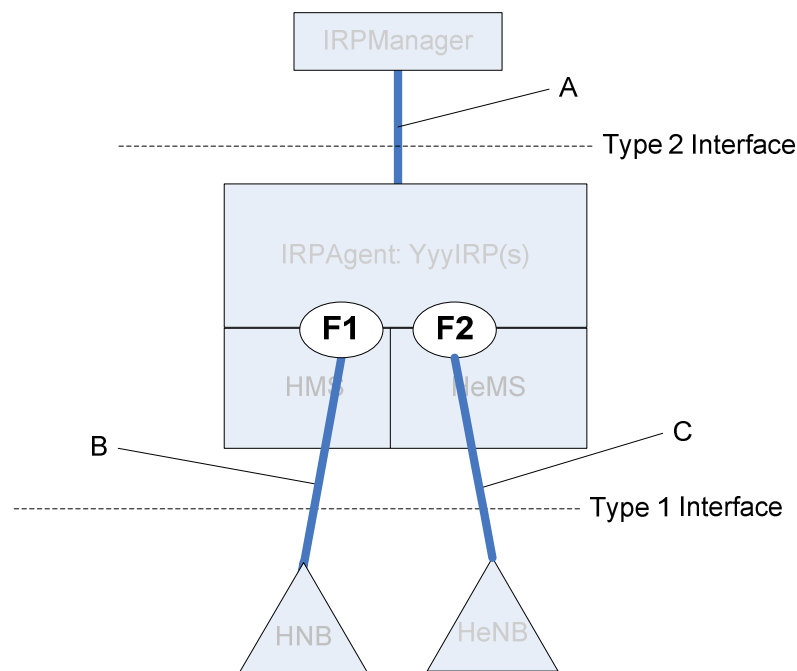

**Figure 2: Mapping (or Mediation) functions**

The F1 is the mapping (or mediation) function for network management data exchanged via Type 2 interface and NM data exchanged via Type 1 interface with HNB.

The F2 is the mapping (or mediation) function for network management data exchanged via Type 2 interface and NM data exchanged via Type 1 interface with HeNB.



---

## 5 Business Level Requirements

### 5.1 Requirements

[REQ-HBT2-FUN-1] The IRPAgent shall have the capability allowing IRPManager to manage HNB and HeNB using existing Interface IRPs.

[REQ-HBT2-FUN-2] The IRPAgent should have the capability to provide a single point of access allowing IRPManager to manage HNBs, HeNBs and other types of managed entity such as macro eNBs. For example, the IRPAgent could have a single AlarmIRP that holds active alarms from HNBs and HeNBs as well as active alarms from other managed entities such as macro eNBs, etc.

[REQ-HBT2-FUN-3] Operator shall be able to manage the following deployment scenarios in the most efficient manner:

1. Deployment of HNBs only;
2. Deployment of HeNBs only;
3. Mixed deployment of the two scenarios above.

[REQ-HBT2-FUN-4] In order to provide efficient management of mixed HNB/HeNB device deployment scenarios, management over Type-2 interface should be as integrated as possible.

[REQ-HBT2-FUN-5] For mixed deployment scenarios with a single IRPAgent, the IRPAgent shall provide a capability allowing IRPManager to issue a single network management request to manage HNB(s) and HeNB(s).

### 5.2 Actor roles

IRPManager plays the Actor role.

### 5.3 Telecommunications resources

OAM network.

### 5.4 High-level use cases

There is no high-level use case defined.

---

## 6 Specification level requirements

### 6.1 Requirements

#### 6.1.1 Configuration management

[REQ- HBT2-FUN-100] The IRPAgent shall support a capability allowing IRPManager to create and manage profiles of HNB and HeNB configuration parameters; in order to allow HNB and HeNB to complete the registration procedure when turned on (see Registration procedure in TS 32.583 [8]).

[REQ- HBT2-FUN-101] The IRPAgent shall support a capability allowing IRPManager to install software on a large number of HNB and HeNB.

#### 6.1.2 Fault management

[REQ- HBT2-FUN-200] The IRPAgent shall support a capability allowing IRPManager to use existing network management services provided by AlarmIRP to manage alarms categorized as “Expedited handling” (see REQ-OAMP\_FM-FUN-005 of [4]) or categorized as “Queued handling” (see REQ-OAMP\_FM-FUN-005 of [4]).

## Annex A (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
Dec 2009	SA#46	SP-090731	--	--	Presentation to SA for information.	---	1.0.0
Mar 2010	SA#47	SP-100055	--	--	Presentation to SA for approval	1.0.0	2.0.0
Mar 2010	--	--	--	--	Publication of SA approved version	2.0.0	9.0.0
2011-03	-	-	-	-	Update to Rel-10 version (MCC)	9.0.0	10.0.0
2012-09	-	-	-	-	Update to Rel-11 version (MCC)	10.0.0	<b>11.0.0</b>
2014-10	-	-	-	-	Update to Rel-12 version (MCC)	11.0.0	<b>12.0.0</b>
2016-01	-	-	-	-	Update to Rel-13 version (MCC)	12.0.0	<b>13.0.0</b>

Change history							
Date	Meeting	Tdoc	CR	Rev	Cat	Subject/Comment	New version
2016-12						Correction of LTE logo (MCC)	13.0.1
2017-04	SA#75	-	-	-	-	Promotion to Release 14 without technical change	<b>14.0.0</b>
2018-06	-	-	-	-	-	Update to Rel-15 version (MCC)	<b>15.0.0</b>
2020-07	-	-	-	-	-	Update to Rel-16 version (MCC)	<b>16.0.0</b>
2022-04	-	-	-	-	-	Update to Rel-17 version (MCC)	<b>17.0.0</b>

---

# History

<b>Document history</b>		
V17.0.0	April 2022	Publication