



**LTE;
Mission Critical (MC) services over LTE;
Part 1: Common test environment
(3GPP TS 36.579-1 version 13.2.0 Release 13)**



Reference

RTS/TSGR-0536579-1vd20

Keywords

LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

| | |
|---|----|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Modal verbs terminology..... | 2 |
| Foreword..... | 7 |
| 1 Scope | 8 |
| 2 References | 8 |
| 3 Definitions, symbols and abbreviations | 11 |
| 3.1 Definitions | 11 |
| 3.2 Symbols..... | 12 |
| 3.3 Abbreviations | 12 |
| 4 General | 13 |
| 4.1 MCPTT Conformance testing test points overview | 13 |
| 4.2 MCPTT Conformance testing test environment overview | 14 |
| 4.3 MCPTT Conformance testing players and roles assumptions | 16 |
| 5 Common Test Environment | 17 |
| 5.1 General | 17 |
| 5.2 Reference test conditions..... | 17 |
| 5.2.1 General..... | 17 |
| 5.2.2 On-network | 17 |
| 5.2.3 Off-network | 17 |
| 5.3 Generic test procedures for UE MCPTT operation | 18 |
| 5.3.1 General..... | 18 |
| 5.3.2 Generic Test Procedure for MCPTT Authorization/Configuration and Key Generation | 18 |
| 5.3.2.1 Initial conditions | 18 |
| 5.3.2.2 Definition of system information messages | 18 |
| 5.3.2.3 Procedure | 19 |
| 5.3.2.4 Specific message contents..... | 22 |
| 5.3.3 Generic Test Procedure for MCPTT pre-established session establishment CO | 25 |
| 5.3.3.1 Initial conditions | 25 |
| 5.3.3.2 Definition of system information messages | 25 |
| 5.3.3.3 Procedure | 26 |
| 5.3.3.4 Specific message contents..... | 26 |
| 5.4 Generic test procedures for UE operation over EUTRA/EPS | 26 |
| 5.4.1 General..... | 26 |
| 5.4.1A UE APN/PDN support assumptions | 26 |
| 5.4.2 Generic Test Procedure for MCPTT UE registration | 27 |
| 5.4.3 Generic Test Procedure for MCPTT CO communication in E-UTRA | 31 |
| 5.4.4 Generic Test Procedure for MCPTT CT communication in E-UTRA | 33 |
| 5.4.5 Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment | 35 |
| 5.4.6 Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment | 37 |
| 5.4.7 Generic Test Procedure for MCPTT communication over ProSe direct one-to-one communication out of E-UTRA coverage - release by the SS | 40 |
| 5.4.8 Generic Test Procedure for MCPTT communication over ProSe direct one-to-one communication out of E-UTRA coverage - release by the UE..... | 41 |
| 5.4.9 Generic Test Procedure for MCPTT communication in E-UTRA / Change of cells..... | 42 |
| 5.4.10 Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-many communication out of E-UTRA coverage / Announcing/Discoveree procedure for group member discovery..... | 43 |
| 5.4.11 Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-many communication out of E-UTRA coverage / Monitoring/Discoverer procedure for group member discovery / One-to-many communication..... | 47 |
| 5.4.12 Generic Test Procedure for MCPTT communication over MBMS | 49 |

| | | |
|--------------|--|-----|
| 5.5 | Default message and other information elements content | 50 |
| 5.5.1 | General | 50 |
| 5.5.2 | Default SIP message and other information elements | 51 |
| 5.5.2.1 | SIP ACK | 51 |
| 5.5.2.1.1 | SIP ACK from the UE | 51 |
| 5.5.2.1.2 | SIP ACK from the SS | 52 |
| 5.5.2.2 | SIP BYE | 53 |
| 5.5.2.2.1 | SIP BYE from the UE | 53 |
| 5.5.2.2.2 | SIP BYE from the SS | 54 |
| 5.5.2.3 | SIP CANCEL | 55 |
| 5.5.2.4 | SIP INFO | 56 |
| 5.5.2.5 | SIP INVITE | 57 |
| 5.5.2.5.1 | SIP INVITE from the UE | 57 |
| 5.5.2.5.2 | SIP INVITE from the SS | 60 |
| 5.5.2.6 | SIP re-INVITE | 63 |
| 5.5.2.6.1 | SIP re-INVITE from the UE | 63 |
| 5.5.2.6.1 | SIP re-INVITE from the SS | 63 |
| 5.5.2.7 | SIP MESSAGE | 64 |
| 5.5.2.7.1 | SIP MESSAGE from the UE | 64 |
| 5.5.2.7.2 | SIP MESSAGE from the SS | 65 |
| 5.5.2.8 | SIP NOTIFY | 67 |
| 5.5.2.9 | SIP OPTIONS | 69 |
| 5.5.2.10 | SIP PRACK | 71 |
| 5.5.2.10.1 | SIP PRACK from the UE | 71 |
| 5.5.2.10.2 | SIP PRACK from the SS | 72 |
| 5.5.2.11 | SIP PUBLISH | 73 |
| 5.5.2.12 | SIP REFER | 76 |
| 5.5.2.13 | SIP REGISTER | 80 |
| 5.5.2.14 | SIP SUBSCRIBE | 83 |
| 5.5.2.15 | SIP UPDATE | 86 |
| 5.5.2.15.1 | SIP UPDATE from the UE | 86 |
| 5.5.2.15.2 | SIP UPDATE from the SS | 89 |
| 5.5.2.16 | SIP 1xx | 90 |
| 5.5.2.16.1 | SIP 100 (Trying) | 90 |
| 5.5.2.16.2 | SIP 180 (Ringing) | 91 |
| 5.5.2.16.2.1 | SIP 180 (Ringing) from the UE | 91 |
| 5.5.2.16.2.2 | SIP 180 (Ringing) from the SS | 93 |
| 5.5.2.16.3 | SIP 183 (Session Progress) | 94 |
| 5.5.2.16.3.1 | SIP 183 (Session Progress) from the UE | 94 |
| 5.5.2.16.3.2 | SIP 183 (Session Progress) from the SS | 97 |
| 5.5.2.17 | SIP 2xx | 99 |
| 5.5.2.17.1 | SIP 200 (OK) | 99 |
| 5.5.2.17.1.1 | SIP 200 (OK) from the UE | 99 |
| 5.5.2.17.1.2 | SIP 200 (OK) from the SS | 102 |
| 5.5.2.18 | SIP 3xx | 104 |
| 5.5.2.18.1 | SIP 302 (Moved Temporarily) | 104 |
| 5.5.2.19 | SIP 4xx | 104 |
| 5.5.2.19.1 | SIP 403 (Forbidden) | 104 |
| 5.5.2.19.2 | SIP 404 (Not Found) | 104 |
| 5.5.2.19.3 | SIP 423 (Interval Too Brief) | 105 |
| 5.5.2.19.4 | SIP 480 (Temporarily unavailable) | 105 |
| 5.5.2.19.5 | SIP 486 (Busy Here) | 106 |
| 5.5.2.19.6 | SIP 488 (Not Acceptable Here) | 106 |
| 5.5.2.19.6 | SIP 401 (Unauthorized) | 107 |
| 5.5.2.20 | SIP 5xx | 108 |
| 5.5.2.20.1 | SIP 500 (Server Internal Error) | 108 |
| 5.5.2.21 | SIP 6xx | 108 |
| 5.5.2.21.1 | SIP 606 (Not Acceptable) | 108 |
| 5.5.3 | Default SDP message and other information elements | 109 |
| 5.5.3.1 | SDP Message | 109 |
| 5.5.3.1.1 | SDP Message from the UE | 109 |
| 5.5.3.1.2 | SDP Message from the SS | 113 |

| | | |
|------------|---|-----|
| 5.5.3.1.3 | SDP Message from the UE - Off-network..... | 116 |
| 5.5.3.1.4 | SDP Message from the SS - Off-network..... | 119 |
| 5.5.3.2 | MCPTT-Info | 122 |
| 5.5.3.2.1 | MCPTT-Info from the UE..... | 122 |
| 5.5.3.2.2 | MCPTT-Info from the SS | 125 |
| 5.5.3.3 | Resource-lists | 126 |
| 5.5.3.3.1 | Resource-lists from the UE..... | 126 |
| 5.5.3.3.2 | Resource-lists from the SS | 126 |
| 5.5.3.4 | Location-info..... | 127 |
| 5.5.3.4.1 | Location-info (Report from the UE)..... | 127 |
| 5.5.3.4.2 | Location-info (Configuration sent by the SS)..... | 130 |
| 5.5.3.4.3 | Location-info (Request sent by the SS)..... | 132 |
| 5.5.3.5 | PIDF..... | 132 |
| 5.5.3.6 | SIMPLE-FILTER..... | 133 |
| 5.5.3.7 | MCPTT-AFFILIATION-COMMAND..... | 133 |
| 5.5.4 | Default HTTP message and other information elements | 133 |
| 5.5.4.1 | General | 133 |
| 5.5.4.2 | GET..... | 134 |
| 5.5.4.3 | POST..... | 135 |
| 5.5.4.4 | PUT | 136 |
| 5.5.4.5 | DELETE | 137 |
| 5.5.4.6 | HTTP 200 (OK) | 138 |
| 5.5.4.7 | HTTP 201 (Created)..... | 139 |
| 5.5.4.8 | HTTP 302 (Found)..... | 139 |
| 5.5.4.9 | HTTP 409 (Conflict)..... | 139 |
| 5.5.4.10 | HTTP Message Bodies..... | 140 |
| 5.5.4.10.1 | Authentication Request | 140 |
| 5.5.4.10.2 | Authentication Response | 140 |
| 5.5.4.10.3 | Token Request | 141 |
| 5.5.4.10.4 | Token Response..... | 142 |
| 5.5.4.10.5 | KMS Initialize | 143 |
| 5.5.4.10.6 | KMS Certificate..... | 144 |
| 5.5.4.10.7 | KMS KeyProvision | 145 |
| 5.5.4.10.8 | KMS Key Set..... | 146 |
| 5.5.5 | Default MCPTT call control Off-network messages and other information elements..... | 148 |
| 5.5.5.1 | GROUP CALL PROBE..... | 148 |
| 5.5.5.2 | GROUP CALL ANNOUNCEMENT | 149 |
| 5.5.5.2.1 | GROUP CALL ANNOUNCEMENT from the UE..... | 149 |
| 5.5.5.2.2 | GROUP CALL ANNOUNCEMENT from the SS..... | 150 |
| 5.5.5.3 | GROUP CALL ACCEPT | 151 |
| 5.5.5.3.1 | GROUP CALL ACCEPT from the UE | 151 |
| 5.5.5.3.2 | GROUP CALL ACCEPT from the SS..... | 151 |
| 5.5.5.4 | GROUP CALL EMERGENCY END..... | 151 |
| 5.5.5.4.1 | GROUP CALL EMERGENCY END from the UE | 151 |
| 5.5.5.4.2 | GROUP CALL EMERGENCY END from the SS | 152 |
| 5.5.5.5 | GROUP CALL IMMINENT PERIL END | 152 |
| 5.5.5.5.1 | GROUP CALL IMMINENT PERIL END from the UE..... | 152 |
| 5.5.5.5.2 | GROUP CALL IMMINENT PERIL END from the SS..... | 153 |
| 5.5.5.6 | GROUP CALL BROADCAST..... | 153 |
| 5.5.5.6.1 | GROUP CALL BROADCAST from the UE | 153 |
| 5.5.5.6.2 | GROUP CALL BROADCAST from the SS | 154 |
| 5.5.5.7 | GROUP CALL BROADCAST END | 154 |
| 5.5.5.7.1 | GROUP CALL BROADCAST END from the UE | 154 |
| 5.5.5.7.2 | GROUP CALL BROADCAST END from the SS | 154 |
| 5.5.5.8 | PRIVATE CALL SETUP REQUEST | 155 |
| 5.5.5.8.1 | PRIVATE CALL SETUP REQUEST from the UE..... | 155 |
| 5.5.5.8.2 | PRIVATE CALL SETUP REQUEST from the SS..... | 155 |
| 5.5.5.9 | PRIVATE CALL RINGING..... | 155 |
| 5.5.5.10 | PRIVATE CALL ACCEPT | 156 |
| 5.5.5.11 | PRIVATE CALL REJECT | 156 |
| 5.5.5.11.1 | PRIVATE CALL REJECT from the UE..... | 156 |
| 5.5.5.11.2 | PRIVATE CALL REJECT from the SS..... | 156 |

| | | |
|-------------------------------|---|------------|
| 5.5.5.12 | PRIVATE CALL RELEASE | 157 |
| 5.5.5.13 | PRIVATE CALL RELEASE ACK..... | 157 |
| 5.5.5.14 | PRIVATE CALL ACCEPT ACK..... | 157 |
| 5.5.5.15 | PRIVATE CALL EMERGENCY CANCEL..... | 158 |
| 5.5.5.15.1 | PRIVATE CALL EMERGENCY CANCEL from the UE | 158 |
| 5.5.5.15.2 | PRIVATE CALL EMERGENCY CANCEL from the SS | 158 |
| 5.5.5.16 | PRIVATE CALL EMERGENCY CANCEL ACK | 158 |
| 5.5.5.16.1 | PRIVATE CALL EMERGENCY CANCEL ACK from the UE..... | 158 |
| 5.5.5.16.2 | PRIVATE CALL EMERGENCY CANCEL ACK from the SS | 158 |
| 5.5.5.17 | GROUP EMERGENCY ALERT..... | 159 |
| 5.5.5.17.1 | GROUP EMERGENCY ALERT from the UE | 159 |
| 5.5.5.17.2 | GROUP EMERGENCY ALERT from the SS | 159 |
| 5.5.5.18 | GROUP EMERGENCY ALERT ACK | 159 |
| 5.5.5.18.1 | GROUP EMERGENCY ALERT ACK from the UE..... | 159 |
| 5.5.5.18.2 | GROUP EMERGENCY ALERT ACK from the SS | 159 |
| 5.5.5.19 | GROUP EMERGENCY ALERT CANCEL..... | 159 |
| 5.5.5.19.1 | GROUP EMERGENCY ALERT CANCEL from the UE | 159 |
| 5.5.5.19.2 | GROUP EMERGENCY ALERT CANCEL from the SS | 160 |
| 5.5.5.20 | GROUP EMERGENCY ALERT CANCEL ACK | 160 |
| 5.5.5.20.1 | GROUP EMERGENCY ALERT CANCEL ACK from the UE..... | 160 |
| 5.5.5.20.2 | GROUP EMERGENCY ALERT CANCEL ACK from the SS | 160 |
| 5.5.6 | Default MCPTT media plane control messages and other information elements..... | 160 |
| 5.5.6.1 | General | 160 |
| 5.5.6.2 | Floor Request | 161 |
| 5.5.6.3 | Floor Granted | 163 |
| 5.5.6.4 | Floor Deny | 164 |
| 5.5.6.5 | Floor Release..... | 165 |
| 5.5.6.6 | Floor Idle..... | 166 |
| 5.5.6.7 | Floor Taken..... | 167 |
| 5.5.6.8 | Floor Revoke..... | 169 |
| 5.5.6.9 | Floor Queue Position Request..... | 170 |
| 5.5.6.10 | Floor Queue Position Info | 171 |
| 5.5.6.11 | Floor Ack | 172 |
| 5.5.6.12 | Connect | 173 |
| 5.5.6.13 | Disconnect..... | 174 |
| 5.5.6.14 | Acknowledgement..... | 174 |
| 5.5.6.15 | Map Group To Bearer | 175 |
| 5.5.6.16 | Unmap Group To Bearer..... | 177 |
| 5.5.7 | Default MCPTT group management messages and other information elements..... | 178 |
| 5.5.7.1 | MCPTT Group Configuration..... | 178 |
| 5.5.8 | Default MCPTT configuration management messages and other information elements..... | 184 |
| 5.5.8.1 | MCPTT Initial UE Configuration | 184 |
| 5.5.8.2 | MCPTT UE Configuration..... | 191 |
| 5.5.8.3 | MCPTT User Profile | 192 |
| 5.5.8.4 | MCPTT Service Configuration | 199 |
| 5.5.9 | Default miscellaneous messages and other information elements | 202 |
| 5.5.9.1 | MIKEY-SAKKE I_MESSAGE | 202 |
| 5.5.10 | Common MCPTT test USIM parameters | 215 |
| 5.5.10.1 | General | 215 |
| 5.5.10.2 | Default settings for the Elementary Files (EFs) | 215 |
| 5.6 | Reference configurations..... | 216 |
| 5.6.1 | General..... | 216 |
| 5.6.2 | Key material for provisioning of End-to-end communication security | 216 |
| 5.6.3 | XML schema for MCPTT location information | 217 |
| Annex A (informative): | Change history | 223 |
| History | | 225 |

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

The present document is part 1 of a multi-part deliverable covering conformance test specification for Mission Critical Services over LTE consisting of:

3GPP TS 36.579-1: "Mission Critical (MC) services over LTE; Part 1: Common test environment" (the present document)

3GPP TS 36.579-2 [2]: "Mission Critical (MC) services over LTE; Part 2: Mission Critical Push To Talk (MCPTT) User Equipment (UE) Protocol conformance specification"

3GPP TS 36.579-3 [3]: " Mission Critical (MC) services over LTE; Part 3: Mission Critical Push To Talk (MCPTT) Server Application test specification"

3GPP TS 36.579-4 [4]: " Mission Critical (MC) services over LTE; Part 4: Test Applicability and Implementation Conformance Statement (ICS)"

3GPP TS 36.579-5 [5]: " Mission Critical (MC) services over LTE; Part 5: Abstract test suite (ATS)"

In the present release of the specification only Mission Critical Push To Talk (MCPTT) Services are considered. Future releases may include other Mission Critical Services.

1 Scope

The present document defines the common test environment required for testing Client and Server implementations for compliance to the Mission Critical Services over LTE protocol requirements defined by 3GPP.

It contains definitions of reference conditions and test signals, default messages and other parameters, generic procedures, and, common requirements for test equipment with the goal for facilitating testing in general and test procedures specification in particular. Various parts of its content are referred to from other parts of the Mission Critical Services over LTE protocol conformance testing specification e.g. TS 36.579-2 [2] and TS 36.579-3 [3].

The present document does not define the common test environment required for testing the implementation of the underlying LTE protocols, i.e. the LTE bearers used for transport of the Mission Critical Services signalling and media. This is defined in TS 36.508 [6] and referred to from the present document whenever needed.

In regard to default messages or other information elements contents, the present document refers to content defined in requirements specifications specified by 3GPP or other organisations. In the case of Session Initiation Protocol (SIP) and Session Description Protocol (SDP) information elements the present document refers to those specified in TS 34.229-1 [21] and explicitly specifies only those relevant for the purposes of the Mission Critical Services over LTE protocol conformance testing.

In the present release of the specification only Mission Critical Push To Talk (MCPTT) Services are considered. Future releases may include other Mission Critical Services.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 36.579-2: "Mission Critical (MC) services over LTE; Part 2: Mission Critical Push To Talk (MCPTT) User Equipment (UE) Protocol conformance specification".
- [3] 3GPP TS 36.579-3: "Mission Critical (MC) services over LTE; Part 3: Mission Critical Push To Talk (MCPTT) Server Application test specification".
- [4] 3GPP TS 36.579-4: "Mission Critical (MC) services over LTE; Part 4: Test Applicability and Implementation Conformance Statement (ICS)".
- [5] 3GPP TS 36.579-5: "Mission Critical (MC) services over LTE; Part 5: Abstract test suite (ATS)".
- [6] 3GPP TS 36.508: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Packet Core (EPC); Common Test Environments for User Equipment (UE) Conformance Testing".
- [7] 3GPP TS 22.179: "Mission Critical Push To Talk (MCPTT) over LTE; Stage 1".
- [8] 3GPP TS 23.179: "Functional architecture and information flows to support mission critical communication services; Stage 2".
- [9] 3GPP TS 24.379: "Mission Critical Push To Talk (MCPTT) call control; Protocol specification".
- [10] 3GPP TS 24.380: "Mission Critical Push To Talk (MCPTT) floor control; Protocol specification".
- [11] 3GPP TS 24.481: "Mission Critical Services (MCS) group management; Protocol specification".

- [12] 3GPP TS 24.482: "Mission Critical Services (MCS) identity management; Protocol specification".
- [13] 3GPP TS 24.483: "Mission Critical Services (MCS) Management Object (MO)".
- [14] 3GPP TS 24.484: "Mission Critical Services (MCS) configuration management; Protocol specification".
- [15] 3GPP TS 33.179: "Security of Mission Critical Push-To-Talk (MCPTT) over LTE".
- [16] 3GPP TS 24.229: "IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3".
- [17] Void
- [18] Void
- [19] Void
- [20] Void
- [21] 3GPP TS 34.229-1: "Internet Protocol (IP) multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); User Equipment (UE) conformance specification; Part 1: Protocol conformance specification".
- [22] IETF RFC 3261 (June 2002): "SIP: Session Initiation Protocol".
- [23] IETF RFC 6509 (February 2012): "MIKEY-SAKKE: Sakai-Kasahara Key Encryption in Multimedia Internet KEYing (MIKEY)".
- [24] IETF RFC 3830: "MIKEY: Multimedia Internet KEYing".
- [25] IETF RFC 6043: "MIKEY-TICKET: Ticket-Based Modes of Key Distribution in Multimedia Internet KEYing (MIKEY)".
- [26] IETF RFC 2616: "Hypertext Transfer Protocol -- HTTP/1.1".
- [27] IETF RFC 4566 (July 2006): "SDP: Session Description Protocol".
- [28] Void
- [29] IETF RFC 3841 (August 2004): "Caller Preferences for the Session Initiation Protocol (SIP)".
- [30] IETF RFC 4028 (April 2005): "Session Timers in the Session Initiation Protocol (SIP)".
- [31] IETF RFC 6050 (November 2010): "A Session Initiation Protocol (SIP) Extension for the Identification of Services".
- [32] IETF RFC 3325 (November 2002): "Private Extensions to the Session Initiation Protocol (SIP) for Asserted Identity within Trusted Networks".
- [33] IETF RFC 3840 (August 2004): "Indicating User Agent Capabilities in the Session Initiation Protocol (SIP)".
- [34] IETF RFC 5373 (November 2008): "Requesting Answering Modes for the Session Initiation Protocol (SIP)".
- [35] IETF RFC 5366 (October 2008): "Conference Establishment Using Request-Contained Lists in the Session Initiation Protocol (SIP)".
- [36] IETF RFC 4488 (May 2006): "Suppression of Session Initiation Protocol (SIP) REFER Method Implicit Subscription".
- [37] IETF RFC 4538 (June 2006): "Request Authorization through Dialog Identification in the Session Initiation Protocol (SIP)".
- [38] IETF RFC 3515 (April 2003): "The Session Initiation Protocol (SIP) Refer Method".

- [39] IETF RFC 6665 (July 2012): "SIP-Specific Event Notification".
- [40] IETF RFC 4412 (February 2006): "Communications Resource Priority for the Session Initiation Protocol (SIP)".
- [41] Void
- [42] Void
- [43] IETF RFC 3903 (October 2004): "Session Initiation Protocol (SIP) Extension for Event State Publication".
- [44] IETF RFC 4567 (July 2006): "Key Management Extensions for Session Description Protocol (SDP) and Real Time Streaming Protocol (RTSP)".
- [45] IETF RFC 8101 "IANA Registration of New Session Initiation Protocol (SIP) Resource-Priority Namespace for Mission Critical Push To Talk service".
- [46] Void
- [47] Void
- [48] IETF RFC 4661 (September 2006): "An Extensible Markup Language (XML)-Based Format for Event Notification Filtering".
- [49] Void
- [50] IETF RFC 3329 (January 2003): "Security Mechanism Agreement for the Session Initiation Protocol (SIP)".
- [51] IETF RFC 7913 (June 2016): "P-Access-Network-Info ABNF Update".
- [52] IETF RFC 7315 (July 2014): "Private Header (P-Header) Extensions to the Session Initiation Protocol (SIP) for the 3GPP".
- [53] IETF RFC 3329: "TBD".
- [54] IETF RFC 5031 (January 2008): "A Uniform Resource Name (URN) for Emergency and Other Well-Known Services".
- [55] IETF RFC 3581 (August 2003): "An Extension to the Session Initiation Protocol (SIP) for Symmetric Response Routing".
- [56] IETF RFC 3312 (October 2002): "Integration of resource management and Session Initiation Protocol (SIP)".
- [57] IETF RFC 7134: "The Management Policy of the Resource Priority Header (RPH) Registry Changed to "IETF Review"".
- [58] IETF RFC 5621 (September 2009): "Message Body Handling in the Session Initiation Protocol (SIP)".
- [59] IETF RFC 4867: "RTP Payload Format and File Storage Format for the Adaptive Multi-Rate (AMR) and Adaptive Multi-Rate Wideband (AMR-WB) Audio Codecs".
- [60] IETF RFC 5009 (September 2007): "Private Header (P-Header) Extension to the Session Initiation Protocol (SIP) for Authorization of Early Media".
- [61] IETF RFC 3842 (August 2004) "A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP)".
- [62] IETF RFC 6442 (December 2011): "Location Conveyance for the Session Initiation Protocol".
- [63] IETF RFC 6335: "Internet Assigned Numbers Authority (IANA) Procedures for the Management of the Service Name and Transport Protocol Port Number Registry".

- [64] 3GPP TS 26.114: "IP Multimedia Subsystem (IMS); Multimedia telephony; Media handling and interaction".
- [65] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [66] 3GPP TS 26.171: "Speech codec speech processing functions; Adaptive Multi-Rate - Wideband (AMR-WB) speech codec; General description".
- [67] 3GPP TS 33.303: "Proximity-based Services (ProSe); Security aspects".
- [68] 3GPP TS 23.303: "Proximity-based services (ProSe); Stage 2".
- [69] 3GPP TS 23.003: "Numbering, addressing and identification".
- [70] 3GPP TS 33.310: "Network Domain Security (NDS); Authentication Framework (AF)".
- [71] Void
- [72] IETF RFC 2617: "HTTP Authentication: Basic and Digest Access Authentication".
- [73] 3GPP TS 31.102: "Characteristics of the Universal Subscriber Identity Module (USIM) application".
- [74] 3GPP TS 36.523-3: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Packet Core (EPC); User Equipment (UE) conformance specification; Part 3: Abstract Test Suites (ATS)".
- [75] 3GPP TS 36.523-2: "User Equipment (UE) conformance specification; Part 2: Implementation Conformance Statement (ICS) proforma specification".
- [76] IETF RFC 3550: "TBD".
- [77] IETF RFC 6749: "TBD".
- [78] 3GPP TS 24.334: "Proximity-services (ProSe) User Equipment (UE) to ProSe function protocol aspects; Stage 3".
- [79] 3GPP TS 31.101: "UICC-terminal interface; Physical and logical characteristics".
- [80] 3GPP TS 31.103: "Characteristics of the IP Multimedia Services Identity Module (ISIM) application".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

For the purpose of the present document, the following terms and definitions given in 3GPP TS 24.379 [9] apply:

An MCPTT user is affiliated to an MCPTT group

An MCPTT user is affiliated to an MCPTT group at an MCPTT client

Affiliation status

Group identity

In-progress emergency private call state

In-progress imminent peril group state

MCPTT client ID

MCPTT emergency alert state

MCPTT emergency group state

MCPTT emergency group call state

MCPTT emergency private call state

MCPTT emergency private priority state

MCPTT imminent peril group call state
MCPTT imminent peril group state
MCPTT private emergency alert state
MCPTT speech
Media-floor control entity
Temporary MCPTT group identity
Trusted mutual aid
Untrusted mutual aid

For the purposes of the present document, the following terms and definitions given in 3GPP TS 22.179 [7] apply:

In-progress emergency
MCPTT emergency alert
MCPTT emergency group call
MCPTT emergency state
Partner MCPTT system
Primary MCPTT system

For the purpose of the present document, the following terms and definitions given in 3GPP TS 24.380 [10] apply:

MBMS subchannel

For the purpose of the present document, the following terms and definitions given in 3GPP TS 23.179 [8] apply:

Pre-selected MCPTT user profile

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

| | |
|----------------|---|
| ECGI | E-UTRAN Cell Global Identification |
| FFS | For Further Study |
| ICS | Implementation Conformance Statement |
| IPEG | In-Progress Emergency Group |
| IPEPC | In-Progress Emergency Private Call |
| IPIG | In-Progress Imminent peril Group |
| IUT | Implementation Under Test |
| IXIT | Implementation eXtra Information for Testing |
| MBMS | Multimedia Broadcast and Multicast Service |
| MBSFN | Multimedia Broadcast multicast service Single Frequency Network |
| MCPTT | Mission Critical Push To Talk |
| MCPTT group ID | MCPTT group IDentity |
| MEA | MCPTT Emergency Alert |
| MEG | MCPTT Emergency Group |
| MEGC | MCPTT Emergency Group Call |
| MEPC | MCPTT Emergency Private Call |
| MEPP | MCPTT Emergency Private Priority |
| MES | MCPTT Emergency State |
| MIME | Multipurpose Internet Mail Extensions |
| MIG | MCPTT Imminent peril Group |
| MIGC | MCPTT Imminent peril Group Call |
| MONP | MCPTT Off-Network Protocol |
| MPEA | MCPTT Private Emergency Alert |
| NAT | Network Address Translation |
| QCI | QoS Class Identifier |

| | |
|------|---------------------------------|
| RTP | Real-time Transport Protocol |
| SAI | Service Area Identifier |
| SDP | Session Description Protocol |
| SIP | Session Initiation Protocol |
| SS | System Simulator |
| SSRC | Synchronization SouRCe |
| TGI | Temporary MCPTT Group Identity |
| TMGI | Temporary Mobile Group Identity |
| TP | Transmission Point |
| URI | Uniform Resource Identifier |

4 General

4.1 MCPTT Conformance testing test points overview

Figure 4.1.1 provides a general overview of all MCPTT players which may have a role in different conformance testing scenarios together with virtual test points representing the information flow which is intended for conformance testing. The figure is mainly for descriptive purposes and may not necessarily represent a real MCPTT deployment or implementation.

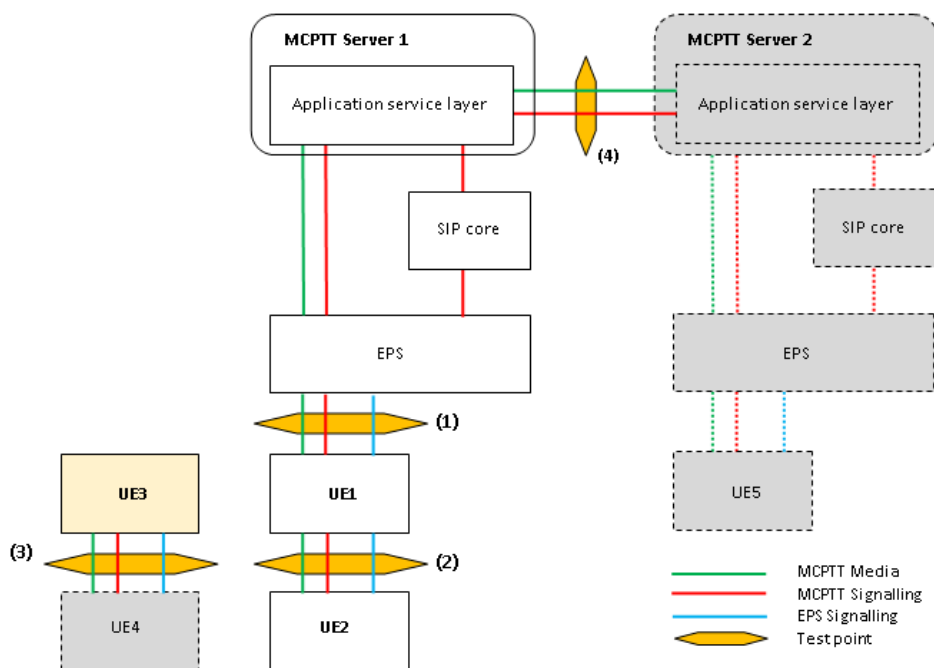


Figure 4.1.1: MCPTT Conformance testing test points model

NOTE 1: Which of the shown entities will be simulated and which will be real implementation depends on the test scenario. In the test scenarios in which they play a part, the entities presented with dashed borders and grey fill will be always simulated whereas, the entities with light yellow fill (UE3) will be Implementation Under Test (IUT). The entities with white fill will be either simulated or IUTs or real implementation (e.g. network) depending on the test scenario.

NOTE 2: While showing the different players, figure 4.1.1 should not be understood as showing test environment implementation.

The test points shown on Figure 4.1.1 cover behaviour/requirements observed at various reference points and communication scenarios:

- MCPTT on-network (whenever relevant, reference points as specified in TS 23.179 [8] Functional model description clause 7.3.1 'On-network functional model' are referred):

- Application plane (MCPTT-1, MCPTT-4, MCPTT-7, MCPTT-8 and MCPTT-9), and, (CSC-1, CSC-2, CSC-4 and CSC-8); Signalling control plane (SIP-1, HTTP-1 and HTTP-2). Test point: (1) or (2). IUT: the UE or the MCPTT Server.
- MCPTT-3 (between different MCPTT Servers), CSC-7 (other group management Servers, normally associated with other MCPTT Servers); Signalling control plane (SIP-2, HTTP-1, HTTP2 and HTTP-3). Test point: (4). IUT: the MCPTT Server.
- MCPTT off-network (TS 23.179 [8], clause 7.3.2 'Off-network functional model'). Test point: (3). IUT: the UE.
- LTE Legacy requirements between UE and EPS and between 2 UEs (covering e.g. Bearer Management at the UE side, ProSe including among others UE-to-network relay, MBMS). Test point: (1), (2) or (3).

Figure 4.1.2 provides a general overview of functions distributions at the MCPTT server side when multiple MCPTT Servers are involved. More functional models can be found in TS 24.379 [9].

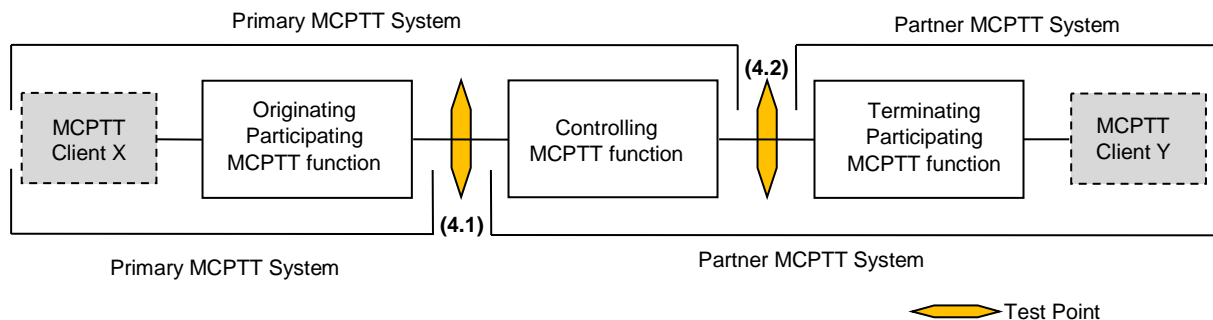


Figure 4.1.2: MCPTT Conformance testing Client-to-Client test points model

NOTE 3: While showing the different players and Server functionality, figure 4.1.2 should not be understood as showing test environment implementation.

The test points shown on Figure 4.1.2 provide an example of how 2 different communication scenarios between 2 MCPTT Servers will result in the communication between the servers being monitored at different test points (4.1) and (4.2). It should be noted that Figure 4.1.2 does not imply the physical existence of 2 test points during MCPTT Server-to-Server testing rather it shows two different information flows which need to be verified for conformance. In practice this will also mean that for testing the MCPTT Server on the Server-to-Server interface (test point 4 on Figure 4.1.1), the System Simulator (SS) will need to implement (i.e. be able to simulate) at least all 3 MCPTT functions.

4.2 MCPTT Conformance testing test environment overview

Based on the test points models shown in subclause 4.1 examples for test environment implementations are provided below. Figures 4.2.1 to 4.2.3 show test configuration where the Implementation Under Test (IUT) and the System Simulator communicate, one with the other, over the LTE radio interface (test points (1), (2) and (3)). Figures 4.2.4 and 4.2.5 show test configuration where the IUT and the System Simulator communicate, one with the other, over the FFS interface (test points (4)).

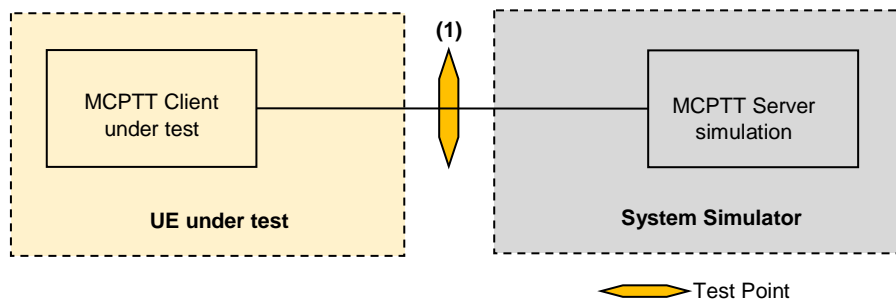


Figure 4.2.1: Testing the MCPTT Client (on-network)

NOTE 1: Figure 4.2.1 covers also the case for testing the UE at interface (1) when the IUT behaves as a Relay. For testing this the existence of another UE playing the role of an UE off-network which uses the Relay to connect to the Server will be needed. This could be implemented by the SS simulating both in similar manner as it is shown on Figure 4.2.2.

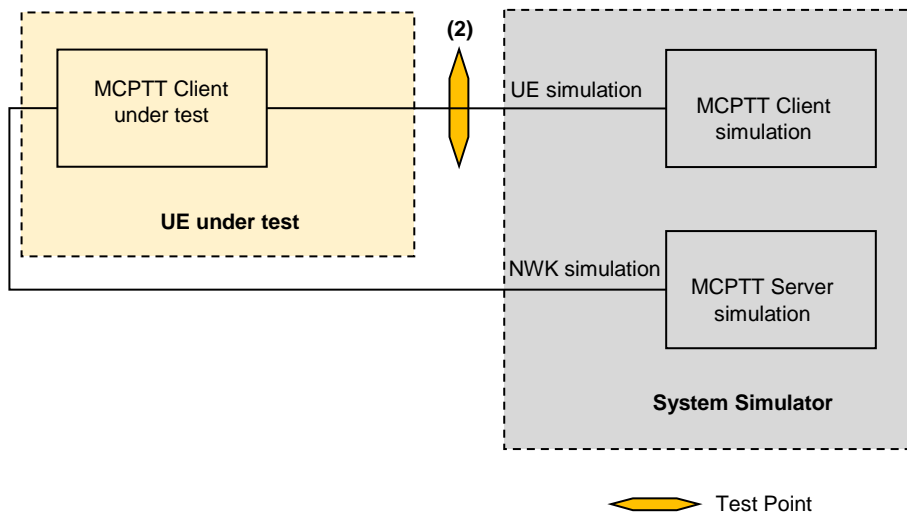


Figure 4.2.2: Testing the MCPTT Client (on-network) Relay side

NOTE 1: Figure 4.2.2 covers the case for testing the UE at interface (2) when the IUT behaves as a Relay. For testing this, the existence of LTE NWK and Server to which the Relay relays the data will be needed. This could be implemented by the SS simulating both.

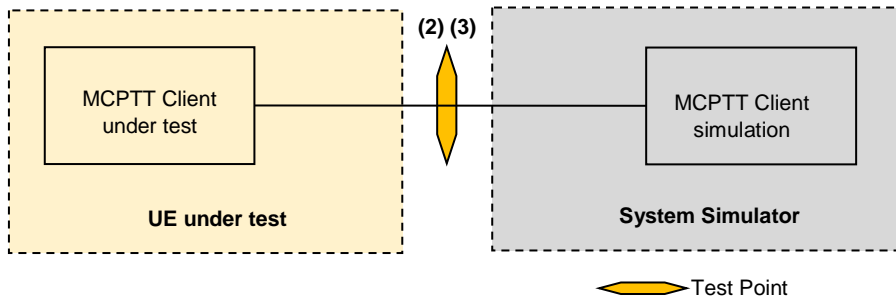


Figure 4.2.3: Testing the MCPTT Client (off-network)

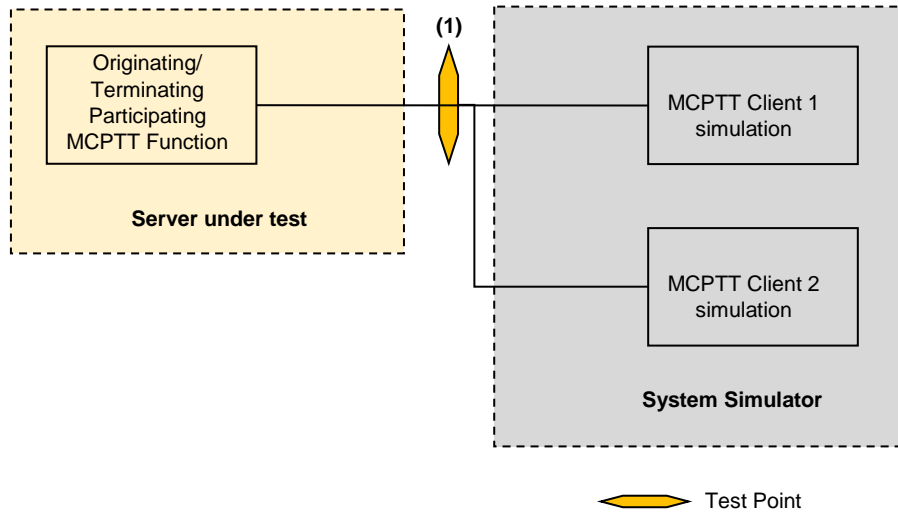


Figure 4.2.4: Testing the MCPTT Server (server-to-client)

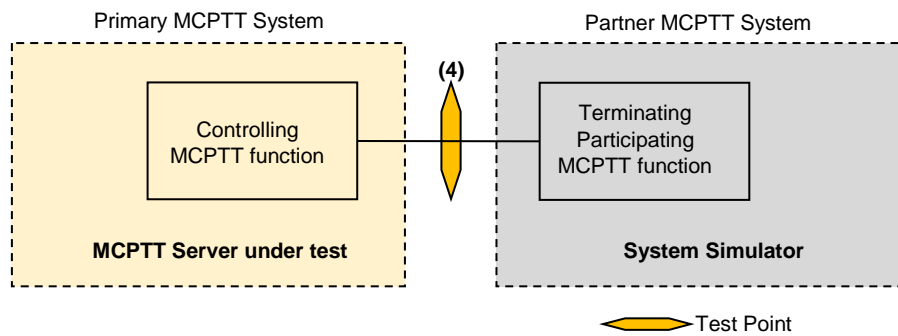


Figure 4.2.5: Testing the MCPTT Server (server-to-server), Controlling function

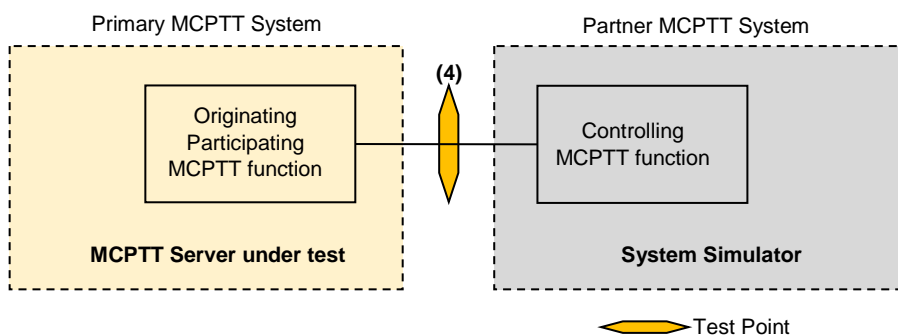


Figure 4.2.6: Testing the MCPTT Server (server-to-server), Originating function

4.3 MCPTT Conformance testing players and roles assumptions

Based on the described in clause 4.2 test environment scenarios a number of players and their roles have been designated to facilitate the test specification and provide a consistent test description.

For the purposes of MCPTT Client testing

1 MCPTT Server:

- Server A simulated by the SS (in the case of on-network operation).

2 MCPTT Clients:

- Client A installed on the implementation under test
- Client B simulated by the System Simulator (SS) either explicitly (in the case of off-network operations), or, implicitly (in the case of on-network operation).

3 MCPTT Users:

- User A registered with Client A and operating on the implementation under test
- User B registered with Client B simulated by the System Simulator (SS) either explicitly (in the case of off-network operations), or, implicitly (in the case of on-network operation); pre-set at User A configuration as User allowed to be called by User A for any types of calls
- User C known to the User A, not involved in any communication, defined for the sole purpose of testing if the User A/Client A can distinguish between different users when choosing one of them for action; pre-set at User A configuration as User allowed to be called by User A for any types of calls.

4 MCPPT groups:

- Group A to which User A is implicitly affiliated, pre-set at User A configuration, and, comprising as members User A, User B and User C, to be available throughout the entire testing.
- Group D to which User A is not implicitly affiliated, pre-set at User A configuration, and, comprising as members User B and User C, to be used for testing group affiliation.
- Groups B and C not pre-set at User A configuration, to be used for testing creation and termination of groups.

For the purposes of MCPTT Server testing

FFS

5 Common Test Environment

5.1 General

Clause 5 provides basic test requirements, and, Generic Procedures and Default messages content to be used by the test cases wherever applicable.

5.2 Reference test conditions

5.2.1 General

Any E-UTRA frequency band can be used to provide the underlying communication bearer to carry the MCPTT communication. The requirements are defined in TS 36.508 [6].

5.2.2 On-network

There are no specific requirements to the UE on which the MCPTT client is installed when operating in on-network environment. The basic E-UTRA/EPC procedures shall be supported.

5.2.3 Off-network

When operating in off-network environment an MCPTT client shall:

- implement the procedures for ProSe direct discovery for public safety use as specified in 3GPP TS 24.334 [78];

- implement the procedures for one-to-one ProSe direct communication for Public Safety use as specified in 3GPP TS 24.334 [78].
- implement the procedures for one-to-many ProSe direct communication for Public Safety use as specified in 3GPP TS 24.334 [78].

5.3 Generic test procedures for UE MCPTT operation

5.3.1 General

The purpose of the procedures specified in the following subclauses is to facilitate test description by providing procedure sequences which can be referred from the relevant TCs specified e.g. in 3GPP TS 36.579-2 [2] or 3GPP TS 36.579-3 [3].

The procedures specified are required to ensure that any MCPTT service can take place or specific MCPTT relevant pre-conditions are met before a test case can be executed.

5.3.2 Generic Test Procedure for MCPTT Authorization/Configuration and Key Generation

5.3.2.1 Initial conditions

System Simulator:

- SS (MCPTT server)
 - For the underlying "transport bearer" over which the SS and the UE will communicate Parameters are set to the default parameters for the basic E-UTRA Single cell network scenarios, as defined in TS 36.508 [6] subclause 4.4. The simulated Cell 1 shall belong to PLMN1 (the PLMN specified for MCPTT operation in the MCPTT configuration document).

Implementation Under Test (IUT):

- UE (MCPTT client)
 - The MCPTT Client has been provisioned with the Initial UE Configuration Data as specified in subclause 5.5.8.1 allowing for the location of the configuration management server for configuration of the MCPTT UE initial configuration management object (MO) and the default MCPTT user profile configuration management object (MO).
 - UE and SS are configured to support one-way authentication based on server certificates (TS 33.179 [15] clause 5.4). For this purpose, self-signed certificates are pre-installed in the UE and SS.
 - The UE User is provided with username/password for user authentication (px_MCPTT_User_A_username, px_MCPTT_User_A_password as provided in TS 36.579-5 [5], Table 9.2-1: MCPTT Client Common PIXIT)
 - The test USIM set as defined in subclause 5.5.10 is inserted.

The MCPTT client is attached to EPS services and then the UE is Switched OFF (state 1) according to TS 36.508 [6].

5.3.2.2 Definition of system information messages

The E-UTRA default system information messages as defined in TS 36.508 [6] are used.

5.3.2.3 Procedure

Table 5.3.2.3-1: MCPTT Authorization/Configuration and Key Generation

| St | Procedure | Message Sequence | |
|-----|---|------------------|---------------------------|
| | | U - S | Message |
| 1 | Power up the UE. | - | - |
| - | EXCEPTION: The E-UTRA/EPC related actions which step 1 above will trigger are described in subclause 5.4.2 'Generic Test Procedure for MCPTT UE registration'. The test sequence below shows only the MCPTT relevant messages being exchanged. | - | - |
| 2 | Make the UE user request MCPTT service authorisation/configuration. NOTE 1 NOTE 1A | - | - |
| - | EXCEPTION: Steps 3a1-3b1 describe behaviour that depends on UE implementation of the OpenID Connect protocol; the "lower case letter" identifies a step sequence that take place when one or the other is the case. | - | - |
| 3a1 | The UE (MCPTT client) establishes a secure TLS tunnel as specified by 3GPP TS 33.310 [70], to the authorisation endpoint of the IdM server as specified in 3GPP TS 33.179 [15] using the configured URL of the authorisation endpoint of the IdM server as specified in the " <code><x>/OnNetwork/AppServerInfo/IDMSAuthEndpoint</code> " leaf node, Table 5.5.8.1-1. | - | - |
| 3a2 | The UE (MCPTT client) sends an OpenID Connect Authentication Request using HTTP GET. | --> | HTTP GET (Authorization) |
| 3b1 | The UE (MCPTT client) sends an OpenID Connect Authentication Request using HTTP POST. | --> | HTTP POST (Authorization) |
| 4 | The SS sends a HTTP 200 (OK) including the HTML form requesting username and password. | <-- | HTTP 200 (OK) |
| 5 | Make the UE user provide user credentials: username and password (px_MCPTT_User_A_username, px_MCPTT_User_A_password). NOTE 2 | - | - |
| 6 | The UE (MCPTT client) sends an HTTP POST Request message to the SS containing user name and password. | --> | HTTP POST |
| 7 | The SS sends a HTTP 302 (Found) as the OpenID Connect Authentication Response containing an authorization code. | <-- | HTTP 302 (Found) |
| - | EXCEPTION: Step 8a1 describes behaviour that depends on step 3 above. Step 8a1 only happens if the UE follows step 3b1, otherwise step 8a1 is skipped. | - | - |
| 8a1 | The UE (MCPTT client) establishes a secure TLS tunnel as specified by 3GPP TS 33.310 [70] to the token endpoint of the IdM server as specified in 3GPP TS 33.179 [15] using the configured URL of the token endpoint of the IdM server as specified in the " <code><x>/OnNetwork/AppServerInfo/IDMSTokenEndpoint</code> " leaf node, Table 5.5.8.1-1. | - | - |
| 9 | The UE (MCPTT client) sends an HTTP POST Request message to the SS over the TLS connection established to the IdM token endpoint (OIDC Token Request message), passing the authorization code obtained in step 7. | --> | HTTP POST |
| 10 | The SS sends a HTTP 200 (OK) providing id_token, access_token and refresh token. | <-- | HTTP 200 (OK) |
| 11 | The UE (MCPTT client) sends a HTTP POST message presenting the access token obtained in step 10 to the SS over HTTP for Key Management Initialisation. NOTE: Step 11 is the start of the second stage which was started in Step 2. Steps 11 through 14 involve Key Management Authorization. The MCPTT Client/Key Management Client presents the access token to the Key Management Server. The end result is the user gets specific key material. | --> | HTTP POST |

| St | Procedure | Message Sequence | |
|------|---|------------------|---------------|
| | | U - S | Message |
| 12 | The SS replies to the UE with identity specific key information. | <-- | HTTP 200 (OK) |
| 13 | The UE (MCPTT client) sends a HTTP POST message presenting an access token to the SS over HTTP for Key Material Request. | --> | HTTP POST |
| 14 | The SS replies to the UE with identity specific key information. | <-- | HTTP 200 (OK) |
| - | EXCEPTION: Steps 15a1-15b1 describe behaviour that depends on UE implementation ; the "lower case letter" identifies a step sequence that take place when one or the other is the case. NOTE: Step 15a1 is the start of the third stage which was started in Step 2. Steps 15a1, 15b1, and 16 involve User Service Authorization. | - | - |
| 15a1 | The UE (MCPTT client) sends a SIP REGISTER request for service authorisation. | --> | SIP REGISTER |
| 15b1 | The UE (MCPTT client) sends a SIP PUBLISH request for service authorisation. | --> | SIP PUBLISH |
| 16 | The SS (MCPTT server) sends SIP 200 (OK). NOTE: The user is now authorized for MCPTT service. | <-- | SIP 200 (OK) |
| 17 | The UE (MCPTT client) sends a SIP SUBSCRIBE - subscription to multiple documents simultaneously - to the SS containing the access token and a resource list mime body containing a list of the following documents: MCPTT UE Configuration document, MCPTT User Profile Configuration Document, and the MCPTT Service configuration document. The base URI of each list entry is set to the CMS XCAP-ROOT-URI. NOTE: Step 17 is the start of the fourth stage which was started in Step 2. Steps 17 through 26 involve Configuration Management Authorization. The end result of the fourth stage is that the MCPTT Client receives 3 configuration documents: UE Configuration Document, User Profile Configuration Document, and the Service Configuration Document. | --> | SIP SUBSCRIBE |
| 18 | The SS sends a SIP 200 (OK) message. | <-- | SIP 200 (OK) |
| 19 | The SS sends a SIP NOTIFY message to the UE that contains the XCAP-URI of the documents. | <-- | SIP NOTIFY |
| 20 | The UE (MCPTT client) sends a SIP 200 (OK) message. | --> | SIP 200 (OK) |
| 21 | The UE (MCPTT client) sends an HTTP GET Request message to the SS that contains the access token and the XCAP-URI of the MCPTT UE Configuration Document. NOTE: The MCPTT Client is requesting the MCPTT UE Configuration Document. | --> | HTTP GET |
| 22 | The SS sends the HTTP 200 (OK) message including the MCPTT UE Configuration Document. | <-- | HTTP 200 (OK) |
| 23 | The UE (MCPTT client) sends an HTTP GET Request message to the SS that contains the access token and the XCAP-URI of the MCPTT User Profile Configuration Document. NOTE: The MCPTT Client is requesting the MCPTT User Profile Configuration Document. | --> | HTTP GET |
| 24 | The SS sends the HTTP 200 (OK) message including the MCPTT User Profile Configuration Document. NOTE: The MCPTT User Profile Configuration Document includes information on MCPTT groups including for which groups the MCPTT Client is a member. The MCPTT User Profile Configuration Document includes Group A as a group for which the MCPTT Client is a member and is implicitly affiliated. Group A is used as the default group for all test cases in TS 36.579-2 and TS 36.579-3. | <-- | HTTP 200 (OK) |

| St | Procedure | Message Sequence | |
|--|---|------------------|---------------|
| | | U - S | Message |
| 25 | The UE (MCPTT client) sends an HTTP GET Request message to the SS that contains the access token and the XCAP-URI of the MCPTT Service Configuration Document. NOTE: The MCPTT Client is requesting the the MCPTT Service Configuration Document. | --> | HTTP GET |
| 26 | The SS sends the HTTP 200 (OK) message including the MCPTT Service Configuration Document. | <-- | HTTP 200 (OK) |
| 27 | The UE (MCPTT client) sends a SIP SUBSCRIBE to the SS, containing the access token and a resource list mime body and a list of the Groups to be obtained. The base URI of each list entry is set to the GMS XCAP-ROOT-URI, and the MCPTT group ID identifies a group document. NOTE: Step 27 is the start of the fifth stage which was started in Step 2. Steps 27 through 32 involve Group Management Authorization. The end result is the MCPTT Client will receive group information for Group A. The MCPTT Client will also get the Group Master Key (GMK) for the group which will be used to derive keys for the group. There will also be a Group User Key Identifier (GUK-ID), and a Group Master Key Identifier (GMK-ID). According TS 33.179 [15], clause 7.36, the GMK shall be used as the MIKEY Traffic Generating Key (TGK) and the GUK-ID shall be used as the MIKEY CSB ID. These shall be used to generate the SRTP Master Key and SRTP Master Salt as specified in IETF RFC 3830 [24]. | --> | SIP SUBSCRIBE |
| 28 | The SS sends a SIP 200 (OK) message. | <-- | SIP 200 (OK) |
| 29 | The SS sends a SIP NOTIFY message to the UE that contains the XCAP-URI of the Group documents. | <-- | SIP NOTIFY |
| 30 | The UE (MCPTT client) sends a SIP 200 (OK) message. | --> | SIP 200 (OK) |
| 31 | The UE (MCPTT client) sends an HTTP GET Request message to the SS that contains the access token and the XCAP-URI of the Group Configuration document. | --> | HTTP GET |
| 32 | The SS sends the HTTP 200 (OK) message including the Group Document 'MCPTT UE Configuration document'. NOTE 3 | <-- | HTTP 200 (OK) |
| - | EXCEPTION: SS releases the E-UTRA connection. | - | - |
| <p>NOTE 1: This is expected to be done via a suitable implementation dependent mechanism and may be manually or automatically initiated.</p> <p>NOTE 1A: This will start a 5 stage process. The first stage involves MCPTT User Authentication and includes Steps 3a1 through 10. The end result of the first stage is the MCPTT Client receives 3 tokens: access token, ID token, and refresh token.</p> <p>NOTE 2: The UE is expected to prompt the MCPTT user for their username and password, or it may be stored on the UE. The provision of the username/password is expected to be done via a suitable implementation dependent MMI.</p> <p>NOTE 3: This completes MCPTT service enabling on the UE.</p> <p>NOTE 4: This is expected to be done via a suitable implementation dependent mechanism and may be manually or automatically initiated.</p> | | | |

5.3.2.4 Specific message contents

Table 5.3.2.4-1: HTTP GET (Step 3a1, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.2-1, condition AUTH

Table 5.3.2.4-2: HTTP POST (Step 3b1, Table 5.1.3.2-1)

Derivation Path: Table 5.5.3.1-1, condition AUTH

Table 5.3.2.4-3: HTTP 200 (OK) (Step 4, Table 5.1.3.2-1)

| Derivation Path: Table 5.5.4.10-1 | | | | |
|-----------------------------------|---|---------|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Message-body | <pre> <!DOCTYPE html> <html> <body> <form action=""> Username: <input type="text" name="user"> Password: <input type="password" name="password"> </form> </body> </html> </pre> | | | |

Table 5.3.2.4-4: HTTP POST (Step 6, Table 5.1.3.2-1)

Derivation Path: Table 5.5.3.1-1, condition USERAUTH

Table 5.3.2.4-5: HTTP 302 (Found) (Step 7, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.8-1, condition AUTH.

Table 5.3.2.4-6: HTTP POST (Step 9, Table 5.1.3.2-1)

Derivation Path: Table 5.5.3.1-1, condition TOKEN

Table 5.3.2.4-7: HTTP 200 (OK) (Step 10, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.10-1, condition TOKEN

Table 5.3.2.4-8: HTTP POST (Step 11, Table 5.1.3.2-1)

Derivation Path: Table 5.5.3.1-1, condition KMSINIT.

Table 5.3.2.4-9: HTTP 200 (OK) (Step 12, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.10-1, condition KMSINIT.

Table 5.3.2.4-10: HTTP POST (Step 13, Table 5.1.3.2-1)

Derivation Path: Table 5.5.3.1-1, condition KMSKEY.

Table 5.3.2.4-11: HTTP 200 (OK) (Step 14, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.10-1, condition KMSKEY.

Table 5.3.2.4-12: SIP REGISTER (Step 15a1, Table 5.1.3.2-1)

Derivation Path: Table 5.5.2.13-1, condition CONFIG

Table 5.3.2.4-13: SIP PUBLISH (Step 15b1, Table 5.1.3.2-1)

Derivation Path: Table 5.5.2.11-1, condition CONFIG

Table 5.3.2.4-14: SIP SUBSCRIBE (Step 17, Table 5.1.3.2-1)

Derivation Path: Table 5.5.2.14-1, condition CONFIG

Table 5.3.2.4-15: SIP NOTIFY (Step 19 and 29, Table 5.1.3.2-1)

Derivation Path: Table 5.5.2.8-1, condition CONFIG

Table 5.3.2.4-16: HTTP GET (Step 21, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.2-1, condition UECONFIG.

Table 5.3.2.4-17: HTTP GET (Step 23, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.2-1, condition UEUSERPROF.

Table 5.3.2.4-18: HTTP GET (Step 25, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.2-1, condition UESERVCONFIG.

Table 5.3.2.4-19: HTTP 200 (OK) (Step 22, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.10-1, condition UECONFIG.

Table 5.3.2.4-20: HTTP 200 (OK) (Step 24, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.10-1, condition UEUSERPROF.

Table 5.3.2.4-21: HTTP 200 (OK) (Step 26, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.10-1, condition UESERVCONFIG.

Table 5.3.2.4-22: SIP SUBSCRIBE (Step 27, Table 5.1.3.2-1)

Derivation Path: Table 5.5.2.14-1, condition CONFIG

Table 5.3.2.4-23: HTTP GET (Step 31, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.2-1, condition GROUPCONFIG

Table 5.3.2.4-24: HTTP 200 (OK) (Step 32, Table 5.1.3.2-1)

Derivation Path: Table 5.5.4.10-1, condition GROUPCONFIG.

Table 5.3.2.4-25: MIKEY-SAKKE I_MESSAGE (Step 15a1, 15b1, 17, 19, 27, 29, Table 5.1.3.2-1)

Derivation Path: Table 5.5.9.1-1, condition CONFIG

Table 5.3.2.4-26: SIP 200 (OK) (Step 16, 17, 28, 35, Table 5.1.3.2-1))

| Derivation Path: Table 5.5.2.17.1.2-1 | | | | |
|---------------------------------------|--------------|---------|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Content-Type | Not included | | | |

5.3.3 Generic Test Procedure for MCPTT pre-established session establishment CO

5.3.3.1 Initial conditions

System Simulator:

- SS (MCPTT server)
- For the underlying "transport bearer" over which the SS and the UE will communicate Parameters are set to the default parameters for the basic E-UTRA Single cell network scenarios, as defined in TS 36.508 [6] subclause 4.4. The simulated Cell 1 shall belong to PLMN1 (the PLMN specified for MCPTT operation in the MCPTT configuration document)

IUT:

- UE (MCPTT client)
 - The UE has performed the Generic Test Procedure for MCPTT Authorization/Configuration and Key Generation as specified in subclause 5.3.2 and thereby the MCPTT client is authorised for and able to use the MCPTT service including making group and private calls on- and off-network, and, the MCPTT user is registered for receiving MCPTT service through the MCPTT Client.

5.3.3.2 Definition of system information messages

The E-UTRA default system information messages as defined in TS 36.508 [6] are used.

5.3.3.3 Procedure

Table 5.3.3.3-1: MCPTT pre-established session establishment CO

| St | Procedure | Message Sequence | |
|-----|--|------------------|----------------------------------|
| | | U - S | Message |
| 1 | Make the UE (MCPTT User) request the creation of a pre-established session | - | - |
| 2-7 | Steps 2-7 as described in subclause 5.4.3 'Generic Test Procedure for MCPTT CO call establishment in E-UTRA' take place. | - | - |
| - | EXCEPTION: In parallel to the events described in step 8 below, step 8 described in subclause 5.4.3 'Generic Test Procedure for MCPTT CO call establishment in E-UTRA' takes place. | - | - |
| 8 | UE (MCPTT Client) sends a SIP INVITE message in order to create a pre-established session. | --> | SIP INVITE |
| 9 | Step 10 as described in subclause 5.4.3 'Generic Test Procedure for MCPTT CO call establishment in E-UTRA' takes place. | - | - |
| - | EXCEPTION: In parallel to the events described in step 10 below, steps 11-12 described in subclause 5.4.3 'Generic Test Procedure for MCPTT CO call establishment in E-UTRA' take place. | - | - |
| 10 | The SS (MCPTT server) responds with a SIP 200 (OK) message. | <-- | SIP 200 (OK) |
| 11 | UE (MCPTT client) notifies the user that the pre-established session has been created. NOTE: This is expected to be done via a suitable implementation dependent MMI. | - | - |
| 12 | The SS transmits an <i>RRCConnectionRelease</i> message. | <-- | RRC: <i>RRCConnectionRelease</i> |

5.3.3.4 Specific message contents

The MCPTT relevant SIP message contents are specified in the present document subclause 5.5.2.

5.4 Generic test procedures for UE operation over EUTRA/EPS

5.4.1 General

The purpose of the procedures specified in the following subclauses is to facilitate test description by providing procedure sequences which can be referred from the relevant TCs specified e.g. in 3GPP TS 36.579-2 [2] or 3GPP TS 36.579-3 [3].

The intention is, wherever possible, that E-UTRA/EPS signalling and initial conditions should not be provided in the test descriptions rather should be referred to the procedure steps described in the generic procedures below, whereas, the MCPTT SIP signalling and initial conditions when relevant for the test purposes shall be explicitly provided in the tests description itself.

Throughout the generic test procedures E-UTRA/EPC behaviour is denoted as "SS" for the System Simulator simulating the NWK side of the communication, and, "UE" for the Implementation Under Test (IUT), whereas the MCPTT relevant behaviour is denoted as "SS (MCPTT server)" and "UE (MCPTT client)"/"UE (MCPTT user)" respectively. ProSe related SS behaviour when the SS simulates an UE device is denoted e.g. as "SS-UE1".

Throughout the generic test procedures E-UTRA/EPC behaviour is denoted as "SS" for the System Simulator simulating the NWK side of the communication, and, "UE" for the Implementation Under Test (IUT), whereas the MCPTT relevant behaviour is denoted as "SS (MCPTT server)" and "UE (MCPTT client)"/"UE (MCPTT user)" respectively. ProSe related SS behaviour when the SS simulates an UE device is denoted e.g. as "SS-UE1".

5.4.1A UE APN/PDN support assumptions

A MCPTT (or in general Mission Critical Services) capable UE, depending on implementation/deployment, may be provided with up to 3 MCPTT related APN: An APN utilised by the MCPTT service including the MCPTT service

APN for the SIP-1 reference point, an MC common core services APN for the HTTP-1 reference point and a MC identity management service APN for the CSC-1 reference point (see TS 23.179 [8], subclause 5.9).

To limit the test specification complexity utilisation of single APN/PDN to be used for all 3 MCPTT services is assumed and only 2 QCI are used for the bearers established in regard to the PDN:

1. MCPTT (QCI=69 for signalling bearer, QCI=65 for voice), APN=px_MCPTT_ALL_APN

NOTE 1: It should be noted that the core specs impose a requirement that the QCI value 8 or better shall be used for the EPS bearer that transports HTTP-1 reference point messaging. Using a single APN and having for the EPS bearer QCI=69 will satisfy this.

NOTE 2: The px_MCPTT_ALL_APN is defined in TS 36.579-5 [5], and should be provided by the Device vendor in the initial UE configuration as specified in Table 5.5.8.1-1.

In addition to the MCPTT relevant APN, a MCPTT (or in general Mission Critical Services) capable UE may support 2 additional different APNs for which different PDNs each with its specific QCI:

2. Internet
3. IMS (VOLTE QCI=5 for signalling bearer, QCI=1 for voice call)

This will result in the need the MCPTT tests to be able to handle a 3 APNs and different PDNs.

NOTE 3: It should be noted that, handling IMS and MCPTT with one APN is theoretically possible but may have undesirable implications e.g. VoLTE signalling could delay MCPTT signalling therefore the assumption is that such implementations will be undesirable and unlikely.

Consequently, for the IMS and MCPTT it should be assumed that the UE will do 2 different registrations, i.e. for each of them there will be a separate TCP connection.

It is difficult to mandate any order of the UE requesting any of these 3 PDNs. Therefore any order should be handled in the test with special attention to the EPS bearer QCI which needs to be guaranteed by the SS depending on the APN being requested. It is expected that Devices shall obey the TS 24.301 [19], 6.5.1.2 requirements in regard to provision of APN name in the PDN CONNECTIVITY REQUEST message (the syntax for provision of the APN name is defined in TS 24.008 [20]). In order to facilitate handling the case when the MCPTT APN maybe the default APN and therefore, depending on implementation, the APN name for the default APN is not provided, a dedicated ICS for indicating if this is the case is specified in TS 36.579-4 [4].

In regard to the MCPTT the following shall be also taken into account

- If the PDN connection established during the initial attach by the UE is to an APN other than the MCPTT service APN, then prior to user authentication, the UE shall establish another PDN connection to the MCPTT service APN. PDN connection establishment can also be caused by a SIP registration request for MCPTT. The QCI value of 69 shall be used for the EPS bearer that transports SIP-1 reference point messaging. It is used for SIP signalling.
- For the MCPTT service APN, the MCPTT UE does not activate EPS bearers for media streams.
- The network initiates the creation of a dedicated bearer to transport the voice media. The dedicated bearer for Conversational Voice utilises the standardised QCI value of 65. The network, utilising dynamic PCC, creates no more than one dedicated bearer for voice media (the UE is required to support at minimum one UM bearer which is used for MCPTT voice).

5.4.2 Generic Test Procedure for MCPTT UE registration

5.4.2.1 Initial conditions

System Simulator:

- SS (MCPTT server)
- E-UTRA related parameters are set to the default parameters for the basic single cell environment, as defined in TS 36.508 [6] subclause 4.4, unless otherwise specified in the test case. Requirements in regard to the PLMN which the simulated Cell(s) belongs to are specified in the test case using the present procedure.

IUT:

- UE (MCPTT client)
 - The UE is MCPTT capable. The MCPTT preconditions required for initiation of MCPTT service authorization for the MCPTT client and the MCPTT service are specified in the test cases.
 - The test USIM set as defined in subclause 5.5.10 is inserted.
 - The UE shall be switched off.

5.4.2.2 Definition of system information messages

The E-UTRA default system information messages as defined in TS 36.508 [6] are used.

5.4.2.3

Procedure

Table 5.4.2.3-1: EUTRA/EPS signalling for UE registration

| St | Procedure | Message Sequence | |
|-----|---|------------------|--|
| | | U - S | Message |
| 0 | Switch the UE on. | - | - |
| 1 | Make the UE initiate MCPTT service authorization for the MCPTT client and the MCPTT service. | - | - |
| 2 | UE transmits an <i>RRCConnectionRequest</i> message. | --> | RRC: <i>RRCConnectionRequest</i> |
| 3 | SS transmits an <i>RRCConnectionSetup</i> message. | <-- | RRC: <i>RRCConnectionSetup</i> |
| 4 | The UE transmits an <i>RRCConnectionSetupComplete</i> message to confirm the successful completion of the connection establishment and to initiate the Attach procedure by including the ATTACH REQUEST message. The PDN CONNECTIVITY REQUEST message is piggybacked in ATTACH REQUEST. (NOTE 1) | --> | RRC: <i>RRCConnectionSetupComplete</i> NAS: ATTACH REQUEST NAS: PDN CONNECTIVITY REQUEST |
| 5 | The SS transmits an AUTHENTICATION REQUEST message to initiate the EPS authentication and AKA procedure. | <-- | RRC: <i>DLInformationTransfer</i> NAS: AUTHENTICATION REQUEST |
| 6 | The UE transmits an AUTHENTICATION RESPONSE message and establishes mutual authentication. | --> | RRC: <i>ULInformationTransfer</i> NAS: AUTHENTICATION RESPONSE |
| 7 | The SS transmits a NAS SECURITY MODE COMMAND message to activate NAS security. | <-- | RRC: <i>DLInformationTransfer</i> NAS: SECURITY MODE COMMAND |
| 8 | The UE transmits a NAS SECURITY MODE COMPLETE message and establishes the initial security configuration. | --> | RRC: <i>ULInformationTransfer</i> NAS: SECURITY MODE COMPLETE |
| - | EXCEPTION: Steps 9a1 to 9a2 describe behaviour that depends on UE configuration; the "lower case letter" identifies a step sequence that take place if the UE has ESM information which needs to be transferred. | - | - |
| 9a1 | IF the UE sets the ESM information transfer flag in the last PDN CONNECTIVITY REQUEST message THEN the SS transmits an ESM INFORMATION REQUEST message to initiate exchange of protocol configuration options and/or APN. | <-- | RRC: <i>DLInformationTransfer</i> NAS: ESM INFORMATION REQUEST |
| 9a2 | The UE transmits an ESM INFORMATION RESPONSE message to transfer protocol configuration options and/or APN. | --> | RRC: <i>ULInformationTransfer</i> NAS: ESM INFORMATION RESPONSE |
| 10 | The SS transmits a <i>SecurityModeCommand</i> message to activate AS security. | <-- | RRC: <i>SecurityModeCommand</i> |
| 11 | The UE transmits a <i>SecurityModeComplete</i> message and establishes the initial security configuration. | --> | RRC: <i>SecurityModeComplete</i> |
| 12 | The SS transmits a <i>UECapabilityEnquiry</i> message to initiate the UE radio access capability transfer procedure. | <-- | RRC: <i>UECapabilityEnquiry</i> |
| 13 | The UE transmits a <i>UECapabilityInformation</i> message to transfer UE radio access capability. | --> | RRC: <i>UECapabilityInformation</i> |
| 14 | The SS transmits an <i>RRCConnectionReconfiguration</i> message to establish the default bearer with condition SRB2-DRB(1, 0) according to TS 36.508 [6] subclause 4.8.2.2.1.1. This message includes the ATTACH ACCEPT message. The ACTIVATE DEFAULT EPS BEARER CONTEXT REQUEST message is piggybacked in ATTACH ACCEPT. (NOTE 1) | <-- | RRC: <i>RRCConnectionReconfiguration</i> NAS: ATTACH ACCEPT NAS: ACTIVATE DEFAULT EPS BEARER CONTEXT REQUEST |
| 15 | The UE transmits an <i>RRCConnectionReconfigurationComplete</i> message to confirm the establishment of default bearer. | --> | RRC: <i>RRCConnectionReconfigurationComplete</i> |
| - | EXCEPTION: In parallel to the event described in step 16 below, if initiated by the UE the generic procedure for IP address allocation in the U-plane as defined in TS 36.508 [6] subclause 4.5A.1 takes place. | - | - |
| - | EXCEPTION: In parallel to the event described in step 16 below the events described in table 5.4.2.3-2 take place. | - | - |
| 16 | This message includes the ATTACH COMPLETE message. The ACTIVATE DEFAULT EPS BEARER CONTEXT ACCEPT message is piggybacked in ATTACH COMPLETE. | --> | RRC: <i>ULInformationTransfer</i> NAS: ATTACH COMPLETE NAS: ACTIVATE DEFAULT EPS BEARER CONTEXT ACCEPT |

| St | Procedure | Message Sequence | |
|-----|--|------------------|----------------------------------|
| | | U - S | Message |
| - | EXCEPTION: Depending on the UE capability step 16A may be performed 0, 1 or 2 times. (NOTE 1) | - | - |
| 16A | The generic procedure for UE establishing additional PDN connectivity as specified in TS 36.508 [6] subclause 4.5A.16 takes place. | - | - |
| 17 | The SS transmits an <i>RRCConnectionRelease</i> message. | <-- | RRC: <i>RRCConnectionRelease</i> |

NOTE 1: The assumptions for the PDN support of a MCPTT capable UE, including the default EPS bearer context QCI requirements in regard to the different PDN are described in 5.4.1A.

Table 5.4.2.3-2: SIP signalling for MCPTT UE registration

| St | Procedure | Message Sequence | |
|-----|---|------------------|----------------------|
| | | U - S | Message |
| 1 | The UE sends initial registration for IMS services. | --> | SIP REGISTER |
| 2 | The SS responds with a valid AKAv1-MD5 authentication challenge and security mechanisms supported by the network. | <-- | SIP 401 Unauthorized |
| 3 | The UE completes the security negotiation procedures, sets up a temporary set of SAs and uses those for sending another REGISTER with AKAv1-MD5 credentials. | --> | SIP REGISTER |
| 4 | The SS responds with 200 OK. | <-- | SIP 200 OK |
| - | EXCEPTION: Steps 1a1 to 1b1 describe behaviour that depends on UE implementation and on availability of an access-token received as outcome of the user authentication procedure as described in 3GPP TS 24.482 [12]; the "lower case letter" identifies a step sequence that take place when one or the other is the case. | - | - |
| 5a1 | The UE (MCPTT client) sends a SIP REGISTER request for service authorisation. | --> | SIP REGISTER |
| 5b1 | The UE (MCPTT client) sends a SIP PUBLISH request for service authorisation. | --> | SIP PUBLISH |
| 6 | The SS (MCPTT server) sends SIP 200 (OK). | <-- | SIP 200 (OK) |

5.4.2.4 Specific message contents

All specific EUTRA/EPS signalling message contents shall be referred to TS 36.508 [6] subclause 4.6 and 4.7.

The IMS specific message contents, Table 5.4.2.3-2, steps 1-4, shall be referred to the default message contents specified in TS 34.229-1 [21] clause A.1.

The MCPTT relevant SIP message contents, Table 5.4.2.3-2, steps 5a1-6, are specified in the present document subclause 5.5.2.

5.4.3 Generic Test Procedure for MCPTT CO communication in E-UTRA

5.4.3.1 Initial conditions

System Simulator:

- SS (MCPTT server)
- SS E-UTRA related parameters are set to the default parameters for the basic single cell environment, as defined in TS 36.508 [6] subclause 4.4, unless otherwise specified in the test case. Requirements in regard to the PLMN which the simulated Cell(s) belongs to are specified in the test case using the present procedure.

IUT:

- UE (MCPTT client)

- The test USIM set as defined in subclause 5.5.10 is inserted.
- The UE has performed the Generic Test Procedure for MCPTT UE registration as specified in subclause 5.4.2 and is in E-UTRA Registered, Idle Mode state with the MCPTT Client being active. During the attach a default EPS bearer context #3 (QCI 69) according to table 6.6.1-1, TS 36.508 [6] is established for **MCPTT and SIP signalling**.

NOTE 1: The assumptions for the PDN support of a MCPTT capable UE, including the default EPS bearer context QCI requirements in regard to the different PDN are described in 5.4.1A.

- Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

5.4.3.2 Definition of system information messages

The E-UTRA default system information messages as defined in TS 36.508 [6] are used.

5.4.3.3 Procedure

Table 5.4.3.3-1: EUTRA/EPS signalling for MCPTT CO communication

| St | Procedure | Message Sequence | |
|------|--|------------------|--|
| | | U - S | Message |
| 1 | Make the UE attempt an MCPTT call | - | - |
| 2 | The UE transmits an <i>RRConnectionRequest</i> message with 'establishmentCause' set to 'mo-Data'. | --> | <i>RRConnectionRequest</i> |
| 3 | SS transmit an <i>RRConnectionSetup</i> message. | <-- | RRC: <i>RRConnectionSetup</i> |
| 4 | The UE transmits an <i>RRConnectionSetupComplete</i> message to confirm the successful completion of the connection establishment and to initiate the session management procedure by including the SERVICE REQUEST message. | --> | RRC: <i>RRConnectionSetupComplete</i> NAS: SERVICE REQUEST |
| 5 | The SS transmits a <i>SecurityModeCommand</i> message to activate AS security. | <-- | RRC: <i>SecurityModeCommand</i> |
| 6 | The UE transmits a <i>SecurityModeComplete</i> message and establishes the initial security configuration. | --> | RRC: <i>SecurityModeComplete</i> |
| 7 | The SS configures a new data radio bearer, associated with the default EPS bearer context. The <i>RRConnectionReconfiguration</i> message is using condition SRB2-DRB(1, 0) as specified in TS 36.508 [6] subclause 4.8.2.2.1. The DRB associated with default EPS bearer context obtained during the attach procedure is established (see Preamble). | <-- | RRC: <i>RRConnectionReconfiguration</i> |
| - | EXCEPTION: In parallel to the events described in step 8 below, the events described in table 5.4.3.3-2 take place. | - | - |
| 8 | The UE transmits an <i>RRConnectionReconfigurationComplete</i> message to confirm the establishment of the new data radio bearer, associated with the default EPS bearer context. | --> | RRC: <i>RRConnectionReconfigurationComplete</i> |
| 9-12 | Void. | - | - |
| 13 | The SS configures a new RLC-UM data radio bearer, associated with the dedicated EPS bearer context. <i>RRConnectionReconfiguration</i> message contains the ACTIVATE DEDICATED EPS BEARER CONTEXT REQUEST message. EPS bearer context #5 (QCI 65) according to table 6.6.2-1: Reference dedicated EPS bearer contexts is used. NOTE 1: The same MCPTT PDN address is applicable because the linked EPS bearer ID refers to the default EBC.. NOTE 2: The network initiates the creation of a dedicated bearer to transport the voice media see 5.4.1A. | <-- | RRC: <i>RRConnectionReconfiguration</i> NAS: ACTIVATE DEDICATED EPS BEARER CONTEXT REQUEST |

| St | Procedure | Message Sequence | |
|----|---|------------------|--|
| | | U - S | Message |
| 14 | The UE transmits an <i>RRCCONNECTIONRECONFIGURATIONCOMPLETE</i> message to confirm the establishment of the new data radio bearer, associated with the default EPS bearer for emergency IMS signalling. | --> | RRC: <i>RRCCONNECTIONRECONFIGURATIONCOMPLETE</i> |
| 15 | The UE transmits an ACTIVATE DEDICATED EPS BEARER CONTEXT ACCEPT message. | --> | RRC: ULInformationTransfer NAS:ACTIVATE DEDICATED EPS BEARER CONTEXT ACCEPT |

Table 5.4.3.3-2: SIP signalling for MCPTT CO communication

| St | Procedure | Message Sequence | |
|--|--|------------------|----------------------------|
| | | U - S | Message |
| 1 | The UE (MCPTT client) sends an initial SIP INVITE request requesting the establishment of an MCPTT call. | --> | SIP INVITE |
| 2 | The SS (MCPTT server) sends SIP 183(Session Progress). | <-- | SIP 183 (Session Progress) |
| 3 | The SS (MCPTT server) sends SIP 200 (OK). | <-- | SIP 200 (OK) |
| NOTE: The SIP sequence described in the present table is based on MCPTT CO call establishment and is for descriptive purposes only. When a TC refers to the generic procedure described in the present subclause, the SIP sequence may be replaced as appropriate. | | | |

5.4.3.4 Specific message contents

All specific EUTRA/EPS signalling message contents shall be referred to TS 36.508 [6] subclauses 4.6 and 4.7.

All specific SIP signalling message contents shall be specified in the TC which refers to the present procedure.

5.4.4 Generic Test Procedure for MCPTT CT communication in E-UTRA

5.4.4.1 Initial conditions

System Simulator:

- SS (MCPTT server)
- E-UTRA related parameters are set to the default parameters for the basic single cell environment, as defined in TS 36.508 [6] subclause 4.4, unless otherwise specified in the test case. Requirements in regard to the PLMN which the simulated Cell(s) belongs to are specified in the test case using the present procedure.

IUT:

- UE (MCPTT client):
 - The test USIM set as defined in subclause 5.5.10 is inserted.
 - The UE has performed the Generic Test Procedure for MCPTT UE registration as specified in subclause 5.4.2 and is in E-UTRA Registered, Idle Mode state with the MCPTT Client being active. During the attach a default EPS bearer context #3 (QCI 69) according to table 6.6.1-1, TS 36.508 [6] is established for [MCPTT and SIP signalling](#).

NOTE 1: The assumptions for the PDN support of a MCPTT capable UE, including the default EPS bearer context QCI requirements in regard to the different PDN are described in 5.4.1A.

- Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

5.4.4.2 Definition of system information messages

The E-UTRA default system information messages as defined in TS 36.508 [6] are used.

5.4.4.3 Procedure

Table 5.4.4.3-1: EUTRA/EPS signalling for MCPTT CT communication

| St | Procedure | Message Sequence | |
|------|--|------------------|--|
| | | U - S | Message |
| 1 | SS sends a <i>Paging</i> message to the UE on the appropriate paging block, and including the UE identity in one entry of the IE <i>pagingRecordLists</i> . | <-- | RRC: <i>Paging</i> (PCCH) |
| 2 | The UE transmits an <i>RRCConnectionRequest</i> message with 'establishmentCause' set to 'mt-Access'. | --> | <i>RRCConnectionRequest</i> |
| 3 | SS transmit an <i>RRCConnectionSetup</i> message. | <-- | RRC: <i>RRCConnectionSetup</i> |
| 4 | The UE transmits an <i>RRCConnectionSetupComplete</i> message to confirm the successful completion of the connection establishment and to initiate the session management procedure by including the SERVICE REQUEST message. | --> | RRC: <i>RRCConnectionSetupComplete</i> NAS: SERVICE REQUEST |
| 5 | The SS transmits a <i>SecurityModeCommand</i> message to activate AS security. | <-- | RRC: <i>SecurityModeCommand</i> |
| 6 | The UE transmits a <i>SecurityModeComplete</i> message and establishes the initial security configuration. | --> | RRC: <i>SecurityModeComplete</i> |
| 7 | The SS configures a new data radio bearer, associated with the default EPS bearer context. The <i>RRCConnectionReconfiguration</i> message is using condition SRB2-DRB(1, 0) as specified in TS 36.508 [6] subclause 4.8.2.2.1. The DRB associated with default EPS bearer context obtained during the attach procedure is established (see Preamble). | <-- | RRC: <i>RRCConnectionReconfiguration</i> |
| - | EXCEPTION: In parallel to the events described in steps 11-15 below, the event described in step 1, table 5.4.4.3-2 takes place. | - | - |
| 8 | The UE transmits an <i>RRCConnectionReconfigurationComplete</i> message to confirm the establishment of the new data radio bearer, associated with the default EPS bearer context. | --> | RRC: <i>RRCConnectionReconfigurationComplete</i> |
| 9-12 | Void. | - | - |
| 13 | The SS configures a new RLC-UM data radio bearer, associated with the dedicated EPS bearer context. <i>RRCConnectionReconfiguration</i> message contains the ACTIVATE DEDICATED EPS BEARER CONTEXT REQUEST message. EPS bearer context #5 (QCI 65/69) according to table 6.6.2-1: Reference dedicated EPS bearer contexts is used. NOTE 1: The same MCPTT PDN address is applicable because the linked EPS bearer ID refers to the default EBC. NOTE 2: The network initiates the creation of a dedicated bearer to transport the voice media see 5.4.1A. | <-- | RRC: <i>RRCConnectionReconfiguration</i> NAS: ACTIVATE DEDICATED EPS BEARER CONTEXT REQUEST |
| 14 | The UE transmits an <i>RRCConnectionReconfigurationComplete</i> message to confirm the establishment of the new data radio bearer, associated with the default EPS bearer for emergency IMS signalling. | --> | RRC: <i>RRCConnectionReconfigurationComplete</i> |
| 15 | The UE transmits an ACTIVATE DEDICATED EPS BEARER CONTEXT ACCEPT message. | --> | RRC: <i>ULInformationTransfer</i> NAS:ACTIVATE DEDICATED EPS BEARER CONTEXT ACCEPT |
| 16 | The event described in step 2, table 5.4.4.3-2 takes place. | - | - |

Table 5.4.4.3-2: SIP signalling for MCPTT CT communication

| St | Procedure | Message Sequence | |
|--|--|------------------|--------------|
| | | U - S | Message |
| 1 | The SS (MCPTT Server) sends an initial SIP INVITE request requesting the establishment of an MCPTT call. | <-- | SIP INVITE |
| 2 | The UE (MCPTT client) sends SIP 200 (OK). | --> | SIP 200 (OK) |
| NOTE: The SIP sequence described in the present table is based on MCPTT CO call establishment and is for descriptive purposes only. When a TC refers to the generic procedure described in the present subclause, the SIP sequence may be replaced as appropriate. | | | |

5.4.4.4 Specific message contents

All specific EUTRA/EPS signalling message contents shall be referred to TS 36.508 [6] subclause 4.6 and 4.7.

All specific SIP signalling message contents shall be specified in the TC which refers to the present procedure.

5.4.5 Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment

5.4.5.1 Initial conditions

System Simulator:

- SS-UE1 (MCPTT Client).
- For the underlying "transport bearer" over which the SS and the UE will communicate, the SS is behaving as SS-UE1 as defined in TS 36.508 [6], configured for and operating as ProSe Direct Communication transmitting and receiving device.
- GNSS simulator configured to simulate a location in the centre of Geographical area #1 and providing timing reference as defined in TS 36.508 [6] Table 4.11.2-2 scenario #1, for the assistance of E-UTRAN off-network testing.

NOTE: For operation in off-network environment, it needs to be ensured that after the UE is powered up it considers the Geographical area #1 as being one of the geographical areas set in the USIM for operation when UE is "not served by E-UTRAN".

IUT:

- UE (MCPTT client):
 - The test USIM set as defined in subclause 5.5.10 is inserted.
 - Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

UE state:

- The UE is in state Switched OFF (state 1) according to TS 36.508 [6].

5.4.5.2 Definition of system information messages

N/a (out of E-UTRA coverage)

5.4.5.3 Procedure

Table 5.4.5.3-1: ProSe direct communication one-to-one out of E-UTRA coverage signalling for MCPTT CO communication-establishment

| St | Procedure | Message Sequence | |
|-----|--|------------------|------------------------------------|
| | | U - S | Message |
| 1 | Power up the UE. | - | - |
| 2 | Wait for 15 sec to allow the UE to establish that it is out of coverage and initiate scanning the frequency pre-set for ProSe communication for any activities. | - | - |
| 3 | Make the UE initiate one-to-one ProSe direct communication with the remote UE preconfigured (ProSe Layer-2 Group ID). | - | - |
| 4 | UE sends a DIRECT_COMMUNICATION_REQUEST message, IP Address Config IE set to "address allocation not supported". | --> | DIRECT_COMMUNICATION_REQUEST |
| 5 | SS-UE1 sends a DIRECT_SECURITY_MODE_COMMAND message. | <-- | DIRECT_SECURITY_MODE_COMMAND |
| 6 | UE sends a DIRECT_SECURITY_MODE_COMPLETE message ciphered and integrity protected with the new security context. | --> | DIRECT_SECURITY_MODE_COMPLETE |
| 7 | SS-UE1 sends a DIRECT_COMMUNICATION_ACCEPT message. | <-- | DIRECT_COMMUNICATION_ACCEPT |
| 8 | EXCEPTION: After the communication is established, an IP address configuration procedure is performed depending on what the UE has indicated in the IP Address Config IE (if it is not "address allocation not supported") in the DIRECT_COMMUNICATION_REQUEST message, and, the SS-UE1 itself indicating "address allocation not supported" in the DIRECT_COMMUNICATION_ACCEPT message. | - | - |
| - | EXCEPTION: Steps 9a1 to 9a2 describe behaviour that depends on UE implementation; the "lower case letter" identifies a step sequence that depends on the UE implementation of keepalive procedure. | - | - |
| 9a1 | UE sends a DIRECT_COMMUNICATION_KEEPALIVE message. | --> | DIRECT_COMMUNICATION_KEEPALIVE |
| 9a2 | SS-UE1 sends a DIRECT_COMMUNICATION_KEEPALIVE_ACK message. | <-- | DIRECT_COMMUNICATION_KEEPALIVE_ACK |

5.4.5.4 Specific message contents

Table 5.4.5.4-1: DIRECT_COMMUNICATION_ACCEPT (step 7 Table 5.4.5.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-6. | | | |
|--|--|----------------------------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| IP Address Config | '0011'B | address allocation not supported | |
| Link Local IPv6 Address | If the UE indicated 'address allocation not supported' in the IP Address Config IE in the DIRECT_COMMUNICATION_REQUEST message then a link-local IPv6 address formed locally | 128-bit IPv6 address | |

Table 5.4.5.4-2: DIRECT_SECURITY_MODE_COMMAND (step 5, Table 5.4.5.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-7. | | | |
|--|--|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| UE Security Capabilities | Set to the UE Security Capabilities received in the DIRECT_COMMUNICATION_REQUEST message | | |
| Chosen Algorithms | One of the non-null algorithms provided in UE Security Capabilities (i.e. different to EIA0 (null integrity protection algorithm)/EEA0 (null ciphering algorithm)) | | |
| MSB of K _D ID | The MSB of KD ID of the new KD | | |
| K _D Freshness | Not included | | |
| GPI | Not included | | |
| User Info { | | | |
| Type of User Info | IMSI | | |
| Odd/even indication | Reflecting the number of digits in the IMSI | | |
| Identity digits | A value different to the IMSI of the UE | | |
| } | | | |

Table 5.4.5.4-3: DIRECT_SECURITY_MODE_COMPLETE (step 6, Table 5.4.5.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-8. | | | |
|--|--------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| LSB of K _D ID | Not included | | |

Table 5.4.5.4-4: DIRECT_COMMUNICATION_KEEPALIVE (step 9a1, Table 5.4.5.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-9. | | | |
|--|-------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Keepalive Counter | 0 | | |
| Maximum Inactivity Period | Any allowed value | | |

5.4.6 Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage establishment

5.4.6.1 Initial conditions

System Simulator:

- SS-UE1 (MCPTT Client).
 - For the underlying "transport bearer" over which the SS and the UE will communicate, the SS is behaving as SS-UE1 as defined in TS 36.508 [6], configured for and operating as ProSe Direct Communication transmitting and receiving device.
 - GNSS simulator configured to simulate a location in the centre of Geographical area #1 and providing timing reference as defined in TS 36.508 [6] Table 4.11.2-2 scenario #1, for the assistance of E-UTRAN off-network testing.

NOTE: For operation in off-network environment, it needs to be ensured that after the UE is powered up it considers the Geographical area #1 as being one of the geographical areas set in the USIM for operation when UE is "not served by E-UTRAN".

IUT:

- UE (MCPTT client)
- The test USIM set as defined in subclause 5.5.10 is inserted.
- Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

UE state:

- The UE is in state Switched OFF (state 1) according to TS 36.508 [6].

5.4.6.2 Definition of system information messages

N/a (out of E-UTRA coverage).

5.4.6.3 Procedure

Table 5.4.6.3-1: ProSe direct communication one-to-one out of E-UTRA coverage signalling for MCPTT CT communication-establishment

| St | Procedure | Message Sequence | |
|----|--|------------------|------------------------------------|
| | | U - S | Message |
| 1 | Power up the UE. | - | - |
| 2 | Wait for 15 sec to allow the UE to establish that it is out of coverage and initiate scanning the frequency pre-set for ProSe communication for any activities. | - | - |
| 3 | SS-UE1 sends a DIRECT_COMMUNICATION_REQUEST message, IP Address Config IE set to "address allocation not supported". | <-- | DIRECT_COMMUNICATION_REQUEST |
| 4 | UE sends a DIRECT_SECURITY_MODE_COMMAND message unciphered but integrity protected with the new security context. | --> | DIRECT_SECURITY_MODE_COMMAND |
| 5 | SS-UE1 sends a DIRECT_SECURITY_MODE_COMPLETE message ciphered and integrity protected with the new security context. | <-- | DIRECT_SECURITY_MODE_COMPLETE |
| 6 | UE sends a DIRECT_COMMUNICATION_ACCEPT message. | --> | DIRECT_COMMUNICATION_ACCEPT |
| 7 | EXCEPTION: After the communication is established, an IP address configuration procedure is performed depending on what the UE has indicated in the IP Address Config IE (if it is not "address allocation not supported") in the DIRECT_COMMUNICATION_REQUEST message, and, the SS-UE1 itself indicating "address allocation not supported" in the DIRECT_COMMUNICATION_ACCEPT message. | - | - |
| 8 | SS-UE1 sends a DIRECT_COMMUNICATION_KEEPALIVE message with a Keepalive Counter IE that contains the value of the keepalive counter for this link=0, and a Maximum Inactivity Period IE. | <-- | DIRECT_COMMUNICATION_KEEPALIVE |
| 9 | UE sends a DIRECT_COMMUNICATION_KEEPALIVE_ACK message including the Keepalive Counter IE set to the same value as that received in the DIRECT_COMMUNICATION_KEEPALIVE message. | --> | DIRECT_COMMUNICATION_KEEPALIVE_ACK |

5.4.6.4 Specific message contents

Table 5.4.6.4-1: DIRECT_COMMUNICATION_REQUEST (step 3, Table 5.4.6.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-5. | | | |
|--|---|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| User Info { | | | |
| Type of User Info | IMSI | | |
| Odd/even indication | Reflecting the number of digits in the IMSI | | |
| Identity digits | A value different to the IMSI of the UE | | |
| } | | | |
| IP Address Config | '0011'B | address allocation not supported | |
| Maximum Inactivity Period | '10 0000 0000'B | 512 sec, randomly chosen to allow sufficient time for a TC which uses this procedure to be completed without need to repeat the keepalive procedure | |
| Nonce_1 | | | |
| UE Security Capabilities | 01111111 01111111 | All but null algorithms supported | |
| MSB of K _D -sess ID | the 8 most significant bits of the K _D -sess ID | | |
| K _D ID | Not present | | |
| Signature | the ECCSI signature calculated with the User Info and Nonce_1 as specified in 3GPP TS 33.303 [67] | | |
| Link Local IPv6 Address | a link-local IPv6 address formed locally | | |

Table 5.4.6.4-2: DIRECT_SECURITY_MODE_COMMAND (step 4 Table 5.4.6.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-7. | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MSB of K _D ID | Any allowed value | | |
| K _D Freshness | Not included | | |
| GPI | Not included | | |
| Signature | The ECCSI signature calculated with the User Info and Nonce_1 as specified in 3GPP TS 33.303 [67] | | |
| Encrypted Payload | The SAKKE payload generated as specified in 3GPP TS 33.303 [67]. | | |

Table 5.4.6.4-3: DIRECT_SECURITY_MODE_COMPLETE (step 5, Table 5.4.6.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-8. | | | |
|--|--|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| LSB of K _D ID | 16 least significant bits of K _D ID | | |

Table 5.4.6.4-4: DIRECT_COMMUNICATION_KEEPALIVE (step 8, Table 5.4.6.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-9. | | | |
|--|-----------------|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| Keepalive Counter | 0 | | |
| Maximum Inactivity Period | '10 0000 0000'B | 512 sec, randomly chosen to allow sufficient time for a TC which uses this procedure to be completed without need to repeat the keepalive procedure | |

5.4.7 Generic Test Procedure for MCPTT communication over ProSe direct one-to-one communication out of E-UTRA coverage - release by the SS

5.4.7.1 Initial conditions

System Simulator:

- SS-UE1 (MCPTT Client).
- Same as those defined in the 'Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.5, or, the 'Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.6.

IUT:

- UE (MCPTT client)

ProSe related configuration

- Same as those defined in the 'Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.5, or, the 'Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.6.

UE state

- The UE has established ProSe direct communication one-to-one out of E-UTRA coverage using the 'Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.5, or, the 'Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.6.

5.4.7.2 Definition of system information messages

N/a (out of E-UTRA coverage).

5.4.7.3 Procedure

Table 5.4.7.3-1: ProSe direct communication one-to-one out of E-UTRA coverage signalling for MCPTT communication - release by the SS

| St | Procedure | Message Sequence | |
|----|---|------------------|-------------------------------------|
| | | U - S | Message |
| 1 | SS-UE1 sends a DIRECT_COMMUNICATION_RELEASE message with a Release Reason IE indicating 'Direct Communication to peer UE no longer needed'. | <-- | DIRECT_COMMUNICATION_RELEASE |
| 2 | UE sends a DIRECT_COMMUNICATION_RELEASE_ACCEPT message. | --> | DIRECT_COMMUNICATION_RELEASE_ACCEPT |

5.4.7.4 Specific message contents

Table 5.4.7.4-1: DIRECT_COMMUNICATION_RELEASE (step 1, Table 5.4.7.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-11. | | | |
|---|--------------|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| Release Reason | '0001'B | Direct communication to the peer UE no longer needed | |

5.4.8 Generic Test Procedure for MCPTT communication over ProSe direct one-to-one communication out of E-UTRA coverage - release by the UE

5.4.8.1 Initial conditions

System Simulator:

- SS-UE1 (MCPTT Client).
- Same as those defined in the 'Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.5, or, the 'Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.6.

IUT:

- UE (MCPTT client)

ProSe related configuration

- Same as those defined in the 'Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.5, or, the 'Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.6.

UE state

- The UE has established ProSe direct communication one-to-one out of E-UTRA coverage using the 'Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.5, or, the 'Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-one communication out of E-UTRA coverage-establishment', as described in subclause 5.4.6.

5.4.8.2 Definition of system information messages

N/a (out of E-UTRA coverage).

5.4.8.3 Procedure

Table 5.4.8.3-1: ProSe direct communication one-to-one out of E-UTRA coverage signalling for MCPTT communication - release by the UE

| St | Procedure | Message Sequence | |
|----|---|------------------|-------------------------------------|
| | | U - S | Message |
| 1 | UE sends a DIRECT_COMMUNICATION_RELEASE message with a Release Reason IE indicating 'Direct Communication to peer UE no longer needed'. | --> | DIRECT_COMMUNICATION_RELEASE |
| 2 | SS-UE1 sends a DIRECT_COMMUNICATION_RELEASE_ACCEPT message. | <-- | DIRECT_COMMUNICATION_RELEASE_ACCEPT |

5.4.8.4 Specific message contents

Table 5.4.8.4-1: DIRECT_COMMUNICATION_RELEASE (step 1, Table 5.4.8.3-1)

| Derivation path: 36.508 [6], Table 4.7F.3-11. | | | |
|---|--------------|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| Release Reason | '0001'B | Direct communication to the peer UE no longer needed | |

5.4.9 Generic Test Procedure for MCPTT communication in E-UTRA / Change of cells

5.4.9.1 Initial conditions

System Simulator:

- SS (MCPTT server)
- SS E-UTRA
 - Parameters are set to the default parameters for the basic E-UTRA single mode multi cell network scenarios, as defined in TS 36.508 [6] subclause 4.4, unless otherwise specified in the test case.
 - 3 cells (Cell 1, Cell 2 and Cell 4, all operating on the same frequency). Cells 1 and 2 are on the same PLMN1, whereas Cell 4 is on a different PLMN2.

NOTE: The procedure only requires at maximum 2 cells to be active at any one instance.

IUT:

- UE (MCPTT client)
 - The UE has performed the Generic Test Procedure for MCPTT UE registration as specified in subclause 5.4.2 and is in E-UTRA Registered, Idle Mode state on Cell 1 with the MCPTT Client being active. During the attach a default EPS bearer context #3 (QCI 69) according to table 6.6.1-1, TS 36.508 [6] is established for MCPTT and SIP signalling. The UE is allowed to operate on both PLMN1 and PLMN2.

NOTE 1: The assumptions for the PDN support of a MCPTT capable UE, including the default EPS bearer context QCI requirements in regard to the different PDN are described in 5.4.1A.

- The UE has performed the Generic Test Procedure for MCPTT Authorization/Configuration and Key Generation as specified in subclause 5.3.2 and thereby the MCPTT client is authorised for and able to use the MCPTT service including making group and private calls on- and off-network, and, the MCPTT user is registered for receiving MCPTT service through the MCPTT Client. The PLMN1 is set as HPLMN and PLMN2 is set as VPLMN in Table 5.5.8.1-1: MCPTT Initial UE Configuration Defaults.
- Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

5.4.9.2 Definition of system information messages

The E-UTRA default system information messages as defined in TS 36.508 [6] are used.

5.4.9.3 Procedure

Table 5.4.9.3-1 illustrates the downlink power levels and other changing parameters to be applied for the cells at various time instants of the test execution. Row marked "T0" denotes the initial conditions after preamble, while columns marked "T1" ... "Tn" are to be applied subsequently. The exact instants on which these values shall be applied are described elsewhere in the present clause.

Table 5.4.9.3-1: Time instances of cell power level and parameter changes

| | Parameter | Unit | Cell 1 | Cell 2 | Cell 4 |
|----|-----------------------|------------|--------|--------|--------|
| T0 | Cell-specific RS EPRE | dBm/15k Hz | -79 | "Off" | "Off" |
| T1 | Cell-specific RS EPRE | dBm/15k Hz | "Off" | -79 | "Off" |
| T2 | Cell-specific RS EPRE | dBm/15k Hz | "Off" | "Off" | -79 |

Table 5.4.9.3-2: EUTRA/EPS signalling for UE changing cells

| St | Procedure | Message Sequence | |
|---|--|------------------|---------|
| | | U - S | Message |
| 1 | The SS configures: Cell 1 and Cell 2 parameters according to the row "T1" in table 5.4.9.3-1 in order to simulate needs for cell reselection to Cell2. | - | - |
| 2 | Wait for 5 sec to allow the UE to adjust to cell changes. NOTE 1. | - | - |
| 3 | The SS configures: Cell 2 and Cell 4 parameters according to the row "T2" in table 5.4.9.3-1 in order to simulate needs for cell reselection to Cell4. | - | - |
| 4 | The Generic test procedure for 'Tracking area updating procedure' defined in TS 36.508 [6] subclause 4.5A.2 take place. NOTE 2. | - | - |
| NOTE 1: Depending on implementation the UE may start transmitting MCPTT protocol relevant data earlier. What may be transmitted is specified in the TCs. | | | |
| NOTE 2: The UE may start transmitting MCPTT protocol relevant data as soon as it receives TRACKING AREA UPDATE ACCEPT message. If this happens the SS shall not execute step 7 of the Generic test procedure for 'Tracking area updating procedure' and shall continue with the rest of the messages exchange defined in the test case. | | | |

5.4.9.4 Specific message contents

None.

5.4.10 Generic Test Procedure for MCPTT CT communication over ProSe direct one-to-many communication out of E-UTRA coverage / Announcing/Discoveree procedure for group member discovery

5.4.10.1 Initial conditions

System Simulator:

- SS-UE1 (MCPTT Client).
- For the underlying "transport bearer" over which the SS and the UE will communicate, the SS is behaving as SS-UE1 as defined in TS 36.508 [6], configured for and operating as ProSe Direct Communication transmitting and receiving device.

- GNSS simulator configured to simulate a location in the centre of Geographical area #1 and providing timing reference as defined in TS 36.508 [6] Table 4.11.2-2 scenario #1, for the assistance of E-UTRAN off-network testing.

NOTE: For operation in off-network environment, it needs to be ensured that after the UE is powered up it considers the Geographical area #1 as being one of the geographical areas set in the USIM for operation when UE is "not served by E-UTRAN".

IUT:

- UE (MCPTT client)
 - The test USIM set as defined in subclause 5.5.10 is inserted.
 - Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

UE state:

- The UE is in state Switched OFF (state 1) according to TS 36.508 [6].

5.4.10.2 Definition of system information messages

N/a (out of E-UTRA coverage)

5.4.10.3 Procedure

Table 5.4.10.3-1: ProSe Direct Discovery for public safety use / Announcing/Discoveree procedure for group member discovery for MCPTT off-network CT group calls

| St | Procedure | Message Sequence | |
|--|--|------------------|-----------------------------|
| | | U - S | Message |
| 1 | Power up the UE. | - | - |
| 2 | Wait for 60 sec to allow the UE to determine that it is in the Geographical area #1 set in the USIM for operation when UE is "not served by E-UTRAN and acquire reference timing. | - | - |
| - | EXCEPTION: Steps 3a1-3b3b1 describe events which depend on the UE capabilities; the "lower case letter" identifies a step sequence that takes place if the UE is capable or not of Announcing for group member discovery. | - | - |
| 3a1 | IF <i>pc_ProSeAnnForGroupMemberDiscovery</i> (TS 36.523-2 [75]) THEN Force the UE upper layer application corresponding to ProSe Application ID <i>px_ProSeAnnApplicationIdentity2</i> (TS 36.523-3 [74]) to initiate continuous announcing its availability in a discovery group. NOTE 1. | - | - |
| 3a2 | The UE transmits in the next transmission period a PC5_DISCOVERY message for Group Member Discovery Announcement applying DUIK, DUSK, and DUCK with the associated Encrypted Bitmask, along with the UTC-based counter to the PC5_DISCOVERY message. | --> | PC5_DISCOVERY |
| 3b1 | ELSE SS sets <i>WaitForMessageCounter</i> =1 | - | - |
| - | EXCEPTION: Steps 3b2-3b3b1 are repeated until the event described in step 3b3a1 takes place OR <i>WaitForMessageCounter</i> =11. | - | - |
| 3b2 | SS-UE1 transmits in the next transmission period a PC5_DISCOVERY message for Group Member Discovery Solicitation applying DUIK, DUSK, and DUCK with the associated Encrypted Bitmask, along with the UTC-based counter to the PC5_DISCOVERY message. <i>WaitForMessageCounter</i> = <i>WaitForMessageCounter</i> +1 | <-- | PC5_DISCOVERY |
| - | EXCEPTION: Steps 3b3a1-3b3b1 describe events which depend on the UE behaviour; the "lower case letter" identifies a step sequence that take place if the UE transmit or not in the next transmission period a PC5_DISCOVERY message. | - | - |
| 3b3a1 | The UE transmits in the next transmission period a PC5_DISCOVERY message for Group Member Discovery Response applying DUIK, DUSK, and DUCK with the associated Encrypted Bitmask, along with the UTC-based counter to the PC5_DISCOVERY message and including the target Discovery Group ID of the discovery group to be discovered in step 3b2. | --> | PC5_DISCOVERY |
| 3b3b1 | The <i>WaitForMessageCounter</i> =11. | - | - |
| - | EXCEPTION: Steps 4 and 5 may be repeated multiple times depending on the MCPTT procedure taking place. | - | - |
| - | EXCEPTION: Step 4 is repeated until the MCPTT protocol data unit provided by the higher layers is transmitted in full. NOTE 2. | - | - |
| 4 | SS-UE1 sends sidelink communication over the PC5 interface in the next transmission period using the timing reference provided by the GNSS simulator (same to be used by the UE). NOTE 3. | <-- | <i>STCH PDCP SDU packet</i> |
| - | EXCEPTION: Step 5 is repeated until the MCPTT protocol data unit provided by the higher layers is transmitted in full. NOTE 4. | - | - |
| 5 | The UE sends sidelink communication over the PC5 interface in the next transmission period using the timing reference provided by the GNSS simulator (same to be used by the SS-UE1). NOTE 3. | --> | <i>STCH PDCP SDU packet</i> |
| NOTE 1: UEs which are capable of Announcing for group member discovery may start announcement automatically. | | | |
| NOTE 2: The SS-UE1 may need to send more than one MCPTT protocol data unit in sequence with no response expected between them from the UE. | | | |
| NOTE 3: What MCPTT protocol data units are included in the sidelink communication is defined in the test case using the present generic procedure. | | | |
| NOTE 4: The UE may need to send more than one MCPTT protocol data unit in sequence with no response expected between them from the SS-UE1. | | | |

5.4.10.4 Specific message contents

Table 5.4.10.4-1: PC5_DISCOVERY (step 3a2 Table 5.4.10.3-1)

| |
|---|
| Derivation path: 36.508 [6], Table 4.7F.1-5A. |
|---|

Table 5.4.10.4-2: PC5_DISCOVERY (step 3b2 Table 5.4.10.3-1)

| |
|---|
| Derivation path: 36.508 [6], Table 4.7F.1-5B. |
|---|

Table 5.4.10.4-3: PC5_DISCOVERY (step 3b3a1 Table 5.4.10.3-1)

| |
|---|
| Derivation path: 36.508 [6], Table 4.7F.1-5C. |
|---|

5.4.11 Generic Test Procedure for MCPTT CO communication over ProSe direct one-to-many communication out of E-UTRA coverage / Monitoring/Discoverer procedure for group member discovery / One-to-many communication

5.4.11.1 Initial conditions

System Simulator:

- SS-UE1 (MCPTT Client).
 - For the underlying "transport bearer" over which the SS and the UE will communicate, the SS is behaving as SS-UE1 as defined in TS 36.508 [6], configured for and operating as ProSe Direct Communication transmitting and receiving device.
 - GNSS simulator configured to simulate a location in the centre of Geographical area #1 and providing timing reference as defined in TS 36.508 [6] Table 4.11.2-2 scenario #1, for the assistance of E-UTRAN off-network testing.

NOTE: For operation in off-network environment, it needs to be ensured that after the UE is powered up it considers the Geographical area #1 as being one of the geographical areas set in the USIM for operation when UE is "not served by E-UTRAN".

IUT:

- UE (MCPTT client)
 - The test USIM set as defined in subclause 5.5.10 is inserted.
 - Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

UE state:

- The UE is in state Switched OFF (state 1) according to TS 36.508 [6].

5.4.11.2 Definition of system information messages

N/a (out of E-UTRA coverage)

5.4.11.3 Procedure

Table 5.4.11.3-1: ProSe Direct Discovery for public safety use / Monitoring/Discoverer procedure for group member discovery for MCPTT off-network CO group calls

| St | Procedure | Message Sequence | |
|----|------------------|------------------|---------|
| | | U - S | Message |
| 1 | Power up the UE. | - | - |

| St | Procedure | Message Sequence | |
|--|--|------------------|-----------------------------|
| | | U - S | Message |
| 2 | Wait for 60 sec to allow the UE to determine that it is in the Geographical area #1 set in the USIM for operation when UE is "not served by E-UTRAN and acquire reference timing. | - | - |
| - | EXCEPTION: Steps 3a1-3b3 describe events which depend on the UE capabilities; the "lower case letter" identifies a step sequence that takes place if the UE is capable or not of Monitoring for group member discovery. | - | - |
| 3a1 | IF <i>pc_ProSeMonForGtoupMemberDiscovery</i> (TS 36.523-2 [75]) THEN the SS-UE1 starts continuously transmitting in the relevant transmission periods a <i>PC5_DISCOVERY</i> message for Group Member Discovery Announcement applying <i>DUIK</i> , <i>DUSK</i> , and <i>DUCK</i> with the associated Encrypted Bitmask, along with the UTC-based counter to the <i>PC5_DISCOVERY</i> message. | <-- | <i>PC5_DISCOVERY</i> |
| 3b1 | ELSE Force the UE upper layer application corresponding to ProSe Application ID <i>px_ProSeAnnApplicationIdentity2</i> (TS 36.523-3 [74]) to solicit proximity of other UEs in a discovery group. NOTE 1. | - | - |
| 3b2 | The UE transmits in the next transmission period a <i>PC5_DISCOVERY</i> message for Group Member Discovery Solicitation applying <i>DUIK</i> , <i>DUSK</i> , and <i>DUCK</i> with the associated Encrypted Bitmask, along with the UTC-based counter to the <i>PC5_DISCOVERY</i> message. | --> | <i>PC5_DISCOVERY</i> |
| 3b3 | SS-UE1 transmits a <i>PC5_DISCOVERY</i> message for Group Member Discovery Response applying <i>DUIK</i> , <i>DUSK</i> , and <i>DUCK</i> with the associated Encrypted Bitmask, along with the UTC-based counter to the <i>PC5_DISCOVERY</i> message and including the target Discovery Group ID of the discovery group to be discovered in step 2b2. | <-- | <i>PC5_DISCOVERY</i> |
| - | EXCEPTION: Steps 4 and 5 may be repeated multiple times depending on the MCPTT procedure taking place. | - | - |
| - | EXCEPTION: Step 4 is repeated until the MCPTT protocol data unit provided by the higher layers is transmitted in full. NOTE 2. | - | - |
| 4 | The UE sends sidelink communication over the PC5 interface in the next transmission period using the timing reference provided by the GNSS simulator (same to be used by the SS-UE1). NOTE 3. | --> | <i>STCH PDCP SDU packet</i> |
| - | EXCEPTION: Step 5 is repeated until the MCPTT protocol data unit provided by the higher layers is transmitted in full. NOTE 4. | - | - |
| 5 | SS-UE1 sends sidelink communication over the PC5 interface in the next transmission period using the timing reference provided by the GNSS simulator (same to be used by the UE). NOTE 3. | <-- | <i>STCH PDCP SDU packet</i> |
| <p>NOTE 1: UEs which are not capable of Monitoring for group member discovery may start Discoverer procedure automatically.</p> <p>NOTE 2: The UE may need to send more than one MCPTT protocol data unit in sequence with no response expected between them from the SS-UE1.</p> <p>NOTE 3: Which MCPTT protocol data units are included in the sidelink communication is defined in the test case using the present generic procedure.</p> <p>NOTE 4: The SS-UE1 may need to send more than one MCPTT protocol data unit in sequence with no response expected between them from the UE.</p> | | | |

5.4.11.4 Specific message contents

Table 5.4.11.4-1: PC5_DISCOVERY (step 3a1 Table 5.4.11.3-1)

| |
|---|
| Derivation path: 36.508 [6], Table 4.7F.1-5A. |
|---|

Table 5.4.11.4-2: PC5_DISCOVERY (step 3b2 Table 5.4.11.3-1)

| |
|---|
| Derivation path: 36.508 [6], Table 4.7F.1-5B. |
|---|

Table 5.4.11.4-3: PC5_DISCOVERY (step 3b3 Table 5.4.11.3-1)

| |
|---|
| Derivation path: 36.508 [6], Table 4.7F.1-5C. |
|---|

5.4.12 Generic Test Procedure for MCPTT communication over MBMS

5.4.12.1 Initial conditions

System Simulator:

- SS (MCPTT server)
- SS E-UTRA
 - E-UTRA related parameters are set to the default parameters for the basic single cell environment, as defined in TS 36.508 [6] subclause 4.4, unless otherwise specified in the test case.
 - MBSFNAreaConfiguration as defined in TS 36.508[6] table 4.6.1-4A is transmitted on MCCH

IUT:

- UE (MCPTT client):
 - E-UTRAN UE supporting MBMS services. The UE has performed the Generic Test Procedure for MCPTT UE registration as specified in subclause 5.4.2 and is in E-UTRA Registered, Idle Mode state. The UE is made interested in receiving MBMS service in the PLMN of Cell 1 with MBMS Service ID 0.
 - Detailed initial conditions for the UE (MCPTT client) shall be specified in the TC referring to the present procedure.

5.4.12.2 Definition of system information messages

The E-UTRA default system information messages as defined in TS 36.508 [6] are used. System information combination 15 as defined in TS 36.508[6] subclause 4.4.3.1 is used in the E-UTRA cell.

5.4.12.3 Procedure

Table 5.4.12.3-1: MCPTT communication over MBMS

| St | Procedure | Message Sequence | |
|----|--|------------------|-------------------------------|
| | | U - S | Message |
| 1 | SS transmits <i>MBSFNAreaConfiguration</i> message | <-- | <i>MBSFNAreaConfiguration</i> |
| 2 | Wait for a period equal to the MCCH modification period for the UE to receive <i>MBSFNAreaConfiguration</i> message. | - | - |
| - | EXCEPTION: Step 3 is repeated continuously to carry the relevant MCPTT protocol data units provided by the higher layers. | - | - |
| 3 | The SS transmits 1 MBMS Packet on the MTCH in the next MCH Scheduling Period. NOTE: Which MCPTT protocol data units are sent and at which time is defined in the test case using the present generic procedure. | <-- | MBMS Packet |

5.4.12.4 Specific message contents

None.

5.5 Default message and other information elements content**5.5.1 General**

The following conditions apply throughout subclause 5.5:

Table 5.5.1-1: Conditions

| Condition | Explanation |
|-----------------|--|
| ON-NETWORK | Message/IE sent only in on-network scenario. |
| OFF-NETWORK | Message/IE sent only in off-network scenario. |
| PRIVATE-CALL | Message/IE sent only as part of a Private call handling. |
| GROUP-CALL | Message/IE sent only as part of a Group call handling. |
| EMERGENCY-CALL | Message/IE sent only as part of an Emergency call handling. |
| IMPERIL-CALL | Message/IE sent only as part of an Imminent Peril call handling. |
| EMERGENCY-ALERT | Message/IE sent only as part of an Emergency Alert |

5.5.2 Default SIP message and other information elements

5.5.2.1 SIP ACK

5.5.2.1.1 SIP ACK from the UE

Table 5.5.2.1.1-1: SIP ACK from the UE

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.2, A.2.2.4.2 | | | | |
|---|---------------------------------|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] | |
| Method | "ACK" | | | |
| Request-URI | px_MCPTT_Server_A_URI | | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bk' | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | URIs of the Record-Route header sent to the UE in 183, 180 or 200 response (whichever response used for request message to be acknowledged and contained Record-Route header) in reverse order | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | Local tag of the dialog ID | | |
| To | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "2" | Remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | same value as in INVITE message | | | |
| Cseq | | | RFC 3261 [22] | |
| value | same value as in INVITE message | | | |
| method | "ACK" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.1.2 SIP ACK from the SS

Table 5.5.2.1.2-1: SIP ACK from the SS

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.2, A.2.2.4.2 | | | | |
|---|----------------------------|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] | |
| Method | "ACK" | | | |
| Request-URI | px_MCPTT_Client_B_ID | | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Client_B_ID:14000 | | | |
| via-branch | "z9hG4bkmcptss2" | Value starting with 'z9hG4bk' | | |
| Route | not present | | RFC 3261 [22] | |
| route-param | not present | | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "1" | Local tag of the dialog ID | | |
| To | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "2" | Remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | px_MCPTT_CT_call_ID | Same value as in request message | | |
| Cseq | | | RFC 3261 [22] | |
| value | "4711" | Same value as in request message | | |
| method | "ACK" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | "70" | The recommended initial value is 70 in RFC 3261. | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.2 SIP BYE

5.5.2.2.1 SIP BYE from the UE

Table 5.5.2.2.1-1: SIP BYE from the UE

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.3, A.2.2.4.3 | | | | |
|---|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] | |
| Method | "BYE" | | | |
| Request-URI | px_MCPTT_session_A_ID | The URI of the MCPTT session identity to leave | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | same value as in INVITE message | | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | URIs of the Record-Route header response in reverse order | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| tag | "1" | Local tag of the dialog ID | | |
| To | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| tag | "2" | Remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | same value as in INVITE message | | | |
| CSeq | | | RFC 3261 [22] | |
| value | value of CSeq sent by the endpoint within its previous request in the same dialog but increased by one | | | |
| method | "BYE" | | | |
| Require | | | RFC 3261 [22] RFC 3329 [50] | |
| option-tag | "sec-agree" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [50] | |
| option-tag | "sec-agree" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| P-Access-Network-Info | | | RFC 7315 [52] RFC 7913 [51] | |
| access-net-spec | any allowed value | Access network technology and, if applicable, the cell ID | | |
| P-Asserted-Identity | | | RFC 3325 [32] | |
| addr-spec | px_MCPTT_User_A_ID | The URI of the UE | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.2.2 SIP BYE from the SS

Table 5.5.2.2.2-1: SIP BYE from the SS

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.3, A.2.2.4.3 | | | | |
|---|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] | |
| Method | "BYE" | | | |
| Request-URI | px_MCPTT_session_A_ID | The URI of the MCPTT session identity to leave | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | same value as in INVITE message | | | |
| via-branch | "z9hG4bKmcpttss3" | Value starting with 'z9hG4bK' | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | URIs of the Record-Route header response in reverse order | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| tag | "1" | local tag of the dialog ID | | |
| To | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| tag | "2" | remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | same value as in INVITE message | | | |
| CSeq | | | RFC 3261 [22] | |
| value | value of CSeq sent by the endpoint within its previous request in the same dialog but increased by one | | | |
| method | "BYE" | | | |
| Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Max-Forwards | | | RFC 3261[22] | |
| value | "70" | The recommended initial value is 70 in RFC 3261. | | |
| P-Access-Network-Info | Not present | | RFC 7315 [52] RFC 7913 [51] | |
| access-net-spec | | | | |
| P-Asserted-Identity | | | RFC 3325 [32] | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.3 SIP CANCEL

Table 5.5.2.3-1: SIP CANCEL

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.4, A.2.2.4.4 | | | | |
|---|---|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] | |
| Method | "CANCEL" | | | |
| Request-URI | same value as in the INVITE being cancelled | | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| via-param | same value as in the INVITE being cancelled | | | |
| From | | | RFC 3261 [22] | |
| addr-spec | same value as in the INVITE being cancelled | | | |
| tag | same value as in the INVITE being cancelled | | | |
| To | | | RFC 3261 [22] | |
| addr-spec | same value as in the INVITE being cancelled | | | |
| Call-ID | | | RFC 3261 [22] | |
| Callid | same value as in the INVITE being cancelled | | | |
| Session-ID | | | RFC 3261 [22] | |
| sess-id | same value as in the INVITE being cancelled | | | |
| CSeq | | | RFC 3261 [22] | |
| value | same value as in the INVITE being cancelled | | | |
| Method | "CANCEL" | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.4 SIP INFO

Table 5.5.2.4-1: SIP INFO

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.6, A.2.2.4.6 | | | | |
|---|--|--|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| Method | "INFO" | | | |
| Request-URI | px_MCPTT_Client_A_ID | | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| Call-ID | | | RFC 3261 [22] | |
| Callid | same value as in the INVITE | | | |
| CSeq | | | RFC 3261 [22] | |
| value | value of CSeq sent by the SS within its previous request in the same dialog but increased by one | | | |
| Method | "INFO" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| Content-Length | | | RFC 3261 [22] | |
| value | length of message body | | | |
| Message Body | any allowed value | | | |

5.5.2.5 SIP INVITE

5.5.2.5.1 SIP INVITE from the UE

Table 5.5.2.5.1-1: SIP INVITE from the UE

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|--------------------------------|---|---|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "INVITE" | | | |
| Request-URI | px_MCPTT_Server_A_URI | The public service identity identifying the participating MCPTT function serving the MCPTT user | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | <sip:SS P-CSCF address: protected server port of SS;lr>, <sip:px_scscf;lr> | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | any allowed value | | | |
| CSeq | | | RFC 3261 [22] | |
| value | any allowed value | | | |
| method | "INVITE" | | | |
| Supported | | | RFC 3261 [22] | |
| option-tag | "timer" | | | |
| Session-Expires | | | RFC 4028 [30] | |
| generic-param | any allowed value | | | |
| P-Early-Media | | | RFC 5009 [60] | |
| em-param | "inactive" | | | |
| Require | | | RFC 3261 [22] RFC 3312 [56] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| P-Asserted-Identity | | | RFC 3325 [32] | |
| addr-spec | px_MCPTT_User_A_ID | | | |
| Contact | | | RFC 3261 [22] RFC 3840 [33] | |

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|---|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| addr-spec | "sip:[5555::aaa:bbb:ccc:eee]" | SIP URI with IP address or FQDN and protected server port of UE | | |
| | px_MCPTT_Client_A_ID:"protected server port as chosen by the UE | | | |
| feature-param | "+g.3gpp.mcptt" | This media feature tag when used in a SIP request or a SIP response indicates that the function sending the SIP message supports Mission Critical Push To Talk (MCPTT) communication. | | |
| feature-param | "+g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | This URN indicates that the device has the capabilities to support the mission critical push to talk (MCPTT) service. | | |
| feature-param | "audio" | This feature tag indicates that the device supports audio as a streaming media type. | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| P-Access-Network-Info | | | RFC 7315 [52] | |
| access-net-specs | any allowed value | Access network technology and, if applicable, the cell ID | | |
| Accept | | | RFC 3261 [22] | |
| media-range | "application/sdp, application/vnd.3gpp.mcptt-info+xml" | | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | "urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| P-Preferred-Identity | | | RFC 3325 [32] | |
| PPreferredID-value | px_MCPTT_User_A_ID | Contains the public user identity of the MCPTT user | | |
| Accept-Contact | | TS 24.379 [9] subclause 10.1.1.2.1.1 part 5 requires an Accept-Contact header | RFC 3841 [29] | |
| ac-value | "+g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |
| Accept-Contact | | TS 24.379 [9] subclause 10.1.1.2.1.1 part 7 requires an Accept-Contact header in addition to the one above | RFC 3841 [29] | |
| ac-value | "+g.3gpp.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|---------------------------------------|---|---|--------------------------------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Answer-Mode | | | RFC 5373 [34] | |
| answer-mode-value | "Auto" | | | |
| Resource-Priority | | | RFC 4412 [40] RFC 7134 [57] RFC 8101 [45] | EMERGENCY-CALL or IMPERIL-CALL |
| r-value | "mcpttp.value" | "value" set to the value of the <resource-priority-namespace> element contained in the <emergency-resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration documents | | EMERGENCY-CALL |
| r-value | "mcpttq.value" | "value" set to the value of the <resource-priority-priority> element contained in the <emergency-resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration document | | EMERGENCY-CALL |
| r-value | "mcpttp.value" | "value" set to the value of the <resource-priority-namespace> element contained in the <imminent-peril-resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration documents | | IMPERIL-CALL |
| r-value | "mcpttq.value" | "value" set to the value of the <resource-priority-priority> element contained in the <imminent-peril-resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration document | | IMPERIL-CALL |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | |
| Content-Length | length of message body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/sdp" | | RFC 4566 [27] | |
| SDP Message | As described in Table 5.5.3.1.1-1 | | | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-info+xml" | | TS 24.379 [9] clause F.1 | |
| MCPPT-Info | As described in Table 5.5.3.2.1-1 | | | |
| MIME-Content-Type | "application/resource-lists" | | RFC 5366 [35] | PRIVATE-CALL |
| Resource-lists | As described in Table 5.5.3.3.1-1 | | | |

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|--|---------|--------------------------|--------------------------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-location-info+xml" | | TS 24.379 [9] clause F.3 | EMERGENCY-CALL or IMPERIL-CALL |
| Location-info | As described in Table 5.5.3.4.1-1 | | | |

5.5.2.5.2 SIP INVITE from the SS

Table 5.5.2.5.2-1: SIP INVITE from the SS

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|-------------------------------|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "INVITE" | | | |
| Request-URI | px_MCPTT_Client_A_ID | | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | Via header for the P-CSCF that communicates with the called party | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_PCSCF_A_URI:4060;lr" | The SS P-CSCF address and the SS protected server port | | |
| via-branch | "z9hG4bKmcpttss1" | Value starting with 'z9hG4bK' | | |
| Via | | Via header for the other endpoint (the caller) | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Client_B_ID:14000" | | | |
| via-branch | "z9hG4bKmcpttss4" | Value starting with 'z9hG4bK' | | |
| Record-Route | | The record-route corresponding to the top Via header | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI:4060;lr" | <sip:SS P-CSCF address: protected server port of SS;lr> | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "2" | | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | px_MCPTT_CT_call_ID | | | |
| CSeq | | | RFC 3261 [22] | |
| value | "4711" | | | |
| method | "INVITE" | | | |
| Supported | | | RFC 3261 [22] | |
| option-tag | "100rel" | This option tag indicates that the UA can send or receive reliable provisional responses. | | |

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|--|--|---|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| option-tag | "timer" | TS 24.379 [9] subclause 6.3.2.2.3 requires this option tag | | |
| option-tag | "tdialog" | TS 24.379 [9] subclause 6.3.2.2.3 requires this option tag | | |
| option-tag | "norefersub" | TS 24.379 [9] subclause 6.3.2.2.3 requires this option tag | | |
| P-Called-Party-ID | | | RFC 7315 [52] | |
| called-pty-id-spec | px_MCPTT_Client_A_ID | | | |
| Session-Expires | | | RFC 4028 [30] | |
| generic-param | "1800" | The recommended initial value is 1800 in RFC 4028 [30]. | | |
| P-Early-Media | | | RFC 5009 [60] | |
| em-param | "inactive" | | | |
| Require | | | RFC 3261 [22] RFC 3312 [56] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| P-Asserted-Identity | | | RFC 3325 [32] | |
| addr-spec | px_MCPTT_User_B_ID | | | |
| Contact | | | RFC 3261 [22] RFC 3840 [33] | |
| addr-spec | px_MCPTT_Client_B_ID":14000" | SIP URI with IP address or FQDN and protected server port of the calling UE | | |
| feature-param | "+g.3gpp.mcptt" | This media feature tag when used in a SIP request or a SIP response indicates that the function sending the SIP message supports Mission Critical Push To Talk (MCPTT) communication. | RFC 3840 [33] clause 9 | |
| feature-param | "+g.3gpp.icsi- ref=urn:urn-7:3gpp- service.ims.icsi.mcptt" | This URN indicates that the device has the capabilities to support the mission critical push to talk (MCPTT) service. | RFC 3840 [33] clause 9 | |
| feature-param | "audio" | This feature tag indicates that the device supports audio as a streaming media type. | RFC 3840 [33] subclause 10.1 | |
| feature-param | "isfocus" | TS 24.379 [9] subclause 10.1.1.3.2 requires the "isfocus" media feature tag or else the MCPTT function will reject the SIP INVITE | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | "70" | The recommended initial value is 70 in RFC 3261 [22]. | | |

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|--|--|---|---|
| Information Element | Value/remark | Comment | Reference | Condition |
| P-Access-Network-Info | Not present | | RFC 7315 [52] | |
| access-net-specs | | | | |
| Accept | | | RFC 3261 [22] | |
| media-range | "application/sdp, application/vnd.3gpp.m cptt-info+xml" | | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | "urn:urn-7:3gpp- service.ims.icsi.mcptt" | | | |
| P-Preferred-Identity | | | RFC 3325 [32] | |
| PPreferredID-value | px_MCPTT_User_B_ID | Contains the public user identity of the MCPTT user | | |
| Accept-Contact | | TS 24.379 [9] subclause 10.1.1.2.1.1 part 5 requires an Accept-Contact header | RFC 3841 [29] | |
| ac-value | "+g.3gpp.icsi- ref=urn:urn-7:3gpp- service.ims.icsi.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |
| Accept-Contact | | TS 24.379 [9] subclause 10.1.1.2.1.1 part 7 requires an Accept-Contact header in addition to the one above | RFC 3841 [29] | |
| ac-value | "+g.3gpp.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |
| Answer-Mode | | | RFC 5373 [34] | |
| answer-mode-value | "Auto" | | | |
| Resource-Priority | | | RFC 4412 [40] RFC 7134 [57] RFC 8101 [45] | EMERGEN CY-CALL or IMMPERIL -CALL |
| r-value | "mcpttp.value" | "value" set to the value of the <resource- priority-namespace> element contained in the <emergency- resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration documents | | EMERGEN CY-CALL |
| r-value | "mcpttq.value" | "value" set to the value of the <resource- priority-priority> element contained in the <emergency- resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration document | | EMERGEN CY-CALL |

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7, A.2.2.4.7 | | | | |
|---|--|---|--------------------------|--------------------------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| r-value | "mcpttp.value" | "value" set to the value of the <resource-priority-namespace> element contained in the <imminent-peril-resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration documents | | IMMPERIL-CALL |
| r-value | "mcpttq.value" | "value" set to the value of the <resource-priority-priority> element contained in the <imminent-peril-resource-priority> element contained in the <OnNetwork> element of the MCPTT service configuration document | | IMMPERIL-CALL |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | |
| Content-Length | length of message body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/sdp" | | | |
| SDP Message | As described in Table 5.5.3.1.2-1 | | RFC 4566 [27] | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-info+xml" | | | |
| MCPPT-Info | As described in Table 5.5.3.2.2-1 | | | |
| MIME-Content-Type | "application/resource-lists" | | RFC 5366 [35] | PRIVATE-CALL |
| Resource-lists | As described in Table 5.5.3.3.2-1 | | | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-location-info+xml" | | TS 24.379 [9] clause F.3 | EMERGENCY-CALL or IMPERIL-CALL |
| Location-info | As described in Table 5.5.3.4.1-1 | | | |

5.5.2.6 SIP re-INVITE

5.5.2.6.1 SIP re-INVITE from the UE

See Table 5.5.2.5.1-1.

5.5.2.6.1 SIP re-INVITE from the SS

See Table 5.5.2.5.2-1.

5.5.2.7 SIP MESSAGE

5.5.2.7.1 SIP MESSAGE from the UE

Table 5.5.2.7.1-1: SIP MESSAGE

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7a, A.2.2.4.7a | | | | |
|---|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "MESSAGE" | | | |
| Request-URI | px_MCPTT_Server_A_URI | The public service identity identifying the originating participating MCPTT function serving the MCPTT user | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| tag | any allowed value | | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | any allowed value | value not checked, but stored for later reference | | |
| Cseq | | | RFC 3261 [22] | |
| value | any allowed value | | | |
| method | "MESSAGE" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| P-Access-Network-Info | | | RFC 7315 [52] | |
| access-net-spec | any allowed value | Access network technology and, if applicable, the cell ID | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | < sip:SS P-CSCF address:protected server port of P-CSCF;/r>, < sip:px_scscf;/r> | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | "urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | |
| Content-Length | length of message body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-info+xml" | | TS 24.379 [9] clause F.1 | |
| MCPPT-Info | As described in Table 5.5.3.2.1-1 | | | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-affiliation-command+xml" | | TS 24.379 [9] clause F.4 | |
| MCPPT-Affiliation-Command | As described in Table 5.5.3.7-1 | | | |

5.5.2.7.2 SIP MESSAGE from the SS

Table 5.5.2.7.2-1: SIP MESSAGE from the SS

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7a, A.2.2.4.7a | | | | |
|---|---|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "MESSAGE" | | | |
| Request-URI | px_MCPTT_Client_A_ID | The public service identity identifying the originating participating MCPTT function serving the MCPTT user | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | Via header for the P-CSCF that communicates with the called party | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_PCSCF_A_URI":4060;lr" | The SS P-CSCF address and the SS protected server port | | |
| via-branch | "z9hG4bKmcptts7" | Value starting with 'z9hG4bK' | | |
| Via | | Via header for the other endpoint (the caller) | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Client_B_ID":14000" | | | |
| via-branch | "z9hG4bKmcptts8" | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "2" | | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | px_MCPTT_CT_call_ID | | | |
| Cseq | | | RFC 3261 [22] | |
| value | "4711" | | | |
| method | "MESSAGE" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | "70" | The recommended initial value is 70 in RFC 3261. | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | <sjp:SS P-CSCF address:protected server port of P-CSCF;/r>, <sjp:px_scscf;/r> | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | "urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |

| Derivation Path: TS 24.229 [16], subclause A.2.1.4.7a, A.2.2.4.7a | | | | |
|---|--|---------|--------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | |
| Content-Length | length of message body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-info+xml" | | TS 24.379 [9] clause F.1 | |
| MCPPT-Info | As described in Table 5.5.3.2.1-1 | | | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-affiliation-command+xml" | | TS 24.379 [9] clause F.4 | |
| MCPPT-Affiliation-Command | As described in Table 5.5.3.7-1 | | | |

5.5.2.8 SIP NOTIFY

This message is sent by the SS.

Table 5.5.2.8-1: SIP NOTIFY

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.8, A2.2.4.8 | | | | |
|---|--|-------------------------------|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] | |
| Method | "NOTIFY" | | | |
| Request-URI | px_MCPTT_Client_A_ID | The URI of the UE | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_PCSCF_A_URI":4060;lr" | | | |
| via-branch | "z9hG4bKmcpttss5" | Value starting with 'z9hG4bK' | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Server_A_URI":14000" | Home domain name | | |
| via-branch | "z9hG4bKmcpttss6" | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | same value as used in the To header of the 200 response to the SUBSCRIBE for message | | | |
| To | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | same value as received in From tag of SUBSCRIBE for message | | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | same as value received in SUBSCRIBE message | | | |
| Cseq | | | RFC 3261 [22] | |
| value | value of CSeq sent by the SS within its previous request in the same dialog but increased by one | | | |

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.8, A2.2.4.8 | | | | |
|---|--|--|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| method | "NOTIFY" | | | |
| Contact | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| feature-param | "+g.3gpp.mcptt" | | | |
| feature-param | "+g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| Event | | | RFC 6665 [39] RFC 3842 [61] | |
| event-type | "presence" | | | |
| | "xcap-diff" | | | CONFIG |
| Max-Forwards | | | RFC 3261 [22] | |
| value | "70" | The recommended initial value is 70 in RFC 3261. | | |
| Subscription-State | | | RFC 6665 [39] | |
| substate-value | "active" | | | |
| expires | "7200" | | | |
| Content-Type | "application/pidf+xml" | | RFC 3261 [22] RFC 3842 [61] | |
| Content-Length | length of message-body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/pidf+xml" | | TS 24.379 [9] subclause 9.3.1 | |
| PIDF | As described in Table 5.5.3.5-1 | | | |
| MIME-Content-Type | "application/pidf+xml" | | TS 24.379 [9] subclause 9.3.1 | CONFIG |
| xcap_root | "uri:xcap_root.mcptt-op.gov:resource-lists" | XCAP root uri of UE configuration documents | TS 24.481 [11] | |

5.5.2.9 SIP OPTIONS

Table 5.5.2.9-1: SIP OPTIONS

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.9, A2.2.4.9 | | | | |
|---|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| Method | "OPTIONS" | | | |
| Request-Disposition | px_MCPTT_Client_A_ID | | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | | |
| sent-protocol | "SIP/2.0/UDP" | | RFC 3261 [22] RFC 3581 [55] | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| From | | | | |
| addr-spec | px_MCPTT_Client_A_ID | | RFC 3261 [22] | |
| tag | "1" | | | |
| To | | | | |
| addr-spec | px_MCPTT_Server_A_URI | | RFC 3261 [22] RFC 5031 [54] | |
| Call-ID | | | | |
| Callid | same value as in the INVITE | | RFC 3261 [22] | |
| CSeq | | | | |
| value | value of CSeq sent by the SS within its previous request in the same dialog but increased by one | | RFC 3261 [22] | |
| Method | "INFO" | | | |
| Contact | | | | |
| addr-spec | "sip:[5555::aaa:bbb:ccc:eee]" | SIP URI with IP address or FQDN and protected server port of UE | RFC 3261 [22] RFC 3840 [33] | |
| | px_MCPTT_Client_A_ID:"protected server port as chosen by the UE | | | |
| feature-param | "+g.3gpp.mcptt" | This media feature tag when used in a SIP request or a SIP response indicates that the function sending the SIP message supports Mission Critical Push To Talk (MCPTT) communication. | | |
| feature-param | "+g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | This URN indicates that the device has the capabilities to support the mission critical push to talk (MCPTT) service. | | |
| feature-param | "audio" | This feature tag indicates that the device supports audio as a streaming media type. | | |
| Accept | | | | |
| media-range | "application/sdp" | | | |
| Max-Forwards | | | | |
| | | | RFC 3261 [22] | |

| | | | | |
|-----------------------|-------------------|---|---------------|--|
| value | any allowed value | Non-zero value | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.10 SIP PRACK

5.5.2.10.1 SIP PRACK from the UE

Table 5.5.2.10.1-1: SIP PRACK from the UE

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.10, A2.2.4.10 | | | | |
|---|--|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | RFC 3261 [22] | |
| Method | "PRACK" | | | |
| Request-URI | px_MCPTT_Server_A_URI | The same URI value as the recipient of PRACK has earlier sent in its Contact header within the same dialog | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | same value as in INVITE message | | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | URIs of the Record-Route header of 183 response (or 180 when applicable) in reverse order | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | Local tag of the dialog ID | | |
| To | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "2" | Remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | same value as in INVITE message | | | |
| CSeq | | | RFC 3261 [22] | |
| value | value of CSeq sent by the endpoint within its previous request in the same dialog but increased by one | | | |
| method | "PRACK" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| RAck | | | RFC 3261 [22] | |
| response-num | same value as in RSeq header of the reliable response | | | |
| cseq-num | same value as in CSeq of reliable response | | | |
| method | same value as in CSeq of reliable response | | | |
| P-Access-Network-Info | | | RFC 7315 [52] | |

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.10, A2.2.4.10 | | | | |
|---|-------------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| access-net-spec | any allowed value | Access network technology and, if applicable, the cell ID | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.10.2 SIP PRACK from the SS

Table 5.5.2.10.2-1: SIP PRACK from the SS

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.10, A2.2.4.10 | | | | |
|---|---|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | RFC 3261 [22] | |
| Method | "PRACK" | | | |
| Request-URI | px_MCPTT_Client_A_ID | The same URI value as the recipient of PRACK has earlier sent in its Contact header within the same dialog | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | Same value as in INVITE message | | | |
| via-branch | "z9hG4bKmcptts7" | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "1" | Local tag of the dialog ID | | |
| To | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "2" | Remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | px_MCPTT_CT_call_ID | | | |
| CSeq | | | RFC 3261 [22] | |
| value | "4712" | Value of CSeq sent by the endpoint within its previous request in the same dialog but increased by one | | |
| method | "PRACK" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | "70" | The recommended initial value is 70 in RFC 3261. | | |
| Rack | | | RFC 3261 [22] | |
| response-num | same value as in RSeq header of the reliable response | | | |
| cseq-num | same value as in CSeq of reliable response | | | |
| method | same value as in CSeq of reliable response | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.11 SIP PUBLISH

This message is sent by the UE.

Table 5.5.2.11-1: SIP PUBLISH

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.10A, A.2.2.4.10A | | | | |
|--|---|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "PUBLISH" | | | |
| Request-URI | px_MCPTT_Server_A_URI | The public service identity identifying the originating participating MCPTT function serving the MCPTT user | | |
| SIP-Version | "SIP/2.0" | | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | < sip:SS P-CSCF address:protected server port of P-CSCF;lr>, < sip.px_scscf;lr> | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| Expires | | | RFC 3261 [22] RFC 3903 [43] | |
| delta-seconds | "4294967295" | | | |
| Cseq | | | RFC 3261 [22] | |
| value | any allowed value | | | |
| method | "PUBLISH" | | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | any allowed value | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | | | |
| P-Access-Network-Info | | | RFC 7315 [52] RFC 7913 [51] | |
| access-net-spec | any allowed value | Access network technology and, if applicable, the cell ID | | |
| Event | | | RFC 3903 [43] | |
| event-type | "presence" | | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | "urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| Accept | | | RFC 3261 [22] | |
| media-range | "application/pdf+xml" | | | |
| P-Asserted-Identity | | | RFC 3325 [32] | |
| addr-spec | px_MCPTT_User_A_ID | | | |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | |
| Content-Length | length of message body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-info+xml" | | TS 24.379 [9] clause F.1 | |
| MCPPT-Info | As described in Table 5.5.3.2.1-1 | | | |

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.10A, A.2.2.4.10A | | | | |
|--|------------------------------------|--------------------------------------|-------------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| MIME-Content-Type | "application/pidf+xml" | | TS 24.379 [9] subclause 9.3.1 | |
| PIDF | As described in Table 5.5.3.5-1 | | | |
| MIME-Content-Type | "application/mikey" | | RFC 3830 [24] | CONFIG |
| mikey | As described in Table 5.5.9.1-1 | MIKEY message, containing the CSK | TS 33.179 [15] | |

5.5.2.12 SIP REFER

This message is sent by the UE.

Table 5.5.2.12-1: SIP REFER

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.11, A.2.2.4.11 | | | | |
|--|--|--|---|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "REFER" | | | |
| Request-URI | px_MCPTT_session_B_ID | The session identity of the pre-established session | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value" | IP address or FQDN and protected server port of the UE | | |
| via-branch | | Value starting with 'z9hG4bK' | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | < sip:SS P-CSCF address: protected server port of SS;lr>, < sip.px_scscf;lr> | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| tag | "1" | Local tag of the dialog ID | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| tag | "2" | Remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | any allowed value | Value different to that received in REGISTER message | | |
| CSeq | | | RFC 3261 [22] | |
| value | value of CSeq sent by the UE within its previous request in the same dialog but increased by one | | | |
| method | "REFER" | | | |
| P-Preferred-Identity | | | RFC 3325 [32] | |
| PPreferredID-value | px_MCPTT_User_A_ID | The public user identity | | |
| Supported | | | RFC 3261 [22] RFC 6442 [62] RFC 4488 [36] | |
| option-tag | "norefersub" | | | |
| Refer-Sub | | | RFC 4488 [36] | |
| refer-sub-value | "false" | | | |
| Target-Dialog | | | RFC 4538 [37] | |
| callid | px_MCPTT_session_B_ID | The session identity of the pre-established session | | |
| Require | | | RFC 3261 [22] RFC 3312 [56] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| option-tag | "multiple-refer" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Contact | | | RFC 3261 [22] | |

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.11, A.2.2.4.11 | | | | |
|--|--|---|--------------------------|--------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| addr-spec | "sip:[5555::aaa:bbb:ccc:eee]" | SIP URI with IP address or FQDN and protected server port of UE | | |
| | px_MCPTT_Client_A_ID:"protected server port as chosen by the UE | | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "audio" | | | |
| Refer-To | | | RFC 3515 [38] | |
| addr-spec | a Content-ID ("cid") Uniform Resource Locator (URL) as specified in IETF RFC 2392 that points to an application/resource-lists MIME body as specified in IETF RFC 5366 | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| P-Access-Network-Info | | | RFC 7315 [52] | |
| access-net-specs | any allowed value | Access network technology and, if applicable, the cell ID | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | "urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| Accept-Contact | | Contains the g.3gpp.icsi-ref media feature tag | RFC 3841 [29] | |
| ac-value | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |
| Accept-Contact | | Contains the g.3gpp.mcptt feature tag | RFC 3841 [29] | |
| ac-value | "g.3gpp.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | |
| Content-Length | length of message body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/sdp" | | RFC 4566 [27] | |
| SDP Message | As described in Table 5.5.3.1.1-1 | | | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-info+xml" | | TS 24.379 [9] clause F.1 | |
| MCPPT-Info | As described in Table 5.5.3.2.1-1 | | | |
| MIME-Content-Type | "application/resource-lists" | | RFC 5366 [35] | PRIVATE-CALL |
| Resource-lists | As described in Table 5.5.3.3.1-1 | | | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-location-info+xml" | | TS 24.379 [9] clause F.3 | |

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.11, A.2.2.4.11 | | | | |
|--|-----------------------------------|---------|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Location-info | As described in Table 5.5.3.4.1-1 | | | |

5.5.2.13 SIP REGISTER

This message is sent by the UE.

Table 5.5.2.13-1: SIP REGISTER

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.12, A.2.2.4.12 | | | | |
|--|--|--|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] | |
| Method | "REGISTER" | | | |
| Request-URI | px_MCPTT_Server_A_URI | The public service identity of the participating MCPTT function serving the MCPTT user | | |
| SIP-Version | "SIP/2.0" | | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | | | |
| To | | | | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| P-Preferred-Identity | | | RFC 3325 [32] | |
| PPreferredID-value | px_MCPTT_User_A_ID | | | |
| Contact | | | RFC 3261 [22] | |
| addr-spec | "sip:[5555::aaa:bbb:ccc:eee]" | SIP URI with IP address or FQDN and protected server port of UE | | |
| | px_MCPTT_Client_A_ID:"protected server port as chosen by the UE" | | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "audio" | | | |
| Accept-Contact | | Contains the g.3gpp.icsi-ref media feature tag | RFC 3841 [29] | |
| ac-value | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |
| Accept-Contact | | Contains the g.3gpp.mcptt feature tag | RFC 3841 [29] | |
| ac-value | "g.3gpp.mcptt" | | | |
| req-param | "require" | | | |
| explicit-param | "explicit" | | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | 'urn:urn-7:3gpp-service.ims.icsi.mcptt' | | | |
| Expires | | | RFC 3261 [22] RFC 3903 [43] | |
| value | "600000" | | | |
| Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |

| | | | | |
|--------------------------|-----------------------------------|-----------------------------------|---|--------|
| Supported | | | RFC 3261 [22] RFC 6442 [62] RFC 4488 [36] | |
| option-tag | "timer" | | | |
| Cseq | | | RFC 3261 [22] | |
| value | any allowed value | | | |
| method | "REGISTER" | | | |
| Session-Expires | | | RFC 4028 [30] | |
| generic-param | any allowed value | | | |
| Content-Type | "application/sdp" | | RFC 3261 [22] RFC 3842 [61] | |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | CONFIG |
| Content-Length | length of message-body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/sdp" | | RFC 4566 [27] | |
| SDP Message | As described in Table 5.5.3.1.1-1 | | | |
| MIME-Content-Type | | | | CONFIG |
| MCPPT-Info | As described in Table 5.5.3.2.1-1 | | | |
| MIME-Content-Type | "application/mikey" | | RFC 3830 [24] | CONFIG |
| mikey | As described in Table 5.5.9.1-1 | MIKEY message, containing the CSK | TS 33.179 [15] | |

5.5.2.14 SIP SUBSCRIBE

This message is sent by the UE.

Table 5.5.2.14-1: SIP SUBSCRIBE

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.13, A.2.2.4.13 | | | | |
|--|---|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "SUBSCRIBE" | | | |
| Request-URI | px_MCPTT_Server_A_URI | The public service identity identifying the originating participating MCPTT function serving the MCPTT user | | |
| SIP-Version | "SIP/2.0" | | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | <sip:SS P-CSCF address:protected server port of P-CSCF;lr>, <sip:px_scscf;lr> | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| Contact | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "audio" | | | |
| Expires | | | RFC 3261 [22] RFC 3903 [43] | |
| value | "4294967295" | | | |
| Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Cseq | | | RFC 3261 [22] | |
| value | any allowed value | | | |
| method | "SUBSCRIBE" | | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | any allowed value | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| P-Access-Network-Info | | | RFC 7315 [52] RFC 7913 [51] | |
| access-net-spec | any allowed value | Access network technology and, if applicable, the cell ID | | |
| Event | | | RFC 6665 [39] | |
| event-type | "presence" | | | |
| | "xcap-diff" | | | CONFIG |
| Accept | | | RFC 3261 [22] | |

| Derivation Path: TS 24.229 [16] subclause A.2.1.4.13, A.2.2.4.13 | | | | |
|--|---|-----------------------------------|-------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| media-range | "application/pidf+xml" | | | |
| P-Preferred-Service | | | RFC 6050 [31] | |
| Service-ID | "urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| P-Asserted-Identity | | | RFC 3325 [32] | |
| addr-spec | px_MCPTT_User_A_ID | | | |
| Content-Type | "multipart/mixed" | | RFC 5621 [58] | |
| Content-Length | length of message body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/vnd.3gpp.mcptt-info+xml" | | TS 24.379 [9] clause F.1 | |
| MCPPT-Info | As described in Table 5.5.3.2.1-1 | | | |
| MIME-Content-Type | "application/simple-filter+xml" | | TS 24.379 [9] subclause 9.3.2 | |
| SIMPLE-FILTER | As described in Table 5.52.22.6-1 | | | |
| MIME-Content-Type | "application/resource-lists+xml" | | | CONFIG |
| Resource-lists | As described in Table 5.5.3.3.1-1 | | | |
| MIME-Content-Type | "application/mikey" | | RFC 3830 [24] | CONFIG |
| mikey | As described in Table 5.5.9.1-1 | MIKEY message, containing the CSK | TS 33.179 [15] | |

5.5.2.15 SIP UPDATE

5.5.2.15.1 SIP UPDATE from the UE

Table 5.5.2.15.1-1: SIP UPDATE from the UE

| Derivation Path: TS 24.229 [16] A.2.1.4.14, A.2.2.4.14 | | | | |
|--|---|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "UPDATE" | | | |
| Request-URI | px_MCPTT_Server_A_URI | The same URI value as the recipient of UPDATE has earlier sent in its Contact header within the same dialog | | |
| SIP-Version | 'SIP/2.0' | | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| Route | | | RFC 3261 [22] | |
| route-param | px_MCPTT_PCSCF_A_URI":4060;lr" | URIs of previous response in reverse order | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| tag | "1" | Local tag of the dialog ID | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| tag | "2" | Remote tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | any allowed value | | | |
| Contact | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_session_B_ID | The URI that identifies the pre-established session | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| feature-param | "audio" | | | |
| CSeq | | | RFC 3261 [22] | |
| value | any allowed value | | | |
| method | "UPDATE" | | | |
| Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Proxy-Require | | | RFC 3261 [22] RFC 3329 [53] | |
| option-tag | "sec-agree" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | any allowed value | Non-zero value | | |
| P-Access-Network-Info | | | RFC 7315 [52] RFC 7913 [51] | |
| access-net-spec | any allowed value | Access network technology and, if applicable, the cell ID | | |
| Content-Type | "application/sdp" | | RFC 5621 [58] | |
| Content-Length | length of message-body | | RFC 3261 [22] | |

| | | | | |
|--------------------------|-----------------------------------|--|---------------|--|
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/sdp" | | RFC 4566 [27] | |
| SDP Message | As described in Table 5.5.3.1.1-1 | | | |

5.5.2.15.2 SIP UPDATE from the SS

Table 5.5.2.15.2-1: SIP UPDATE from the SS

| Derivation Path: TS 24.229 [16] A.2.1.4.14, A.2.2.4.14 | | | | |
|--|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | RFC 3261 [22] RFC 5031 [54] | |
| Method | "UPDATE" | | | |
| Request-URI | px_MCPTT_Client_A_ID | The same URI value as the recipient of UPDATE has earlier sent in its Contact header within the same dialog | | |
| SIP-Version | 'SIP/2.0' | | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Server_A_URI":14000" | | | |
| via-branch | "z9hG4bkmcptss9" | Value starting with 'z9hG4bK' | | |
| From | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| tag | "2" | Remote tag of the dialog ID | | |
| To | | | RFC 3261 [22] RFC 5031 [54] | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| tag | "1" | Local tag of the dialog ID | | |
| Call-ID | | | RFC 3261 [22] | |
| callid | px_MCPTT_CT_call_ID | | | |
| Contact | | | RFC 3261 [22] | |
| addr-spec | px_MCPTT_session_B_ID | The URI that identifies the pre-established session | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| feature-param | "audio" | | | |
| CSeq | | | RFC 3261 [22] | |
| value | value of CSeq sent by the endpoint within its previous request in the same dialog but increased by one | | | |
| method | "UPDATE" | | | |
| Max-Forwards | | | RFC 3261 [22] | |
| value | "70" | The recommended initial value is 70 in RFC 3261 [22]. | | |
| Content-Type | "application/sdp" | | RFC 5621 [58] | |
| Content-Length | length of message-body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/sdp" | | RFC 4566 [27] | |
| SDP Message | As described in Table 5.5.3.1.1-1 | | | |

5.5.2.16 SIP 1xx

5.5.2.16.1 SIP 100 (Trying)

This message is sent by the UE or the SS.

Table 5.5.2.16.1-1: SIP 100 (Trying)

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "100" | | | |
| Reason-Phrase | "Trying" | | | |
| Via | | | | |
| via-param | same value as received in INVITE message | | | |
| From | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | same value as received in INVITE message | | | |
| To | | | | |
| addr-spec | same value as received in INVITE message | | | |
| Call-ID | | | | |
| callid | same value as received in INVITE message | | | |
| CSeq | | | | |
| value | same value as received in INVITE message | | | |
| Content-Length | | | | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.16.2 SIP 180 (Ringing)

5.5.2.16.2.1 SIP 180 (Ringing) from the UE

Table 5.5.2.16.2.1-1: SIP 180 (Ringing) from the UE

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "180" | | | |
| Reason-Phrase | "Ringing" | | | |
| Record-Route | | | | |
| rec-route | px_MCPTT_PCSCF_A_URI":4060;lr" | Same value as received in INVITE | | |
| Via | | | | |
| | | Via header for the P-CSCF that communicates with the called party. same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_PCSCF_A_URI":4060;lr" | The SS P-CSCF address and the SS protected server port | | |
| via-branch | "z9hG4bKmcptts1" | Value starting with 'z9hG4bK' | | |
| Via | | | | |
| | | Via header for the other endpoint (the caller). same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Client_B_ID":14000" | | | |
| via-branch | "z9hG4bKmcptts4" | Value starting with 'z9hG4bK' | | |
| From | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | same value as received in INVITE message | | | |
| To | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | "1" | | | |
| Contact | | | | |
| addr-spec | "sip:[5555::aaa:bbb:ccc:eee]" | SIP URI with IP address or FQDN and protected server port of UE | | |
| | px_MCPTT_Client_A_ID":protected server port as chosen by the UE | | | |
| feature-param | "audio" | | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| Supported | | | | |
| option-tag | "norefersub" | | | |
| Rseq | | | | |
| response-num | previous RSeq number sent in the same direction incremented by one | | | |
| Call-ID | | | | |
| callid | px_MCPTT_CT_call_ID | | | |
| CSeq | | | | |
| value | "4711" | | | |
| Content-Length | | | | |

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--------------|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.16.2.2 SIP 180 (Ringing) from the SS

Table 5.5.2.16.2.1-1: SIP 180 (Ringing) from the UE

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--|--|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "180" | | | |
| Reason-Phrase | "Ringing" | | | |
| Record-Route | | | | |
| rec-route | px_MCPTT_PCSCF_A_URI":4060;lr" | Same value as received in INVITE | | |
| Via | | | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | same value as received in INVITE | IP address or FQDN and protected server port of the UE | | |
| via-branch | same value as received in INVITE | Value starting with 'z9hG4bK' | | |
| From | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | "1" | | | |
| To | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | "2" | | | |
| Contact | | | | |
| addr-spec | px_MCPTT_Client_B_ID":14000" | px_CalleeContactUri | | |
| feature-param | "audio" | | | |
| feature-param | "+g.3gpp.mcptt" | | | |
| feature-param | "+g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| Supported | | | | |
| option-tag | "norefersub" | | | |
| Rseq | | | | |
| response-num | previous RSeq number sent in the same direction incremented by one | | | |
| Call-ID | | | | |
| callid | same value as received in INVITE message | | | |
| CSeq | | | | |
| value | same value as received in INVITE message | | | |
| Content-Length | | | | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.16.3 SIP 183 (Session Progress)

5.5.2.16.3.1 SIP 183 (Session Progress) from the UE

Table 5.5.2.16.3.1-1: SIP 183 (Session Progress) from the UE

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "183" | | | |
| Reason-Phrase | "Session progress" | | | |
| Record-Route | | | | |
| rec-route | px_MCPTT_PCSCF_A_URI":4060;lr" | Same value as received in INVITE | | |
| Via | | | | |
| | | Via header for the P-CSCF that communicates with the called party. same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_PCSCF_A_URI":4060;lr" | The SS P-CSCF address and the SS protected server port | | |
| via-branch | "z9hG4bKmcpttss1" | Value starting with 'z9hG4bK' | | |
| Via | | | | |
| | | Via header for the other endpoint (the caller). same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Client_B_ID":14000" | | | |
| via-branch | "z9hG4bKmcpttss4" | Value starting with 'z9hG4bK' | | |
| Require | | | | |
| option-tag | "100rel" | | | |
| From | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | same value as received in INVITE message | | | |
| To | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | "1" | | | |
| Contact | | | | |
| addr-spec | "sip:[5555::aaa:bbb:ccc:eee]" | SIP URI with IP address or FQDN and protected server port of UE | | |
| | px_MCPTT_Client_A_ID":protected server port as chosen by the UE | | | |
| feature-param | "audio" | | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| Supported | | | | |
| option-tag | "norefersub" | | | |
| Rseq | | | | |
| response-num | previous RSeq number sent in the same direction incremented by one | | | |
| Call-ID | | | | |
| callid | px_MCPTT_CT_call_ID | Same value as received in INVITE message | | |

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--------------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| CSeq | | | | |
| value | "4711" | Same value as received in INVITE message | | |
| P-Answer-State | | optional | | |
| value | "unconfirmed" | | | |
| P-Asserted-Identity | | | RFC 3325 [32] | |
| addr-spec | px_MCPTT_User_A_ID | The URI of the UE | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.16.3.2 SIP 183 (Session Progress) from the SS

Table 5.5.2.16.3.2-1: SIP 183 (Session Progress) from the SS

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "183" | | | |
| Reason-Phrase | "Session progress" | | | |
| Record-Route | | | | |
| rec-route | px_MCPTT_PCSCF_A_URI":4060;lr" | Same value as received in INVITE | | |
| Via | | | | |
| | | Via header for the P-CSCF that communicates with the called party. same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | same value as received in INVITE | IP address or FQDN and protected server port of the UE | | |
| via-branch | same value as received in INVITE | Value starting with 'z9hG4bK' | | |
| Require | | | | |
| option-tag | "100rel" | | | |
| From | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | "1" | | | |
| To | | | | |
| addr-spec | same value as received in INVITE message | | | |
| tag | "2" | | | |
| Contact | | | | |
| addr-spec | px_MCPTT_Client_B_ID":14000" | px_CalleeContactUri | | |
| feature-param | "audio" | | | |
| feature-param | "+g.3gpp.mcptt" | | | |
| feature-param | "+g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| Supported | | | | |
| option-tag | "norefersub" | | | |
| Rseq | | | | |
| response-num | previous RSeq number sent in the same direction incremented by one | | | |
| Call-ID | | | | |
| callid | same value as received in INVITE message | | | |
| CSeq | | | | |
| value | same value as received in INVITE message | | | |
| P-Answer-State | | | | |
| value | "unconfirmed" | | | |
| P-Asserted-Identity | | | | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | RFC 3325 [32] | |
| Content-Length | | | | |
| value | "0" | No message body included - end of SIP message | RFC 3261 [22] | |

5.5.2.17 SIP 2xx

5.5.2.17.1 SIP 200 (OK)

5.5.2.17.1.1 SIP 200 (OK) from the UE

Table 5.5.2.17.1.1-1: SIP 200 (OK) from the UE

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|---|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "200" | | | |
| Reason-Phrase | "OK" | | | |
| Via | | | | |
| | | Via header for the P-CSCF that communicates with the called party. same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_PCSCF_A_URI":4060;lr" | The SS P-CSCF address and the SS protected server port | | |
| via-branch | "z9hG4bKmcpttss1" | Value starting with 'z9hG4bK' | | |
| Via | | | | |
| | | Via header for the other endpoint (the caller). same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | px_MCPTT_Client_B_ID":14000" | | | |
| via-branch | "z9hG4bKmcpttss4" | Value starting with 'z9hG4bK' | | |
| Record-Route | | | | |
| rec-route | px_MCPTT_PCSCF_A_URI":4060;lr" | | | |
| From | | | | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "2" | | | |
| To | | | | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | | | |
| P-Asserted-Identity | | | | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| Contact | | | | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| feature-param | "audio" | | | |
| Call-ID | | | | |
| callid | px_MCPTT_CT_call_ID | | | |
| CSeq | | | | |
| value | "4711" | | | |
| Require | | | | |
| option-tag | "timer" | | | |
| Session-Expires | | | | |
| generic-param | "3600" | | | |
| refresher | "uac" | | | |
| Supported | | | | |
| option-tag | "tdialog" | | | |
| option-tag | "norefersub" | | | |
| option-tag | "explicitsub" | | | |
| option-tag | "nosub" | | | |
| Content-Type | "application/sdp" | | RFC 5621 [58] | |

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|-----------------------------------|---------|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Content-Length | length of message-body | | RFC 3261 [22] | |
| Message-body | | | RFC 3261 [22] | |
| MIME-Content-Type | "application/sdp" | | RFC 4566 [27] | |
| SDP Message | As described in Table 5.5.3.1.1-1 | | | |

5.5.2.17.1.2 SIP 200 (OK) from the SS

Table 5.5.2.17.1.2-1: SIP 200 (OK) from the SS

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|---|---|--------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "200" | | | |
| Reason-Phrase | "OK" | | | |
| Via | | | | |
| | | Via header for the P-CSCF that communicates with the called party. same value as received in INVITE message | RFC 3261 [22] RFC 3581 [55] | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | same value as received in INVITE | IP address or FQDN and protected server port of the UE | | |
| via-branch | same value as received in INVITE | Value starting with 'z9hG4bK' | | |
| Record-Route | | | | |
| rec-route | px_MCPTT_PCSCF_A_URI".4060;lr" | Same value as received in INVITE | | |
| From | | | | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| tag | "1" | | | |
| To | | | | |
| addr-spec | px_MCPTT_Server_A_URI | | | |
| tag | "2" | | | |
| P-Asserted-Identity | | | | |
| addr-spec | px_MCPTT_User_A_ID | | | |
| Contact | | | | |
| addr-spec | px_MCPTT_Client_A_ID | | | |
| feature-param | "g.3gpp.mcptt" | | | |
| feature-param | "g.3gpp.icsi-ref=urn:urn-7:3gpp-service.ims.icsi.mcptt" | | | |
| feature-param | "isfocus" | | | |
| feature-param | "audio" | | | |
| Call-ID | | | | |
| callid | same value as received in INVITE message | | | |
| CSeq | | | | |
| value | same value as received in INVITE message | | | |
| Require | | | | |
| option-tag | "timer" | | | |
| Session-Expires | | | | |
| generic-param | "3600" | | | |
| refresher | "uac" | | | |
| Supported | | | | |
| option-tag | "tdialog" | | | |
| option-tag | "norefersub" | | | |
| option-tag | "explicitsub" | | | |
| option-tag | "nosub" | | | |
| Content-Type | "application/sdp" | | RFC 5621 [58] | |
| Content-Length | length of message-body | | RFC 3261 [22] | |
| Message-body | | | | |
| MIME-Content-Type | "application/sdp" | | RFC 4566 [27] | |
| SDP Message | As described in Table 5.5.3.1.1-1 | | | |

5.5.2.18 SIP 3xx

5.5.2.18.1 SIP 302 (Moved Temporarily)

Table 5.5.2.18.1-1: SIP 302 (Moved Temporarily)

| Delivery Path: RFC 3261 [22] | | | | |
|------------------------------|---------------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "302" | | | |
| Reason-Phrase | "Moved Temporarily" | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.19 SIP 4xx

5.5.2.19.1 SIP 403 (Forbidden)

Table 5.5.2.19.1-1: SIP 403 (Forbidden)

| Delivery Path: RFC 3261 [22] | | | | |
|------------------------------|---|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "403" | | | |
| Reason-Phrase | "Forbidden" | | | |
| Warning | | | | |
| mcptt-warn-code | "100" | | | |
| mcptt-warn-text | "function not allowed due to" <detailed reason> | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.19.2 SIP 404 (Not Found)

Table 5.5.2.19.2-1: SIP 404 (Not Found)

| Delivery Path: RFC 3261 [22] | | | | |
|------------------------------|--------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "404" | | | |
| Reason-Phrase | "Not Found" | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.19.3 SIP 423 (Interval Too Brief)

Table 5.5.2.19.3-1: SIP 423 (Interval Too Brief)

| Delivery Path: RFC 3261 [22] | | | | |
|------------------------------|----------------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "423" | | | |
| Reason-Phrase | "Interval Too Brief" | | | |
| Content-Length | | | | |
| value | "0" | No message body included - end of SIP message | RFC 3261 [22] | |

5.5.2.19.4 SIP 480 (Temporarily unavailable)

This message is sent by the UE.

Table 5.5.2.19.4-1: SIP 480 (Temporarily unavailable)

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|-------------------------------------|--|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "480" | | | |
| Reason-Phrase | "Temporarily Unavailable" | | | |
| Via | | | | |
| sent-protocol | "SIP/2.0/UDP" | | | |
| sent-by | any allowed value | IP address or FQDN and protected server port of the UE | | |
| via-branch | any allowed value | Value starting with 'z9hG4bK' | | |
| From | | | | |
| addr-spec | px_MCPTT_Client_A_ID | The URI of the UE | | |
| tag | "1" | | | |
| To | | | | |
| addr-spec | px_MCPTT_Server_A_URI | The URI of the SS | | |
| tag | "2" | | | |
| Warning | | | | |
| warn-code | "110" | | | |
| warn-text | "user declined the call invitation" | | | |
| Call-ID | | | | |
| callid | px_MCPTT_CT_call_ID | | | |
| CSeq | | | | |
| value | "4711" | | | |
| method | "INVITE" | | | |
| Content Length | | | | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.19.5 SIP 486 (Busy Here)

Table 5.5.2.19.5-1: SIP 486 (Busy Here)

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|--------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "486" | | | |
| Reason-Phrase | "Busy Here" | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.19.6 SIP 488 (Not Acceptable Here)

Table 5.5.2.19.6-1: SIP 488 (Not Acceptable Here)

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|-----------------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "488" | | | |
| Reason-Phrase | "Not Acceptable Here" | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.19.6 SIP 401 (Unauthorized)

Table 5.5.2.19.6-1: SIP 488 (Not Acceptable Here)

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|---|---------|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "488" | | | |
| Reason-Phrase | "Not Acceptable Here" | | | |
| WWW-Authenticate | | | | |
| realm | px_MCPTT_User_A_O rganization | | | |
| algorithm | "AKAv1-MD5" | | | |
| qop-value | "auth" | | | |
| nonce | Base 64 encoding of RAND and AUTN | | | |
| opaque | arbitrary value (to be returned by the UE in subsequent REGISTER) | | | |
| Security-Server | | | | |
| mechanism-name | "ipsec-3gpp" | | | |
| algorithm | px_IpSecAlgorithm (hmac-md5-96 or hmac-sha-1-96) | | | |
| spi-c | SPI number of the inbound SA at the protected client port | | | |
| spi-s | SPI number of the inbound SA at the protected server port | | | |
| port-c | protected client port of SS | | | |
| port-s | protected server port of SS | | | |
| Encrypt-algorithm | des-ede3-cbc or aes- cbc | | | |
| q | "0.9" | | | |
| Mechanism-name | | | | |
| algorithm | Algorithm not selected by px_IpSecAlgorithm (hmac-sha-1-96 or hmac-md5-96) | | | |
| spi-c | SPI number of the inbound SA at the protected client port | | | |
| spi-s | SPI number of the inbound SA at the protected server port | | | |
| port-c | protected client port of SS | | | |
| port-s | protected server port of SS | | | |
| encrypt-algorithm | des-ede3-cbc or aes- cbc | | | |
| q | "0.7" | | | |
| Content-length | "0" | | | |

5.5.2.20 SIP 5xx

5.5.2.20.1 SIP 500 (Server Internal Error)

Table 5.5.2.20.1-1: SIP 500 (Server Internal Error)

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|-------------------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "500" | | | |
| Reason-Phrase | "Server Internal Error" | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.2.21 SIP 6xx

5.5.2.21.1 SIP 606 (Not Acceptable)

Table 5.5.2.21.1-1: SIP 606 (Not Acceptable)

| Derivation Path: RFC 3261 [22] | | | | |
|--------------------------------|------------------|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| SIP-Version | "SIP/2.0" | | | |
| Status-Code | "606" | | | |
| Reason-Phrase | "Not Acceptable" | | | |
| Content-Length | | | RFC 3261 [22] | |
| value | "0" | No message body included - end of SIP message | | |

5.5.3 Default SDP message and other information elements

5.5.3.1 SDP Message

5.5.3.1.1 SDP Message from the UE

Table 5.5.3.1.1-1: SDP Message from the UE

| Derivation Path: RFC 4566 [27] | | | | |
|--------------------------------|--|---|-----------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Session description: | | | | |
| Protocol Version | "0" | v= line | | |
| Origin | | o= line | | |
| username | px_MCPTT_User_A_ID | Username of client | | |
| sess-id | any allowed value | A numeric string such that the tuple of <username>, <sess-id>, <nettype>, <addrtype>, and <unicast-address> forms a globally unique identifier for the session. | | |
| sess-version | any allowed value | | | |
| nettype | "IN" | | | |
| addrtype | "IP4" | "IP4" or "IP6" | | |
| unicast-address | px_MCPTT_IP_ConnectionAddressAll | | | |
| Session Name | at least one UTF-8-encoded character, or if no name is given, a single empty space | s= line | | |
| Connection Data | not required if included in all media | c= line Included if the media plane control channel uses a different IP address than other media described in the SDP | | |
| nettype | "IN" | | | |
| addrtype | "IP4" | "IP4" or "IP6" | | |
| connection-address | px_MCPTT_IP_ConnectionAddressAll | | | |
| Bandwidth | | b= line | | |
| bwtype | "AS:" | bwtype:bandwidth | | |
| bandwidth | any allowed value | | TS 26.114 [64] Table K.6 | |
| Time description | | | | |
| Timing | | t= line | | |
| start-time | "0" | | | |
| stop-time | "0" | | | |
| Media descriptions | | | | |
| media description | | m= line media = audio | RFC 4867 [59] | |
| media | "audio" | | | |
| port | any allowed value | The transport port to which the media stream is sent | | |
| proto | "RTP/AVP" | | | |
| fmt | any allowed value(s) | Indicating RTP payload type numbers | | |
| media title | "speech" | i= line | | |
| Connection Data | | c= line Included if the media plane for audio uses a different IP address than other media described in the SDP | | |
| nettype | "IN" | | | |
| addrtype | "IP4" | | | |
| connection-address | px_MCPTT_IP_ConnectionAddressAudio | | | |
| media attribute | | a= line attribute = rtpmap | | |
| rtpmap | "rtpmap" | | | |

| Derivation Path: RFC 4566 [27] | | | | |
|--------------------------------|--|---|-------------------------------------|------------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| payload type | "99" | | | |
| encoding name | "AMR-WB" | | | |
| clock rate | 16000 | | RFC 4867 [59] subclause 8.3 | |
| encoding parameter | "1" if present | Channel number | | |
| media attribute | | a= line attribute = fntp | | |
| fntp | "fntp" | | | |
| format | the value given in fmt in the audio media description | | | |
| format specific parameters | | Parameters of WB- AMR codec | | |
| mode-change-capability | "2" | To be able to interoperate fully with gateways to circuit switched networks | RFC 4867 [59] subclause 8.2 | |
| max-red | "0" | No redundancy will be used | RFC 4867 [59] subclause 8.2 | |
| media attribute | | a= line attribute =ptime | | |
| ptime | any allowed value | packet time | | |
| media attribute | | a= line attribute =maxptime | | |
| maxptime | any allowed value | maximum packet time | | |
| media description | | m= line media = application | RFC 4867 [59] | |
| media | "application" | | | |
| port | any allowed value | | | |
| proto | "udp" | | | |
| fmt | "MCPTT" | | | |
| Connection Data | | c= line Included if the media plane control channel uses a different IP address than other media described in the SDP | | |
| nettype | "IN" | | | |
| addrtype | "IP4" | | | |
| connection-address | px_MCPTT_IP_Connec tionAddressApp | | | |
| media attribute | | a= line attribute = fntp | | |
| fntp | | | | |
| format | "MCPTT" | | | |
| format specific parameters | | | | |
| mc_queueing | optional | Parameter has no value | TS 24.380 [10] cl. 12.1.2.3 | |
| mc_priority | not present or any allowed value | Any integer value in the range of 1..255 | TS 24.380 [10] cl. 12.1.2.3 | |
| mc_granted | present | Parameter has no value | TS 24.380 [10] cl. 12.1.2.3 | |
| mc_implicit_request | present | Parameter has no value | TS 24.380 [10] cl. 12.1.2.3 | |
| media attribute | | a= line attribute = key-mgmt | | PRIVATE- CALL |
| key-mgmt | | | TS 24.379 [9] subclause 6.2.1 | |
| mikey | MIKEY-SAKKE I_MESSAGE as specified in Table 5.5.9.1-2 | | RFC 4567 [44] | |

5.5.3.1.2 SDP Message from the SS

Table 5.5.3.1.2-1: SDP Message from the SS

| Derivation Path: RFC 4566 [27] | | | | |
|--------------------------------|--|---|-----------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Session description: | | | | |
| Protocol Version | "0" | v= line | | |
| Origin | | o= line | | |
| username | px_MCPTT_User_B_ID | Username of client sending message | | |
| sess-id | "12345678" | A numeric string such that the tuple of <username>, <sess-id>, <nettype>, <addrtype>, and <unicast-address> forms a globally unique identifier for the session. | | |
| sess-version | "12345678" | | | |
| nettype | "IN" | | | |
| addrtype | "IP4" | This depends on the unicast address of the UE | | |
| unicast-address | px_MCPTT_IP_ConnectionAddressAll | | | |
| Session Name | at least one UTF-8-encoded character, or if no name is given, a single empty space | s= line | | |
| Bandwidth | | b= line | | |
| bwtype | "AS:" | bwtype:bandwidth | | |
| bandwidth | "38" | kilobits per second; Maximum AMR-WB at 23.85 kbps but limit to 12.65 kbps plus overhead | TS 26.114 [64] Table K.6 | |
| Time description | | | | |
| Timing | | t= line | | |
| start-time | "0" | | | |
| stop-time | "0" | | | |
| Media descriptions | | | | |
| media description | | m= line media = audio | RFC 4867 [59] | |
| media | "audio" | | | |
| port | "49152" | The transport port to which the media stream is sent | RFC 6335 [63] subclause 6 | |
| proto | "RTP/AVP" | | | |
| fmt | "99" | RTP/AVP payload type for AMR-WB is dynamic | | |
| media title | "speech" | i= line | | |
| Connection Data | | | | |
| nettype | "IN" | c= line | | |
| addrtype | "IP4" | This depends on the connection address | | |
| connection-address | px_MCPTT_IP_ConnectionAddressAudio | | | |
| media attribute | | a= line attribute = rtpmap | | |
| rtpmap | "rtpmap" | | | |
| payload type | "99" | | | |
| encoding name | "AMR-WB" | | | |
| clock rate | 16000 | | RFC 4867 [59] subclause 8.3 | |
| encoding parameter | "1" if present | Channel number | | |
| media attribute | | a= line attribute = fmp | | |
| fmp | | | | |

| Derivation Path: RFC 4566 [27] | | | | |
|--------------------------------|---|---|-------------------------------|--------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| format | "99" | | | |
| format specific parameters | | Parameters of WB-AMR codec | | |
| mode-change-capability | "2" | To be able to interoperate fully with gateways to circuit switched networks | RFC 4867 [59] subclause 8.2 | |
| max-red | "0" | No redundancy will be used | RFC 4867 [59] subclause 8.2 | |
| media attribute | | a= line attribute =ptime | | |
| ptime | "20" | packet time | | |
| media attribute | | a= line attribute =maxptime | | |
| maxptime | "240" | maximum packet time | | |
| media description | | m= line media = application | RFC 4867 [59] | |
| media | "application" | | | |
| port | "49153" | | | |
| proto | "udp" | | | |
| fmt | "MCPTT" | | | |
| Connection Data | | c= line | | |
| nettype | "IN" | | | |
| addrtype | "IP4" | This depends on the connection address | | |
| connection-address | px_MCPTT_IP_ConnectionAddressApp | | | |
| media attribute | | a= line attribute = fntp | | |
| fntp | | | | |
| format | "MCPTT" | | | |
| format specific parameters | | | | |
| mc_queueing | Present | Parameter has no value | TS 24.380 [10] cl. 12.1.2.3 | |
| mc_priority | "5" | Any integer value in the range of 1..255 | TS 24.380 [10] cl. 12.1.2.3 | |
| mc_granted | Present | Parameter has no value | TS 24.380 [10] cl. 12.1.2.3 | |
| mc_implicit_request | Present | Parameter has no value | TS 24.380 [10] cl. 12.1.2.3 | |
| media attribute | | a= line attribute = key-mgmt | | PRIVATE-CALL |
| key-mgmt | | | TS 24.379 [9] subclause 6.2.1 | |
| mikey | MIKEY-SAKKE I_MESSAGE as specified in Table 5.5.9.1-2 | | RFC 4567 [44] | |

5.5.3.1.3 SDP Message from the UE - Off-network

Table 5.5.3.1.3-1: SDP Message from the UE - Off-network

| Derivation Path: RFC 4566 [27] | | | |
|--------------------------------|---|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| Session description: | | | |
| Protocol Version | "0" | v= line | |
| Origin | | o= line | |
| username | "-" | | |
| sess-id | any allowed value | A numeric string such that the tuple of <username>, <sess-id>, <nettype>, <addrtype>, and <unicast-address> forms a globally unique identifier for the session. | |
| sess-version | any allowed value | | |
| nettype | "IN" | | |
| addrtype | "IP4" | "IP4" or "IP6" | |
| unicast-address | px_MCPTT_IP_Connecti onAddressAll | | |
| Session Name | "-" | s= line | |
| Connection Data | | c= line | |
| nettype | "IN" | | |
| addrtype | "IP4" | "IP4" or "IP6" | |
| connection-address | px_MCPTT_IP_Connecti onAddressAll | Set to the multicast IP address of the MCPTT group | |
| Bandwidth | | b= line | |
| bwtype | "AS:" | bwtype:bandwidth | |
| bandwidth | any allowed value | | |
| Time description | | | |
| Timing | | t= line | |
| start-time | "0" | | |
| stop-time | "0" | | |
| Media descriptions | | | |
| media description | | m= line media = audio | |
| media | "audio" | | |
| port | any allowed value | Set to a port number for MCPTT speech of the MCPTT group | |
| proto | "RTP/AVP" | | |
| fmt | any allowed value(s) | Indicating RTP payload type numbers | |
| media title | "speech" | i= line | |
| media attribute | | a= line attribute = rtpmap | |
| rtpmap | "rtpmap" | | |
| payload type | "99" | | |
| encoding name | "AMR-WB" | | |
| clock rate | 16000 | | |
| encoding parameter | "1" if present | Channel number | |
| media attribute | | a= line attribute = fmp | |
| fmp | "fmp" | | |
| format | the value given in fmt in the audio media description | | |
| format specific parameters | | Parameters of WB-AMR codec | |

| Derivation Path: RFC 4566 [27] | | | |
|--------------------------------|---|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| mode-change-capability | "2" | To be able to interoperate fully with gateways to circuit switched networks | |
| max-red | "0" | No redundancy will be used | |
| media attribute | | a= line attribute =ptime | |
| ptime | any allowed value | packet time | |
| media attribute | | a= line attribute =maxptime | |
| maxptime | any allowed value | maximum packet time | |
| media description | | m= line media = application | |
| media | "application" | | |
| port | any allowed value | Set to a port number for media-floor control entity of the MCPTT group | |
| proto | "udp" | | |
| fmt | "MCPTT" | | |
| media attribute | | a= line attribute = fntp | |
| fntp | | | |
| format | "MCPTT" | | |
| format specific parameters | | | |
| mc_queueing | optional | Parameter has no value | |
| mc_priority | not present or any allowed value | Any integer value in the range of 1..255 | |
| mc_granted | present | Parameter has no value | |
| mc_implicit_request | present | Parameter has no value | |
| media attribute | | a= line attribute = key-mgmt | |
| key-mgmt | | | |
| mikey | MIKEY-SAKKE I_MESSAGE as specified in Table 5.5.9.1-2 | | |

5.5.3.1.4 SDP Message from the SS - Off-network

Table 5.5.3.1.4-1: SDP Message from the SS - Off-network

| Derivation Path: RFC 4566 [27] | | | |
|--------------------------------|----------------------------------|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| Session description: | | | |
| Protocol Version | "0" | v= line | |
| Origin | | o= line | |
| username | "-" | | |
| sess-id | "12345678" | A numeric string such that the tuple of <username>, <sess-id>, <nettype>, <addrtype>, and <unicast-address> forms a globally unique identifier for the session. | |
| sess-version | "12345678" | | |
| nettype | "IN" | | |
| addrtype | "IP4" | | |
| unicast-address | px_MCPTT_IP_ConnectionAddressAll | | |
| Session Name | "-" | s= line | |
| Connection Data | | c= line | |
| nettype | "IN" | | |
| addrtype | "IP4" | "IP4" or "IP6" | |
| connection-address | px_MCPTT_IP_ConnectionAddressAll | Set to the multicast IP address of the MCPTT group | |
| Bandwidth | | b= line | |
| bwtype | "AS:" | bwtype:bandwidth | |
| bandwidth | any allowed value | | |
| Time description | | | |
| Timing | | t= line | |
| start-time | "0" | | |
| stop-time | "0" | | |
| Media descriptions | | | |
| media description | | m= line media = audio | |
| media | "audio" | | |
| port | "49152" | Set to a port number for MCPTT speech of the MCPTT group | |
| proto | "RTP/AVP" | | |
| fmt | "99" | Indicating RTP payload type numbers | |
| media title | "speech" | i= line | |
| media attribute | | a= line attribute = rtpmap | |
| rtpmap | "rtpmap" | | |
| payload type | "99" | | |
| encoding name | "AMR-WB" | | |
| clock rate | 16000 | | |
| encoding parameter | "1" if present | Channel number | |
| media attribute | | a= line attribute = fmtp | |
| fmtp | "fmtp" | | |
| format | "99" | | |
| format specific parameters | | Parameters of WB-AMR codec | |
| mode-change-capability | "2" | To be able to interoperate fully with gateways to circuit switched networks | |

| Derivation Path: RFC 4566 [27] | | | |
|--------------------------------|---|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| max-red | "0" | No redundancy will be used | |
| media attribute | | a= line attribute =ptime | |
| ptime | "20" | packet time | |
| media attribute | | a= line attribute =maxptime | |
| maxptime | "240" | maximum packet time | |
| media description | | m= line media = application | |
| media | "application" | | |
| port | "49153" | Set to a port number for media-floor control entity of the MCPTT group | |
| proto | "udp" | | |
| fmt | "MCPTT" | | |
| media attribute | | a= line attribute = fmtp | |
| fmtp | | | |
| format | "MCPTT" | | |
| format specific parameters | | | |
| mc_queueing | Present | Parameter has no value | |
| mc_priority | "5" | Any integer value in the range of 1..255 | |
| mc_granted | Present | Parameter has no value | |
| mc_implicit_request | Present | Parameter has no value | |
| media attribute | | a= line attribute = key-mgmt | |
| key-mgmt | | | |
| mikey | MIKEY-SAKKE I_MESSAGE as specified in Table 5.5.9.1-2 | | |

5.5.3.2 MCPTT-Info

5.5.3.2.1 MCPTT-Info from the UE

Table 5.5.3.2.1-1: MCPTT-Info from the UE

| Derivation Path: TS 24.379 [9] subclause F.1.2 | | | | |
|--|--|--|---|---|
| Information Element | Value/remark | Comment | Reference | Condition |
| associated-group-id | px_MCPTT_Group_A_ID if mcptt-request-uri contains a temporary group identity; otherwise, not present | if the <mcptt-request-uri> element contains a group identity then this element can include an MCPTT group ID associated with the group identity in the <mcptt-request-uri> element. E.g. if the <mcptt-request-uri> element contains a temporary group identity (TGI), then the <associated-group-id> element can contain the constituent MCPTT group ID | TS 24.379 [9] subclause F.1.3 | GROUP-CALL |
| | not present | | | PRIVATE-CALL |
| originated-by | not present | | | |
| MKFC-GKTPs | not present | | | |
| mcptt-client-id | px_MCPTT_Client_A_ID | The URI of the MCPTT Client | | PRIVATE-CALL GROUP-CALL EMERGENCY-CALL IMPERIL-CALL EMERGENCY-ALERT |
| | "eyJhbGciOiJSUzI1NiJ9.eyJzdWIiOiIxMjM0NTY3ODkwIiwiaWF0IjoiY29tOjkwMzEiLCJpYXQiOiJ0e0NTM0OTgxNTgslmV4cCI6MjE1MzQ5ODQ1OCwibWVudHRfaWQiOiJhbGciOiJlZUBvcuY29tLn0.Dpn7AhIMaqMEgg12NYUfJGSFJMPG8M2li9FLtPotDIHwU2emBws8z5JLw81SXQnoLqZ8ZF8tIhZ1W7uuMbufF4Ws r7PAadZix3CnV2wxFV9qR_VA1-0ccDTPukUsRHsic0SgZ3albcYKd6VsehFe_GDwfyysZyD7yPwCfPZo" | The MCPTT client may validate the user with the ID token and configure itself for the user | TS 33.179 [15], clause B.3 RFC 6749 [77] | CONFIG |
| alert-ind-rcvd | not present | | | |

5.5.3.2.2 MCPTT-Info from the SS

Table 5.5.3.2.2-1: MCPTT-Info from the SS

| Derivation Path: TS 24.379 [9] subclause F.1.2 | | | | |
|--|---------------------|-----------------------------|-----------|-----------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| mcpttinfo | | | | |
| mcptt-Params | | | | |
| mcptt-access-token | not present | | | |
| session-type | "prearranged" | | | GROUP-CALL |
| | "private" | | | PRIVATE-CALL |
| mcptt-request-uri | px_MCPTT_User_A_ID | The URI of the called user | | |
| mcptt-calling-user-id | px_MCPTT_User_B_ID | The URI of the calling user | | |
| mcptt-called-party-id | not present | | | |
| mcptt-calling-group-id | px_MCPTT_Group_A_ID | The URI of the group | | GROUP-CALL |
| | not present | | | PRIVATE-CALL |
| required | not present | | | |
| emergency-ind | not present | | | |
| | "true" | | | EMERGENCY-CALL |
| alert-ind | not present | | | |
| | "true" | | | EMERGENCY-ALERT |
| imminentperil-ind | not present | | | |
| | "true" | | | IMPERIL-CALL |
| broadcast-ind | not present | | | |
| mc-org | not present | | | |
| floor-state | not present | | | |
| associated-group-id | not present | | | |
| originated-by | not present | | | |
| MKFC-GKTPs | not present | | | |
| mcptt-client-id | not present | | | |
| alert-ind-rcvd | not present | | | |

5.5.3.3 Resource-lists

5.5.3.3.1 Resource-lists from the UE

Table 5.5.3.3.1-1: Resource-lists from the UE

| Derivation Path: TS 24.379 [9] subclause F.1.2 | | | | |
|--|---|-----------------------------------|----------------|---|
| Information Element | Value/remark | Comment | Reference | Condition |
| resource-lists | | | | PRIVATE-CALL GROUP-CALL EMERGENCY-CALL IMPERIL-CALL EMERGENCY-ALERT |
| resource-lists | "uri: mcptt-op.gov:resource-lists" | | TS 24.481 [11] | CONFIG |
| list | | | | |
| entry | px_MCPTT_User_B_ID | The MCPTT ID of the invited user | | PRIVATE-CALL GROUP-CALL EMERGENCY-CALL IMPERIL-CALL EMERGENCY-ALERT |
| entry | "resource-lists/ue_configuration.xml" | UE Configuration document | TS 24.481 [11] | CONFIG |
| entry | "resource-lists/ue_user_profile.xml" | UE User Profile document | TS 24.481 [11] | CONFIG |
| entry | "resource-lists/ue_service_configuration.xml" | UE Service Configuration document | TS 24.481 [11] | CONFIG |

5.5.3.3.2 Resource-lists from the SS

Table 5.5.3.3.2-1: Resource-lists from the SS

| Derivation Path: TS 24.379 [9] subclause F.1.2 | | | | |
|--|--------------------|----------------------------------|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| resource-lists | | | | |
| list | | | | |
| entry | px_MCPTT_User_A_ID | The MCPTT ID of the invited user | | |

5.5.3.4 Location-info

5.5.3.4.1 Location-info (Report from the UE)

Table 5.5.3.4.1-1: Location-info (Report from the UE)

| Derivation Path: TS 24.379 [9] clause F.3 | | | | |
|---|--------------------------|--|-----------|---------------------------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| location-info | | | | |
| Report | | | | |
| TriggerID | not present | An element which can occur multiple times. Contains the value of the <TriggerId> attribute associated with a trigger that has fired. Only present if a trigger is the cause of the Location-info Report. | | |
| CurrentLocation | | A mandatory element that contains the location information | | |
| CurrentServingEcgi | optional | This is optional depending on the configuration sent by the SS | | |
| NeighbouringEcgi | optional | This is optional depending on the configuration sent by the SS | | |
| MbmsSald | optional | This is optional depending on the configuration sent by the SS | | |
| MbsfnArea | optional | This is optional depending on the configuration sent by the SS | | |
| CurrentCoordinate | optional | This is optional depending on the configuration sent by the SS | | |
| ReportID | not present | Attribute is used to return the value in the <RequestId> attribute in the <Request> element. Only present in response to a Location-Info Request. | | |
| ReportType | "Emergency" | Required The <ReportType> attribute has two values "Emergency" and "NonEmergency" used to inform whether the client is sending the report in an emergency situation or not. | | |
| EmergencyEventType | "GroupCallEmergency" | | | GROUP-CALL and EMERGENCY-CALL |
| | "GroupCallImminentPeril" | | | GROUP-CALL and IMPERIL-CALL |
| | "PrivateCallEmergency" | | | PRIVATE-CALL and EMERGENCY-CALL |

| Derivation Path: TS 24.379 [9] clause F.3 | | | | |
|---|------------------------------|---------|-----------|------------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| | "InitiateEmergencyAlert " | | | IMPERIL -CALL |

5.5.3.4.2 Location-info (Configuration sent by the SS)

Table 5.5.3.4.2-1: Location-info (Configuration sent by the SS)

| Derivation Path: TS 24.379 [9] clause F.3 | | | | |
|---|--------------|--|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| location-info | | | | |
| Configuration | | | | |
| ConfigScope | "Full" | The MCPTT Client shall replace any previous configuration. | | |
| NonEmergencyLocationInformation | | | | |
| ServingEcgi | present | An optional element specifying that the serving E-UTRAN Cell Global Identity (ECGI) needs to be reported | | |
| NeighbouringEcgi | present | An optional element that can occur multiple times, specifying that neighbouring ECGIs need to be reported | | |
| MbmsSald | present | An optional element specifying that the serving MBMS Service Area Id needs to be reported; | | |
| MbsfnArea | present | An optional element specifying that the MBSFN area Id needs to be reported; | | |
| GeographicalCoordinate | present | An optional element specifying that the geographical coordinate specified in subclause 6.1 in 3GPP TS 23.032 [65] needs to be reported | | |
| minimumIntervalLength | "10" | A mandatory element specifying the minimum time the MCPTT client needs to wait between sending location reports. The value is given in seconds | | |
| EmergencyLocationInformation" | | | | |
| ServingEcgi | present | An optional element specifying that the serving E-UTRAN Cell Global Identity (ECGI) needs to be reported | | |
| NeighbouringEcgi | present | An optional element that can occur multiple times, specifying that neighbouring ECGIs need to be reported | | |
| MbmsSald | present | An optional element specifying that the serving MBMS Service Area Id needs to be reported; | | |
| MbsfnArea | present | An optional element specifying that the MBSFN area Id needs to be reported; | | |

| Derivation Path: TS 24.379 [9] clause F.3 | | | | |
|---|--------------|--|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| GeographicalCoordinate | present | An optional element specifying that the geographical coordinate specified in subclause 6.1 in 3GPP TS 23.032 [65] needs to be reported | | |
| minimumIntervallLength | "5" | A mandatory element specifying the minimum time the MCPTT client needs to wait between sending location reports. The value is given in seconds | | |
| TriggeringCriteria | | | | |
| CellChange | not present | | | |
| TrackingAreaChange | not present | | | |
| PlmnChange | not present | | | |
| MbmsSaChange | not present | | | |
| MbsfnAreaChange | not present | | | |
| PeriodicReport | not present | | | |
| TravelledDistance | not present | | | |
| McpttSignallingEvent | not present | | | |
| GeographicalAreaChange | not present | | | |

5.5.3.4.3 Location-info (Request sent by the SS)

Table 5.5.3.4.3-1: Location-info (Request sent by the SS)

| Derivation Path: TS 24.379 [9] clause F.3 | | | | |
|---|--------------|--|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| location-info | | | | |
| Request | | | | |
| RequestID | "1" | The RequestID that the MCPTT Client will reference in the Report | | |

5.5.3.5 PIDF

Table 5.5.3.5-1: PIDF

| Derivation Path: TS 24.379 [9] subclause 9.3.1 | | | | |
|--|--|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| presence entity | px_MCPTT_Client_A_ID | | | |
| tuple id | px_MCPTT_Client_A_ID | | | |
| status | | | | |
| affiliation | | | | |
| group | px_MCPTT_Group_A_ID | | | |
| client | not present | | | |
| status | | | | |
| affiliating | | | | |
| affiliated | not present | | | |
| deaffiliating | not present | | | |
| expires | not present | | | |
| p-id | any allowed value or same value as sent in SIP PUBLISH | set to an identifier of a SIP PUBLISH request | | |

5.5.3.6 SIMPLE-FILTER

Table 5.5.3.6-1: SIMPLE-FILTER

| Derivation Path: TS 24.379 [9] subclause 9.3.2 | | | | |
|--|--|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| filter-set | px_MCPTT_Client_A_ID | | RFC 4661 [48] | |
| nc-bindings | px_MCPTT_Client_A_ID | | RFC 4661 [48] | |
| ns-binding urn | "urn:ietf:params:xml:ns:pidf" | | RFC 4661 [48] | |
| ns-binding urn | "urn:3gpp:ns:mcpttPresInfo:1.0" | TS 24.379 [9] subclause 9.3.2.2 requires two separate ns-binding elements | RFC 4661 [48] | |
| filter id | "123" | The value of the 'id' attribute has to be unique within the <filter-set> element. Does not contain the 'uri' element. Does not contain the 'domain' element. | RFC 4661 [48] | |
| what | | | RFC 4661 [48] | |
| include | //presence/tuple[@id=px_MCPTT_Client_A_ID] | contains the value, according to IETF RFC 4661 [48], set to concatenation of the //presence/tuple[@id=" string, the MCPTT client ID, and the "]" string | RFC 4661 [48] | |

5.5.3.7 MCPTT-AFFILIATION-COMMAND

Table 5.5.3.7-1: MCPTT-AFFILIATION-COMMAND

| Derivation Path: TS 24.379 [9] clause F.4 | | | | |
|---|---------------------|------------------|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| command-list | | | | |
| affiliate | | | | |
| de-affiliate | not present | | | |
| group | px_MCPTT_Group_A_ID | MCPTT group name | | |

5.5.4 Default HTTP message and other information elements

5.5.4.1 General

The HTTP Messages are specified in RFC 2616 [26]. Wherever another reference apply to their content it is explicitly indicated.

The following conditions apply throughout subclause 5.5:

Table 5.5.4-1: Conditions

| Condition | Explanation |
|-----------|-------------|
|-----------|-------------|

| | |
|--------------|---|
| AUTH | Message/IE sent only as part of a MCPTT UE authentication |
| USERAUTH | Message/IE sent only as part of a MCPTT UE user authentication |
| UECONFIG | Message/IE sent only as part of a MCPTT UE configuration |
| UEUSERPROF | Message/IE sent only as part of a MCPTT UE User profile configuration |
| UESERVCONFIG | Message/IE sent only as part of a MCPTT UE service configuration |
| GROUPCONFIG | Message/IE sent only as part of a MCPTT group configuration |
| TOKEN | Message/IE sent only as part of a MCPTT token exchange |
| KMSINIT | Message/IE sent only as part of a MCPTT KMS initialisation |
| KMSKEY | Message/IE sent only as part of a MCPTT KMS key exchange |

5.5.4.2 GET

Table 5.5.4.2-1: HTTP GET

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|--|---|----------------|---|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-Line | | | | |
| Method | "GET" | | | |
| Request-URI | | | | |
| uri | px_MCPTT_IdM_Server_URI | | TS 33.179 [15] | AUTH |
| | px_MCPTT_XCAP_UE_Config_URI | points to UE Configuration document | TS 24.484 [14] | UECONFIG |
| | px_MCPTT_XCAP_User_Profile_URI | points to UE User Profile document | TS 24.484 [14] | UEUSERPROF |
| | px_MCPTT_XCAP_Service_Config_URI | points to UE Service Configuration document | TS 24.484 [14] | UESERVCONFIG |
| | px_MCPTT_XCAP_Group_Config_URI | points to group configuration document | TS 24.481 [11] | GROUPCONFIG |
| query | As described in Table 5.5.4.10.1-1 | | TS 33.179 [15] | AUTH |
| HTTP-Version | "HTTP/1.1" | | | |
| General header | | | | |
| Cache-Control | "no-cache" | | | |
| Content-Type | | | | |
| | "application/x-www-form-urlencoded" | | | |
| Message-body | | | | |
| | | | | UECONFIG UEUSERPROF UESERVCONFIG GROUPCONFIG |
| access-token | As described in the field 'access-token' in Table 5.5.4.10.4-1 | | | |

5.5.4.3 POST

Table 5.5.4.3-1: HTTP POST

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|---|-------------------------------------|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| Method | "POST" | | | |
| Request-URI | | | | |
| uri | px_MCPTT_IdM_Serve r_URI | | TS 33.179 [15] | |
| query | As described in Table 5.5.4.10.1-1 | | | AUTH |
| HTTP-Version | "HTTP/1.1" | | | |
| General header | | | | |
| Cache-Control | "no-cache" | | | |
| Request Header Fields | | | | |
| Authorization | px_MCPTT_User_A_us ername:px_MCPTT_Us er_A_password | Base64 encoded username:password | RFC 2617 [72] | |
| Content-Type | "application/x-www- form-urlencoded" | | | AUTH |
| Content-Type | "application/x-www- form-urlencoded" | | TS 33.179 [15] | TOKEN |
| Message-body | | | | |
| Token request | As described in Table 5.5.4.10.3-1 | | | |
| Content-Type | application/x-www- form-urlencoded | | TS 33.179 [15] | KMSINIT |
| Message-body | | | | |
| KMS Initialize | As described in Table 5.5.4.10.5-1 | | | |
| Content-Type | application/x-www- form-urlencoded | | TS 33.179 [15] | KMSKEY |
| Message-body | | | | |
| KMS KeyProvision | As described in Table 5.5.4.10.7-1 | | | |

5.5.4.4 PUT

Table 5.5.4.4-1: HTTP PUT

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|---|---|----------------|-----------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-line | | | | |
| Method | "PUT" | | | |
| Request-URI | px_MCPTT_GroupConf igDoc_URI | Points to the group configuration document | TS 24.481 [11] | GROUPC ONFIG |
| Content-Type | | | | |
| | application/vnd.oma.poc.groups+xml | | | |
| Message-body | | | | |
| group | | | | |
| xmlns:rl | "urn:ietf:params:xml:ns:resource-lists" | resource-lists xml namespace identifier | TS 24.481 [11] | |
| xmlns:cp | "urn:ietf:params:xml:ns:common-policy" | common-policy xml namespace identifier | TS 24.481 [11] | |
| xmlns:ocp | "urn:oma:xml:xdm:common-policy" | common-policy xml namespace identifier | TS 24.481 [11] | |
| xmlns:oxe | "urn:oma:xml:xdm:extensions" | extensions xml namespace identifier | TS 24.481 [11] | |
| xmlns:mcpttgi | "urn:3gpp:ns:mcpttGroupInfo:1.0" | MCPTT group info namespace identifier | TS 24.481 [11] | |
| list-service | | | | |
| uri | px_MCPTT_Group_B_ID | uri of the MCPTT group | TS 24.481 [11] | |
| display-name | px_MCPTT_Group_B_name | group display name | TS 24.481 [11] | |
| list | | | | |
| entry | | | | |
| uri | px_MCPTT_Client_A_ID | User ID allowed to participate in this group | TS 24.481 [11] | |
| display-name | px_MCPTT_User_A_Profile_Name | User display name | TS 24.481 [11] | |
| user-priority | 1 | User priority | TS 24.481 [11] | |
| entry | | | | |
| uri | px_MCPTT_Client_B_ID | User ID allowed to participate in this group | TS 24.481 [11] | |
| display-name | px_MCPTT_User_B_Profile_Name | User display name | TS 24.481 [11] | |
| user-priority | 2 | User priority | TS 24.481 [11] | |
| entry | | | | |
| uri | px_MCPTT_Client_C_ID | User ID allowed to participate in this group | TS 24.481 [11] | |
| display-name | px_MCPTT_User_C_Profile_Name | User display name | TS 24.481 [11] | |
| user-priority | 3 | User priority | TS 24.481 [11] | |
| invite-members | "true" | Allow users to invite members to this group | TS 24.481 [11] | |
| max-participant-count | "3" | Maximum number of users in the group | TS 24.481 [11] | |
| ruleset | | | | |
| rule id | "a7c" | | TS 24.481 [11] | |
| actions | | | | |
| allow-initiate-conf | "true" | All conference calls | TS 24.481 [11] | |
| join-handling | "true" | Allow group join | TS 24.481 [11] | |
| emergency-call | "true" | Allow emergency call | TS 24.481 [11] | |
| imminent-peril-call | "true" | Allow imminent peril call | TS 24.481 [11] | |
| emergency-alert | "true" | All emergency alert | TS 24.481 [11] | |
| supported-services | | | | |
| service-enabler | "urn:urn-7:3gpp-service.ims.icsi.mcptt" | | TS 24.481 [11] | |
| group-priority | "5" | New group priority | TS 24.481 [11] | |

5.5.4.5 DELETE

Table 5.5.4.5-1: HTTP DELETE

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|---|--|----------------|-------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Request-line | | | | |
| Method | "DELETE" | | | |
| Request-URI | px_MCPTT_GroupConfigDoc_URI | Points to the group configuration document | TS 24.481 [11] | GROUPCONFIG |
| Content-Type | application/vnd.3gpp.GMOP+xml; charset="utf-8 | | | |
| Message-body | | | | |
| gmop:document | | | | |
| xmlns | "urn:oma:xml:poc:list-service" | list-service xml namespace identifier | TS 24.481 [11] | |
| xmlns:rl | "urn:ietf:params:xml:ns:resource-lists" | resource-lists xml namespace identifier | TS 24.481 [11] | |
| xmlns:cp | "urn:ietf:params:xml:ns:common-policy" | common-policy xml namespace identifier | TS 24.481 [11] | |
| xmlns:ocp | "urn:oma:xml:xm:common-policy" | common-policy xml namespace identifier | TS 24.481 [11] | |
| xmlns:oxe | "urn:oma:xml:xm:extensions" | extensions xml namespace identifier | TS 24.481 [11] | |
| xmlns:mcpttgi | "urn:3gpp:ns:mcpttGroupInfo:1.0" | MCPTT group info namespace identifier | TS 24.481 [11] | |
| xmlns:gmop | "urn:3gpp:ns:mcpttGMOP:1.0" | | | |
| gmop:request | | | | |
| group | | | | |
| list-service | | | | |
| uri | "sip:mcptt-group-T@mcptt-op.gov" | Group identifier | TS 24.481 [11] | |

5.5.4.6 HTTP 200 (OK)

Table 5.5.4.10-1: HTTP 200 (OK)

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|------------------------------------|--|----------------|-----------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| HTTP-Version | "HTTP/1.1" | | | |
| Status-Code | "200" | | | |
| Reason-Phrase | "OK" | | | |
| General header | | | | |
| Cache-Control | "no-store" | | | |
| Pragma | "no-cache" | | | |
| Content-Type | "application/json; charset=UTF-8" | | TS 33.179 [15] | TOKEN |
| Message-body | | | | |
| Token response | As described in Table 5.5.4.10.4-1 | | | |
| Content-Type | application/x-www-form-urlencoded | | TS 33.179 [15] | KMSINIT |
| Message-body | | | | |
| KMS Certificate | As described in Table 5.5.4.10.6-1 | | | |
| Content-Type | application/x-www-form-urlencoded | | TS 33.179 [15] | KMSKEY |
| Message-body | | | | |
| KMS Key Set | As described in Table 5.5.4.10.8-1 | | | |
| Content-Type | application/resource-lists+xml | | TS 24.484 [14] | UECONFIG |
| Message-body | | | | |
| mcptt-UE-configuration | As described in Table 5.5.8.2-1 | UE Configuration document returned | | |
| Content-Type | application/resource-lists+xml | | TS 24.484 [14] | UEUSERPROFILE |
| Message-body | | | | |
| mcptt-user-profile | As described in Table 5.5.8.3-1 | UE User Profile document returned | | |
| Content-Type | application/resource-lists+xml | | TS 24.484 [14] | UESERVICECONFIG |
| Message-body | | | | |
| service-configuration-info | As described in Table 5.5.8.4-1 | UE Service Configuration document returned | | |
| Content-Type | application/resource-lists+xml | | TS 24.481 [11] | GROUPCONFIG |
| Message-body | | | | |
| ue-group-configuration | As described in Table 5.5.7.1-1 | Group Configuration document returned | | |

5.5.4.7 HTTP 201 (Created)

Table 5.5.4.7-1: HTTP 201 (Created)

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|---------------------------------|---------------------------------------|----------------|--------------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| HTTP-Version | "HTTP/1.1" | | | |
| Status-Code | "20" | | | |
| Reason-Phrase | "Created" | | | |
| General header | | | | |
| Cache-Control | "no-store" | | | |
| Pragma | "no-cache" | | | |
| Content-Type | application/resource-lists+xml | | TS 24.483 [13] | GROUPC ONFIG |
| Message-body | | | | |
| ue-group-configuration | As described in Table 5.5.7.1-1 | Group Configuration document returned | | |

5.5.4.8 HTTP 302 (Found)

Table 5.5.4.8-1: HTTP 302 (Found)

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|-------------------------------------|---|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| HTTP-Version | "HTTP/1.1" | | | |
| Status-Code | "302" | | | |
| Reason-Phrase | "Found" | | | |
| Location | | | | |
| Location-URI | | | | AUTH |
| uri | px_MCPTT_Client_A_ID | Identifier of the MCPTT client making the API request | TS 33.179 [15] | |
| query | As described in Table 5.5.4.10.2-1 | | | |
| Content-Type | "application/x-www-form-urlencoded" | | TS 33.179 [15] | AUTH |

5.5.4.9 HTTP 409 (Conflict)

Table 5.5.4.9-1: HTTP 409 (Conflict)

| Derivation Path: RFC 2616 [26] | | | | |
|--------------------------------|---------------------------|-----------------|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Status-Line | | | | |
| HTTP-Version | "HTTP/1.1" | | | |
| Status-Code | "409" | | | |
| Reason-Phrase | "URI constraint violated" | Conflict reason | TS 24.484 [14] | |

5.5.4.10 HTTP Message Bodies

5.5.4.10.1 Authentication Request

Table 5.5.4.10.1-1: Authentication Request

| Derivation Path: TS 33.179 [15], subclause B.3.1.1 | | | | |
|--|--|--|-------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| response-type | "code" | For native MCPTT clients the value shall be set to "code" | OpenID Connect 1.0 [25] | |
| mcptt-client-id | px_MCPTT_Client_A_ID | Identifier of the MCPTT client making the API request | OpenID Connect 1.0 [25] | |
| scope | "3gpp:mcptt:ptt_server" "3gpp:mcptt:key_management_server" "3gpp:mcptt:config_management_server" "3gpp:mcptt:group_management_server" | Scope values are expressed as a list of space-delimited, case-sensitive strings which indicate which MCPTT resource servers the client is requesting access to | TS 33.179 [15] | |
| redirect-uri | px_MCPTT_User_A_Organization | The URI of the MCPTT client to which the IdM server will redirect the MCPTT client's user agent in order to return the authorization code | OpenID Connect 1.0 [25] | |
| state | "abc123" | An opaque value used by the MCPTT client to maintain state between the authorization request and authorization response | OpenID Connect 1.0 [25] | |
| acr-values | "3gpp:acr:password" | Space-separated string that specifies the acr values that the IdM server is being requested to use for processing this authorization request | TS 33.179 [15] | |
| code-challenge | "123456789" | base64url-encoded SHA-256 challenge | TS 33.179 [15] | |
| code-challenge-method | "S256" | The hash method used to transform the code verifier to produce the code challenge | TS 33.179 [15] | |

5.5.4.10.2 Authentication Response

Table 5.5.4.10.2-1: Authentication Response

| Derivation Path: TS 33.179 [15], subclause B.3.1.2 | | | | |
|--|--------------------------|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| code | "SpIxIOBeZQQYbYS6WxSbIA" | The authorization code generated by the authorization endpoint and returned to the MCPTT client via the authorization response | TS 33.179 [15] | |
| state | "abc123" | The value shall match the exact value used in the authorization request | TS 33.179 [15] | |

5.5.4.10.3 Token Request

Table 5.5.4.10.3-1: Token Request

| Derivation Path: TS 33.179 [15], subclause B.3.1.3 | | | | |
|--|------------------------------|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| grant-type | "authorization_code" | | RFC 2616 [26] | |
| code | "SpIxIOBeZQQYbYS6 WxSbIA" | The authorization code generated by the authorization endpoint and returned to the MCPTT client via the authorization response | TS 33.179 [15] | |
| mcptt-client-id | px_MCPTT_Client_A_ID | Identifier of the MCPTT client making the API request | TS 33.179 [15] | |
| redirect-uri | px_MCPTT_User_A_Organization | The URI of the MCPTT client to which the IdM server will redirect the MCPTT client's user agent | TS 33.179 [15] | |
| code-verifier | "123456789" | A cryptographically random string that is used to correlate the authorization request to the token request | TS 33.179 [15] | |

5.5.4.10.4 Token Response

Table 5.5.4.10.4-1: Token Response

| Derivation Path: TS 33.179 [15], subclause B.3.1.4 | | | | |
|--|--|---|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| access-token | "eyJhbGciOiJSUzI1NiI9.eyJ3Y3B0dF9pZCI6ImFsaWNIQG9yZy5jb20iLCJleHAiOiJE0NTM1MDYxMjE5bnNjb3BIIjpbIm9wZW5pZCI6IjNncHA6bW51dHh0Zy5kb20iLCJzY29udmVhdGUiOiJ0b20iLCJpdjE4IjoiOmE9e8Goxr_hgF3szvgbw8JRbFuv97XgpeDLjEq4jL3Cbu41Q9b0WdXAdFmeEbiB8wo_xggiGww6IDR1b3TgAAsdjkRxSK4ctIKPaOJSRmM7MKMcKhlug3BEKSC9-aXBTSiv5fAGN-ShDbPvHycBpzKWXBvMIR5PaCg-9fwjELXZXdRwz8C6JbRM8aqzhd4CVhQ3-Arip-S9CKd0tu-qhHfF2rvJDRlg8ZBihdPH8mJs-qpTFep_1-kON3mL0_g54xVmlMwN0XQA" | The access token. The access token is opaque to the MCPTT client | RFC 6749 [77] | |
| refresh-token | "Y7NSzUJUS0Jp7G4SKpBKSOJVHIZxFbxqsqCIZhOEK9" | The refresh token that can be used to refresh the access token and avoid having to prompt the user for authentication again | RFC 6749 [77] | |
| id-token | "eyJhbGciOiJSUzI1NiI9.eyJ3Y3B0dF9pZCI6ImFsaWNIQG9yZy5jb20iLCJleHAiOiJE0NTM1MDYxMjE5bnNjb3BIIjpbIm9wZW5pZCI6IjNncHA6bW51dHh0Zy5kb20iLCJzY29udmVhdGUiOiJ0b20iLCJpdjE4IjoiOmE9e8Goxr_hgF3szvgbw8JRbFuv97XgpeDLjEq4jL3Cbu41Q9b0WdXAdFmeEbiB8wo_xggiGww6IDR1b3TgAAsdjkRxSK4ctIKPaOJSRmM7MKMcKhlug3BEKSC9-aXBTSiv5fAGN-ShDbPvHycBpzKWXBvMIR5PaCg-9fwjELXZXdRwz8C6JbRM8aqzhd4CVhQ3-Arip-S9CKd0tu-qhHfF2rvJDRlg8ZBihdPH8mJs-qpTFep_1-kON3mL0_g54xVmlMwN0XQA" | The MCPTT client may validate the user with the ID token and configure itself for the user | RFC 6749 [77] | |
| token-type | "Bearer" | The token type for access | RFC 6749 [77] | |
| expires-in | "7199" | Token expiry time | RFC 6749 [77] | |

5.5.4.10.5 KMS Initialize

Table 5.5.4.10.5-1: KMS Initialize

| Derivation Path: TS 33.179 [15], subclause D.3.1.2 | | | | |
|--|--|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| id-token | "eyJhbGciOiJSUzI1NiJ9.eyJzdWUiOiIxMjM0NTY3ODkwIiwiaXNzIjoiwianZlcnR5Y2xpZW50IiwiaWF0IjoiZjoiSWRNUy5zZXJ2ZXluY29tOjkwMzEiLCJpYXQiOiJlbn00OTgxNTg5IiwiaWF0IjoiOTQ1MzQ5ODQ1OCwibWVudHRfaWQiOiJhbGijZUBvcmcuY29tLn0uDPn7AhIMaqMEgg12NYUufJGSFJMPG8M2li9FLtPotDIHwU2emBws8z5JLw81SXQn0LqZ8ZF8tlhZ1W7uuMbufF4Ws r7PAadZix3CnV2wxFV9qR_VA1-0ccDTPukUsRHsic0SgZ3albcYKd6VsehFe_GDwffqysYzD7yPwCfPZo" | The MCPTT client may validate the user with the ID token and configure itself for the user | RFC 6749 [77] | |
| access-token | "eyJhbGciOiJSUzI1NiJ9.eyJtY3B0dF9pZCI6ImFsaWNIQG9yZy5jb20iLCJleHAiOiJlbn00OTM1MjM0NTY3ODkwIiwiaXNzIjoiZjoiSWRNUy5zZXJ2ZXluY29tOjkwMzEiLCJpYXQiOiJlbn00OTgxNTg5IiwiaWF0IjoiOTQ1MzQ5ODQ1OCwibWVudHRfaWQiOiJhbGijZUBvcmcuY29tLn0uDPn7AhIMaqMEgg12NYUufJGSFJMPG8M2li9FLtPotDIHwU2emBws8z5JLw81SXQn0LqZ8ZF8tlhZ1W7uuMbufF4Ws r7PAadZix3CnV2wxFV9qR_VA1-0ccDTPukUsRHsic0SgZ3albcYKd6VsehFe_GDwffqysYzD7yPwCfPZo" | The access token. The access token is opaque to the MCPTT client | RFC 6749 [77] | |

5.5.4.10.6 KMS Certificate

Table 5.5.4.10.6-1: KMS Certificate

| Derivation Path: TS 33.179 [15], subclause D.3.1.2 | | | | |
|--|------------------|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Version | "1.1.0" | The version number of the certificate type | | |
| Role | "Root" | This shall indicate whether the certificate is a "Root" or "External" certificate | | |
| CertUri | px_MCPTT_CertUri | The URI of the Certificate (this object) | | |
| KmsUri | px_MCPTT_KmsUri | The URI of the KMS which issued the Certificate | | |
| Issuer | No value | (Optional) String describing the issuing entity | | |
| ValidFrom | No value | (Optional) Date from which the Certificate may be used | | |
| ValidTo | No value | (Optional) Date at which the Certificate expires | | |
| Revoked | false | (Optional) A Boolean value defining whether a Certificate has been revoked | | |
| UserIDFormat | "2" | Shall contain the value '2' | | |
| UserKeyPeriod | "2592000" | The number of seconds that each user key issued by this KMS should be used | | |
| UserKeyOffset | "0" | The offset in seconds from 0h on 1 st Jan 1900 that the segmentation of key periods starts | | |
| PubEncKey | "029A2F" | The SAKKE Public Key, "Z_T". This is an OCTET STRING encoding of an elliptic curve point | | |
| PubAuthKey | "029A2F" | The ECCSI Public Key, "KPAK". This is an OCTET STRING encoding of an elliptic curve point | | |
| ParameterSet | No value | (Optional) The choice of parameter set used for SAKKE and ECCSI | | |
| KmsDomainList | No value | (Optional) List of domains associated with the certificate | | |

5.5.4.10.7 KMS KeyProvision

Table 5.5.4.10.7-1: KMS KeyProvision

| Derivation Path: TS 33.179 [15], subclause D.3.1.2 | | | | |
|--|--|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| id-token | "eyJhbGciOiJSUzI1NiJ9.eyJzdWUiOiIxMjM0NTY3ODkwIiwiaXNjaXoibWVudHRfY2xpZW50IiwiaXNzIjoiSWRNUy5zZXJ2ZXluY29tOjkwMzEiLCJpYXQiOiE0NTM0OTgxNTgsImV4cCI6MjM0NTY3ODQ1OCwiLCJmYXQiOiJhbGciOiJlZlZlbnV4cm9udHRfY29tLn0uDPn7AhIMaqMEgg12NYUUFJGSFJMPG8M2li9FLtPotDIHwU2emBws8z5JLw81SXQn0LqZ8ZF8tlhZ1W7uuMbufF4Ws r7PAadZixz3CnV2wxFV9qR_VA1-0ccDTPukUsRHsic0SgZ3albcYKd6VsehFe_GDwfqysYzD7yPwCfPZo" | The MCPTT client may validate the user with the ID token and configure itself for the user | RFC 6749 [77] | |
| access-token | "eyJhbGciOiJSUzI1NiJ9.eyJtY3B0dF9pZCI6ImFsaWNIQG9yZy5jb20iLCJleHAiOiE0NTM1MjYxMjE5LnNjb3BlIiwiaXNjaXoibWVudHRfY2xpZW50IiwiaXNzIjoiSWRNUy5zZXJ2ZXluY29tOjkwMzEiLCJpYXQiOiE0NTM0OTgxNTgsImV4cCI6MjM0NTY3ODQ1OCwiLCJmYXQiOiJlZlZlbnV4cm9udHRfY29tLn0uDPn7AhIMaqMEgg12NYUUFJGSFJMPG8M2li9FLtPotDIHwU2emBws8z5JLw81SXQn0LqZ8ZF8tlhZ1W7uuMbufF4Ws r7PAadZixz3CnV2wxFV9qR_VA1-0ccDTPukUsRHsic0SgZ3albcYKd6VsehFe_GDwfqysYzD7yPwCfPZo" | The access token. The access token is opaque to the MCPTT client | RFC 6749 [77] | |

5.5.4.10.8 KMS Key Set

Table 5.5.4.10.8-1: KMS Key Set

| Derivation Path: TS 33.179 [15], subclause D.3.2.2 | | | | |
|--|---------------------------------|--|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| KmsResponse | | | | |
| KmsUri | px_MCPTT_KmsUri | The URI of the KMS which issued the key set | | |
| UserUri | px_MCPTT_Client_A_ID | URI of the user for which the key set is issued | | |
| Time | Any Value | Time stamp of KMS message | | |
| KmsId | px_MCPTT_KmsId | The ID of the KMS that issues the key set | | |
| ClientReqUrl | px_MCPTT_KmsClientUrl | URL of the client making the key request | | |
| KmsMessage | | | | |
| KmsKeyProvVersion | "1.1.0" | The version number of the key provision XML | | |
| KmsKeySetVersion | "1.1.0" | The version number of the key set XML | | |
| KmsUri | px_MCPTT_KmsUri | The URI of the KMS which issued the key set | | |
| CertUri | No value | (Optional) The URI of the Certificate which may be used to validate the key set | | |
| Issuer | No value | (Optional) String describing the issuing entity | | |
| UserUri | px_MCPTT_Client_A_ID | URI of the user for which the key set is issued | | |
| UserID | "123456789ABCDEF" | UID corresponding to the key set | | |
| ValidFrom | No value | (Optional) Date and time from which the key set may be used | | |
| ValidTo | No value | (Optional) Date and time at which the key set expires | | |
| KeyPeriodNo | "1514" | Current Key Period No. since 1 January 1900 | | |
| Revoked | "false" | (Optional) A Boolean value defining whether the key set has been revoked | | |
| UserDecryptKey | | | | |
| EncryptionAlgorithm | "AES256" | The SAKKE "Receiver Secret Key". This is an OCTET STRING encoding of an elliptic curve point | | |
| KeyInfo:key-name | px_MCPTT_UserDecryptKey_name | Encryption algorithm to use | | |
| CipherData:value | "1212ADDF" | Key name | | |
| UserSigningKeySSK | | | | |
| EncryptionAlgorithm | "AES256" | The ECCSI private Key, "SSK". This is an OCTET STRING encoding of an integer | | |
| KeyInfo:key-name | px_MCPTT_UserSigningKeySSK_name | Encryption algorithm to use | | |
| CipherData:value | "1212ADDF" | Key name | | |
| | | Key value | | |

| Derivation Path: TS 33.179 [15], subclause D.3.2.2 | | | | |
|--|-------------------------------|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| KmsResponse | | | | |
| UserPubTokenPVT | | | | |
| | | The ECCSI public validation token, "PVT". This is an OCTET STRING encoding of an elliptic curve point | | |
| EncryptionAlgorithm | "AES256" | Encryption algorithm to use | | |
| KeyInfo:key-name | px_MCPTT_UserPubTokenPVT_name | Key name | | |
| CipherData:value | "1212ADDF" | Key value | | |
| Signature:xmlns | | | | |
| SignedInfo | | | | |
| CanonicalizationAlgorithm | "xml-c14n" | XML Signature processing | | |
| SignatureAlgorithm | "SHA-256" | Hashing algorithm to use | | |
| DigestAlgorithm | "SHA-256" | Hashing algorithm to use | | |
| DigestValue | Any Value | Determined by hash value | | |
| SignatureValue | Any Value | Determined by hash value | | |
| KeyInfo:key-name | px_MCPTT_SigningKey_name | Key name used to sign KMS messages | | |

5.5.5 Default MCPTT call control Off-network messages and other information elements

5.5.5.1 GROUP CALL PROBE

Table 5.5.5.1-1: GROUP CALL PROBE

| Derivation Path: TS 24.379 [9] Table 15.1.2.1-1 | | | |
|---|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |

5.5.5.2 GROUP CALL ANNOUNCEMENT

5.5.5.2.1 GROUP CALL ANNOUNCEMENT from the UE

Table 5.5.5.2.1-1: GROUP CALL ANNOUNCEMENT from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.3.1-1 | | | |
|---|---|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65535) generated at the beginning of a call establishment | | |
| Call type | "00000001" | Basic Group Call | |
| Refresh interval | 10000 | The Refresh interval contains a number denoting the minimum time interval (milliseconds) between two successive periodic announcements. NOTE: In release 13.7 of TS 24.379 [9], the refresh interval of the call is fixed to 10 seconds. | |
| Call start time | The Call start time value is an unsigned integer containing UTC time of the time when a call was started, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| Last call type change time | The Last call type change time value is an unsigned integer containing UTC time of the time when a call priority was changed, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| SDP | As described in Table 5.5.3.1.3-1 | | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | pre-set MCPTT user ID | |
| Last user to change call type | The ID of the last user to change contents | | |
| Confirm mode indication | Present | | |
| Probe response | Not Present | | |

5.5.5.2.2 GROUP CALL ANNOUNCEMENT from the SS

Table 5.5.5.2.2-1: GROUP CALL ANNOUNCEMENT from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.3.1-1 | | | |
|---|---|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65535) generated at the beginning of a call establishment | | |
| Call type | "00000001" | Basic Group Call | |
| Refresh interval | 10000 | The Refresh interval contains a number denoting the minimum time interval (milliseconds) between two successive periodic announcements. NOTE: In release 13.7 of TS 24.379 [9], the refresh interval of the call is fixed to 10 seconds. | |
| Call start time | The Call start time value is an unsigned integer containing UTC time of the time when a call was started, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| Last call type change time | The Last call type change time value is an unsigned integer containing UTC time of the time when a call priority was changed, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| SDP | As described in Table 5.5.3.1.4-1 | | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | pre-set MCPTT user ID | |
| Last user to change call type | The ID of the last user to change contents | | |
| Confirm mode indication | Present | | |
| Probe response | Not Present | | |

5.5.5.3 GROUP CALL ACCEPT

5.5.5.3.1 GROUP CALL ACCEPT from the UE

Table 5.5.5.3.1-1: GROUP CALL ACCEPT from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.4.1-1 | | | |
|---|---|------------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Call type | "00000001" | Basic Group Call | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_A_ID | | |

5.5.5.3.2 GROUP CALL ACCEPT from the SS

Table 5.5.5.3.2-1: GROUP CALL ACCEPT from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.4.1-1 | | | |
|---|---|------------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Call type | "00000001" | Basic Group Call | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_B_ID | | |

5.5.5.4 GROUP CALL EMERGENCY END

5.5.5.4.1 GROUP CALL EMERGENCY END from the UE

Table 5.5.5.4.1-1: GROUP CALL EMERGENCY END from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.15.1-1 | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Last call type change time | The Last call type change time value is an unsigned integer containing UTC time of the time when a call priority was changed, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| Last user to change call type | The ID of the last user to change contents | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | | |

5.5.5.4.2 GROUP CALL EMERGENCY END from the SS

Table 5.5.5.4.2-1: GROUP CALL EMERGENCY END from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.15.1-1 | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Last call type change time | The Last call type change time value is an unsigned integer containing UTC time of the time when a call priority was changed, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| Last user to change call type | The ID of the last user to change contents | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | | |

5.5.5.5 GROUP CALL IMMINENT PERIL END

5.5.5.5.1 GROUP CALL IMMINENT PERIL END from the UE

Table 5.5.5.5.1-1: GROUP CALL IMMINENT PERIL END from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.14.1-1 | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Last call type change time | The Last call type change time value is an unsigned integer containing UTC time of the time when a call priority was changed, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| Last user to change call type | The ID of the last user to change contents | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | | |

5.5.5.5.2 GROUP CALL IMMEDIATE PERIL END from the SS

Table 5.5.5.5.2-1: GROUP CALL IMMEDIATE PERIL END from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.14.1-1 | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Last call type change time | The Last call type change time value is an unsigned integer containing UTC time of the time when a call priority was changed, in seconds since midnight UTC of January 1, 1970 (not counting leap seconds). | | |
| Last user to change call type | The ID of the last user to change contents | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | | |

5.5.5.6 GROUP CALL BROADCAST

5.5.5.6.1 GROUP CALL BROADCAST from the UE

Table 5.5.5.6.1-1: GROUP CALL BROADCAST from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.20.1-1 | | | |
|--|---|----------------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Call type | "00000010" | Broadcast Group Call | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| SDP | As described in Table 5.5.3.1.3-1 | | |

5.5.5.6.2 GROUP CALL BROADCAST from the SS

Table 5.5.5.6.2-1: GROUP CALL BROADCAST from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.20.1-1 | | | |
|--|---|----------------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Call type | "00000010" | Broadcast Group Call | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| SDP | As described in Table 5.5.3.1.4-1 | | |

5.5.5.7 GROUP CALL BROADCAST END

5.5.5.7.1 GROUP CALL BROADCAST END from the UE

Table 5.5.5.7.1-1: GROUP CALL BROADCAST END from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.21.1-1 | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| SDP | As described in Table 5.5.3.1.3-1 | | |

5.5.5.7.2 GROUP CALL BROADCAST END from the SS

Table 5.5.5.7.2-1: GROUP CALL BROADCAST END from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.21.1-1 | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| SDP | As described in Table 5.5.3.1.4-1 | | |

5.5.5.8 PRIVATE CALL SETUP REQUEST

5.5.5.8.1 PRIVATE CALL SETUP REQUEST from the UE

Table 5.5.5.8.1-1: PRIVATE CALL SETUP REQUEST from the UE

| Derivation Path: 24.379 [9], Table 15.1.5.1-1. | | | |
|--|---|-----------------------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Commencement mode | "00000000" | Automatic Commencement Mode | |
| Call type | "00000101" | Private Call | |
| MCPTT user ID of the caller | px_MCPTT_User_A_ID | | |
| MCPTT user ID of the callee | px_MCPTT_User_B_ID | | |
| SDP offer | As described in Table 5.5.3.1.3-1 | | |
| User location | Not Present | | |

5.5.5.8.2 PRIVATE CALL SETUP REQUEST from the SS

Table 5.5.5.8.2-1: PRIVATE CALL SETUP REQUEST from the SS

| Derivation Path: 24.379 [9], Table 15.1.5.1-1. | | | |
|--|---|-----------------------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| Commencement mode | "00000000" | Automatic Commencement Mode | |
| Call type | "00000101" | Private Call | |
| MCPTT user ID of the caller | px_MCPTT_User_B_ID | | |
| MCPTT user ID of the callee | px_MCPTT_User_A_ID | | |
| SDP offer | As described in Table 5.5.3.1.4-1 | | |
| User location | Not Present | | |

5.5.5.9 PRIVATE CALL RINGING

Table 5.5.5.9-1: PRIVATE CALL RINGING

| Derivation Path: 24.379 [9], Table 15.1.6.1-1. | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the caller | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the callee | Same as the one in PRIVATE CALL SETUP REQUEST | | |

5.5.5.10 PRIVATE CALL ACCEPT

Table 5.5.5.10-1: PRIVATE CALL ACCEPT

| Derivation Path: 24.379 [9], Table 15.1.7.1-1. | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the caller | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the callee | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| SDP answer | Same as the one in PRIVATE CALL SETUP REQUEST | | |

5.5.5.11 PRIVATE CALL REJECT

5.5.5.11.1 PRIVATE CALL REJECT from the UE

Table 5.5.5.11.1-1: PRIVATE CALL REJECT from the UE

| Derivation Path: 24.379 [9], Table 15.1.8.1-1. | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| Reason | Any allowed value | | |
| MCPTT user ID of the caller | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the callee | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| SDP answer | As described in Table 5.5.3.1.3-1 | | |

5.5.5.11.2 PRIVATE CALL REJECT from the SS

Table 5.5.5.11.2-1: PRIVATE CALL REJECT from the SS

| Derivation Path: 24.379 [9], Table 15.1.8.1-1. | | | |
|--|---|-----------------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| Reason | "00000000" | Reason = REJECT | |
| MCPTT user ID of the caller | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the callee | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| SDP answer | As described in Table 5.5.3.1.4-1 | | |

5.5.5.12 PRIVATE CALL RELEASE

Table 5.5.5.12-1: PRIVATE CALL RELEASE

| Derivation Path: 24.379 [9], Table 15.1.9.1-1. | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the caller | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the callee | Same as the one in PRIVATE CALL SETUP REQUEST | | |

5.5.5.13 PRIVATE CALL RELEASE ACK

Table 5.5.5.13-1: PRIVATE CALL RELEASE ACK

| Derivation Path: 24.379 [9], Table 15.1.10.1-1. | | | |
|---|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the caller | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the callee | Same as the one in PRIVATE CALL SETUP REQUEST | | |

5.5.5.14 PRIVATE CALL ACCEPT ACK

Table 5.5.5.14-1: PRIVATE CALL ACCEPT ACK

| Derivation Path: 24.379 [9], Table 15.1.11.1-1. | | | |
|---|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the caller | Same as the one in PRIVATE CALL SETUP REQUEST | | |
| MCPTT user ID of the callee | Same as the one in PRIVATE CALL SETUP REQUEST | | |

5.5.5.15 PRIVATE CALL EMERGENCY CANCEL

5.5.5.15.1 PRIVATE CALL EMERGENCY CANCEL from the UE

Table 5.5.5.15.1-1: PRIVATE CALL EMERGENCY CANCEL from the UE

| Derivation Path: 24.379 [9], Table 15.1.12.1-1. | | | |
|---|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| MCPTT user ID of the caller | px_MCPTT_User_A_ID | | |
| MCPTT user ID of the callee | px_MCPTT_User_B_ID | | |

5.5.5.15.2 PRIVATE CALL EMERGENCY CANCEL from the SS

Table 5.5.5.15.2-1: PRIVATE CALL EMERGENCY CANCEL from the SS

| Derivation Path: 24.379 [9], Table 15.1.12.1-1. | | | |
|---|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | a random number uniformly distributed between (0, 65536) generated at the beginning of a call establishment | | |
| MCPTT user ID of the caller | px_MCPTT_User_B_ID | | |
| MCPTT user ID of the callee | px_MCPTT_User_A_ID | | |

5.5.5.16 PRIVATE CALL EMERGENCY CANCEL ACK

5.5.5.16.1 PRIVATE CALL EMERGENCY CANCEL ACK from the UE

Table 5.5.5.16.1-1: PRIVATE CALL EMERGENCY CANCEL ACK from the UE

| Derivation Path: 24.379 [9], Table 15.1.13.1-1. | | | |
|---|--|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL EMERGENCY CANCEL | | |
| MCPTT user ID of the caller | px_MCPTT_User_A_ID | | |
| MCPTT user ID of the callee | px_MCPTT_User_B_ID | | |

5.5.5.16.2 PRIVATE CALL EMERGENCY CANCEL ACK from the SS

Table 5.5.5.16.2-1: PRIVATE CALL EMERGENCY CANCEL ACK from the SS

| Derivation Path: 24.379 [9], Table 15.1.13.1-1. | | | |
|---|--|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| Call identifier | Same as the one in PRIVATE CALL EMERGENCY CANCEL | | |
| MCPTT user ID of the caller | px_MCPTT_User_B_ID | | |
| MCPTT user ID of the callee | px_MCPTT_User_A_ID | | |

5.5.5.17 GROUP EMERGENCY ALERT

5.5.5.17.1 GROUP EMERGENCY ALERT from the UE

Table 5.5.5.17.1-1: GROUP EMERGENCY ALERT from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.16.1-1 | | | |
|--|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | | |
| Organization name | Any allowed value | | |
| User location | Not Present | | |

5.5.5.17.2 GROUP EMERGENCY ALERT from the SS

Table 5.5.5.17.2-1: GROUP EMERGENCY ALERT from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.16.1-1 | | | |
|--|---|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | | |
| Organization name | px_MCPTT_Group_A_O wner_Organization | | |
| User location | Not Present | | |

5.5.5.18 GROUP EMERGENCY ALERT ACK

5.5.5.18.1 GROUP EMERGENCY ALERT ACK from the UE

Table 5.5.5.18.1-1: GROUP EMERGENCY ALERT ACK from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.17.1-1 | | | |
|--|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_A_ID | | |

5.5.5.18.2 GROUP EMERGENCY ALERT ACK from the SS

Table 5.5.5.18.2-1: GROUP EMERGENCY ALERT ACK from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.17.1-1 | | | |
|--|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_B_ID | | |

5.5.5.19 GROUP EMERGENCY ALERT CANCEL

5.5.5.19.1 GROUP EMERGENCY ALERT CANCEL from the UE

Table 5.5.5.19.1-1: GROUP EMERGENCY ALERT CANCEL from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.18.1-1 | | | |
|--|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_A_ID | | |

5.5.5.19.2 GROUP EMERGENCY ALERT CANCEL from the SS

Table 5.5.5.19.2-1: GROUP EMERGENCY ALERT CANCEL from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.18.1-1 | | | |
|--|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_B_ID | | |

5.5.5.20 GROUP EMERGENCY ALERT CANCEL ACK

5.5.5.20.1 GROUP EMERGENCY ALERT CANCEL ACK from the UE

Table 5.5.5.20.1-1: GROUP EMERGENCY ALERT CANCEL ACK from the UE

| Derivation Path: TS 24.379 [9] Table 15.1.19.1-1 | | | |
|--|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_B_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_A_ID | | |

5.5.5.20.2 GROUP EMERGENCY ALERT CANCEL ACK from the SS

Table 5.5.5.20.2-1: GROUP EMERGENCY ALERT CANCEL ACK from the SS

| Derivation Path: TS 24.379 [9] Table 15.1.19.1-1 | | | |
|--|---------------------|---------|-----------|
| Information Element | Value/remark | Comment | Condition |
| MCPTT group ID | px_MCPTT_Group_A_ID | | |
| Originating MCPTT user ID | px_MCPTT_User_A_ID | | |
| Sending MCPTT user ID | px_MCPTT_User_B_ID | | |

5.5.6 Default MCPTT media plane control messages and other information elements

5.5.6.1 General

The media plane control protocols messages specified in the present document are based on those specified in TS 24.380 [10] which in term are based on the RTCP Application Packets (RTCP: APP), as defined in IETF RFC 3550 [76].

Depending on the TC scenario, the same MCPTT media plane control message can be sent by the SS or by the UE. Throughout the default content specified in below a particular value has been chosen to satisfy one or the other scenario. It is expected that when a message is used in a TC in a particular context then the relevant for the usage in the TC values will be defined in the TC.

The following conditions apply throughout subclause 5.5.6:

Table 5.5.6.1-1: Conditions

| Condition | Explanation |
|--------------|--|
| ON-NETWORK | Message sent in on-network scenario. |
| OFF-NETWORK | Message sent in off-network scenario. |
| PRIVATE-CALL | Message sent as part of a Private call handling. |
| GROUP-CALL | Message sent as part of a Group call handling. |

5.5.6.2 Floor Request

Table 5.5.6.2-1: Floor Request

| Derivation Path: 24.380 [10], Table 8.2.4-1. | | | |
|--|--|---|-------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC | "10000000 11111111 00000000 00000001" | The SSRC of the floor participant sending the message. Coded as specified in IETF RFC 3550 [76] and assigned by the Floor Control Server (SS) The selected value is randomly chosen and can be used for one participant - globally unique within the RTP session. | |
| Floor priority | Not present or Any allowed value | If present, a value between '0' and '255' where '0' is the lowest priority If the Floor Priority field is not included in the message the default priority (= '0') is used as the Floor Priority value The max floor priority that can be requested in a Floor Request message is negotiated between the MCPTT client and the controlling MCPTT function using the "mc_priority" fmp parameter e.g. at call setup | |
| User ID | Not present | | ON-NETWORK |
| User ID | | | OFF-NETWORK |
| User ID | px_MCPTT_User_A_ID | If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

5.5.6.3 Floor Granted

Table 5.5.6.3-1: Floor Granted

| Derivation Path: 24.380 [10], Table 8.2.5-1. | | | |
|--|--|--|-------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| Duration | | | |
| Duration | "00000000 10000000" | 128 sec (an arbitrary value) | |
| SSRC of granted floor participant | "10000000 11111111 00000000 00000001" | The SSRC of the floor participant being granted the floor The selected value is randomly chosen and can be used for one participant - globally unique within the RTP session. | |
| Floor priority | Not present | If the Floor Priority field is not included in the message the default priority (= '0') is used as the Floor Priority value | |
| User ID | Not present | | ON-NETWORK |
| User ID | | | OFF-NETWORK |
| User ID | px_MCPTT_User_A_ID | If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Queue Size | Not present | | ON-NETWORK |
| Queue Size | "0" | the number of queued MCPTT clients in the MCPTT call | OFF-NETWORK |
| SSRC of queued floor participant | Not present | | ON-NETWORK |
| | Not present | | OFF-NETWORK |
| Queued User ID | Not present | | ON-NETWORK |

| Derivation Path: 24.380 [10], Table 8.2.5-1. | | | |
|--|-------------------|--|-------------|
| Information Element | Value/remark | Comment | Condition |
| Queued User ID | Not present | | OFF-NETWORK |
| Queue Info | Not present | | ON-NETWORK |
| Queue Info | Not present | | OFF-NETWORK |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

5.5.6.4 Floor Deny

Table 5.5.6.4-1: Floor Deny

| Derivation Path: 24.380 [10], Table 8.2.6-1. | | | |
|--|--|--|-------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| Reject Cause | | | |
| Reject Cause | "1" | Cause #1 - Another MCPTT client has permission | |
| Reject Phrase | "Another MCPTT client has permission" | An additional text string explaining the reason for rejecting the floor request. | |
| User ID | Not present | | ON-NETWORK |
| User ID | | | OFF-NETWORK |
| User ID | px_MCPTT_User_A_ID | If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

5.5.6.5 Floor Release

Table 5.5.6.5-1: Floor Release

| Derivation Path: 24.380 [10], Table 8.2.7-1. | | | |
|--|--|--|-------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC | "10000000 11111111 00000000 00000001" | The SSRC of the floor participant sending the message. Coded as specified in IETF RFC 3550 [76] and assigned by the Floor Control Server (SS) The selected value is randomly chosen and can be used for one participant - globally unique within the RTP session. | |
| name | MCPT | | |
| User ID | Not present | | ON-NETWORK |
| User ID | | | OFF-NETWORK |
| User ID | px_MCPTT_User_A_ID | If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

5.5.6.6 Floor Idle

Table 5.5.6.6-1: Floor Idle

| Derivation Path: 24.380 [10], Table 8.2.8-1. | | | |
|--|---|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| Message Sequence Number | | | |
| Message Sequence Number | The value sent in the previous Floor Idle message, if any, increased with 1 | Any value between '0' and '65535' When the '65535' value is reached, the <Message Sequence Number> value starts from '0' again | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

5.5.6.7 Floor Taken

Table 5.5.6.7-1: Floor Taken

| Derivation Path: 24.380 [10], Table 8.2.9-1. | | | |
|--|--|--|-------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| User ID | Not present | | ON-NETWORK |
| User ID | | the MCPTT user ID of the floor participant sending the Floor Taken message | OFF-NETWORK |
| User ID | px_MCPTT_User_A_ID | If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Granted Party's Identity | | | |
| Granted Party's Identity | px_MCPTT_User_B_ID | If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Permission to Request the Floor | | | |
| Permission to Request the Floor | "1" | The receiver is permitted to request floor | |
| Message Sequence Number | | | |
| Message Sequence Number | The value sent in the previous Floor Taken message, if any, increased with 1 | Any value between '0' and '65535' When the '65535' value is reached, the <Message Sequence Number> value starts from '0' again | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

| Derivation Path: 24.380 [10], Table 8.2.9-1. | | | |
|--|--|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of granted floor participant | "10000000 11111111 00000000 10000000" | The SSRC of the granted floor participant. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |

5.5.6.8 Floor Revoke

Table 5.5.6.8-1: Floor Revoke

| Derivation Path: 24.380 [10], Table 8.2.10.1-1. | | | |
|---|--|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| Reject Cause | | | |
| Reject Cause | "4" | Cause#4 - Media Burst pre-empted | |
| Reject Phrase | "Media Burst pre-empted" | a text string encoded the text string in the SDES item CNAME as specified in IETF RFC 3550 [76], subclause 6.5.1. | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

5.5.6.9 Floor Queue Position Request

Table 5.5.6.9-1: Floor Queue Position Request

| Derivation Path: 24.380 [10], Table 8.2.11-1. | | | |
|---|--|--|-------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC | "10000000 11111111 00000000 00000001" | The SSRC of the floor participant sending the message. Coded as specified in IETF RFC 3550 [76] and assigned by the Floor Control Server (SS) The selected value is randomly chosen and can be used for one participant - globally unique within the RTP session. | |
| name | MCPT | | |
| User ID | Not present | | ON-NETWORK |
| User ID | | | OFF-NETWORK |
| User ID | px_MCPTT_User_A_ID | If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |

5.5.6.10 Floor Queue Position Info

Table 5.5.6.10-1: Floor Queue Position Info

| Derivation Path: 24.380 [10], Table 8.2.12-1. | | | |
|---|--|---|-------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| User ID | Not present | | ON-NETWORK |
| User ID | | | OFF-NETWORK |
| User ID | px_MCPTT_User_B_ID | the MCPTT ID of the floor participant sending the Floor Queue Position Info message If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| SSRC of queued floor participant | Note present | | ON-NETWORK |
| | "10000000 11111111 00000000 00000001" | The SSRC field carries the SSRC of the queued floor participant | OFF-NETWORK |
| Queued User ID | Not present | | ON-NETWORK |
| Queued User ID | | | OFF-NETWORK |
| Queued User ID | px_MCPTT_User_A_ID | the MCPTT ID of the queued floor participant If the length of the <User ID> value is not a multiple of 4 bytes User ID field shall be padded to a multiple of 4 bytes='0' | |
| Queue Info | | | |
| Queue Position Info | "1" | | |
| Queue Priority Level | "0" | | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |
| Floor Indicator | | | |
| Floor Indicator | Any allowed value | | |

5.5.6.11 Floor Ack

Table 5.5.6.11-1: Floor Ack

| Derivation Path: 24.380 [10], Table 8.2.13-1. | | | |
|---|--|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor participant or the floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| Source | | | |
| Source | "2" | The controlling MCPTT function is the source | |
| Message Type | | | |
| Message Type | "10100" | Floor Ack message for Floor Release message which requested acknowledgment | |
| Track Info | Not present | The MCPTT call does not involve a non-controlling MCPTT function | |

5.5.6.12 Connect

Table 5.5.6.12-1: Connect

| Derivation Path: 24.380 [10], Table 8.3.4-1. | | | |
|---|--|--|--------------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor participant or the floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPC | | |
| MCPTT Session Identity field | | | |
| Session Type | "00000011" | prearranged | |
| MCPTT Session Identity | px_MCPTT_sesson_B_ID | SIP URI, which identifies the MCPTT session between the MCPTT client and the controlling MCPTT function | |
| MCPTT Group Identity field | Not Present | | PRIVATE-CALL |
| MCPTT Group Identity field | | | GROUP-CALL |
| MCPTT Group Identity | px_MCPTT_Group_A_ID | a SIP URI, which identifies the MCPTT group | |
| Media Streams | | | |
| Media Stream field | "1" | 8 bit parameter giving the number of the "m=audio" m-line negotiated in the pre-established session | |
| Control Channel | "2" | 8 bit parameter giving the number of the "m=application" m-line negotiated in the pre-established session | |
| Warning Text field | Not Present | | |
| Answer State field | | | |
| Answer State | "1" | confirmed | |
| Inviting MCPTT User Identity field | | | |
| Inviting MCPTT User Identity | px_MCPTT_User_A_ID | SIP URI, which identifies the inviting MCPTT user | |
| PCK I_MESSAGE field | Not Present | | |

5.5.6.13 Disconnect

Table 5.5.6.13-1: Disconnect

| Derivation Path: 24.380 [10], Table 8.3.5-1. | | | |
|---|--|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor participant or the floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPC | | |
| MCPTT Session Identity field | | | |
| Session Type | "00000011" | prearranged | |
| MCPTT Session Identity | px_MCPTT_session_B_ID | | |

5.5.6.14 Acknowledgement

Table 5.5.6.14-1: Acknowledgement

| Derivation Path: 24.380 [10], Table 8.3.6-1. | | | |
|---|--|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor participant or the floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPC | | |
| Reason Code | | | |
| Reason Code | "0" | Accepted | |

5.5.6.15 Map Group To Bearer

| Derivation Path: 24.380 [10], Table 8.4.4-1. | | | |
|---|--|---|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor participant or the floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCMC | | |
| MCPTT Group ID | px_MCPTT_Group_A_ID | The group ID of the call | |
| TMGI | | | |
| MBMS Service ID | "0F0F0F" | The selected value is randomly chosen - a 6 digit hexadecimal number between 000000 and FFFFFFFF (see TS 23.003 [69] subclause 15.2. The coding of the MBMS Service ID is the responsibility of each administration | |
| MCC | The same value as for PLMN1 specified in Table 5.5.8.1-x | Mobile Country Code | |
| MNC | The same value as for PLMN1 specified in Table 5.5.8.1-x | Mobile Network Code | |
| MBMS Subchannel | | | |
| Audio m-line Number | "1" | The number of the "m=audio" m-line in the SIP MESSAGE request announcing the MBMS bearer | |
| Floor m-line Number | "2" | The number of the "m=application" m-line in the SIP MESSAGE request announcing the MBMS bearer. The <Floor m-line Number> value is set to "0" when the same subchannel is used for media and for floor control. | |
| IP version | "0" | '0' = IP version 4 '1' = IP version 6 All other values are reserved for future use | |

| Derivation Path: 24.380 [10], Table 8.4.4-1. | | | |
|--|--------------|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| Floor control Port Number | "9" | The port to be used if the <Floor m-line Number> value is greater than '0'. If the <Floor m-line Number> value is equal to '0', the <Floor control Port Number> value is not included in the MBMS Subchannel field | |
| Media Port Number | "9" | | |
| IP Address | "0.0.0.0" | | |

5.5.6.16 Unmap Group To Bearer

| Derivation Path: 24.380 [10], Table 8.4.5-1. | | | |
|---|--|--|-----------|
| Information Element | Value/remark | Comment | Condition |
| SSRC of floor participant or the floor control server | "10000000 11111111 00000001 00000000" | The SSRC of the floor control server. The selected value is randomly chosen - any suitable random 32-bit number that is globally unique within the RTP session. | |
| name | MCPT | | |
| MCPTT Group ID | px_MCPTT_Group_A_ID | The group ID of the call | |

5.5.7 Default MCPTT group management messages and other information elements

5.5.7.1 MCPTT Group Configuration

Table 5.5.7.1-1: MCPTT Group Configuration Defaults

| Derivation Path: TS 24.483 [13], subclause 6.2 | | | | |
|--|---|---|---------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Node | urn:oma:mo:oma-dm-mcptt-group-configuration:1.0 | Group 1 | | |
| Name | "mcptt-group-A-configuration" | Name of configuration file | | |
| Common | | | | |
| MCPTTGroupID | px_MCPTT_Group_A_ID | Value is a "uri" attribute specified in OMA OMA-TS-XDM_Group-V1_1 | | |
| MCPTTGroupAlias | px_MCPTT_Group_A_Name | Value is a <display-name> element specified in OMA OMA-TS-XDM_Group-V1_1 | | |
| MCPTTGroupMemberList | | group member 1 | | |
| MCPTTID | px_MCPTT_User_A_ID | Indicates an MCPTT user identity (MCPTT ID) which is a globally unique identifier within the MCPTT service that represents the MCPTT user | | |
| UserPriority | "3" | Indicates the user priority of the MCPTT group member | TS 24.481 [11] | |
| ParticipantType | px_MCPTT_User_A_ParticipantType | Participant type of the MCPTT group | | |
| MCPTTGroupMemberList | | group member 2 | | |
| MCPTTID | px_MCPTT_User_B_ID | Indicates an MCPTT user identity (MCPTT ID) which is a globally unique identifier within the MCPTT service that represents the MCPTT user | | |
| UserPriority | "2" | Indicates the user priority of the MCPTT group member | TS 24.481 [11] | |
| ParticipantType | px_MCPTT_User_B_ParticipantType | Participant type of the MCPTT group | | |
| MCPTTGroupMemberList | | group member 3 | | |
| MCPTTID | px_MCPTT_User_C_ID | Indicates an MCPTT user identity (MCPTT ID) which is a globally unique identifier within the MCPTT service that represents the MCPTT user | | |
| UserPriority | "1" | Indicates the user priority of the MCPTT group member | TS 24.481 [11] | |
| ParticipantType | px_MCPTT_User_C_ParticipantType | Participant type of the MCPTT group | | |
| MCPTTGroupOwner | px_MCPTT_Group_A_Owner_Organization | Group's owner (Mission Critical Organisation). | | |
| PreferredVoiceCodec | px_MCPTT_Group_A_preferred_VCodec | Preferred voice codec is a RTP payload. MCPTT clients shall support the AMR-WB codec. | RFC 4566 [27] TS 26.171 [66] | |
| MCPTTGroupLevel | "0" | Indicates the level within a group hierarchy (only applicable for group-broadcast group). | | |

| Derivation Path: TS 24.483 [13], subclause 6.2 | | | | |
|--|---|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| UserLevel | "0" | Indicates the level within user hierarchy (only applicable for user-broadcast group). | | |
| AllowedEmergencyCall | "true" | Indicates whether an MCPTT emergency group call is permitted on the MCPTT group | | |
| AllowedImminentPerilCall | "true" | Indicates whether an MCPTT imminent peril group call is permitted on the MCPTT group | | |
| AllowedEmergencyAlert | "true" | Indicates whether an MCPTT emergency alert is possible on the MCPTT group | | |
| MediaProtectionReq | "true" | Indicates whether confidentiality and integrity of media is required on the MCPTT group | | |
| FloorControlProtectionReq | "true" | Indicates whether confidentiality and integrity of floor control signalling is required on the MCPTT group | | |
| MediaProtectionMaterial | MIKEY-SAKKE_I_MESSAGE as defined in Table 5.5.9.1-1 | The security material for group media protection. | TS 33.179 [15] | |
| OffNetwork | | | | |
| MCPTTGroupParameter | | | | |
| ProSeLayer2GroupID | px_Group_A_ProSeLayer2GroupID | Indicates the ProSe layer-2 group ID | TS 23.303 [68] | |
| IPMulticastAddress | "0.0.0.0" | Indicates the ProSe group IP multicast address | TS 23.303 [68] | |
| RelayServiceCode | "123456" | Indicates the connectivity service that the ProSe UE-to-network relay provides to public safety applications | TS 23.303 [68] | |
| IPVersions | "IPv4" | Indicates whether IPv4 or IPv6 is used for the MCPTT group | TS 23.303 [68] | |
| EmergencyCallCancel | "65535" | Indicates the timeout value for the cancellation of an in progress emergency for an MCPTT group call. Values: 0-65535 s | | |
| ImminentPerilCallCancel | "65535" | Indicates the timeout value for the cancellation of an in progress imminent peril for an MCPTT group call. Values: 0-65535 s | | |
| HangTime | "5" | Indicates the group call hang timer. Values: 0-65535 s | | |
| MaxDuration | "60" | Indicates the max duration of group calls. Values: 0-65535 s | | |
| QueueUsage | "true" | Indicates if queuing is enabled or not | | |

| Derivation Path: TS 24.483 [13], subclause 6.2 | | | | |
|--|---|---|---------------------------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| DefaultPPPP | | | | |
| GroupCallSignalling | "1" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| GroupCallMedia | "1" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| EmerGroupCallSignalling | "8" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| EmerGroupCallMedia | "8" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| ImPerilGroupCallSignalling | "7" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| ImPerilGroupCallMedia | "7" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| Node | urn:oma:mo:oma-dm-mcptt-group-configuration:1.0 | Group 2 | | |
| Name | "mcptt-group-D-configuration" | Name of configuration file | | |
| Common | | | | |
| MCPTTGroupID | px_MCPTT_Group_D_ID | Value is a "uri" attribute specified in OMA OMA-TS-XDM_Group-V1_1 | | |
| MCPTTGroupAlias | px_MCPTT_Group_D_Name | Value is a <display-name> element specified in OMA OMA-TS-XDM_Group-V1_1 | | |
| MCPTTGroupMemberList | | | | |
| MCPTTID | px_MCPTT_User_A_ID | Indicates an MCPTT user identity (MCPTT ID) which is a globally unique identifier within the MCPTT service that represents the MCPTT user | | |
| UserPriority | "3" | Indicates the user priority of the MCPTT group member | TS 24.481 [11] | |
| ParticipantType | px_MCPTT_User_A_ParticipantType | Participant type of the MCPTT group | | |
| MCPTTGroupMemberList | | | | |
| MCPTTID | px_MCPTT_User_B_ID | Indicates an MCPTT user identity (MCPTT ID) which is a globally unique identifier within the MCPTT service that represents the MCPTT user | | |
| UserPriority | "2" | Indicates the user priority of the MCPTT group member | TS 24.481 [11] | |
| ParticipantType | px_MCPTT_User_B_ParticipantType | Participant type of the MCPTT group | | |
| MCPTTGroupOwner | px_MCPTT_Group_D_Owner_Organization | Group's owner (Mission Critical Organisation). | | |
| PreferredVoiceCodec | px_MCPTT_Group_D_preferred_VCodec | Preferred voice codec is a RTP payload. MCPTT clients shall support the AMR-WB codec. | RFC 4566 [27] TS 26.171 [66] | |

| Derivation Path: TS 24.483 [13], subclause 6.2 | | | | |
|--|---|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| MCPTTGroupLevel | "0" | Indicates the level within a group hierarchy (only applicable for group-broadcast group). | | |
| UserLevel | "0" | Indicates the level within user hierarchy (only applicable for user-broadcast group). | | |
| AllowedEmergencyCall | "false" | Indicates whether an MCPTT emergency group call is permitted on the MCPTT group | | |
| AllowedImminentPerilCall | "false" | Indicates whether an MCPTT imminent peril group call is permitted on the MCPTT group | | |
| AllowedEmergencyAlert | "false" | Indicates whether an MCPTT emergency alert is possible on the MCPTT group | | |
| MediaProtectionReq | "true" | Indicates whether confidentiality and integrity of media is required on the MCPTT group | | |
| FloorControlProtectionReq | "true" | Indicates whether confidentiality and integrity of floor control signalling is required on the MCPTT group | | |
| MediaProtectionMaterial | MIKEY-SAKKE I_MESSAGE as defined in Table 5.5.9.1-1 | The security material for group media protection. | TS 33.179 [15] | |
| OffNetwork | | | | |
| MCPTTGroupParameter | | | | |
| ProSeLayer2GroupID | px_MCPTT_Group_D_ProSeLayer2GroupID | Indicates the ProSe layer-2 group ID | TS 23.303 [68] | |
| IPMulticastAddress | "0.0.0.0" | Indicates the ProSe group IP multicast address | TS 23.303 [68] | |
| RelayServiceCode | "123456" | Indicates the connectivity service that the ProSe UE-to-network relay provides to public safety applications | TS 23.303 [68] | |
| IPVersions | "IPv4" | Indicates whether IPv4 or IPv6 is used for the MCPTT group | TS 23.303 [68] | |
| EmergencyCallCancel | "65535" | Indicates the timeout value for the cancellation of an in progress emergency for an MCPTT group call. Values: 0-65535 s | | |
| ImminentPerilCallCancel | "65535" | Indicates the timeout value for the cancellation of an in progress imminent peril for an MCPTT group call. Values: 0-65535 s | | |
| HangTime | "5" | Indicates the group call hang timer. Values: 0-65535 s | | |

| Derivation Path: TS 24.483 [13], subclause 6.2 | | | | |
|--|--------------|--|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| MaxDuration | "60" | Indicates the max duration of group calls. Values: 0-65535 s | | |
| QueueUsage | "true" | Indicates if queuing is enabled or not | | |
| DefaultPPPP | | | | |
| GroupCallSignalling | "1" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| GroupCallMedia | "1" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| EmerGroupCallSignalling | "8" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| EmerGroupCallMedia | "8" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| ImPerilGroupCallSignalling | "7" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |
| ImPerilGroupCallMedia | "7" | Indicates the default ProSe Per-Packet Priority (PPPP) value | | |

5.5.8 Default MCPTT configuration management messages and other information elements

5.5.8.1 MCPTT Initial UE Configuration

Table 5.5.8.1-1: MCPTT Initial UE Configuration Defaults

| Derivation Path: TS 24.483 [13], subclause 8.2 | | | | |
|--|--|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Node | "urn:oma:mo:oma-dm-mcptt-ue-initial-configuration:1.0" | Base node | | |
| Name | "mcptt-client-A-init-config" | Name of configuration file | | |
| Ext | px_MCPTT_vendor_specific_information_init_configC | | | |
| DefaultUserProfile | | | | |
| UserID | px_MCPTT_User_A_ID | Default User Identity | | |
| UserProfileIndex | "0" | Values 0-255. Indicates selected user profile | | |
| OnNetwork | | | | |
| GMSURI | px_MCPTT_GMSURI | The group management service URI information which contains the public service identity for performing subscription proxy function of the GMS | TS 23.003 [69] | |
| GroupCreationXUI | px_MCPTT_GroupCreationXUI | Indicates the group creation XUI information for creation of groups | TS 23.003 [69] | |
| GMSXCAPRootURI | px_MCPTT_GMSXCAPRootURI | Indicates the group management server XCAP Root URI information | TS 23.003 [69] | |
| CMSXCAPRootURI | px_MCPTT_CMSXCAPRootURI | Indicates the configuration management server XCAP Root URI information | TS 23.003 [69] | |
| Timers | | | | |
| T100 | "2" | Values 0-255 sec | TS 24.380 [10] | |
| T101 | "2" | Values 0-255 sec | TS 24.380 [10] | |
| T103 | "5" | Values 0-255 sec | TS 24.380 [10] | |
| T104 | "2" | Values 0-255 sec | TS 24.380 [10] | |
| T132 | "3" | Values 0-255 sec | TS 24.380 [10] | |
| HPLMN | | | | |
| PLMN | PLMN1 | the PLMN on which the UE is allowed for MCPTT services. Public Land Mobile Network is uniquely identified by its PLMN identifier; consists of Mobile Country Code (MCC) and Mobile Network Code (MNC) and are defined by the operator. NOTE: PLMN1 shall be the PLMN of the Cell on which the UE is camped during testing. | TS 23.003 [69] | |
| Service | | Node indicates the MCPTT related services on a per HPLMN basis | | |

| Derivation Path: TS 24.483 [13], subclause 8.2 | | | | |
|--|------------------|--|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| MCPTTToConRef | | interior node contains the configuration parameters for establishment of the PDN connection for the MCPTT service on a per HPLMN basis | | |
| ConRef | px_MCS_ALL_APN | <A network access point object> linkage to the connectivity parameters | | |
| MCCCommonCoreToConRef | | interior node contains the configuration parameters for establishment of the PDN connection for the MC common core service on a per HPLMN basis | | |
| ConRef | px_MCPTT_ALL_APN | <A network access point object> linkage to the connectivity parameters | | |
| MCIDMToConRef | | interior node contains the configuration parameters for establishment of the PDN connection for the MC identity management service on a per HPLMN basis | | |
| ConRef | px_MCPTT_ALL_APN | <A network access point object> linkage to the connectivity parameters | | |
| VPLMN | | | | |
| PLMN | PLMN2 | VPLMN configuration for another PLMN which can be used by the UE to access MCPTT service NOTE: PLMN2 shall be a different PLMN to PLMN1 of a Cell to which the UE will move during testing when specified in a test case. | | |
| Service | | Node indicates the MCPTT related services on the VPLMN | | |
| MCPTTToConRef | | interior node contains the configuration parameters for establishment of the PDN connection for the MCPTT service on a per VPLMN and HPLMN basis | | |
| ConRef | px_MCPTT_ALL_APN | <A network access point object> linkage to the connectivity parameters | | |

| Derivation Path: TS 24.483 [13], subclause 8.2 | | | | |
|--|----------------------------|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| MCCCommonCoreToConRef | | interior node contains the configuration parameters for establishment of the PDN connection for the MC common core service on a per VPLMN and HPLMN basis | | |
| ConRef | px_MCPTT_ALL_APN | <A network access point object> linkage to the connectivity parameters | | |
| MCIDMToConRef | | interior node contains the configuration parameters for establishment of the PDN connection for the MC identity management service on a per VPLMN and HPLMN basis | | |
| ConRef | px_MCPTT_ALL_APN | <A network access point object> linkage to the connectivity parameters | | |
| AppServerInfo | | | | |
| IDMSAuthEndpoint | px_MCPTT_IDMSAuthEndpoint | Identity management server authorisation endpoint identity information | TS 23.003 [69] | |
| IDMSTokenEndpoint | px_MCPTT_IDMSTokenEndpoint | Identity management server token endpoint identity information | TS 23.003 [69] | |
| HTTPProxy | not present | No HTTP Proxy | TS 23.003 [69] | |
| GMS | px_MCPTT_GMS | Indicates the group management server identity information | TS 23.003 [69] | |
| CMS | px_MCPTT_CMS | Indicates the configuration management server identity information | TS 23.003 [69] | |
| KMS | px_MCPTT_KMS | Indicates the key management server identity information | TS 23.003 [69] | |
| TLSTunnelAuthMethod | | | | |
| Mutual | "false" | Indicates whether mutual authentication is used for the TLS tunnel authentication false=one-way authentication based on the server certificate is used | | |
| X509 | "" | the X.509 certificate for mutual authentication for the TLS tunnel authentication | | |
| Key | "" | pre-shared key for mutual authentication for the TLS tunnel authentication | | |
| IntegrityProtection | "true" | Indicates whether integrity protection is enabled | | |

| Derivation Path: TS 24.483 [13], subclause 8.2 | | | | |
|--|--------------|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| ConfidentialityProtection | "true" | Indicates whether integrity protection is enabled | | |
| OffNetwork | | | | |
| Timers | | | | |
| TFG1 | "150" | Indicates the timer for wait for call announcement; Values: 0-65535 ms | TS 24.379 [9] | |
| TFG2 | "2000" | Indicates the timer for call announcement; Values: 0-65535 ms | TS 24.379 [9] | |
| TFG3 | "40" | Indicates the timer for call probe retransmission; Values: 0-65535 ms | TS 24.379 [9] | |
| TFG4 | "20" | Indicates the timer for waiting for the MCPTT user; Values: 0-60 s | TS 24.379 [9] | |
| TFG5 | "2" | Indicates the timer for not present incoming call announcements; Values: 0-255 s | TS 24.379 [9] | |
| TFG11 | "3000" | Indicates the timer for MCPTT emergency end retransmission; Values: 0-65535 ms | TS 24.379 [9] | |
| TFG12 | "3000" | Indicates the timer for MCPTT imminent peril end retransmission; Values: 0-65535 ms | TS 24.379 [9] | |
| TFG13 | "1" | Indicates the timer for implicit priority downgrade; Values: 0-255 s | TS 24.379 [9] | |
| TFG14 | "1" | Indicates the MCPTT timer for implicit priority downgrade (imminent peril); Values: 0-255 s | TS 24.379 [9] | |
| TFP1 | "2000" | Indicates the timer for private call request retransmission; Values: 0-65535 ms | TS 24.379 [9] | |
| TFP2 | "5000" | Indicates the timer for waiting for call response message; Values: 0-65535 ms | TS 24.379 [9] | |
| TFP3 | "2000" | Indicates the timer for private call release retransmission; Values: 0-65535 ms | TS 24.379 [9] | |
| TFP4 | "5000" | Indicates the timer for private call release retransmission; Values: 0-65535 ms | TS 24.379 [9] | |
| TFP5 | "30" | Indicates the timer for call release; Values: 0-600 s | TS 24.379 [9] | |
| TFP6 | "3000" | Indicates the timer for MCPTT emergency private call cancel retransmission; Values: 0-65535 ms | TS 24.379 [9] | |

| Derivation Path: TS 24.483 [13], subclause 8.2 | | | | |
|--|--------------|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| TFP7 | "6" | Indicates the timer for waiting for any message with same call identifier; Values: 0-255 s | TS 24.379 [9] | |
| TFB1 | "300" | Indicates the timer for max duration; Values: 0-600 s | TS 24.379 [9] | |
| TFB2 | "10" | Indicates the timer for max duration; Values: 0-10 s | TS 24.379 [9] | |
| TFB3 | "20" | Indicates the timer for waiting for the MCPTT user; Values: 0-60 s | TS 24.379 [9] | |
| T201 | "1000" | Indicates the timer for floor request; Values: 0-65535 ms | TS 24.380 [10] | |
| T203 | "5" | Indicates the timer for end of RTP media; Values: 0-255 s | TS 24.380 [10] | |
| T204 | "5" | Indicates the timer for floor queue position request; Values: 0-255 s | TS 24.380 [10] | |
| T205 | "1" | Indicates the timer for floor granted request; Values: 0-255 s | TS 24.380 [10] | |
| T230 | "10" | Indicates the timer for inactivity; Values: 0-255 s | TS 24.380 [10] | |
| T233 | "10" | Indicates the timer for pending user action; Values: 0-255 s | TS 24.380 [10] | |
| TFE1 | "30" | Indicates the timer for MCPTT emergency alert; Values: 0-65535 s | TS 24.379 [9] | |
| TFE2 | "10" | Indicates the timer for MCPTT emergency alert re-transmission; Values: 0-10 s | TS 24.379 [9] | |
| Counters | | | | |
| CFP1 | "3" | Indicates the counter for private call request retransmission | TS 24.379 [9] | |
| CFP3 | "5" | Indicates the counter for private call release retransmission | TS 24.379 [9] | |
| CFP4 | "2" | Indicates the counter for private call accept retransmission | TS 24.379 [9] | |
| CFP6 | "2" | Indicates the counter for private call accept retransmission | TS 24.379 [9] | |
| CFP11 | "2" | Indicates the counter for MCPTT group call emergency end retransmission | TS 24.379 [9] | |
| CFP12 | "2" | Indicates the counter for MCPTT imminent peril call emergency end retransmission | TS 24.379 [9] | |
| C201 | "3" | Indicates the counter for floor request | TS 24.379 [9] | |

| Derivation Path: TS 24.483 [13], subclause 8.2 | | | | |
|--|--------------|--|---------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| C204 | "2" | Indicates the counter for floor queue position request | TS 24.379 [9] | |
| C205 | "4" | Indicates the counter for floor granted request | TS 24.379 [9] | |

5.5.8.2 MCPTT UE Configuration

Table 5.5.8.2-1: MCPTT UE Configuration Defaults

| Derivation Path: TS 24.483 [13], subclause 4.2 | | | | |
|--|--|---|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Node | "urn:oma:mo:oma-dm-mcptt-ue-configuration:1.0" | Base node | | |
| Name | "mcptt-client-A-config" | Name of configuration file | | |
| Ext | px_MCPTT_vendor_specific_information_configuration | | | |
| Common | | For on-network operation and off-network operation | | |
| PrivateCall | | | | |
| MaxCallN10 | "2" | Indicates the maximum number of private calls | | |
| MCPTTGroupCall | | | | |
| MaxCallN4 | "3" | Indicates the maximum number of simultaneous group calls | | |
| MaxTransmissionN5 | "5" | Indicates the maximum number of transmissions in a group | | |
| PrioritizedMCPTTGroup | | One prioritised group | | |
| MCPTTGroupID | px_MCPTT_Group_A_ID | Value is a "uri" attribute specified in OMA OMA-TS-XDM_Group-V1_1 that indicates the group id. | | |
| MCPTTGroupPriority | "7" | Indicates the requested presentation priority of group call; Values: 0-7 "7"=the top priority among groups | | |
| OnNetwork | | Only for on-network operation | | |
| RelayService | "true" | Indicates the authorisation to use a relay service | | |
| IPv6Preferred | "false" | Indicates whether IPv6 is preferred over IPv4 for on-network operation when the MCPTT UE has both IPv4 and IPv6 host configuration. | | |
| RelayedMCPTTGroup | | | | |
| MCPTTGroupID | px_MCPTT_Group_A_ID | One allowed relayed MCPTT group | | |
| RelayServiceCode | "123456" | Identifies a connectivity service the ProSe UE-to-Network Relay provides to Public Safety applications; 24-bit value | TS 23.303 [68] | |

5.5.8.3 MCPTT User Profile

Table 5.5.8.3-1: MCPTT User Profile Defaults

| Derivation Path: TS 24.483 [13], subclause 5.2 | | | | |
|--|---|--|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Node | "urn:oma:mo:oma-dm-mcptt-user-profile:1.0" | Base node | | |
| Name | "mcptt-user-A-profile" | Name of User Profile file | | |
| Ext | px_MCPTT_vendor_specific_information_user_profile | | | |
| Common | | | | |
| MCPTTUserID | px_MCPTT_User_A_ID | MCPTT user identity (MCPTT ID) which is a globally unique identifier within the MCPTT service that represents the MCPTT user | | |
| MCPTTUserProfileIndex | "0" | Index for the particular MCPTT user profile | | |
| MCPTTUserProfileName | px_MCPTT_User_A_Profile_Name | Profile name for the MCPTT user | | |
| PreSelectedIndication | not present | | TS 23.179 [8] | |
| UserAlias | px_MCPTT_User_A_Aliases | Alphanumeric aliases of MCPTT user | | |
| AuthorisedAlias | "false" | Indicates authorisation to create and delete aliases of other MCPTT users | | |
| ParticipantType | px_MCPTT_User_A_ParticipantType | Participant type of the MCPTT user | | |
| Organization | px_MCPTT_User_A_Organization | Indicates the organization an MCPTT user belongs to | | |
| PrivateCall | | | | |
| Authorised | "true" | Indicates the authorisation to make a MCPTT private call | | |
| AuthorisedAny | "true" | indicates the authorisation to make a MCPTT private call to any MCPTT user | | |
| UserList | | | | |
| Entry | | | | |
| MCPTTID | px_MCPTT_User_B_ID | MCPTT user(s) who can be called in a MCPTT private call | | |
| DiscoveryGroupID | "1234" | Discovery group ID in the ProSe discovery procedures | TS 23.303 [68] | |
| UserInfoID | "5555" | ProSe user Info ID in the ProSe discovery procedures | TS 23.303 [68] | |
| DisplayName | "User B Name" | a human readable name for this User | | |
| UserList | | | | |
| Entry | | | | |
| MCPTTID | px_MCPTT_User_C_ID | MCPTT user(s) who can be called in a MCPTT private call | | |
| DiscoveryGroupID | "1234" | Discovery group ID in the ProSe discovery procedures | TS 23.303 [68] | |
| UserInfoID | "6666" | ProSe user Info ID in the ProSe discovery procedures | TS 23.303 [68] | |
| DisplayName | "User C Name" | a human readable name for this User | | |

| Derivation Path: TS 24.483 [13], subclause 5.2 | | | | |
|--|--------------------|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| ManualCommence | "true" | Indicates the authorisation to make a MCPTT private call with manual commencement | | |
| AutoCommence | "true" | Indicates the authorisation to make a MCPTT private call with automatic commencement | | |
| AutoAnswer | "true" | Indicates the authorisation of MCPTT user to force automatic answer for a MCPTT private call | | |
| FailRestrict | "false" | Indicates the authorisation to restrict the provision of a notification of call failure reason for a MCPTT private call | | |
| MediaProtection | "true" | Indicates authorisation to protect confidentiality and integrity of media for MCPTT private calls | | |
| FloorControlProtection | "true" | Indicates authorisation to protect confidentiality and integrity of floor control signalling for MCPTT private calls. | | |
| EmergencyCall | | | | |
| Authorised | "true" | Indicates the authorisation to make an MCPTT emergency private call. | | |
| CancelPriority | "true" | Indicates the authorisation to cancel emergency priority in an MCPTT emergency private call by an authorised MCPTT user | | |
| MCPTTPrivateRecipient | | | | |
| Entry | | | | |
| ID | px_MCPTT_User_B_ID | The MCPTT private recipient for an MCPTT emergency private call | | |
| DiscoveryGroupID | "1234" | Discovery group ID in the ProSe discovery procedures | | |
| UserInfoID | "5555" | ProSe user Info ID in the ProSe discovery procedures | | |
| DisplayName | "User B Name" | a human readable name for this User | | |
| Usage | "UsePreConfigured" | Indicates the criteria to determine when initiation of an MCPTT emergency private call uses the MCPTT private recipient ID. | | |
| MCPTTGroupCall | | | | |

| Derivation Path: TS 24.483 [13], subclause 5.2 | | | | |
|--|----------------------------------|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| MaxSimultaneousCallsN6 | "3" | Indicates the maximum number of simultaneously received MCPTT group calls | | |
| EmergencyCall | | | | |
| Enabled | "true" | Indicates the authorisation to make an MCPTT emergency group call functionality enabled for MCPTT user | | |
| MCPTTGroupInitiation | | | | |
| Entry | | | | |
| GroupID | px_MCPTT_Group_A_ID | The group used upon certain criteria on initiation of an MCPTT emergency group call | | |
| DisplayName | px_MCPTT_Group_A_Namenot present | The display name for group used for emergency | | |
| Usage | "UseCurrentlySelected Group" | Use currently selected MCPTT group for an on-network MCPTT emergency group call | | |
| CancelMCPTTGroup | "true" | Indicates the authorisation to cancel an in progress MCPTT emergency call associated with a group. | | |
| ImminentPerilCall | | | | |
| Authorised | "true" | Indicates the authorisation to make an Imminent Peril group call | | |
| Cancel | "true" | Indicates the authorisation for in-progress MCPTT imminent peril cancelation | | |
| MCPTTGroupInitiation | | | | |
| Entry | | | | |
| GroupID | px_MCPTT_Group_A_ID | Multiple entries [x]; single default entry the group used on initiation of an MCPTT imminent peril group call. | | |
| DisplayName | px_MCPTT_Group_A_Namenot present | display name for group used for the imminent peril call | | |
| Usage | "UseCurrentlySelected Group" | Use currently selected MCPTT group for an on-network MCPTT imminent peril group call | | |
| EmergencyAlert | | | | |
| Authorised | "true" | Indicates the authorisation to activate an MCPTT emergency alert | | |
| Cancel | "true" | Indicates the authorisation to cancel an MCPTT emergency alert | | |

| Derivation Path: TS 24.483 [13], subclause 5.2 | | | | |
|--|----------------------------------|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Entry | | | | |
| ID | px_MCPTT_Group_A_ID | Indicates the MCPTT group used upon certain criteria on initiation of an MCPTT emergency alert. | | |
| DisplayName | px_MCPTT_Group_A_Namenot present | Optional; name of emergency alert group | | |
| Usage | "UseCurrentlySelected Group" | Use currently selected MCPTT group for emergency alert | | |
| Priority | "10" | Indicates the priority of the MCPTT group calls, 0-255 | | |
| MCPTTGroupBroadcast | | | | |
| Authorised | "true" | Indicates the authorisation to create a user-broadcast group | | |
| UserBroadcast | | | | |
| Authorised | "true" | Indicates the authorisation to create a user-broadcast group | | |
| OnNetwork | | | | |
| MCPTTGroupList | | | | |
| Entry | | | | |
| MCPTTGroupID | px_MCPTT_Group_A_ID | The MCPTT group ID for the on-network MCPTT group that the MCPTT user is allowed to affiliate to. | | |
| DisplayName | px_MCPTT_Group_A_Name | The display name for the group | | |
| MCPTTGroupList | | | | |
| Entry | | | | |
| MCPTTGroupID | px_MCPTT_Group_D_ID | The MCPTT group ID for the on-network MCPTT group that the MCPTT user is allowed to affiliate to. | | |
| DisplayName | px_MCPTT_Group_D_Name | The display name for the group | | |
| ImplicitAffiliations | | | | |
| Entry | | | | |
| MCPTTGroupID | px_MCPTT_Group_A_ID | indicates a MCPTT group ID to which the MCPTT user is implicitly affiliated to | | |
| DisplayName | px_MCPTT_Group_A_Name | display name for implicitly affiliated group | | |
| AllowedRegroup | "true" | Indicates whether the MCPTT user is authorised to perform dynamic regrouping operations | | |

| Derivation Path: TS 24.483 [13], subclause 5.2 | | | | |
|--|-----------------------|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| AllowedPresenceStatus | "true" | Indicates the presence status on the network of this MCPTT user is available | | |
| AllowedPresence | "true" | Indicates whether the MCPTT user is authorised to obtain whether a particular MCPTT User is present on the network | | |
| EnabledParticipation | "true" | Indicates whether the MCPTT user is allowed to participate in MCPTT private calls that they are invited to | | |
| AllowedTransmission | "true" | Indicates whether the MCPTT user is authorised to override transmission in a MCPTT private call | | |
| AllowedManualSwitch | "true" | Indicates whether the MCPTT user is authorised to manually switch to off-network operation while in on-network operation | | |
| PrivateCall | | | | |
| EmergencyAlert | | | | |
| Entry | | | | |
| ID | px_MCPTT_User_B_ID | Indicates the default MCPTT user ID to be used upon certain criteria on initiation of an MCPTT private emergency alert for on-network | | |
| DisplayName | px_MCPTT_User_A_Alias | The display name corresponding to private emergency call id | | |
| Usage | "UsePreConfigured" | Indicates the criteria to determine when initiation of an MCPTT emergency private call uses the MCPTT private recipient ID. | | |
| OffNetwork | | | | |
| Authorised | "true" | Indicates the authorisation for off-network services | | |
| MCPTTGroupInfo | | | | |
| Entry | | | | |
| MCPTTGroupID | px_MCPTT_Group_A_ID | Indicates an off-network MCPTT group for use by an MCPTT user | | |
| DisplayName | px_MCPTT_Group_A_Name | The display name corresponding to off-network group id | | |
| AllowedListen | "false" | Indicates whether the MCPTT user is allowed to listen both overriding and override | | |

| Derivation Path: TS 24.483 [13], subclause 5.2 | | | | |
|--|--------------|---|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| AllowedTransmission | "false" | Indicates whether the MCPTT user is allowed to transmit in case of override (overriding and/or overridden) | | |
| EmergencyCallChange | "true" | Indicates the authorisation for a participant to change an off-network group call in-progress to an off-network MCPTT emergency group call | | |
| ImminentPerilCallChange | "true" | Indicates the authorisation for a participant to change an off-network group call in-progress to an off-network MCPTT imminent peril group call | | |
| UserInfoID | "5555" | ProSe user info ID | TS 23.303 [68] | |
| Status | "true" | indicates whether this MCPTT user profile is enabled or disabled | | |

5.5.8.4 MCPTT Service Configuration

Table 5.5.8.4-1: MCPTT Service Configuration Defaults

| Derivation Path: TS 24.483 [13], subclause 7.2 | | | | |
|--|---|---|-----------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| Node | "urn:oma:mo:oma-dm-mcptt-service-configuration:1.0" | | | |
| Name | "mcptt-service-configuration" | Name of configuration file | | |
| Ext | px_MCPTT_vendor_specific_information_service_conf | | | |
| Common | | | | |
| BroadcastMCPTTGroupCall | | | | |
| NumLevelGroupHierarchy | "1" | Indicates the number of levels of group hierarchy for group-broadcast groups | | |
| NumLevelUserHierarchy | "1" | Indicates the number of levels of user hierarchy for user-broadcast groups | | |
| MinLengthAliasID | "2" | Indicates minimum length of an alphanumeric identifier (i.e., alias) | | |
| OffNetwork | | | | |
| PrivateCall | | | | |
| MaxDuration | "60" | Indicates max private call (with floor control) duration. Values: 0-65535 s | | |
| HangTime | "5" | Indicates hang timer for private calls (with floor control). Values: 0-65535 s | | |
| CancelTimeout | "5" | Indicates timeout value for the cancellation of an in progress emergency for an MCPTT private call. Values: : 0-65535 s | | |
| EmergencyCall | | | | |
| MCPTTGroupTimeout | "5" | Indicates time limit for an in progress MCPTT emergency call related to an MCPTT group. Values: 0-65535 s | | |
| NumLevelHierarchy | "4" | Indicates the number of levels of hierarchy for floor control override in off-network. Values: 4-256 | | |
| TransmitTimeout | "60" | Indicates transmit time limit from a single request to transmit in a group or private call. Values: 0-65535 s | | |
| TransmissionWarning | "50" | Indicates configuration of warning time before time limit of transmission is reached (off-network). Values: 0-255 s | | |
| HangTimeWarning | "4" | Indicates configuration of warning time before hang time is reached (off-network). Values: Values: 0-255 s | | |

| Derivation Path: TS 24.483 [13], subclause 7.2 | | | | |
|--|--------------|---|----------------|-----------|
| Information Element | Value/remark | Comment | Reference | Condition |
| DefaultPPPP | | | | |
| PrivateCallSignalling | "1" | Indicates the default ProSe Per-Packet Priority (PPPP) value | TS 23.303 [68] | |
| PrivateCallMedia | "1" | Indicates the default ProSe Per-Packet Priority (PPPP) value | TS 23.303 [68] | |
| EmerPrivateCallSignalling | "8" | Indicates the default ProSe Per-Packet Priority (PPPP) value | TS 23.303 [68] | |
| EmergencyPrivateCallMedia | "8" | Indicates the default ProSe Per-Packet Priority (PPPP) value | TS 23.303 [68] | |
| LogMetadata | "true" | Indicates whether an MCPTT emergency group call is permitted on the MCPTT group | | |

5.5.9 Default miscellaneous messages and other information elements

5.5.9.1 MIKEY-SAKKE I_MESSAGE

Table 5.5.9.1-1: MIKEY-SAKKE I_MESSAGE (Group call)

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|--------------|--|-----------|
| Field | Value/remark | Comment | Condition |
| MIKEY Common Header { | Any | | |
| version | '00000001'B | | |
| Data Type | '00011010'B | SAKKE msg (26) | |
| Next payload | '00000101'B | Next payload is timestamp | |
| V | '0'B | | |
| PRF func | '0000001'B | PRF-HMAC-SHA-256 | |
| CSB ID | GUK-ID | 32-bits | |
| | CSK-ID | 32 bits See TS 33.179 [15] subclause F.2.1 | CONFIG |
| #CS | '00000001'B | the number of crypto sessions in the CS ID map info. | |
| CS ID map type | 2 | GENERIC-ID | |
| CS ID map Info { | | | |
| CS ID | | the CS ID of the crypto session | |
| Prot type | | the security protocol to be used for the crypto session | |
| S | 1 | the ROC and SEQ fields are provided | |
| #P | | the number of security policies provided for the crypto session | |
| Ps { | | lists the policies for the crypto session | |
| Policy_no_1 | '00000001'B | a policy_no that corresponds to the policy_no of a SP payload | |
| } | | | |
| Session Data Length | | | |
| Session Data { | | session data for the crypto session | |
| SSRC | | | |
| ROC | | | |
| SEQ | | | |
| } | | | |
| SPI Length | | SPI MAY be omitted in the initial message (length = 0), but it has to be provided in the response message | |
| SPI | | the SPI (or MKI) corresponding to the session key to (initially) be used for the crypto session. Other keys can be used. | |
| } | | | |
| } | | | |
| Timestamp Payload (T) { | | | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|-----------------------|--|-----------|
| Field | Value/remark | Comment | Condition |
| Next payload | '00001011'B | Next payload is RAND | |
| TS Role | 1 | Time of issue (TRi) | |
| TS Type | '00000011'B | NTP-UTC-32 (3) | |
| TS Value | 3710502000 | A randomly chose value = Corresponds to 31/07/2017, 17:00:00. The time of issue represented by the number of seconds since 0h on 1 January 1900 with respect to the Coordinated Universal Time (UTC) | |
| } | | | |
| RAND Payload { | | | |
| Next payload | '00000110'B | Next payload is ID | |
| RAND Role | 1 | Initiator (RANDRi) | |
| RAND len | '00010000'B | 16 Bytes RAND | |
| RAND | 128-bit random number | | |
| } | | | |
| IDRi payload { | | | |
| Next payload | '00000110'B | Next payload is ID | |
| ID Role | 1 | Initiator (IDRi) | |
| ID Type | 0 | URI | |
| ID len | Length of ID Data | | |
| ID data | px_MCPTT_GMS | GMS's URI | |
| | px_MCPTT_User_A_ID | MCPTT ID See TS 33.179 [15] clause E.3 | CONFIG |
| } | | | |
| IDRr payload { | | | |
| Next payload | '???'B | Next payload is IDRkmsi | |
| ID Role | 2 | Responder (IDRr) | |
| ID Type | 0 | | |
| ID len | Length of ID Data | | |
| ID data | px_MCPTT_User_A_ID | MCPTT ID | |
| | px_MCPTT_Server_A_URI | MDSI of the MCPTT Domain | CONFIG |
| } | | | |
| IDRkmsi payload { | | | |
| Next payload | '???'B | Next payload is IDRkmsr | |
| ID Role | 6 | Initiator's KMS (IDRkmsi) | |
| ID Type | 0 | | |
| ID len | Length of ID Data | | |
| ID data | px_MCPTT_KMS | the URI of the MCPTT KMS used by the initiating user | |
| } | | | |
| IDRkmsr payload { | | | |
| Next payload | '???'B | Next payload is Security Properties | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|-------------------|--|-----------|
| Field | Value/remark | Comment | Condition |
| ID Role | 7 | Responder's KMS (IDRkmsr) | |
| ID Type | 0 | | |
| ID len | Length of ID Data | | |
| ID data | px_MCPTT_KMS | the URI of the MCPTT KMS used by the terminating user | |
| } | | | |
| Security Properties payload { | | When not included the content specified below is assumed | |
| Next payload | '00011010'B | Next payload is SAKKE (26) | |
| Policy no | '00000001'B | Random nr | |
| Prot type | 0 | SRTP | |
| Policy param length | | | |
| Policy param { | | | |
| { | | | |
| Type | 0 | Encryption Algorithm | |
| length | | | |
| value | 6 | AES-GCM | |
| } | | | |
| { | | | |
| Type | 1 | Session encryption key length | |
| length | | | |
| value | 16 | 16 octets | |
| } | | | |
| { | | | |
| Type | 4 | Session salt key length | |
| length | | | |
| value | 12 | 12 octets | |
| } | | | |
| { | | | |
| Type | 5 | SRTP PRF | |
| length | | | |
| value | 0 | AES-CM | |
| } | | | |
| { | | | |
| Type | 6 | Key derivation rate | |
| length | | | |
| value | 0 | No session key refresh. | |
| } | | | |
| { | | | |
| Type | 13 | ROC transmission rate | |
| length | | | |
| value | 1 | ROC transmitted in every packet. | |
| } | | | |
| { | | | |
| Type | 18 | SRTP Authentication tag length | |
| length | | | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|--|---------------------------------------|-----------|
| Field | Value/remark | Comment | Condition |
| value | 4 | 4 octets for transmission of ROC | |
| } | | | |
| { | | | |
| Type | 19 | SRTCP Authentication tag length | |
| length | | | |
| value | 0 | ROC need not be transmitted in SRTCP. | |
| } | | | |
| { | | | |
| Type | 20 | AEAD authentication tag length | |
| length | | | |
| value | 16 | 16 octets | |
| } | | | |
| } | | | |
| } | | | |
| SAKKE payload { | | | |
| Next payload | '???'B | Next payload is SIGN | |
| SAKKE params { | | RFC 6509 [23], Appendix A | |
| N | 128 | | |
| P | 997ABB1F 0A563FDA 65C61198 DAD0657A 416C0CE1 9CB48261 BE9AE358 B3E01A2E F40AAB27 E2FC0F1B 228730D5 31A59CB0 E791B39F F7C88A19 356D27F4 A666A6D0 E26C6487 326B4CD4 512AC5CD 65681CE1 B6AFF4A8 31852A82 A7CF3C52 1C3C09AA 9F94D6AF 56971F1F FCE3E823 89857DB0 80C5DF10 AC7ACE87 666D807A FEA85FEB | | |
| Q | 265EAEC7 C2958FF6 99718466 36B4195E 905B0338 672D2098 6FA6B8D6 2CF8068B BD02AAC9 F8BF03C6 C8A1CC35 4C69672C 39E46CE7 FDF22286 4D5B49FD 2999A9B4 389B1921 CC9AD335 144AB173 595A0738 6DABFD2A 0C614AA0 A9F3CF14 870F026A A7E535AB D5A5C7C7 FF38FA08 E2615F6C 203177C4 2B1EB3A1 D99B601E BFAA17FB | | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|--|--------------------------|-----------|
| Field | Value/remark | Comment | Condition |
| Px | 53FC09EE 332C29AD 0A799005 3ED9B52A 2B1A2FD6 0AEC69C6 98B2F204 B6FF7CBF B5EDB6C0 F6CE2308 AB10DB90 30B09E10 43D5F22C DB9DFA55 718BD9E7 406CE890 9760AF76 5DD5BCCB 337C8654 8B72F2E1 A702C339 7A60DE74 A7C1514D BA66910D D5CFB4CC 80728D87 EE9163A5 B63F73EC 80EC46C4 967E0979 880DC8AB EAE63895 | | |
| Py | 0A824906 3F6009F1 F9F1F053 3634A135 D3E82016 02990696 3D778D82 1E141178 F5EA69F4 654EC2B9 E7F7F5E5 F0DE55F6 6B598CCF 9A140B2E 416CFF0C A9E032B9 70DAE117 AD547C6C CAD696B5 B7652FE0 AC6F1E80 164AA989 492D979F C5A4D5F2 13515AD7 E9CB99A9 80BDAD5A D5BB4636 ADB9B570 6A67DCDE 75573FD7 1BEF16D7 | | |
| G | 66FC2A43 2B6EA392 148F1586 7D623068 C6A87BD1 FB94C41E 27FABE65 8E015A87 371E9474 4C96FEDA 449AE956 3F8BC446 CBFDA85D 5D00EF57 7072DA8F 541721BE EE0FAED1 828EAB90 B99DFB01 38C78433 55DF0460 B4A9FD74 B4F1A32B CAFA1FFA D682C033 A7942BCC E3720F20 B9B7B040 3C8CAE87 B7A0042A CDE0FAB3 6461EA46 | | |
| Hash | SHA-256 | (defined in [FIPS180-3]) | |
| } | | | |
| ID Scheme | 'URI Scheme' | | |
| SAKKE data length | | 16 bits | |
| ..SAKKE data | encapsulate the GMK to the UID generated from the MCPTT ID of the group management client | | |
| } | | | |
| General Extension payload { | | | |
| Next payload | '???'B | Next payload is SIGN | |
| Type | | 'SAKKE-to-self' | |
| Lenght | | | |
| SAKKE payload { | | | |
| Next payload | '0'B | | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|---|--|-----------|
| Field | Value/remark | Comment | Condition |
| SAKKE params | | | |
| ID Scheme | 'URI Scheme' | | |
| Length | | | |
| SAKKE data | encapsulate the GMK to the UID generated from the MCPTT ID of the group management client | | |
| } | | | |
| } | | | |
| KEMAC Payload | CSK key | Client Server Key generated by the UE | |
| SIGN (ECCSI) payload { | | | |
| Next payload | '00000000'B | This is the last payload | |
| S type | 2 | ECCSI signature | |
| S data | | using (the KMS-provisioned key associated to) the identity of the Group Management Server (GMS). This identity is derived from the GMS's URI (gp.manager@mcp tt.example.org) and a time stamp (the current year and month) | |
| | UID | UID generated from the MCPTT ID of the initiating user | CONFIG |
| } | | | |

Table 5.5.9.1-2: MIKEY-SAKKE I_MESSAGE (Private call)

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|--------------------------|--|-----------|
| Field | Value/remark | Comment | Condition |
| MIKEY Common Header { | Any | | |
| version | '00000001'B | | |
| Data Type | '00011010'B | SAKKE msg (26) | |
| Next payload | '00000101'B | Next payload is timestamp | |
| V | '0'B | | |
| PRF func | '0000001'B | PRF-HMAC-SHA-256 | |
| CSB ID | '0101xxxx ... xxxxxxxx'B | 32-bit PCK-ID The 4 most significant bits of the PCK-ID indicate the purpose of the PCK is to protect Private call communications, the other 28-bits are randomly generated | |
| #CS | '00000001'B | the number of crypto sessions in the CS ID map info. | |
| CS ID map type | 2 | GENERIC-ID | |
| CS ID map Info { | | | |
| CS ID | | the CS ID of the crypto session | |
| Prot type | | the security protocol to be used for the crypto session | |
| S | 1 | the ROC and SEQ fields are provided | |
| #P | | the number of security policies provided for the crypto session | |
| Ps { | | lists the policies for the crypto session | |
| Policy_no_1 | '00000001'B | a policy_no that corresponds to the policy_no of a SP payload | |
| } | | | |
| Session Data Length | | | |
| Session Data { | | session data for the crypto session | |
| SSRC | | | |
| ROC | | | |
| SEQ | | | |
| } | | | |
| SPI Length | | SPI MAY be omitted in the initial message (length = 0), but it MUST be provided in the response message | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|-----------------------|--|-----------|
| Field | Value/remark | Comment | Condition |
| SPI | | the SPI (or MKI) corresponding to the session key to (initially) be used for the crypto session. Other keys can be used. | |
| } | | | |
| } | | | |
| Timestamp Payload (T) { | | | |
| Next payload | '00001011'B | Next payload is RAND | |
| TS Role | 1 | Time of issue (TRi) | |
| TS Type | '00000011'B | NTP-UTC-32 (3) | |
| TS Value | 3710502000 | A randomly chose value = Corresponds to 31/07/2017, 17:00:00. The time of issue represented by the number of seconds since 0h on 1 January 1900 with respect to the Coordinated Universal Time (UTC) | |
| } | | | |
| RAND Payload { | | | |
| Next payload | '00000110'B | Next payload is ID | |
| RAND Role | 1 | Initiator (RANDRi) | |
| RAND len | '00010000'B | 16 Bytes RAND | |
| RAND | 128-bit random number | | |
| } | | | |
| IDRi payload { | | | |
| Next payload | '00000110'B | Next payload is ID | |
| ID Role | 1 | Initiator (IDRi) | |
| ID Type | 0 | URI | |
| ID len | Length of ID Data | | |
| ID data | px_MCPTT_User_A_ID | MCPTT ID associated with the initiating user | |
| } | | | |
| IDRr payload { | | | |
| Next payload | '???'B | Next payload is IDRkmsi | |
| ID Role | 2 | Responder (IDRr) | |
| ID Type | 0 | | |
| ID len | Length of ID Data | | |
| ID data | px_MCPTT_User_B_ID | MCPTT ID associated to the receiving user | |
| } | | | |
| IDRkmsi payload { | | | |
| Next payload | '???'B | Next payload is IDRkmsi | |
| ID Role | 6 | Initiator's KMS (IDRkmsi) | |
| ID Type | 0 | | |
| ID len | Length of ID Data | | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|-------------------|--|-----------|
| Field | Value/remark | Comment | Condition |
| ID data | px_MCPTT_KMS | the URI of the MCPTT KMS used by the initiating user | |
| } | | | |
| IDRkmsr payload { | | | |
| Next payload | '???'B | Next payload is Security Properties | |
| ID Role | 7 | Responder's KMS (IDRkmsr) | |
| ID Type | 0 | | |
| ID len | Length of ID Data | | |
| ID data | px_MCPTT_KMS | the URI of the MCPTT KMS used by the terminating user | |
| } | | | |
| Security Properties payload { | | When not included the content specified below is assumed | |
| Next payload | '00011010'B | Next payload is SAKKE (26) | |
| Policy no | '00000001'B | Random nr | |
| Prot type | 0 | SRTP | |
| Policy param length | | | |
| Policy param { | | | |
| { | | | |
| Type | 0 | Encryption Algorithm | |
| length | | | |
| value | 6 | AES-GCM | |
| } | | | |
| { | | | |
| Type | 1 | Session encryption key length | |
| length | | | |
| value | 16 | 16 octets | |
| } | | | |
| { | | | |
| Type | 4 | Session salt key length | |
| length | | | |
| value | 12 | 12 octets | |
| } | | | |
| { | | | |
| Type | 5 | SRTP PRF | |
| length | | | |
| value | 0 | AES-CM | |
| } | | | |
| { | | | |
| Type | 6 | Key derivation rate | |
| length | | | |
| value | 0 | No session key refresh. | |
| } | | | |
| { | | | |
| Type | 20 | AEAD authentication tag length | |
| length | | | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|--|---------------------------|-----------|
| Field | Value/remark | Comment | Condition |
| value | 16 | 16 octets | |
| } | | | |
| } | | | |
| } | | | |
| SAKKE payload { | | | |
| Next payload | '???'B | Next payload is SIGN | |
| SAKKE params { | | RFC 6509 [23], Appendix A | |
| N | 128 | | |
| P | 997ABB1F 0A563FDA 65C61198 DAD0657A 416C0CE1 9CB48261 BE9AE358 B3E01A2E F40AAB27 E2FC0F1B 228730D5 31A59CB0 E791B39F F7C88A19 356D27F4 A666A6D0 E26C6487 326B4CD4 512AC5CD 65681CE1 B6AFF4A8 31852A82 A7CF3C52 1C3C09AA 9F94D6AF 56971F1F FCE3E823 89857DB0 80C5DF10 AC7ACE87 666D807A FEA85FEB | | |
| Q | 265EAEC7 C2958FF6 99718466 36B4195E 905B0338 672D2098 6FA6B8D6 2CF8068B BD02AAC9 F8BF03C6 C8A1CC35 4C69672C 39E46CE7 FDF22286 4D5B49FD 2999A9B4 389B1921 CC9AD335 144AB173 595A0738 6DABFD2A 0C614AA0 A9F3CF14 870F026A A7E535AB D5A5C7C7 FF38FA08 E2615F6C 203177C4 2B1EB3A1 D99B601E BFAA17FB | | |
| Px | 53FC09EE 332C29AD 0A799005 3ED9B52A 2B1A2FD6 0AEC69C6 98B2F204 B6FF7CBF B5EDB6C0 F6CE2308 AB10DB90 30B09E10 43D5F22C DB9DFA55 718BD9E7 406CE890 9760AF76 5DD5BCCB 337C8654 8B72F2E1 A702C339 7A60DE74 A7C1514D BA66910D D5CFB4CC 80728D87 EE9163A5 B63F73EC 80EC46C4 967E0979 880DC8AB EAE63895 | | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|--|---|-----------|
| Field | Value/remark | Comment | Condition |
| Py | 0A824906 3F6009F1 F9F1F053 3634A135 D3E82016 02990696 3D778D82 1E141178 F5EA69F4 654EC2B9 E7F7F5E5 F0DE55F6 6B598CCF 9A140B2E 416CFF0C A9E032B9 70DAE117 AD547C6C CAD696B5 B7652FE0 AC6F1E80 164AA989 492D979F C5A4D5F2 13515AD7 E9CB99A9 80BDAD5A D5BB4636 ADB9B570 6A67DCDE 75573FD7 1BEF16D7 | | |
| g | 66FC2A43 2B6EA392 148F1586 7D623068 C6A87BD1 FB94C41E 27FABE65 8E015A87 371E9474 4C96FEDA 449AE956 3F8BC446 CBFDA85D 5D00EF57 7072DA8F 541721BE EE0FAED1 828EAB90 B99DFB01 38C78433 55DF0460 B4A9FD74 B4F1A32B CAFA1FFA D682C033 A7942BCC E3720F20 B9B7B040 3C8CAE87 B7A0042A CDE0FAB3 6461EA46 | | |
| Hash | SHA-256 | (defined in [FIPS180-3]) | |
| } | | | |
| ID Scheme | 'URI Scheme' | | |
| SAKKE data length | | 16 bits | |
| SAKKE data | encapsulate the PCK to the UID generated from the MCPTT ID of the terminating user | | |
| } | | | |
| General Extension payload | Not Included | | |
| KEMAC Payload | CSK key | Client Server Key generated by the UE | |
| SIGN (ECCSI) payload { | | | |
| Next payload | '00000000'B | This is the last payload | |
| S type | 2 | ECCSI signature | |
| S data | | using (the KMS-provisioned key associated to) the identity of the initiating user. This identity is derived from the initiating user's URI (user.001@mcptt.example.org) and a time-related parameter (the current year and month) | |

| Derivation path: RFC 6509 [23], RFC 6043 [25], RFC 3830 [24] | | | |
|--|--------------|---------|-----------|
| Field | Value/remark | Comment | Condition |
| } | | | |

5.5.10 Common MCPTT test USIM parameters

5.5.10.1 General

The format and coding of elementary files of the USIM are defined in 3GPP TS 31.102 [73]. Those of the ISIM are defined in 3GPP TS 31.101 [79] and 3GPP TS 31.103 [80].

The present clause defines default MCPTT relevant parameters for programming the elementary files of the test USIM when running conformance test cases defined in 3GPP TS 36.579-2 [2].

For requirements to the test USIM/ISIM needed for the E-UTRA/EPC and MCPTT off-network ProSe operation see 3GPP TS 36.508 [6], subclause 4.9.

5.5.10.2 Default settings for the Elementary Files (EFs)

EF_{UST} (USIM Service Table)

| Services | Discription | Activated | Version |
|---|-------------|-----------|---------|
| Service n°109 | MCPTT | Yes | |
| NOTE: Only the relevant MCPTT related services indicated. | | | |

EF_{MST} (MCPTT Service Table)

This file shall be present. This EF indicates the coding of the MCPTT management objects and which MCPTT services are available.

Coding of the MCPTT management objects = '00' (XML format).

| Services | Discription | Activated | Version |
|--------------|----------------------------|-----------|---------|
| Service n°1: | UE configuration data | Yes | |
| Service n°2: | User configuration data | Yes | |
| Service n°3: | Group configuration data | Yes | |
| Service n°4: | Service configuration data | Yes | |

EF_{MCPTT_CONFIG} (MCPTT configuration data)

This file shall be present.

Encoded in XML format (as specified in the MCPTT Service Table).

| MCPTT configuration data objects | Tag Values | Condition |
|----------------------------------|------------|--|
| MCPTT UE configuration data | '80' | Shall be present. The content of the MCPTT UE configuration data object shall be as specified in Table 5.5.8.2-1. |
| MCPTT User configuration data | '81' | Shall be present. The content of the MCPTT User configuration data object shall be as specified in Table 5.5.8.3-1. |
| MCPTT Group configuration data | '82' | Shall be present. The content of the MCPTT Group configuration data object shall be as specified in Table 5.5.7.1-1. |
| MCPTT Service configuration data | '83' | Shall be present. The content of the MCPTT Server configuration data object shall be as specified in Table 5.5.8.4-1. |

5.6 Reference configurations

5.6.1 General

The Reference configuration requirements provided in subclause 5.6 specify configuration values that are expected to be pre-configured in the UE before a test is started. The exception to this requirement are tests which verify the communication exchange which allows a MCPTT device to be enabled for the provision of MCPTT services e.g. test case 5.1 in TS 36.579-2 [2].

5.6.2 Key material for provisioning of End-to-end communication security

For any end-point to use or access end-to-end secure communications, it needs to be provisioned with keying material associated to its identity by the KMS as specified in 3GPP TS 33.179 [15]. To avoid dynamic allocation of key material before each test case is run, the following keying information needs to be preconfigured in the UE. For convenience, the information is provided in the form of an XML which can be provided/pre-configured in the UE e.g. by a Key Management Server (KMS) as specified in 3GPP TS 33.179 [15].

```
<?xml version="1.0" encoding="UTF-8"?>
<SignedKmsResponse xmlns="TOBEDEFINED" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:ds="http://www.w3.org/2000/09/xmldsig#" xmlns:se="TOBEDEFINED"
  xsi:schemaLocation="TOBEDEFINED SE_KmsInterface_XMLSchema.xsd" Id="xmldoc">
<KmsResponse xmlns="TOBEDEFINED" Version="1.0.0">
  <KmsUri>kms.example.org</KmsUri>
  <UserUri>user@example.org</UserUri>
  <Time>2014-01-26T10:07:14</Time>
  <KmsId>KMSProvider12345</KmsId>
  <ClientReqUrl>http://kms.example.org/keymanagement/identity/v1/keyprov</ClientReqUrl>
  <KmsMessage>
    <KmsKeyProv Version="1.0.0" xsi:type="se:KmsKeyProvTkType">
      <KmsKeySet Version="1.1.0">
        <KmsUri>kms.example.org</KmsUri>
        <CertUri>cert1.kms.example.org</CertUri>
        <Issuer>www.example.org</Issuer>
        <UserUri>user@example.org</UserUri>
        <UserID>0123456789ABCDEF0123456789ABCDEF</UserID>
        <ValidFrom>2017-07-31T17:00:00</ValidFrom>
        <ValidTo>2018-07-31T16:59:59</ValidTo>
        <KeyPeriodNo>3710502000</KeyPeriodNo>
        <Revoked>>false</Revoked>
        <UserDecryptKey xsi:type="se:EncKeyContentType">
          <EncryptedKey xmlns="http://www.w3.org/2001/04/xmlenc#">
            <EncryptionMethod Algorithm="http://www.w3.org/2001/04/xmlenc#kw-aes256"/>
            <ds:KeyInfo>
              <ds:KeyName>tk.12.user@example.org</KeyName>
            </ds:KeyInfo>
            <CipherData>
              <CipherValue>DEADBEEF</CipherValue>
            </CipherData>
          </EncryptedKey>
        </UserDecryptKey>
        <UserSigningKeySSK xsi:type="se:EncKeyContentType">
          <EncryptedKey xmlns="http://www.w3.org/2001/04/xmlenc#">
            <EncryptionMethod Algorithm="http://www.w3.org/2001/04/xmlenc#kw-aes256"/>
            <ds:KeyInfo>
              <ds:KeyName>tk.12.user@example.org</KeyName>
            </ds:KeyInfo>
            <CipherData>
              <CipherValue>DEADBEEF</CipherValue>
            </CipherData>
          </EncryptedKey>
        </UserSigningKeySSK>
        <UserPubTokenPVT xsi:type="se:EncKeyContentType">
          <EncryptedKey xmlns="http://www.w3.org/2001/04/xmlenc#">
            <EncryptionMethod Algorithm="http://www.w3.org/2001/04/xmlenc#kw-aes256"/>
            <ds:KeyInfo>
              <ds:KeyName>tk.12.user@example.org</KeyName>
            </ds:KeyInfo>
            <CipherData>
              <CipherValue>DEADBEEF</CipherValue>
            </CipherData>
          </EncryptedKey>
        </UserPubTokenPVT>
      </KmsKeySet>
    </KmsMessage>
  </KmsResponse>
</SignedKmsResponse>
```

```

    <NewTransportKey xmlns="TOBEDEFINED">
      <EncryptedKey xmlns="http://www.w3.org/2001/04/xmlenc#"
Type="http://www.w3.org/2001/04/xmlenc#EncryptedKey">
        <EncryptionMethod Algorithm="http://www.w3.org/2001/04/xmlenc#kw-aes256"/>
          <ds:KeyInfo>
            <ds:KeyName>tk.12.user@example.org</KeyName>
          </ds:KeyInfo>
          <CipherData>
            <CipherValue>DEADBEEF</CipherValue>
          </CipherData>
          <CarriedKeyName>tk.13.user@example.org</CarriedKeyName>
        </EncryptedKey>
      </NewTransportKey>
    </KmsKeyProv>
  </KmsMessage>
</KmsResponse>
<Signature xmlns="http://www.w3.org/2000/09/xmldsig#">
  <SignedInfo>
    <CanonicalizationMethod Algorithm="http://www.w3.org/TR/2001/REC-xml-c14n-20010315"/>
    <SignatureMethod Algorithm="http://www.w3.org/2001/04/xmldsig-more#hmac-sha256">
      <HMACOutputLength>128</HMACOutputLength>
    </SignatureMethod>
    <Reference URI="#xmldoc">
      <DigestMethod Algorithm="http://www.w3.org/2001/04/xmlenc#sha256"/>
      <DigestValue>nnnn</DigestValue>
    </Reference>
  </SignedInfo>
  <SignatureValue>DEADBEEF</SignatureValue>
  <KeyInfo>
    <KeyName>tk.12.user@example.org</KeyName>
  </KeyInfo>
</Signature>
</SignedKmsResponse>

```

5.6.3 XML schema for MCPTT location information

From TS 24.379 clause F.3.2:

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:mcpttloc="urn:3gpp:ns:mcpttLocationInfo:1.0"
targetNamespace="urn:3gpp:ns:mcpttLocationInfo:1.0" elementFormDefault="qualified"
attributeFormDefault="unqualified"
xmlns:xenc="http://www.w3.org/2001/04/xmlenc#">

  <xs:import namespace="http://www.w3.org/2001/04/xmlenc#" />

  <xs:element name="location-info" id="loc">
    <xs:annotation>
      <xs:documentation>Root element, contains all information related to location
configuration, location request and location reporting for the MCPTT service</xs:documentation>
    </xs:annotation>
    <xs:complexType>
      <xs:choice>
        <xs:element name="Configuration" type="mcpttloc:tConfigurationType"/>
        <xs:element name="Request" type="mcpttloc:tRequestType"/>
        <xs:element name="Report" type="mcpttloc:tReportType"/>
        <xs:any namespace="##other" processContents="lax" minOccurs="0"
maxOccurs="unbounded"/>
        <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
      </xs:choice>
      <xs:anyAttribute namespace="##any" processContents="lax"/>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="tConfigurationType">
    <xs:sequence>
      <xs:element name="NonEmergencyLocationInformation"
type="mcpttloc:tRequestedLocationType" minOccurs="0"/>
      <xs:element name="EmergencyLocationInformation" type="mcpttloc:tRequestedLocationType"
minOccurs="0"/>
      <xs:element name="TriggeringCriteria" type="mcpttloc:TriggeringCriteriaType"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:attribute name="ConfigScope">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:enumeration value="Full"/>

```

```

        <xs:enumeration value="Update" />
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
  <xs:anyAttribute namespace="##any" processContents="lax" />
</xs:complexType>
<xs:complexType name="tRequestType">
  <xs:complexContent>
    <xs:extension base="mcpttloc:tEmptyType">
      <xs:attribute name="RequestId" type="xs:string" use="required" />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="tReportType">
  <xs:sequence>
    <xs:element name="TriggerId" type="xs:string" minOccurs="0" maxOccurs="unbounded" />
    <xs:element name="CurrentLocation" type="mcpttloc:tCurrentLocationType" />
    <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
    <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0" />
  </xs:sequence>
  <xs:attribute name="ReportID" type="xs:string" use="optional" />
  <xs:attribute name="ReportType" use="required">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="Emergency" />
        <xs:enumeration value="NonEmergency" />
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
  <xs:anyAttribute namespace="##any" processContents="lax" />
</xs:complexType>
<xs:complexType name="TriggeringCriteriaType">
  <xs:sequence>
    <xs:element name="CellChange" type="mcpttloc:tCellChange" minOccurs="0" />
    <xs:element name="TrackingAreaChange" type="mcpttloc:tTrackingAreaChangeType"
minOccurs="0" />
    <xs:element name="PlmnChange" type="mcpttloc:tPlmnChangeType" minOccurs="0" />
    <xs:element name="MbmsSaChange" type="mcpttloc:tMbmsSaChangeType" minOccurs="0" />
    <xs:element name="MbsfnAreaChange" type="mcpttloc:tMbsfnAreaChangeType" minOccurs="0" />
    <xs:element name="PeriodicReport" type="mcpttloc:tIntegerAttributeType" minOccurs="0" />
    <xs:element name="TravelledDistance" type="mcpttloc:tIntegerAttributeType"
minOccurs="0" />
    <xs:element name="McpttSignallingEvent" type="mcpttloc:tSignallingEventType"
minOccurs="0" />
    <xs:element name="GeographicalAreaChange" type="mcpttloc:tGeographicalAreaChange" />
    <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
    <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0" />
  </xs:sequence>
  <xs:anyAttribute namespace="##any" processContents="lax" />
</xs:complexType>
<xs:complexType name="tCellChange">
  <xs:sequence>
    <xs:element name="AnyCellChange" type="mcpttloc:tEmptyTypeAttribute" minOccurs="0" />
    <xs:element name="EnterSpecificCell" type="mcpttloc:tSpecificCellType" minOccurs="0"
maxOccurs="unbounded" />
    <xs:element name="ExitSpecificCell" type="mcpttloc:tSpecificCellType" minOccurs="0"
maxOccurs="unbounded" />
    <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
    <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0" />
  </xs:sequence>
  <xs:anyAttribute namespace="##any" processContents="lax" />
</xs:complexType>
<xs:complexType name="tEmptyType" />
<xs:simpleType name="tEcgi">
  <xs:restriction base="xs:string">
    <xs:pattern value="\d{3}\d{3}[0-1]{28}" />
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="tSpecificCellType">
  <xs:simpleContent>
    <xs:extension base="mcpttloc:tEcgi">
      <xs:attribute name="TriggerId" type="xs:string" use="required" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
<xs:complexType name="tEmptyTypeAttribute">
  <xs:complexContent>
    <xs:extension base="mcpttloc:tEmptyType">

```

```

        <xs:attribute name="TriggerId" type="xs:string" use="required"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="tTrackingAreaChangeType">
    <xs:sequence>
      <xs:element name="AnyTrackingAreaChange" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
      <xs:element name="EnterSpecificTrackingArea" type="mcpttloc:tTrackingAreaIdentity"
minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="ExitSpecificTrackingArea" type="mcpttloc:tTrackingAreaIdentity"
minOccurs="0" maxOccurs="unbounded"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>
  <xs:simpleType name="tTrackingAreaIdentityFormat">
    <xs:restriction base="xs:string">
      <xs:pattern value="\d{3}\d{3}[0-1]{16}"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:complexType name="tTrackingAreaIdentity">
    <xs:simpleContent>
      <xs:extension base="mcpttloc:tTrackingAreaIdentityFormat">
        <xs:attribute name="TriggerId" type="xs:string" use="required"/>
      </xs:extension>
    </xs:simpleContent>
  </xs:complexType>
  <xs:complexType name="tPlmnChangeType">
    <xs:sequence>
      <xs:element name="AnyPlmnChange" type="mcpttloc:tEmptyTypeAttribute" minOccurs="0"/>
      <xs:element name="EnterSpecificPlmn" type="mcpttloc:tPlmnIdentity" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:element name="ExitSpecificPlmn" type="mcpttloc:tPlmnIdentity" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>
  <xs:simpleType name="tPlmnIdentityFormat">
    <xs:restriction base="xs:string">
      <xs:pattern value="\d{3}\d{3}"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:complexType name="tPlmnIdentity">
    <xs:simpleContent>
      <xs:extension base="mcpttloc:tPlmnIdentityFormat">
        <xs:attribute name="TriggerId" type="xs:string" use="required"/>
      </xs:extension>
    </xs:simpleContent>
  </xs:complexType>
  <xs:complexType name="tMbmsSaChangeType">
    <xs:sequence>
      <xs:element name="AnyMbmsSaChange" type="mcpttloc:tEmptyTypeAttribute" minOccurs="0"/>
      <xs:element name="EnterSpecificMbmsSa" type="mcpttloc:tMbmsSaIdentity" minOccurs="0"/>
      <xs:element name="ExitSpecificMbmsSa" type="mcpttloc:tMbmsSaIdentity" minOccurs="0"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>
  <xs:simpleType name="tMbmsSaIdentityFormat">
    <xs:restriction base="xs:integer">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="65535"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:complexType name="tMbmsSaIdentity">
    <xs:simpleContent>
      <xs:extension base="mcpttloc:tMbmsSaIdentityFormat">
        <xs:attribute name="TriggerId" type="xs:string" use="required"/>
      </xs:extension>
    </xs:simpleContent>
  </xs:complexType>
  <xs:complexType name="tMbsfnAreaChangeType">
    <xs:sequence>

```

```

        <xs:element name="EnterSpecificMbsfnArea" type="mcpttloc:tMbsfnAreaIdentity"
minOccurs="0"/>
        <xs:element name="ExitSpecificMbsfnArea" type="mcpttloc:tMbsfnAreaIdentity"
minOccurs="0"/>
        <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
        <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:complexType>
<xs:simpleType name="tMbsfnAreaIdentityFormat">
    <xs:restriction base="xs:integer">
        <xs:minInclusive value="0"/>
        <xs:maxInclusive value="255"/>
    </xs:restriction>
</xs:simpleType>
<xs:complexType name="tMbsfnAreaIdentity">
    <xs:simpleContent>
        <xs:extension base="mcpttloc:tMbsfnAreaIdentityFormat">
            <xs:attribute name="TriggerId" type="xs:string" use="required"/>
        </xs:extension>
    </xs:simpleContent>
</xs:complexType>
<xs:complexType name="tIntegerAttributeType">
    <xs:simpleContent>
        <xs:extension base="xs:integer">
            <xs:attribute name="TriggerId" type="xs:string" use="required"/>
        </xs:extension>
    </xs:simpleContent>
</xs:complexType>
<xs:complexType name="tTravelledDistanceType">
    <xs:sequence>
        <xs:element name="TravelledDistance" type="xs:positiveInteger"/>
        <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
        <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:complexType>
<xs:complexType name="tSignallingEventType">
    <xs:sequence>
        <xs:element name="InitialLogOn" type="mcpttloc:tEmptyTypeAttribute" minOccurs="0"/>
        <xs:element name="GroupCallNonEmergency" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
        <xs:element name="PrivateCallNonEmergency" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
        <xs:element name="LocationConfigurationReceived" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
        <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
        <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:complexType>
<xs:complexType name="tEmergencyEventType">
    <xs:sequence>
        <xs:element name="GroupCallEmergency" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
        <xs:element name="GroupCallImminentPeril" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
        <xs:element name="PrivateCallEmergency" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
        <xs:element name="InitiateEmergencyAlert" type="mcpttloc:tEmptyTypeAttribute"
minOccurs="0"/>
        <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
        <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:complexType>
<xs:complexType name="tRequestedLocationType">
    <xs:sequence>
        <xs:element name="ServingEcgi" type="mcpttloc:tEmptyType" minOccurs="0"/>
        <xs:element name="NeighbouringEcgi" type="mcpttloc:tEmptyType" minOccurs="0"
maxOccurs="unbounded"/>
        <xs:element name="MbsfnAreaId" type="mcpttloc:tEmptyType" minOccurs="0"/>
        <xs:element name="MbsfnArea" type="mcpttloc:tEmptyType" minOccurs="0"/>
        <xs:element name="GeographicalCoordinate" type="mcpttloc:tEmptyType" minOccurs="0"/>
        <xs:element name="minimumIntervalLength" type="xs:positiveInteger"/>
        <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
        <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>

```

```

    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>

  <xs:complexType name="tCurrentLocationType">
    <xs:sequence>
      <xs:element name="CurrentServingEcgi" type="mcpttloc:tLocationType" minOccurs="0"/>
      <xs:element name="NeighbouringEcgi" type="mcpttloc:tLocationType" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:element name="MbmsSaId" type="mcpttloc:tLocationType" minOccurs="0"/>
      <xs:element name="MbsfnArea" type="mcpttloc:tLocationType" minOccurs="0"/>
      <xs:element name="CurrentCoordinate" type="mcpttloc:tPointCoordinate" minOccurs="0"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>

  <xs:simpleType name="protectionType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Normal"/>
      <xs:enumeration value="Encrypted"/>
    </xs:restriction>
  </xs:simpleType>

  <xs:complexType name="tLocationType">
    <xs:choice minOccurs="1" maxOccurs="1">
      <xs:element name="Ecgi" type="mcpttloc:tEcgi" minOccurs="0"/>
      <xs:element name="SaId" type="mcpttloc:tMbmsSaIdentity" minOccurs="0"/>
      <xs:element name="MbsfnAreaId" type="mcpttloc:tMbsfnAreaIdentity" minOccurs="0"/>
      <xs:any namespace="##other" processContents="lax"/>
      <xs:element name="anyExt" type="mcpttinfo:anyExtType" minOccurs="0"/>
    </xs:choice>
    <xs:attribute name="type" type="protectionType"/>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>

  <xs:complexType name="tGeographicalAreaChange">
    <xs:sequence>
      <xs:element name="AnyAreaChange" type="mcpttloc:tEmptyTypeAttribute" minOccurs="0"/>
      <xs:element name="EnterSpecificAreaType" type="mcpttloc:tSpecificAreaType"
minOccurs="0"/>
      <xs:element name="ExitSpecificAreaType" type="mcpttloc:tSpecificAreaType"
minOccurs="0"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>

  <xs:complexType name="tSpecificAreaType">
    <xs:sequence>
      <xs:element name="GeographicalArea" type="mcpttloc:tGeographicalAreaDef"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:attribute name="TriggerId" type="xs:string" use="required"/>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>

  <xs:complexType name="tPointCoordinate">
    <xs:sequence>
      <xs:element name="longitude" type="mcpttloc:tCoordinateType"/>
      <xs:element name="latitude" type="mcpttloc:tCoordinateType"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>

  <xs:complexType name="tCoordinateType">
    <xs:choice minOccurs="1" maxOccurs="1">
      <xs:element name="threebytes" type="mcpttloc:tThreeByteType" minOccurs="0"/>
      <xs:any namespace="##other" processContents="lax"/>
      <xs:element name="anyExt" type="mcpttinfo:anyExtType" minOccurs="0"/>
    </xs:choice>
    <xs:attribute name="type" type="protectionType"/>
    <xs:anyAttribute namespace="##any" processContents="lax"/>
  </xs:complexType>

```

```

<xs:simpleType name="tThreeByteType">
  <xs:restriction base="xs:integer">
    <xs:minInclusive value="0"/>
    <xs:maxInclusive value="16777215"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="tGeographicalAreaDef">
  <xs:sequence>
    <xs:element name="PolygonArea" type="mcpttloc:tPolygonAreaType" minOccurs="0"/>
    <xs:element name="EllipsoidArcArea" type="mcpttloc:tEllipsoidArcType" minOccurs="0"/>
    <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
  </xs:sequence>
  <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:complexType>
<xs:complexType name="tPolygonAreaType">
  <xs:sequence>
    <xs:element name="Corner" type="mcpttloc:tPointCoordinate" minOccurs="3"
maxOccurs="15"/>
    <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
  </xs:sequence>
  <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:complexType>
<xs:complexType name="tEllipsoidArcType">
  <xs:sequence>
    <xs:element name="Center" type="mcpttloc:tPointCoordinate"/>
    <xs:element name="Radius" type="xs:nonNegativeInteger"/>
    <xs:element name="OffsetAngle" type="xs:unsignedByte"/>
    <xs:element name="IncludedAngle" type="xs:unsignedByte"/>
    <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="anyExt" type="mcpttloc:anyExtType" minOccurs="0"/>
  </xs:sequence>
  <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:complexType>
<xs:complexType name="anyExtType">
  <xs:sequence>
    <xs:any namespace="##any" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
</xs:schema>

```

Annex A (informative): Change history

| Change history | | | | | | | |
|----------------|---------|-----------|-----|-----|-----|---|-------------|
| Date | Meeting | TDoc | CR | Rev | Cat | Subject/Comment | New version |
| 2017-02 | R5#74 | R5-171298 | - | - | - | Introduction of TS 36.579-1. | 0.0.1 |
| 2017-05 | R5#75 | R5-172100 | - | - | - | Introduction of default message content for some media control messages, some generic procedures from R5-172078 Default MCPTT media plane control messages R5-172079 Generic MCPTT procedures | 0.0.2 |
| 2017-06 | RAN5#75 | - | - | - | - | lifted to v0.1.0 because of technical contents | 0.1.0 |
| 2017-08 | RAN5#76 | R5-173766 | - | - | - | Implemented approved: R5-173702 'Various updates of MCPTT TS 36579-1' R5-173703 'Update of MCPTT generic procedures' R5-173704 'New Generic procedures ProSe and MCPTT' R5-173705 'Update default media plane control messages' R5-173706 'Update of MCPTT Default MCPTT call control Off-network messages' R5-173707 'Update of MCPTT MIKEY-SAKKE I.MESSAGE' R5-173766 'Update of TS 36.579-1 to version 0.2.0' R5-174599 'SIP message defaults for 36.579-1' R5-174600 'MCPTT Off-Network Group Call Signaling Message Defaults' | 0.2.0 |
| 2017-12 | RAN5#77 | R5-176835 | - | - | - | Implemented approved: R5-177000 "Update of SIP Message Defaults for MCPTT" R5-176345 "Update of Specific SIP messages in Generic procedures" R5-177001 "Update of Generic procedures for SIP registration" R5-176347 "New Generic Procedure for ProSe group calls Announcing-Discoverer procedure for group member discovery" R5-176348 "New Generic Procedure for ProSe group calls Monitoring/Discoverer procedure for group member discovery" R5-177002 "Update with UE Configuration Defaults" - References updates | 0.3.0 |
| 2017-12 | RAN#78 | RP-172182 | - | - | - | Draft version for information purposes to the RAN Plenary | 1.0.0 |
| 2018-03 | RAN5#78 | R5-180684 | - | - | - | Implemented approved: R5-180534 "Update of Section 5.5.2 and 5.5.3 for TS 36.579-1" R5-180535 "Update of Section 5.5.5 for TS 36.579-1" R5-180536 "Update of Section 5.5.6 for TS 36.579-1" R5-181241 "Update of Section 5.5.9 TS 36.579-1" R5-180633 "Update of Default HTTP message and other information elements" R5-180634 "Update of Default MCPTT configuration management messages" R5-180635 "New Generic procedures for MCPTT Authorization/Configuration and Key Generation" R5-18063 "New Generic procedures for MCPTT communication in E-UTRA / Change of cells" R5-180637 "Generic Test Procedure for MCPTT communication over MBMS" R5-180638 "Various updates to 36579-1" | 1.1.0 |
| 2018-03 | RAN#79 | RP-180126 | - | - | - | Draft version for approval to move the spec under revision control to the RAN Plenary | 2.0.0 |
| 2018-03 | RAN#79 | - | - | - | - | Editorial changes and promoted to v13.0.0 | 13.0.0 |
| 2018-06 | RAN#80 | R5-182418 | 000 | - | F | Addition and correction of GNSS information | 13.1.0 |
| 2018-06 | RAN#80 | R5-182419 | 000 | - | F | Editorial correction of typos and incorrect references | 13.1.0 |
| 2018-06 | RAN#80 | R5-182430 | 000 | - | F | Editorial Update of 36.579-2 for style H6 | 13.1.0 |
| 2018-06 | RAN#80 | R5-182431 | 000 | - | F | Update of TC 5.1 for MCPTT APN | 13.1.0 |
| 2018-06 | RAN#80 | R5-182432 | 000 | - | F | Updates of Location information messages in 36.579-2 | 13.1.0 |
| 2018-06 | RAN#80 | R5-182489 | 000 | - | F | Update of MCPTT TC 6.1.1.1 | 13.1.0 |
| 2018-06 | RAN#80 | R5-182510 | 000 | - | F | Correction to MCPTT TC of 6.1.1.8, 6.1.1.11, 6.1.2.5 and 6.1.2.7 | 13.1.0 |
| 2018-06 | RAN#80 | R5-183167 | 000 | 1 | F | Updates of TC 6.3.1 | 13.1.0 |
| 2018-06 | RAN#80 | R5-183168 | 000 | 1 | F | Updates of TC 6.3.2 | 13.1.0 |
| 2018-09 | RAN#81 | R5-185084 | 000 | - | F | Update to TLS setup | 13.2.0 |
| 2018-09 | RAN#81 | R5-185122 | 000 | 1 | F | Corrections to MCPTT Authorization | 13.2.0 |

History

| Document history | | |
|-------------------------|--------------|-------------|
| V13.0.0 | May 2018 | Publication |
| V13.1.0 | July 2018 | Publication |
| V13.2.0 | October 2018 | Publication |
| | | |
| | | |