

ETSI TS 143 005 V18.0.0 (2024-05)



**Digital cellular telecommunications system (Phase 2+) (GSM);
Technical performance objectives
(3GPP TS 43.005 version 18.0.0 Release 18)**



Reference

RTS/TSGC-0043005vi00

Keywords

GSM

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	6
1.1 References	6
1.2 Abbreviations	7
2 General	7
3 Performance design objectives	7
3.1 General	7
3.2 MSCs.....	7
3.2.1 Reference loads.....	7
3.2.1.1 Reference load on incoming interexchange circuits.....	7
3.2.1.2 Reference load for MS calls	7
3.2.1.3 Impact of supplementary services	8
3.2.2 Inadequately handled call attempts	8
3.2.2.1 Definition	8
3.2.2.2 Probability of inadequately handled call attempts occurring	8
3.2.3 Delay probability	9
3.2.3.1 User signalling acknowledgement delay	9
3.2.3.2 Signalling transfer delay	9
3.2.3.3 Through connection delay.....	9
3.2.3.4 Incoming call indication sending delay - (for terminating and internal traffic connections)	10
3.2.3.5 Connection release delay.....	11
3.2.3.6 Call clearing delay.....	11
3.2.3.7 Timing for start of charging (circuit switched calls)	11
3.2.3.8 Call set-up delay.....	11
3.2.3.9 Handover delay	11
3.2.3.10 Off-air-call-set-up (OACSU) delay	12
3.2.3.11 Discontinuous reception mode delay	12
3.2.4 Call processing performance objectives	12
3.2.4.1 Premature release	12
3.2.4.2 Release failure.....	12
3.2.4.3 Incorrect charging or accounting.....	12
3.2.4.4 Misrouting.....	12
3.2.4.5 No tone.....	12
3.2.4.6 Other failures.....	13
3.2.4.7 Transmission performance	13
3.2.4.8 Slip rate	13
3.2.5 MSC performance during overload conditions	13
3.3 Performance design objectives for HLRs	13
3.3.1 Reference loads.....	13
3.3.2 Objectives	13
3.4 Performance design objectives for VLRs	13
3.4.1 Reference loads.....	13
3.4.2 Objectives	13
4 Transmission characteristics.....	14
4.1 General	14
4.1.1 BS-MS path.....	14
4.1.2 MSC.....	14
4.2 System delay distribution	14
4.2.1 Speech channel delay.....	14
4.2.2 Data channel delay.....	16

Annex A (informative): **Change Request History**.....21
History22

Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document contains technical performance objectives that should be met for the fixed infrastructure of GSM PLMNs. Concerning transmission delay for the PLMN in clause 4, the requirements should also be met by GSM Mobile Stations (MS)s.

These performance design objectives are applicable to all implementations at all points in the growth cycle up to the maximum size. These reference loads and performance objectives may be used by manufacturers in designing GSM PLMNs and by Administrations or Recognised Private Operating Agencies (RPOA)s in evaluating a specific design or for comparing different designs for potential use in the Administration's or RPOA's intended implementation.

1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document in the same Release as the present document.

- [1] Void.
- [2] 3GPP TS 23.002: "Network architecture".
- [3] 3GPP TS 43.050: "Transmission planning aspects of the speech service in the GSM Public Land Mobile Network (PLMN) system".
- [4] 3GPP TS 45.010: "Radio subsystem synchronization".
- [5] ITU-T Recommendation E.600: "Terms and definitions of traffic engineering".
- [6] ITU-T Recommendation G.921: "Digital sections based on the 2048 kbit/s hierarchy".
- [7] ITU-T Recommendation Q.541: "Digital exchange design objectives - General".
- [8] ITU-T Recommendation Q.543: "Digital exchange performance design objectives".
- [9] ITU-T Recommendation Q.551: "Transmission characteristics of digital exchanges".
- [10] ITU-T Recommendation Q.554: "Transmission characteristics at digital interfaces of a digital exchange".
- [11] ITU-T Recommendation Q.702: "Specifications of Signalling System No. 7 - Signalling data link".
- [12] ITU-T Recommendation Q.706: "Message transfer part signalling performance".
- [13] ITU-T Recommendation V.110: "Support of data terminal equipments (DTEs) with V-Series interfaces by an integrated services digital network".
- [14] CEPT Recommendation T/S 64-30: "Digital exchange performance design objectives".
- [15] 3GPP TS 21.905: "Vocabulary for 3GPP Specifications"
- [16] 3GPP TS 11.30: "Mobile Services Switching Centre Phase 1"
- [17] 3GPP TS 11.31: "Home Location Register Specification Phase 1"
- [18] 3GPP TS 11.32: "Visitor Location Register Specification Phase 1"

1.2 Abbreviations

Abbreviations used in the present document are listed in 3GPP TS 21.905 [15].

2 General

For terminology and architecture for GSM PLMNs see 3GPP TS 23.002 [2].

Interfaces, interface characteristics, connections through an MSC and ancillary functions of the MSC are defined in 3GPP TS 11.30 [16].

The functions supported by HLRs and VLRs are given in 3GPP TS 11.31 [17] and 11.32 [18].

Each MSC will be responsible for synchronisation, if required, with the fixed network to which it is connected. The requirements of ITU-T Recommendation Q.541 should be observed.

Timing and synchronisation of the radio subsystem is specified in the 3GPP TS 45.010 [4].

3 Performance design objectives

3.1 General

Part of the text is taken from ITU-T Recommendation Q.543 and part from CEPT Recommendation T/S 64-30.

3.2 MSCs

3.2.1 Reference loads

The reference loads are traffic load conditions under which the performance design objectives stated below are to be met. The following reference loads are defined.

- a) Reference load for incoming inter-exchange circuits;
- b) Reference load for circuit switched MS calls.

Reference load A is intended to represent the normal upper mean level of activity which Administrations or RPOA's would wish to provide for MSs, BS-MSC circuits and inter-exchange circuits. Reference load B is intended to represent an increased level beyond normal planned activity levels.

3.2.1.1 Reference load on incoming interexchange circuits

- a) Reference load A
 - 0,7 Erlang average occupancy on all incoming circuits with 35 call attempts/hour/incoming circuit.
This figure assumes 45 % ineffective call attempts.
- b) Reference load B
 - 0,85 Erlang average occupancy on all incoming circuits with 42 call attempts/hour/incoming circuit.

3.2.1.2 Reference load for MS calls

MS calls comprise MS originating and MS terminating traffic. Terminating call attempts from PSTN/ISDN to the MS are measured at the PSTN/ISDN interface of the PLMN. Terminating call attempts as part of the intra-PLMN MS-to-MS call attempts are measured at the GMSC functionality in the VMSC.

a) Reference load A

Table 1: Traffic model for circuit switched MS calls

MS type	Average traffic intensity (Erl/sbscr)	Average BHCA/sbscr	Overall mean holding time (s)
W	0.010	0.60	60
X	0.018	1.00	65
Y	0.030	1.50	72
Z	0.050	2.00	90

The data sets for MS types W through Y are chosen to cover field observations in various continents, countries and regions. With an increase of traffic per subscriber, the overall mean holding time tends to increase. The set Z is chosen as an extreme value, expressing the expectation that such a large value should only be observed in association with a substantially increased overall mean holding time.

b) Reference load B

Reference load B is defined as a traffic increase over reference load A of:

+ 20% in Erlangs and.

+ 20% in BHCA.

3.2.1.3 Impact of supplementary services

If the reference model MSC assumes that significant use is made of supplementary services, the performance of the MSC can be strongly affected, especially in designs where processor capacity can become a limiting item. The performance delays recommended can be significantly lengthened at a given call load under such circumstances. The Administration or Operating Agency defining the reference model should estimate the fractions of calls which use various supplementary services so that an average processor impact relative to a basic telephone call can be calculated.

3.2.2 Inadequately handled call attempts

3.2.2.1 Definition

Inadequately handled call attempts are attempts which are blocked (as defined in ITU-T E.600 series of Recommendations) or are excessively delayed within the exchange. "Excessive delays" are those that are greater than three times the "0,95 probability of not exceeding" values recommended in the tables.

For originating and transit calls, this inadequately handled call attempt parameter applies only when there is at least one appropriate outlet available.

3.2.2.2 Probability of inadequately handled call attempts occurring

The values in table 2 are recommended.

Table 2

Type of connection	Reference Load A	Reference load B
Internal	$\leq 10^{-2}$	$\leq 4 \times 10^{-2}$
Originating	$\leq 5 \times 10^{-3}$	$\leq 3 \times 10^{-2}$
Terminating	$\leq 2 \times 10^{-3}$	$\leq 2 \times 10^{-2}$
Transit	$\leq 10^{-3}$	$\leq 10^{-2}$

3.2.3 Delay probability

The following notes apply to the delay parameters included in this section:

- 1) The term "mean value" is understood as the expected value in the probabilistic sense.
- 2) The terms "received from" and "passed to" the signalling system are meant to be that instant at which the information is exchanged between the signalling data link (layer 1) and the signalling link functions (layer 2) in ITU-T Signalling System No. 7. For Dm channel signalling it is designated as that instant when the information is exchanged between the data link layer (layer 2) and the network layer (layer 3) by means of primitives. Consequently, the specified time intervals exclude the layer 1 and layer 2 times. However, they do include queuing delay in the absence of disturbances, but not additional queuing caused by retransmission of signalling messages.
- 3) It is indicated where processing phases handled in entities other than the MSC/VLR are included in the defined call phases; estimates likely to give the correct order of magnitude for the overall delay are given. This makes it easy to re-use monitoring equipment available for exchanges for the MSC/VLR. It also gives an indication of the call handling delays to be expected in a mobile network.

3.2.3.1 User signalling acknowledgement delay

User signalling acknowledgement delay is the interval from the instant a user signalling message has been received from Dm channel until a message acknowledging the receipt of that message is passed back from the MSC to Dm channel. Examples of such messages are SETUP ACKNOWLEDGEMENT to SETUP, CONNECT ACKNOWLEDGEMENT to CONNECT, and RELEASE ACKNOWLEDGEMENT to RELEASE.

The values in table 3 are recommended.

Table 3

	Reference load A	Reference load B
Mean value	≤400 ms	≤800 ms
0.95 probability of not exceeding	600 ms	1000 ms

3.2.3.2 Signalling transfer delay

The MSC signalling transfer delay is the time taken for the MSC to transfer a message from one signalling system to another with minimal or no other exchange actions required. The interval is measured from the instant that a message is received from a signalling system until the moment the corresponding message is passed to another signalling system. Examples of messages are ALERT to ADDRESS COMPLETE, ADDRESS COMPLETE to ADDRESS COMPLETE, CONNECT to ANSWER, RELEASE to DISCONNECT etc. The values in table 4 are recommended for originating and terminating connections.

Table 4

	Reference load A	Reference load B
Mean value	≤200 ms	≤350 ms
0.95 probability of not exceeding	400 ms	700 ms

3.2.3.3 Through connection delay

- a) For originating outgoing traffic through connection delay is defined as the interval from the instant that the signalling information required for setting up a connection through the MSC is received from the incoming signalling system to the instant that the transmission path is available for carrying traffic between the incoming and out going terminations on the MSC.

Switching through for mobile originating calls outgoing from the MSC occurs in two stages. The first stage is for the backward path with the delay between SETUP from the MS and JOIN_PATH for the B side. The second stage is for the forward path with the delay between ANSWER and JOIN_PATH for the A side.

The first stage encompasses the call set-up delay, hence the recommended values for the Call Set-up Delay in Section 3.2.3.8 apply.

The second stage encompasses the signalling transfer delay between ANSWER and CONNECT, hence the Signalling Transfer Delay in Section 3.2.3.2 applies.

- b) for internal and terminating traffic the through connection delay is defined as the interval from the instant that the CONNECT message is received from the Dm channel until the through connection is established and available for carrying traffic and the ANSWER and CONNECT ACKNOWLEDGEMENT messages have been passed to the appropriate signalling systems.

The values in table 5 are recommended.

Table 5

	Reference load A	Reference load B
Mean value	≤250 ms	≤400 ms
0.95 probability of not exceeding	300 ms	600 ms

3.2.3.4 Incoming call indication sending delay - (for terminating and internal traffic connections)

The incoming call indication sending delay is defined as the interval from the instant at which the necessary signalling information is received from the signalling system to the instant at which the SETUP message is passed to the signalling system of the called subscriber.

This phase contains three parts that are handled in the BSS or in the MS, namely

- paging;
- RACH and SDCCH signalling for access to the network;
- authentication.

The recommended delays in tables 7 and 8 include estimates of these delays together with the MSC processing.

In the case of overlap sending in the incoming signalling system, the values in table 6 are recommended.

Table 6

	Reference load A	Reference load B
Mean value	≤4000 ms	≤4700 ms
0.95 probability of not exceeding	4700 ms	5200 ms

In the case of en-bloc sending in the incoming signalling system, the values in table 7 are recommended.

Table 7

	Reference load A	Reference load B
Mean value	≤4600 ms	≤4900 ms
0.95 probability of not exceeding	4900 ms	5300 ms

3.2.3.5 Connection release delay

Connection release delay is defined as the interval from the instant when DISCONNECT or RELEASE message is received from a signalling system until the instant when the connection is no longer available for use on the call (and is available for use on another call) and a corresponding RELEASE or DISCONNECT message is passed to the other signalling system involved in the connection. The values in table 8 are recommended.

Table 8

	Reference load A	Reference load B
Mean value	≤250 ms	≤400 ms
0.95 probability of not exceeding	300 ms	700 ms

3.2.3.6 Call clearing delay

Disconnect and call clearing will usually be performed at the same time. However, on certain calls it may be necessary for an exchange to retain call references after disconnect has occurred, until a clearing message is received. The exchange may then discard the call reference information. The corresponding RELEASE message must be passed on to other involved signalling systems in the interval allowed for signalling transfer delay.

3.2.3.7 Timing for start of charging (circuit switched calls)

When required, timing for charging at the MSC where this function is performed, shall begin after receipt of an ANSWER indication from a connecting exchange or the called user. The start of timing for charging should occur within the intervals recommended in table 9:

Table 9

	Reference load A	Reference load B
Mean value	≤100 ms	≤175 ms
0.95 probability of not exceeding	200 ms	350 ms

3.2.3.8 Call set-up delay

The call set-up delay for mobile originating calls outgoing from the MSC is measured from SETUP received until IAM sent. This phase also contains the assignment of the air interface traffic channel performed in the BSS. It is assumed that all call handling data are available in the VLR at set-up time.

The values in table 10 are recommended.

Table 10

	Reference load A	Reference load B
Mean value	≤1900 ms	≤2200 ms
0.95 probability of not exceeding	2100 ms	2400 ms

3.2.3.9 Handover delay

Two cases are to be defined

- a) between BSs of the same MSC;
- b) between BSs of different MSCs.

objectives are for further study and should include:

- i) interruption of communication path;
- ii) probability of success where initiation was successful.

3.2.3.10 Off-air-call-set-up (OACSU) delay

OACSU delay is the extra delay in switching the speech path from A- to B-subscriber because of seizing the radio path after the B-subscriber has hooked-off. It is defined as the interval that the answer indication is received from the B-subscriber until the instant when the radio path has been successfully seized.

The values in table 11 are recommended.

Table 11

	Reference load A
Mean value	≤1000 ms
0.95 probability of not exceeding	5000 ms

3.2.3.11 Discontinuous reception mode delay

For further study.

3.2.4 Call processing performance objectives

3.2.4.1 Premature release

The probability that an MSC malfunction will result in the premature release of an established connection in any one minute interval should be:

$$p \leq 2 \times 10^{-5}$$

3.2.4.2 Release failure

The probability that an MSC malfunction will prevent the required release of a connection should be:

$$p \leq 2 \times 10^{-5}$$

3.2.4.3 Incorrect charging or accounting

The probability of a call attempt receiving incorrect charging treatment due to an MSC malfunction should be:

$$p \leq 10^{-4}$$

3.2.4.4 Misrouting

The probability of a call being misrouted following receipt by the MSC of a valid address should be:

$$p \leq 10^{-4}$$

3.2.4.5 No tone

The probability of a call attempt encountering no tone following receipt of a valid address by the MSC should be:

$$p \leq 10^{-4}$$

3.2.4.6 Other failures

The probability of the MSC causing a call failure for any other reason not identified specifically above should be:

$$p \leq 10^{-4}$$

3.2.4.7 Transmission performance

The probability of a connection being established with an unacceptable transmission quality across the exchange should be:

$$p \text{ (unacceptable transmission)} \leq 10^{-5}$$

The transmission quality across the exchange is said to be unacceptable when the bit error ratio is above alarm condition.

NOTE: The alarm condition has yet to defined.

3.2.4.8 Slip rate

The slip rate under normal conditions is covered in ITU-T Recommendation Q.541.

3.2.5 MSC performance during overload conditions

The requirements stated in ITU-T Recommendation Q.543 should be met.

3.3 Performance design objectives for HLRs

3.3.1 Reference loads

- a) Reference load for call handling: 0,4 transactions per subscriber per hour.
- b) Reference load for mobility management: 1,8 transactions per subscriber per hour.

3.3.2 Objectives

The following objectives for delay times are independent of the size of the HLR and are 95% values.

- a) The probability of loosing messages should be according to the ITU-T Recommendation Q.706:

$$p \text{ (loosing messages)} \leq 10^{-7}$$

- b) The delay for retrieval of information from the HLR (retrieval on a per call basis, retrieval of the authentication etc.) should be less than 1000 ms

- 2c) The delay for location registration in the HLR should be less than 2000 ms.

3.4 Performance design objectives for VLRs

3.4.1 Reference loads

- a) Reference load for call handling: 1,5 transactions per subscriber per hour
- b) Reference load for mobility management: 8,5 transactions per subscriber per hour.

3.4.2 Objectives

The same objectives as for HLRs apply (see section 3.3.2).

4 Transmission characteristics

4.1 General

4.1.1 BS-MSC path

The performance objectives of BS-MSC path are dependent on length of the link and therefore they will be decided on national basis. However, they should be fixed taken into account ITU-T Recommendation G.921.

4.1.2 MSC

The MSC should meet the transmission objectives of digital exchanges as specified in ITU-T Recommendation Q.551 and Q.554.

4.2 System delay distribution

3GPP TS 03.50 specifies an overall transmission delay objective throughout the PLMN for speech channels for reasons of subjective speech quality. Since this transmission delay objective includes several physical network elements, this section specifies transmission delay values allocated to each of them. Due to in-band protocols implemented in the GSM PLMN with timers running across several network entities, also the transmission delay for data channels must be limited and allocated to the physical network elements.

4.2.1 Speech channel delay

The main problem arising from an excessive delay occurs in a speech channel because of subjective effects of echo and simultaneous speech in both directions. To minimise these effects a both way speech delay of 180 ms between the Mouth Reference Point (MRP)/ Ear Reference Point (ERP) in the MS and the Point Of Interconnection (POI) with the PSTN/ISDN has been specified in 3GPP TS 03.50 as an objective for the GSM PLMN operator when constructing his network.

This delay for the full rate speech channel has been loosely allocated to the various system entities as follows and illustrated in fig 4/1 and fig 4/2. The detailed delay figures internal to a system entity are only indicative. The total delay allowance allocated to any of the system entities should, however, not be exceeded. The propagation delay through the PLMN is not included. It should be noted that even if the sum of allocated delay values may exceed 180 ms in some cases, the long-term objective is still to keep the overall PLMN transmission round-trip delay below 180 ms.

The allocated delay allowances are indicated as either system dependent or implementation dependent. By system dependent it is meant that the delay values are worst-case delay values given by system-given units of time, and cannot be changed. By implementation dependent it is meant that the values depend on the technology used, and that the values allocated have been fixed as upper bounds by realistic judgement.

NOTE: The various figures allocated to the various network entities given in these delay budgets are for guidance to network operators for network planning. It is up to the operator to provide other figures, if required.

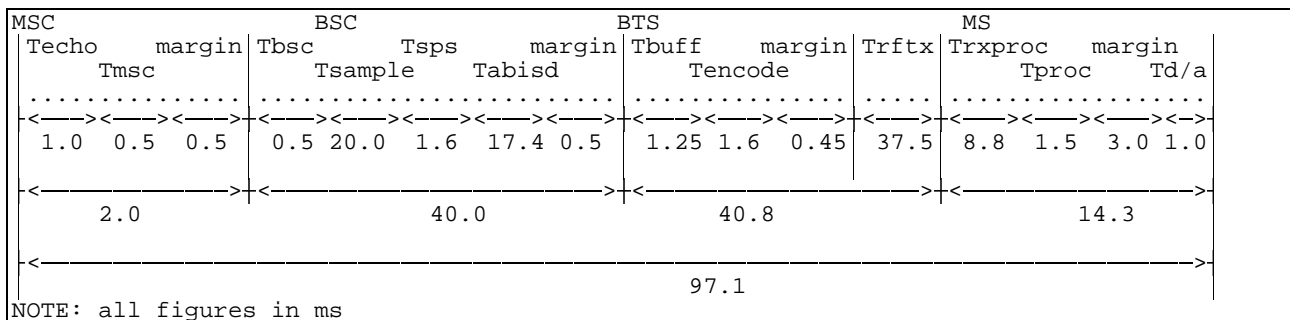


Figure 4/1a: Downlink delay distribution for TCH/FS (16Kbit/s Abis)

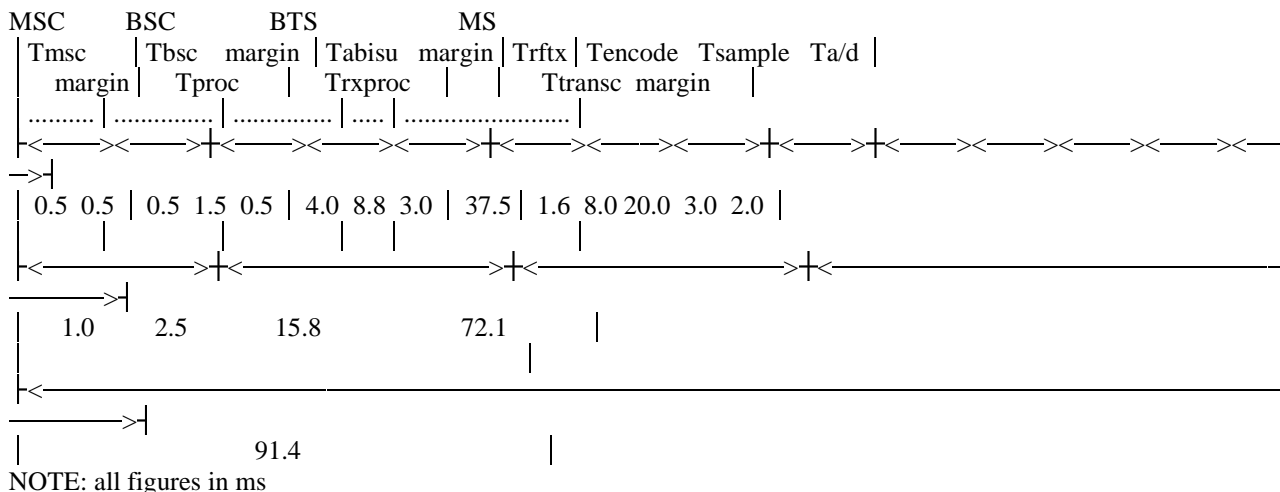


Figure 4/1b: Uplink delay distribution for TCH/FS (16 Kbit/s Abis)

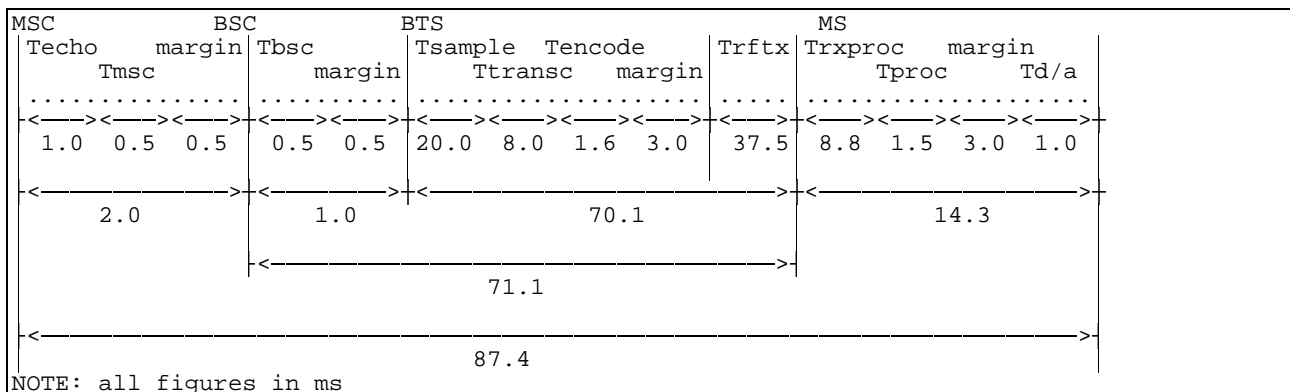


Figure 4/2a: Downlink delay distribution for TCH/FS (64 Kbit/s Abis)

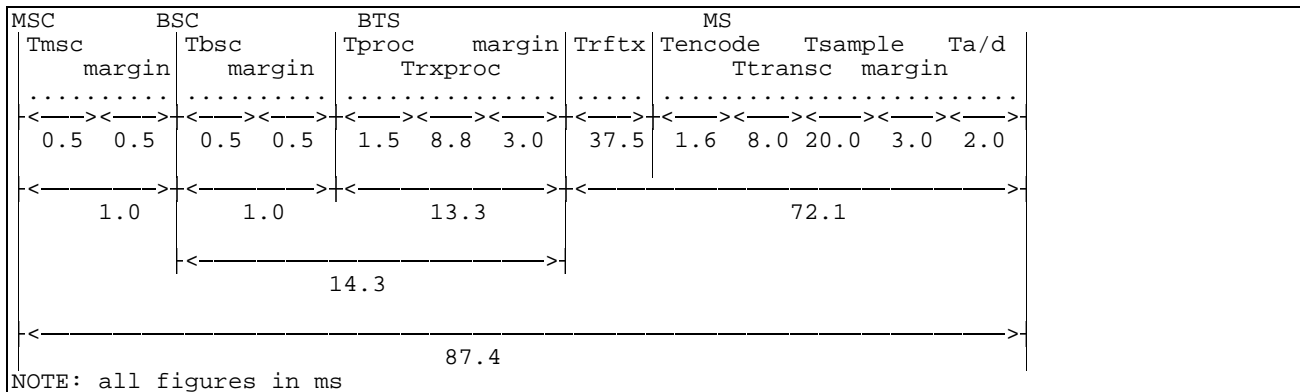


Figure 4/2b: Uplink delay distribution for TCH/FS (64 Kbit/s Abis)

BSS internal delay values (indicative):

- Tsample: The duration of the segment of PCM speech operated on by the full-rate speech transcoder (system dependent).
- Trftx: The time required for transmission of a TCH radio interface frame over the air interface due to the interleaving and de-interleaving (given in table 4/2) (system dependent).
- Tabisu: The time required to transmit the first 56 speech frame data bits (bits C12-C15, D1-D56 and 4 synchronization bits - 64 bits) over the 16 kbit/s A-bis-interface in the uplink direction (system dependent).
- Tabisd: The time required to transmit the 260 speech frame data bits (bits D1-D260, C16 and 17 synchronization bits - 278 bits) over the 16 kbit/s A-bis-interface in the downlink direction (system dependent).
- Tbuff: Due to the time alignment procedure for inband control of the remote transcoder in case of a 16 kbit/s A-bis-interface in the downlink direction, it is required to have a buffer in the BTS of 1 ms + one 250 us regulation step (system dependent).
- Tbsc: Switching delay in the BSC (implementation dependent).
- Ttransc: The speech encoder processing time, from input of the last PCM sample to output of the final encoded bit (implementation dependent).
- Tsps: Delay of the speech encoder after reception of the last PCM sample until availability of the first encoded bit (implementation dependent).
- Tencode: The time required for the channel encoder to perform channel encoding (implementation dependent).
- Trxproc: The time required after reception over the radio interface to perform equalization, channel decoding and SID-frame detection (implementation dependent).
- Tproc: The time required after reception of the first RPE-sample to process the speech encoded data for the full-rate speech decoder and to produce the first PCM output sample (implementation dependent).

BSS external delay values (indicative):

- Techo: Delay due to the echo canceller.
- Tmsc: Switching delay in the MSC.

4.2.2 Data channel delay

The service requirements on excessive transmission delays for data channels are not as stringent as for speech channels. However, two overall requirements apply:

1. Proper operation of the RLP protocol with the timers T1 and T2 residing in the MSC/IWF and in the MS/TA must be ensured, and thus the round-trip delay between those network entities must be low enough to avoid time-outs of the RLP retransmission timer T1 (Round-trip delay < T1 - T2). This applies to non-transparent data only.
2. Proper operation of any end-to-end acknowledged protocols must be ensured in a similar manner. This applies to all data channels.

The transmission delay requirements for data channels have been allocated to the various system entities as follows and as illustrated in figures 4/3 and 4/4, for transparent and non-transparent data separately, and the requirements in the budgets should apply to all full-rate or half-rate channels, whether synchronous or asynchronous. The contributions to the round-trip transmission delay seen by the RLP are also indicated. It should be noted that these concern the transmission delay part only, and that the timer T2 must be added in order to find the limits for T1. The detailed delay figures internal to a system entity are only indicative. The total delay allowance allocated to any of the system entities should, however, not be exceeded. The propagation delay through the PLMN is not included.

The allocated delay allowances are indicated as either system dependent or implementation dependent. By system dependent it is meant that the delay values are worst-case delay values given by system-given units of time, and cannot be changed. By implementation dependent it is meant that the values depend on the technology used, and that the values allocated have been fixed as upper bounds by realistic judgement.

It should be noted that the actual delay distribution for a specific data channel in most cases will have a lower total transmission delay than indicated in the budgets, which show the worst-cases.

It should also be noted that the budgets apply to perfect conditions, i.e. no errors over the radio path (implying no re-transmissions) and no flow control. It should be noted, however, that in a real life situation any errors on the radio path may increase the transmission delay and/or decrease the RLP throughput, and that the flow control buffer limits for XON/XOFF will under continuous flow control have a direct impact on the transmission delay, giving an additional delay contribution directly given by these buffer limits.

The following delay values are specific to data traffic channels:

Transparent data only:

- Tchar: The time needed in the IWF and TA to receive a character at the user bit-rate in the transmit direction for bit-to-character conversion (given in table 4/3) (system dependent).
- Tra0: The time required for buffering in the IWF and TA in the transmit direction for asynchronous-to-synchronous conversion and overspeed/underspeed detection and correction. This delay corresponds to Tchar above (given in table 4/3) (system dependent).
- Tnic: The time needed in the IWF in each direction for buffering for Network Independent Clocking. This time corresponds to one V.110 frame (system dependent).

Non-transparent data only:

- Tl2runit: The necessary time in the IWF and TA in the transmit direction to convert the incoming user data bit stream into interpretable data units, e.g. characters (character oriented without framing) or data frames (e.g. bit oriented data like HDLC) (system dependent).
- Tl2rbuft: Worst-case delay in the IWF and TA in the transmit direction required for buffering in the L2R in order to assemble one PDU (system dependent).
- Tprotp: Processing time used in the IWF and TA by the L2R and the RLP in the transmit or receive direction (implementation dependent).
- Trlpbuft: Worst-case buffering delay in the IWF and TA required by the RLP in the transmit direction in order to synchronize one PDU towards the radio interface transmission (system dependent).
- Trlpbufr: Worst-case delay in the IWF in the receive direction required for buffering in the RLP in order to assemble one PDU, before checksum calculation can be carried out (system dependent).
- Tl2rbufr: Worst-case buffering delay in the IWF and TA required by the L2R in the receive direction in order to synchronize one PDU with the L2R user (system dependent).

Transparent and non-transparent data:

Tiwfpr:	Processing time in the IWF in the downlink or in the uplink direction (implementation dependent).
Tabisf:	Worst-case delay over the A-bis-interface due to non-synchronized A-bis-interface transmission. This delay corresponds to one TRAU frame (system dependent).
Tdframe:	Additional delay to Tabisf in the downlink direction in order to receive a full radio interface data TCH frame over the A-bis-interface, so that channel encoding can start. The data TCH frame length is given in table 4/1 and Tdframe is summarized in table 4/4 (system dependent).
Talignd:	The time needed to wait in the downlink in order to align the received data over the A-bis-interface to the radio interface TDMA frame structure. This time corresponds to one TDMA-frame for full-rate channels and two for half-rate channels (system dependent).
Tframe:	Delay in the uplink direction in the MS in order to receive a full radio interface data TCH frame over the user interface, so that channel encoding can start. The data TCH frame length is given in table 4/1 (system dependent).
Tdbuff:	Additional buffering needed in the TA in the uplink direction with respect to Tframe allowing a total buffering of four V.110 frames. The V.110 frame length is given in table 4/1, and Tdbuff is summarized in table 4/4 (system dependent).
Talignu:	The time needed to wait in order to align the received uplink data over the user interface to the radio interface TDMA frame structure. This time corresponds to one TDMA-frame for full-rate channels and two for half-rate channels (system dependent).
Ttaprocd:	Processing time required in the TA in the downlink direction for terminal adaptation (implementation dependent).
Ttaprocu:	Processing time required in the TA in the uplink direction for terminal adaptation (implementation dependent).

Other delay values indicated in the budgets for data traffic channels are defined as for speech channels. Margins are allocated to each system entity for the total implementation dependent part of the delay contributions, considering the amount of processes in each entity and the amount of data processed. Those operations not included explicitly in the budget are considered only to add minimal delays and are thus considered to be covered by the margins.

The data channel delay budgets for a 64 kbit/s and a 16 kbit/s A-bis-interface are essentially the same, the only difference being a reduction in rate adaptation functions in the 64 kbit/s case and a possible non-synchronized transmission over the 16 kbit/s A-bis-interface (Tabisf). Thus only the 16 kbit/s A-bis-interface is illustrated, and for this option only the worst-cases. The budgets in figures 4/3 and 4/4 apply, hence, also to the case of a 64 kbit/s A-bis-interface. For the case of the integrated BSS the delay budget for the BSS shall contain the sum of the allowances for the BSC and the BTS.

Table 4/1: Radio interface and V.110 frame lengths for traffic channels

Traffic channel:	Frame length (ms):	
	Radio int. (z):	V.110 (r):
TCH/FS	20	-
TCH/HS	[tbd]	-
TCH/F9.6	20	5
TCH/F4.8	20	10
TCH/H4.8	40	10
TCH/F2.4	0	10
TCH/H2.4	40	10

Table 4/2: Interleaving/de-interleaving delay for traffic channels

Traffic channel:	Interleaving/deinterleaving (TDMA-frames/timeslots):	delay (y) (ms)
TCH/FS	7+1/1	37,5
TCH/HS	[tbd]	[tbd]
TCH/F9.6	18+3+2/1	106,8
TCH/H4.8	18+3+2/1	106,8
TCH/F4.8	36+6+4/1	212,9
TCH/F2.4	7+1/1	37,5
TCH/H2.4	36+6+4/1	212,9

NOTE: As an example, the TCH/F9.6 has an interleaving depth of 19, resulting in a delay of 18 TDMA-frames and 1 timeslot. Due to the block diagonal interleaving scheme where 4 user data blocks are channel encoded together, it may in the worst-case be necessary to wait for all the 4 subblocks spread over 3 additional TDMA-frames before channel decoding. The channel encoded block will also span a maximum of 2 SACCH frames.

It may be possible, in practice, to reduce the interleaving delay, T_{rftx} , by processing information before the complete data block is received over the air interface. It may also be possible, in practice, to reduce the impact of T_{frame} by transmitting information over the air interface before the complete data block is encoded. However, due to the less stringent delay requirements on data transmission than on speech transmission, this is considered to unnecessarily constrain the implementation options.

Table 4/3: Delays for bit/character conversion (11 bits)

Ruser	Tchar (x):
75 bit/s	146,7 ms
300 bit/s	36,7 ms
1 200 bit/s	9,2 ms
2 400 bit/s	4,6 ms
4 800 bit/s	2,3 ms
9 600 bit/s	1,2 ms

Table 4/4: Tdframe and Tdbuff given for various TCH types

Traffic channel:	Tdframe (u):	Tdbuff (v):
TCH/FS	-	-
TCH/HS	-	-
TCH/F9.6	0 ms	0 ms
TCH/F4.8	0 ms	20 ms
TCH/H4.8	20 ms	0 ms
TCH/F2.4	0 ms	20 ms
TCH/H2.4	20 ms	0 ms

NOTE: The various figures allocated to the various network entities given in these delay budgets are for guidance to network operators for network planning. It is up to the operator to provide other figures, if required.

The delay value $T_{L2runit}$ has been included in figure 4/4b as "w" ms. No table with values for "w" has been included in the present document since these values will depend on the type of data units the incoming user data bit stream shall be converted into (e.g. conversion into characters or HDLC frames).

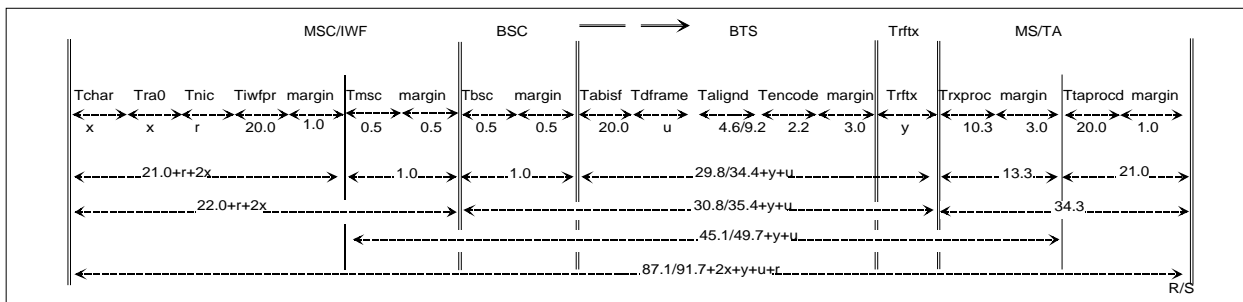


Figure 4/3a: Worst-case downlink delay distribution for data TCH (transparent data)

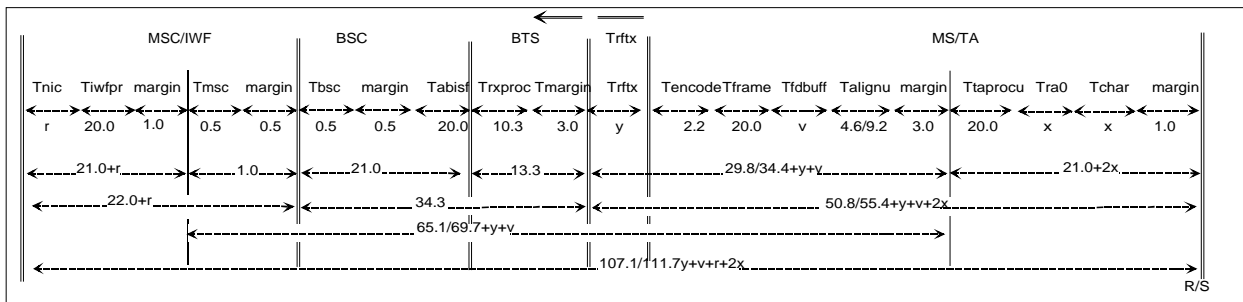


Figure 4/3b: Worst-case uplink delay distribution for data TCH (transparent data)

NOTE: All figures are in ms. The values of x, y, r, u and v depend on the user bitrate, ranging from 75 - 9600 bit/s, and the data TCH type.

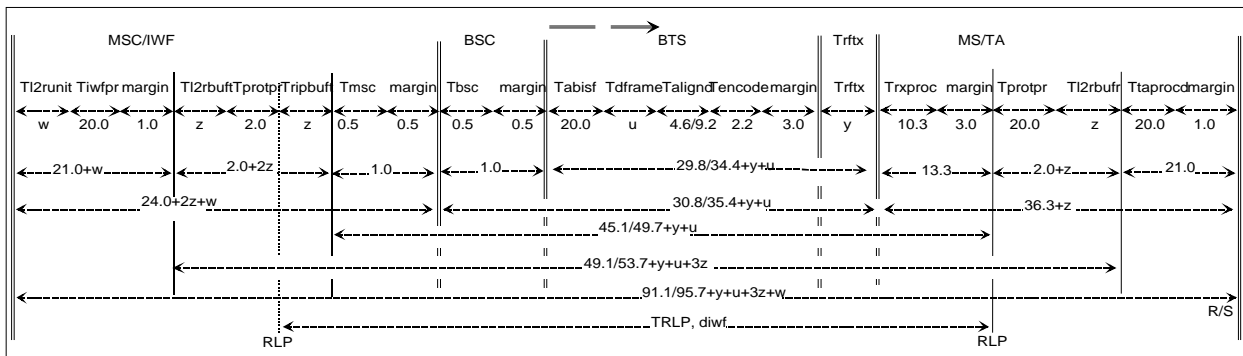


Figure 4/4a: Worst-case downlink delay distribution for data TCH (non-transparent data)

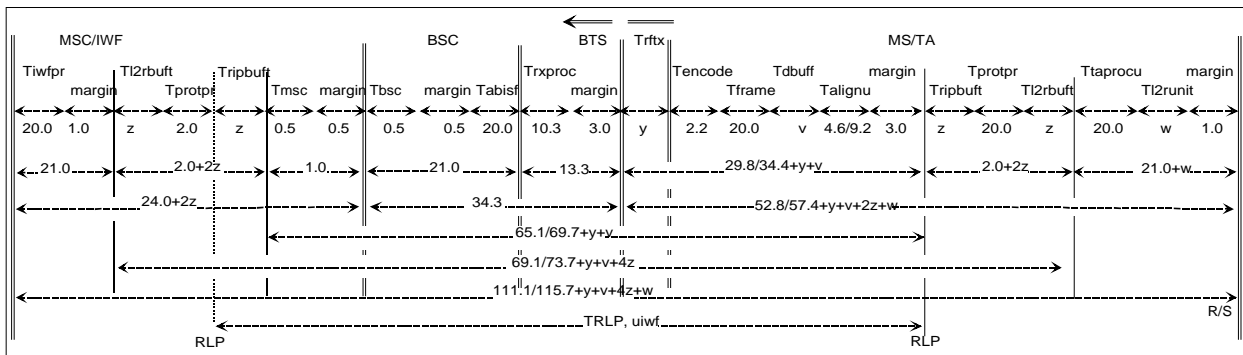


Figure 4/4b: Worst-case uplink delay distribution for data TCH (non-transparent data)

NOTE: All figures are in ms. The values of y, z, u, v and w depend on the data TCH type and the L2R user protocol. $T_{RLP, diwf}$ and $T_{RLP, uiwf}$ are the transmission delays seen by the RLP in the IWF in the downlink and uplink respectively. It should be noted that the corresponding transmission delays seen by the TA are given by a symmetrical assessment, but are not identical. The sum of the two, however, is the same.

Annex A (informative): Change Request History

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2004-12	SP#26					Upgraded to Release 6	6.0.0
2007-06	CT#36					Upgraded unchanged from Rel-6	7.0.0
2008-12	CT#42					Upgraded unchanged from Rel-7	8.0.0
2009-12	-					Update to Rel-9 version (MCC)	9.0.0
2011-03	-					Update to Rel-10 version (MCC)	10.0.0
2011-03	-					Update to Rel-11 version (MCC)	11.0.0
2014-09	-					Update to Rel-12 version (MCC)	12.0.0
2015-12	CT#70					Update to Rel-13 version (MCC)	13.0.0
2017-03	CT#75					Update to Rel-14 version (MCC)	14.0.0
2018-06	CT#80					Update to Rel-15 version (MCC)	15.0.0
2020-07	CT#88e					Update to Rel-16 version (MCC)	16.0.0
2022-04	-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0
2023-03	-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0

History

Document history		
V18.0.0	May 2024	Publication