

ETSI TS 186 014-2 V3.1.1 (2011-07)

Technical Specification

**Technical Committee for IMS Network Testing (INT);
PSTN/ISDN simulation services:
Communication Diversion (CDIV);
Part 2: Test Suite Structure and Test Purposes (TSS&TP)**



Reference

RTS/INT-00029-2

Keywords

CDIV, SIP, testing, TSS&TP

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Introduction	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definitions, symbols and abbreviations	6
3.1 Definitions	6
3.2 Symbols.....	6
3.3 Abbreviations	6
4 Test Suite Structure (TSS).....	7
4.1 Configuration	7
5 Test Purposes (TP)	8
5.1 Introduction	8
5.1.1 TP naming convention	8
5.1.2 Test strategy.....	9
5.2 Signalling requirements.....	9
5.2.1 Actions at the AS of the diverting User	9
5.2.1.1 Diversion procedures	9
5.2.1.2 Notification procedure of the originating terminating and diverting user.....	11
5.2.1.2.1 Originating user	11
5.2.1.2.2 Diverted-to user	31
5.2.1.2.3 Diverting user	40
5.2.2 Actions at the AS of the diverted to User	42
5.2.3 Actions at the user equipment.....	45
5.2.3.1 Actions at the originating UE.....	45
5.2.3.2 Action at the diverted to UE.....	46
5.2.3.3 Actions at the diverting UE.....	48
5.3 Interaction with other services.....	50
5.3.1 Terminating Identification Presentation (TIP).....	50
5.3.2 Terminating Identification Restriction (TIR).....	51
5.3.3 Originating Identification Restriction (OIR).....	51
5.3.4 Anonymous Communication Rejection and Communication Barring (ACR/CB)	53
5.3.5 Explicit Communication Transfer (ECT)	54
6 Compliance.....	56
History	57

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee IMS Network Testing (INT).

The present document is part 2 of a multi-part deliverable covering Communication Diversion (CDIV), as identified below:

- Part 1: Protocol Implementation Conformance Statement (PICS)
- Part 2: Test Suite Structure and Test Purposes (TSS&TP)**
- Part 3: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user

Introduction

The Communications Diversion (CDIV) services enables the diverting user, to divert the communications addressed to diverting user to another destination.

1 Scope

The present document specifies the Test Suite Structure and Test Purposes (TSS&TP) for Communications Diversion (CDIV) services, TS 124 604 [1].

A further part of the present document specifies the Protocol Implementation Conformance Statement (PICS), Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma based on the present document.

Within the TISPAN NGN Release 1 Next Generation Network (NGN) the stage 3 description is specified using the IP-Multimedia Call Control Protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP).

The Communications Diversion (CDIV) services enables diverting user, to divert the communications addressed to diverting user to another destination.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 124 604 (V8.7.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Communication Diversion (CDIV) using IP Multimedia (IM) Core Network (CN) subsystem; Protocol specification (3GPP TS 24.604 version 8.7.0 Release 8)".
- [2] ETSI TS 186 014-1: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); PSTN/ISDN simulation services: Communication Diversion (CDIV); Part 1: Protocol Implementation conformance Statement (PICS)".
- [3] ISO/IEC 9646-1: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [4] IETF RFC 4244: "An Extension to the Session Initiation Protocol (SIP) for Request History Information".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

Not applicable.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 124 604 [1] and the following apply:

Abstract Test Suite (ATS): Refer to ISO/IEC 9646-1 [3].

Implementation Under Test (IUT): Refer to ISO/IEC 9646-1 [3].

PICS proforma: Refer to ISO/IEC 9646-1 [3].

point of control and observation: Refer to ISO/IEC 9646-1 [3].

Protocol Implementation Conformance Statement (PICS): Refer to ISO/IEC 9646-1 [3].

System Under Test (SUT): Refer to ISO/IEC 9646-1 [3].

Test Purpose (TP): Refer to ISO/IEC 9646-1 [3].

3.2 Symbols

Gm	Reference Point between a UE and a P-CSCF
Mg	Reference Point between an MGCF and a CSCF
Mw	Reference Point between a CSCF and another CSCF
Mx	Reference Point between a CSCF/BGCF and IBCF

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TS 124 604 [1] and the following apply:

ISC	IP Multimedia Subsystem Service Control
NDUB	Network Determined User Busy
NNI	Network - Network Interface
TSS	Test Suite Structure
UDUB	User Determined User Busy

4 Test Suite Structure (TSS)

Table 1: Test suite structure

Netw		
	ASdivertingUser/DivProcedures	CDIV_N01
	ASdivertingUser/NotOrigUser	CDIV_N02
	ASdivertingUser/NotTermUser	CDIV_N03
	ASdivertingUser/NotDivUser	CDIV_N04
	ASdiverted-to	CDIV_N05
User		
	OrigUE	CDIV_U01
	DivertingUE	CDIV_U02
Interaction		
	TIP	CDIV_N06_xxx
	TIR	CDIV_N07_xxx
	OIR	CDIV_N08_xxx
	ACR-CB	CDIV_N09_xxx
	ECT	CDIV_N10_xxx

4.1 Configuration

The scope of the present document is to test the signalling and procedural aspects of the stage 3 requirements as described in [1]. The stage 3 description respects the requirements to several network entities and also to requirements regarding to end devices. Therefore several interfaces (reference points) are addressed to satisfy the test of the different entities.

Therefore, to test the appropriate entities, the configurations below are applicable:

Testing of the Application Server: This entity is responsible to perform the service. Hence the ISC interface is the appropriate access point. Figure 1 points to this.

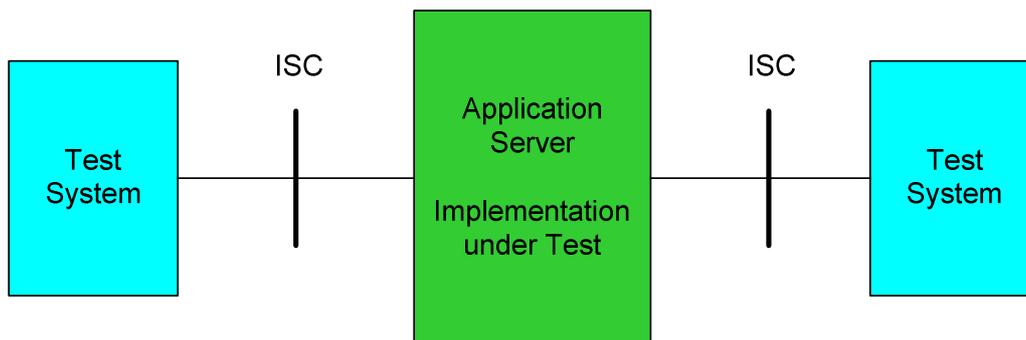


Figure 1: Applicable interface to test AS functionalities

If the ISC interface is not accessible it is also applicable to perform the test of the AS using any NNI (Mw, Mg, Mx) interface (consider Figure 2). In case only the Gm interface is accessible this shall be used instead. In this case, be aware that the verification of several requirements is impeded.

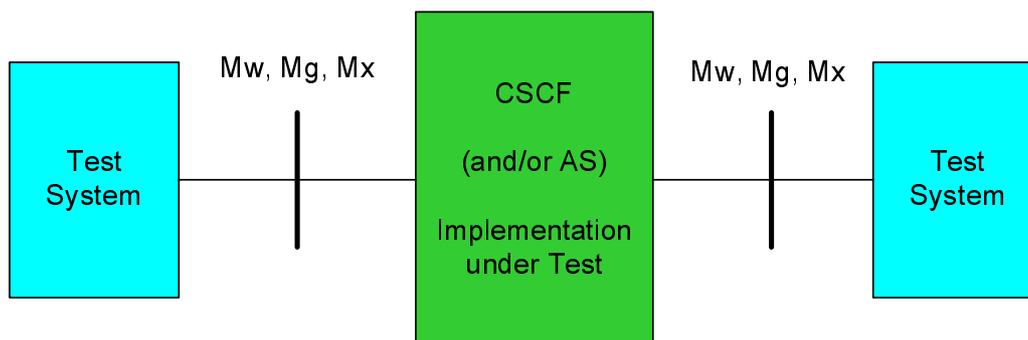


Figure 2: Applicable interfaces to test using the (generic) NNI interface

Figure 3 illustrates the usage of any NNI interface.

Testing of User Equipment: There are several requirements regarding to the end devices. Therefore, a special configuration appears.

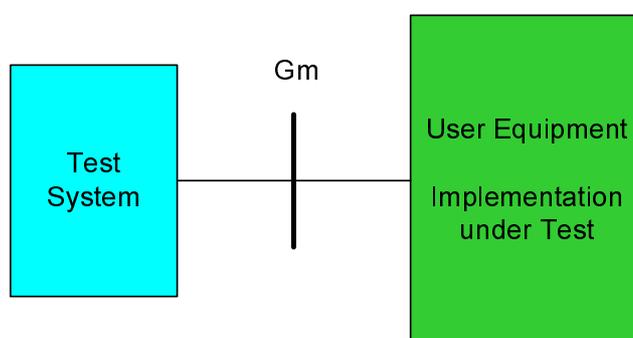


Figure 3: Applicable configuration to test the User Equipment

5 Test Purposes (TP)

5.1 Introduction

For each test requirement a TP is defined.

5.1.1 TP naming convention

TGs are numbered, starting at 001, within each group. Groups are organized according to the TSS. Additional references are added to identify the actual test suite and whether it applies to the network or the user (see Figure 4).

Identifier:	<ss>_<iut><group>_<nnn>	
<ss>	= supplementary service:	e.g. "CDIV"
<iut>	= type of IUT:	U User
		N Network
		yyy service
<group>	= group	2 digit field representing group reference according to TSS
<nnn>	= sequential number	(001-999)

Figure 4: TP identifier naming convention scheme

5.1.2 Test strategy

As the base standard TS 124 604 [1] contains no explicit requirements for testing, the TPs were generated as a result of an analysis of the base standard and the PICS specification TS 186 014-1 [2].

5.2 Signalling requirements

5.2.1 Actions at the AS of the diverting User

5.2.1.1 Diversion procedures

TSS Netw/ASdivertingUser/DivProcedures	TP CDIV_N01_001	Reference 4.5.2.6.1	Selection expression PICS 1/2
Test purpose <i>Served user has activated CFB, maximum number of diversion exceeded.</i>			
Ensure that the 486 (Busy here) final response with a Warning header is sent to the original user if the served user has activated the CFB simulation service and the served user is busy and if the maximum number of diversions is exceeded.			
SIP header values: INVITE: sip:SIP#n@ example.com SIP/2.0 History-Info: <sip: non significant uri value >;index=1, Build additional entries with non significant uri values <sip:SIP#n; cause=VA_CAUSE>;index=1.n.1			
Remark: for each redirection a history-entry is added the History-Info header and the relevant index is incremented according the rules described in 4.5.2.6.2.3 [1]. In short: each redirection is represented by a "." (dot) in the latest history-entry.			
Comments:			
SIP#1	AS	SIP#n	SIP#n+1
INVITE 1	→	→ INVITE 1	
486 (Busy here)	←	← 486 Busy Here	
ACK	→	→ ACK	

TSS Netw/ASdivertingUser/DivProcedures	TP CDIV_N01_002	Reference 4.5.2.6.1	Selection expression PICS 1/3
Test purpose <i>Served user has activated CFNR, maximum number of diversion exceeded.</i>			
Ensure that the 480 (Temporarily unavailable) final response with a Warning header is sent to the original user if the served user does not answer the communication request and if the maximum number of diversions is exceeded.			
SIP header values: INVITE: sip:SIP#n@ example.com SIP/2.0 History-Info: <sip: non significant uri value>;index=1, Build additional entries with non significant uri values <sip:SIP#n; cause=VA_CAUSE>;index=1.n.1			
Remark: for each redirection a history-entry is added the History-Info header and the relevant index is incremented according the rules described in 4.5.2.6.2.3 [1]. In short: each redirection is represented by a "dot" in the latest history-entry.			
Comments:			
SIP#1	AS	SIP#n	SIP#n+1
INVITE	→	→	INVITE
180 Ringing	←	←	180 Ringing
	No reply timer expires		
480 (Temporarily unavailable)	←	→	CANCEL
ACK	→	←	200 OK CANCEL
		←	487 Request Terminated
		→	ACK

TSS Netw/ASdivertingUser/DivProcedures	TP CDIV_N01_003	Reference 4.5.2.6.1	Selection expression PICS 1/1
Test purpose <i>Served user has activated CFU, maximum number of diversion exceeded.</i>			
Ensure that the 480 (Temporarily unavailable) final response with a Warning header is sent to the original user if the served user has activated the CFU simulation service and if the maximum number of diversions is exceeded.			
SIP header values: INVITE: sip:SIP#n@ example.com SIP/2.0 History-Info: <sip: non significant uri value >;index=1, Build additional entries with non significant uri values <sip:SIP#n; cause=VA_CAUSE>;index=1.n.1			
Remark: for each redirection a history-entry is added the History-Info header and the relevant index is incremented according the rules described in 4.5.2.6.2.3 [1]. In short: each redirection is represented by a "dot" in the latest history-entry.			
Comments:			
SIP#1	AS	SIP#n	SIP#n+1
INVITE	→		
480 (Temporarily unavailable)	←		
ACK	→		

TSS Netw/ASdivertingUser/DivProcedures	TP CDIV_N01_004	Reference 4.5.2.6.1	Selection expression PICS 1/4 OR PICS 1/5
Test purpose <i>Served user has activated CD, maximum number of diversion exceeded.</i>			
Ensure that the 480 (Temporarily unavailable) final response with a Warning header is sent to the original user if the served user has activated the CD simulation service and if the maximum number of diversions is exceeded.			
SIP header values: INVITE: sip:SIP#n@ example.com SIP/2.0 History-Info: <sip: non significant uri value >;index=1, Build additional entries with non significant uri values <sip:SIP#n; cause=VA_CAUSE>;index=1.n.1			
Remark: for each redirection a history-entry is added the History-Info header and the relevant index is incremented according the rules described in 4.5.2.6.2.3 [1]. In short: each redirection is represented by a "dot" in the latest history-entry.			
Comments:			
SIP#1	AS	SIP#n	SIP#n+1
INVITE	→	→	INVITE
180 Ringing	←	←	180 Ringing
	←	←	302 Moved Temporarily
		→	ACK
480 (Temporarily unavailable)	←		
ACK	→		

5.2.1.2 Notification procedure of the originating terminating and diverting user

5.2.1.2.1 Originating user

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_001	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3
Test purpose <i>Communication forwarding using CFU or using CFB NDUB, CFNL or CFNRc with applying diversion condition; originating user is not notified.</i>			
When Communication Diversion occurs and if the notification procedures of the originating user is supported then no 181 (Call Is Being Forwarded) response shall be sent towards the originating user if the served users subscription option is set to: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = no.			
Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = no			
SIP header values:			
Comments:			
SIP#1	AS	SIP#2	SIP#3
INVITE	→		→ INVITE

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_002	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3													
Test purpose <i>Communication forwarding using CFU or using CFB NDUB, CFNL or CFNRc with applying diversion condition; originating user is notified.</i>																
When Communication Diversion occurs and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = CAU_VA, index = 1.1 																
Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = yes</i> <i>Served user allows the presentation of his/her URI to originating user in diversion notification = yes</i>																
SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2 >;index=1, <sip:SIP#3; cause=CAU_VA>;index=1.1																
Comments: <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">SIP#1</td> <td style="width: 30%; text-align: center;">AS</td> <td style="width: 20%; text-align: center;">SIP#2</td> <td style="width: 20%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>					SIP#1	AS	SIP#2	SIP#3	INVITE	→			181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3													
INVITE	→															
181 Call is Being Forwarded	←		→ INVITE													

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_003	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4													
Test purpose <i>Communication forwarding using CFU or using CFB NDUB, CFNL or CFNRc with applying diversion condition; originating user is notified.</i>																
When Communication Diversion occurs and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = CAU_VA, index = 1.1 																
Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = no</i> <i>Served user allows the presentation of his/her URI to originating user in diversion notification = no OR</i> <i>Served user has subscribed to TIR in permanent mode</i>																
SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3?Privacy=history ;cause=CAU_VA >;index=1.1																
Comments: <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">SIP#1</td> <td style="width: 30%; text-align: center;">AS</td> <td style="width: 20%; text-align: center;">SIP#2</td> <td style="width: 20%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>					SIP#1	AS	SIP#2	SIP#3	INVITE	→			181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3													
INVITE	→															
181 Call is Being Forwarded	←		→ INVITE													

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_004	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4												
Test purpose <i>Communication forwarding using CFU or using CFB NDUB, CFNL or CFNRc with applying diversion condition; originating user is notified.</i>															
<p>When Communication Diversion occurs and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = CAU_VA, index = 1.1 															
Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = yes</i> <i>Served user allows the presentation of his/her URI to originating user in diversion notification = no OR</i> <i>Served user has subscribed to TIR in permanent mode</i>															
SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3; cause=CAU_VA >;index=1.1															
Comments: <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: center;">SIP#2</th> <th style="text-align: center;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: center;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→			181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3												
INVITE	→														
181 Call is Being Forwarded	←		→ INVITE												

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_005	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4
Test purpose <i>Communication forwarding using CFU or using CFB NDUB, CFNL or CFNRc with applying diversion condition; originating user is notified.</i>			
When Communication Diversion occurs and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = CAU_VA, index = 1.1			
Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = no</i> <i>Served user allows the presentation of his/her URI to originating user in diversion notification = yes</i>			
SIP header values: SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3?Privacy=history ;cause=CAU_VA >;index=1.1			
Comments:			
SIP#1	AS	SIP#2	SIP#3
INVITE	→		
181 Call is Being Forwarded	←		→ INVITE

Table 2: Communication diversion cause, used in CDIV_N02_001-002

CAU_VA	Communication diversion	Value
1	CFU	302
2	CFB NDUB	486
3	CFNL	404
4	CFNRc	503

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_006	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3
Test purpose <i>Communication forwarding using CFB UDUB with applying diversion condition; originating user is not notified.</i>			
When Communication Diversion occurs (served user sends 486 response) and if the notification procedures of the originating user is supported then no 181 (Call Is Being Forwarded) response shall be sent towards the originating user if the served users subscription option is set to: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = no.</i>			
Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = no</i>			
SIP header values:			
Comments:			
SIP#1	AS	SIP#2	SIP#3
INVITE	→	→ INVITE ← 486 Busy Here → ACK	
			→ INVITE

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_007	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3																				
<p>Test purpose Communication forwarding using CFB UDUB with applying diversion condition; originating user is notified.</p> <p>When Communication Diversion occurs (served user sends 486 response) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 486, index = 1.1 																							
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = yes Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = yes</p>																							
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2 >;index=1, <sip:SIP#3; cause=486>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																							
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 486 Busy Here</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE				← 486 Busy Here				→ ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3																				
INVITE	→	→ INVITE																					
		← 486 Busy Here																					
		→ ACK																					
181 Call is Being Forwarded	←		→ INVITE																				

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_008	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4												
<p>Test purpose Communication forwarding using CFB UDUB with applying diversion condition; originating user is notified.</p> <p>When Communication Diversion occurs (served user sends 486 response) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = 486, index = 1.1 															
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = no Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = no OR Served user has subscribed to TIR in permanent mode</p>															
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3?Privacy=history ;cause=486>;index=1.1</p> <p>NOTE: According to TS 124 604 [1] 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with IETF RFC 4244 [4]".</p>															
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE ← 486 Busy Here → ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 486 Busy Here → ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3												
INVITE	→	→ INVITE ← 486 Busy Here → ACK													
181 Call is Being Forwarded	←		→ INVITE												

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_009	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4												
<p>Test purpose Communication forwarding using CFB UDUB with applying diversion condition; originating user is notified.</p> <p>When Communication Diversion occurs (served user sends 486 response) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 486, index = 1.1 															
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = yes Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = no OR Served user has subscribed to TIR in permanent mode</p>															
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3;cause=486>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>															
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE ← 486 Busy Here → ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 486 Busy Here → ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3												
INVITE	→	→ INVITE ← 486 Busy Here → ACK													
181 Call is Being Forwarded	←		→ INVITE												

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_010	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4												
<p>Test purpose Communication forwarding using CFB UDUB with applying diversion condition; originating user is notified.</p> <p>When Communication Diversion occurs (served user sends 486 response) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header <ul style="list-style-type: none"> including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, with a Privacy header set to "history", cause = 486, index = 1.1 															
<p>Subscription options: Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to originating user in diversion notification = no Served user allows the presentation of his/her URI to originating user in diversion notification = yes</p>															
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3?Privacy=history,cause=486>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>															
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: center;">SIP#2</th> <th style="text-align: center;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→ INVITE ← 486 Busy Here → ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: center;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 486 Busy Here → ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3												
INVITE	→	→ INVITE ← 486 Busy Here → ACK													
181 Call is Being Forwarded	←		→ INVITE												

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_011	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3																
<p>Test purpose Communication forwarding using CFNR with applying diversion condition; originating user is not notified.</p> <p>When Communication Diversion occurs (served user does not respond) and if the notification procedures of the originating user is supported then no 181 (Call Is Being Forwarded) response shall be sent towards the originating user if the served users subscription option is set to: Originating user receives notification that his communication has been diverted (forwarded or deflected) = no. The initial communication to the served user is terminated with a CANCEL or a BYE request with a Reason header with protocol set to SIP and the cause set to 408.</p>																			
<p>Subscription options: Originating user receives notification that his communication has been diverted (forwarded or deflected) = no</p>																			
<p>SIP header values: CANCEL/BYE: Reason: SIP; cause=408</p>																			
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: center;">SIP#2</th> <th style="text-align: center;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→ INVITE ← 180 Alerting</td> <td></td> </tr> <tr> <td>180 Alerting</td> <td style="text-align: center;">←</td> <td style="text-align: center;">No reply timer expires → CANCEL/BYE ← 200 OK CANCEL/BYE ← 487 Request Terminated → ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 180 Alerting		180 Alerting	←	No reply timer expires → CANCEL/BYE ← 200 OK CANCEL/BYE ← 487 Request Terminated → ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																
INVITE	→	→ INVITE ← 180 Alerting																	
180 Alerting	←	No reply timer expires → CANCEL/BYE ← 200 OK CANCEL/BYE ← 487 Request Terminated → ACK																	
			→ INVITE																

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_012	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3																																								
<p>Test purpose Communication forwarding using CFNR with applying diversion condition; originating user is notified.</p> <p>When Communication Diversion occurs (served user does not respond) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 408, index = 1.1 <p>The initial communication to the served user is terminated with a CANCEL or a BYE request with a Reason header with protocol set to SIP and the cause set to 408.</p>																																											
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = yes Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = yes</p>																																											
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2 >;index=1, <sip:SIP#3; cause=408>;index=1.1</p> <p>CANCEL/BYE: Reason: SIP; cause=408</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																																											
<p>Comments:</p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Alerting</td> <td style="text-align: center;">←</td> <td>← 180 Alerting</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">No reply timer expires</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">→ CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 200 OK CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 487 Request Terminated</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Alerting	←	← 180 Alerting				No reply timer expires		181 Call is Being Forwarded	←					→ CANCEL/BYE				← 200 OK CANCEL/BYE				← 487 Request Terminated				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																																								
INVITE	→	→ INVITE																																									
180 Alerting	←	← 180 Alerting																																									
		No reply timer expires																																									
181 Call is Being Forwarded	←																																										
		→ CANCEL/BYE																																									
		← 200 OK CANCEL/BYE																																									
		← 487 Request Terminated																																									
		→ ACK																																									
			→ INVITE																																								

TSS Netw/ASNotification/Originating user	TP CDIV_N02_013	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4																																								
<p>Test purpose Communication forwarding using CFNR with applying diversion condition; originating user is notified.</p> <p>When Communication Diversion occurs (served user does not respond) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, with a Privacy header set to "history", cause = 408, index = 1.1 <p>The initial communication to the served user is terminated with a CANCEL or a BYE request with a Reason header with protocol set to SIP and the cause set to 408.</p>																																											
<p>Subscription options: Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to originating user in diversion notification = no Served user allows the presentation of his/her URI to originating user in diversion notification = no OR Served user has subscribed to TIR in permanent mode</p>																																											
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3?Privacy=history;cause=408>;index=1.1</p> <p>CANCEL/BYE: Reason: SIP; cause=408</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: center;">SIP#2</th> <th style="text-align: center;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→ INVITE</td> <td></td> </tr> <tr> <td>180 Alerting</td> <td style="text-align: center;">←</td> <td style="text-align: center;">← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">No reply timer expires</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">→ CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 200 OK CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 487 Request Terminated</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Alerting	←	← 180 Ringing				No reply timer expires		181 Call is Being Forwarded	←					→ CANCEL/BYE				← 200 OK CANCEL/BYE				← 487 Request Terminated				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																																								
INVITE	→	→ INVITE																																									
180 Alerting	←	← 180 Ringing																																									
		No reply timer expires																																									
181 Call is Being Forwarded	←																																										
		→ CANCEL/BYE																																									
		← 200 OK CANCEL/BYE																																									
		← 487 Request Terminated																																									
		→ ACK																																									
			→ INVITE																																								

TSS Netw/ASNotification/Originating user	TP CDIV_N02_014	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4																																								
Test purpose <i>Communication forwarding using CFNR with applying diversion condition; originating user is notified.</i>																																											
<p>When Communication Diversion occurs (served user does not respond) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 408, index = 1.1 <p>The initial communication to the served user is terminated with a CANCEL or a BYE request with a Reason header with protocol set to SIP and the cause set to 408.</p>																																											
Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = yes</i> <i>Served user allows the presentation of his/her URI to originating user in diversion notification = no OR</i> <i>Served user has subscribed to TIR in permanent mode</i>																																											
SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3;cause=408>;index=1.1 CANCEL/BYE: Reason: SIP; cause=408 NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".																																											
Comments: <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Alerting</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">No reply timer expires</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">→ CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 200 OK CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 487 Request Terminated</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Alerting	←	← 180 Ringing				No reply timer expires		181 Call is Being Forwarded	←					→ CANCEL/BYE				← 200 OK CANCEL/BYE				← 487 Request Terminated				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																																								
INVITE	→	→ INVITE																																									
180 Alerting	←	← 180 Ringing																																									
		No reply timer expires																																									
181 Call is Being Forwarded	←																																										
		→ CANCEL/BYE																																									
		← 200 OK CANCEL/BYE																																									
		← 487 Request Terminated																																									
		→ ACK																																									
			→ INVITE																																								

TSS Netw/ASNotification/Originating user	TP CDIV_N02_015	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4																																																												
Test purpose <i>Communication forwarding using CFNR with applying diversion condition; originating user is notified.</i>																																																															
<p>When Communication Diversion occurs (served user does not respond) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, with a Privacy header set to "history", cause = 408, index = 1.1 <p>The initial communication to the served user is terminated with a CANCEL or a BYE request with a Reason header with protocol set to SIP and the cause set to 408.</p>																																																															
Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = no</i> <i>Served user allows the presentation of his/her URI to originating user in diversion notification = yes</i>																																																															
SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3?Privacy=history;cause=408>;index=1.1 CANCEL/BYE: Reason: SIP; cause=408 NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".																																																															
Comments: <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;"></th> <th style="width: 10%;"></th> <th style="width: 20%; text-align: center;">AS</th> <th style="width: 10%;"></th> <th style="width: 20%; text-align: center;">SIP#2</th> <th style="width: 10%; text-align: center;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td></td> <td style="text-align: center;">→ INVITE</td> <td></td> </tr> <tr> <td>180 Alerting</td> <td style="text-align: center;">←</td> <td></td> <td></td> <td style="text-align: center;">← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">No reply timer expires</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">→ CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">← 200 OK CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">← 487 Request Terminated</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>						AS		SIP#2	SIP#3	INVITE	→			→ INVITE		180 Alerting	←			← 180 Ringing						No reply timer expires		181 Call is Being Forwarded	←									→ CANCEL/BYE						← 200 OK CANCEL/BYE						← 487 Request Terminated						→ ACK							→ INVITE
		AS		SIP#2	SIP#3																																																										
INVITE	→			→ INVITE																																																											
180 Alerting	←			← 180 Ringing																																																											
				No reply timer expires																																																											
181 Call is Being Forwarded	←																																																														
				→ CANCEL/BYE																																																											
				← 200 OK CANCEL/BYE																																																											
				← 487 Request Terminated																																																											
				→ ACK																																																											
					→ INVITE																																																										

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_016	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3
Test purpose <i>Communication forwarding using CD (immediate response); originating user is not notified.</i>			
When Communication Diversion occurs (served user deflects call immediately) and if the notification procedures of the originating user is supported then no 181 (Call Is Being Forwarded) response shall be sent towards the originating user if the served users subscription option is set to: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = no.			
Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = no			
SIP header values:			
Comments:			
SIP#1 INVITE	→	AS	SIP#2 → INVITE ← 302 Moved Temporarily → ACK
			SIP#3 → INVITE

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_017	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3
Test purpose <i>Communication forwarding using CD (immediate response); originating user is notified.</i>			
When Communication Diversion occurs (served user deflects call immediately) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 480, index = 1.1			
Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = yes Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = yes			
SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause=480>;index=1.1			
NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".			
Comments:			
SIP#1 INVITE	→	AS	SIP#2 → INVITE ← 302 Moved Temporarily → ACK
181 Call is Being Forwarded	←		SIP#3 → INVITE

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_018	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4												
<p>Test purpose Communication forwarding using CD (immediate response); originating user is notified.</p> <p>When Communication Diversion occurs (served user deflects call immediately) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = 480, index = 1.1 															
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = no Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = no OR Served user has subscribed to TIR in permanent mode</p>															
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3?Privacy=history ;cause=480>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>															
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE ← 302 Moved Temporarily → ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 302 Moved Temporarily → ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3												
INVITE	→	→ INVITE ← 302 Moved Temporarily → ACK													
181 Call is Being Forwarded	←		→ INVITE												

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_019	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4												
<p>Test purpose Communication forwarding using CD (immediate response); originating user is notified.</p> <p>When Communication Diversion occurs (served user deflects call immediately) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = 480, index = 1.1 															
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = yes Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = no OR Served user has subscribed to TIR in permanent mode</p>															
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3 ;cause=480>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>															
<p>Comments:</p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE ← 302 Moved Temporarily → ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 302 Moved Temporarily → ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3												
INVITE	→	→ INVITE ← 302 Moved Temporarily → ACK													
181 Call is Being Forwarded	←		→ INVITE												

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_020	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4																				
<p>Test purpose Communication forwarding using CD (immediate response); originating user is notified.</p> <p>When Communication Diversion occurs (served user deflects call immediately) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = 480, index = 1.1 																							
<p>Subscription options: Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = no Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = yes</p>																							
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3?Privacy=history ;cause=480>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																							
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">SIP#1</td> <td style="width: 30%; text-align: center;">AS</td> <td style="width: 30%; text-align: center;">SIP#2</td> <td style="width: 10%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE				← 302 Moved Temporarily				→ ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3																				
INVITE	→	→ INVITE																					
		← 302 Moved Temporarily																					
		→ ACK																					
181 Call is Being Forwarded	←		→ INVITE																				

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_021	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3																								
<p>Test purpose Communication forwarding using CD during alerting; originating user is not notified.</p> <p>When Communication Diversion occurs (served user deflects call during alerting) and if the notification procedures of the originating user is supported then no 181 (Call Is Being Forwarded) response shall be sent towards the originating user if the served users subscription option is set to: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = no.</p>																											
<p>Subscription options: Originating user receives notification that his communication has been diverted (forwarded or deflected) = no</p>																											
<p>SIP header values:</p>																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">SIP#1</td> <td style="width: 30%; text-align: center;">AS</td> <td style="width: 30%; text-align: center;">SIP#2</td> <td style="width: 10%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				← 302 Moved Temporarily				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																								
INVITE	→	→ INVITE																									
180 Ringing	←	← 180 Ringing																									
		← 302 Moved Temporarily																									
		→ ACK																									
			→ INVITE																								

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_022	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3																								
<p>Test purpose <i>Communication forwarding using CD during alerting; originating user is notified.</i></p> <p>When Communication Diversion occurs (served user deflects call during alerting) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 487, index = 1.1 																											
<p>Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = yes</i> <i>Served user allows the presentation of his/her URI to originating user in diversion notification = yes</i></p>																											
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause=487>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td>→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				← 302 Moved Temporarily				→ ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3																								
INVITE	→	→ INVITE																									
180 Ringing	←	← 180 Ringing																									
		← 302 Moved Temporarily																									
		→ ACK																									
181 Call is Being Forwarded	←		→ INVITE																								

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_023	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4																								
<p>Test purpose Communication forwarding using CD during alerting; originating user is notified.</p> <p>When Communication Diversion occurs (served user deflects call during alerting) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = 487, index = 1.1 																											
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = no Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = no OR Served user has subscribed to TIR in permanent mode</p>																											
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3?Privacy=history;cause=487>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				← 302 Moved Temporarily				→ ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3																								
INVITE	→	→ INVITE																									
180 Ringing	←	← 180 Ringing																									
		← 302 Moved Temporarily																									
		→ ACK																									
181 Call is Being Forwarded	←		→ INVITE																								

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_024	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4																								
<p>Test purpose Communication forwarding using CD during alerting; originating user is notified.</p> <p>When Communication Diversion occurs (served user deflects call during alerting) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a Privacy header set to "id" and a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 487, index = 1.1 																											
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = yes Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = no OR Served user has subscribed to TIR in permanent mode</p>																											
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 Privacy: id History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3;cause=487>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: center;">SIP#2</th> <th style="text-align: center;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				← 302 Moved Temporarily				→ ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3																								
INVITE	→	→ INVITE																									
180 Ringing	←	← 180 Ringing																									
		← 302 Moved Temporarily																									
		→ ACK																									
181 Call is Being Forwarded	←		→ INVITE																								

TSS Netw/ASdivertingUser/NotOrigUser	TP CDIV_N02_025	Reference 4.5.2.6.4 [1]	Selection expression PICS 3/3 AND (PICS 3/5 OR PICS 4/3) AND PICS 3/4																								
<p>Test purpose Communication forwarding using CD during alerting; originating user is notified.</p> <p>When Communication Diversion occurs (served user deflects call during alerting) and if the notification procedures of the originating user is supported then a 181 (Call Is Being Forwarded) response shall be sent towards the originating user containing</p> <ul style="list-style-type: none"> a P-Asserted-Identity header with the URI of the served user and a History-Info header including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user with a Privacy header set to "history", cause = 487, index = 1.1 																											
<p>Subscription options: <i>Originating</i> user receives notification that his communication has been diverted (forwarded or deflected) = yes Served user allows the presentation of diverted to URI to <i>originating</i> user in diversion notification = no Served user allows the presentation of his/her URI to <i>originating</i> user in diversion notification = yes OR Served user has subscribed to TIR in permanent mode</p>																											
<p>SIP header values: 181 Call is Being Forwarded: P-Asserted-Identity: SIP#2 History-Info: <sip:SIP#>;index=1, <sip:SIP#3?Privacy=history;cause=487>;index=1.1</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: center;">SIP#2</th> <th style="text-align: right;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td>181 Call is Being Forwarded</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				← 302 Moved Temporarily				→ ACK		181 Call is Being Forwarded	←		→ INVITE
SIP#1	AS	SIP#2	SIP#3																								
INVITE	→	→ INVITE																									
180 Ringing	←	← 180 Ringing																									
		← 302 Moved Temporarily																									
		→ ACK																									
181 Call is Being Forwarded	←		→ INVITE																								

5.2.1.2.2 Diverted-to user

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_001	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression NOT PICS 4/1 AND PICS 3/6
Test purpose <i>Communication Forwarding using CFU.</i>			
The served user subscribes to the CFU service. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".			
Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "302" in the Request URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 302, index = 1.1.			
SIP header values: INVITE: sip:SIP#3@ example.com; cause = 302 SIP/2.0 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause=302>;index=1.1			
Comments:			
SIP#1	AS	SIP#2	SIP#3
INVITE	→		→ INVITE

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_002	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression NOT PICS 4/1 AND PICS 3/6
Test purpose <i>Communication Forwarding using CFB NDUB.</i>			
The served user subscribes to the CFB service and is in NDUB condition. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".			
Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which is NDUB not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "486" in the Request URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 486, index = 1.1.			
SIP header values: INVITE: sip:SIP#3@ example.com; cause = 486 SIP/2.0 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause=486>;index=1.1			
NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".			
Comments:			
SIP#1	AS	SIP#2	SIP#3
INVITE	→		→ INVITE

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_003	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression NOT PICS 4/1 AND PICS 3/6								
Test purpose <i>Communication Forwarding using CFNL.</i>											
<p>The served user subscribes to the CFNL service and has not logged in. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".</p>											
<p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which is not logged in not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "404" in the Request URI and containing a History-Info header</p> <ul style="list-style-type: none"> including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 404, index = 1.1. 											
SIP header values: INVITE: sip:SIP#3@ example.com; cause = 404 SIP/2.0 History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause=404>;index=1.1											
Comments: <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td style="text-align: center;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→		→ INVITE
SIP#1	AS	SIP#2	SIP#3								
INVITE	→		→ INVITE								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_004	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression NOT PICS 4/1 AND PICS 3/6								
Test purpose <i>Communication Forwarding using CFB UDUB.</i>											
<p>The served user subscribes to the CFB service and is in UDUB condition. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".</p>											
<p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which is UDUB not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "486" in the Request URI and containing a History-Info header</p> <ul style="list-style-type: none"> including a first entry with the hi-targeted-to-URI of the served user and a Reason header indicating cause 486, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 486, index = 1.1. 											
SIP header values: INVITE: sip:SIP#3@ example.com; cause = 486 SIP/2.0 History-Info: <sip:SIP#2?Reason=SIP%3Bcause%3D486>;index=1, <sip:SIP#3; cause=486>;index=1.1											
NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".											
Comments: <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→ INVITE ← 486 Busy Here → ACK</td> <td style="text-align: center;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 486 Busy Here → ACK	→ INVITE
SIP#1	AS	SIP#2	SIP#3								
INVITE	→	→ INVITE ← 486 Busy Here → ACK	→ INVITE								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_005	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression NOT PICS 4/1 AND PICS 3/6																																				
<p>Test purpose <i>Communication Forwarding using CFNR.</i></p> <p>The served user subscribes to the CFNR and does not reply. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which does not reply not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "408" in the Request URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 408, index = 1.1.</p> <p>The initial communication to the served user is terminated with a CANCEL or a BYE request with a Reason header with protocol set to SIP and the cause set to 408.</p>																																							
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 408 SIP/2.0 History-Info: <sip:SIP#2;index=1, <sip:SIP#3; cause=408>;index=1.1 CANCEL/BYE: Reason: SIP; cause=408</p>																																							
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>No reply timer expires</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 200 OK CANCEL/BYE</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 487 Request Terminated</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				No reply timer expires				→ CANCEL/BYE				← 200 OK CANCEL/BYE				← 487 Request Terminated				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																																				
INVITE	→	→ INVITE																																					
180 Ringing	←	← 180 Ringing																																					
		No reply timer expires																																					
		→ CANCEL/BYE																																					
		← 200 OK CANCEL/BYE																																					
		← 487 Request Terminated																																					
		→ ACK																																					
			→ INVITE																																				

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_006	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1], 4.3.3.1.2 [4]	Selection expression NOT PICS 4/1 AND PICS 3/6																				
<p>Test purpose <i>Communication Forwarding using CD (immediate response),</i></p> <p>The served user subscribes to the CD service and immediately diverts the communication. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which immediately diverts the communication not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "480" in the Request URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user and a Reason header indicating cause 302, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 480, index = 1.1.</p>																							
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 480 SIP/2.0 History-Info: <sip:SIP#2?Reason=SIP%3Bcause%3D302>;index=1, <sip:SIP#3; cause=480>;index=1.1</p>																							
<p>Comments:</p> <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">AS</th> <th style="text-align: left;">SIP#2</th> <th style="text-align: left;">SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE				← 302 Moved Temporarily				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																				
INVITE	→	→ INVITE																					
		← 302 Moved Temporarily																					
		→ ACK																					
			→ INVITE																				

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_007	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1], 4.3.3.1.2 [4]	Selection expression NOT PICS 4/1 AND PICS 3/6																								
<p>Test purpose <i>Communication Forwarding using CD during alerting.</i></p> <p>The served user subscribes to the CD service and diverts the communication during alerting. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which diverts the communication during alerting not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "487" in the Request URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user and a Reason header indicating cause 302, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 487, index = 1.1.</p>																											
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 487 SIP/2.0 History-Info: <sip:SIP#2?Reason=SIP%3Bcause%3D302>;index=1, <sip:SIP#3; cause=487>;index=1.1</p>																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				← 302 Moved Temporarily				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																								
INVITE	→	→ INVITE																									
180 Ringing	←	← 180 Ringing																									
		← 302 Moved Temporarily																									
		→ ACK																									
			→ INVITE																								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_008	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression NOT PICS 4/1 AND PICS 3/6								
<p>Test purpose <i>Communication Forwarding using CFNRc.</i></p> <p>The served user subscribes to the CFNRc service and is not reachable. The served user does not subscribe to OIR in permanent mode and the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "yes".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which is not reachable not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "503" in the Request URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 503, index = 1.1.</p> <p>NOTE: According to TS 124 604 [1], 4.5.2.6.2.2.b: "If the diversion is based on a SIP response from the served user, a Reason header in escaped form shall be included in accordance with RFC 4244 [4]".</p>											
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 503 SIP/2.0 History-Info: <sip:SIP#2;index=1, <sip:SIP#3; cause=503>;index=1.1</p>											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→		→ INVITE
SIP#1	AS	SIP#2	SIP#3								
INVITE	→		→ INVITE								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_009	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression PICS 4/1 AND PICS 3/6								
<p>Test purpose <i>Communication Forwarding using CFU.</i></p> <p>The served user subscribes to the CFU service. The served user subscribes to OIR in permanent mode or the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "no".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "302" in the Request URI, indicating in the To header the diverted-to URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 302, index = 1.1.</p>											
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 302 SIP/2.0 To: <sip:SIP#3> History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3; cause=302>;index=1.1</p>											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td style="text-align: center;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→		→ INVITE
SIP#1	AS	SIP#2	SIP#3								
INVITE	→		→ INVITE								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_010	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression PICS 4/1 AND PICS 3/6								
<p>Test purpose <i>Communication Forwarding using CFB NDUB.</i></p> <p>The served user subscribes to the CFB service and is in NDUB condition. The served user subscribes to OIR in permanent mode or the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "no".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which is NDUB not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "486" in the Request URI, indicating in the To header the diverted-to URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 486, index = 1.1.</p>											
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 486 SIP/2.0 To: <sip:SIP#3> History-Info: <sip:SIP#2?Privacy=history>;index=1, <sip:SIP#3; cause=486>;index=1.1</p>											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td style="text-align: center;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→		→ INVITE
SIP#1	AS	SIP#2	SIP#3								
INVITE	→		→ INVITE								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_011	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression PICS 4/1 AND PICS 3/6								
<p>Test purpose <i>Communication Forwarding using CFNL.</i></p> <p>The served user subscribes to the CFNL service and has not logged in. The served user subscribes to OIR in permanent mode or the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "no".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which is not logged in not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "404" in the Request URI, indicating in the To header the diverted-to URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 404, index = 1.1.</p>											
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 404 SIP/2.0 To: <sip:SIP#3> History-Info: <sip:SIP#2;privacy=history>;index=1, <sip:SIP#3; cause=404>;index=1.1</p>											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> <td style="text-align: center;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→		→ INVITE
SIP#1	AS	SIP#2	SIP#3								
INVITE	→		→ INVITE								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_012	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression PICS 4/1 AND PICS 3/6								
<p>Test purpose <i>Communication Forwarding using CFB UDUB.</i></p> <p>The served user subscribes to the CFB service and is in UDUB condition. The served user subscribes to OIR in permanent mode or the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "no".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which is UDUB not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "486" in the Request URI, indicating in the To header the diverted-to URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history" and a Reason header indicating cause 486, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 486, index = 1.1.</p>											
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 486 SIP/2.0 To: <sip:SIP#3> History-Info: <sip:SIP#2?Privacy=history&Reason=SIP%3Bcause%3D486>;index=1, <sip:SIP#3; cause=486>;index=1.1</p>											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→ INVITE ← 486 Busy Here → ACK</td> <td style="text-align: center;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE ← 486 Busy Here → ACK	→ INVITE
SIP#1	AS	SIP#2	SIP#3								
INVITE	→	→ INVITE ← 486 Busy Here → ACK	→ INVITE								

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_013	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1]	Selection expression PICS 4/1 AND PICS 3/6																																												
<p>Test purpose <i>Communication Forwarding using CFNR.</i></p> <p>The served user subscribes to the CFNR and does not reply. The served user subscribes to OIR in permanent mode or the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "no".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which does not reply not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "408" in the Request URI, indicating in the To header the diverted-to URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 408, index = 1.1. The initial communication to the served user is terminated with a CANCEL or a BYE request with a Reason header with protocol set to SIP and the cause set to 408.</p>																																															
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 408 SIP/2.0 To: <sip:SIP#3> History-Info: <sip:SIP#2;index=1, <sip:SIP#3; cause=408>;index=1.1 CANCEL/BYE: Reason: SIP; cause=408</p>																																															
<p>Comments:</p> <table border="0"> <thead> <tr> <th data-bbox="172 965 647 994">SIP#1</th> <th data-bbox="647 965 887 994">AS</th> <th data-bbox="887 965 1134 994">SIP#2</th> <th data-bbox="1134 965 1418 994">SIP#3</th> </tr> </thead> <tbody> <tr> <td data-bbox="172 994 647 1023">INVITE</td> <td data-bbox="647 994 887 1023">→</td> <td data-bbox="887 994 1134 1023">→</td> <td data-bbox="1134 994 1418 1023">INVITE</td> </tr> <tr> <td data-bbox="172 1023 647 1052">180 Ringing</td> <td data-bbox="647 1023 887 1052">←</td> <td data-bbox="887 1023 1134 1052">←</td> <td data-bbox="1134 1023 1418 1052">180 Ringing</td> </tr> <tr> <td colspan="4" data-bbox="172 1052 1418 1081" style="text-align: center;">No reply timer expires</td> </tr> <tr> <td colspan="2"></td> <td data-bbox="887 1081 1134 1111">→</td> <td data-bbox="1134 1081 1418 1111">CANCEL/BYE</td> </tr> <tr> <td colspan="2"></td> <td data-bbox="887 1111 1134 1140">←</td> <td data-bbox="1134 1111 1418 1140">200 OK</td> </tr> <tr> <td colspan="2"></td> <td colspan="2" data-bbox="887 1140 1418 1169" style="text-align: center;">CANCEL/BYE</td> </tr> <tr> <td colspan="2"></td> <td data-bbox="887 1169 1134 1198">←</td> <td data-bbox="1134 1169 1418 1198">487 Request</td> </tr> <tr> <td colspan="2"></td> <td colspan="2" data-bbox="887 1198 1418 1227" style="text-align: center;">Terminated (Note)</td> </tr> <tr> <td colspan="2"></td> <td data-bbox="887 1227 1134 1256">→</td> <td data-bbox="1134 1227 1418 1256">ACK</td> </tr> <tr> <td colspan="3"></td> <td data-bbox="1134 1256 1418 1296" style="text-align: right;">→ INVITE</td> </tr> </tbody> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→	INVITE	180 Ringing	←	←	180 Ringing	No reply timer expires						→	CANCEL/BYE			←	200 OK			CANCEL/BYE				←	487 Request			Terminated (Note)				→	ACK				→ INVITE
SIP#1	AS	SIP#2	SIP#3																																												
INVITE	→	→	INVITE																																												
180 Ringing	←	←	180 Ringing																																												
No reply timer expires																																															
		→	CANCEL/BYE																																												
		←	200 OK																																												
		CANCEL/BYE																																													
		←	487 Request																																												
		Terminated (Note)																																													
		→	ACK																																												
			→ INVITE																																												
<p>NOTE: The 487 Request Terminated will only be sent, if a CANCEL request had been used to terminate the initial communication.</p>																																															

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_014	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1], 4.3.3.1.2 [4]	Selection expression PICS 4/1 AND PICS 3/6																				
<p>Test purpose <i>Communication Forwarding using CD (immediate response).</i></p> <p>The served user subscribes to the CD service and immediately diverts the communication. The served user subscribes to OIR in permanent mode or the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "no".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which immediately diverts the communication not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "480" in the Request URI, indicating in the To header the diverted-to URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history", and a Reason header indicating cause 302, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 480, index = 1.1.</p>																							
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 480 SIP/2.0 To: <sip:SIP#3> History-Info: <sip:SIP#2?Privacy=history&Reason=SIP%3Bcause%3D302>;index=1, <sip:SIP#3; cause=480>;index=1.1</p>																							
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE				← 302 Moved Temporarily				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																				
INVITE	→	→ INVITE																					
		← 302 Moved Temporarily																					
		→ ACK																					
			→ INVITE																				

TSS Netw/ASdivertingUser/NotTermUser	TP CDIV_N03_015	Reference 4.5.2.6.2.2, 4.5.2.6.2.4 [1], 4.3.3.1.2 [4]	Selection expression PICS 4/1 AND PICS 3/6																								
<p>Test purpose <i>Communication Forwarding using CD during alerting.</i></p> <p>The served user subscribes to the CD service and diverts the communication during alerting. The served user subscribes to OIR in permanent mode or the subscription option "Served user allows the presentation of his/her URI to diverted-to user" is set to value "no".</p> <p>Ensure that the IUT, on receipt of an INVITE request (diversion status DIV_VA, see Table 3) for the served user which diverts the communication during alerting not including a History-Info header, applies communication diversion and forwards the INVITE request towards the diverted-to user containing the cause value "487" in the Request URI, indicating in the To header the diverted-to URI and containing a History-Info header including a first entry with the hi-targeted-to-URI of the served user with a Privacy header set to "history" and a Reason header indicating cause 302, index = 1 and including a second entry with the hi-targeted-to-URI of the diverted-to user, cause = 487, index = 1.1.</p>																											
<p>SIP header values: INVITE: sip:SIP#3@ example.com; cause = 487 SIP/2.0 To: <sip:SIP#3> History-Info: <sip:SIP#2?Privacy=history&Reason=SIP%3Bcause%3D302>;index=1, <sip:SIP#3; cause=487>;index=1.1</p>																											
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 25%;">SIP#1</td> <td style="width: 25%; text-align: center;">AS</td> <td style="width: 25%; text-align: center;">SIP#2</td> <td style="width: 25%; text-align: center;">SIP#3</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td>← 302 Moved Temporarily</td> <td></td> </tr> <tr> <td></td> <td></td> <td>→ ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: right;">→ INVITE</td> </tr> </table>				SIP#1	AS	SIP#2	SIP#3	INVITE	→	→ INVITE		180 Ringing	←	← 180 Ringing				← 302 Moved Temporarily				→ ACK					→ INVITE
SIP#1	AS	SIP#2	SIP#3																								
INVITE	→	→ INVITE																									
180 Ringing	←	← 180 Ringing																									
		← 302 Moved Temporarily																									
		→ ACK																									
			→ INVITE																								

5.2.1.2.3 Diverting user

TSS Netw/ASdivertingUser/NotDivUser	TP CDIV_N04_001	Reference 4.5.2.6.5.0 [1]	Selection expression PICS 3/1
Test purpose <i>Communication forwarding using CDIV_VA; Indication of communication diversion to the diverting user using the MESSAGE request.</i>			
Ensure that when call diversion of type CDIV_VA is activated and when the diverting user has registered, the AS sends a MESSAGE request to the diverting user including the information where the call is forwarded to.			
Subscription options: Served user receives notification that a communication has been forwarded (indication of communication diversion to the diverting user) = yes			
SIP header values: MESSAGE (text/plain)			
Comments:			
SIP#1	SUT	SIP#2	SIP#3
Diverting user registers			
MESSAGE → MESSAGE			
200 OK MESSAGE ← 200 OK MESSAGE			
NOTE 1: In case of CFNRc and CFNL the served user needs to become reachable/log in before the MESSAGE request can be delivered.			
NOTE 2: The CDIV indication timer may need to expire before the MESSAGE request is delivered.			

TSS Netw/ASdivertingUser/NotDivUser	TP CDIV_N04_002	Reference 4.5.2.6.5.0 [1]	Selection expression PICS 3/2
Test purpose <i>Communication forwarding using CDIV_VA; Indication of communication diversion to the diverting user using the MESSAGE request when a new outgoing communication is requested.</i>			
Ensure that when communication diversion service CDIV_VA is activated and the diverting user has initiated a new outgoing communication, the AS will send a MESSAGE request containing the forwarded-to address of the activated communication to the diverting user.			
Subscription options: Served user receives reminder indication on outgoing communication that CDIV is currently activated = yes			
SIP header values: MESSAGE (text/plain)			
Comments:			
SIP#1	SUT	SIP#2	SIP#3
Communication diversion is activated			
← INVITE			
MESSAGE → MESSAGE			
200 OK MESSAGE ← 200 OK MESSAGE			

TSS Netw/ASNotification	TP CDIV_N04_003	Reference 4.5.2.6.5 [1]	Selection expression PICS 2/3 AND PICS 3/1																																
<p>Test purpose Communication forwarding using CDIV_VA; Communication Diversion Notification applies.</p> <p>Ensure that when the diverting user has subscribed the Communication Diversion Notification service and call diversion of type CDIV_VA occurred, the served user receives a NOTIFY request containing the information regarding the current communication diversion.</p>																																			
<p>Subscription options: Served user receives notification that a communication has been forwarded (indication of communication diversion to the diverting user) = yes</p>																																			
<p>SIP header values:</p> <p>SUBSCRIBE: Event:comm-div-info application/comm-div-info+xml <comm-div-info> <comm-div-sub-info > <comm-div-selection-criteria> <originating-user-selection-criteria>SIP#1 <diverting-user-selection-criteria>SIP#2 <diverted-to-user-selection-criteria>SIP#3 <diversion-time-selection-criteria >(Date-time) <diversion-reason-selection-criteria >DIV_VAL <comm-div-ntfy-trigger-criteria> <notification-time-selection-criteria>(Date/Time range) </comm-div-info></p> <p>NOTIFY: Event:comm-div-info application/comm-div-info+xml <comm-div-info> <comm-div-ntfy-info> <originating-user-info>SIP#1 <diverting-user-info>SIP#2 <diverted-to-user-info>SIP#3 <diversion-time-info> (time range <diversion-reason-info>DIV_VAL <diversion-rule-info-type> <diversion-rule> (any text) </comm-div-info></p>																																			
<p>Comments:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">SIP#1</td> <td style="width: 20%; text-align: center;">SUT</td> <td style="width: 20%; text-align: center;">SIP#2 (served user)</td> <td style="width: 30%; text-align: center;">SIP#3</td> </tr> <tr> <td></td> <td style="text-align: center;">SUBSCRIBE</td> <td style="text-align: center;">← SUBSCRIBE</td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">200 OK SUBSCRIBE</td> <td style="text-align: center;">→ 200 OK SUBSCRIBE</td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">NOTIFY</td> <td style="text-align: center;">→ NOTIFY</td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">200 OK NOTIFY</td> <td style="text-align: center;">← 200 OK NOTIFY</td> <td></td> </tr> <tr> <td>INVITE 1</td> <td style="text-align: center;">→</td> <td colspan="2" style="text-align: center;">Communication diversion occurs</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">NOTIFY</td> <td style="text-align: center;">→ NOTIFY</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">200 OK NOTIFY</td> <td style="text-align: center;">← 200 OK NOTIFY</td> </tr> </table>				SIP#1	SUT	SIP#2 (served user)	SIP#3		SUBSCRIBE	← SUBSCRIBE			200 OK SUBSCRIBE	→ 200 OK SUBSCRIBE			NOTIFY	→ NOTIFY			200 OK NOTIFY	← 200 OK NOTIFY		INVITE 1	→	Communication diversion occurs				NOTIFY	→ NOTIFY			200 OK NOTIFY	← 200 OK NOTIFY
SIP#1	SUT	SIP#2 (served user)	SIP#3																																
	SUBSCRIBE	← SUBSCRIBE																																	
	200 OK SUBSCRIBE	→ 200 OK SUBSCRIBE																																	
	NOTIFY	→ NOTIFY																																	
	200 OK NOTIFY	← 200 OK NOTIFY																																	
INVITE 1	→	Communication diversion occurs																																	
		NOTIFY	→ NOTIFY																																
		200 OK NOTIFY	← 200 OK NOTIFY																																
<p>NOTE 1: In case of CFNRc and CFNL the served user needs to become reachable/log in before the MESSAGE request can be delivered.</p>																																			
<p>NOTE 2: The CDIV indication timer may need to expire before the MESSAGE request is delivered.</p>																																			

Table 4: Communication diversion in use, used in CDIV_N03_001-003

CDIV_VA	Communication diversion	Diversion Reason DIV_VAL
1	CFU	302
2	CFB	486
3	CFNRy	408
4	CFNRc	503
r	CFNL	404

5.2.2 Actions at the AS of the diverted to User

TSS Netw/Netw/ASdiverted-to	TP CDIV_N05_001	Reference 4.5.2.7/ [1]	Selection expression
Test purpose <i>Previous stored History-Info header returned in a 180 Ringing.</i>			
The SUT in the Idle state, receives an INVITE message for the diverted-to-user without TIR with Cause Value in the last History Index; cause-param =CAUSE_VAL defined in Table 5, the History-Info header is stored. When the SUT receives a 180 Ringing, the stored History-Info header is covered in this response without escaped Privacy header in the last index if the response does not contain a History-Info header.			
SIP header values:			
INVITE: History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x			
180 Ringing History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x			
Comments:			
SIP#1	SUT	SIP#2	
INVITE 1	→	→ INVITE 2	
180 Ringing	←	← 180 Ringing	
200 OK (INVITE)	←	← 200 OK (INVITE)	
ACK	→	→ ACK	
BYE	→	→ BYE	
200 OK (BYE)	←	← 200 OK (BYE)	

TSS Netw/ASdiverted-to	TP CDIV_N05_002	Reference 4.5.2.7/ [1]	Selection expression
Test purpose <i>Previous stored History-Info header returned in a 181 Being Forwarded.</i>			
The SUT in the Idle state, receives an INVITE message for the diverted-to-user without TIR with Cause Value in the last History Index; cause-param =CAUSE_VAL defined in Table 5, the History-Info header is stored. When the SUT receives a 181 Being Forwarded, the stored History-Info header is covered in this response without escaped Privacy header in the last index if the response does not contain a History-Info header.			
SIP header values: SIP header values:			
INVITE: History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x			
181 Being Forwarded History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x			
Comments:			
SIP#1	SUT	SIP#2	
INVITE 1	→	→ INVITE 2	
181 Call is Being Forwarded	←	← 181 Call is Being Forwarded	
180 Ringing	←	← 180 Ringing	
200 OK (INVITE)	←	← 200 OK (INVITE)	
ACK	→	→ ACK	
BYE	→	→ BYE	
200 OK (BYE)	←	← 200 OK (BYE)	

TSS Netw/ASdiverted-to	TP CDIV_N05_003	Reference 4.5.2.7/ [1]	Selection expression
Test purpose <i>Previous stored History-Info header returned in a 200 OK response.</i>			
The SUT in the Idle state, receives an INVITE message for the diverted-to-user without TIR with Cause Value in the last History Index; cause-param = CAUSE_VAL defined in Table 5, the History-Info header is stored. When the SUT receives a 200 OK INVITE, the stored History-Info header is covered in this response without escaped Privacy header in the last index if the response does not contain a History-Info header.			
SIP header values: SIP header values:			
INVITE: History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x			
200 OK INVITEg History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x			
Comments:			
SIP#1	SUT		SIP#2
INVITE 1	→		→ INVITE 2
180 Ringing	←		← 180 Ringing
200 OK (INVITE)	←		← 200 OK (INVITE)
ACK	→		→ ACK
BYE	→		→ BYE
200 OK (BYE)	←		← 200 OK (BYE)

TSS Netw/ASdiverted-to	TP CDIV_N05_004	Reference 4.5.6.2.7/ [1], 4.6.3/ [1]	Selection expression PICS 4/3
Test purpose <i>Diverted to user is subscribed to the TIR service.</i>			
The SUT in the Idle state, receives an INVITE message for the diverted-to-user with TIR with Cause Value in the last History Index; cause-param = CAUSE_VAL defined in Table5, the History-Info header is stored. When the SUT receives a 180 Ringing, the stored History-Info header is covered in this response with escaped Privacy=history header in the last index if the response does not contain a History-Info header.			
SIP header values: SIP header values:			
INVITE: History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x			
180 Ringing History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL; Privacy=history, index=1.x			
Comments:			
SIP#1	SUT		SIP#2
INVITE 1	→		→ INVITE 2
180 Ringing	←		← 180 Ringing
200 OK (INVITE)	←		← 200 OK (INVITE)
ACK	→		→ ACK
BYE	→		→ BYE
200 OK (BYE)	←		← 200 OK (BYE)

TSS Netw/ASdiverted-to	TP CDIV_N05_005	Reference 4,5,6,2,7/ [1], 4.6.3/ [1]	Selection expression PICS 4/3
Test purpose <i>Diverted to user is subscribed to the TIR service.</i>			
The SUT in the Idle state, receives an INVITE message for the diverted-to-user with TIR with Cause Value in the last History Index; cause-param = CAUSE_VAL defined in Table 5. the History-Info header is stored. When the SUT receives a 181 Being Forwarded, the stored History-Info header is covered in this response with escaped Privacy=history header in the last index if the response does not contain a History-Info header.			
SIP header values: SIP header values: INVITE: History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x 181 Being Forwarded History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL; Privacy=history, index=1.x			
Comments:			
SIP#1	SUT		SIP#2
INVITE 1	→		→ INVITE 2
181 Call is Being Forwarded	←		← 181 Call is Being Forwarded
180 Ringing	←		← 180 Ringing
200 OK (INVITE)	←		← 200 OK (INVITE)
ACK	→		→ ACK
BYE	→		→ BYE
200 OK (BYE)	←		← 200 OK (BYE)

TSS Netw/ASdiverted-to	TP CDIV_N05_006	Reference 4,5,6,2,7/ [1] 4.6.3/ [1]	Selection expression PICS 4/3
Test purpose <i>Diverted to user is subscribed to the TIR service.</i>			
The SUT in the Idle state, receives an INVITE message for the diverted-to-user with TIR with Cause Value in the last History Index; cause-param = CAUSE_VAL defined in Table 5, the History-Info header is stored. When the SUT receives a 200 OK INVITE, the stored History-Info header is covered in this response with escaped Privacy=history header in the last index if the response does not contain a History-Info header.			
SIP header values: SIP header values: INVITE: History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL, index=1.x 200 OK INVITE History-Info header: hi-targeted-to-uri of diverted-to user; cause=CAUSE_VAL; Privacy=history, index=1.x			
Comments:			
SIP#1	SUT		SIP#2
INVITE 1	→		→ INVITE 2
180 Ringing	←		← 180 Ringing
200 OK (INVITE)	←		← 200 OK (INVITE)
ACK	→		→ ACK
BYE	→		→ BYE
200 OK (BYE)	←		← 200 OK (BYE)

Table 5

Cause Value in History Index; cause-param = "cause" EQUAL CAUSE_VAL	Cause value	Call diversion information	Redirecting Reason
	404		Unknown
	302		Unconditional
	486		User busy
	408		No reply
	480		Deflection immediate
	503		Mobile subscriber not reachable
	487		Deflection during alerting
	503		Subscriber not reachable

5.2.3 Actions at the user equipment

5.2.3.1 Actions at the originating UE

TSS OrigUE	TP CDIV_U01_001	Reference 4.5.2.1	Selection expression PICS 5/1
Test purpose <i>Communication diversion information received in a 181 Call is Being Forwarded.</i>			
Ensure that an User Equipment is able to receive a 181 Call is Being Forwarded and the 181 Response contains a History-Info header. Ensure that the information contained in the History-Info header (identities, reason of CDIV) is displayed at the device. The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 6.			
SIP header values: SIP header values: INVITE Supported: histinfo			
181 Call is Being Forwarded History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause= CAUSE_VAL>;index=1.1			
Comments:			
UE		Test Equipment	
INVITE	→	→	INVITE
181 Call is Being Forwarded	←	←	181 Call is Being Forwarded
180 Ringing	←	←	180 Ringing
200 OK (INVITE)	←	←	200 OK (INVITE)
ACK	→	→	ACK
BYE	→	→	BYE
200 OK (BYE)	←	←	200 OK (BYE)

TSS OrigUE	TP CDIV_U01_002	Reference 4.5.2.1/ [1]	Selection expression PICS 5/2
Test purpose <i>Communication diversion information received in a 180 Ringing.</i>			
Ensure that an User Equipment is able to receive a 180 Ringing and the 180 Response contains a History-Info header. Ensure that the information contained in the History-Info header (identities, reason of CDIV) is displayed at the device. The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 6.			
SIP header values: SIP header values: INVITE Supported: histinfo			
180 Ringing History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause= CAUSE_VAL>;index=1.1			
Comments:		Test Equipment	
UE		Test Equipment	
INVITE	→	→	INVITE
181 Call is Being Forwarded	←	←	181 Call is Being Forwarded
180 Ringing	←	←	180 Ringing
200 OK (INVITE)	←	←	200 OK (INVITE)
ACK	→	→	ACK
BYE	→	→	BYE
200 OK (BYE)	←	←	200 OK (BYE)

TSS OrigUE	TP CDIV_U01_003	Reference 4.5.2.1/ [1]	Selection expression PICS 5/3
Test purpose <i>Communication diversion information received in a 200 OK INVITE.</i>			
Ensure that an User Equipment is able to receive a 200 OK INVITE and the 200 OK final Response contains a History-Info header. Ensure that the information contained in the History-Info header (identities, reason of CDIV) is displayed at the device. The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 6.			
SIP header values: SIP header values: INVITE Supported: histinfo			
200 OK (INVITE) History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause= CAUSE_VAL>;index=1.1			
Comments:			
UE		Test Equipment	
INVITE	→	→	INVITE
181 Call is Being Forwarded	←	←	181 Call is Being Forwarded
180 Ringing	←	←	180 Ringing
200 OK (INVITE)	←	←	200 OK (INVITE)
ACK	→	→	ACK
BYE	→	→	BYE
200 OK (BYE)	←	←	200 OK (BYE)

5.2.3.2 Action at the diverted to UE

TSS Diverted-toUE	TP CDIV_U02_001	Reference 4.5.2.15/ [1]	Selection expression PICS 5/4
Test purpose <i>Communication diversion information received in an INVITE request.</i>			
Ensure that an User Equipment is able to receive a INVITE request and the INVITE contains a History-Info header. Ensure that the information contained in the History-Info header (identities, reason of CDIV) is displayed at the device. The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 6.			
SIP header values: SIP header values: INVITE: History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause= CAUSE_VAL>;index=1.1			
Comments:		Test Equipment	
UE			Test Equipment
INVITE	←	←	INVITE
180 Ringing	→	→	180 Ringing
200 OK (INVITE)	→	→	200 OK (INVITE)
ACK	←	←	ACK
BYE	←	←	BYE
200 OK (BYE)	→	→	200 OK (BYE)

5.2.3.3 Actions at the diverting UE

TSS DivertingUE	TP CDIV_U02_001	Reference 4.5.2.6.4/ [1]	Selection expression PICS 5/7
Test purpose <i>Communication diversion using the MESSAGE request method.</i>			
Ensure that the User Equipment is able to receive a MESSAGE request containing the notification about a performed communication diversion by the network. The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 6.			
SIP header values: SIP header values: MESSAGE Content-Type: text/plain ... text (PIXIT) ...			
Comments:			
UE		Test Equipment	
MESSAGE	←	←	MESSAGE

TSS DivertingUE	TP CDIV_U02_002	Reference 4.5.2.6.5/ [1], 4.10/ [1]	Selection expression PICS 5/8
Test purpose <i>Communication diversion using the CDIVN service, subscription of the service.</i>			
Ensure that the User Equipment is able to subscribe the communication diversion notification service (CDIVN). A SUBSCRIBE request is sent. The Event header contains the package name "comm-div-info" and a MIME body containing a XML instance of "http://uri.etsi.org/ngn/params/xml/comm-div-info". The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 6.			
SIP header values: SIP header values: SUBSCRIBE: Event:comm-div-info application/comm-div-info+xml <comm-div-info> <comm-div-sub-info > <comm-div-selection-criteria> < originating-user-selection-criteria > <diverting-user-selection-criteria> <diverted-to-user-selection-criteria> < diversion-time-selection-criteria > < diversion-reason-selection-criteria > CAUSE_VAL <comm-div-ntfy-trigger-criteria> <notification-time-selection-criteria> </comm-div-info>			
NOTIFY: Event:comm-div-info			
Comments:			
UE		Test Equipment	
SUBSCRIBE	→	→	SUBSCRIBE
200 OK (SUBSCRIBE)	←	←	200 OK (SUBSCRIBE)
NOTIFY	←	←	NOTIFY
200 OK (NOTIFY)	→	→	200 OK (NOTIFY)

5.3 Interaction with other services

5.3.1 Terminating Identification Presentation (TIP)

TSS Interaction/TIP	TP CDIV_N06_001	Reference 4.6.2	Selection expression PICS 4/3																																																																													
Test purpose <i>The served user subscribes to the CDIV simulation service; the P-Asserted header is passed on unchanged.</i>																																																																																
Ensure that the communication is forwarded to the diverted to user if the served user is subscribed to the CDIV simulation service. Ensure that a P-Asserted-Identity and History header field received in the diverting AS is passed unmodified to the originating entity. The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 7.																																																																																
SIP header values: 180 Ringing: P-Asserted-Identity with the URI of the diverted-to user, Privacy is not "id" and not "header" History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause= CAUSE_VAL>;index=1.1 200 OK: P-Asserted-Identity with the URI of the diverted-to user, Privacy is not "id" and not "header" History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause= CAUSE_VAL ;index=1.1																																																																																
Comments: <table border="0"> <thead> <tr> <th>SIP#1</th> <th></th> <th>SUT</th> <th></th> <th>SIP#2 (served user)</th> <th></th> <th>SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td></td> <td></td> <td>→</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="7">Communication diversion is performed (CFU, CFB, CFNR, CD, CFNL, CFNRc)</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>→</td> <td></td> <td>→ INVITE</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>←</td> <td></td> <td>← 180 Ringing</td> </tr> <tr> <td>180 Ringing</td> <td></td> <td></td> <td>←</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>←</td> <td></td> <td>← 200 OK (INVITE)</td> </tr> <tr> <td>200 OK (INVITE)</td> <td></td> <td></td> <td>←</td> <td></td> <td></td> <td></td> </tr> <tr> <td>ACK</td> <td></td> <td></td> <td>→</td> <td></td> <td></td> <td>→ ACK</td> </tr> <tr> <td>BYE</td> <td></td> <td></td> <td>→</td> <td></td> <td></td> <td>→ BYE</td> </tr> <tr> <td>200 OK (BYE)</td> <td></td> <td></td> <td>←</td> <td></td> <td></td> <td>← 200 OK (BYE)</td> </tr> </tbody> </table>				SIP#1		SUT		SIP#2 (served user)		SIP#3	INVITE			→				Communication diversion is performed (CFU, CFB, CFNR, CD, CFNL, CFNRc)											→		→ INVITE					←		← 180 Ringing	180 Ringing			←								←		← 200 OK (INVITE)	200 OK (INVITE)			←				ACK			→			→ ACK	BYE			→			→ BYE	200 OK (BYE)			←			← 200 OK (BYE)
SIP#1		SUT		SIP#2 (served user)		SIP#3																																																																										
INVITE			→																																																																													
Communication diversion is performed (CFU, CFB, CFNR, CD, CFNL, CFNRc)																																																																																
				→		→ INVITE																																																																										
				←		← 180 Ringing																																																																										
180 Ringing			←																																																																													
				←		← 200 OK (INVITE)																																																																										
200 OK (INVITE)			←																																																																													
ACK			→			→ ACK																																																																										
BYE			→			→ BYE																																																																										
200 OK (BYE)			←			← 200 OK (BYE)																																																																										

Table 7

Cause Value in History Index; cause-param = "cause" EQUAL CAUSE_VAL	Cause value	Call diversion information	Redirecting Reason
	404		Unknown
	302		Unconditional
	486		User busy
	408		No reply
	480		Deflection immediate
	503		Mobile subscriber not reachable
	487		Deflection during alerting
	503		Subscriber not reachable

5.3.2 Terminating Identification Restriction (TIR)

TSS Interaction/TIR	TP CDIV_N07_001	Reference 4.6.3	Selection expression PICS 4/3 AND PICS 4/4																																																							
<p>Test purpose <i>The served user subscribes to the CDIV simulation service; the diverted-to URI is not sent to the originating user.</i></p> <p>Ensure that the communication is forwarded to the diverted to user if the served user is subscribed to the CDIV simulation service. A P-Asserted-Identity and History header field received in the diverting AS is passed unmodified to the originating entity. Ensure that if the served (diverting) user selects the option that the originating user is notified, but without the diverted-to number, then the AS shall not send the diverted-to user's identity when the communication is answered. The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 8.</p>																																																										
<p>Subscription options: <i>Originating user receives notification that his communication has been diverted (forwarded or deflected) = yes</i> <i>Served user allows the presentation of diverted to URI to originating user in diversion notification = no</i> TIR subscription: Originating user has the override category = no</p>																																																										
<p>SIP header values: 200 OK 1: P-Asserted-Identity with the URI of the diverted-to user History-Info: <sip:SIP#2>;index=1, <sip:SIP#3; cause=302>;index=1.1 200 OK 2: P-Asserted-Identity with the URI of the diverted-to user History-Info: <sip:SIP#2>;index=1</p>																																																										
<p>Comments:</p> <table border="1"> <thead> <tr> <th>SIP#1</th> <th></th> <th>SUT</th> <th>SIP#2 (served user)</th> <th>SIP#3</th> </tr> </thead> <tbody> <tr> <td>INVITE 1</td> <td>→</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="5">Communication diversion is performed (CFU, CFB, CFNR, CD, CFNL, CFNRc)</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>→ INVITE</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>← 180 Ringing</td> </tr> <tr> <td>180 Ringing</td> <td>←</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>← 200 OK 1 (INVITE)</td> </tr> <tr> <td>200 OK 2(INVITE)</td> <td>←</td> <td></td> <td></td> <td></td> </tr> <tr> <td>ACK</td> <td>→</td> <td></td> <td></td> <td>→ ACK</td> </tr> <tr> <td>BYE</td> <td>→</td> <td></td> <td></td> <td>→ BYE</td> </tr> <tr> <td>200 OK (BYE)</td> <td>←</td> <td></td> <td></td> <td>← 200 OK (BYE)</td> </tr> </tbody> </table>				SIP#1		SUT	SIP#2 (served user)	SIP#3	INVITE 1	→				Communication diversion is performed (CFU, CFB, CFNR, CD, CFNL, CFNRc)									→ INVITE					← 180 Ringing	180 Ringing	←								← 200 OK 1 (INVITE)	200 OK 2(INVITE)	←				ACK	→			→ ACK	BYE	→			→ BYE	200 OK (BYE)	←			← 200 OK (BYE)
SIP#1		SUT	SIP#2 (served user)	SIP#3																																																						
INVITE 1	→																																																									
Communication diversion is performed (CFU, CFB, CFNR, CD, CFNL, CFNRc)																																																										
				→ INVITE																																																						
				← 180 Ringing																																																						
180 Ringing	←																																																									
				← 200 OK 1 (INVITE)																																																						
200 OK 2(INVITE)	←																																																									
ACK	→			→ ACK																																																						
BYE	→			→ BYE																																																						
200 OK (BYE)	←			← 200 OK (BYE)																																																						

Table 8

Cause Value in History Index; cause-param = "cause" EQUAL CAUSE_VAL	Cause value	Call diversion information	Redirecting Reason
	404		Unknown
	302		Unconditional
	486		User busy
	408		No reply
	480		Deflection immediate
	503		Mobile subscriber not reachable
	487		Deflection during alerting
	503		Subscriber not reachable

5.3.3 Originating Identification Restriction (OIR)

5.3.4 Anonymous Communication Rejection and Communication Barring (ACR/CB)

TSS Interaction/ACR-CB	TP CDIV_N09_001	Reference 4.6.9	Selection expression PICS 4/6
Test purpose <i>CDIV the diverted-to user has subscribed to a call barring service "inhibition of incoming forwarded communication".</i>			
Ensure that the communication is rejected with 603 (Decline) if the diverted-to user has subscribed to the call barring service "inhibition of incoming forwarded communication" and the received INVITE contains a History-Info header indication this call is a forwarded.			
The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 10.			
SIP header values: INVITE: History-Info: <sip:SIP#1;index=1, <sip:SIP#2; cause= CAUSE_VAL>;index=1.1			
Comments:			
SIP#1	Terminating AS	SIP#2	
INVITE 1	→		
603 (Decline)	←		
ACK	→		

Table 10

Cause Value in History Index; cause-param = "cause" EQUAL CAUSE_VAL	Cause value	Call diversion information	Redirecting Reason
	404		Unknown
	302		Unconditional
	486		User busy
	408		No reply
	480		Deflection immediate
	503		Mobile subscriber not reachable
	487		Deflection during alerting
	503		Subscriber not reachable

TSS Interaction/ACR-CB	TP CDIV_N09_002	Reference 4.6.9	Selection expression PICS 4/5
Test purpose <i>The served user has subscribed to a call barring service Outgoing Communication Barring (OCB).</i>			
Ensure that the communication is rejected with 603 (Decline) if the diverting user has subscribed to the call barring service Outgoing Communication Barring (OCB) if the forwarded to number is restricted.			
The Cause Value in the latest History Index; cause-param =CAUSE_VAL defined in Table 11.			
SIP header values:			
Comments:			
SIP#1	SUT	SIP#2 (served user)	SIP#3
INVITE 1	→		
603 (Decline)	←		
ACK	→		

Table 11

Cause Value in History Index; cause-param = "cause" EQUAL CAUSE_VAL	Cause value	Call diversion information	Redirecting Reason
	404		Unknown
	302		Unconditional
	486		User busy
	408		No reply
	480		Deflection immediate
	503		Mobile subscriber not reachable
	487		Deflection during alerting
	503		Subscriber not reachable

5.3.5 Explicit Communication Transfer (ECT)

TSS Interaction/ECT	TP CDIV_N10_001	Reference 4.6.10.1.2	Selection expression PICS 4/7
Test purpose <i>Forwarded Communication, handling of Refer-To header.</i>			
Ensure that a forwarded communication is able to transfer and the Refer-To header of the REFER request sent to the Transferee contains a Refer-To header containing the CDIV Session Identifier. The CFU, CFB, CFNR, CD CFNL and CFNRc apply.			
SIP header values: REFER 1: Refer-To:<SIP#4> REFER 2: Refer-To: <CDIV Session Identifier>			
Configuration: SIP#1: originating user, Transferer SIP#2: CDIV served user, (Transferee) SIP#3: CDIV diverted-to user, Transferee SIP#4: Transfer target			
Comments:			
SIP#1	SUT	SIP#2 (served user)	SIP#3
		Forwarded communication is active	SIP#4
REFER 1	→	→ REFER 2	
			→ REFER 2
202 Accepted	←	← 202 Accepted	← 202 Accepted
		← INVITE	← INVITE
	INVITE	→	→ INVITE
		← 180 Ringing	← 180 Ringing
	180 Ringing	→	→ 180 Ringing
		← 200 OK	← 200 OK
	200 OK	→	→ 200 OK
BYE	→		← ACK
200 OK BYE	←		→ ACK
			Transferred communication
			← BYE
			→ BYE
			← 200 OK BYE
			→ 200 OK BYE

TSS Interaction/TIP	TP CDIV_N10_002	Reference 4.6.10.1.3	Selection expression PICS 4/7																																																																																
Test purpose <i>Forwarded Communication, handling of Refer-To header.</i>																																																																																			
Ensure that a forwarded communication is able to transfer and the AS replaces the Request URI (CDIV Session Identifier) of the INVITE request received from the Transferee with the value of the Transfer target previously stored from the Refer-To header received in the REFER request and sends the INVITE request toward the Transfer target. The INVITE request contains also the History-Info header. The CFU, CFB, CFNR, CD CFNL and CFNRc apply.																																																																																			
SIP header values: INVITE 1: Request URI: <CDIV Session Identifier> INVITE 2: Request URI:<SIP#4> History-Info: <sip:SIP#2 >;index=1, <sip:SIP#3; cause=302>;index=1.1																																																																																			
Configuration: SIP#1: originating user, Transferer SIP#2: CDIV served user, (Transferee) SIP#3: CDIV diverted-to user, Transferee SIP#4: Transfer target																																																																																			
Comments: <table border="0" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">SIP#1</th> <th style="text-align: center;">SUT</th> <th style="text-align: center;">SIP#2 (served user)</th> <th style="text-align: center;">SIP#3</th> <th style="text-align: center;">SIP#4</th> </tr> </thead> <tbody> <tr> <td colspan="5" style="text-align: center;">Forwarded communication is active</td> </tr> <tr> <td>REFER</td> <td style="text-align: center;">→</td> <td style="text-align: center;">→ REFER</td> <td style="text-align: center;">→ REFER</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">← 202 Accepted</td> <td></td> </tr> <tr> <td>202 Accepted</td> <td style="text-align: center;">←</td> <td style="text-align: center;">← 202 Accepted</td> <td style="text-align: center;">← INVITE 1</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">INVITE 2 →</td> <td></td> <td style="text-align: center;">→ INVITE 2</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 180 Ringing</td> <td></td> <td style="text-align: center;">← 180 Ringing</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">180 Ringing →</td> <td style="text-align: center;">→ 180 Ringing</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">← 200 OK</td> <td></td> <td style="text-align: center;">← 200 OK</td> </tr> <tr> <td>BYE</td> <td style="text-align: center;">→</td> <td style="text-align: center;">200 OK →</td> <td style="text-align: center;">→ 200 OK</td> <td></td> </tr> <tr> <td>200 OK BYE</td> <td style="text-align: center;">←</td> <td></td> <td style="text-align: center;">← ACK</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">→ ACK</td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">← BYE</td> <td style="text-align: center;">Transferred communication</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">→ BYE</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td style="text-align: center;">← 200 OK BYE</td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">→ 200 OK BYE</td> <td></td> </tr> </tbody> </table>				SIP#1	SUT	SIP#2 (served user)	SIP#3	SIP#4	Forwarded communication is active					REFER	→	→ REFER	→ REFER					← 202 Accepted		202 Accepted	←	← 202 Accepted	← INVITE 1				INVITE 2 →		→ INVITE 2			← 180 Ringing		← 180 Ringing			180 Ringing →	→ 180 Ringing				← 200 OK		← 200 OK	BYE	→	200 OK →	→ 200 OK		200 OK BYE	←		← ACK						→ ACK				← BYE	Transferred communication					→ BYE					← 200 OK BYE				→ 200 OK BYE	
SIP#1	SUT	SIP#2 (served user)	SIP#3	SIP#4																																																																															
Forwarded communication is active																																																																																			
REFER	→	→ REFER	→ REFER																																																																																
			← 202 Accepted																																																																																
202 Accepted	←	← 202 Accepted	← INVITE 1																																																																																
		INVITE 2 →		→ INVITE 2																																																																															
		← 180 Ringing		← 180 Ringing																																																																															
		180 Ringing →	→ 180 Ringing																																																																																
		← 200 OK		← 200 OK																																																																															
BYE	→	200 OK →	→ 200 OK																																																																																
200 OK BYE	←		← ACK																																																																																
				→ ACK																																																																															
			← BYE	Transferred communication																																																																															
				→ BYE																																																																															
				← 200 OK BYE																																																																															
			→ 200 OK BYE																																																																																

6 Compliance

An ATS which complies with this TSS&TP specification shall:

- a) consist of a set of test cases corresponding to the set or to a subset of the TPs specified in Clause 5;
- b) use a TSS which is an appropriate subset of the whole of the TSS specified in Clause 4;
- c) use the same naming conventions for the test groups and test cases;
- d) maintain the relationship specified in Clause 5 between the test groups and TPs and the entries in the PICS proforma to be used for test case deselection.

In the case of a) or b) above, a subset shall be used only where a particular Abstract Test Method (ATM) makes some TPs untestable. All testable TPs from Clause 5 shall be included in a compliant ATS.

History

Document history		
V2.1.1	May 2009	Publication
V3.1.1	July 2011	Publication