
Draft ETSI EN 300 955 V7.0.0 (1999-08)

European Standard (Telecommunications series)

Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) supplementary services; Stage 3 (GSM 04.86 version 7.0.0 Release 1998)

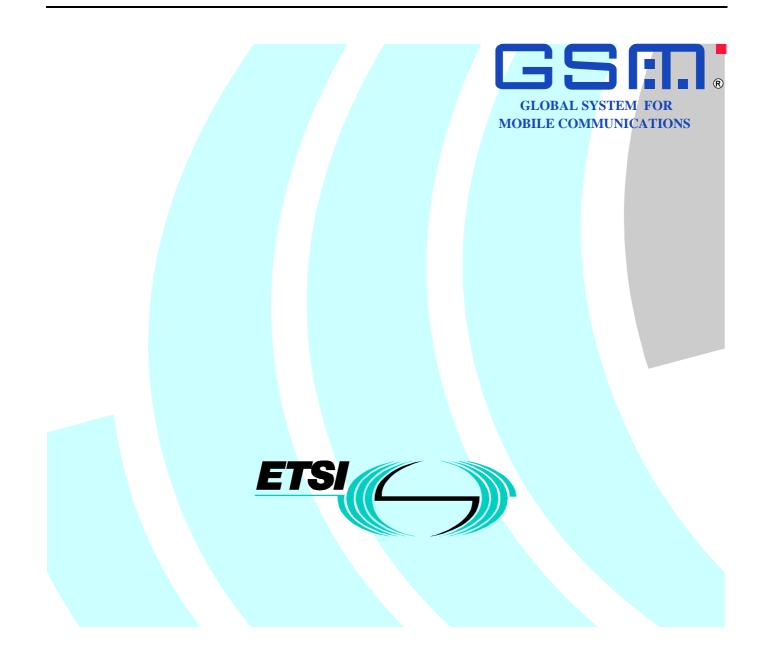

Reference REN/SMG-030486Q7 (8uc03i00.PDF)

Keywords

Digital cellular telecommunications system, Global System for Mobile communications (GSM)

ETSI

Postal address F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis Valbonne - FRANCE Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16 Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr Individual copies of this ETSI deliverable can be downloaded from http://www.etsi.org If you find errors in the present document, send your comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 1999. All rights reserved.

Contents

Intelle	ectual Property Rights	4
Forew	vord	4
0 0.1 0.2	Scope References Abbreviations	5
1	Advice of Charge (Information) (AoCI)	7
1.1	Normal operation with successful outcome	
1.1.1	Call re-establishment	7
1.1.2	MS originated call	7
1.1.3	MS terminated call	7
1.1.4	Change of charging information	8
1.2	Normal operation with unsuccessful outcome	
1.3	Activation, deactivation and invocation	
1.4	Interrogation, registration and erasure	8
2	Advice of Charge (Charging) (AoCC)	8
2.1	Normal operation with successful outcome	
2.1.1	Call re-establishment	9
2.1.2	MS originated call	9
2.1.3	MS terminated call	
2.1.4	Change of charging information	9
2.2	Normal operation with unsuccessful outcome	. 10
2.3	Accumulated Call Meter is equal to or greater than ACMmax	
2.4	Activation, deactivation and invocation	
2.5	Interrogation, registration and erasure	. 10
Anne	x A (informative): Change Request History	.11
Histor	ry	. 12

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://www.etsi.org/ipr).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Special Mobile Group (SMG), and is now submitted for the ETSI standards One-step Approval Procedure.

The present document specifies the procedures used at the radio interface for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of charging supplementary services within the digital cellular telecommunications system.

The specification from which the present document has been derived was originally based on CEPT documentation, hence the presentation of the present document may not be entirely in accordance with the ETSI/PNE rules.

The contents of the present document is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will be re-released with an identifying change of release date and an increase in version number as follows:

Version 7.x.y

where:

7 indicates Release 1998 of GSM Phase 2+

- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

Proposed national transposition dates			
Date of latest announcement of this EN (doa):	3 months after ETSI publication		
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa		
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa		

0 Scope

The present document specifies the procedures used at the radio interface (reference point Um as defined in GSM 04.02) for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of charging supplementary services. The provision and withdrawal of supplementary services is an administrative matter between the mobile subscriber and the service provider and causes no signalling on the radio interface.

In GSM 04.10 the general aspects of the specification of supplementary services at the layer 3 radio interface are given.

GSM 04.80 specifies the formats and coding for the supplementary services.

Definitions and descriptions of supplementary services are given in GSM 02.04 and GSM 02.8x and GSM 02.9x-series. GSM 02.24 and 02.86 are related to the charging supplementary services.

Technical realization of supplementary services is described in GSM 03.11 and GSM 03.8x and GSM 03.9x-series. GSM 03.86 is related to the charging supplementary services.

The procedures for Call Control, Mobility Management and Radio Resource management at the layer 3 radio interface are defined in GSM 04.07 and GSM 04.08.

The following supplementary services belong to the charging supplementary services and are described in the present document:

-	Advice of Charge (Information)	(AoCI)	(clause 1);
_	Advice of Charge (Charging)	(AoCC)	(clause 2).

0.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

References are either specific (identified by date of publication, edition number, version number, etc.) or The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- For this Release 1998 document, references to GSM documents are for Release 1998 versions (version 7.x.y).
- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 02.04: "Digital cellular telecommunications system (Phase 2+); General on supplementary services".
- [3] GSM 02.24: "Digital cellular telecommunications system (Phase 2+); Description of Charge Advice Information (CAI)".
- [4] GSM 02.81: "Digital cellular telecommunications system (Phase 2+); Line identification supplementary services Stage 1".
- [5] GSM 02.82: "Digital cellular telecommunications system (Phase 2+); Call Forwarding (CF) supplementary services Stage 1".

- [6] GSM 02.83: "Digital cellular telecommunications system (Phase 2+); Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 1". GSM 02.84: "Digital cellular telecommunications system (Phase 2+); MultiParty (MPTY) [7] supplementary services - Stage 1". [8] GSM 02.85: "Digital cellular telecommunications system (Phase 2+); Closed User Group (CUG) supplementary services - Stage 1". GSM 02.86: "Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) [9] supplementary services - Stage 1". [10] GSM 02.88: "Digital cellular telecommunications system (Phase 2+); Call Barring (CB) supplementary services - Stage 1". [11] GSM 02.90: "Digital cellular telecommunications system (Phase 2+); Unstructured Supplementary Services Data (USSD) - Stage 1". [12] GSM 03.02: "Digital cellular telecommunications system (Phase 2+); Network architecture". GSM 03.11: "Digital cellular telecommunications system (Phase 2+); Technical realization of [13] supplementary services". [14] GSM 03.81: "Digital cellular telecommunications system (Phase 2+); Line identification supplementary services - Stage 2". GSM 03.82: "Digital cellular telecommunications system (Phase 2+); Call Forwarding (CF) [15] supplementary services - Stage 2". [16] GSM 03.83: "Digital cellular telecommunications system (Phase 2+); Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 2". [17] GSM 03.84: "Digital cellular telecommunications system (Phase 2+); MultiParty (MPTY) supplementary services - Stage 2". [18] GSM 03.85: "Digital cellular telecommunications system (Phase 2+); Closed User Group (CUG) supplementary services - Stage 2". GSM 03.86: "Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) [19] supplementary services - Stage 2". [20] GSM 03.88: "Digital cellular telecommunications system (Phase 2+); Call Barring (CB) supplementary services - Stage 2". [21] GSM 03.90: "Digital cellular telecommunications system (Phase 2+); Unstructured supplementary services operation - Stage 2". GSM 04.02: "Digital cellular telecommunications system (Phase 2+); GSM Public Land Mobile [22] Network (PLMN) access reference configuration". GSM 04.07: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface [23] signalling layer 3; General aspects". GSM 04.08: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer [24] 3 specification". GSM 04.10: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer [25] 3; Supplementary services specification; General aspects".
- [26] GSM 04.80: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 supplementary services specification; Formats and coding".

0.2 Abbreviations

Abbreviations used in the present document are listed in GSM 01.04.

1 Advice of Charge (Information) (AoCI)

1.1 Normal operation with successful outcome

On every successful request for an applicable telecommunications service, the served Mobile Station (MS) will be provided with charging information.

The network sends the Charge Advice Information (CAI) to the MS according to GSM 02.24, GSM 02.86 and GSM 03.86. With this information the MS is able to calculate the units associated with the requested service in real time. In the case where the served mobile is to be charged for multi party calls, separate processes within the MS are used to calculate units appropriate to each call. For unit calculation, each call is treated in the same way as a normal "two-party" call. Any change in the charging rate during a call may be indicated to the MS.

1.1.1 Call re-establishment

When the MS detects a radio link failure, the Chargeable Duration (CDUR) shall be suspended.

If a call re-establishment procedure is attempted, the MS shall resume the CDUR when:

- an MM connection has been successfully completed; and
- a TCH has been successfully seized in the appropriate mode.

1.1.2 MS originated call

For an MS originated call, charging information is transferred to the MS as shown in figure 1.1. The charging information is acknowledged in a FACILITY message only if the MS supports the AoCI functionality specified in GSM 02.24 and GSM 02.86. AoCI refers to the Advice of Charge (Information) service.

S		Networ
	SETUP	
		>
	etc.	
,	CONNECT/FACILITY	
<	Facility (Invoke = ForwardChargeAdvice (AoCI, ChargingInformation))	
	FACILITY/DISCONNECT	
	Facility (Return result)	>
Figur	re 1.1: Notification to the served mobile subscriber of the charging inform	nation
i igu	in case of an originated call set up	

1.1.3 MS terminated call

For an MS terminated call, where required, charging information is transferred to the MS as shown in figure 1.2. The charging information is acknowledged only if the MS supports the AoCI functionality specified in GSM 02.24 and GSM 02.86.

MS Network
CONNECT
------>
FACILITY
------Facility (Invoke = ForwardChargeAdvice (AoCI, ChargingInformation))
FACILITY/DISCONNECT
------>
Facility (Return result)

Figure 1.2: Notification to the served mobile subscriber of the charging information in case of a terminated call set-up

1.1.4 Change of charging information

To inform the MS of a change in charging information the procedure of figure 1.3 is performed. The charging information is acknowledged only if the MS supports the AoCI functionality specified in GSM 02.24 and GSM 02.86.

Figure 1.3: Notification to the served mobile subscriber of a change in the charging information

1.2 Normal operation with unsuccessful outcome

No signalling is performed by the network if a MS fails to acknowledge receipt of charging Information.

1.3 Activation, deactivation and invocation

Activation, deactivation and invocation of the Advice of Charge (Information) supplementary service are not applicable.

1.4 Interrogation, registration and erasure

Interrogation, registration and erasure of the Advice of Charge (Information) supplementary service are not applicable.

2 Advice of Charge (Charging) (AoCC)

2.1 Normal operation with successful outcome

On every successful request for an applicable telecommunications service, the served MS will be provided with charging information.

The network sends the Charge Advice Information (CAI) to the MS according to GSM 02.24, GSM 02.86 and GSM 03.86. With this information the MS is able to calculate the units associated with the requested service in real time. In the case where the served mobile is to be charged for multi party calls, separate processes within the MS are used to calculate units appropriate to each call. For unit calculation, each call is treated in the same way as a normal "two-party" call. Any change in the charging rate during a call may be indicated to the MS.

2.1.1Call re-establishment

When the MS detects a radio link failure, the Chargeable Duration (CDUR) shall be suspended.

If a call re-establishment procedure is attempted, the MS shall resume the CDUR when:

- an MM connection has been successfully completed; and
- a TCH has been successfully seized in the appropriate mode.

2.1.2 MS originated call

For an MS originated call, charging information is transferred to the MS as shown in figure 2.1. The charging information is acknowledged in a FACILITY message only if the MS supports the AoCC functionality specified in GSM 02.24 and GSM 02.86. AoCC refers to the Advice of Charge (Charging) service.

1S		Netw			
	SETUP				
		>			
	etc.				
	CONNECT/FACILITY				
<	Facility (Invoke = ForwardChargeAdvice (AoCC, ChargingInformation))				
	FACILITY/DISCONNECT				
	Facility (Return result)	>			

Figure 2.1: Notification to the served mobile subscriber of the charging information in case of an originated call set up

2.1.3MS terminated call

<-----

For an MS terminated call, where required, charging information is transferred to the MS as shown in figure 2.2. The charging information is acknowledged only if the MS supports the AoCC functionality specified in GSM 02.24 and GSM 02.86.

MS

1.00

CO	NNE	CT

Network

----->

FACILITY _____

Facility (Invoke = ForwardChargeAdvice (AoCC, ChargingInformation))

FACILITY/DISCONNECT

Facility (Return result)

Figure 2.2: Notification to the served mobile subscriber of the charging information in case of a terminated call set up

2.1.4Change of charging information

To inform the MS of a change in charging information the procedure of figure 2.3 is performed. The charging information is acknowledged only if the MS supports the AoCC functionality specified in GSM 02.24 and GSM 02.86.

Network

MS

FACILITY

Facility (Invoke = ForwardChargeAdvice (AoCC, ChargingInformation))

FACILITY/DISCONNECT

----->

Facility (Return result)

Figure 2.3: Notification to the served mobile subscriber of a change in the charging information

2.2 Normal operation with unsuccessful outcome

If timer T(AoC) (see GSM 03.86) expires before the Charge Advice Information is acknowledged, the network shall release the call. The MS and network shall act in accordance with GSM 04.08 network initiated call clearing procedures (see figure 2.4).

MS

DISCONNECT/RELEASE/RELEASE COMPLETE

....Cause #69 (Requested facility not implemented)....

Figure 2.4: Network release due to unsuccessful operation of Advice of Charge (Charging) service

2.3 Accumulated Call Meter is equal to or greater than ACMmax

If the change stored in the Accumulated Call Meter (ACM) is equal to or greater than the maximum value specified by ACMmax, then the MS shall initiate call clearing giving a specific cause value for this situation as indicated in figure 2.5.

MS

DISCONNECT

Network

Network

----->

....Cause #68 (ACM equal to or greater than ACMmax)....

Figure 2.5: Mobile station releases the call due to ACM being equal to or greater than ACMmax

2.4 Activation, deactivation and invocation

Activation, deactivation and invocation of the Advice of Charge (Charging) supplementary service are not applicable.

2.5 Interrogation, registration and erasure

Interrogation, registration and erasure of the Advice of Charge (Charging) supplementary service are not applicable.

Annex A (informative): Change Request History

	Status of Technical Specification GSM 04.86			
Date Version Remarks		Remarks		
		No phase 1 version		
March 1991	version 4.0.0	TS approved by SMG#30 TS frozen for phase 2 by SMG#05		
April 1993	version 4.1.0	CR 04.86-01 rev 1 (category F) approved by SMG#06		
June 1993	version 4.2.0	CR 04.86-02 (category F) approved by SMG#07		
October 1993	version 4.3.0	CR 04.86-03 (category F) approved by SMG#08 Changed to draft prETS 300 570		
April 1994	version 4.4.0	CR 04.86-04 (category F) approved by SMG#10		
July 1994	version 4.5.0	CR 04.86-06 (category F) approved by SMG#11		
October 1994	version 4.5.1	TS changed to final draft prETS 300 570		
January 1995	version 4.5.2	TS changed to ETS 300 570 First edition July 1996 file converted from word5 to word6		
December 1996	version 5.0.0	GTS converted to draft prETS 300 955 for Release 96		
May 1997	version 5.0.1	ETS 300 955 first edition		
January 1999	version 6.0.0	Release 1997 version		
July 1999	version 7.0.0	Specification version 6.0.0 upgrade to Release 1998 version 7.0.0		
	Text and figures: WinWord 6.0 Stylesheet: etsiw_60.dot			

History

Document history				
V7.0.0	August 1999	One-step Approval Procedure	OAP 9956:	1999-08-25 to 1999-12-24