
Final draft ETSI ES 202 391-10 V1.3.1 (2008-02)

ETSI Standard

Open Service Access (OSA);
Parlay X Web Services;
Part 10: Call Handling
(Parlay X 2)

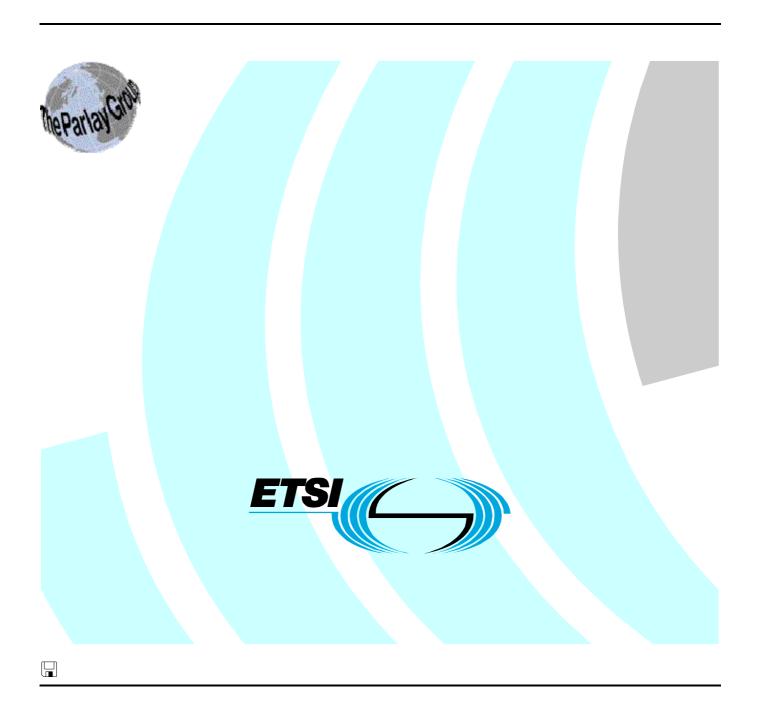

Reference RES/TISPAN-01056-10-OSA

Keywords
API, OSA, service

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008. © The Parlay Group 2008. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intelle	lectual Property Rights	4
Forew	word	4
1	Scope	5
2	References	5
2.1	Normative references	
3	Definitions and abbreviations	
3.1	Definitions	
3.2	Abbreviations	6
4	Detailed service description	6
5	Namespaces	7
6	Sequence diagrams	7
6.1	Setup call handling, query and clear rules	
7	XML Schema data type definition	8
7.1	ConditionalForward structure	
7.2	UnconditionalForward structure	
7.3	InteractionContent enumeration	
7.4	TextInteraction structure	8
7.5	VoiceInteraction union	8
7.6	CallHandlingRules structure	
7.7	SetRulesResult structure	9
8	Web Service interface definition	9
8.1	Interface: CallHandling	
8.1.1	Operation: setRules	
8.1.1.1		
8.1.1.2	2 Output message: setRulesResponse	9
8.1.1.3	3 Referenced faults	10
8.1.2	Operation: setRulesForGroup	
8.1.2.1		
8.1.2.2		
8.1.2.3		
8.1.3	Operation: getRules	
8.1.3.1		
8.1.3.2		
8.1.3.3		
8.1.4	Operation: clearRules	
8.1.4.1 8.1.4.2		
8.1.4.3		
9	Fault definitions.	
10	Service policies	12
Anne	ex A (normative): WSDL for Call Handling	13
Anne	ex B (informative): Bibliography	14
Histor	ory	15

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN), and is now submitted for the ETSI standards Membership Approval Procedure.

The present document is part 10 of a multi-part deliverable covering Open Service Access (OSA); Parlay X Web Services, as identified below:

```
Part 1:
          "Common";
Part 2:
          "Third Party Call";
Part 3:
          "Call Notification";
Part 4:
          "Short Messaging";
Part 5:
          "Multimedia Messaging";
Part 6:
          "Payment";
Part 7:
          "Account Management";
Part 8:
          "Terminal Status";
Part 9:
          "Terminal Location";
Part 10: "Call Handling";
Part 11:
          "Audio Call";
Part 12:
          "Multimedia Conference";
Part 13:
          "Address List Management";
Part 14:
          "Presence".
```

The present document has been defined jointly between ETSI, The Parlay Group (http://www.parlay.org) and the 3GPP.

The present document forms part of the Parlay X 2.2 set of specifications.

The present document is equivalent to 3GPP TS 29.199-10 V6.5.0 (Release 6).

1 Scope

The present document is part 10 of the Stage 3 Parlay X 2 Web Services specification for Open Service Access (OSA).

The OSA specifications define an architecture that enables application developers to make use of network functionality through an open standardized interface, i.e. the OSA APIs.

The present document specifies the Call Handling Web Service. The following are defined here:

- Name spaces.
- Sequence diagrams.
- Data definitions.
- Interface specification plus detailed method descriptions.
- Fault definitions.
- Service Policies.
- WSDL Description of the interfaces.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at http://docbox.etsi.org/Reference.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

[1] W3C Recommendation (2 May 2001): "XML Schema Part 2: Datatypes".

NOTE: Available at http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/.

[2]

ETSI ES 202 391-1: "Open Service Access (OSA); Parlay X Web Services; Part 1: Common (Parlay X 2)".

6

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ES 202 391-1 [2] apply.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in ES 202 391-1 [2] apply.

4 Detailed service description

The Call Handling Web Service provides a mechanism for an application to specify how calls are to be handled for a specific number. Call handling includes commonly utilized actions:

- Call accepting only accepting calls from a list of numbers.
- Call blocking blocking calls if they are on a blocking list.
- Conditional call forwarding changing the destination of a call to another number for a specific calling number.
- Unconditional call forwarding changing the destination of a call to another number.
- Play audio initiate audio with the caller (e.g. an announcement or menu).

The set of rules are provided to the Web Service which is responsible for establishing the call handling function. Only one action is taken for a call, and once this action is started the rules will stop being processed.

There is a specific order in which these rules are processed, providing a predictable call handling expectation for rules provided. The processing is done as follows:

- 1) Call accepting determines if the call is accepted or rejected. If the caller is not on the accept list, the call is rejected and rule processing ends.
- 2) Call blocking determines if the call is rejected. If the caller is on the block list, the call is rejected and rule processing ends.
- 3) Conditional call forwarding each calling number that has a specific forwarding instruction is checked, and the call is forwarded on a match, and rule processing ends.
- 4) Unconditional call forwarding the called number is changed to the call forwarding number and rule processing ends.
- 5) Play audio the call is handled by a voice system, which handles all further processing of the call. Rule processing ends when the call is handled off.
- 6) Continue processing call, to complete call to the original called number.

If no rules are specified in a particular area, then that step is skipped. If the rule processing ends without any action being indicated, then the call will continue to the called number.

Call Handling provides its function without further interaction with the Application. This is in contrast to the Call Notification interfaces which provide notifications to the Application for processing.

5 Namespaces

The Call Handling interface uses the namespace:

http://www.csapi.org/wsdl/parlayx/call_handling/v2_4

The data types are defined in the namespace:

http://www.csapi.org/schema/parlayx/call_handling/v2_3

The "xsd" namespace is used in the present document to refer to the XML Schema data types defined in XML Schema [1]. The use of the name "xsd" is not semantically significant.

6 Sequence diagrams

6.1 Setup call handling, query and clear rules

Pattern: Request / Response.

This sequence shows the application setting up Call Handling with rules to be processed, querying those rules and clearing them.

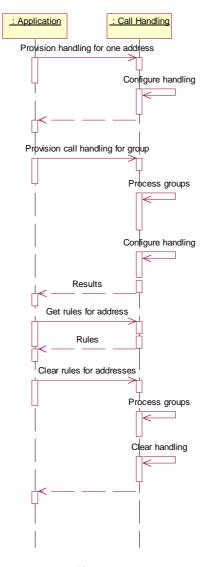


Figure 1

7 XML Schema data type definition

7.1 ConditionalForward structure

Information on handling of forwarding for specific calling numbers.

Element name	Element type	Optional	Description
callingAddress	xsd:anyURI	No	Address that call is placed from
forwardingAddress	xsd:anyURI	No	Address to forward call to
onBusyAddress	xsd:anyURI	No	If line is busy at forwarding address, forward to this address
onNoAnswerAddress	xsd:anyURI	No	If no answer at forwarding address, forward to this address

7.2 UnconditionalForward structure

Information for handling of forwarding unconditionally.

Element name	Element type	Optional	Description
forwardingAddress	xsd:anyURI	No	Address to forward call to
onBusyAddress	xsd:anyURI	No	If line is busy at forwarding address, forward to this address
onNoAnswerAddress	xsd:anyURI	No	If no answer at forwarding address, forward to this address

7.3 InteractionContent enumeration

The following are the types of content that may be used for user interaction.

Enumeration value	Description			
TextInfo	Text to be processed by a Text-To-Speech engine			
VoiceXml	VoiceXML to be processed by a VoiceXML browser			
Audio	Audio file to be played by an audio processor			

7.4 TextInteraction structure

Information for processing by a text to speech engine.

Element name	Element type	Optional	Description		
text	xsd:string	No	Text to play through a Text-To-Speech engine		
language	xsd:string	No	Language of text		

7.5 VoiceInteraction union

For a call that is to be handled by an interactive voice system, the information to provide to that system.

Element name	Element type	Optional	Description
UnionElement	InteractionContent	No	Type of content provided (one of the following)
TextInfo	TextInteraction	Yes	Announcement to play through a Text-To-Speech engine
VoiceXml	xsd:anyURI	Yes	Location of VoiceXML to use in a VoiceXML browser
Audio	xsd:anyURI	Yes	Location of audio content (WAV or MP3 file)

Structure containing set of rules that are applied when the call is handled.

Element name	Element type	Optional	Description
acceptList	xsd:anyURI	Yes	List of addresses to accept calls from
	[0unbounded]		
blockList	xsd:anyURI	Yes	List of addresses to block calls from
	[0unbounded]		
forwardList	ConditionalForward	Yes	List of conditional forwarding addresses and
	[0unbounded]		destinations
forward	UnconditionalForward	Yes	Unconditional call forwarding address
voiceInteractionContent	VoiceInteraction	Yes	Forward call to a user interaction system with
			information on content

9

7.7 SetRulesResult structure

Result of setRules operation for each address.

7.6

Element name	Element type	Optional	Description
address	xsd:anyURI	No	Address to be set
successful	xsd:boolean	No	Successfully set rules or not
error	common:ServiceError	Yes	Error message if unsuccessful

8 Web Service interface definition

8.1 Interface: CallHandling

CallHandling provides a rule based processing capability that is accessible to Applications through a set of operations that allow definition of discrete rules.

8.1.1 Operation: setRules

Set the call handling rules for an address (the destination for the call). If a set of rules is already in place for the **address**, then this operation will replace the old rules with the set provided in this operation.

The address may not specify a group. If a group is specified, a PolicyException will be returned.

8.1.1.1 Input message: setRulesRequest

Part name	Part type	Optional	Description
address	xsd:anyURI	No	Address to handle calls for
rules	CallHandlingRules	No	Rules to apply for this address

8.1.1.2 Output message: setRulesResponse

Part name	Part type	Optional	Description
None			

8.1.1.3 Referenced faults

ServiceException from ES 202 391-1 [2]:

• SVC0001: Service error.

• SVC0002: Invalid input value.

PolicyException from ES 202 391-1 [2]:

• POL0001: Policy error.

• POL0006: Groups not allowed.

8.1.2 Operation: setRulesForGroup

Set the call handling rules for multiple addresses (the destination for calls). If a set of rules is already in place for any of the **addresses**, then this operation will replace the old rules with the set provided in this operation.

10

The **addresses** may include groups, with members using the "tel:" and "sip:" URIs in the manner defined in ES 202 391-1 [2]. Wildcards may not be used to specify addresses.

8.1.2.1 Input message: setRulesForGroupRequest

Part name	Part type	Optional	Description
addresses	xsd:anyURI	No	Addresses to handle calls for
	[1unbounded]		
rules	CallHandlingRules	No	Rules to apply for these addresses

8.1.2.2 Output message: setRulesForGroupResponse

Part name	Part type	Optional	Description
result	SetRulesResult	No	Result of setup for each of addresses provided
	[1unbounded]		

8.1.2.3 Referenced faults

ServiceException from ES 202 391-1 [2]:

• SVC0001: Service error.

• SVC0002: Invalid input value.

• SVC0004: No valid addresses.

• SVC0006: Invalid group.

PolicyException from ES 202 391-1 [2]:

• POL0001: Policy error.

• POL0006: Groups not allowed.

• POL0007: Nested groups not allowed.

8.1.3 Operation: getRules

Get the call handling rules for an address (the destination for the call).

The address may not specify a group. If a group is specified, a PolicyException will be returned.

8.1.3.1 Input message: getRulesRequest

Part name	Part type	Optional	Description
address	xsd:anvURI	No	Address to handle calls for

11

8.1.3.2 Output message: getRulesResponse

Part name	Part type	Optional	Description
result	CallHandlingRules	No	Rules being applied for this address

8.1.3.3 Referenced faults

ServiceException from ES 202 391-1 [2]:

• SVC0001: Service error.

• SVC0002: Invalid input value.

PolicyException from ES 202 391-1 [2]:

• POL0001: Policy error.

• POL0006: Groups not allowed.

8.1.4 Operation: clearRules

Clear the call handling rules associated with the **addresses** specified. If no rules have been set for an address, this operation silently ignores the request, and does not return an error or fault message.

The **addresses** may include groups, with members using the "tel:" and "sip:" URIs in the manner defined in ES 202 391-1 [2]. Wildcards may not be used to specify addresses.

8.1.4.1 Input message: clearRulesRequest

Part name	Part type	Optional	Description
addresses	xsd:anyURI	No	Addresses to clear call handling for
	[1unbounded]		

8.1.4.2 Output message: clearRulesResponse

Part name	Part type	Optional	Description
None			

8.1.4.3 Referenced faults

ServiceException from ES 202 391-1 [2]:

• SVC0001: Service error.

• SVC0002: Invalid input value.

SVC0006: Invalid group.

PolicyException from ES 202 391-1 [2]:

• POL0001: Policy error.

• POL0006: Groups not allowed.

• POL0007: Nested groups not allowed.

9 Fault definitions

No new faults defined for this service.

10 Service policies

Service policies for this service.

Name	Туре	Description
VoiceMailAvailable	xsd:boolean	Voice mail available or not
TextToSpeechAvailable	xsd:boolean	Service accepts text as an input for processing with a Text-To-Speech engine
AudioContentAvailable	xsd:boolean	Service accepts audio content for playing with an audio player
VoiceXmlAvailable	xsd:boolean	Service accepts VoiceXML for processing with a VoiceXML browser
AudioFormatsSupported	xsd:string	Comma separated string of audio formats supported (e.g. WAV, MP3, AU)
GroupSupport	xsd:boolean	Groups may be included with addresses
NestedGroupSupport	xsd:boolean	Are nested groups supported in group definitions

Annex A (normative): WSDL for Call Handling

The document/literal WSDL representation of this interface specification is compliant to ES 202 391-1 [2] and is contained in text files (contained in archive es_20239110v010301m0.zip) which accompany the present document.

Annex B (informative): Bibliography

ETSI TR 121 905: "Universal Mobile Telecommunications System (UMTS); Vocabulary for 3GPP Specifications (3GPP TR 21.905)".

History

Document history			
V1.1.1	V1.1.1 March 2005 Publication		
V1.2.1	December 2006	Publication	
V1.3.1	February 2008	Membership Approval Procedure MV 20080425: 2008-02-26 to 2008-04-25	