

**Open Service Access (OSA);
Application Programming Interface (API);
Part 13: Policy management SCF**



Reference

DES/SPAN-120091-13

Keywords

API, IDL, OSA, UML

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2003.

© The Parlay Group 2003.

All rights reserved.

DECT™, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	7
Foreword.....	7
1 Scope	8
2 References	8
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	8
4 Policy Management SCF.....	9
5 Sequence Diagrams	9
5.1 Use of Policy Repository.....	9
5.2 Introduce condition and action into rule.....	11
5.3 Create and receive an event.....	13
5.4 Create and modify domain	15
5.5 ASP offering services to prepaid subscribers	17
6 Class Diagrams.....	20
7 The Service Interface Specifications	22
7.1 Interface Specification Format	22
7.1.1 Interface Class	22
7.1.2 Method descriptions.....	22
7.1.3 Parameter descriptions.....	22
7.1.4 State Model.....	22
7.2 Base Interface.....	22
7.2.1 Interface Class IpInterface	22
7.3 Service Interfaces	23
7.3.1 Overview	23
7.4 Generic Service Interface	23
7.4.1 Interface Class IpService	23
7.4.1.1 Method setCallback().....	23
7.4.1.2 Method setCallbackWithSessionID().....	23
8 Policy Management Interface Classes.....	24
8.1 Interface Class IpPolicyManager.....	24
8.1.1 Method createDomain().....	25
8.1.2 Method getDomain().....	26
8.1.3 Method removeDomain()	26
8.1.4 Method getDomainCount().....	26
8.1.5 Method getDomainIterator().....	27
8.1.6 Method findMatchingDomains()	27
8.1.7 Method createRepository()	27
8.1.8 Method getRepository().....	28
8.1.9 Method removeRepository().....	28
8.1.10 Method getRepositoryCount()	28
8.1.11 Method getRepositoryIterator()	29
8.1.12 Method startTransaction().....	29
8.1.13 Method commitTransaction()	30
8.1.14 Method abortTransaction()	30
8.2 Interface Class IpPolicy.....	30
8.2.1 Attributes	31
8.2.2 Method getAttribute().....	32
8.2.3 Method setAttribute()	32
8.2.4 Method getAttributes()	32
8.2.5 Method setAttributes().....	33

8.3	Interface Class IpPolicyDomain	33
8.3.1	Attributes	35
8.3.2	Method getParentDomain()	36
8.3.3	Method createDomain()	36
8.3.4	Method getDomain().....	36
8.3.5	Method removeDomain()	37
8.3.6	Method getDomainCount().....	37
8.3.7	Method getDomainIterator().....	37
8.3.8	Method createGroup().....	38
8.3.9	Method getGroup()	38
8.3.10	Method removeGroup()	39
8.3.11	Method getGroupCount()	39
8.3.12	Method getGroupIterator()	39
8.3.13	Method createRule()	40
8.3.14	Method getRule().....	40
8.3.15	Method removeRule().....	40
8.3.16	Method getRuleCount()	41
8.3.17	Method getRuleIterator()	41
8.3.18	Method createEventDefinition()	41
8.3.19	Method getEventDefinition().....	42
8.3.20	Method removeEventDefinition().....	42
8.3.21	Method getEventDefinitionCount()	43
8.3.22	Method getEventDefinitionIterator().....	43
8.3.23	Method generateEvent()	43
8.3.24	Method createNotification().....	44
8.3.25	Method destroyNotification()	44
8.3.26	Method createVariableSet().....	45
8.3.27	Method getVariableSet().....	45
8.3.28	Method removeVariableSet().....	45
8.3.29	Method getVariableSetCount().....	46
8.3.30	Method getVariableSetIterator().....	46
8.3.31	Method setVariable().....	46
8.3.32	Method getVariable().....	47
8.4	Interface Class IpPolicyGroup	47
8.4.1	Attributes	48
8.4.2	Method getParentDomain()	49
8.4.3	Method getParentGroup()	49
8.4.4	Method createGroup().....	50
8.4.5	Method getGroup()	50
8.4.6	Method removeGroup()	50
8.4.7	Method getGroupCount()	51
8.4.8	Method getGroupIterator()	51
8.4.9	Method createRule()	51
8.4.10	Method getRule().....	52
8.4.11	Method removeRule().....	52
8.4.12	Method getRuleCount()	52
8.4.13	Method getRuleIterator()	53
8.5	Interface Class IpPolicyRepository	53
8.5.1	Attributes	54
8.5.2	Method getParentRepository().....	55
8.5.3	Method createRepository()	55
8.5.4	Method getRepository()	55
8.5.5	Method removeRepository().....	56
8.5.6	Method getRepositoryCount()	56
8.5.7	Method getRepositoryIterator()	56
8.5.8	Method createCondition().....	57
8.5.9	Method getCondition()	57
8.5.10	Method removeCondition()	58
8.5.11	Method getConditionCount().....	58
8.5.12	Method getConditionIterator().....	58
8.5.13	Method createAction().....	59
8.5.14	Method getAction().....	59

8.5.15	Method removeAction()	60
8.5.16	Method getActionCount()	60
8.5.17	Method getActionIterator()	60
8.6	Interface Class IpPolicyRule	61
8.6.1	Attributes	63
8.6.2	Method getParentGroup()	64
8.6.3	Method getParentDomain()	65
8.6.4	Method createCondition()	65
8.6.5	Method getCondition()	66
8.6.6	Method removeCondition()	66
8.6.7	Method getConditionCount()	66
8.6.8	Method getConditionIterator()	67
8.6.9	Method createAction()	67
8.6.10	Method getAction()	68
8.6.11	Method removeAction()	68
8.6.12	Method getActionCount()	68
8.6.13	Method getActionIterator()	69
8.6.14	Method setValidityPeriodConditionByName()	69
8.6.15	Method setValidityPeriodCondition()	69
8.6.16	Method getValidityPeriodCondition()	70
8.6.17	Method unsetValidityPeriodCondition()	70
8.6.18	Method setConditionList()	70
8.6.19	Method getConditionList()	71
8.6.20	Method setActionList()	71
8.6.21	Method getActionList()	71
8.7	Interface Class IpPolicyCondition	72
8.7.1	Attributes	73
8.7.2	Method getParentRepository()	74
8.7.3	Method getParentRule()	74
8.8	Interface Class IpPolicyTimePeriodCondition	74
8.8.1	Attributes	75
8.9	Interface Class IpPolicyAction	78
8.9.1	Attributes	79
8.9.2	Method getParentRepository()	79
8.9.3	Method getParentRule()	80
8.10	Interface Class IpPolicyEventDefinition	80
8.10.1	Attributes	80
8.10.2	Method setRequiredAttributes()	81
8.10.3	Method setOptionalAttributes()	81
8.10.4	Method getRequiredAttributes()	82
8.10.5	Method getOptionalAttributes()	82
8.10.6	Method getParentDomain()	82
8.11	Interface Class IpPolicyEventCondition	83
8.11.1	Attributes	83
8.12	Interface Class IpPolicyExpressionCondition	84
8.12.1	Attributes	84
8.13	Interface Class IpPolicyEventAction	85
8.13.1	Attributes	85
8.14	Interface Class IpPolicyExpressionAction	86
8.14.1	Attributes	87
8.15	Interface Class IpPolicyIterator	88
8.15.1	Attributes	88
8.15.2	Method getList()	89
8.16	Interface Class IpAppPolicyDomain	89
8.16.1	Method reportNotification()	89
9	State Transition Diagrams	90
10	Data Definitions	90
10.1	Policy Management Data Definitions	90
10.1.1	TpPolicyConditionListType	90
10.1.2	TpPolicyConditionListElement	90

10.1.3	TpPolicyConditionList.....	90
10.1.4	TpPolicyConditionType.....	90
10.1.5	TpPolicyActionListElement	91
10.1.6	TpPolicyActionList.....	91
10.1.7	TpPolicyActionType.....	91
10.1.8	TpPolicyEvent	91
10.1.9	TpPolicyKeyword.....	91
10.1.10	TpPolicyKeywordSet.....	92
10.1.11	IpPolicyDomain	92
10.1.12	IpPolicyDomainRef	92
10.1.13	IpPolicyRepository	93
10.1.14	IpPolicyRepositoryRef.....	93
10.1.15	IpPolicyGroup.....	93
10.1.16	IpPolicyGroupRef.....	93
10.1.17	IpPolicyRule	93
10.1.18	IpPolicyRuleRef	93
10.1.19	IpPolicyEventDefinition	93
10.1.20	IpPolicyEventDefinitionRef	93
10.1.21	IpAppPolicyDomain	93
10.1.22	IpAppPolicyDomainRef	93
10.1.23	IpPolicyCondition.....	93
10.1.24	IpPolicyConditionRef.....	93
10.1.25	IpPolicyTimePeriodCondition	93
10.1.26	IpPolicyTimePeriodConditionRef	94
11	Policy Management Exception Classes.....	94
Annex A (normative):	OMG IDL Description of Policy Management SCF	95
Annex B (informative):	Contents of 3GPP OSA R5 Policy Management.....	96
Annex C (informative):	Record of changes	97
C.1	Interfaces	97
C.1.1	New	97
C.1.2	Deprecated.....	97
C.1.3	Removed.....	97
C.2	Methods	97
C.2.1	New	97
C.2.2	Deprecated.....	97
C.2.3	Modified.....	98
C.2.4	Removed.....	98
C.3	Data Definitions	98
C.3.1	New	98
C.3.2	Modified.....	98
C.3.3	Removed.....	98
C.4	Service Properties.....	98
C.4.1	New	98
C.4.2	Deprecated.....	99
C.4.3	Modified.....	99
C.4.4	Removed.....	99
C.5	Exceptions	99
C.5.1	New	99
C.5.2	Modified.....	99
C.5.3	Removed.....	99
C.6	Others	99
History	100

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

All published ETSI deliverables shall include information which directs the reader to the above source of information.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Services and Protocols for Advanced Networks (SPAN).

The present document is part 13 of a multi-part deliverable covering Open Service Access (OSA); Application Programming Interface (API), as identified below. The API specification (ES 202 915) is structured in the following parts:

- Part 1: "Overview";
- Part 2: "Common Data Definitions";
- Part 3: "Framework";
- Part 4: "Call Control";
- Part 5: "User Interaction SCF";
- Part 6: "Mobility SCF";
- Part 7: "Terminal Capabilities SCF";
- Part 8: "Data Session Control SCF";
- Part 9: "Generic Messaging SCF";
- Part 10: "Connectivity Manager SCF";
- Part 11: "Account Management SCF";
- Part 12: "Charging SCF";
- Part 13: "Policy Management SCF";**
- Part 14: "Presence and Availability Management SCF".

The present document has been defined jointly between ETSI, The Parlay Group (<http://www.parlay.org>) and the 3GPP, in co-operation with a number of JAIN™ Community (<http://www.java.sun.com/products/jain>) member companies.

The present document forms part of the Parlay 4.0 set of specifications.

The present document is equivalent to 3GPP TS 29.198-13 V5.1.0 (Release 5).

1 Scope

The present document is part 13 of the Stage 3 specification for an Application Programming Interface (API) for Open Service Access (OSA).

The OSA specifications define an architecture that enables application developers to make use of network functionality through an open standardised interface, i.e. the OSA APIs.

The present document specifies the Policy Management Service Capability Feature (SCF) aspects of the interface. All aspects of the Policy Management SCF are defined here, these being:

- Sequence Diagrams
- Class Diagrams
- Interface specification plus detailed method descriptions
- State Transition diagrams
- Data Definitions
- IDL Description of the interfaces

The process by which this task is accomplished is through the use of object modelling techniques described by the Unified Modelling Language (UML).

2 References

The references listed in clause 2 of ES 202 915-1 contain provisions which, through reference in this text, constitute provisions of the present document.

ETSI ES 202 915-1: "Open Service Access (OSA); Application Programming Interface (API); Part 1: Overview".

ETSI ES 202 915-2: "Open Service Access (OSA); Application Programming Interface (API); Part 2: Common Data Definitions".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ES 202 915-1 apply.

3.2 Abbreviations

For the purposes of the present document, the abbreviations defined in ES 202 915-1 apply.

4 Policy Management SCF

It is expected that more and more OSA services will use policies to express operational criteria. It is also expected that network providers will host policy-enabled services that have been written by 3rd party application service providers. In order to manage policy information and control access to it a policy management service is needed. Consistent with this, a policy management service interface manager, IpPolicyManager, has been defined. All policy management interfaces are accessible from IpPolicyManager.

A number of APIs have been defined to obtain services from a policy management service. These include APIs to create, update or view policy information. Additionally APIs have been defined to facilitate interactions between clients (e.g. a 3rd party application) and any policy enabled service. These include APIs to view policy events, to subscribe to policy events and for the generation of events by clients. All APIs conform to an underlying policy information model.

Clients that perform administrative tasks, e.g. create, update or delete policy information must obtain access to IpPolicyManager using the family of obtainInterface() methods supported by the IpAccess interface. Administrative tasks may be performed through methods supported by IpPolicyManager.

Clients that need to interact with a specific policy enabled service (for non-administrative tasks) can obtain access to that service's interface directly via the selectService() method supported by the IpAccess interface. It should be noted that specific policy enabled services may support additional interfaces and methods that are not defined below. Examples of policy enabled services include: A load balancing service that uses policies to manage application loads on the network, a charging service that determines charging criteria based on policies, a call management service that uses policies to direct end-user calls to appropriate call agents, etc.

The order is as follows:


- The Sequence diagrams give the reader a practical idea of how each of the SCF is implemented.
- The Class relationships clause show how each of the interfaces applicable to the SCF, relate to one another.
- The Interface specification clause describes in detail each of the interfaces shown within the Class diagram part.
- The State Transition Diagrams (STD) show the transition between states in the SCF. The states and transitions are well-defined; either methods specified in the Interface specification or events occurring in the underlying networks cause state transitions.
- The Data Definitions clause shows a detailed expansion of each of the data types associated with the methods within the classes. Note that some data types are used in other methods and classes and are therefore defined within the Common Data types part ES 202 915-2.

An implementation of this API which supports or implements a method described in the present document, shall support or implement the functionality described for that method, for at least one valid set of values for the parameters of that method. Where a method is not supported by an implementation of a Service interface, the exception P_METHOD_NOT_SUPPORTED shall be returned to any call of that method.

5 Sequence Diagrams

5.1 Use of Policy Repository

The example shown here shows the use of a Policy Repository. The repository is meant to hold unattached conditions and actions. The Network Operator can populate the repository with the conditions and actions that it can support. These may indeed be based on 'off-line' negotiations with the application developer. The application developer uses the conditions and actions in the Policy Repository to create rules for his own application. In the example application logic represented by AppLogic1 belongs to the Network Operator, whereas the application logic represented by AppLogic2 belongs to the ASP. This example uses the same conditions, actions, and rules as the ASP example.

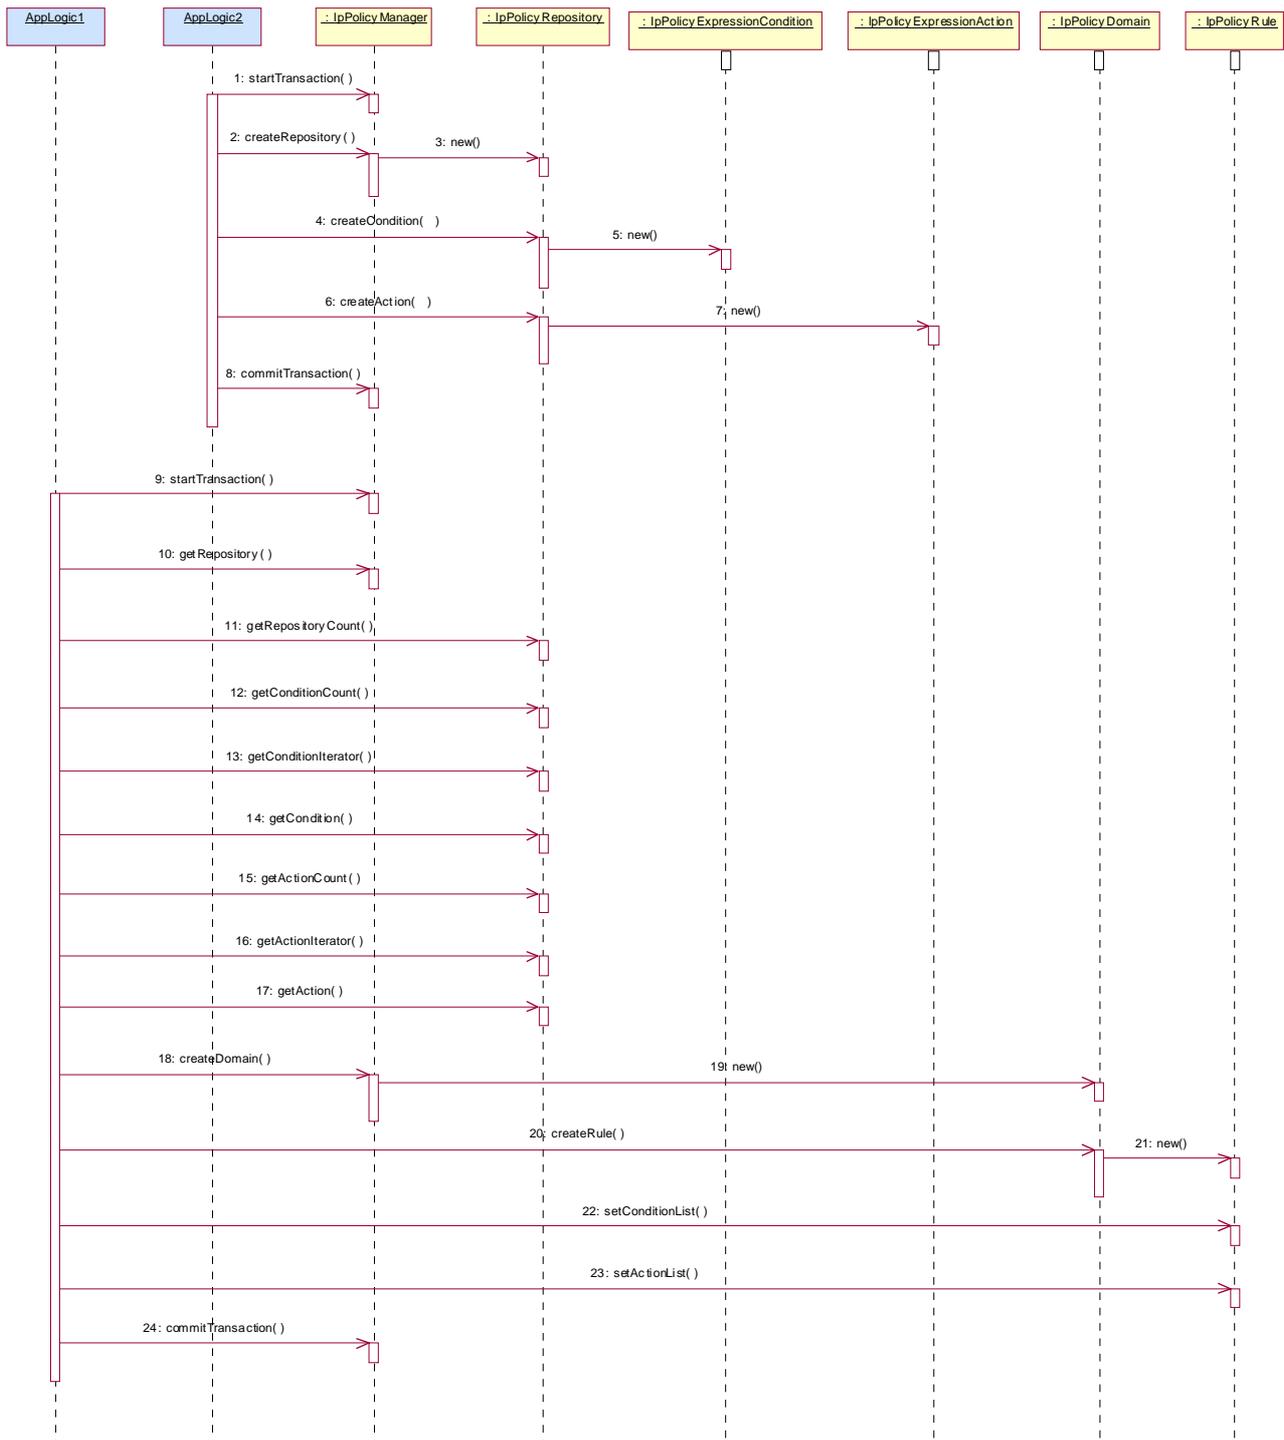

- 1: The creation of the repository by the Network Operator takes place within one transaction.
- 2: The method createRepository is invoked on the IpPolicyManager interface to create a new repository.
- 3: As a result of the createRepository method a new instance of the IpPolicyRepository interface is created. Its interface reference is returned as return parameter of the createRepository method.
- 4: The Network Operator creates an unattached condition in the new repository by invoking the createCondition method. For simplicity reasons, this is the same condition as in sequence 8 of the ASP example. The same condition attributes apply.
- 5: A new instance of the IpPolicyExpressionCondition interface is created.

- 6: The Network Operator creates an unattached action in the repository. Again, this is the same action as in sequence 10 of the ASP example. The same action attributes apply.
- 7: A new instance of the IpPolicyExpressionAction interface is created.
- 8: The Network Operator is finished with creating and populating the repository and closes the transaction.
- 9: Now that a repository exists, the ASP application can open a transaction to start creating a rule based on the conditions and actions stored in the repository.
- 10: The application invokes the getRepository to obtain a reference to the top-level repository. The returned reference in this case is the reference to the new repository just created by the Network Operator.
- 11: The application can invoke the getRepositoryCount method on the IpPolicyRepository interface to check whether there are any sub-repositories available. This is not the case for this example.
- 12: Before trying to obtain all available conditions in this repository the application retrieves the number of conditions by invoking the method getConditionCount.
- 13: The application can now invoke the getConditioniterator method to obtain the reference to an iterator that contains the names of each of the conditions contained by this repository that the application is authorized to see. As the previous method only return one available condition, this would be only one name, i.e. "SufficientCredit".
- 14: A reference to the condition can be obtained by invoking getCondition, with the condition name from the iterator as input parameter.
- 15: Similar to 12.
- 16: Similar to 13.
- 17: Similar to 14.
- 18: At this point in time the application has the names and references to the unattached condition and action from the repository it wants to use to create the rule. First a domain is created by invoking the createDomain method on the IpPolicyManager interface.
- 19: A new instance of the IpPolicyDomain interface is created.
- 20: The application invokes createRule to create a rule within the domain that was just created in flow 18 and 19.
- 21: A new instance of the IpPolicyRule interface is created.
- 22: By invoking the method setConditionList, the application can now apply the condition from the repository to this rule, by passing the condition reference, obtained by getCondition in flow 14, as an input parameter.
- 23: Similarly the application can apply the action to the rule by invoking setActionList.
- 24: Finally, once the rule is created using the condition and action from the policy repository, the transaction can be closed.


5.2 Introduce condition and action into rule

This sequence diagram describes how a specific policy rule is managed. A rule consists generally of conditions and of actions, the latter being evaluated if all conditions evaluate to true.

This sequence includes:

- creation of a condition and introduction of it into the rule;
- retrieval of an already defined action object from a repository and introduction into the rule;
- establishing a transaction bracket.

Presumption: the Application got a reference to the group, e.g. by having performed the sequence "create&modify" domain.

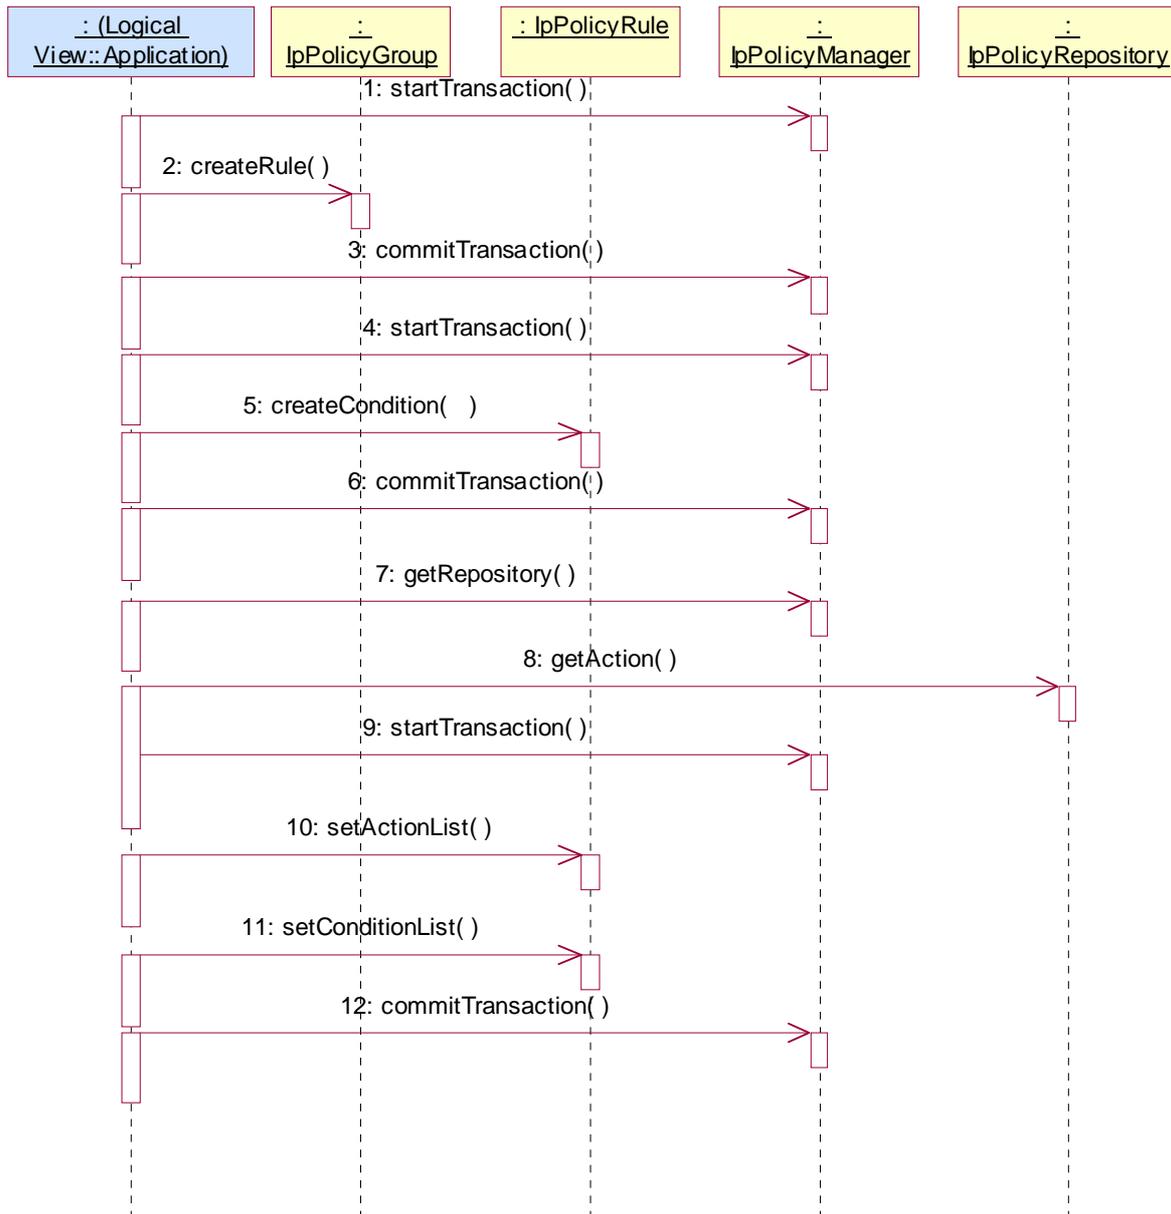

1: Opens the transaction bracket.

2: creates a rule object in the group by passing the name as parameter. The method returns the reference to the new rule object.

3: Closes the transaction bracket.

4: Opens the transaction bracket.

5: After having created the rule object one can "fill" it with actions and conditions. Here a condition is created on the rule object, thus becoming a part of the rule. Conditions defined in such a way cannot be reused in other rules. For this the repository approach should be used.

Parameters passed are the condition name and the condition type.

Returns a reference to this condition object.

As preliminary to the invocation of "createCondition", the application should perform the following activities:

1) Create a TpAttribute, with AttributeName: "Expression", AttributeType: P_STRING, AttributeValue:

"<the condition expression to be evaluated>"

2) Add the TpAttribute from 1) to a new TpAttributeSet as its sole element

After having performed these steps the application can call the method createCondition() on the appropriate repository or rule, passing in the name of the condition, the type of the condition IpPolicyExpressionCondition, and the TpAttributeSet created in 2). Note that this call may throw an exception if the expression defined in 1) is not parsable according to the published BNF.

Creating IpPolicyExpressionAction is done similarly.

6: Closes the transaction bracket.

7: Now we're using the repository approach, i.e. reusable condition or action objects. In this example we reuse an action.

For that purpose we ask at the IpPolicyManager interface for a reference to a named repository.

The repository name is passed.

Returns the reference to the repository.

8: If we know already the name of the action object one retrieves the action directly by passing the name as parameter. Otherwise one has to retrieve the name first by using an action iterator.

Returns a reference to the action object.

9: Opens the transaction bracket.

10: Now, the action(s) must be assigned to the rule. Furthermore and different to the conditions, one has to assign an ordering number to the action.

Passed parameter is the action list, which is a list of action reference/ sequence pairs.

11: After having created or retrieved all needed conditions they must be assigned to the rule. This is done by passing the list of condition to that method.

This is explicitly done by passing TpPolicyConditionList again consisting of TpPolicyConditionListElements which contains the reference the IpPolicyCondition object created with message 2.

If the rule is active, this will then cause the expression defined in the condition to be evaluated (as often as necessary). Note that the binding between the variables referenced in the expression and the instances of the variable available is done each time the expression is evaluated. That is, when evaluating a variable reference, each enclosing domain is searched in order (from closest to farthest) for a matching variable. If one is found, it is used. If no matching variable is set, the expression condition fails (evaluates to FALSE).

Activation of actions is done similarly.

12: Closes the transaction bracket.

5.3 Create and receive an event

This sequence shows how policy events are used.


For clarification we list the different policy related objects used:

- IpPolicyEventDefinition: The "template" used to define allowable events. The template is used to define formally a distinct type of rule condition and rule action, namely, IpPolicyEventCondition and IpPolicyEventAction.

- IpPolicyEventCondition: A special instance of a policy condition used in a rule. The condition evaluates to "True" on the occurrence of the event instance that is formally associated with it.- IpPolicyEventAction: A special instance of a policy action used in a rule. The action results in the generation of an instance of the formal event associated with it.

- TpPolicyEvent: This data type is passed as a parameter in the formal notification (to a client) of the occurrence of an instance of an event.

Presumption: the reference to a rule has been somehow retrieved.

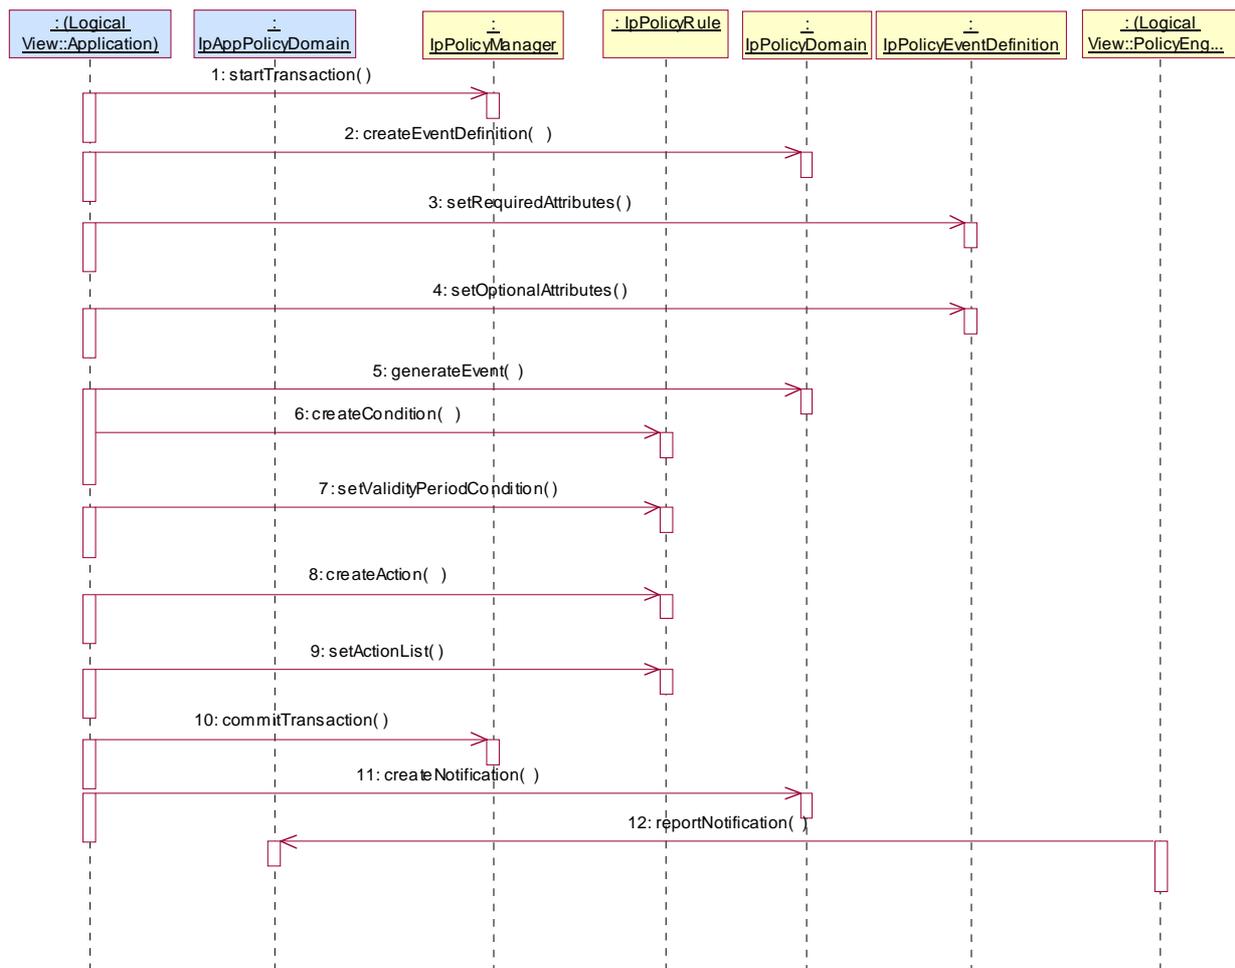

1: All changes of policy objects must be performed in a transaction bracket. This method opens the bracket.

2: This method creates a new event type. Event definitions describe the attributes of a specific event class, which can then be instantiated as policy condition or policy event. Returns the reference to the newly created EventDefinition instance which then can be modified according to ones needs.

3: Now, after having created a new instance of a policy event definition, one can set the required attributes by passing the respective attribute set ...

4: ... and the optional attributes. Such attributes may be (...).

5: This method can be used to test the newly created event by passing a attribute set and checking whether the expected event is generated.

6: This createCondition() method creates locally a PolicyTimePeriodCondition defining the validity period of this rule. Returns a reference to the new IpPolicyTimePeriodCondition object.

As preliminary to the invocation of "createCondition", the application should perform the following activities:

1) Create a set of TpAttribute setting the different time and dates applying to this condition. For instance, one attribute might be defined as:

TpAttribute.AttributeName (type: TpString)=TimePeriod

TpAttribute.AttributeType= P_STRING

TpAttribute.AttributeValue= "20000101T080000/20000131T120000"

the latter indicating the time period "January 1, 2000, 0800 through January 31, 2000, noon".

2) Add the set of TpAttributes from 1) to a new TpAttributeSet. This will be passed with createCondition().

7: Using the reference got with createCondition() the validity period is set to rule. Before this created condition will not become valid.

8: The assignment of a policy event is made as for other actions. The difference is the action type passed as parameter: it MUST be of type IpPolicyEventAction.

Passed parameters are the name of the created action, the action type and the attributes of the action; one of these attributes refers by name to the event definition as created before in this sequence.

Returns the reference to the newly created action object.

9: This method activates the action (here the action event) for this rule. After creation this action is not yet active.

The name of the action object is passed.

10: This closes the transaction bracket.

11: Now - independently of the activities before - the application can register with the policy domain for events of a certain type. If such an event occurs (as a result of rule's action) the application is notified.

Passed parameters are the callback interface reference and the list of event types the application is interested in.

Returns a sessionID.

12: In the policy engine complex, a certain event action is performed leading to an event the application registered for. In that case, the application is notified via the callback interface whose reference has been sent with enablePolicyNotification().


Parameters are the sessionID relating the this notification to the specific enablePolicyNotification()-call and the policyEvent arising.

5.4 Create and modify domain

This sequence describes how

- a top-level policy domain is created which is then maintained by the policy manager object;
- a list of domains managed by the policy manager is retrieved and a specific domain is accessed;
- how manipulations on this domain (in this example creation of group and removal of a rule) are performed;
- how the transaction control is initiated.

Presumption: the Application has received a reference to the IpPolicyManager interface.

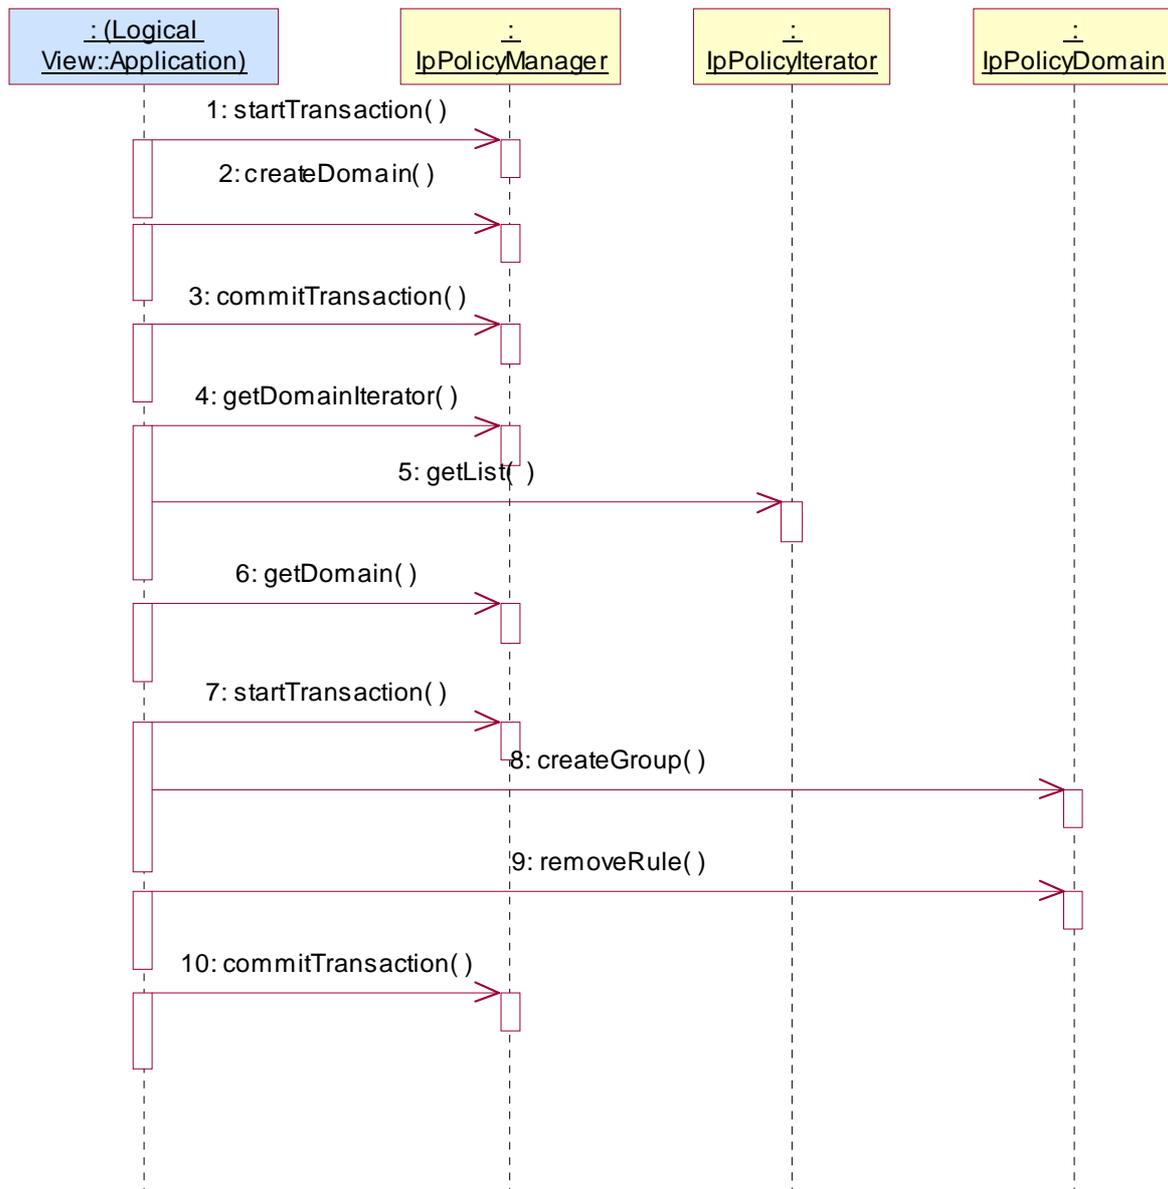

1: Opens the transaction bracket.

2: Creates a domain by providing the name of the to be created domain object as parameter. The method returns the reference to the domain object.

3: Closes the transaction bracket.

4: The user wants to get all domains handled by the policy manager. This method returns a policy iterator object which can be used to go through the available domains.

5: This method returns the list of domains starting with "index". For efficiency reasons the number of returned entries can be set with the parameter "numberRequested".

6: After having extracted one of the domain name as returned with getList(), the reference to this specific domain get be retrieved by passing the domain name with getDomain(). Returns the domain reference.

7: Opens the transaction bracket.

8: Now, one can act upon the domain, i.e. one can create, modify or delete objects in that domain. Valid objects are domains, groups, and rules.

In this example one creates a group by passing the name of the group to be created with createGroup().

Returns the reference to the new group.


9: Another action is to remove a rule. We assume here that the name of the rule (which is passed as parameter) is already known. Otherwise one has to retrieve the name by using the `IpRuleIterator` interface (the reference is got with `getRuleIterator()`).

Returns void.

10: Closes the transaction bracket.

5.5 ASP offering services to prepaid subscribers

The example shown here is based on an Application Service Provider (ASP) offering services to the prepaid subscribers of a certain Network Operator. The ASP discovers that, as part of the business logic of the applications it offers, the prepaid credit of the subscriber needs to be verified with regards to the current charge for the service in order to determine whether the purchase should be allowed or not. Rather than including this credit check in the business logic of each and every application that the ASP has in its service portfolio, the ASP may decide to enable a Policy Rule to be hosted in the Policy Engine of the Network Operator.

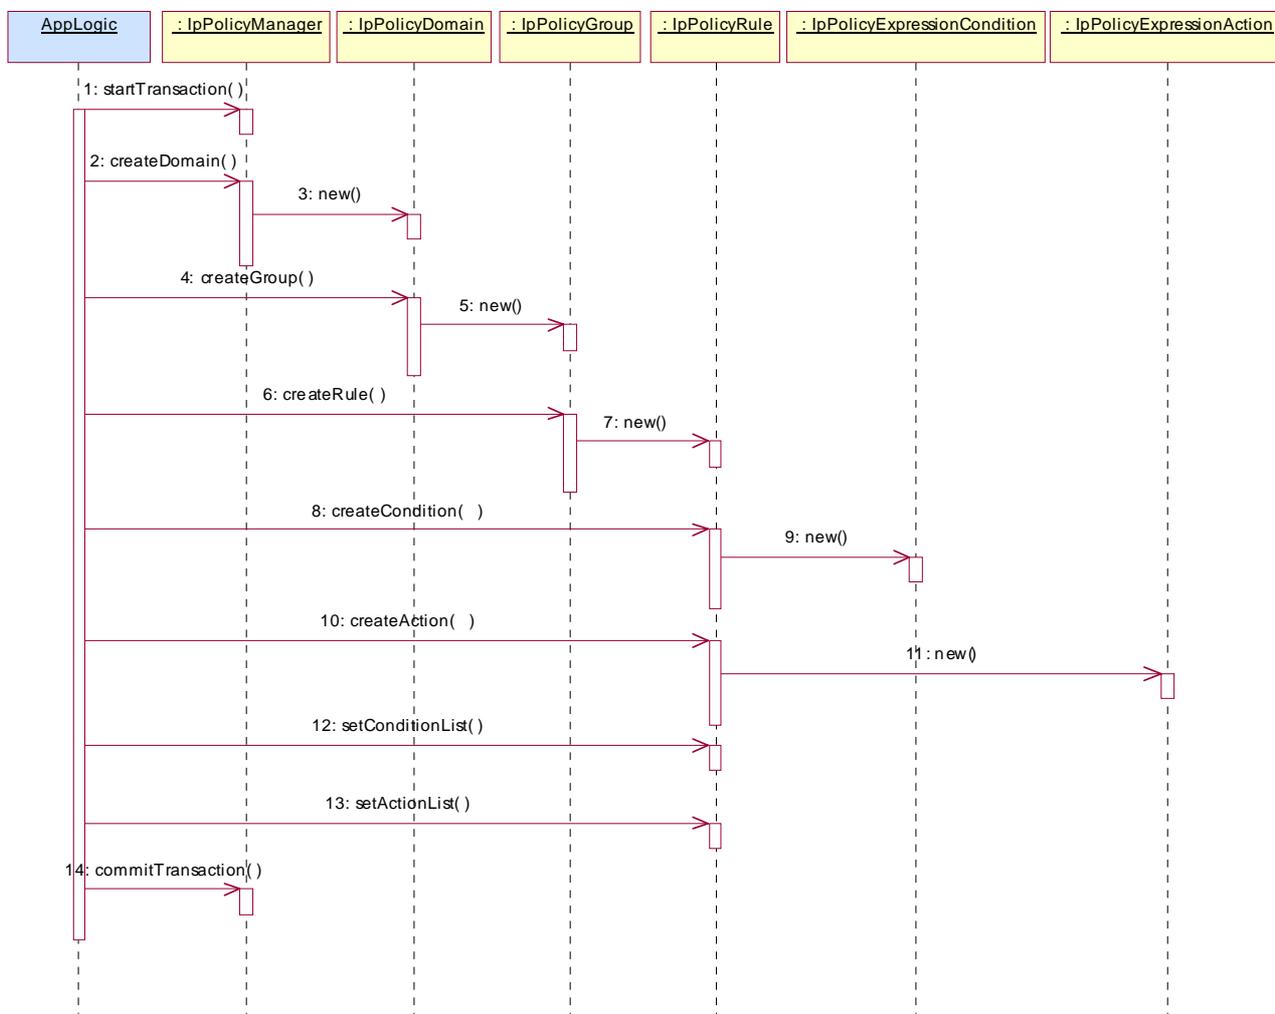

1: For the sake of this example, all activities to create a Domain, a Group, and the Rule are contained within a single transaction. The method `startTransaction` is used by the application to open the transaction.

2: The rule in this simplistic example is part of a single group, which in turn is contained within a single domain. The application creates that domain by invoking the method `createDomain`. The value of the parameter `domainName` is "eCommerceDomain".

3: As a result of the `createDomain` method a new instance of the `IpPolicyDomain` interface is created. Its interface reference is returned as return parameter of the `createDomain` method.

4: Once the domain is created a group is created within that domain. The application invokes the createGroup method, where the parameter groupName has value "PrePaidGroup".

5: As a result of the createGroup method a new instance of the IpPolicyGroup interface is created. Its interface reference is returned as return parameter of the createGroup method.

6: At this point in time there exists the "PrePaidGroup" group within the "eCommerceDomain" domain. The actual rule can be created, using the method createRule. The parameter ruleName has value "SufficientCreditRule". The new rule SufficientCreditRule has the following attributes:

- Enabled == TRUE; the policy rule is currently enabled.
- RuleUsage == NULL; no free-format usage recommendation is provided.
- Priority == 0; default value, as there is only one rule.
- Mandatory == TRUE; mandatory rule, evaluation of the expression must be attempted
- PolicyRoles == NULL; no roles defined
- ConditionListType == P_PM_DNF; disjunctive normal form (DNF)
- SequencedActions == 3; do not care, as there is only one rule.

7: A new instance of the IpPolicyRule interface is created. createRule returns the reference to this newly created interface.

8: Once an instance of IpPolicyRule exists, the actual policy rule can be constructed by means of conditions and actions. Invoking the method createCondition creates the condition. The parameter conditionName has value "SufficientCredit". The parameter conditionType has value "P_PM_EXPRESSION_CONDITION", to indicate that the condition must satisfy certain expressional syntax. The parameter conditionAttributes is a set of structures. For this example the set contains of only one attribute structure.

- ConditionAttribute.AttributeName = "SufficientCreditExpression"
- ConditionAttribute.AttributeType = "P_STRING"
- ConditionAttribute.AttributeValue = "PrePaidCredit > CurrentCharge"

Note that the variables "PrePaidCredit" and "CurrentCharge" in the expression of AttributeValue are assumed to be defined a priori. The value of the expression is derived from the core grammar expressed in the PM information model.

9: A new instance of the IpPolicyExpressionCondition interface is created.

10: The construction of the rule is completed by creating the action that is to be performed when the condition expression evaluates to TRUE. The parameter actionName has value "PurchaseAllowed". The parameter actionType has value "P_PM_EXPRESSION_ACTION" to indicate that the action must satisfy certain expressional syntax. The actionAttributes are again a set containing of only one structure.

- ActionAttribute.AttributeName = "PurchaseAllowedExpression"
- ActionAttribute.AttributeType = "P_STRING"
- ActionAttribute.AttributeValue = "AllowedPurchase == TRUE".

11: A new instance of the IpPolicyExpressionAction interface is created.

12: The attributes for the condition are set by invoking the method setConditionList. The conditionList is a list consisting of one structure:

- conditionList.Condition == <reference to the IpPolicyCondition interface returned by 9>
- conditionList.GroupNumber == 1; indicates how the conditions need to be grouped in DNF or CNF in case more groups of rules exist.
- conditionList.Negated == FALSE.


13: The attributes for the action are set by invoking the method setActionList. The actionList is a list consisting of only one structure:

- actionList.Action == <reference to the IpPolicyAction interface returned by step 10>
- actionList.SequenceNumber == 1;

14: The "SufficientCreditRule" now exists in the "PrePaidGroup" of the "eCommerceDomain". The rules is as follows:

IF "PrePaidCredit > CurrentCharge " THEN "AllowedPurchase == TRUE". This policy rule is enabled upon creation and it is mandatory for the policy engine to evaluate the rule.

The class IpPolicyDomain is defined as a generalized aggregation container, enabling PolicyDomains, PolicyGroups, and PolicyRules to be aggregated in a single container. The following figure shows how this container looks for the example.

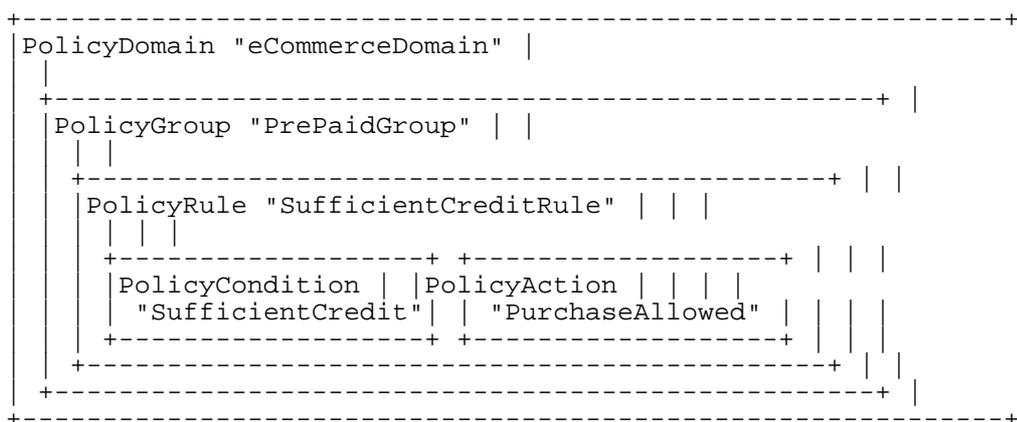

6 Class Diagrams

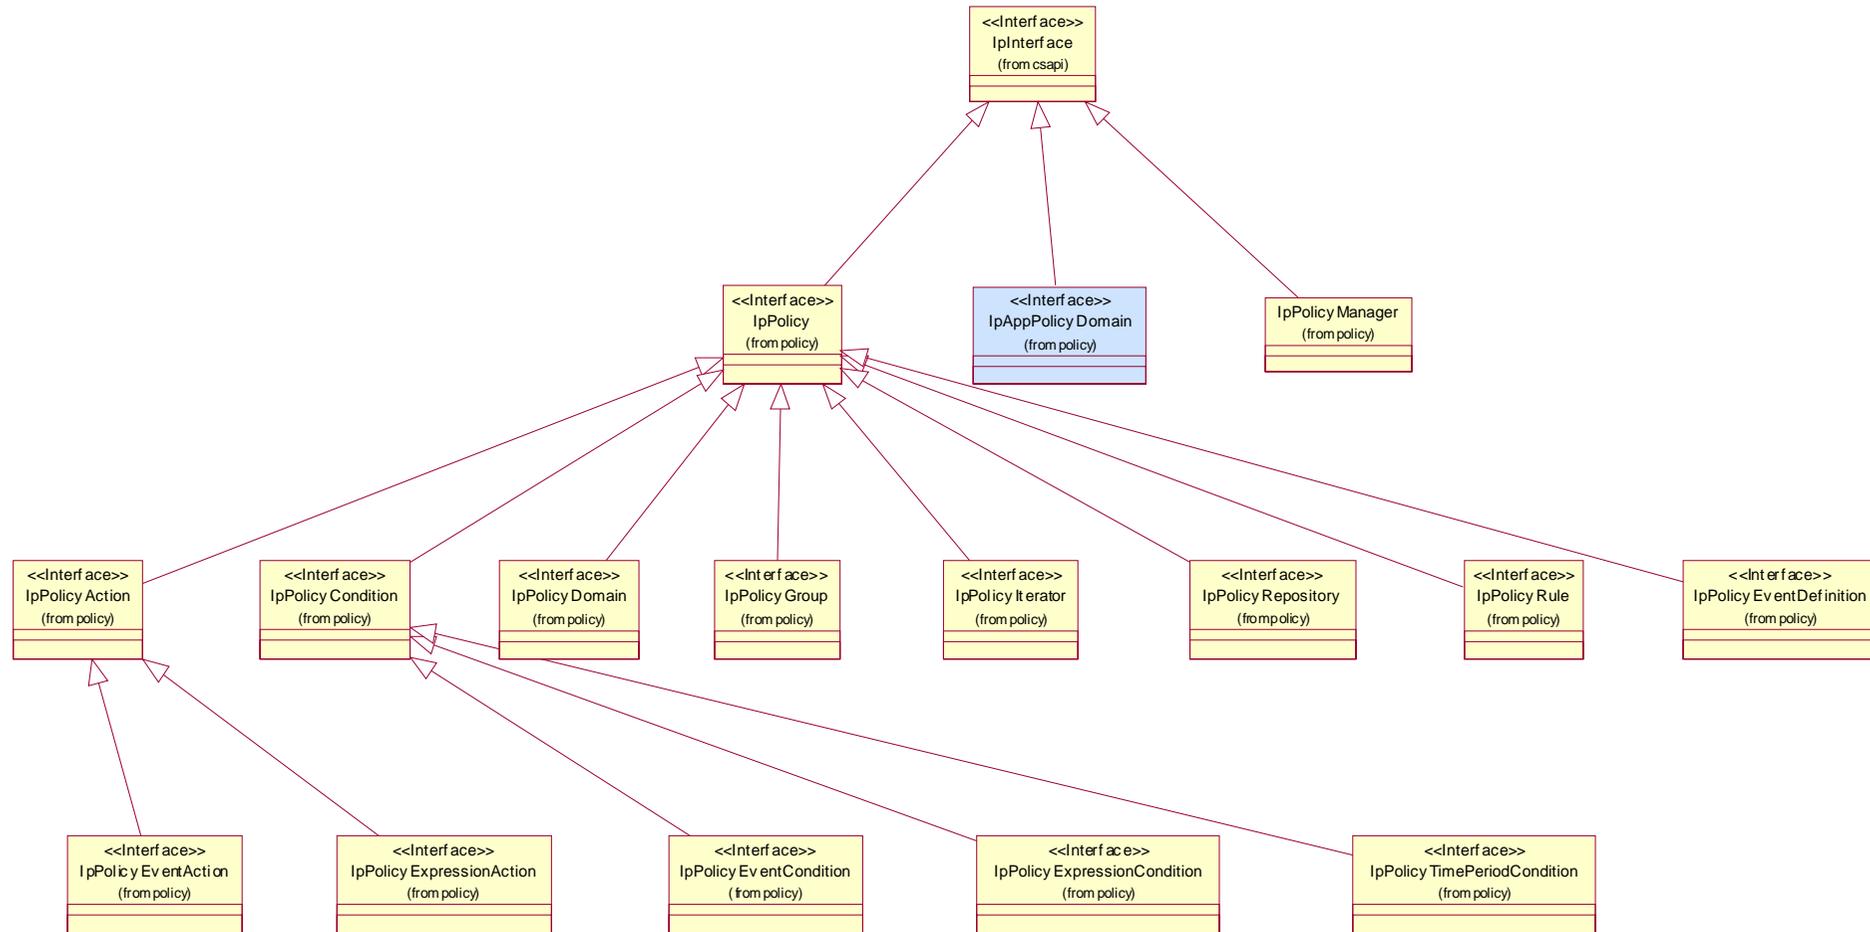


Figure 1: Policy Classes

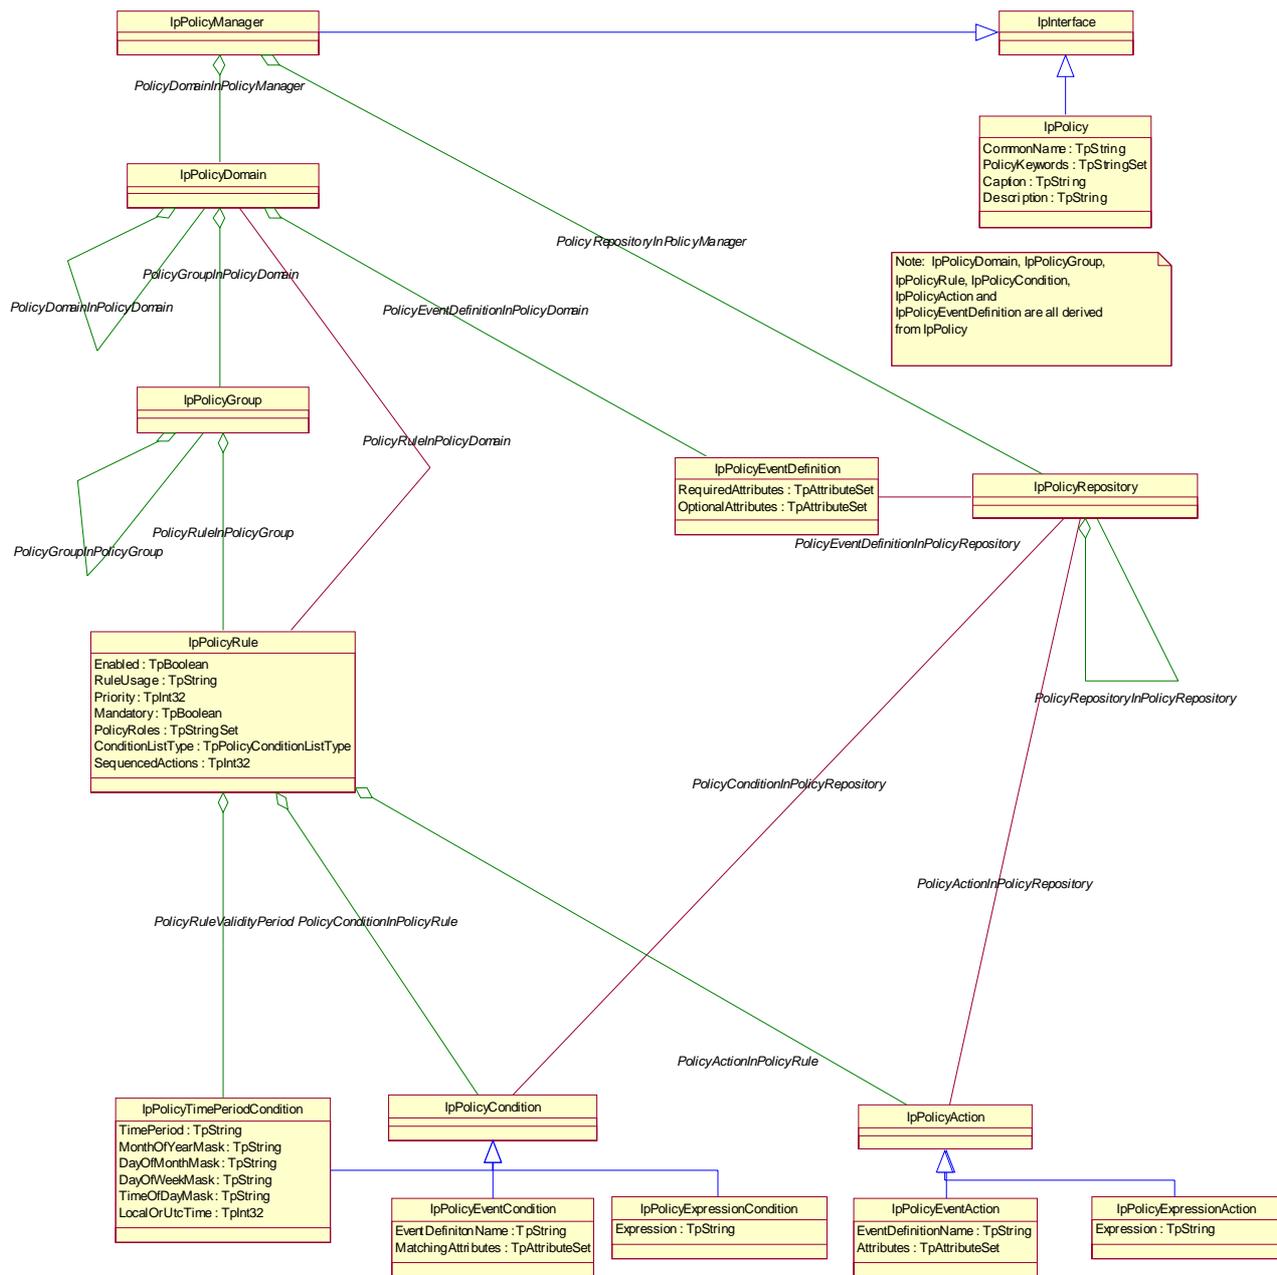


Figure 2: Policy Management Information Model

7 The Service Interface Specifications

7.1 Interface Specification Format

This clause defines the interfaces, methods and parameters that form a part of the API specification. The Unified Modelling Language (UML) is used to specify the interface classes. The general format of an interface specification is described below.

7.1.1 Interface Class

This shows a UML interface class description of the methods supported by that interface, and the relevant parameters and types. The Service and Framework interfaces for enterprise-based client applications are denoted by classes with name `Ip<name>`. The callback interfaces to the applications are denoted by classes with name `IpApp<name>`. For the interfaces between a Service and the Framework, the Service interfaces are typically denoted by classes with name `IpSvc<name>`, while the Framework interfaces are denoted by classes with name `IpFw<name>`.

7.1.2 Method descriptions

Each method (API method "call") is described. Both synchronous and asynchronous methods are used in the API. Asynchronous methods are identified by a 'Req' suffix for a method request, and, if applicable, are served by asynchronous methods identified by either a 'Res' or 'Err' suffix for method results and errors, respectively. To handle responses and reports, the application or service developer must implement the relevant `IpApp<name>` or `IpSvc<name>` interfaces to provide the callback mechanism.

7.1.3 Parameter descriptions

Each method parameter and its possible values are described. Parameters described as 'in' represent those that must have a value when the method is called. Those described as 'out' are those that contain the return result of the method when the method returns.


7.1.4 State Model

If relevant, a state model is shown to illustrate the states of the objects that implement the described interface.

7.2 Base Interface

7.2.1 Interface Class IpInterface

All application, framework and service interfaces inherit from the following interface. This API Base Interface does not provide any additional methods.

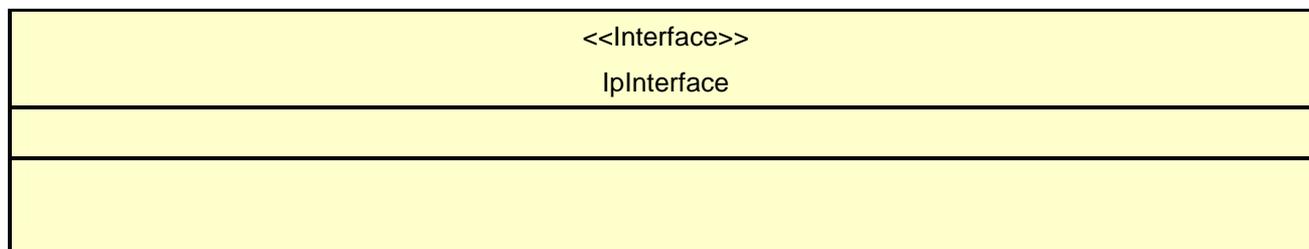

7.3 Service Interfaces

7.3.1 Overview

The Service Interfaces provide the interfaces into the capabilities of the underlying network - such as call control, user interaction, messaging, mobility and connectivity management.

The interfaces that are implemented by the services are denoted as 'Service Interface'. The corresponding interfaces that must be implemented by the application (e.g. for API callbacks) are denoted as 'Application Interface'.

7.4 Generic Service Interface

7.4.1 Interface Class IpService

Inherits from: IpInterface

All service interfaces inherit from the following interface.

<<Interface>> IpService
<pre> setCallback (appInterface : in IpInterfaceRef) : void setCallbackWithSessionID (appInterface : in IpInterfaceRef, sessionID : in TpSessionID) : void </pre>

7.4.1.1 Method setCallback()

This method specifies the reference address of the callback interface that a service uses to invoke methods on the application. It is not allowed to invoke this method on an interface that uses SessionIDs.

Parameters

appInterface : in IpInterfaceRef

Specifies a reference to the application interface, which is used for callbacks.

Raises

TpCommonExceptions, P_INVALID_INTERFACE_TYPE

7.4.1.2 Method setCallbackWithSessionID()

This method specifies the reference address of the application's callback interface that a service uses for interactions associated with a specific session ID: e.g. a specific call, or call leg. It is not allowed to invoke this method on an interface that does not use SessionIDs.

Parameters

appInterface : in IpInterfaceRef

Specifies a reference to the application interface, which is used for callbacks.

sessionID : in TpSessionID

Specifies the session for which the service can invoke the application's callback interface.

Raises

TpCommonExceptions, P_INVALID_SESSION_ID, P_INVALID_INTERFACE_TYPE

8 Policy Management Interface Classes

The Policy Management APIs defined below address the following :

- The creation, modification and viewing of policy information.

Generally, policy enabled services will be created by a network service provider. A policy service may also be created by an application service provider (ASP) and hosted in the network. Such services need not be based on published OSA specifications. However, they will be created using OSA policy management APIs, will conform to the OSA policy information model and will be accessible via OSA defined interfaces.

- Publishing of policy events supported by a service.
- Subscription to policy events supported by a service.
- Generation of events.
- Obtaining statistics associated with the use of policies.
- Handling of service level agreements (SLA). SLAs may be used to convey authorisation for access or subscription to policy information or to modify or create policy information.

8.1 Interface Class IpPolicyManager

Inherits from: IpInterface

Clients that wish to participate in Policy Management obtain a reference to an instance of the IpPolicyManager interface from the Framework. Using this reference, clients can obtain a reference to a policy domain of interest, iterate through the names of all policy domains, create a new policy domain, or remove an existing one. Clients can also obtain a reference to a policy repository, iterate through the names of all policy repositories, create a new policy repository or remove an existing one.

Note that all operations through Policy Management interfaces are subject to authorization checks - clients will only have permission to invoke methods as are allowed by the client's privileges as established by a prior agreement between the owner of the client and the owner of the policy management complex. Similarly, methods will only return data that the client is authorized to see. For example, if the client is authorized to see some of the top-level domains and not others, the IpPolicyIterator returned by getDomainIterator() will only return those domains that the client is authorized for.

<<Interface>> IpPolicyManager
<pre> createDomain (domainName : in TpString) : IpPolicyDomainRef getDomain (domainName : in org::csapi::Common Data::TpString) : IpPolicyDomainRef removeDomain (domainName : in org::csapi::Common Data::TpString) : void getDomainCount () : TpInt32 getDomainIterator () : IpPolicyIteratorRef findMatchingDomains (matchingAttributes : in TpAttributeSet) : TpStringSet createRepository (repositoryName : in org::csapi::Common Data::TpString) : IpPolicyRepositoryRef getRepository (repositoryName : in org::csapi::Common Data::TpString) : IpPolicyRepositoryRef removeRepository (repositoryName : in org::csapi::Common Data::TpString) : void getRepositoryCount () : TpInt32 getRepositoryIterator () : IpPolicyIteratorRef startTransaction () : void commitTransaction () : TpBoolean abortTransaction () : void </pre>

8.1.1 Method createDomain()

Create the specified top-level Policy Domain and get a reference to the new instance.

Returns a reference to the domain just created.

Parameters

domainName : in TpString

The name of the domain to create.

Returns

IpPolicyDomainRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.1.2 Method getDomain()

Get a reference to the specified top-level Domain.

Returns the reference to the domain.

Parameters

domainName : in org::csapi::Common Data::TpString

The name of the domain.

Returns

IpPolicyDomainRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR

8.1.3 Method removeDomain()

Remove the specified top-level domain.

Parameters

domainName : in org::csapi::Common Data::TpString

The name of the top-level domain to delete.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.1.4 Method getDomainCount()

Returns the number of top-level Policy Domains contained by the PolicyManager that the client is authorized to see.

Returns the number of domains.

Parameters

No Parameters were identified for this method

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.1.5 Method `getDomainIterator()`

Obtain a reference to an iterator that will return the names of each of the top-level Policy Domains known to the PolicyManager that the client is authorized to see.

Returns the reference to the iterator.

Parameters

No Parameters were identified for this method

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.1.6 Method `findMatchingDomains()`

Ask for the set of domains that contain attributes that match the specified set of attributes that the client is authorized to see. This could be used, for example, to get a list of all of the domains whose 'Role' is 'QOS'.

Returns the names of the matching top-level domains.

Parameters

matchingAttributes : in TpAttributeSet

Returns

TpStringSet

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.1.7 Method `createRepository()`

Create the specified top-level Policy Repository and get a reference to the new instance.

Returns a reference to the repository just created.

Parameters

repositoryName : in org::csapi::Common Data::TpString

The name of the Repository to create.

Returns

IpPolicyRepositoryRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.1.8 Method getRepository()

Get a reference to the specified top-level repository.

Returns a reference to the repository.

Parameters

repositoryName : in org::csapi::Common Data::TpString

The name of the repository.

Returns

IpPolicyRepositoryRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.1.9 Method removeRepository()

Remove the specified top-level Policy Repository.

Parameters

repositoryName : in org::csapi::Common Data::TpString

The name of the top-level Repository to delete.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.1.10 Method getRepositoryCount()

Returns the number of top-level Policy Repositories contained by the PolicyManager that the client is authorized to see.

Returns: The number of repositories.

Parameters

No Parameters were identified for this method.

Returns **TpInt32** *Raises* **TpCommonExceptions, P_ACCESS_VIOLATION**

8.1.11 Method getRepositoryIterator()

Obtain a reference to an iterator that will return the names of each of the top-level Policy Repositories known to the PolicyManager that the client is authorized to see.

Returns: The reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns **IpPolicyIteratorRef** *Raises* **TpCommonExceptions, P_ACCESS_VIOLATION**

8.1.12 Method startTransaction()

Open a transaction. All modifications to the policy information base up to the call to either commitTransaction() or abortTransaction() will be treated as part of this transaction.

Note that transaction brackets consisting of startTransaction() and commitTransaction() are generally used to perform changes in an atomic way, i.e. to ensure that either all changes are made persistent or all changes are undone in case of failure of even a single action. Any other clients reading data modified by this transaction will see the existing data until commitTransaction() is called. Any timeouts of this transaction are implementation specific. If a transaction is timed out, any subsequent attempt to make requests that require a transaction will throw the exception P_NO_TRANSACTION_IN_PROCESS.

Note, however, that the scope of transaction brackets is extended here: Large transaction brackets can be also useful for efficiency reasons even if the different actions are not atomic. Creation of a transaction introduces a significant overhead, reduction of the number of separate transactions reduces this. It is up to the application implementation to reflect this fact.

Note that transactions can not be nested, that is, a second call to startTransaction() without calling commitTransaction() or abortTransaction() in between will result in the exception P_TRANSACTION_IN_PROCESS being thrown during the second call.

Parameters

No Parameters were identified for this method.

Raises **TpCommonExceptions, P_ACCESS_VIOLATION, P_TRANSACTION_IN_PROCESS**

8.1.13 Method commitTransaction()

Commit a transaction. All modifications to the policy information base made since the last call to startTransaction() will be committed.

Returns: TRUE is returned if the commit succeeded and the policy information base has been updated, FALSE otherwise.

Parameters

No Parameters were identified for this method.

Returns

Boolean

Raises

CommonExceptions, P_NO_TRANSACTION_IN_PROCESS

8.1.14 Method abortTransaction()

Abort a transaction. All modifications to the policy information base made since the last call to startTransaction() will be discarded.

Parameters

No Parameters were identified for this method.

Raises

CommonExceptions, P_NO_TRANSACTION_IN_PROCESS

8.2 Interface Class IpPolicy

Inherits from: IpInterface

The base interface from which are derived all of the Policy interfaces (except IpPolicyManager). This interface documents four attributes for describing a policy-related instance. In the same way that the generic attribute accessor methods are defined in this base interface, these common attributes are documented here as well and each interface that is derived from IpPolicy will provide support for them.

Note that we could have defined dedicated get/set methods for each attribute, which would have the benefits of being potentially faster and safer, but this design approach was not taken, primarily to make it simpler to add additional attributes in the future without having to change the associated Interface.

<<Interface>> IpPolicy
<pre> getAttribute (attributeName : in TpString) : TpAttribute setAttribute (targetAttribute : in TpAttribute) : void getAttributes (attributeNames : in TpStringList) : TpAttributeSet setAttributes (targetAttributes : in TpAttributeSet) : void </pre>

8.2.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

8.2.2 Method `getAttribute()`

Get a copy of the specified attribute from the policy object. Note that modifying the returned attribute will not update the actual attribute of the object. See `setAttribute()` for that functionality.

Returns: A copy of the attribute.

Parameters

attributeName : in **TpString**

The name of the attribute to retrieve.

Returns

TpAttribute

Raises

TpCommonExceptions, **P_SYNTAX_ERROR**, **P_NAME_SPACE_ERROR**

8.2.3 Method `setAttribute()`

Set an attribute of a policy object.

Parameters

targetAttribute : in **TpAttribute**

The attribute to be set in this object.

Raises

TpCommonExceptions, **P_ACCESS_VIOLATION**, **P_NO_TRANSACTION_IN_PROCESS**

8.2.4 Method `getAttributes()`

Get a copy of the set of attributes for the policy object. Note that modifying the returned set will not update the actual attributes of the object. See `setAttributes()` for that functionality.

Returns: A copy of the attributes.

Parameters

attributeNames : in **TpStringList**

The list of names of the attributes to retrieve. In case the list of names is null or empty, all of the attributes will be returned.

<<Interface>>

IpPolicyDomain

```
getParentDomain () : IpPolicyDomainRef
createDomain (domainName : in TpString) : IpPolicyDomainRef
getDomain (domainName : in TpString) : IpPolicyDomainRef
removeDomain (domainName : in TpString) : void
getDomainCount () : TpInt32
getDomainIterator () : IpPolicyIteratorRef
createGroup (groupName : in TpString) : IpPolicyGroupRef
getGroup (groupName : in TpString) : IpPolicyGroupRef
removeGroup (groupName : in TpString) : void
getGroupCount () : TpInt32
getGroupIterator () : IpPolicyIteratorRef
createRule (ruleName : in TpString) : IpPolicyRuleRef
getRule (ruleName : in TpString) : IpPolicyRuleRef
removeRule (ruleName : in TpString) : void
getRuleCount () : TpInt32
getRuleIterator () : IpPolicyIteratorRef
createEventDefinition (eventDefinitionName : in TpString, requiredAttributes : in TpStringSet,
    optionalAttributes : in TpStringSet) : IpPolicyEventDefinitionRef
getEventDefinition (eventDefinitionName : in TpString) : IpPolicyEventDefinitionRef
removeEventDefinition (eventDefinitionName : in TpString) : void
getEventDefinitionCount () : TpInt32
getEventDefinitionIterator () : IpPolicyIteratorRef
generateEvent (eventDefinitionName : in TpString, attributes : in TpAttributeSet) : void
createNotification (appPolicyDomain : in IpAppPolicyDomainRef, events : in TpStringSet) : TpAssignmentID
destroyNotification (assignmentID : in TpAssignmentID, events : in TpStringSet) : void
createVariableSet (variableSetName : in TpString) : void
getVariableSet (variableSetName : in TpString) : TpAttributeSet
removeVariableSet (variableSetName : in TpString) : void
getVariableSetCount () : TpInt32
getVariableSetIterator () : IpPolicyIteratorRef
setVariable (variableSetName : in TpString, variable : in TpAttribute) : void
getVariable (variableSetName : in TpString, variableName : in TpString) : TpAttribute
```

8.3.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.

- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces *SHOULD* define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

Role : TpString

This attribute provides a way to specify higher-level context associated with a top-level domain, e.g. Role = Charging, Role = QOS, or Role = User Interaction, etc. This attribute can be used to search for domains that specify a particular Role by using the findMatchingDomains() method of the IpPolicyManager interface. This attribute must be explicitly set for each instance of an IpPolicyDomain. There is no default and values are not copied from the parent domain (if any).

Owner : TpString

This attribute provides a way to specify an owner of a top-level domain. This attribute can be used to search for domains that specify a particular Owner by using the findMatchingDomains() method of the IpPolicyManager interface. This attribute must be explicitly set for each instance of an IpPolicyDomain. There is no default and values are not copied from the parent domain (if any).

8.3.2 Method getParentDomain()

Return a reference to the domain that contains this one (if any). If this is a top-level domain, return a NULL reference.

Returns: A reference to the parent domain.

Parameters

No Parameters were identified for this method

Returns

IpPolicyDomainRef

Raises

TpCommonExceptions

8.3.3 Method createDomain()

Create the specified domain and get a reference to the new instance.

Returns: A reference to the domain just created.

Parameters

domainName : in TpString

The name of the domain to create.

Returns

IpPolicyDomainRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.4 Method getDomain()

Get a reference to the specified subdomain.

Returns: A reference to the domain.

Parameters

domainName : in TpString

The name of the subdomain to get.

*Returns***IpPolicyDomainRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR**

8.3.5 Method removeDomain()

Remove the specified subdomain.

*Parameters***domainName : in TpString**

The name of the subdomain to delete.

*Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.6 Method getDomainCount()

Returns the number of subdomains contained by this one that the client is authorized to see.

Returns: The number of subdomains.

Parameters

No Parameters were identified for this method.

*Returns***TpInt32***Raises***TpCommonExceptions, P_ACCESS_VIOLATION**

8.3.7 Method getDomainIterator()

Obtain a reference to an iterator that will return the names of each of the subdomains contained by this one that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

*Returns***IpPolicyIteratorRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION**

8.3.8 Method createGroup()

Create the specified group and get a reference to the new instance.

Returns: A reference to the group just created.

*Parameters***groupName : in TpString**

The name of the group to create.

*Returns***IpPolicyGroupRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.9 Method getGroup()

Get a reference to the specified group.

Returns: A reference to the group.

*Parameters***groupName : in TpString**

The name of the group to get.

*Returns***IpPolicyGroupRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.3.10 Method removeGroup()

Remove the specified group.

Parameters

groupName : in TpString

The name of the group to delete.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.11 Method getGroupCount()

Returns the number of groups contained by this domain that the client is authorized to see.

Returns: The number of groups.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.12 Method getGroupIterator()

Obtain a reference to an iterator that will return the names of each of the groups contained by this domain that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.13 Method createRule()

Create a rule with the specified name, and get a reference to the new instance.

Returns: A reference to the just created rule.

Parameters

ruleName : in TpString

The name of the rule to create.

Returns

IpPolicyRuleRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.14 Method getRule()

Get a reference to the specified rule.

Returns: A reference to the rule.

Parameters

ruleName : in TpString

The name of the rule to get.

Returns

IpPolicyRuleRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.3.15 Method removeRule()

Remove the specified rule.

Parameters

ruleName : in TpString

The name of the rule to delete.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.16 Method getRuleCount()

Returns the number of rules contained by this domain that the client is authorized to see.

Returns: The number of rules.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.17 Method getRuleIterator()

Obtain a reference to an iterator that will return the names of each of the rules contained by this domain that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.18 Method createEventDefinition()

Define a new event type, specifying the definition's name and the required and optional attributes that must/may appear in an instance of that event.

Returns: A reference to the newly created definition.

Parameters

eventDefinitionName : in TpString

The name of the definition of the new event.

requiredAttributes : in TpStringSet

The set of attributes that MUST be included in any event of this type.

optionalAttributes : in TpStringSet

A set of attributes that MAY be included in any event of this type.

Returns

IpPolicyEventDefinitionRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.19 Method `getEventDefinition()`

Get a reference to the definition of an event type.

Returns: A reference to the definition.

Parameters

eventDefinitionName : in TpString

The name of the event definition to get.

Returns

IpPolicyEventDefinitionRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.3.20 Method `removeEventDefinition()`

Remove the definition for an event from the domain.

Parameters

eventDefinitionName : in TpString

The name of the definition to remove.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.21 Method `getEventDefinitionCount()`

Returns the number of event definitions contained by this domain that the client is authorized to see.

Returns: The number of event definitions.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.22 Method `getEventDefinitionIterator()`

Obtain a reference to an iterator that will return the names of each of the definitions contained by this domain that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.23 Method `generateEvent()`

Generate an event using the attributes specified. Validate the attributes against the instance of `IpPolicyEventDefinition` specified by the `eventDefinitionName` parameter. Validation includes verifying that all of the attributes specified as required by the `IpPolicyEventDefinition` are included in the supplied attributes and that the supplied attributes do not include any attributes that are not specified as either required or optional by the `IpPolicyEventDefinition`.

See also: `IpPolicyEventAction`.

Parameters

eventDefinitionName : in TpString

The name of the definition of the event that will be used to validate attributes.

attributes : in TpAttributeSet

The attributes that will be included in the event instance that is generated.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.3.24 Method createNotification()

Allows a client to specify a set of events that they are interested in receiving. Once successfully subscribed, the client will receive copies of all generated events on the callback provided by the appPolicyDomain parameter.

Returns: An identifier for this subscription. When the client is no longer interested in receiving these events, it should call destroyNotification() with this identifier.

Parameters

appPolicyDomain : in IpAppPolicyDomainRef

The callback to be used to send generated events to the client.

events : in TpStringSet

The set of names of event definitions specifying the events the client wishes to subscribe to.

Returns

TpAssignmentID

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.3.25 Method destroyNotification()

Allows a client to indicate that it is no longer interested in receiving events that it previously subscribed to.

Parameters

assignmentID : in TpAssignmentID

The identifier the client received when it subscribed for the events.

events : in TpStringSet

If non-NULL and non-empty, this indicates the particular events that the client no longer wishes to receive. If NULL or empty, then the client is unsubscribing from all events associated with the specified identifier.

Raises

TpCommonExceptions, P_SYNTAX_ERROR

8.3.26 Method createVariableSet()

Used by clients to define a named collection of variables. Variables are attributes that can be updated by the client to reflect the current 'state' of the client. Since variables can be referenced by name from expression conditions and actions, the act of updating a variable may have a side effect of satisfying conditions in rules that are currently active. Variables that are defined by the network operator may be dynamically updated by the policy engine to reflect the current 'state' of the modelled networks and services.

Parameters

variableSetName : in TpString

The name of the new variable set.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.27 Method getVariableSet()

Get a variable set.

Returns: A variable set.

Parameters

variableSetName : in TpString

The name of the variable set to get.

Returns

TpAttributeSet

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.3.28 Method removeVariableSet()

Remove the variable set from the domain.

Parameters

variableSetName : in TpString

The name of the variable set to remove.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.3.29 Method `getVariableSetCount()`

Returns the number of variable sets contained by this domain that the client is authorized to see.

Returns: The number of variable sets.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.30 Method `getVariableSetIterator()`

Obtain a reference to an iterator that will return the names of each of the variable sets contained by this domain that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.3.31 Method `setVariable()`

Set a variable within a variable set.

Parameters

variableSetName : in TpString

The name of the variable set within which to set the specified variable.

variable : in TpAttribute

The variable to set.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

<<Interface>> IpPolicyGroup
<pre> getParentDomain () : IpPolicyDomainRef getParentGroup () : IpPolicyGroupRef createGroup (groupName : in TpString) : IpPolicyGroupRef getGroup (groupName : in TpString) : IpPolicyGroupRef removeGroup (groupName : in TpString) : void getGroupCount () : TpInt32 getGroupIterator () : IpPolicyIteratorRef createRule (ruleName : in TpString) : IpPolicyRuleRef getRule (ruleName : in TpString) : IpPolicyRuleRef removeRule (ruleName : in TpString) : void getRuleCount () : TpInt32 getRuleIterator () : IpPolicyIteratorRef </pre>

8.4.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

8.4.2 Method getParentDomain()

Get a reference to the domain that directly contains this group (if any). If this is a subgroup (whose immediate container is another group instead of a domain), return a NULL reference.

Returns: A reference to the containing domain.

Parameters

No Parameters were identified for this method

Returns

IpPolicyDomainRef

Raises

TpCommonExceptions

8.4.3 Method getParentGroup()

Return a reference to the group that contains this one (if any). If this is a top-level group, return a NULL reference.

Returns: A reference to the containing group.

Parameters

No Parameters were identified for this method

Returns

IpPolicyGroupRef

Raises

TpCommonExceptions

8.4.4 Method createGroup()

Create the specified group and get a reference to the new instance.

Returns: A reference to the group just created.

Parameters

groupName : in TpString

The name of the group to create.

Returns

IpPolicyGroupRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.4.5 Method getGroup()

Get a reference to the specified group.

Returns: A reference to the group.

Parameters

groupName : in TpString

The name of the group to get.

Returns

IpPolicyGroupRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.4.6 Method removeGroup()

Remove the specified group.

Parameters

groupName : in TpString

The name of the group to delete.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.4.7 Method getGroupCount()

Returns the number of groups contained by this group that the client is authorized to see.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.4.8 Method getGroupIterator()

Obtain a reference to an iterator that will return the names of each of the groups contained by this group that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.4.9 Method createRule()

Create a rule with the specified name, and get a reference to the new instance.

Returns: A reference to the just created rule.

Parameters

ruleName : in TpString

The name of the rule to create.

*Returns***IpPolicyRuleRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.4.10 Method getRule()

Get a reference to the specified rule.

Returns: A reference to the rule.

*Parameters***ruleName : in TpString**

The name of the rule to get.

*Returns***IpPolicyRuleRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.4.11 Method removeRule()

Remove the specified rule.

*Parameters***ruleName : in TpString**

The name of the rule to delete.

*Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.4.12 Method getRuleCount()

Returns the number of rules contained by this group that the client is authorized to see.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.4.13 Method getRuleIterator()

Obtain a reference to an iterator that will return the names of each of the rules contained by this group that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.5 Interface Class IpPolicyRepository

Inherits from: IpPolicy

A class representing a container for reusable policy-related information. Instances of PolicyConditions and PolicyActions can be defined here and then referenced from one or more PolicyRules. Note that some instantiations of the Policy Management service will have Repositories that have been pre-defined by the Service Provider, with pre-defined PolicyConditions and PolicyActions. It may also be possible that clients with the appropriate authorizations will be able to define new Repositories and/or add new PolicyConditions and PolicyActions to existing Repositories.

<<Interface>> IpPolicyRepository
<pre> getParentRepository () : IpPolicyRepositoryRef createRepository (repositoryName : in TpString) : IpPolicyRepositoryRef getRepository (repositoryName : in TpString) : IpPolicyRepositoryRef removeRepository (repositoryName : in TpString) : void getRepositoryCount () : TpInt32 getRepositoryIterator () : IpPolicyIteratorRef createCondition (conditionName : in TpString, conditionType : in TpPolicyConditionType, conditionAttributes : in TpAttributeSet) : IpPolicyConditionRef getCondition (conditionName : in TpString) : IpPolicyConditionRef removeCondition (conditionName : in TpString) : void </pre>

```

getConditionCount () : TpInt32
getConditionIterator () : IpPolicyIteratorRef
createAction (actionName : in TpString, actionType : in TpPolicyActionType, actionAttributes : in
    TpAttributeSet) : IpPolicyActionRef
getAction (actionName : in TpString) : IpPolicyActionRef
removeAction (actionName : in TpString) : void
getActionCount () : TpInt32
getActionIterator () : IpPolicyIteratorRef

```

8.5.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

8.5.2 Method getParentRepository()

Return a reference to the repository that contains this one (if any). If this is a top-level repository, return a NULL reference.

Returns: A reference to the parent repository.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyRepositoryRef

Raises

TpCommonExceptions

8.5.3 Method createRepository()

Create the specified repository and get a reference to the new instance.

Returns: A reference to the repository just created.

Parameters

repositoryName : in TpString

The name of the repository to create.

Returns

IpPolicyRepositoryRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.5.4 Method getRepository()

Get a reference to the specified subrepository.

Returns: A reference to the repository.

Parameters

repositoryName : in TpString

The name of the subrepository to get.

*Returns***IpPolicyRepositoryRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.5.5 Method removeRepository()

Remove the specified subrepository.

*Parameters***repositoryName : in TpString**

The name of the subrepository to delete.

*Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.5.6 Method getRepositoryCount()

Returns the number of subrepositories contained by this repository that the client is authorized to see.

Parameters

No Parameters were identified for this method.

*Returns***TpInt32***Raises***TpCommonExceptions, P_ACCESS_VIOLATION**

8.5.7 Method getRepositoryIterator()

Obtain a reference to an iterator that will return the names of each of the subrepositories contained by this one that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

*Returns***IpPolicyIteratorRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION**

8.5.8 Method createCondition()

Create a reusable condition. References to the newly created condition can be used in one or more PolicyRules.

Returns: The reference to the newly created condition.

*Parameters***conditionName : in TpString**

The name uniquely identifying this condition within this repository.

conditionType : in TpPolicyConditionType

The type specifying which IpPolicyCondition class should be created. For this version of the Policy Management API, it must be one of P_PM_TIME_PERIOD_CONDITION, P_PM_EVENT_CONDITION, or P_PM_EXPRESSION_CONDITION.

conditionAttributes : in TpAttributesSet

The attributes specifying the condition.

*Returns***IpPolicyConditionRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.5.9 Method getCondition()

Get a reference to the specified condition.

Returns: A reference to the specified condition.

*Parameters***conditionName : in TpString**

The name of the condition to get.

*Returns***IpPolicyConditionRef***Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.5.10 Method removeCondition()

Remove the specified condition.

*Parameters***conditionName : in TpString**

The name of the condition to delete.

*Raises***TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.5.11 Method getConditionCount()

Returns the number of conditions contained by this repository that the client is authorized to see.

Returns: The number of conditions.

Parameters

No Parameters were identified for this method.

*Returns***TpInt32***Raises***TpCommonExceptions, P_ACCESS_VIOLATION**

8.5.12 Method getConditionIterator()

Obtain a reference to an iterator that will return the names of each of the conditions contained by this repository that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.5.13 Method createAction()

Create a reusable action. References to the newly created action can be used in one or more PolicyRules.

Returns: The reference to the newly created action.

Parameters

actionName : in TpString

The name uniquely identifying this action within this repository.

actionType : in TpPolicyActionType

The type specifying which IpPolicyAction class should be created. For this version of the Policy Management API, it must be one of P_PM_EVENT_ACTION, or P_PM_EXPRESSION_ACTION.

actionAttributes : in TpAttributeSet

The attributes specifying the action.

Returns

IpPolicyActionRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.5.14 Method getAction()

Get a reference to the specified action.

Returns: A reference to the specified action.

Parameters

actionName : in TpString

The name of the action to get.

Returns

IpPolicyActionRef

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR**

8.5.15 Method removeAction()

Remove the specified action.

Parameters

actionName : in TpString

The name of the action to delete.

Raises

**TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR,
P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS**

8.5.16 Method getActionCount()

Returns the number of actions contained by this repository that the client is authorized to see.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.5.17 Method getActionIterator()

Obtain a reference to an iterator that will return the names of each of the actions contained by this repository that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

indicate two acceptable orders: A,C,B,D or C,A,B,D, since A and C can be performed in either order, but only at the '1' position.

- The values
 0:ACTION A
 2:ACTION B
 3:ACTION C
 3:ACTION D

require that B,C, and D occur either as B,C,D or as B,D,C. Action A may appear at any point relative to B,C, and D. Thus the complete set of acceptable orders is: A,B,C,D; B,A,C,D; B,C,A,D; B,C,D,A; A,B,D,C; B,A,D,C; B,D,A,C; B,D,C,A.

Note that the non-zero sequence numbers need not start with '1', and they need not be consecutive. All that matters is their relative magnitude.

<<Interface>> IpPolicyRule
<pre> getParentGroup () : IpPolicyGroupRef getParentDomain () : IpPolicyDomainRef createCondition (conditionName : in TpString, conditionType : in TpPolicyConditionType, conditionAttributes : in TpAttributeSet) : IpPolicyConditionRef getCondition (conditionName : in TpString) : IpPolicyConditionRef removeCondition (conditionName : in TpString) : void getConditionCount () : TpInt32 getConditionIterator () : IpPolicyIteratorRef createAction (actionName : in TpString, actionType : in TpPolicyActionType, actionAttributes : in TpAttributeSet) : IpPolicyActionRef getAction (actionName : in TpString) : IpPolicyActionRef removeAction (actionName : in TpString) : void getActionCount () : TpInt32 getActionIterator () : IpPolicyIteratorRef setValidityPeriodConditionByName (conditionName : in TpString) : void setValidityPeriodCondition (conditionReference : in IpPolicyTimePeriodConditionRef) : void getValidityPeriodCondition () : IpPolicyTimePeriodConditionRef unsetValidityPeriodCondition () : void setConditionList (conditionList : in TpPolicyConditionList) : void getConditionList () : TpPolicyConditionList setActionList (actionList : in TpPolicyActionList) : void getActionList () : TpPolicyActionList </pre>

8.6.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.

- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces *SHOULD* define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

Enabled : TpBoolean

This attribute indicates whether a policy rule is currently enabled, from an administrative point of view. Its purpose is to allow a policy administrator to enable or disable a policy rule without having to add it to, or remove it from, the policy repository.

Note that unlike [PCIM], this attribute does not support the value 'enabledForDebug'. It was considered confusing that Enabled was not a boolean attribute. Support for debugging, including the ability to specify that the entity evaluating the policy condition(s) is being told to evaluate the conditions for the policy rule, but not to perform the actions if the conditions evaluate to TRUE, will be considered for a later release.

RuleUsage : TpString

This attribute is a free-form string that recommends how this policy should be used.

Priority : TpInt32

This attribute provides a non-negative integer for prioritising policy rules relative to each other. Larger integer values indicate higher priority. Since one purpose of this attribute is to allow specific, ad hoc policy rules to temporarily override established policy rules, an instance that has this attribute set has a higher priority than all instances that use or set the default value of zero.

Prioritisation among policy rules provides a basic mechanism for resolving policy conflicts.

Mandatory : TpBoolean

This attribute indicates whether evaluation (and possibly action execution) of a PolicyRule is mandatory or not. Its concept is similar to the ability to mark packets for delivery or possible discard, based on network traffic and device load.

The evaluation of a PolicyRule MUST be attempted if the Mandatory attribute value is TRUE. If the Mandatory attribute value of a PolicyRule is FALSE, then the evaluation of the rule is "best effort" and MAY be ignored.

PolicyRoles : TpStringSet

This attribute represents the roles and role combinations associated with a policy rule. Each value represents one role combination. Since this is a multi-valued attribute, more than one role combination can be associated with a single policy rule. Each value is a string of the form

<RoleName>[&&<RoleName>]*

where the individual role names appear in alphabetical order.

ConditionListType : TpPolicyConditionListType

This attribute is used to specify whether the list of policy conditions associated with this policy rule is in disjunctive normal form (DNF) or conjunctive normal form (CNF). If this attribute is not present, the list type defaults to DNF.

SequencedActions : TpInt32

This attribute gives a policy administrator a way of specifying how the ordering of the policy actions associated with this PolicyRule is to be interpreted. Three values are supported:

- mandatory(1): Do the actions in the indicated order, or do not do them at all.
- recommended(2): Do the actions in the indicated order if you can, but if you cannot do them in this order, do them in another order if you can.
- dontCare(3): Do them -- I do not care about the order.

When error / event reporting is addressed for the Policy Framework, suitable codes will be defined for reporting that a set of actions could not be performed in an order specified as mandatory (and thus were not performed at all), that a set of actions could not be performed in a recommended order (and moreover could not be performed in any order), or that a set of actions could not be performed in a recommended order (but were performed in a different order).

8.6.2 Method getParentGroup()

Return a reference to the PolicyGroup that directly contains this Rule (if any). If this Rule is contained by a PolicyDomain, return a NULL reference.

Returns: The reference to the PolicyGroup.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyGroupRef

Raises

TpCommonExceptions

8.6.3 Method getParentDomain()

Return a reference to the PolicyDomain that directly contains this Rule (if any). If this Rule is contained by a PolicyGroup, return a NULL reference.

Returns: The reference to the PolicyDomain to get.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyDomainRef

Raises

TpCommonExceptions

8.6.4 Method createCondition()

Create a new condition local to this Rule. Conditions created local to a Rule can only be referenced from that Rule. For reusable conditions, see IpPolicyRepository.

Returns: The reference to the newly created condition.

Parameters

conditionName : in TpString

The name uniquely identifying this condition within this rule.

conditionType : in TpPolicyConditionType

The type specifying which IpPolicyCondition class should be created. For this version of the Policy Management API, it must be one of P_PM_TIME_PERIOD_CONDITION, P_PM_EVENT_CONDITION, or P_PM_EXPRESSION_CONDITION.

conditionAttributes : in TpAttributeSet

The initial attributes for this condition.

Returns

IpPolicyConditionRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.6.5 Method getCondition()

Get a reference to the specified condition.

Returns: A reference to the specified condition.

Parameters

conditionName : in TpString

The name of the condition to get.

Returns

IpPolicyConditionRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR

8.6.6 Method removeCondition()

Remove the specified condition.

Parameters

conditionName : in TpString

The name of the condition to delete.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.6.7 Method getConditionCount()

Returns the number of conditions contained by this rule that the client is authorized to see.

Parameters

No Parameters were identified for this method

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.6.8 Method getConditionIterator()

Obtain a reference to an iterator that will return the names of each of the conditions contained by this rule that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.6.9 Method createAction()

Create a new action local to this Rule. Actions created local to a Rule can only be referenced from that Rule. For reusable actions, see IpPolicyRepository.

Returns: The reference to the newly created action.

Parameters

actionName : in TpString

The name uniquely identifying this action within this rule.

actionType : in TpPolicyActionType

The type specifying which IpPolicyAction class should be created. For this version of the Policy Management API, it must be one of P_PM_EVENT_ACTION, or P_PM_EXPRESSION_ACTION.

actionAttributes : in TpAttributeSet

The attributes specifying the action.

Returns

IpPolicyActionRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.6.10 Method `getAction()`

Get a reference to the specified action.

Returns: A reference to the specified action.

Parameters

actionName : in TpString

The name of the action to get.

Returns

IpPolicyActionRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR

8.6.11 Method `removeAction()`

Remove the specified action.

Parameters

actionName : in TpString

The name of the action to delete.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.6.12 Method `getActionCount()`

Returns the number of actions contained by this rule that the client is authorized to see.

Parameters

No Parameters were identified for this method.

Returns

TpInt32

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.6.13 Method `getActionIterator()`

Obtain a reference to an iterator that will return the names of each of the actions contained by this rule that the client is authorized to see.

Returns: A reference to the iterator.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyIteratorRef

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.6.14 Method `setValidityPeriodConditionByName()`

Set the validity period for the rule, specifying the name of a condition of type `IpValidityPeriodCondition`. Since the condition is specified by name, the condition must be defined local to this rule.

Parameters

conditionName : in TpString

Name identifying a condition local to this rule.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NAME_SPACE_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.6.15 Method `setValidityPeriodCondition()`

Set the validity period for the rule, providing a reference to a condition of type `IpValidityPeriodCondition`. Since the condition is specified by reference, the condition may be defined local to rule or may be a condition defined in a `PolicyRepository`.

Parameters

conditionReference : in IpPolicyTimePeriodConditionRef

Reference to the condition to be used to set the validity period condition.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_NO_TRANSACTION_IN_PROCESS

8.6.16 Method `getValidityPeriodCondition()`

Get a reference to the condition used to set the validity period condition for this rule.

Returns: The reference to the condition. This will be a NULL reference if the validity period condition is not set.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyTimePeriodConditionRef

Raises

TpCommonExceptions

8.6.17 Method `unsetValidityPeriodCondition()`

Unset the validity period condition for this rule. When the validity period condition is not set, the rule is always active.

Parameters

No Parameters were identified for this method.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_NO_TRANSACTION_IN_PROCESS

8.6.18 Method `setConditionList()`

Set the condition list of this rule, specifying each triple of condition, Group Number and Negated attributes. See the text under IpPolicyRule above for a description of the use of these two attributes. Note that although a condition may be contained by a rule (by creating the condition within the rule using `createCondition()`), it is not evaluated as part of the rule's condition list until it is included in the list specified by this method.

Parameters

conditionList : in TpPolicyConditionList

List of (Condition reference, Group Number, Negated) triples and the value ConditionListType indicating whether the conditions are in DNF or CNF.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.6.19 Method getConditionList()

Get the condition list set for the rule.

Returns: The condition list currently set for this rule.

Parameters

No Parameters were identified for this method.

Returns

TpPolicyConditionList

Raises

TpCommonExceptions, P_ACCESS_VIOLATION

8.6.20 Method setActionList()

Set the list of actions for this rule, specifying each pair of Action and SequenceNumber. See the text under IpPolicyRule above for a description of the use of this attribute. Note that although an action may be contained by a rule (by creating the action within the rule using createAction()), it is not evaluated as part of the rule's actions until it is included in the list specified by this method.

Parameters

actionList : in TpPolicyActionList

List of (Action Reference, Sequence Number) pairs.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_SYNTAX_ERROR, P_NO_TRANSACTION_IN_PROCESS

8.6.21 Method getActionList()

Get the action list set for the rule.

Returns: The action list currently set for this rule.

Parameters

No Parameters were identified for this method.

Returns

TpPolicyActionList

Raises


TpCommonExceptions, P_ACCESS_VIOLATION

8.7 Interface Class IpPolicyCondition


Inherits from: IpPolicy

The purpose of a policy condition is to determine whether or not the set of actions (aggregated in the PolicyRule that the condition applies to) should be executed or not. For the purposes of the Policy Core Information Model, all that matters about an individual PolicyCondition is that it evaluates to TRUE or FALSE. (The individual PolicyConditions associated with a PolicyRule are combined to form a compound expression in either DNF or CNF, but this is accomplished via the ConditionList, discussed above. A logical structure within an individual PolicyCondition may also be introduced, but this would have to be done in a subclass of PolicyCondition.

Because it is general, the PolicyCondition class does not itself contain any "real" conditions. These will be represented by attributes of the domain-specific subclasses of PolicyCondition.

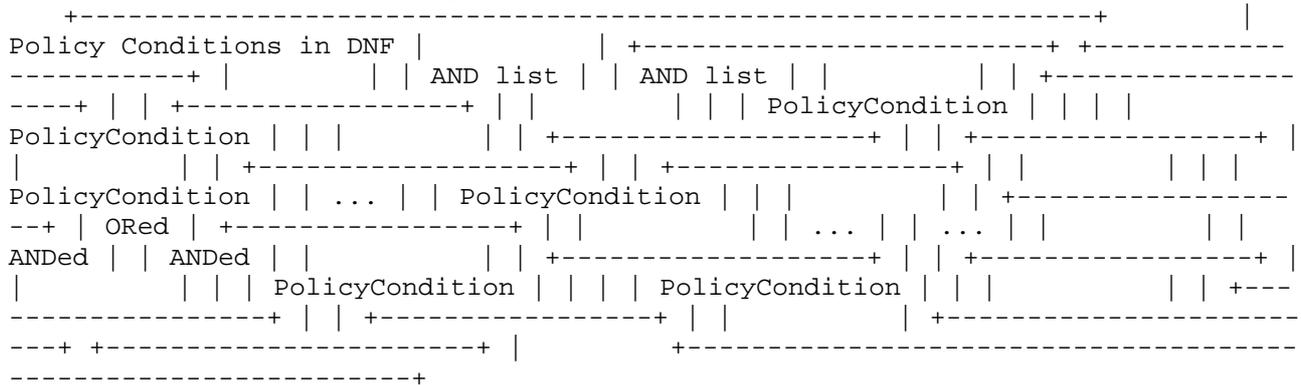

The figure above illustrates that when policy conditions are in DNF, there are one or more sets of conditions that are ANDed together to form AND lists. An AND list evaluates to TRUE if and only if all of its constituent conditions evaluate to TRUE. The overall condition then evaluates to TRUE if and only if at least one of its constituent AND lists evaluates to TRUE.

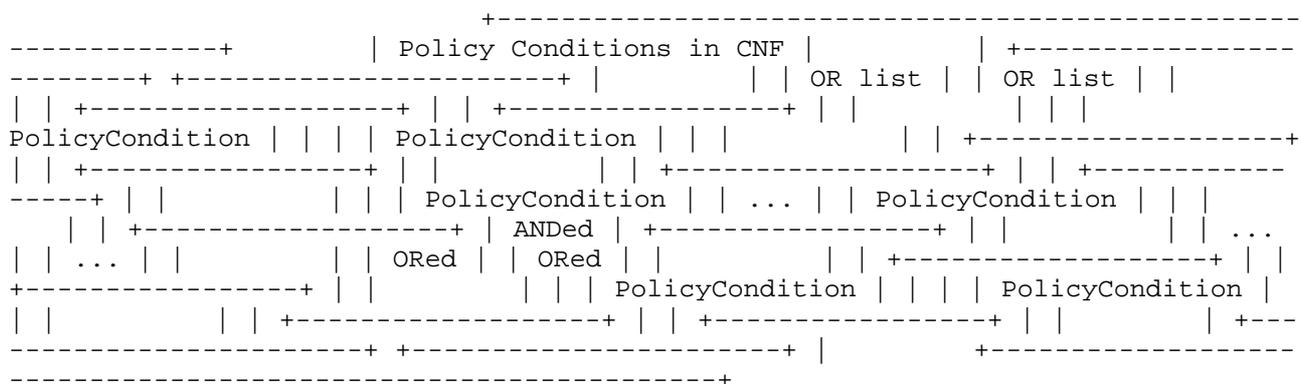

In the figure above, the policy conditions are in CNF. Consequently, there are one or more OR lists, each of which evaluates to TRUE if and only if at least one of its constituent conditions evaluates to TRUE. The overall condition then evaluates to TRUE if and only if ALL of its constituent OR lists evaluate to TRUE.

When identifying and using the PolicyCondition class, it is necessary to remember that a condition can be rule-specific or reusable. This was discussed above. The distinction between the two types of policy conditions lies in the associations in which an instance can participate, and in how the different instances are named. Conceptually, a reusable policy condition resides in a policy repository, and is named within the scope of that repository. On the other hand, a rule-specific policy condition is, as the name suggests, named within the scope of the single policy rule to which it is related.

<<Interface>> IpPolicyCondition
getParentRepository () : IpPolicyRepositoryRef getParentRule () : IpPolicyRuleRef

8.7.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

8.7.2 Method getParentRepository()

Return a reference to the repository that contains this condition (if any). If this condition is contained by a rule, return a NULL reference.

Returns: A reference to the parent repository.

Parameters

No Parameters were identified for this method

Returns

IpPolicyRepositoryRef

Raises

TpCommonExceptions

8.7.3 Method getParentRule()

Return a reference to the rule that contains this condition (if any). If this condition is contained by a PolicyRepository, return a NULL reference.

Returns: A reference to the parent rule.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyRuleRef

Raises

TpCommonExceptions

8.8 Interface Class IpPolicyTimePeriodCondition

Inherits from: IpPolicyCondition

This class provides a means of representing the time periods during which a policy rule is valid, i.e. active. At all times that fall outside these time periods, the policy rule has no effect. A policy rule is treated as valid at all times if it does not specify a PolicyTimePeriodCondition.

In some cases a PDP may need to perform certain setup / cleanup actions when a policy rule becomes active / inactive. For example, sessions that were established while a policy rule was active might need to be taken down when the rule becomes inactive. In other cases, however, such sessions might be left up: in this case, the effect of deactivating the policy rule would just be to prevent the establishment of new sessions. Setup / cleanup behaviours on validity period transitions are not currently addressed by the PCIM, and must be specified in 'guideline' documents, or via subclasses of PolicyRule, PolicyTimePeriodCondition or other concrete subclasses of Policy. If such behaviours need to be under the control of the policy administrator, then a mechanism to allow this control must also be specified in the subclass.

PolicyTimePeriodCondition is defined as a subclass of PolicyCondition. This is to allow the inclusion of time-based criteria in the AND/OR condition definitions for a PolicyRule.


Instances of this class may have up to five attributes identifying time periods at different levels. The values of all the attributes present in an instance are ANDed together to determine the validity period(s) for the instance. For example, an instance with an overall validity range of January 1, 2000 through December 31, 2000; a month mask that selects March and April; a day-of-the-week mask that selects Fridays; and a time of day range of 0800 through 1600 would represent the following time periods:

Friday, March 5, 2000, from 0800 through 1600;
 Friday, March 12, 2000, from 0800 through 1600;
 Friday, March 19, 2000, from 0800 through 1600;
 Friday, March 26, 2000, from 0800 through 1600;
 Friday, April 2, 2000, from 0800 through 1600;
 Friday, April 9, 2000, from 0800 through 1600;
 Friday, April 16, 2000, from 0800 through 1600;
 Friday, April 23, 2000, from 0800 through 1600;
 Friday, April 30, 2000, from 0800 through 1600.

Attributes not present in an instance of PolicyTimePeriodCondition are implicitly treated as having their value "always enabled".

Thus, in the example above, the day-of-the-month mask is not present, and so the validity period for the instance implicitly includes a day-of-the-month mask that selects all days of the month. If we apply this "missing attribute" rule to its fullest, we see that there is a second way to indicate that a policy rule is always enabled: have it point to an instance of PolicyTimePeriodCondition whose only attributes are its naming attributes.

The attribute LocalOrUtcTime indicates whether the times represented in the other five time-related attributes of an instance of PolicyTimePeriodCondition are to be interpreted as local times for the location where a policy rule is being applied, or as UTC times.

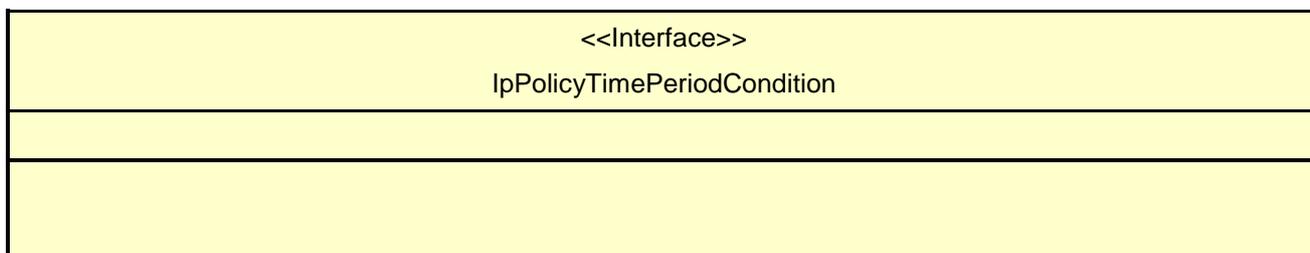

8.8.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.

- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

TimePeriod : TpString

This attribute identifies an overall range of calendar dates and times over which a policy rule is valid. It reuses the format for an explicit time period defined in RFC 2445: a string representing a starting date and time, in which the character 'T' indicates the beginning of the time portion, followed by the solidus character '/', followed by a similar string representing an end date and time. The first date indicates the beginning of the range, while the second date indicates the end. Thus, the second date and time must be later than the first. Date/times are expressed as substrings of the form "yyyymmddThhmmss". For example:

```
20000101T080000/20000131T120000
```

January 1, 2000, 0800 through January 31, 2000, noon

There are also two special cases in which one of the date/time strings is replaced with a special string defined in RFC 2445.

o If the first date/time is replaced with the string "THISANDPRIOR", then the attribute indicates that a policy rule is valid [from now] until the date/time that appears after the '/'.

o If the second date/time is replaced with the string "THISANDFUTURE", then the attribute indicates that a policy rule becomes valid on the date/time that appears before the '/', and remains valid from that point on.

Note that RFC 2445 does not use these two strings in connection with explicit time periods. Thus the PCIM is combining two elements from RFC 2445 that are not combined in the RFC itself.

MonthOfYearMask : TpString

The purpose of this attribute is to refine the definition of the valid time period that is defined by the TimePeriod attribute, by explicitly specifying the months when the policy is valid. These attributes work together, with the TimePeriod used to specify the overall time period during which the policy might be valid, and the MonthOfYearMask used to pick out the specific months within that time period when the policy is valid.

This attribute is formatted as an octet string of size 2, consisting of 12 bits identifying the 12 months of the year, beginning with January and ending with December, followed by 4 bits that are always set to '0'. For each month, the value '1' indicates that the policy is valid for that month, and the value '0' indicates that it is not valid. The value X'0830', for example, indicates that a policy rule is valid only in the months May, November, and December.

See clause 5.4 for details of how CIM represents a single-valued octet string attribute such as this one. (Basically, CIM prepends a 4-octet length to the octet string.)

If this attribute is omitted, then the policy rule is treated as valid for all twelve months.

DayOfMonthMask : TpString

The purpose of this attribute is to refine the definition of the valid time period that is defined by the TimePeriod attribute, by explicitly specifying the days of the month when the policy is valid. These attributes work together, with the TimePeriod used to specify the overall time period during which the policy might be valid, and the DayOfMonthMask used to pick out the specific days of the month within that time period when the policy is valid.

This attribute is formatted as an octet string of size 8, consisting of 31 bits identifying the days of the month counting from the beginning, followed by 31 more bits identifying the days of the month counting from the end, followed by 2 bits that are always set to '0'. For each day, the value '1' indicates that the policy is valid for that day, and the value '0' indicates that it is not valid.

The value X'80 00 00 01 00 00 00 00', for example, indicates that a policy rule is valid on the first and last days of the month.

For months with fewer than 31 days, the digits corresponding to days that the months do not have (counting in both directions) are ignored.

The encoding of the 62 significant bits in the octet string matches that used for the schedDay object in the DISMAN-SCHEDULE-MIB. See reference [8] for more details on this object.

See clause 5.4 for details of how CIM represents a single-valued octet string attribute such as this one. (Basically, CIM prepends a 4-octet length to the octet string.)

DayOfWeekMask : TpString

The purpose of this attribute is to refine the definition of the valid time period that is defined by the TimePeriod attribute by explicitly specifying the days of the week when the policy is valid. These attributes work together, with the TimePeriod used to specify the overall time period when the policy might be valid, and the DayOfWeekMask used to pick out the specific days of the week in that time period when the policy is valid.

This attribute is formatted as an octet string of size 1, consisting of 7 bits identifying the 7 days of the week, beginning with Sunday and ending with Saturday, followed by 1 bit that is always set to '0'. For each day of the week, the value '1' indicates that the policy is valid for that day, and the value '0' indicates that it is not valid.

The value X'7C', for example, indicates that a policy rule is valid Monday through Friday.

See clause 5.4 for details of how CIM represents a single-valued octet string attribute such as this one. (Basically, CIM prepends a 4-octet length to the octet string.)

TimeOfDayMask : TpString

The purpose of this attribute is to refine the definition of the valid time period that is defined by the TimePeriod attribute by explicitly specifying a range of times in a day the policy is valid for. These attributes work together, with the TimePeriod used to specify the overall time period that the policy is valid for, and the TimeOfDayMask used to pick out which range of time periods in a given day of that time period the policy is valid for.

This attribute is formatted in the style of RFC 2445: a time string beginning with the character 'T', followed by the solidus character '/', followed by a second time string. The first time indicates the beginning of the range, while the second time indicates the end. Times are expressed as substrings of the form "Thhmmss".

The second substring always identifies a later time than the first substring. To allow for ranges that span midnight, however, the value of the second string may be smaller than the value of the first substring. Thus, "T080000/T210000" identifies the range from 0800 until 2100, while "T210000/T080000" identifies the range from 2100 until 0800 of the following day.

When a range spans midnight, it by definition includes parts of two successive days. When one of these days is also selected by either the MonthOfYearMask, DayOfMonthMask, and/or DayOfWeekMask, but the other day is not, then the policy is active only during the portion of the range that falls on the selected day. For example, if the range extends from 2100 until 0800, and the day of week mask selects Monday and Tuesday, then the policy is active during the following three intervals:

From midnight Sunday until 0800 Monday;

From 2100 Monday until 0800 Tuesday;

From 2100 Tuesday until 23:59:59 Tuesday.

LocalOrUtcTime : TpInt32

This attribute indicates whether the times represented in the TimePeriod attribute and in the various Mask attributes represent local times or UTC times. There is no provision for mixing of local times and UTC times: the value of this attribute applies to all of the other time-related attributes. Note that LocalTime is designated by the integer 1 and UtcTime by the integer 2. If no value is specified the default value is 2, i.e. UtcTime is used.

8.9 Interface Class IpPolicyAction

Inherits from: IpPolicy

The purpose of a policy action is to execute one or more operations that will affect network traffic and/or systems, devices, etc., in order to achieve a desired state. This (new) state provides one or more (new) behaviours. A policy action ordinarily changes the configuration of one or more elements.

A PolicyRule contains one or more policy actions. A policy administrator can assign an order to the actions associated with a PolicyRule, complete with an indication of whether the indicated order is mandatory, recommended, or of no significance. Ordering of the actions associated with a PolicyRule is accomplished via the setActionList() method.

The actions associated with a PolicyRule are executed if and only if the overall condition(s) of the PolicyRule evaluates to TRUE.

When identifying and using the PolicyAction class, it is necessary to remember that an action can be rule-specific or reusable. This was discussed above. The distinction between the two types of policy actions lies in the associations in which an instance can participate, and in how the different instances are named. Conceptually, a reusable policy action resides in a policy repository, and is named within the scope of that repository. On the other hand, a rule-specific policy action is named within the scope of the single policy rule to which it is related.

<<Interface>> IpPolicyAction
getParentRepository () : IpPolicyRepositoryRef getParentRule () : IpPolicyRuleRef

8.9.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces *SHOULD* define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

8.9.2 Method getParentRepository()

Return a reference to the repository that contains this action (if any). If this action is contained by a rule, return a NULL reference.

Returns: A reference to the parent repository.

Parameters

No Parameters were identified for this method

Returns

IpPolicyRepositoryRef

Raises

TpCommonExceptions

8.9.3 Method getParentRule()

Return a reference to the rule that contains this action (if any). If this action is contained by a PolicyRepository, return a NULL reference.

Returns: A reference to the parent rule.

Parameters

No Parameters were identified for this method

Returns

IpPolicyRuleRef

Raises

TpCommonExceptions

8.10 Interface Class IpPolicyEventDefinition

Inherits from: IpPolicy

Instances of IpPolicyEventDefinition specify the required and optional attributes of events that can be subscribed to, specified as conditions, and generated by clients or actions.

<<Interface>> IpPolicyEventDefinition
<pre> setRequiredAttributes (requiredAttributes : in TpAttributeSet) : void setOptionalAttributes (optionalAttributes : in TpAttributeSet) : void getRequiredAttributes () : TpAttributeSet getOptionalAttributes () : TpAttributeSet getParentDomain () : IpPolicyDomainRef </pre>

8.10.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.

- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

RequiredAttributes : TpAttributeSet

The names and types of the attributes that generated events must include.

OptionalAttributes : TpAttributeSet

The names and types of the attributes that generated events may include.

8.10.2 Method setRequiredAttributes()

Specify the names and types of the attributes that generated events must include.

Parameters

requiredAttributes : in TpAttributeSet

The names and types of the attributes.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_NO_TRANSACTION_IN_PROCESS

8.10.3 Method setOptionalAttributes()

Specify the names and types of the attributes that may be included in a generated event.

Parameters

optionalAttributes : in TpAttributeSet

The names and types of the attributes.

Raises

TpCommonExceptions, P_ACCESS_VIOLATION, P_NO_TRANSACTION_IN_PROCESS

8.10.4 Method getRequiredAttributes()

Get the names and types of the attributes that a generated event is required to include.

Returns: A copy of the set of names and types.

Parameters

No Parameters were identified for this method.

Returns

TpAttributeSet

Raises

TpCommonExceptions

8.10.5 Method getOptionalAttributes()

Get the names and types of the attributes that a generated event may optionally include.

Returns: A copy of the set of names and types.

Parameters

No Parameters were identified for this method.

Returns

TpAttributeSet

Raises

TpCommonExceptions

8.10.6 Method getParentDomain()

Return a reference to the domain that contains this event definition.

Returns: A reference to the containing domain.

Parameters

No Parameters were identified for this method.

Returns

IpPolicyDomainRef

Raises

TpCommonExceptions

8.11 Interface Class IpPolicyEventCondition

Inherits from: IpPolicyCondition

A PolicyCondition that is satisfied when the specified event, with the matching attributes, is generated.

<<Interface>> IpPolicyEventCondition

8.11.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

EventDefinitonName : TpString

The EventDefinition that defines the event this condition is waiting on.


MatchingAttributes : TpAttributeSet

The set of attributes that must match (name and value) for the condition to be satisfied. If this set is empty, then the generation of the event is enough to satisfy the condition.

8.12 Interface Class IpPolicyExpressionCondition

Inherits from: IpPolicyCondition

A PolicyCondition that is satisfied when the specified event, with the matching attributes, is generated.

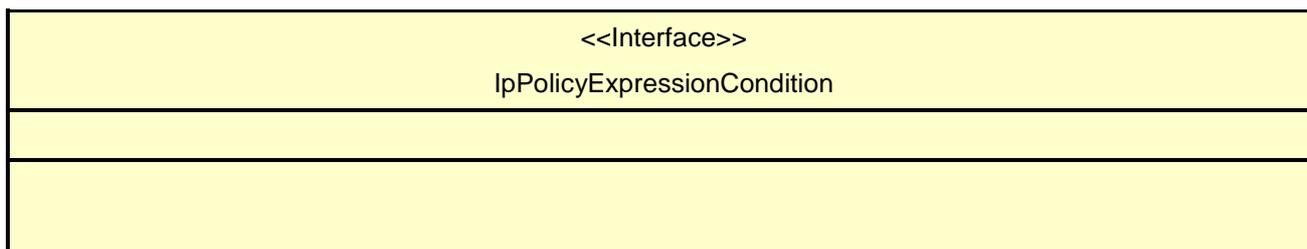

8.12.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

Expression : TpString

The expression to be evaluated as the condition. The BNF describing the expression is defined as follows:

```
Expression := VariableName <Comparison Operator> Constant or VariableName | VariableName <Arithmetic Operator> Constant or VariableName <Comparison Operator> Constant or VariableName | (VariableName <Arithmetic Operator> Constant or VariableName) <Arithmetic Operator> Constant or VariableName <Comparison Operator> Constant or VariableName
```

It is assumed that the Policy Engine is able to parse an expression defined in the above BNF. The BNF may be extended as appropriate.

Note that:

1. Variable is assumed to be one of type {TpInt32, TpFloat or TpString} and consistency of type is assumed when an expression is being defined.
2. Comparison Operator is one of: {==, !=, <=, >=}, and, Arithmetic Operator is one of {*, +, -, /}. These are reserved symbols. Note that when Variable is of type TpInt32 or TpFloat the Comparison and Arithmetic operators have the 'usual' meanings. When Variable is of type string, the comparison operators are the 'standard' string comparison operators. However, the only applicable Arithmetic operators are:

'*' := string concatenation, e.g. abc*cde12 is the string abcde12

'-' := string (positional) difference, e.g. ABCD - ABCD is the null string but abcdef-abc is the string 'def'

'/' := string (positional) overlap, e.g. acbcd/acBCd is the string 'acd'


3. Example showing an expression formed using Variables of type TpFloat (or TpInt32): (bandwidth.allocated - bandwidth.used)/100 >= 36

Note that 'bandwidth' is assumed to be the name of a set of variables and 'allocated' and 'used' are variables (attributes) included in that set.

8.13 Interface Class IpPolicyEventAction

Inherits from: IpPolicyAction

Generate an instance of a specified event.

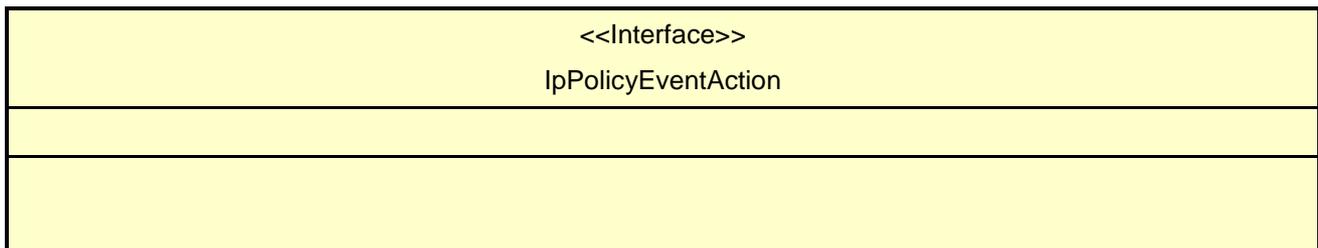

8.13.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces *SHOULD* define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

EventDefinitionName : TpString

The name of the EventDefinition that should be used to define the desired event.


Attributes : TpAttributeSet

The set of attributes that should be included with the generated event. Note that this set must contain all of the attributes in the RequiredAttributes attribute of the specified EventDefinition and any remaining attributes must be included in the OptionalAttributes attribute.

8.14 Interface Class IpPolicyExpressionAction

Inherits from: IpPolicyAction

Evaluate an expression.

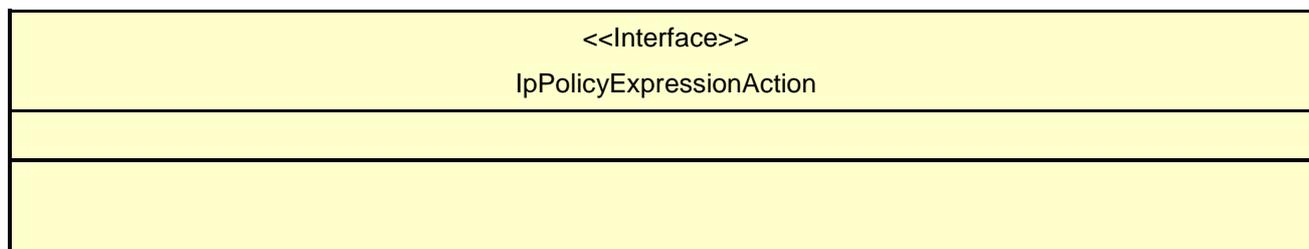

8.14.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.

- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

Expression : TpString

The expression that should be evaluated. The BNF describing the expression is defined as follows:

Expression:= VariableName<AssignmentOperator>Constant or VariableName<ArithmeticOperator> Constant or VariableName | VariableName<AssignmentOperator>Constant

It is assumed that the Policy Engine is able to parse an expression defined in the above BNF. The BNF may be extended as appropriate.

Note that:

1. Variable is assumed to be one of type {TpInt32, TpFloat or TpString} and consistency of type is assumed when an expression is being defined.
2. Assignment Operator is denoted by the symbol (within quotes) '='. The assignment operator assigns the value of the 'right hand side' to the variable on the 'left hand side' -- see example below. Arithmetic Operator is one of {*, +, -, /}. All the above mentioned symbols are reserved symbols. Note that when Variable is of type TpInt32 or TpFloat the Arithmetic operators have the 'usual' meanings. When Variable is of type string the only applicable operators are the operators (within quotes) '*' (concatenation), '-' (string difference) and '/' (string overlap).

3. Example showing an assignment expression formed using Variables of type TpFloat (or TpInt32): content.charge = content.charge - 30.

Note that 'content' is assumed to be the name of a set of variables and 'charge' is a variable (attribute) included in that set. In the above example, the value of content.charge is decremented by 30.

8.15 Interface Class IpPolicylterator

Inherits from: IpPolicy

This interface supports paging through the names of the appropriate objects within a container. Rather than retrieving one name at a time, this interface specifically allows the caller to specify how many names to retrieve on each call.

<<Interface>> IpPolicylterator
<pre>getList (startIndex : in TpInt32, numberRequested : in TpInt32) : TpStringSet</pre>

8.15.1 Attributes

CommonName : TpString

The identifier used to distinguish instances of a give class of objects within a container. It is defined and referenced by the 'name' parameter used in most API methods.

PolicyKeywords : TpStringSet

This attribute provides a set of one or more keywords that a policy administrator may use to assist in characterizing or categorizing a policy object. Keywords are of one of two types:

- Keywords defined in the present document, or in documents that define subinterfaces of the interfaces defined in the present document. These keywords provide a vendor-independent, installation-independent way of characterizing policy objects.
- Installation-dependent keywords for characterizing policy objects. Examples include "Engineering", "Billing", and "Review in December 2000".

The present document defines the following keywords: "P_PM_KEYWORD_UNKNOWN", "P_PM_KEYWORD_CONFIGURATION", "P_PM_KEYWORD_USAGE", "P_PM_KEYWORD_SECURITY", "P_PM_KEYWORD_SERVICE", "P_PM_KEYWORD_MOTIVATIONAL", "P_PM_KEYWORD_INSTALLATION", and "P_PM_KEYWORD_EVENT". These concepts were originally defined in [PCIM].

One additional keyword is defined: "P_PM_KEYWORD_POLICY". The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

Documents that define subinterfaces of the Policy Information Model interfaces SHOULD define additional keywords to characterize instances of these subinterfaces. By convention, keywords defined in conjunction with interface definitions are in uppercase. Installation-defined keywords can be in any case.

Caption : TpString

This attribute provides a one-line description of a policy-related object.

Description : TpString

This attribute provides a longer description than that provided by the caption attribute.

8.15.2 Method getList()

Return at most numberRequested names starting at location startLocation.

Returns: The list of names returned. The list can be examined to determine how many entries were actually returned.

*Parameters***startIndex : in TpInt32**

The index (starting at 0) of the first name to be returned

numberRequested : in TpInt32

The maximum number of names expected to be returned by this call.

Returns

TpStringSet

Raises

TpCommonExceptions

8.16 Interface Class IpAppPolicyDomain

Inherits from: IpInterface

This interface is supported by the client. A reference to the interface is provided by the client by calling createNotification() on a given IpPolicyDomain. When notifications that the client has indicated interest in are available, they will be communicated to the client by calling the appropriate method on this interface.

<<Interface>> IpAppPolicyDomain
reportNotification (assignmentID : in TpAssignmentID, event : in TpPolicyEvent) : void

8.16.1 Method reportNotification()

Notify the client about the specified event.

*Parameters***assignmentID : in TpAssignmentID**

The assignmentID returned by the call to createNotification that enabled notification for the specified event.

event : in TpPolicyEvent

The event.

9 State Transition Diagrams

There are no State Transition Diagrams for the Policy Management SCF.

10 Data Definitions

All data types referenced in the present document but not defined in this clause are common data definitions which may be found in ES 202 915-2.

10.1 Policy Management Data Definitions

This section provides the Policy Management specific data definitions necessary to support the OSA interface specification.

The general format of a data definition specification is the following:

- Data type, that shows the name of the data type.
- Description, that describes the data type.
- Tabular specification, that specifies the data types and values of the data type.
- Example, if relevant, shown to illustrate the data type.

10.1.1 TpPolicyConditionListType

This data type defines the type condition list in a policy rule.

Name	Value	Description
P_PM_DNF	0	Disjunctive normal form
P_PM_CNF	1	Conjunctive normal form

10.1.2 TpPolicyConditionListElement

This data type is a [Sequence of Data Elements](#) which describes one element of a condition list. It is a structured data type consisting of the following {condition, groupNumber, negated} tuple:

Sequence Element Name	Sequence Element Type
Condition	IpPolicyCondition
GroupNumber	TpInt32
Negated	TpBoolean

10.1.3 TpPolicyConditionList

This data type is a [Numbered Set of Data Elements](#) of type TpPolicyConditionListElement.

10.1.4 TpPolicyConditionType

This data type defines the condition type in a policy rule.

Name	Value	Description
P_PM_TIME_PERIOD_CONDITION	0	IpPolicyTimePeriodCondition
P_PM_EVENT_CONDITION	1	IpPolicyEventCondition
P_PM_EXPRESSION_CONDITION	2	IpPolicyExpressionCondition

10.1.5 TpPolicyActionListElement

This data type is a [Sequence of Data Elements](#) which describes one element of a action list. It is a structured data type consisting of the following {action, sequenceNumber } pair:

Sequence Element Name	Sequence Element Type
Action	IpPolicyAction
SequenceNumber	TpInt32

10.1.6 TpPolicyActionList

This data type is a [Numbered Set of Data Elements](#) of type TpPolicyActionListElement.

10.1.7 TpPolicyActionType

This data type defines the action type in a policy rule.

Name	Value	Description
P_PM_EVENT_ACTION	0	IpPolicyEventAction
P_PM_EXPRESSION_ACTION	1	IpPolicyExpressionAction

10.1.8 TpPolicyEvent

This data type is a [Sequence of Data Elements](#) which describes a generic "event". Events can be generated in response to network activity, as a result of clients calling the generateEvent() method of IpPolicyDomain, or as a result of the evaluation of an IpPolicyEventAction action. Each instance of a generated event is identified by a unique EventID, a 32-bit integer. The time the event was generated is captured in the attribute TimeGenerated. All of the attributes in the RequiredAttributes list of the EventDefinition associated with the given EventDefinitionName must be present in Attributes. Any other attributes must be in the OptionalAttributes list of the same EventDefinition.

It is a structured data type consisting of the following fields:

Sequence Element Name	Sequence Element Type
EventID	TpInt32
TimeGenerated	TpDateAndTime
Attributes	TpAttributeSet
EventDefinitionName	TpString
EventDomainName	TpString

10.1.9 TpPolicyKeyword

This data type is identical to a TpString, and is defined as a string of characters that identify the Policy Keywords that are to be supported by the Policy Management API. Other Network operator specific keywords may also be used, but should be preceded by the string "SP_". The following values are defined.

Name	Description
P_PM_KEYWORD_UNKNOWN	To be used when none of the defined values apply.
P_PM_KEYWORD_CONFIGURATION	Configuration Policies define the default (or generic) setup of a managed entity (for example, a network service). Examples of Configuration Policies are the setup of a network forwarding service or a network-hosted print queue.

Name	Description
P_PM_KEYWORD_USAGE	Usage Policies control the selection and configuration of entities based on specific "usage" data. Configuration Policies can be modified or simply re-applied by Usage Policies. Examples of Usage Policies include upgrading network forwarding services after a user is verified to be a member of a "gold" service group, or reconfiguring a printer to be able to handle the next job in its queue.
P_PM_KEYWORD_SECURITY	Security Policies deal with verifying that the client is actually who the client purports to be, permitting or denying access to resources, selecting and applying appropriate authentication mechanisms, and performing accounting and auditing of resources.
P_PM_KEYWORD_SERVICE	Service Policies characterize network and other services (not use them). For example, all wide-area backbone interfaces shall use a specific type of queuing. Service policies describe services available in the network. Usage policies describe the particular binding of a client of the network to services available in the network.
P_PM_KEYWORD_MOTIVATIONAL	Motivational Policies are solely targeted at whether or how a policy's goal is accomplished. Configuration and Usage Policies are specific kinds of Motivational Policies. Another example is the scheduling of file backup based on disk write activity from 8am to 3pm, M-F.
P_PM_KEYWORD_INSTALLATION	Installation Policies define what can and cannot be put on a system or component, as well as the configuration of the mechanisms that perform the install. Installation policies typically represent specific administrative permissions, and can also represent dependencies between different components (e.g. to complete the installation of component A, components B and C must be previously successfully installed or uninstalled).
P_PM_KEYWORD_EVENT	Error and Event Policies. For example, if a device fails between 8am and 9pm, call the system administrator, otherwise call the Help Desk.
P_PM_KEYWORD_POLICY	The role of this keyword is to identify policy-related instances that would not otherwise be identifiable as being related to policy. It may be needed in some repository implementations.

10.1.10 TpPolicyKeywordSet

This data type defines a [Numbered Set of Data Elements](#) of type [TpPolicyKeyword](#)

10.1.11 IpPolicyDomain

Defines the address of an IpPolicyDomain Interface.

10.1.12 IpPolicyDomainRef

Defines a [Reference](#) to an [IpPolicyDomain](#)

10.1.13 IpPolicyRepository

Defines the address of an IpPolicyRepository Interface.

10.1.14 IpPolicyRepositoryRef

Defines a [Reference](#) to an [IpPolicyRepository](#)

10.1.15 IpPolicyGroup

Defines the address of an IpPolicyGroup Interface.

10.1.16 IpPolicyGroupRef

Defines a [Reference](#) to an [IpPolicyGroup](#)

10.1.17 IpPolicyRule

Defines the address of an IpPolicyRule Interface.

10.1.18 IpPolicyRuleRef

Defines a [Reference](#) to an [IpPolicyRule](#)

10.1.19 IpPolicyEventDefinition

Defines the address of an IpPolicyEventDefinition Interface.

10.1.20 IpPolicyEventDefinitionRef

Defines a [Reference](#) to an [IpPolicyEventDefinition](#)

10.1.21 IpAppPolicyDomain

Defines the address of an IpAppPolicyDomain Interface.

10.1.22 IpAppPolicyDomainRef

Defines a [Reference](#) to an [IpAppPolicyDomain](#)

10.1.23 IpPolicyCondition

Defines the address of an IpPolicyCondition Interface.

10.1.24 IpPolicyConditionRef

Defines a [Reference](#) to an [IpPolicyCondition](#)

10.1.25 IpPolicyTimePeriodCondition

Defines the address of an IpPolicyTimePeriodCondition Interface.

10.1.26 IpPolicyTimePeriodConditionRef

Defines a [Reference](#) to an [IpPolicyTimePeriodCondition](#)

11 Policy Management Exception Classes

The following are the list of exception classes which are used in this interface of the API.

Name	Description
P_ACCESS_VIOLATION	Thrown if the client does not have authorization to invoke this method on this object with these parameters.
P_SYNTAX_ERROR	Thrown if the specified name is formatted improperly.
P_NAME_SPACE_ERROR	Thrown if the specified name matches or does not match the name of an existing object of the appropriate type within this container.
P_NO_TRANSACTION_IN_PROCESS	Thrown if there is currently no transaction in process.
P_TRANSACTION_IN_PROCESS	Thrown if there is currently a transaction in process. Note that transactions can not be nested, that is, a second call to startTransaction() without calling commitTransaction() or abortTransaction() in between will result in this exception being thrown during the second call.

Each exception class contains the following structure:

Structure Element Name	Structure Element Type	Structure Element Description
ExtraInformation	TpString	Carries extra information to help identify the source of the exception, e.g. a parameter name.

Annex A (normative): OMG IDL Description of Policy Management SCF

The OMG IDL representation of this interface specification is contained in a text file (policy_data.idl, policy_interfaces.idl contained in archive es_20291513v010101p0.ZIP) which accompanies the present document.

Annex B (informative): Contents of 3GPP OSA R5 Policy Management

All of the present document is relevant for TS 129 198-11 V5 (Release 5).

Annex C (informative): Record of changes

The following is a list of the changes made to the present document for each release. The list contains the names of all changed, deprecated, added or removed items in the specifications and not the actual changes. Any type of change information that is important to the reader is put in the final clause of this annex.

Changes are specified as changes to the prior major release, but every minor release will have its own part of the table allowing the reader to know when the actual change was made.

C.1 Interfaces

C.1.1 New

Identifier	Comments
Interfaces added in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.1.2 Deprecated

Identifier	Comments
Interfaces deprecated in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.1.3 Removed

Identifier	Comments
Interfaces removed in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.2 Methods

C.2.1 New

Identifier	Comments
Methods added in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.2.2 Deprecated

Identifier	Comments
Methods deprecated in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.2.3 Modified

Identifier	Comments
Methods modified in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.2.4 Removed

Identifier	Comments
Methods removed in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.3 Data Definitions

C.3.1 New

Identifier	Comments
Data Definitions added in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.3.2 Modified

Identifier	Comments
Data Definitions modified in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.3.3 Removed

Identifier	Comments
Data Definitions removed in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.4 Service Properties

C.4.1 New

Identifier	Comments
Service Properties added in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.4.2 Deprecated

Identifier	Comments
Service Properties deprecated in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.4.3 Modified

Identifier	Comments
Service Properties modified in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.4.4 Removed

Identifier	Comments
Service Properties removed in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.5 Exceptions

C.5.1 New

Identifier	Comments
Exceptions added in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.5.2 Modified

Identifier	Comments
Exceptions modified in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.5.3 Removed

Identifier	Comments
Exceptions removed in ES 202 915-13 version 1.1.1 (Parlay 4.0)	

C.6 Others

History

Document history		
V1.1.1	November 2002	Membership Approval Procedure MV 20030117: 2002-11-19 to 2003-01-17
V1.1.1	January 2003	Publication