ETSITS 103 544-20 V1.3.0 (2017-10)



Publicly Available Specification (PAS); Intelligent Transport Systems (ITS); MirrorLink®; Part 20: Internet Accessibility

CAL	

The present document has been submitted to ETSI as a PAS produced by CCC and approved by the ETSI Technical Committee Intelligent Transport Systems (ITS).

CCC is owner of the copyright of the document CCC-TS-053 and/or had all relevant rights and had assigned said rights to ETSI on an "as is basis". Consequently, to the fullest extent permitted by law, ETSI disclaims all warranties whether express, implied, statutory or otherwise including but not limited to merchantability, non-infringement of any intellectual property rights of third parties. No warranty is given about the accuracy and the completeness of the content of the present document.

Reference

DTS/ITS-88-20

Keywords

interface, ITS, PAS, smartphone

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommiteeSupportStaff.aspx

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

©ETSI 2017.

© Car Connectivity Consortium 2011-2017.

All rights reserved.
ETSI logo is a Trade Mark of ETSI registered for the benefit of its Members.

MirrorLink® is a registered trademark of Car Connectivity Consortium LLC.

RFB® and VNC® are registered trademarks of RealVNC Ltd.

UPnP® is a registered trademark of UPnP Forum.

Other names or abbreviations used in the present document may be trademarks of their respective owners. **DECT**TM, **PLUGTESTS**TM, **UMTS**TM and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP**TM and **LTE**TM are trademarks of ETSI registered for the benefit of its Members and

of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intell	ectual Property Rights	4
Forev	vord	4
Moda	ıl verbs terminology	4
1	Scope	5
2	References	
2.1	Normative references	
2.2	Informative references	
3	Abbreviations	
4	Internet Accessibility	
4.1	General	6
4.2	Wi-Fi P2P Connection	<i>6</i>
4.2.1	General	6
4.2.2	MirrorLink Internet Accessibility information Exchange	
4.2.3	Managing Wi-Fi P2P connection using MirrorLink Service Discovery	
Anne	ex A (informative): Authors and Contributors	10
Histo	rv	11

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Intelligent Transport Systems (ITS).

The present document is part 20 of a multi-part deliverable. Full details of the entire series can be found in part 1 [i.1].

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document is part of the MirrorLink® specification which specifies an interface for enabling remote user interaction of a mobile device via another device. The present document is written having a vehicle head-unit to interact with the mobile device in mind, but it will similarly apply for other devices, which provide a color display, audio input/output and user input mechanisms.

The present document specifies MirrorLink Device Discovery on Wi-Fi Direct. The procedure is used to provide MirrorLink Server and Client's Internet configuration prior to Wi-Fi P2P group formation.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at https://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents are necessary for the application of the present document.

[1] Wi-Fi Alliance Technical Committee, P2P Task Group, "Wi-Fi Peer-to-Peer (P2P) Technical Specification", Revision 1.2, December 14, 2011.

NOTE: Available at http://csukuangfj.github.io/pdf/wifi/WiFi_P2P_Technical_Specification_v1.2.pdf.

[2] ETSI TS 103 544-18 (V1.3.0): "Publicly Available Specification (PAS); Intelligent Transport Systems (ITS); MirrorLink®; Part 18: IEEE 802.11TM Car Connectivity Consortium (CCC) Information Element".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1] ETSI TS 103 544-1 (V1.3.0): "Publicly Available Specification (PAS); Intelligent Transport Systems (ITS); MirrorLink®; Part 1: Connectivity".

3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AP Access Point

DHCP Dynamic Host Configuration Protocol

DNS Domain Name System

GC	P2P Group Client
GO	P2P Group Owner
IE	Information Element
P2P	Peer-to-peer

4 Internet Accessibility

4.1 General

Both MirrorLink Server and Client can access the Internet, if all the following three conditions are true:

- 1) Either MirrorLink Server or Client shall have Internet connectivity with WAN interface.
- 2) The device that has Internet access shall be capable of sharing its connectivity to the other.
- 3) The device having Internet connectivity shall become an Access Point.

4.2 Wi-Fi P2P Connection

4.2.1 General

If a MirrorLink Server and Client want Wi-Fi P2P connection, they shall proceed Wi-Fi connection setup as defined on the Wi-Fi P2P specification [1].

If a MirrorLink Client is setup to connect in this mode and the MirrorLink Server is set to operate in the same mode, the two devices find each other over Wi-Fi technology and negotiate the AP and client role in autonomous way by conducting Group Owner negotiation procedure defined in the Wi-Fi P2P specification.

The AP role negotiation is performed as following, as defined in [1]:

- 1) The Wi-Fi interface is turned on at both MirrorLink Server and Client.
- 2) If the Wi-Fi mode is set to P2P mode, it proceeds to Wi-Fi Device discovery as defined in [1].
- 3) During the device discovery, a MirrorLink device shall include CCC IE (Information Element) which is defined in [2].
- 4) By referring the information included in the Internet Accessibility sub-element in the CCC IE, defined in [2], the MirrorLink Server and the Client exchange Group Owner negotiation messages to negotiate AP role by checking GO Intent Value in the message.
- 5) A device sends higher GO Intent Value will take Group Ownership and starts AP mode.

4.2.2 MirrorLink Internet Accessibility information Exchange

To inform the configuration information of internet accessibility of both sides, an Internet Accessibility sub-element shall be included into the CCC Information Element, as defined in [2] prior to a group formation.

The Internet Accessibility entry provides the following information:

- MirrorLink Type, i.e. whether the device is a Server or a Client device, and in case of a client device, whether it supports a single or multiple MirrorLink servers.
- Internet Access Support, i.e. whether the device is able to provide internet access for the connected device.
- Internet Access Required, i.e. whether the device requires access to the Internet.
- MirrorLink Client Preference, i.e. in case there is a contradiction, the MirrorLink Clients informs about its preference to resolve it.

4.2.3 Managing Wi-Fi P2P connection using MirrorLink Service Discovery

MirrorLink Server or Client wants to become Group Owner when its configuration or service needs P2P Group Owner role to operate correctly. For example, MirrorLink Client shall become Group Owner to support more than one MirrorLink Servers, while MirrorLink Server shall play Group Owner role to offer Internet connectivity sharing to the other. By setting its Intent Value to 15, MirrorLink Server or Client shall be the P2P Group Owner.

In the case where both the MirrorLink Server and the Client want to become Group Owner and both of them set their Intent Values to 15, the P2P connection fails. To prevent such P2P connection failure, MirrorLink Server and Client shall exchange Internet Accessibility information at Device Discovery procedure prior to a group formation.

Based on MirrorLink Service Configurations of the MirrorLink Server and the Client, the following Group Owner and Group Client role can be distinguished as shown in Table 1.

Table 1: MirrorLink Service Configuration for Group Owner Selection

MirrorLink Service Configuration							Group Ownership Selection						
Internet Access Required		Multiple ML	ML Client	GO	Device offering	P2P Role							
ML Server	ML Client	ML Server	ML Client	Servers Support	Preference	Role Conflict	Cross Connection	ML Server	ML Client				
		Yes	Yes	Yes	- N/A	No	ML Client	GC	GO				
				No			Both	Both	Both				
			No	Yes			ML Client	GC	GO				
Voc	Voc	Yes	No	No			Both	Both	Both				
Yes	Yes	No	Yes	Yes			ML Client	GC	GO				
		NO		No			Both	Both	Both				
		No	No	Yes			N/A	GC	GO				
		NO	NO	No			N/A	Both	Both				
				Yes	Internet Access	Yes	ML Server	GO	GC				
		Yes	Yes	162	Multiple ML Servers	Yes	N/A (Concurrent Operation)	GC	GO				
				No	N/A	No	ML Server	GO	GC				
			No	Yes	N/A	No	N/A (Concurrent Operation)	GC	GO				
		Yes		No	N/A	No	N/A	GC	GO				
Yes	No			NO	14/7	140	ML Server	GO	GC				
		No		Yes	Internet Access	Yes	ML Server	GO	GC				
			Yes	163	Multiple ML Servers	Yes	N/A	GC	GO				
				No	N/A	No	ML Server	GO	GC				
		No						Yes	N/A	No	N/A	GC	GO
			No	No	N/A	No	N/A	GC	GO				
				NO			ML Server	GO	GC				
No		Yes	Yes	Yes	N/A	No	ML Client						
				No				GC	GO				
			No	Yes									
	Yes	. 55		No									
		No	Yes	Yes									
				No									
		No	No	Yes			N/A	GC	GO				

MirrorLink Service Configuration						Group Ownership Selection				
Internet	Access	ccess Internet Access Required		Multiple ML		GO -	Device offering	P2P Role		
ML Server	ML Client	ML Server	ML Client	Servers Support	Preference	Role Conflict	Cross Connection	ML Server	ML Client	
				No				Both	Both	
		Yes	Yes	Yes				GC	GO	
		163	163	No	N/A	No N/A		Both	Both	
		Yes	es No	Yes				GC	GO	
	No No	162		No				Both	Both	
No		No	Yes	Yes			N/A	GC	GO	
	NO FE	165	No				Both	Both		
		No	No	Yes				GC	GO	
				No				Both	Both	

- NOTE 1: If P2P Device cannot provide Internet Access properties to the other, its Internet Access will be regarded as not available.
- NOTE 2: Both mean that Group Owner can be decided on secondary factors. If both device can be GO, then MirrorLink Client is recommended to become GO.
- NOTE 3: Concurrent operation mean that the MirrorLink Server uses its own Internet connectivity and does not offer Cross Connection, and the MirrorLink Client cannot access the Internet

After exchanging MirrorLink Internet Accessibility Service Configuration, MirrorLink Server and Client acknowledge which device will be the P2P Group Owner to operate MirrorLink correctly. MirrorLink Server and Client shall proceed Group Formation Procedure to form P2P group as specified in [1].

During Group Negotiation phase, both the MirrorLink Server and the Client can begin Group Owner Negotiation by sending a GO Negotiation Request frame. The device receiving a GO Negotiation Request frame shall examine the received information and respond with a GO Negotiation Response frame. If the device has to be the Group Owner but its default Intent Value is lower than the Intent Value in the GO Negotiation Request, the device shall set the value higher than the received Intent Value. If the device has to be the Group Client but its default Intent Value is higher than the Intent Value in the GO Negotiation Request, the device shall set the value lower than the received Intent Value.

Figure 1 shows Group Owner Intent Value determination process from the perspective of the P2P Device receiving a GO Negotiation Request frame.

x1 = Group Owner Intent Value of P2P Device 1 initiating the GO Negotiation Request frame

x2 = Group Owner Intent Value of P2P Device 2 receiving the GO Negotiation Request frame

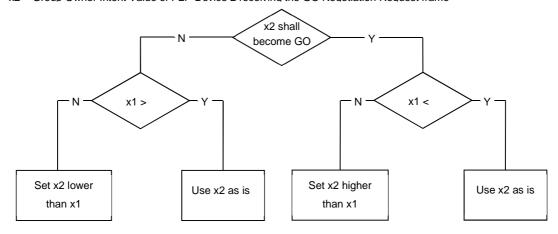


Figure 1: Group Owner Intent Value Determination Flowchart

The P2P Device initiating Group Owner Negotiation procedure shall set its GO Intent Value less than 15, if the device is agreed to become Group Client based on MirrorLink Service Configuration exchange. If the P2P Device initiating GO Negotiation procedure is agreed to become Group Owner, the device shall set its GO Intent Value higher than 0.

As defined in [1], The P2P Group Owner shall act as a DHCP server to provide IP addresses to the connected P2P Clients that use IP. The DHCP server, at least, shall support Internet Protocol version 4 (IPv4) and assign IP addresses, subnet mask and default gateway. A P2P Client that uses IP shall be capable of acting as a DHCP Client. If the Group Owner shares Internet connectivity with other devices on the network, the Group Owner shall provide at least one valid DNS address for the Internet access.

Annex A (informative): Authors and Contributors

The following people have contributed to the present document:

Rapporteur: Dr. Jörg Brakensiek, E-Qualus (for Car Connectivity Consortium LLC)

Other contributors: Mingoo Kim, LG Electronics

Sungjin Lee, LG Electronics

History

Document history								
V1.3.0	October 2017	Publication						