



**5G;
5G System;
Analytics Data Repository Services;
Stage 3
(3GPP TS 29.575 version 17.0.0 Release 17)**



Reference

DTS/TSGC-0329575vh00

Keywords

5G

ETSI

650 Route des Lucioles
 F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
 Association à but non lucratif enregistrée à la
 Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
 Coordinated Vulnerability Disclosure Program:
<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	6
Introduction	7
1 Scope	8
2 References	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions	9
3.2 Symbols.....	9
3.3 Abbreviations	9
4 Services offered by the ADRF	9
4.1 Introduction	9
4.2 Nadrf_DataManagement Service	10
4.2.1 Service Description.....	10
4.2.1.1 Overview.....	10
4.2.1.2 Service Architecture.....	10
4.2.1.3 Network Functions.....	11
4.2.1.3.1 Analytics Data Repository Function (ADRF)	11
4.2.1.3.2 NF Service Consumers	11
4.2.2 Service Operations	12
4.2.2.1 Introduction	12
4.2.2.2 Nadrf_DataManagement_StorageRequest service operation	12
4.2.2.2.1 General	12
4.2.2.2.2 Request Storage of data or analytics.....	12
4.2.2.3 Nadrf_DataManagement_StorageSubscriptionRequest service operation	13
4.2.2.3.1 General	13
4.2.2.3.2 Requesting subscription and store of data or analytics	13
4.2.2.4 Nadrf_DataManagement_StorageSubscriptionRemoval service operation	15
4.2.2.4.1 General	15
4.2.2.4.2 Requesting removal of subscription of data or analytics	15
4.2.2.5 Nadrf_DataManagement_RetrievalRequest service operation	15
4.2.2.5.1 General	15
4.2.2.5.2 Request and get stored data or analytics from ADRF Data Store.....	15
4.2.2.6 Nadrf_DataManagement_RetrievalSubscribe service operation.....	17
4.2.2.6.1 General	17
4.2.2.6.2 Requesting retrieval and subscription of data or analytics	17
4.2.2.7 Nadrf_DataManagement_RetrievalUnsubscribe service operation	18
4.2.2.7.1 General	18
4.2.2.7.2 Requesting removal of retrieval subscription for data or analytics.....	18
4.2.2.8 Nadrf_DataManagement_RetrievalNotify service operation.....	18
4.2.2.8.1 General	18
4.2.2.8.2 Notification about subscribed data or analytics.....	19
4.2.2.9 Nadrf_DataManagement_Delete service operation	19
4.2.2.9.1 General	19
4.2.2.9.2 Requesting removal of stored data or analytics	19
4.2.2.9.3 Requesting removal of stored data or analytics using data or analytics specification	20
5 API Definitions	21
5.1 Nadrf_DataManagement Service API.....	21
5.1.1 Introduction.....	21
5.1.2 Usage of HTTP	21
5.1.2.1 General.....	21

5.1.2.2	HTTP standard headers	22
5.1.2.2.1	General	22
5.1.2.2.2	Content type	22
5.1.2.3	HTTP custom headers	22
5.1.3	Resources	22
5.1.3.1	Overview	22
5.1.3.2	Resource: ADRF Data Store Records	23
5.1.3.2.1	Description	23
5.1.3.2.2	Resource Definition	23
5.1.3.2.3	Resource Standard Methods	23
5.1.3.2.3.1	POST	23
5.1.3.2.3.2	GET	24
5.1.3.2.4	Resource Custom Operations	24
5.1.3.3	Resource: Individual ADRF Data Store Record	24
5.1.3.3.1	Description	24
5.1.3.3.2	Resource Definition	24
5.1.3.3.3	Resource Standard Methods	25
5.1.3.3.3.1	DELETE	25
5.1.3.3.4	Resource Custom Operations	26
5.1.3.4	Resource: ADRF Data Retrieval Subscriptions	26
5.1.3.4.1	Description	26
5.1.3.4.2	Resource Definition	26
5.1.3.4.3	Resource Standard Methods	26
5.1.3.4.3.1	POST	26
5.1.3.4.4	Resource Custom Operations	27
5.1.3.5	Resource: Individual ADRF Data Retrieval Subscription	27
5.1.3.5.1	Description	27
5.1.3.5.2	Resource Definition	27
5.1.3.5.3	Resource Standard Methods	27
5.1.3.5.3.1	DELETE	27
5.1.3.5.4	Resource Custom Operations	28
5.1.4	Custom Operations without associated resources	28
5.1.4.1	Overview	28
5.1.4.2	Operation: request-storage-sub	29
5.1.4.2.1	Description	29
5.1.4.2.2	Operation Definition	29
5.1.4.3	Operation: request-storage-sub-removal	30
5.1.4.3.1	Description	30
5.1.4.3.2	Operation Definition	30
5.1.4.4	Operation: remove-stored-data-analytics	30
5.1.4.4.1	Description	30
5.1.4.4.2	Operation Definition	30
5.1.5	Notifications	31
5.1.5.1	General	31
5.1.5.2	Retrieval Notification	31
5.1.5.2.1	Description	31
5.1.5.2.2	Target URI	31
5.1.5.2.3	Standard Methods	31
5.1.5.2.3.1	POST	31
5.1.6	Data Model	32
5.1.6.1	General	32
5.1.6.2	Structured data types	34
5.1.6.2.1	Introduction	34
5.1.6.2.2	Type: NadrfDataStoreRecord	35
5.1.6.2.3	Type: NadrfDataStoreSubscription	35
5.1.6.2.4	Type: NadrfDataRetrievalSubscription	36
5.1.6.2.5	Type: NadrfDataRetrievalNotification	36
5.1.6.2.6	Type: NadrfDataStoreSubscriptionRef	37
5.1.6.2.7	Type: NadrfStoredDataSpec	37
5.1.6.2.8	Type: DataSubscription	37
5.1.6.3	Simple data types and enumerations	37
5.1.6.4	Data types describing alternative data types or combinations of data types	37

5.1.7	Error Handling	37
5.1.7.1	General	37
5.1.7.2	Protocol Errors	38
5.1.7.3	Application Errors	38
5.1.8	Feature negotiation	38
5.1.9	Security	38
Annex A (normative): OpenAPI specification.....		39
A.1	General	39
A.2	Nadrf_DataManagement API	39
Annex B (informative): Change history		49
History		50

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

shall indicates a mandatory requirement to do something

shall not indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

should indicates a recommendation to do something

should not indicates a recommendation not to do something

may indicates permission to do something

need not indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

can indicates that something is possible

cannot indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

will indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

will not indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

might indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

Introduction

This clause is optional. If it exists, it is always the second unnumbered clause.

1 Scope

The present document specifies the stage 3 protocol and data model for the ADRF Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the ADRF.

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2] and 3GPP TS 23.502 [3]. The stage 2 definition and procedures of store and retrieve the collected data and analytics are contained in 3GPP TS 23.288 [14] and 3GPP TS 23.502 [3].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI 3.0.0 Specification", <https://github.com/OAI/OpenAPI-Specification/blob/master VERSIONS/3.0.0.md>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 7807: "Problem Details for HTTP APIs".
- [14] 3GPP TS 23.288: "Architecture enhancements for 5G System (5GS) to support network data analytics services".
- [15] 3GPP TS 29.520: "5G System; Network Data Analytics Services; Stage 3".
- [16] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [17] 3GPP TS 29.508: "5G System; Session Management Event Exposure Service; Stage 3".
- [18] 3GPP TS 29.518: "5G System; Access and Mobility Management Services; Stage 3".

- [19] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".
 - [20] 3GPP TS 29.517: "5G System; Application Function Event Exposure Services; Stage 3".
 - [21] 3GPP TS 29.591: "5G System; Network Exposure Function Southbound Services; Stage 3".
 - [22] 3GPP TS 29.122: "T8 reference point for Northbound APIs".
 - [23] 3GPP TS 29.574: "5G System; Data Collection Coordination Services; Stage 3".
-

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

Definition format (Normal)

<defined term>: *<definition>*.

example: text used to clarify abstract rules by applying them literally.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

Symbol format (EW)

<symbol> <Explanation>

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

Abbreviation format (EW)

ADRF	Analytics Data Repository Function
------	------------------------------------

4 Services offered by the ADRF

4.1 Introduction

The Analytics Data Repository Service is used for the Analytics Data Repository Function (ADRF) to storage and retrieval of data by e.g. Consumers NF(s) (e.g. NWDAF) which access the data using Nadrf service. The ADRF offers to other NFs the following service:

- Nadrf_DataManagement.

Table 4.1-1: Service provided by ADRF

Service Name	Description	Service Operations	Operation Semantics	Example Consumer(s)
Nadrf_DataManagement	This service enables the NF service consumers to store, retrieve and remove the data or analytics in an ADRF.	StorageRequest	Request / Response	DCCF, NWDAF
		StorageSubscriptionRequest	Request / Response	DCCF, NWDAF
		StorageSubscriptionRemoval	Request / Response	DCCF, NWDAF
		RetrievalRequest	Request / Response	DCCF, NWDAF
		RetrievalSubscribe	Subscribe / Notify	DCCF, NWDAF
		RetrievalUnsubscribe	Subscribe / Notify	DCCF, NWDAF
		RetrievalNotify	Subscribe / Notify	DCCF, NWDAF
		Delete	Request / Response	DCCF, NWDAF

NOTE: The services correspond to the Nadrf_DataManagement service as defined in 3GPP TS 23.288 [14].

Table 4.1-2 summarizes the corresponding APIs defined for this specification.

Table 4.1-2: API Descriptions

Service Name	Claus e	Description	OpenAPI Specificati on File	apiName	Annex
Nadrf_DataManagement	4.2	API for Nadrf_DataManagement		nadrf_datamanagem ent	Annex A.2 Nadrf_DataManagement API

4.2 Nadrf_DataManagement Service

4.2.1 Service Description

4.2.1.1 Overview

The Nadrf_DataManagement service as defined in 3GPP TS 23.288 [14], is provided by the Analytics Data Repository Function (ADRF).

This service:

- allows NF consumers to store data or analytics in the ADRF;
- allows NF consumers to retrieve data or analytics from an ADRF; and
- allows NF consumers to delete data or analytics from an ADRF.

NOTE: Storage of ML models in ADRF is not specified in this Release of the specification.

4.2.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Network Data Analytics Exposure architecture is defined in 3GPP TS 23.288 [14].

The Nadrf_DataManagement service is part of the Nadrf service-based interface exhibited by the Analytics Data Repository Function (ADRF).

Known consumers of the Nadrf_DataManagement service are:

- Data Collection Coordination Function (DCCF)
- Network Data Analytics Function (NWDAF)
- Messaging Framework Adaptor Function (MFAF)

The Nadrf_DataManagement service is provided by the ADRF and consumed by the NF service consumers as shown in figure 4.2.1.2-1 for the SBI representation model and in figure 4.2.1.2-2 for the reference point representation model.

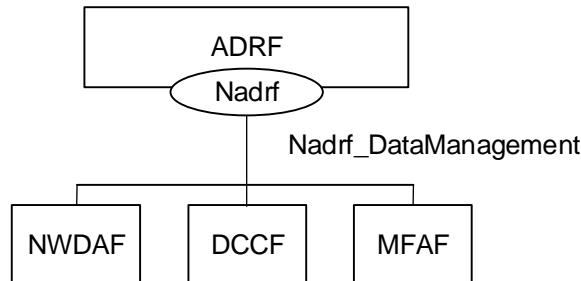


Figure 4.2.1.2-1: Reference Architecture for the Nadrf_DataManagement Service; SBI representation

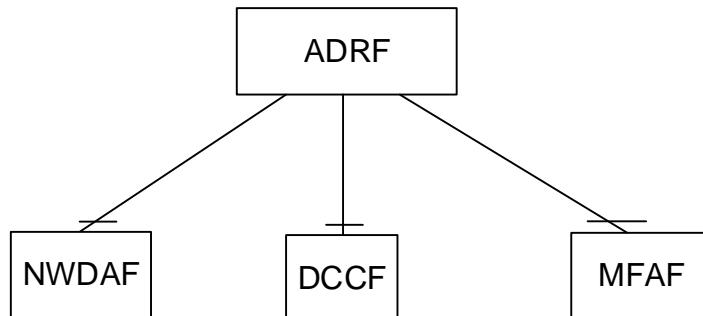


Figure 4.2.1.2-2: Nadrf_DataManagement service architecture, reference point representation

4.2.1.3 Network Functions

4.2.1.3.1 Analytics Data Repository Function (ADRF)

The Analytics Data Repository Function (ADRF) provides the functionality to allow NF consumers to store, retrieve, and remove data or analytics from the ADRF.

4.2.1.3.2 NF Service Consumers

The NWDAF and DCCF:

- supports storing data or analytics in the ADRF;
- supports retrieving data or analytics from an ADRF; and
- supports deletion data or analytics from an ADRF.

The MFAF:

- supports storing data or analytics in the ADRF.

4.2.2 Service Operations

4.2.2.1 Introduction

Table 4.2.2.1-1: Operations of the Nadrf_DataManagement Service

Service operation name	Description	Initiated by
Nadrf_DataManagement_StorageRequest	This service operation is used by an NF to request the ADRF to store data or analytics. Data or analytics are provided to the ADRF in the request message.	NF service consumer (e.g. DCCF, NWDAF, MFAF)
Nadrf_DataManagement_StorageSubscriptionRequest	This service operation is used by an NF to request the ADRF to initiate a subscription for data or analytics. Data or analytics provided in notifications as a result of the subsequent subscription by the ADRF are stored in the ADRF.	NF service consumer (e.g. DCCF, NWDAF)
Nadrf_DataManagement_StorageSubscriptionRemoval	This service operation is used by an NF to request that the ADRF no longer subscribes to data or analytics it is collecting and storing.	NF service consumer (e.g. DCCF, NWDAF)
Nadrf_DataManagement_RetrievalRequest	This service operation is used by an NF to retrieve stored data or analytics from the ADRF.	NF service consumer (e.g. DCCF, NWDAF)
Nadrf_DataManagement_RetrievalSubscribe	This service operation is used by an NF to retrieve stored data or analytics from the ADRF and to receive future notifications containing the corresponding data or analytics received by ADRF.	NF service consumer (e.g. DCCF, NWDAF)
Nadrf_DataManagement_RetrievalUnsubscribe	This service operation is used by an NF to request that the ADRF no longer sends data or analytics to a notification endpoint.	NF service consumer (e.g. DCCF, NWDAF)
Nadrf_DataManagement_RetrievalNotify	This service operation is used by an NF with either data or analytics from an ADRF, or instructions to fetch the data or analytics from an ADRF.	ADRF
Nadrf_DataManagement_Delete	This service operation is used by an NF to delete stored data in ADRF.	NF service consumer (e.g. DCCF, NWDAF)

4.2.2.2 Nadrf_DataManagement_StorageRequest service operation

4.2.2.2.1 General

The Nadrf_DataManagement_StorageRequest service operation is used by an NF service consumer to store data or analytics.

4.2.2.2.2 Request Storage of data or analytics

Figure 4.2.2.2.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to store data or analytics.

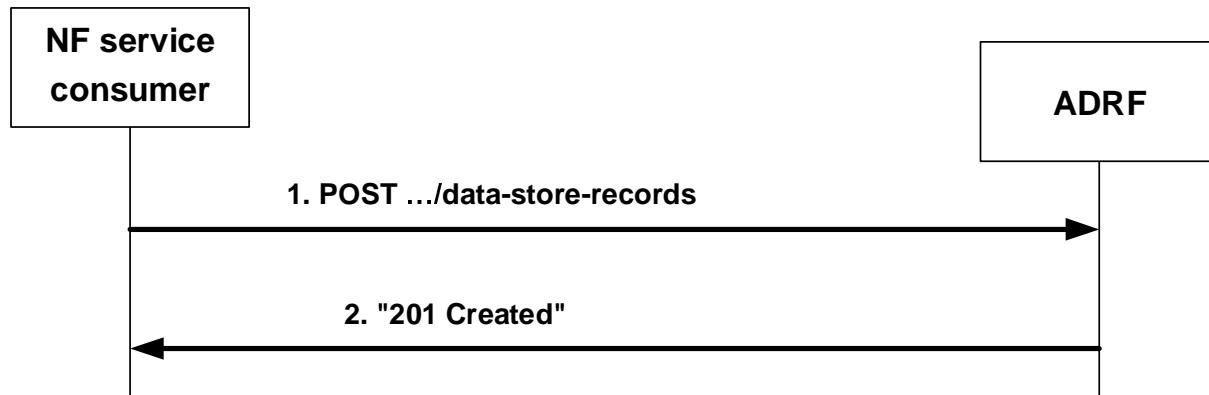


Figure 4.2.2.2.2-1: NF service consumer requesting to store data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_StorageRequest service operation to store data or analytics. The NF service consumer shall send an HTTP POST request with "`{apiRoot}/nadrf-datamanagement/v1/data-store-records`" as Resource URI representing the "ADRF Data Store Records" resource, as shown in figure 4.2.2.2.2-1, step 1, to create an "Individual ADRF Data Store Record" according to the information in the message body. The NadrfDataStoreRecord data structure provided in the request body shall include:

- one of the following:
 - analytics subscription notification(s) within the "anaNotifications" attribute;
 - network exposure function event exposure subscription notification(s) within the "nefEventNotifs" attribute;
 - application function event exposure subscription notification(s) within the "afEventNotifs" attribute;
 - access and mobility function event exposure subscription notification(s) within the "amfEventNotifs" attribute;
 - session management function event exposure subscription notification(s) within the "smfEventNotifs" attribute;
 - unified data management event exposure subscription notification(s) within the "udmEventNotifs" attribute;

Upon the reception of an HTTP POST request with "`{apiRoot}/nadrf-datamanagement/v1/data-store-records`" as Resource URI and NadrfDataStoreRecord data structure as request body, the ADRF shall:

- create a new data store record;
- assign a storeTransId;
- store the data or analytics.

If the ADRF created an "Individual ADRF Data Store Record" resource, the ADRF shall respond with "201 Created" with the message body containing a representation of the created record, as shown in figure 4.2.2.2.2-1, step 2. The ADRF shall include a Location HTTP header field. The Location header field shall contain the URI of the created record i.e. "`{apiRoot}/nadrf-datamanagement/v1/data-store-records/{storeTransId}`".

If an error occurs when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.3 Nadrf_DataManagement_StorageSubscriptionRequest service operation

4.2.2.3.1 General

The Nadrf_DataManagement_StorageSubscriptionRequest service operation is used by an NF service consumer to request that the ADRF creates a subscription to data or analytics and subsequently stores notified data or analytics in the ADRF.

4.2.2.3.2 Requesting subscription and store of data or analytics

Figure 4.2.2.3.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to subscribe for data or analytics to be stored in the ADRF.

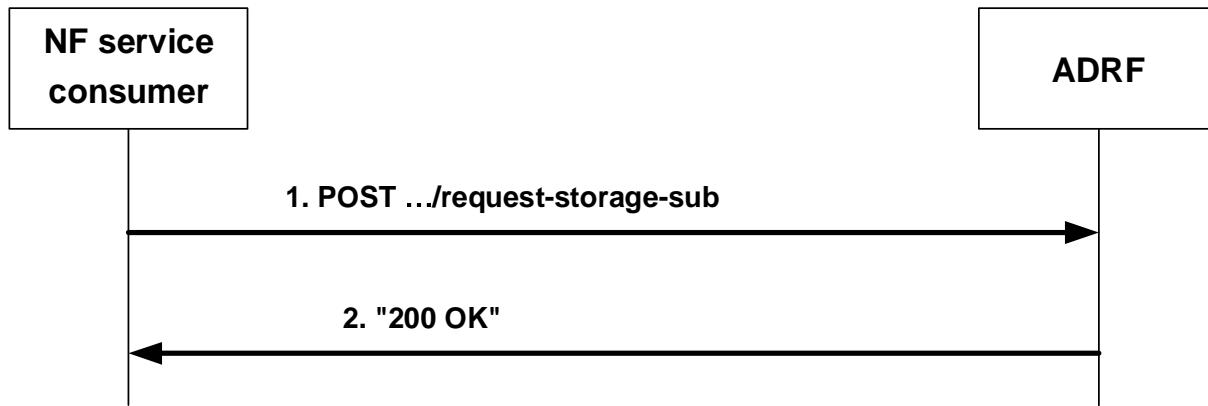


Figure 4.2.2.3.2-1: NF service consumer requesting that the ADRF subscribes to and subsequently stores data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_StorageSubscriptionRequest service operation to request the ADRF to subscribe to data or analytics. The NF service consumer shall send an HTTP POST request with "`{apiRoot}/nadrfdatamanagement/v1/request-storage-sub`" as URI, as shown in figure 4.2.2.3.2-1, step 1. The NadrfDataStoreSubscription data structure provided in the request body shall include:

- one of the following subscription attributes:
 - analytics subscription information within the "anaSub" attribute;
 - access and mobility function event exposure subscription within the "amfDataSub" attribute;
 - session management function event exposure subscription within the "smfDataSub" attribute;
 - unified data management event exposure subscription within the "udmDataSub" attribute;
 - network exposure function event exposure subscription within the "nefDataSub" attribute;
 - application function event exposure subscription within the "afDataSub" attribute;
- one of the following target identifiers:
 - DCCF or NWDAF instance identifier within the "targetNfId" attribute;
 - DCCF or NWDAF NF set identifier within the "targetNfSetId" attribute;

and may include:

- formatting instructions within the "formatInstruct" attribute;
- processing instructions within the "procInstruct" attribute.

Upon the reception of an HTTP POST request with "`{apiRoot}/nadrfdatamanagement/v1/request-storage-sub`" as URI and NadrfDataStoreSubscription data structure as request body, the ADRF shall assign a transaction reference identifier to this request and, if the request is successfully processed and accepted, the ADRF shall respond with "200 OK" as shown in figure 4.2.2.3.2-1 step 2, with the message body containing an NadrfDataStoreSubscriptionRef data structure, which shall include the assigned transaction reference identifier as "transRefId" attribute.

If an error occurs when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

In the case of a successful response, the ADRF shall subsequently create a data or analytics subscription (according to inputs that had been received in the NadrfDataStoreSubscription data structure) with a DCCF as described in 3GPP TS 29.574 [23] or with an NWDAF as described in 3GPP TS 29.520 [15], and create a mapping between this subscription and the previously assigned and returned transaction reference identifier.

4.2.2.4 Nadrf_DataManagement_StorageSubscriptionRemoval service operation

4.2.2.4.1 General

The Nadrf_DataManagement_StorageSubscriptionRemoval service operation is used by an NF service consumer to request the ADRF to remove a subscription for data or analytics.

4.2.2.4.2 Requesting removal of subscription of data or analytics

Figure 4.2.2.4.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to unsubscribe for storage of data or analytics.

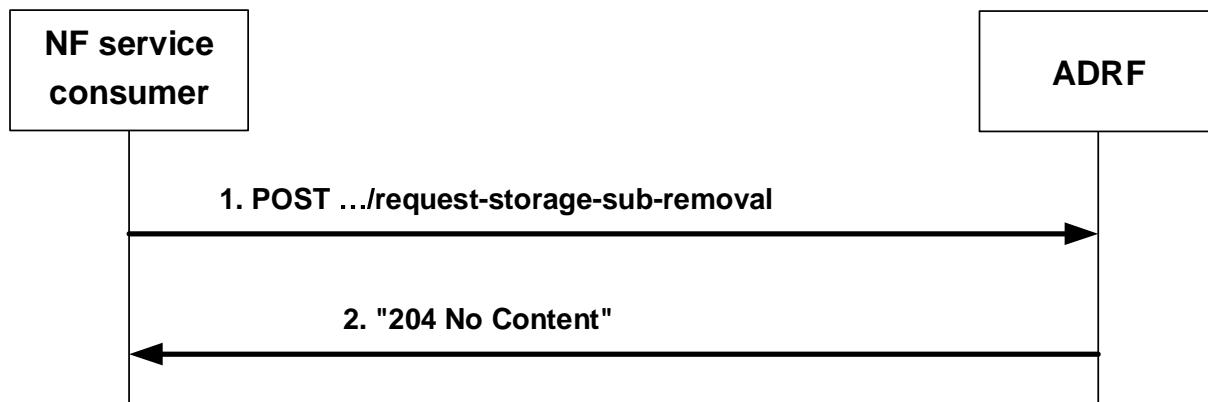


Figure 4.2.2.4.2-1: NF service consumer requesting the removal of a subscription to storage of data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_StorageSubscriptionRemoval service operation to request the ADRF to remove a subscription to data or analytics that are stored in the ADRF. The NF service consumer shall send an HTTP POST request with "`{apiRoot}/nadrf-datamanagement/v1/request-storage-sub-removal`" as URI, as shown in figure 4.2.2.4.2-1, step 1. The POST request body shall contain an NadrfDataStoreSubscriptionRef data structure, which shall include a transaction reference identifier as "transRefId" attribute.

Upon the reception of an HTTP POST request with "`{apiRoot}/nadrf-datamanagement/v1/request-storage-sub-removal`" as URI, if the ADRF successfully processed and accepted the received HTTP POST request, the ADRF shall respond with HTTP "204 No Content" status. Subsequently, the ADRF shall remove the (DCCF or NWDAF) subscription that had been created and mapped to the received transaction reference identifier as described in clause 4.2.2.3.

If errors occur when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.5 Nadrf_DataManagement_RetrievalRequest service operation

4.2.2.5.1 General

The Nadrf_DataManagement_RetrievalRequest service operation is used by an NF service consumer to retrieve stored data or analytics.

4.2.2.5.2 Request and get stored data or analytics from ADRF Data Store

Figure 4.2.2.5.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to retrieve stored data or analytics.

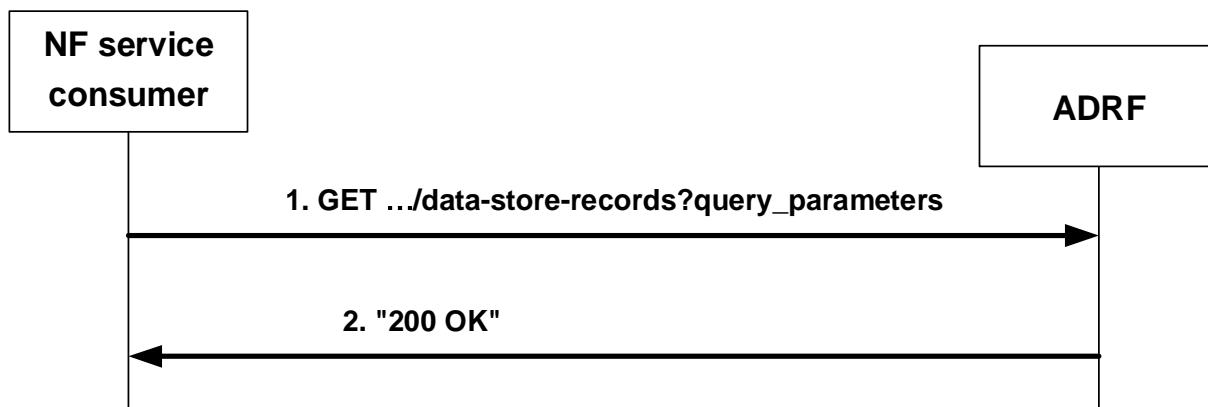


Figure 4.2.2.5.2-1: NF service consumer requesting to retrieve stored data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_RetrievalRequest service operation to retrieve stored data or analytics. The NF service consumer shall send an HTTP GET request with "`{apiRoot}/nadrf-datamanagement/v1/data-store-records`" as Resource URI representing the "ADRF Data Store Records" resource, as shown in figure 4.2.2.5.2-1, step 1, to request ADRF data store records according to the query parameter value of the store transaction identifier within the "store-trans-id" attribute, the query parameter value of the fetch correlation identifier(s) within the "fetch-correlation-ids" attribute, or the query parameter value of one of the following subscription information:

- analytics subscription information within the "ana-sub" attribute;
- AMF event subscription information within the "amf-data-sub" attribute;
- SMF event subscription information within the "smf-data-sub" attribute;
- NEF event subscription information within the "nef-data-sub" attribute;
- UDM event subscription information within the "udm-data-sub" attribute;
- AF event subscription information within the "af-data-sub" attribute.

In addition, when the request has been performed based on subscription information, a start time and a stop time during which requested data is collected or is to be collected shall be provided within the "time-period" attribute.

Upon the reception of the HTTP GET request, the ADRF shall:

- find the data or analytics according to the requested parameters.

If the requested data is found, the ADRF shall respond with "200 OK" status code with the message body containing the NadrfDataStoreRecord data structure. The NadrfDataStoreRecord data structure in the response body shall include:

- one of the following:
 - information about network data analytics function events that occurred in the "anaNotifications" attribute;
 - network exposure events that occurred in the "nefEventNotifs" attribute;
 - application function events that occurred in the "afEventNotifs" attribute;
 - access and mobility function events that occurred in the "amfEventNotifs" attribute;
 - session management function events that occurred in the "smfEventNotifs" attribute;
 - monitoring report events that occurred in the "udmEventNotifs" attribute.

If the requested analytics or data does not exist, the ADRF shall respond with "204 No Content". If an error occurs when processing the HTTP GET request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.6 Nadrf_DataManagement_RetrievalSubscribe service operation

4.2.2.6.1 General

The Nadrf_DataManagement_RetrievalSubscribe service operation is used by an NF service consumer to request subscription to data or analytics and to store subsequently notified data or analytics.

4.2.2.6.2 Requesting retrieval and subscription of data or analytics

Figure 4.2.2.6.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to retrieve and subscribe to data or analytics.

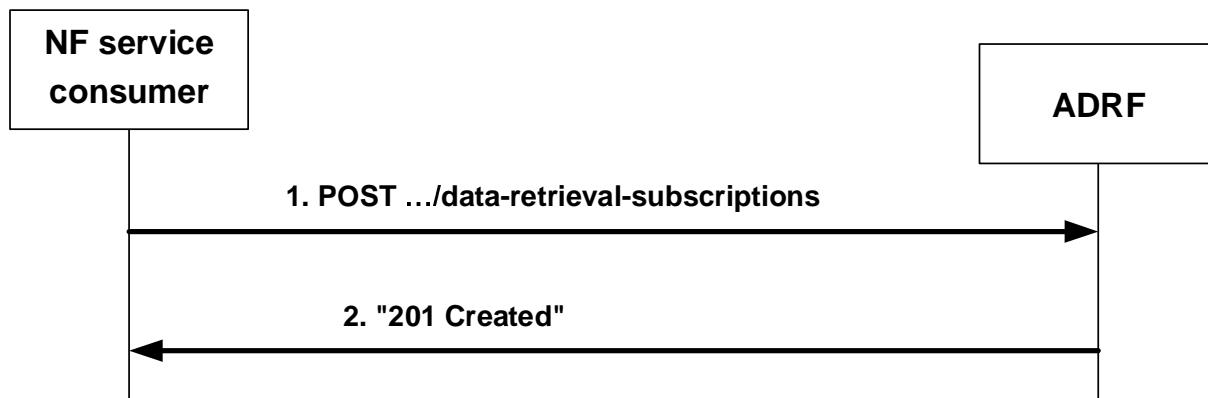


Figure 4.2.2.6.2-1: NF service consumer requesting to retrieve and subscribe to data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_RetrievalSubscribe service operation to retrieve and subscribe to data or analytics. The NF service consumer shall send an HTTP POST request with "{apiRoot}/nadrf-datamanagement/v1/data-retrieval-subscriptions" as Resource URI representing the "ADRF Data Retrieval Subscriptions" resource, as shown in figure 4.2.2.6.2-1, step 1, to create an "Individual ADRF Data Retrieval Subscription" according to the information in the message body. The NadrfDataRetrievalSubscription data structure provided in the request body shall include:

- notification correlation identifier within the "notifCorrId" attribute;
- one of the following:
 - analytics subscription information within the "anaSub" attribute;
 - access and mobility function event exposure subscription within the "amfDataSub" attribute;
 - session management function event exposure subscription within the "smfDataSub" attribute;
 - unified data management event exposure subscription within the "udmDataSub" attribute;
 - network exposure function event exposure subscription within the "nefDataSub" attribute;
 - application function event exposure subscription within the "afDataSub" attribute;
- a notification target address within the "notificationURI" attribute;
- a time window for the data retrieval and subscription within the "timePeriod" attribute;

Upon the reception of an HTTP POST request with "{apiRoot}/nadrf-datamanagement/v1/data-retrieval-subscriptions" as Resource URI and NadrfDataRetrievalSubscription data structure as request body, the ADRF shall:

- create a new subscription;
- assign a subscriptionId;
- store the subscription.

If the ADRF created an "Individual ADRF Data Retrieval Subscription" resource, the ADRF shall respond with "201 Created" with the message body containing a representation of the created subscription, as shown in figure 4.2.2.6.2-1, step 2. The ADRF shall include a Location HTTP header field. The Location header field shall contain the URI of the created record i.e. "{apiRoot}/nadrdf-datamanagement/v1/data-retrieval-subscriptions/{subscriptionId}".

If an error occurs when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.7 Nadrf_DataManagement_RetrievalUnsubscribe service operation

4.2.2.7.1 General

The Nadrf_DataManagement_RetrievalUnsubscribe service operation is used by an NF service consumer to remove a retrieval subscription to data or analytics.

4.2.2.7.2 Requesting removal of retrieval subscription for data or analytics

Figure 4.2.2.7.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to remove a retrieval subscription for data or analytics.

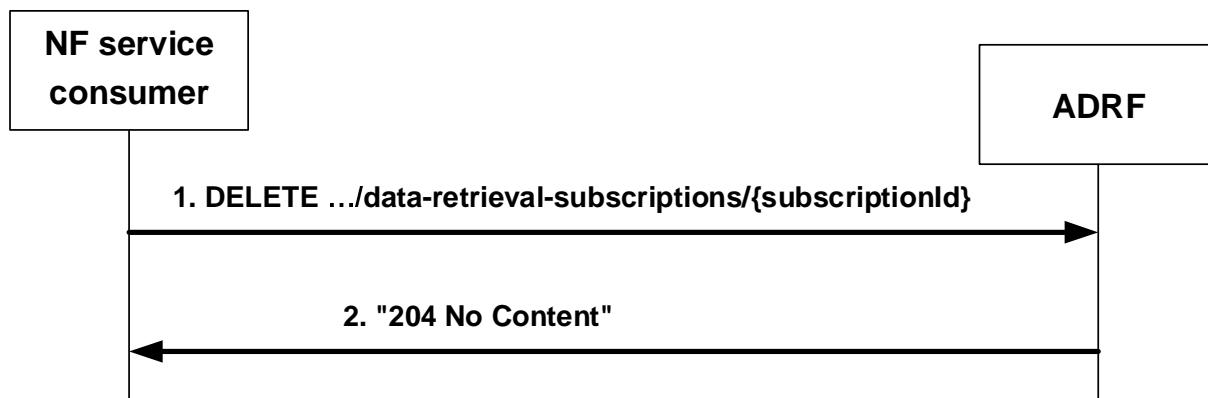


Figure 4.2.2.7.2-1: NF service consumer requesting to remove retrieval subscription for data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_RetrievalUnsubscribe service operation to remove a retrieval subscription for data or analytics. The NF service consumer shall send an HTTP DELETE request with "{apiRoot}/nadrdf-datamanagement/v1/data-retrieval-subscriptions/{subscriptionId}" as Resource URI representing an "Individual ADRF Data Retrieval Subscription" resource, as shown in figure 4.2.2.7.2-1, step 1, where "{subscriptionId}" is the identifier of the existing data retrieval subscription that is to be deleted.

Upon the reception of an HTTP DELETE request with "{apiRoot}/nadrdf-datamanagement/v1/data-retrieval-subscriptions/{subscriptionId}" as Resource URI, if the ADRF successfully processed and accepted the received HTTP DELETE request, the ADRF shall:

- remove the corresponding subscription;
- respond with HTTP "204 No Content" status.

If errors occur when processing the HTTP DELETE request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.8 Nadrf_DataManagement_RetrievalNotify service operation

4.2.2.8.1 General

The Nadrf_DataManagement_RetrievalNotify service operation is used by ADRF to notify NF service consumers about subscribed events related to data or analytics.

4.2.2.8.2 Notification about subscribed data or analytics

Figure 4.2.2.8.2-1 shows a scenario where the ADRF sends a request to the NF service consumer to notify it about data or analytics events.

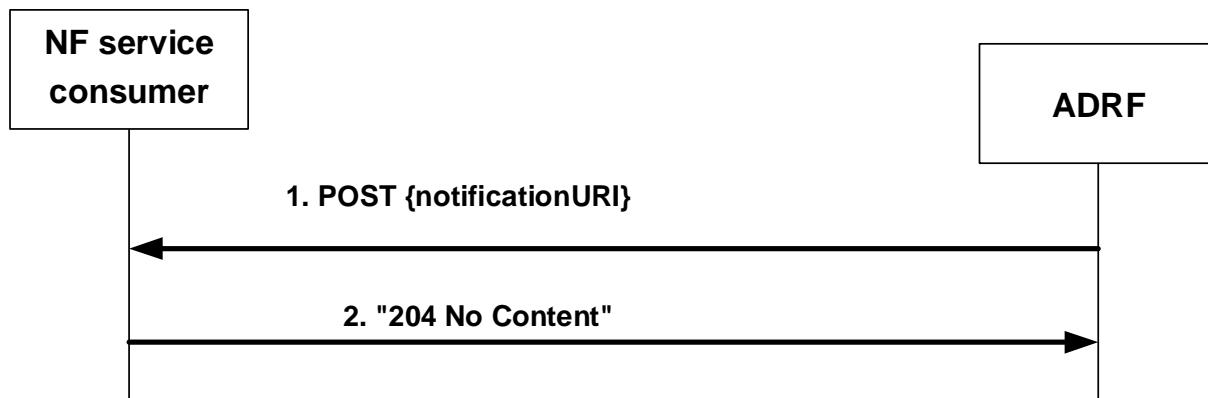


Figure 4.2.2.8.2-1: ADRF notifies the NF service consumer about subscribed data or analytics

The ADRF shall invoke the Nadrf_DataManagement_RetrievalNotify service operation to notify about subscribed data or analytics events. The ADRF shall send an HTTP POST request to the "{notificationURI}" received in the subscription (see clause 5.1.5 for the definition of this notificationURI), as shown in figure 4.2.2.8.2-1, step 1. The NadrfDataRetrievalNotification data structure provided in the request body shall include:

- notification correlation Id within the "notifCorrId" attribute;
- one of the following:
 - information about network data analytics function events that occurred in the "anaNotifications" attribute;
 - network exposure events that occurred in the "nefEventNotifs" attribute;
 - application function events that occurred in the "afEventNotifs" attribute;
 - access and mobility function events that occurred in the "amfEventNotifs" attribute;
 - session management function events that occurred in the "smfEventNotifs" attribute;
 - monitoring report events that occurred in the "udmEventNotifs" attribute.

Upon the reception of an HTTP POST request with "{notificationURI}" as Resource URI and NadrfDataRetrievalNotification data structure as request body, if the NF service consumer successfully processed and accepted the received HTTP POST request, the NF Service Consumer shall:

- store the notification;
- respond with HTTP "204 No Content" status code.

If errors occur when processing the HTTP POST request, the NF service consumer shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.9 Nadrf_DataManagement_Delete service operation

4.2.2.9.1 General

The Nadrf_DataManagement_Delete service operation is used by an NF service consumer to delete stored data or analytics.

4.2.2.9.2 Requesting removal of stored data or analytics

Figure 4.2.2.9.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to delete stored data or analytics.

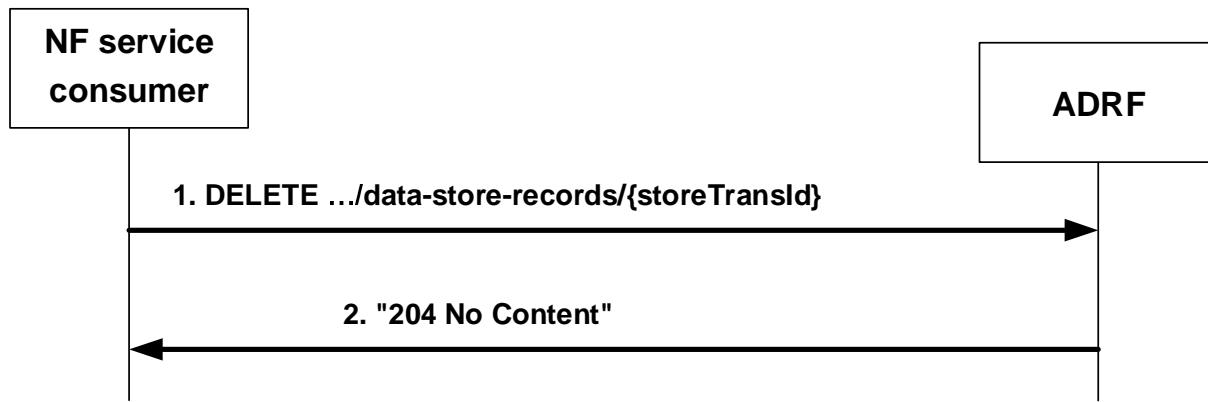


Figure 4.2.2.9.2-1: NF service consumer requesting to remove stored data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_Delete service operation to remove stored data or analytics. The NF service consumer shall send an HTTP DELETE request with "`{apiRoot}/nadrf-datamanagement/v1/data-store-records/{storeTransId}`" as Resource URI representing an "Individual ADRF Data Store Record" resource, as shown in figure 4.2.2.9.2-1, step 1, where "`{storeTransId}`" is the transaction identifier of the stored record that is to be deleted.

Upon the reception of an HTTP DELETE request with "`{apiRoot}/nadrf-datamanagement/v1/data-store-records/{storeTransId}`" as Resource URI, if the ADRF successfully processed and accepted the received HTTP DELETE request, the ADRF shall:

- remove the corresponding stored record;
- respond with HTTP "204 No Content" status code.

If errors occur when processing the HTTP DELETE request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

If the Individual ADRF Data Record resource does not exist, the ADRF shall respond with "404 Not Found".

4.2.2.9.3 Requesting removal of stored data or analytics using data or analytics specification

Figure 4.2.2.9.3-1 shows a scenario where the NF service consumer sends a request to the ADRF to delete stored data or analytics based on a data or analytics specification.

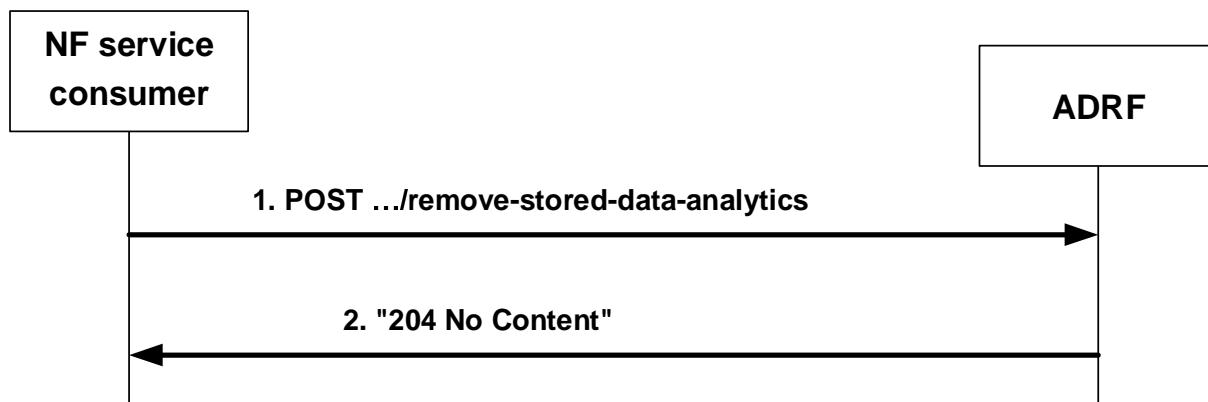


Figure 4.2.2.9.3-1: NF service consumer requesting to remove stored data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_Delete service operation to remove stored data or analytics based on a data or analytics specification. The NF service consumer shall send an HTTP POST request with "`{apiRoot}/nadrf-datamanagement/v1/remove-stored-data-analytics`" as URI, as shown in figure 4.2.2.9.3-1, step 1. The

POST request body shall contain an NadrfStoredDataSpec data structure. The NadrfStoredDataSpec data structure provided in the request body shall include:

- a time window in which the data to be deleted was collected in the "timePeriod" attribute; and
- one of the following:
 - a data specification in the "dataSpec" attribute;
 - an analytics specification in the "anaSpec" attribute;

Upon the reception of an HTTP POST request with "`{apiRoot}/nadrf-datamanagement/v1/remove-stored-data-analytics`" as URI, if the ADRF successfully processed and accepted the received HTTP POST request, the ADRF shall respond with HTTP "204 No Content" status. The ADRF shall remove any stored analytics or data that match the analytics or data specification received in the request.

Editor's Note: When the consumer requests to remove the stored data or analytics using data or analytics specification, how to ensure the data or analytics can be accurately filtered and removed is FFS.

If errors occur when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

5 API Definitions

5.1 Nadrf_DataManagement Service API

5.1.1 Introduction

The <Service 1> shall use the <Service 1> API.

The API URI of the <Service 1> API shall be:

{apiRoot}/{apiName}/{apiVersion}

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/{apiName}/{apiVersion}/{apiSpecificResourceUriPart}

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "<service 1 API name>".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 5.3.

5.1.2 Usage of HTTP

5.1.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nadrf_DataManagement API is contained in Annex A.

5.1.2.2 HTTP standard headers

5.1.2.2.1 General

See clause 5.1.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

5.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

5.1.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.1.3.2 of 3GPP TS 29.500 [4] shall be applicable.

5.1.3 Resources

5.1.3.1 Overview

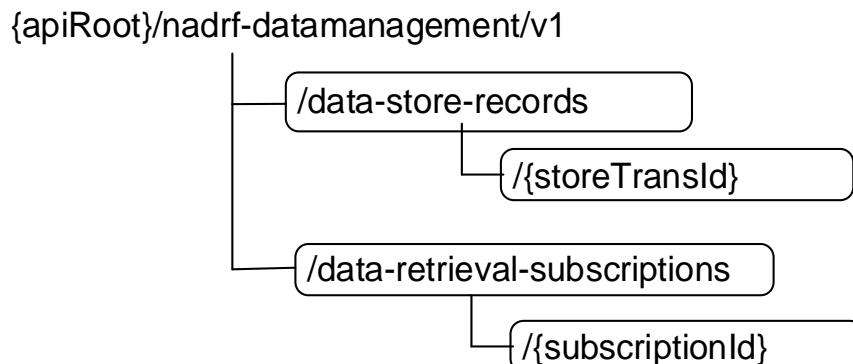


Figure 5.1.3.1-1: Resource URI structure of the Nadrf_DataManagement API

Table 5.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.1.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
ADRF Data Store Records	/data-store-records	GET	Retrieve the stored data or analytics
		POST	Create a new Individual Data Store resource.
Individual ADRF Data Store Record	/data-store-records/{storeTransId}	DELETE	Delete an individual ADRF Data Store Record identified by {storeTransId}.
ADRF Data Retrieval Subscriptions	/data-retrieval-subscriptions	POST	Create a new Individual ADRF Data Retrieval Subscription resource.
Individual ADRF Data Retrieval Subscription	/data-retrieval-subscriptions/{subscriptionId}	DELETE	Delete an individual ADRF Data Retrieval Subscription identified by {subscriptionId}.

5.1.3.2 Resource: ADRF Data Store Records

5.1.3.2.1 Description

The ADRF Data Store Records resource represents all data storage records to the Nadrf_DataManagement Service at a given ADRF. The resource allows an NF service consumer to create a new Individual ADRF Data Store Record resource and to retrieve Individual ADRF Data Store Record resources that fulfil certain criteria.

5.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nadrf-datamanagement/v1/data-store-records

This resource shall support the resource URI variables defined in table 5.1.3.2.2-1.

Table 5.1.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition		
apiRoot	string	See clause 5.1.1		

5.1.3.2.3 Resource Standard Methods

5.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.1.3.2.3.1-1.

Table 5.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.2.3.1-2 and the response data structures and response codes specified in table 5.1.3.2.3.1-3.

Table 5.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description	
NadrfDataStoreRecord	M	1	New individual Data Store Record to be created	

Table 5.1.3.2.3.1-3: Data structures supported by the <method 1> Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfDataStoreRecord	M	1	201 Created	The creation of an Individual Data Store Record resource is confirmed, and a representation of that resource is returned.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.1.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.3.2.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nadrf-datamanagement/v1/data-store-records/{storeTransId}

5.1.3.2.3.2 GET

This method shall support the URI query parameters specified in table 5.1.3.2.3.2-1.

Table 5.1.3.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
store-trans-id	string	O	0..1	Identifies the "Storage Transaction Identifier" of data store record in ADRF.
fetch-correlation-ids	array(string)	O	1..N	Identifies fetch correlation identifiers received as part of fetch instruction.
ana-sub	NnwdaEventsSubscription	O	0..1	Represents analytics event subscription.
amf-data-sub	AmfEventSubscription	O	0..1	Represents AMF event subscription.
smf-data-sub	NsmfEventExposure	O	0..1	Represents SMF event subscription.
nef-data-sub	NefEventExposureSubsc	O	0..1	Represents NEF event subscription.
udm-data-sub	EeSubscription	O	0..1	Represents UDM event subscription.
af-data-sub	AfEventExposureSubsc	O	0..1	Represents AF event subscription.
time-period	TimeWindow	O	0..1	Represents a start time and a stop time during which requested data is collected or to be collected. This query parameter shall be included only when one of (ana-sub, amf-data-sub , smf-data-sub , nef-data-sub , udm-data-sub , af-data-sub) query parameter is included.

NOTE: If "store-trans-id" is provided, then no other query parameters shall be included. If "fetch-correlation-ids" is provided, then no other query parameters shall be included. Maximum one of "ana-sub", "amf-data-sub", "smf-data-sub", "nef-data-sub", "udm-data-sub", "af-data-sub" shall be provided.

This method shall support the request data structures specified in table 5.1.3.2.3.1-2 and the response data structures and response codes specified in table 5.1.3.2.3.1-3.

Table 5.1.3.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description	
n/a				

Table 5.1.3.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfDataStoreRecord	M	1	200 OK	Data Store record.
n/a			204 No Content	If the request ADRF Data Store Record does not exist, the ADRF shall respond with "204 No Content".

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [6] also apply.

5.1.3.2.4 Resource Custom Operations

5.1.3.3 Resource: Individual ADRF Data Store Record

5.1.3.3.1 Description

The Individual ADRF Data Store Record resource represents data or analytics stored via the Nadrf_DataManagement_StorageRequest in ADRF.

5.1.3.3.2 Resource Definition

Resource URI: {apiRoot}/nadrf-datamanagement/v1/data-store-records/{storeTransId}

This resource shall support the resource URI variables defined in table 5.1.3.3.2-1.

Table 5.1.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1.
storeTransId	string	Identifies an individual data store record.

5.1.3.3.3 Resource Standard Methods

5.1.3.3.3.1 DELETE

This method shall support the URI query parameters specified in table 5.1.3.3.3.1-1.

Table 5.1.3.3.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.3.3.1-2 and the response data structures and response codes specified in table 5.1.3.3.3.1-3.

Table 5.1.3.3.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description	
n/a				

Table 5.1.3.3.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual ADRF Data Store Record resource was deleted successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual ADRF Data Store Record deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative ADRF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual ADRF Data Store Record deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative ADRF (service) instance.
NOTE: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative ADRF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.1.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative ADRF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.1.3.3.4 Resource Custom Operations

None in this release of the specification.

5.1.3.4 Resource: ADRF Data Retrieval Subscriptions

5.1.3.4.1 Description

The ADRF Data Retrieval Subscriptions resource represents all data retrieval subscriptions to the Nadrf_DataManagement Service at a given ADRF. The resource allows an NF service consumer to create a new Individual ADRF Data Retrieval Subscription resource.

5.1.3.4.2 Resource Definition

Resource URI: **{apiRoot}/nadrf-datamanagement/v1/data-retrieval-subscriptions**

This resource shall support the resource URI variables defined in table 5.1.3.4.2-1.

Table 5.1.3.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1

5.1.3.4.3 Resource Standard Methods

5.1.3.4.3.1 POST

This method shall support the URI query parameters specified in table 5.1.3.4.3.1-1.

Table 5.1.3.4.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.4.3.1-2 and the response data structures and response codes specified in table 5.1.3.4.3.1-3.

Table 5.1.3.4.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrfDataRetrievalSubscription	M	1	Individual ADRF Data Retrieval Subscription resource to be created.

Table 5.1.3.4.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfDataRetrievalSubscription	M	1	201 Created	The creation of an Individual ADRF Data Retrieval Subscription resource is confirmed and a representation of that resource is returned.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.3.4.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nadrf-datamanagement/v1/data-retrieval-subscriptions/{subscriptionId}

5.1.3.4.4 Resource Custom Operations

None in this release of the specification.

5.1.3.5 Resource: Individual ADRF Data Retrieval Subscription

5.1.3.5.1 Description

The Individual ADRF Data Retrieval Subscription resource represents single ADRF data retrieval subscription to the Nadrf_DataManagement Service at a given ADRF. The resource allows an NF service consumer to delete Individual ADRF Data Retrieval Subscription resource.

5.1.3.5.2 Resource Definition

Resource URI: **{apiRoot}/nadrf-datamanagement/v1/data-retrieval-subscriptions/{subscriptionId}**

This resource shall support the resource URI variables defined in table 5.1.3.5.2-1.

Table 5.1.3.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1

5.1.3.5.3 Resource Standard Methods

5.1.3.5.3.1 DELETE

This method shall support the URI query parameters specified in table 5.1.3.5.3.1-1.

Table 5.1.3.5.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.5.3.1-2 and the response data structures and response codes specified in table 5.1.3.5.3.1-3.

Table 5.1.3.5.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.1.3.5.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual ADRF Data Retrieval Subscription resource was deleted successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual ADRF Data Retrieval Subscription deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative ADRF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual ADRF Data Retrieval Subscription deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative ADRF (service) instance.
NOTE: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.3.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative ADRF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.1.3.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative ADRF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.1.3.5.4 Resource Custom Operations

None in this release of the specification.

5.1.4 Custom Operations without associated resources

5.1.4.1 Overview

The structure of the custom operation URIs of the Nadrf_DataManagement service is shown in Figure 5.1.4.1-1.

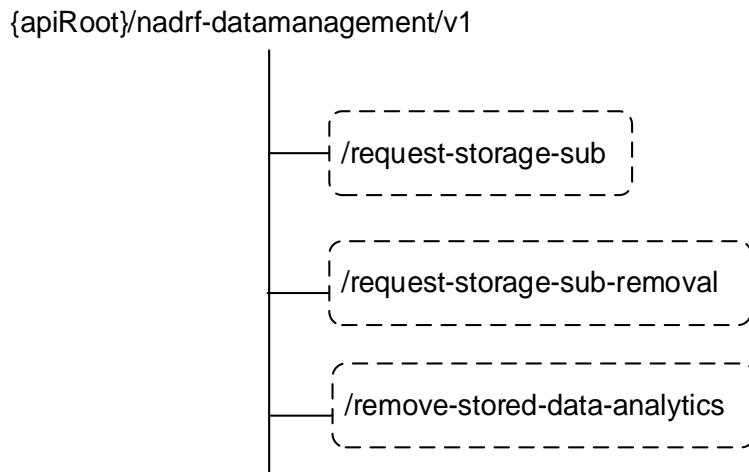
**Figure 5.1.4.1-1: Custom operation URI structure of the Nadrf_DataManagement API**

Table 5.1.4.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 5.1.4.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/nadrdf-datamanagement/<apiVersion>/request-storage-sub	POST	Request the ADRF to create a subscription for data or analytics and then store the received data or analytics in the ADRF.
{apiRoot}/nadrdf-datamanagement/<apiVersion>/request-storage-sub-removal	POST	Request the ADRF to remove a subscription for data or analytics.
{apiRoot}/nadrdf-datamanagement/<apiVersion>/remove-stored-data-analytics	POST	Request the ADRF to remove already stored data or analytics.

5.1.4.2 Operation: request-storage-sub

5.1.4.2.1 Description

The operation is used by the NF service consumer to request the ADRF to create a subscription for data or analytics and then store the received data or analytics in the ADRF.

5.1.4.2.2 Operation Definition

This operation shall support the request data structures shown in Table 5.1.4.2.2-1 and the response data structures and error codes specified in Tables 5.1.4.2.2-2.

Table 5.1.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrdfDataStoreSubscription	M	1	Information about the storage subscription that the ADRF shall create.

Table 5.1.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfDataStoreS ubscriptionRef	M	1	200 OK	Successful request to trigger the creation of a subscription for data or analytics at the ADRF. A reference is provided.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.1.7.1-1 of 3GPP TS 29.500 [4] also apply.				

5.1.4.3 Operation: request-storage-sub-removal

5.1.4.3.1 Description

The operation is used by the NF service consumer to request the ADRF to remove a subscription for data or analytics which was used to store the received data or analytics in the ADRF.

5.1.4.3.2 Operation Definition

This operation shall support the request data structures shown in Table 5.1.4.3.2-1 and the response data structures and error codes specified in Tables 5.1.4.3.2-2.

Table 5.1.4.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description	
NadrfDataStoreS ubscriptionRef	M	1	Reference used to identify the subscription that the ADRF shall remove.	

Table 5.1.4.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful request to trigger the removal of a subscription for data or analytics at the ADRF.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.1.7.1-1 of 3GPP TS 29.500 [4] also apply.				

5.1.4.4 Operation: remove-stored-data-analytics

5.1.4.4.1 Description

The operation is used by the NF service consumer to request the ADRF to remove stored data or analytics based on a data or analytics specification.

5.1.4.4.2 Operation Definition

This operation shall support the request data structures shown in Table 5.1.4.4.2-1 and the response data structures and error codes specified in Tables 5.1.4.4.2-2.

Table 5.1.4.4.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description	
NadrfStoredData Spec	M	1	Information about the specification of data or analytics stored in ADRF.	

Table 5.1.4.4.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful request to remove data or analytics at the ADRF based on a data or analytics specification.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.1.7.1-1 of 3GPP TS 29.500 [4] also apply.				

5.1.5 Notifications

5.1.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

Table 5.1.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Retrieval Notification	{notificationURI}	POST	Report data or analytics from ADRF.

5.1.5.2 Retrieval Notification

5.1.5.2.1 Description

The Retrieval Notification is used by the NF service producer to report one or several data retrieval events to an NF service consumer that has subscribed to such notifications.

5.1.5.2.2 Target URI

The Callback URI "**{notificationURI}**" shall be used with the callback URI variables defined in table 5.1.5.2.2-1.

Table 5.1.5.2.2-1: Callback URI variables

Name	Definition
notificationURI	String formatted as URI with the Callback Uri

5.1.5.2.3 Standard Methods

5.1.5.2.3.1 POST

This method shall support the request data structures specified in table 5.1.5.2.3.1-1 and the response data structures and response codes specified in table 5.1.5.2.3.1-2.

Table 5.1.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
NadrfDataRetrievalNotification	M	1	Provides information about observed data or analytics.

Table 5.1.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the Notification is acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during the retrieval notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during the retrieval notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.5.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

Table 5.1.5.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

5.1.6 Data Model

5.1.6.1 General

This clause specifies the application data model supported by the Nadrf_DataManagement API.

Table 5.1.6.1-1 specifies the data types defined for the Nadrf_DataManagement service based interface protocol.

Table 5.1.6.1-1: Nadrf_DataManagement specific Data Types

Data type	Clause defined	Description	Applicability
NadrfDataRetrievalSubscription	5.1.6.2.4	Represents an Individual ADRF Data Retrieval Subscription resource.	
NadrfDataRetrievalNotification	5.1.6.2.5	Represents a notification that corresponds with an Individual ADRF Data Retrieval Subscription resource.	
NadrfDataStoreRecord	5.1.6.2.2	Represents an Individual ADRF Data Store Record resource.	
NadrfDataStoreSubscription	5.1.6.2.3	Contains information to be used by the ADRF to create a Data or Analytics subscription.	
NadrfDataStoreSubscriptionRef	5.1.6.2.6	Contains a reference to a request for a Data or Analytics subscription.	
NadrfStoredDataSpec	5.1.6.2.7	Contains information about Data or Analytics specification.	
DataSpecification	5.1.6.2.8	Contains information about Data specification.	

Table 5.1.6.1-2 specifies data types re-used by the Nadrf_DataManagement service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nadrf_DataManagement service based interface.

Table 5.1.6.1-2: Nadrf_DataManagement re-used Data Types

Data type	Reference	Comments	Applicability
AfEventExposureNotif	3GPP TS 29.517 [20]	Represents notifications on AF event(s) that occurred for an Individual AF Event Subscription resource.	
AfEventExposureSubsc	3GPP TS 29.517 [20]	Represents AF event subscription.	
AmfEventNotification	3GPP TS 29.518 [18]	Represents notifications on AMF event(s) that occurred for an Individual AMF Event Subscription resource.	
AmfEventSubscription	3GPP TS 29.518 [18]	Represents AMF event subscription.	
EeSubscription	3GPP TS 29.503 [19]	Represents UDM event subscription.	
FormattingInstruction	3GPP TS 29.574 [23]	DCCF formatting Instructions.	
MonitoringReport	3GPP TS 29.503 [19]	UDM Monitoring Report.	
NefEventExposureNotif	3GPP TS 29.591 [21]	Represents notifications on network exposure event(s) that occurred for an Individual Network Exposure Event Subscription resource.	
NefEventExposureSubsc	3GPP TS 29.591 [21]	Represents NEF event subscription.	
NfInstanceld	3GPP TS 29.571 [16]	NF instance identifier.	
NfSetld	3GPP TS 29.571 [16]	NF set identifier.	
NnwdafeventsSubscription	3GPP TS 29.520 [15]	Represents an NWDAF analytics subscription.	
NnwdafeventsSubscriptionNotification	3GPP TS 29.520 [15]	Represents an NWDAF analytics subscription notification.	
NsmfEventExposure	3GPP TS 29.508 [17]	Represents SMF event subscription.	
NsmfEventExposureNotification	3GPP TS 29.508 [17]	Represents SMF event notification.	
ProcessingInstruction	3GPP TS 29.574 [23]	DCCF processing Instructions.	
TimeWindow	3GPP TS 29.122 [22]	Represents a time window.	
UInteger	3GPP TS 29.571 [16]	Unsigned Integer.	
Uri	3GPP TS 29.571 [16]	URI.	

5.1.6.2 Structured data types

5.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

5.1.6.2.2 Type: NadrfDataStoreRecord

Table 5.1.6.2.2-1: Definition of type NadrfDataStoreRecord

Attribute name	Data type	P	Cardinality	Description	Applicability
anaNotifications	array(NnwdafeventsSubscriptionNotification)	C	1..N	List of analytics subscription notifications. (NOTE 1)	
afEventNotifs	array(AfEventExposureNotif)	C	1..N	List of notifications on AF event(s). (NOTE 1)	
amfEventNotifs	array(AmfEventNotification)	C	1..N	List of notifications on AMF event(s). (NOTE 1)	
smfEventNotifs	array(NsmfEventExposureNotification)	C	1..N	List of notifications on SMF event(s). (NOTE 1)	
udmEventNotifs	array(MonitoringReport)	C	1..N	List of monitoring reports containing information about UDM event(s). (NOTE 1)	
nefEventNotifs	array(NefEventExposureNotif)	C	1..N	List of notifications on network exposure event(s). (NOTE 1)	

NOTE 1: Exactly one of these attributes shall be provided.

Editor's Note: It is FFS to define re-usable data types for DataSubscription and DataSubscriptionNotification (similar to the above data type but without analytics) and re-use them consistently across 29.520, 29.574, and 29.575.

5.1.6.2.3 Type: NadrfDataStoreSubscription

Table 5.1.6.2.3-1: Definition of type NadrfDataStoreSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
anaSub	NnwdafeventsSubscription	C	0..1	Subscribed analytics events. (NOTE 1)	
dataSub	DataSubscription	C	0..1	Represents requested Events subscription. (NOTE 1)	
targetNfId	NfInstanceId	C	0..1	DCCF or NWDAF NF instance identifier to which the ADRF shall create the requested subscription. (NOTE 2)	
targetNfSetId	NfSetId	C	0..1	DCCF or NWDAF NF set identifier to which the ADRF shall create the requested subscription. (NOTE 2)	
formatInstruct	FormattingInstruction	O	0..1	Formatting instructions to be used for sending event notifications.	
procInstruct	ProcessingInstruction	O	0..1	Processing instructions to be used for sending event notifications.	

NOTE 1: Exactly one of these attributes shall be provided.

NOTE 2: One of "targetNfId" and "targetNfSetId" shall be provided.

5.1.6.2.4 Type: NadrfDataRetrievalSubscription

Table 5.1.6.2.4-1: Definition of type NadrfDataRetrievalSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
anaSub	NnwdafeventsSubscription	C	1	Subscribed analytics events. (NOTE 1)	
dataSub	DataSubscription	C	0..1	Represents requested Events subscription. (NOTE 1)	
notificationURI	Uri	M	1	Notification target address. This attribute shall have the same value as the callback URI attribute of the requested subscription attribute.	
timePeriod	TimeWindow	M	1	Represents a start time and a stop time during which requested data is collected or to be collected.	
notifCorrid	string	M	1	Notification correlation identifier provided by the NF service consumer to be used later by the ADRF in the notifications that correspond with this subscription. The value of this attribute shall be unique per subscription for a given NF service consumer.	

NOTE 1: Exactly one of these attributes shall be provided.

5.1.6.2.5 Type: NadrfDataRetrievalNotification

Table 5.1.6.2.5-1: Definition of type NadrfDataRetrievalNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
notifCorrid	string	M	1	This attribute indicates the notification correlation identifier provided by the NF service consumer during the data retrieval subscription. This parameter can be useful if the NF service consumer uses a common callback URI for multiple subscriptions.	
anaNotifications	array(NnwdafeventsSubscriptionNotification)	C	1..N	List of analytics subscription notifications. (NOTE 1)	
nefEventNotifs	array(NefEventExposureNotif)	C	1..N	List of notifications on network exposure event(s). (NOTE 1)	
afEventNotifs	array(AfEventExposureNotif)	C	1..N	List of notifications on AF event(s). (NOTE 1)	
amfEventNotifs	array(AmfEventNotification)	C	1..N	List of notifications on AMF event(s). (NOTE 1)	
smfEventNotifs	array(NsmfEventExposureNotification)	C	1..N	List of notifications on SMF event(s). (NOTE 1)	
udmEventNotifs	array(MonitoringReport)	C	1..N	List of monitoring reports containing information about UDM event(s). (NOTE 1)	

NOTE 1: Exactly one of these attributes shall be provided.

5.1.6.2.6 Type: NadrfDataStoreSubscriptionRef

Table 5.1.6.2.6-1: Definition of type NadrfDataStoreSubscriptionRef

Attribute name	Data type	P	Cardinality	Description	Applicability
transRefId	string	M	1	Transaction reference identifier.	

5.1.6.2.7 Type: NadrfStoredDataSpec

Table 5.1.6.2.7-1: Definition of type NadrfStoredDataSpec

Attribute name	Data type	P	Cardinality	Description	Applicability
dataSpec	DataSubscription	C	0..1	Represents data specification. (NOTE)	
anaSpec	NnwdaEventsSubscription	C	0..1	Represents analytics specification. (NOTE)	
timePeriod	TimeWindow	M	0..1	Represents a start time and a stop time during which requested data is collected.	

NOTE: Exactly one of these attributes shall be provided.

Editor's note: It is FFS a new data type is required for anaSpec

Editor's Note: When the consumer requests to remove the stored data or analytics using data or analytics specification, how to ensure the data or analytics can be accurately filtered and removed is FFS.

5.1.6.2.8 Type: DataSubscription

Table 5.1.6.2.8-1: Definition of type DataSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
amfDataSub	AmfEventSubscription	C	0..1	Represents requested AMF Events subscription. (NOTE)	
smfDataSub	NsmfEventExposure	C	0..1	Represents requested SMF Events subscription. (NOTE)	
udmDataSub	EeSubscription	C	0..1	Represents requested UDM Events subscription. (NOTE)	
nefDataSub	NefEventExposureSubsc	C	0..1	Represents requested NEF Events subscription. (NOTE)	
afDataSub	AfEventExposureSubsc	C	0..1	Represents requested AF Events subscription. (NOTE)	

NOTE: Exactly one of these attributes shall be provided.

5.1.6.3 Simple data types and enumerations

5.1.6.4 Data types describing alternative data types or combinations of data types

5.1.7 Error Handling

5.1.7.1 General

For the Nadrf_DataManagement API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.1.7.2-1 of 3GPP TS 29.500 [4] shall be

supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.1.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nadrf_DataManagement API.

5.1.7.2 Protocol Errors

No specific procedures for the Nadrf_DataManagement service are specified.

5.1.7.3 Application Errors

The application errors defined for the Nadrf_DataManagement service are listed in Table 5.1.7.3-1.

Table 5.1.7.3-1: Application errors

Application Error	HTTP status code	Description

5.1.8 Feature negotiation

The optional features in table 5.1.8-1 are defined for the Nadrf_DataManagement API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 5.1.8-1: Supported Features

Feature number	Feature Name	Description

5.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nadrf_DataManagement API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nadrf_DataManagement API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nadrf_DataManagement service.

The Nadrf_DataManagement API defines a single scope "nadrf-datamanagement" for the entire service, and it does not define any additional scopes at resource or operation level.

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the formal definition of the API(s) defined in the present specification. It consists of OpenAPI 3.0.0 specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 1: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see 3GPP TS 29.501 [5] clause 5.3.1 and 3GPP TR 21.900 [7] clause 5B).

A.2 Nadrf_DataManagement API

```
openapi: 3.0.0
info:
  version: 1.0.0-alpha.3
  title: Nadrf_DataManagement
  description: |
    ADRF Data Management Service.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.575 V17.0.0; 5G System; Analytics Data Repository Services; Stage 3.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.575/'
#
servers:
  - url: '{apiRoot}/nadrf-datamanagement/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501.
#
security:
  - OAuth2ClientCredentials:
    - nadrf-datamanagement
    - {}
#
paths:
  /data-store-records:
    post:
      summary: Creates a new Individual Data Store Record resource.
      operationId: CreateADRFDataStoreRecord
      tags:
        - ADRF Data Store Records (Collection)
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NadrfDataStoreRecord'
            required: true
            description: ADRF data store record to be stored.
      responses:
        '201':
          description: Successful creation of new Individual ADRF Data Store Record resource.
          headers:
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/nadrf-datamanagement/v1/data-store-records/{storeTransId}'
              required: true
              schema:
                type: string
```

```

content:
  application/json:
    schema:
      $ref: '#/components/schemas/NadrpDataStoreRecord'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
get:
  summary: "Retrieves existing Individual ADRF Data Store Records"
  operationId: GetAdrfDataStoreRecords
  tags:
    - ADRF Data Store Records (Collection)
  parameters:
    - name: store-trans-id
      description: A storage transaction identifier of a data store record in ADRF.
      in: query
      required: false
      schema:
        type: string
    - name: fetch-correlation-ids
      description: Fetch correlation identifiers received as part of fetch instruction.
      in: query
      required: false
      style: form
      explode: false
      schema:
        type: array
        items:
          type: string
          minItems: 1
    - name: ana-sub
      description: Represents analytics event subscription.
      in: query
      required: false
      content:
        application/json:
          schema:
            $ref:
'TS29520_NnwdaF_EventsSubscription.yaml#/components/schemas/NnwdaFEventsSubscription'
    - name: amf-data-sub
      description: Represents AMF event subscription.
      in: query
      required: false
      content:
        application/json:
          schema:
            $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/AmfEventSubscription'
    - name: smf-data-sub
      description: Represents SMF event subscription.
      in: query
      required: false
      content:
        application/json:
          schema:
            $ref: 'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NsmfEventExposure'
    - name: nef-data-sub
      description: Represents NEF event subscription.
      in: query
      required: false

```

```

content:
  application/json:
    schema:
      $ref: 'TS29591_Nnef_EventExposure.yaml#/components/schemas/NefEventExposureSubsc'
- name: udm-data-sub
  description: Represents UDM event subscription.
  in: query
  required: false
  content:
    application/json:
      schema:
        $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/EeSubscription'
- name: af-data-sub
  description: Represents AF event subscription.
  in: query
  required: false
  content:
    application/json:
      schema:
        $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
- name: time-period
  description: Represents a start time and a stop time during which requested data is
collected or to be collected.
  in: query
  required: false
  content:
    application/json:
      schema:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
responses:
'200':
  description: Data store records are returned.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NadrfDataStoreRecord'
'204':
  description: No matching ADRF data were found.
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29571_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-store-records/{storeTransId}:
delete:
  summary: Delete an existing Individual ADRF Data Store Record
  operationId: DeleteADRFDataStoreRecord
  tags:
    - Individual ADRF Data Store Record (Document)
parameters:
- name: storeTransId
  in: path
  description: String identifying a Data Store Record in ADRF
  required: true
  schema:
    type: string
responses:
'204':
  description: No Content. The Individual ADRF Data Store Record resource matching the
storeTransId was deleted.
'307':
  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-retrieval-subscriptions:
post:
    summary: Creates a new Individual ADRF Data Retrieval Subscription resource.
    operationId: CreateADRFDataRetrievalSubscription
    tags:
        - ADRF Data Retrieval Subscriptions (Collection)
    requestBody:
        content:
            application/json:
                schema:
                    $ref: '#/components/schemas/NadrfDataRetrievalSubscription'
    required: true
    description: Individual ADRF Data Retrieval Subscription resource to be created.
    responses:
        '201':
            description: Created a new Individual ADRF Data Retrieval Subscription resource.
            headers:
                Location:
                    description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/nadrf-datamanagement/v1/data-retrieval-subscriptions/{subscriptionId}'
            required: true
            schema:
                type: string
        content:
            application/json:
                schema:
                    $ref: '#/components/schemas/NadrfDataRetrievalSubscription'
'400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
    adrfDataRetrievalNotification:
        '{$request.body#/notificationURI}':
        post:
            requestBody:
                required: true
            content:
                application/json:

```

```

schema:
  $ref: '#/components/schemas/NadrfDataRetrievalNotification'
responses:
  '204':
    description: The receipt of the Notification is acknowledged.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-retrieval-subscriptions/{subscriptionId}:
delete:
  summary: Delete an existing Individual ADRF Data Retrieval Subscription
  operationId: DeleteADRFDataRetrievalSubscription
  tags:
    - Individual ADRF Data Retrieval Subscription (Document)
  parameters:
    - name: subscriptionId
      in: path
      description: String identifying a data retrieval subscription to the Nadrf_DataManagement Service.
      required: true
    schema:
      type: string
  responses:
    '204':
      description: No Content. The Individual ADRF Data Retrieval Subscription resource matching the subscriptionId was deleted.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/request-storage-sub:
post:
  summary: Triggers the creation of a new ADRF Storage Subscription.

```

```

operationId: CreateADRFStorageSubscription
tags:
  - ADRF Storage Subscriptions
requestBody:
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NadrfDataStoreSubscription'
required: true
responses:
  '200':
    description: Successful response with reference used to identify the subscription at the
ADRF.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NadrfDataStoreSubscriptionRef'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/request-storage-sub-removal:
post:
  summary: triggers the removal of ADRF storage subscription.
  operationId: DeleteADRFStorageSubscription
  tags:
    - ADRF Storage Subscriptions
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NadrfDataStoreSubscriptionRef'
  required: true
responses:
  '204':
    description: No Content. The ADRF Storage Subscription matching the provided reference was
deleted.
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/remove-stored-data-analytics:

```

```

post:
  summary: remove ADRF data based on data or analytics specification.
  operationId: DeleteADRFData
  tags:
    - ADRF Stored Data
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NadrfStoredDataSpec'
    required: true
  responses:
    '204':
      description: No Content. The ADRF data matching the provided specification is deleted.
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
#
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nadrf-datamanagement: Access to the nadrf-datamanagement API
#
schemas:
#
  NadrfDataStoreRecord:
    description: Represents an Individual ADRF Data Store Record.
    type: object
    oneOf:
      - required: [anaNotifications]
      - required: [amfEventNotifs]
      - required: [smfEventNotifs]
      - required: [udmEventNotifs]
      - required: [nefEventNotifs]
      - required: [afEventNotifs]
    properties:
      anaNotifications:
        type: array
        items:
          $ref:
            'TS29520_Nnwdaft_EventsSubscription.yaml#/components/schemas/NnwdaftEventsSubscriptionNotification'
        minItems: 1
        description: List of analytics subscription notifications.
      amfEventNotifs:
        type: array
        items:
          $ref:
            'TS29518_Namf_EventExposure.yaml#/components/schemas/AmfEventNotification'
        minItems: 1
        description: List of notifications of AMF events.
      smfEventNotifs:
        type: array
        items:
          $ref:
            'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NsmfEventExposureNotification'
        minItems: 1
        description: List of notifications of SMF events.

```

```

minItems: 1
description: List of notifications of SMF events.
udmEventNotifs:
  type: array
  items:
    $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/MonitoringReport'
    minItems: 1
    description: List of notifications of UDM events.
nefEventNotifs:
  type: array
  items:
    $ref: 'TS29591_Nnef_EventExposure.yaml#/components/schemas/NefEventExposureNotif'
    minItems: 1
    description: List of notifications of NEF events.
afEventNotifs:
  type: array
  items:
    $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureNotif'
    minItems: 1
    description: List of notifications of AF events.
#
NadrfDataStoreSubscription:
  description: Contains information to be used by the ADRF to create a Data or Analytics subscription.
  type: object
  allOf:
    - oneOf:
        - required: [anaSub]
        - required: [dataSub]
    - oneOf:
        - required: [targetNfId]
        - required: [targetNfSetId]
  properties:
    anaSub:
      $ref:
        'TS29520_Nnwdaft_EventsSubscription.yaml#/components/schemas/NnwdaftEventsSubscription'
      dataSub:
        $ref: '#/components/schemas/DataSubscription'
      targetNfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      targetNfSetId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
      formatInstruct:
        $ref: 'TS29574_Ndccf_DataManagement.yaml#/components/schemas/FormattingInstruction'
      procInstruct:
        $ref: 'TS29574_Ndccf_DataManagement.yaml#/components/schemas/ProcessingInstruction'
#
NadrfDataRetrievalSubscription:
  description: Represents an Individual ADRF Data Retrieval Subscription.
  type: object
  required:
    - notifCorrId
    - notificationURI
    - timePeriod
  oneOf:
    - required: [anaSub]
    - required: [dataSub]
  properties:
    anaSub:
      $ref:
        'TS29520_Nnwdaft_EventsSubscription.yaml#/components/schemas/NnwdaftEventsSubscription'
      dataSub:
        $ref: '#/components/schemas/DataSubscription'

      notificationURI:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      timePeriod:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
      notifCorrId:
        type: string
        description: Notification correlation identifier.
#
NadrfDataRetrievalNotification:
  description: Represents a notification that corresponds with an Individual ADRF Data Retrieval Subscription.
  type: object
  required:
    - notifCorrId

```

```

oneOf:
  - required: [anaNotifications]
  - required: [amfEventNotifs]
  - required: [smfEventNotifs]
  - required: [udmEventNotifs]
  - required: [nefEventNotifs]
  - required: [afEventNotifs]
properties:
  notifCorrId:
    type: string
    description: Notification correlation identifier.
  anaNotifications:
    type: array
    items:
      $ref:
        'TS29520_NnwdaF_EventsSubscription.yaml#/components/schemas/NnwdaFEventsSubscriptionNotification'
        minItems: 1
        description: List of analytics subscription notifications.
  amfEventNotifs:
    type: array
    items:
      $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/AmfEventNotification'
      minItems: 1
      description: List of notifications of AMF events.
  smfEventNotifs:
    type: array
    items:
      $ref:
        'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NsmfEventExposureNotification'
        minItems: 1
        description: List of notifications of SMF events.
  udmEventNotifs:
    type: array
    items:
      $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/MonitoringReport'
      minItems: 1
      description: List of notifications of UDM events.
  nefEventNotifs:
    type: array
    items:
      $ref: 'TS29591_Nnef_EventExposure.yaml#/components/schemas/NefEventExposureNotif'
      minItems: 1
      description: List of notifications of NEF events.
  afEventNotifs:
    type: array
    items:
      $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureNotif'
      minItems: 1
      description: List of notifications of AF events.

#
# NadrfDataStoreSubscriptionRef:
  description: Contains a reference to a request for a Data or Analytics subscription.
  type: object
  required:
    - transRefId
  properties:
    transRefId:
      type: string
      description: Transaction reference identifier.

#
# NadrfStoredDataSpec:
  description: Contains information about Data or Analytics specification.
  type: object
  required:
    - timePeriod
  oneOf:
    - required: [dataSpec]
    - required: [anaSpec]
  properties:
    dataSpec:
      $ref: '#/components/schemas/DataSubscription'
    anaSpec:
      $ref:
        'TS29520_NnwdaF_EventsSubscription.yaml#/components/schemas/NnwdaFEventsSubscription'
        timePeriod:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'

#
# DataSubscription:

```

```
description: Contains a data specification.
type: object
oneOf:
  - required: [amfDataSub]
  - required: [smfDataSub]
  - required: [udmDataSub]
  - required: [nefDataSub]
  - required: [afDataSub]
properties:
  amfDataSub:
    $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/AmfEventSubscription'
  smfDataSub:
    $ref: 'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NsmfEventExposure'
  udmDataSub:
    $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/EeSubscription'
  afDataSub:
    $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
  nefDataSub:
    $ref: 'TS29591_Nnef_EventExposure.yaml#/components/schemas/NefEventExposureSubsc'
#
#
```

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-06	CT3#116e					TS skeleton of Analytics Data Repository Services specification	0.0.0
2021-06	CT3#116e	C3-213501				Inclusion of documents agreed in CT3#116e C3-213537.	0.1.0
2021-08	CT3#117e	C3-214579				Inclusion of documents agreed in CT3#117e C3-214478.	0.2.0
2021-11	CT3#119e	C3-216521				Inclusion of documents agreed in CT3#119e C3-216443, C3-216455, C3-216456, C3-216457, C3-216458, C3-216459, C3-216460, C3-216462, C3-216469, C3-216591, C3-216592, C3-216593.	0.3.0
2022-01	CT3#119bis-e	C3-220454				Inclusion of documents agreed in CT3#119bis-e C3-220500, C3-220512, C3-220513, C3-220440, C3-220441, C3-220369.	0.4.0
2022-02	CT3#120	C3-221516				Inclusion of documents agreed in CT3#120-e C3-221091, C3-221288, C3-221620, C3-221621.	0.5.0
2022-03	CT#95e	CP-220160				Presentation to TSG CT for approval	1.0.0
2022-03	CT#95e	CP-220160				Approved by TSG CT	17.0.0

History

Document history		
V17.0.0	May 2022	Publication