Draft ETSI EN 300 019-1-1 V2.1.8 (2013-12)



Environmental Engineering (EE);
Environmental conditions and environmental tests
for telecommunications equipment;
Part 1-1: Classification of environmental conditions;
Storage

Reference

REN/EE-0154

Keywords environment, equipment practice, testing

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2013.
All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**TM and **LTE**TM are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intell	ectual Property Rights	4
Forev	word	4
1	Scope	
	-	
2 2.1	References	
2.1	Normative references	
2.2	Informative references	
3	Definitions	5
4	Environmental classes	6
1 4.1	Class 1.1: Weatherprotected, partly temperature-controlled storage locations	
4.2	Class 1.2: Weatherprotected, not temperature-controlled storage locations	
4.3	Class 1.3: Non-weatherprotected storage locations; class 1.3E: non-weatherprotected storage locations-	/
т.Э	extended	۶
5	Environmental conditions.	
5.1	Climatic conditions	
5.2	Biological conditions	
5.3	Chemically active substances	
5.4	Mechanically active substances	
5.5	Mechanical conditions	12
A nne	ex A (informative): Bibliography	12
->111116	EX A (IIII OI III au v C). DIDII O GI TAPII Y	13
Histo	ory	14

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://ipr.etsi.org).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This draft European Standard (EN) has been produced by ETSI Technical Committee Environmental Engineering (EE), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document is part 1, sub-part 1 of a multi-part deliverable covering the classification of environmental conditions and environmental tests for telecommunications equipment, as identified below:

Part 1: "Classification of environmental conditions": (see note 1)

Sub-part 0: "Introduction"; Sub-part 1: "Storage"; Sub-part 2: "Transportation"; Sub-part 3: "Stationary use at weatherprotected locations"; Sub-part 4: "Stationary use at non-weatherprotected locations"; Sub-part 5: "Ground vehicle installations"; "Ship environments"; Sub-part 6: Sub-part 7: "Portable and non-stationary use"; Sub-part 8: "Stationary use at underground locations"; Part 2: "Specification of environmental tests" (see note 2).

NOTE 1: Specifies different standardized environmental classes covering climatic and biological conditions, chemically and mechanically active substances and mechanical conditions during storage, transportation and in use. Sub-part 1-0 forms a general overview of part 1.

NOTE 2: Specifies the recommended test severities and test methods for the different environmental classes.

Proposed national transposition dates						
Date of latest announcement of this EN (doa): 3 months after ETSI publication						
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa					
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa					

1 Scope

The present document defines classes of environmental conditions and their severities to which telecommunication equipment may be exposed during storage. The severities specified are those which will have a low probability of being exceeded; generally less than 1 %.

NOTE 1: Temporary storage during transport is included in part 1-2: Transportation.

NOTE 2: If the equipment is stored in its package, the environmental conditions apply to the packaged equipment.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at http://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

Not applicable.

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Void.
- [i.2] IEC 60721-3-1:1997: "Classification of environmental conditions Part 3: Classification of groups of environmental parameters and their severities Section 1: Storage".
- [i.3] IEC 60068-2-27:2005: "Environmental testing. Part 2: Tests. Test Ea and guidance: Shock".
- [i.4] IEC 60721-2-4:2002: "Classification of environmental conditions. Part 2: Environmental conditions appearing in nature: Solar radiation and temperature".

3 Definitions

For the purposes of the present document, the following terms and definitions apply:

absolute humidity: mass of water vapour in grammes which is associated with one cubic metre of dry air in an air/water vapour mixture

non-weatherprotected location: location at which equipment is not protected from direct weather influences

relative humidity: ratio of the partial pressure of the water vapour in moist air at a given temperature, to the partial pressure of the water vapour in saturated air at the same temperature

storage: certain site where the equipment is placed for long periods but is not intended for use during these periods

weatherprotected location: location at which the equipment is protected from weather influences

NOTE 1: Totally weatherprotected location: Direct weather influences are totally excluded.

NOTE 2: Partly weatherprotected location: Direct weather influences are not completely excluded.

4 Environmental classes

The classes shown in parentheses, e.g. (1C1), may be selected for special applications.

4.1 Class 1.1: Weatherprotected, partly temperature-controlled storage locations

This class is a combination of classes 1K3/1Z2/1B1/1C2(1C1)/1S2/1M2 in IEC 60721-3-1 [i.2].

This class shall apply to weatherprotected partly temperature controlled storage. Humidity is usually not controlled. The climatogram is shown in figure 1.

Heating may be used to raise low temperatures especially where there is a significant difference between the conditions of this class and the open-air climate. Building construction is designed to avoid extremely high temperatures.

This class shall apply to storage locations:

- where equipment may be exposed to solar radiation and heat radiation. It may also be exposed to movements of the surrounding air due to draughts in buildings, e.g. through open windows. It is not subjected to precipitation and water from sources other than rain;
- without particular risks by biological attacks. This includes protective measures, e.g. special package design, or storing at locations of such construction that mould growth, attacks by animals etc. are not probable;
- with normal levels of contaminants experienced in urban areas with industrial activities scattered over the whole area, and/or with heavy traffic;
- without special precautions to minimize the presence of dust or sand, but not situated in proximity to dust or sand sources;
- with vibration of low significance and insignificant shock.

The conditions of this class may occur in ordinary storage rooms for frost-resistant products.

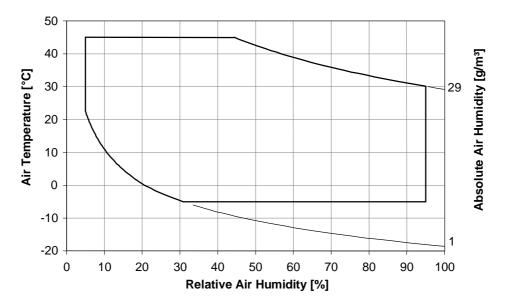


Figure 1: Climatogram for class 1.1: weatherprotected, partly temperature-controlled storage locations

4.2 Class 1.2: Weatherprotected, not temperature-controlled storage locations

This class is a combination of classes 1K4/1Z2/1Z3/1Z5/1B2/1C2(1C1)/1S3/1M2 in IEC 60721-3-1 [i.2].

This class shall apply to weatherprotected storage having neither temperature nor humidity control. The location may have openings directly to the open air, i.e. it may be only partly weatherprotected. The climatogram is shown in figure 2.

This class shall apply to storage locations:

- where equipment may be exposed to solar radiation and temporarily to heat radiation. They may also be
 exposed to movements of the surrounding air due to draughts, e.g. through doors, windows or other openings.
 They may be subjected to condensed water, dripping water and to icing. They may also be subjected to limited
 wind-driven precipitation including snow;
- where mould growth, or attacks by animals, except termites, may occur;
- with normal levels of contaminants experienced in urban areas with industrial activities scattered over the whole area, and/or with heavy traffic;
- in areas with sources of sand or dust, including urban areas;
- with vibration of low significance and insignificant shock.

The conditions of this class may occur in:

- unattended buildings;
- some entrances of buildings;
- some garages and shacks.

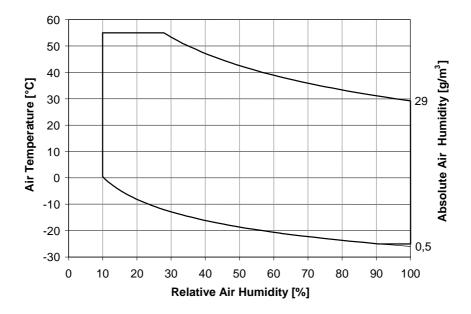


Figure 2: Climatogram for class 1.2: weatherprotected, not temperature-controlled storage locations

4.3 Class 1.3: Non-weatherprotected storage locations; class 1.3E: non-weatherprotected storage locations-extended

Class 1.3 is a combination of classes 1K8/1Z1/1Z4/1B2/1C2/1S3/1M3(1M4) in IEC 60721-3-1 [i.2]. Class 1.3E is a combination of classes 1Z1/1Z4/1B2/1C2/1S3/1M3(1M4) in IEC 60721-3-1 [i.2] and the severities given in clause 5.1.

NOTE: If more severe mechanical conditions are expected, IEC class 1M4 may be chosen.

This class shall apply to storage which is not protected from direct weather influences. The climatogram is shown in figure 3.

This class shall apply to storage locations:

- which are directly exposed to an open-air climate including solar radiation, movement of the surrounding air, precipitation and water jets;
- where mould growth, or attacks by animals but excluding termites, may occur;
- with normal levels of contaminants experienced in urban areas with industrial activities scattered over the whole area, and/or with heavy traffic;
- in areas with sources of sand or dust, including urban areas;
- with significant vibration and shock, e.g. transmitted from machines or passing vehicles in the vicinity, etc.

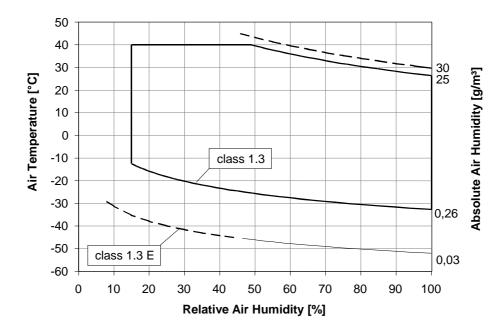


Figure 3: Climatogram for class 1.3 and 1.3E: non-weatherprotected storage locations

5 Environmental conditions

5.1 Climatic conditions

Table 1: Climatic conditions for environmental classes 1.1 to 1.3E

Environmental parameter		Unit	Class				
			1.1	1.2	1.3	1.3E	
a)	Low air temperature (see note 1)	°C	-5	-25	-33	-45	
			(see note 8)		(see note 9)	(see note 9)	
b)	High air temperature (see note 1)	°C	45	55	40	45	
c)	Low relative humidity (see note 1)	%	5	10	15	8	
d)	High relative humidity (see note 1)	%	95	100	100	100	
e)	Low absolute humidity (see note 1)	g/m ³	1	0,5	0,26	0,03	
f)	High absolute humidity (see note 1)	g/m ³	29	29	25	30	
g)	Rain intensity	mm/min	no	no	6	15	
h)	Rate of change of temp. (see note 2)	°C/min	0,5	0,5	0,5	0,5	
i)	Low air pressure (see note 3)	kPa	70	70	70	70	
j)	High air pressure (see note 4)	kPa	106	106	106	106	
k)	Solar radiation	W/m ²	700	1 120	1 120	1 120	
l)	Heat radiation	W/m ²	(see note 7)	(see note 7)	negligible	Negligible	
m)	Movement of the surrounding air	m/s	1,0	30	50	50	
n)	Conditions of condensation	none	yes	yes	yes	Yes	
o)	Conditions of precipitation (rain, snow, hail,	none	no	(see note 6)	yes	Yes	
	etc.)			yes			
p)	Low rain temperature (see note 5)	°C	no	no	5	5	
q)	Conditions from water from sources other	none	no	dripping	splashing	splashing	
	than rain			water	water	water	
r)	Conditions of icing and frosting	none	yes	yes	yes	Yes	
			(see note 8)				
	Climatogram figure number		1 1	2	3	3	

- NOTE 1: For simultaneous occurrence of parameters a) to f) see figures 1 to 3.
- NOTE 2: Averaged over a period of 5 minutes.
- NOTE 3: 70 kPa represent a limit value for open-air storage, normally at about 3 000 m.
- NOTE 4: Conditions in mines are not considered.
- NOTE 5: This rain temperature should be considered together with high air temperature b) and solar radiation k). The cooling effect of the rain has to be considered in connection with the surface temperature of the equipment.
- NOTE 6: Applies to wind-driven precipitation.
- NOTE 7: Conditions of heat radiation, e.g. in the vicinity of room heating systems.
- NOTE 8: For certain items storage conditions may be maintained above 5 °C.
- NOTE 9: On cloudless nights an object exposed to atmospheric radiation will radiate more heat than it receives off the surface, compared to the ambient air temperature. In practice (under extreme conditions) the surface may come down to a temperature in the order of 10 °C to 20 °C below ambient air temperature, when the ambient air temperature ranges from +20 °C to -30 °C (see IEC 60721-2-4 [i.4]).

5.2 Biological conditions

Table 2: Biological conditions for environmental classes 1.1 to 1.3E

Environmental Unit		Class			
parameter			1.1	1.2, 1.3, 1.3E	
a)	Flora	none	negligible	Presence of mould, fungus, etc.	
b)	Fauna	none	negligible Presence of rodents and other anim		
				harmful to equipment but excluding termites.	

5.3 Chemically active substances

Table 3: Chemically active substances for environmental classes 1.1 to 1.3E

Environmental parameter		Unit (see note 2)	Class 1.1 to 1.3E		Special (1C1) (see note 1) for classes 1.1 and 1.2
			Mean value (see note 3)	Maximum value (see note 4)	Maximum value (see note 4)
a)	Salts	none	sea (s	ee note 5) and road sa	alt mist
b)	Sulphur dioxide (SO ₂)	mg/m ³ cm ³ /m ³	0,3 0,11	1,0 0,37	0,1 0,037
c)	Hydrogen sulphide (H ₂ S)	mg/m ³ cm ³ /m ³	0,1 0,071	0,5 0,36	0,01 0,0071
d)	Chlorine (CI)	mg/m ³ cm ³ /m ³	0,1 0,034	0,3 0,1	0,1 0,034
e)	Hydrogen chloride (HCI)	mg/m ³ cm ³ /m ³	0,1 0,066	0,5 0,33	0,1 0,066
f)	Hydrogen fluoride (HF)	mg/m ³ cm ³ /m ³	0,01 0,012	0,03 0,036	0,003 0,0036
g)	Ammonia (NH ₃)	mg/m ³ cm ³ /m ³	1,0 1,4	3,0 4,2	0,3 0,42
h)	Ozone (O ₃)	mg/m ³ cm ³ /m ³	0,05 0,025	0,1 0,05	0,01 0,005
i)	Nitrogen oxides (see note 6) (NO _X)	mg/m ³ cm ³ /m ³	0,5 0,26	1,0 0,52	0,1 0,052

NOTE 1: Because of the low probability of simultaneous occurrence of these gases at the levels of IEC class 1C2, the values of 1C1 are considered more appropriate to describe the long-term environmental conditions.

5.4 Mechanically active substances

Table 4: Mechanically active substances for environmental classes 1.1 to 1.3E

Environmental parameter		Unit	Cla	ass
			1.1	1.2, 1.3, 1.3E
a)	Sand	mg/m ³	30	300
b)	Dust (Suspension)	mg/m ³	0,2	5,0
c)	Dust (Sedimentation)	mg/(m ² h)	1,5	20

NOTE 2: The values given in cm³/m³ have been calculated from the values given in mg/m³ and refer to a temperature of 20 °C and a pressure of 101,3 kPa. The table uses rounded values.

NOTE 3: Mean values are the average values (long term values) to be expected.

NOTE 4: Maximum values are limit or peak values, occurring over a period of time of not more than 30 minutes per day.

NOTE 5: Sea salt mist may be present at sheltered locations in coastal areas.

NOTE 6: Expressed as equivalent values of nitrogen dioxide.

5.5 Mechanical conditions

Table 5: Mechanical conditions for environmental classes 1.1 to 1.3E

			Class					
	Environmental parameter	Unit	1.1	and 1.2	1.3 an	d 1.3E	Special (1M	14)
a)	Stationary vibration, sinusoidal: displacement amplitude (see note 1)	mm	1,5		3,0		7,0	•
	acceleration amplitude (see note 1)	m/s ²		5		10		20
	frequency range (note 3)	Hz	2 to 9	9 to 200	2 to 9	9 to 200	2 to 9	9 to 200
	Stationary vibration Random Acceleration spectral density	ASD(m2/ S3)		0.02		04		
		(dB/oct)	+12	-12	+12	-12		
		Frequency range	5-10 10-	50 50-100	5-10 10-	50 50-100		
		Axes of vibration	3		3			
b)	Non-stationary vibration, including shock: (see note 2) shock response spectrum type I, peak acceleration (â) Duration shock response spectrum type II	m/s ² ms				00 1		
	peak acceleration (â)	m/s ²					250	
	Duration	ms					6	
	shock response spectrum type L peak acceleration (â)	m/s ²		40				
	duration	ms		22				
	Static load	kPa		5		5	5	

NOTE 1: Peak values.

NOTE 2: For definition of Model Shock Response Spectra (First Order Maximax Shock Response Spectra) see

IEC 60721-3-1 [i.2], and Maximax see IEC 60068-2-27 [i.3].

NOTE 3: Cross-over frequency is a rounded value.

Annex A (informative): Bibliography

ETSI TR 100 035 (2004): "Environmental Engineering (EE); Environmental engineering; Guidance and terminology".

History

Document history								
Edition 1	February 1992	992 Publication as ETS 300 019-1-1						
V2.1.2	April 2002	Publication						
V2.1.4	April 2003	Publication						
V2.1.8	December 2013	EN Approval Procedure	AP 20140419: 2013-12-20 to 2014-04-21					