

ETSI ES 203 119-5 V1.1.1 (2018-05)



**Methods for Testing and Specification (MTS);
The Test Description Language (TDL);
Part 5: UML profile for TDL**

Reference

DES/MTS-203119-5

Keywords

methodology, model, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword	6
Modal verbs terminology	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references	7
3 Definitions, symbols and abbreviations	7
3.1 Definitions	7
3.2 Symbols	8
3.3 Abbreviations	8
4 Structure of the UML Profile for TDL	8
5 Foundation	9
5.1 Overview	9
5.2 Element	9
5.3 NamedElement	9
5.4 PackageableElement	10
5.5 Package	10
5.6 ElementImport	10
5.7 Comment	11
5.8 Annotation	11
5.9 AnnotationType	12
5.10 TestObjective	12
6 Data	12
6.1 Data Definition	12
6.1.1 Overview	12
6.1.2 DataResourceMapping	13
6.1.3 MappableDataElement	13
6.1.4 DataElementMapping	13
6.1.5 ParameterMapping	14
6.1.6 DataType	14
6.1.7 DataInstance	14
6.1.8 SimpleDataType	15
6.1.9 SimpleDataInstance	15
6.1.10 StructuredDataType	16
6.1.11 Member	16
6.1.12 StructuredDataInstance	16
6.1.13 MemberAssignment	17
6.1.14 Parameter	17
6.1.15 FormalParameter	17
6.1.16 Variable	18
6.1.17 Action	18
6.1.18 Function	18
6.2 Data Use	19
6.2.1 Overview	19
6.2.2 DataUse	19
6.2.3 ParameterBinding	20
6.2.4 StaticDataUse	20
6.2.5 DataInstanceUse	20
6.2.6 SpecialValueUse	21
6.2.7 AnyValue	21
6.2.8 AnyValueOrOmit	21
6.2.9 OmitValue	22

6.2.10	DynamicDataUse	22
6.2.11	FunctionCall	22
6.2.12	FormalParameterUse	23
6.2.13	VariableUse	23
7	Time	23
7.1	Overview	23
7.2	Time	25
7.3	TimeLabel	25
7.4	TimeLabelUse	25
7.5	TimeConstraint	26
7.6	TimeOperation	26
7.7	Wait	26
7.8	Quiescence	27
7.9	Timer	27
7.10	TimerOperation	27
7.11	TimerStart	28
7.12	TimerStop	28
7.13	TimeOut	28
8	Test Configuration	29
8.1	Overview	29
8.2	GateType	29
8.3	GateInstance	30
8.4	ComponentType	30
8.5	ComponentInstance	30
8.6	ComponentInstanceRole	31
8.7	GateReference	31
8.8	Connection	32
8.9	TestConfiguration	32
9	Test Behaviour	32
9.1	Test Description	32
9.1.1	Overview	32
9.1.2	TestDescription	33
9.1.3	BehaviourDescription	33
9.2	Combined Behaviour	34
9.2.1	Overview	34
9.2.2	Behaviour	34
9.2.3	Block	35
9.2.4	CombinedBehaviour	35
9.2.5	SingleCombinedBehaviour	35
9.2.6	CompoundBehaviour	36
9.2.7	BoundedLoopBehaviour	36
9.2.8	UnboundedLoopBehaviour	36
9.2.9	MultipleCombinedBehaviour	37
9.2.10	AlternativeBehaviour	37
9.2.11	ConditionalBehaviour	37
9.2.12	ParallelBehaviour	37
9.2.13	ExceptionalBehaviour	38
9.2.14	DefaultBehaviour	38
9.2.15	InterruptBehaviour	38
9.2.16	PeriodicBehaviour	39
9.3	Atomic Behaviour	39
9.3.1	Overview	39
9.3.2	AtomicBehaviour	41
9.3.3	Break	41
9.3.4	Stop	41
9.3.5	VerdictAssignment	42
9.3.6	Assertion	42
9.3.7	Interaction	42
9.3.8	Target	43
9.3.9	TestDescriptionReference	43

9.3.10	ComponentInstanceBinding	44
9.3.11	ActionBehaviour	44
9.3.12	ActionReference	45
9.3.13	InlineAction	45
9.3.14	Assignment	46
History		47

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Methods for Testing and Specification (MTS).

The present document is part 5 of a multi-part deliverable. Full details of the entire series can be found in part 1 [1].

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document specifies how the concepts of the TDL meta-model [1] are mapped to OMG® UML® to create a UML Profile for TDL, called UP4TDL.

NOTE: OMG® and UML® are the trademarks of OMG (Object Management Group). This information is given for the convenience of users of the present document and does not constitute an endorsement by ETSI of the products named.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI ES 203 119-1 (V1.4.1): "Methods for Testing and Specification (MTS); The Test Description Language (TDL); Part 1: Abstract Syntax and Associated Semantics".
- [2] OMG® formal/2011-08-06: "OMG Unified Modeling Language™ (OMG UML) Superstructure, Version 2.4.1".

NOTE: Available at <http://www.omg.org/spec/UML/2.4.1/>.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

Not applicable.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI ES 203 119-1 [1] and the following apply:

UML profile: extension mechanism provided by UML

3.2 Symbols

For the purposes of the present document, the symbols given in [2] apply.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

OMG	Object Management Group®
SUT	System Under Test
TDL	Test Description Language
UML	Unified Modelling Language®

4 Structure of the UML Profile for TDL

The stereotypes representing concepts from the Foundation section of the TDL meta-model are directly stored in the UP4TDL Profile, while other concepts are stored in various additional included Packages.

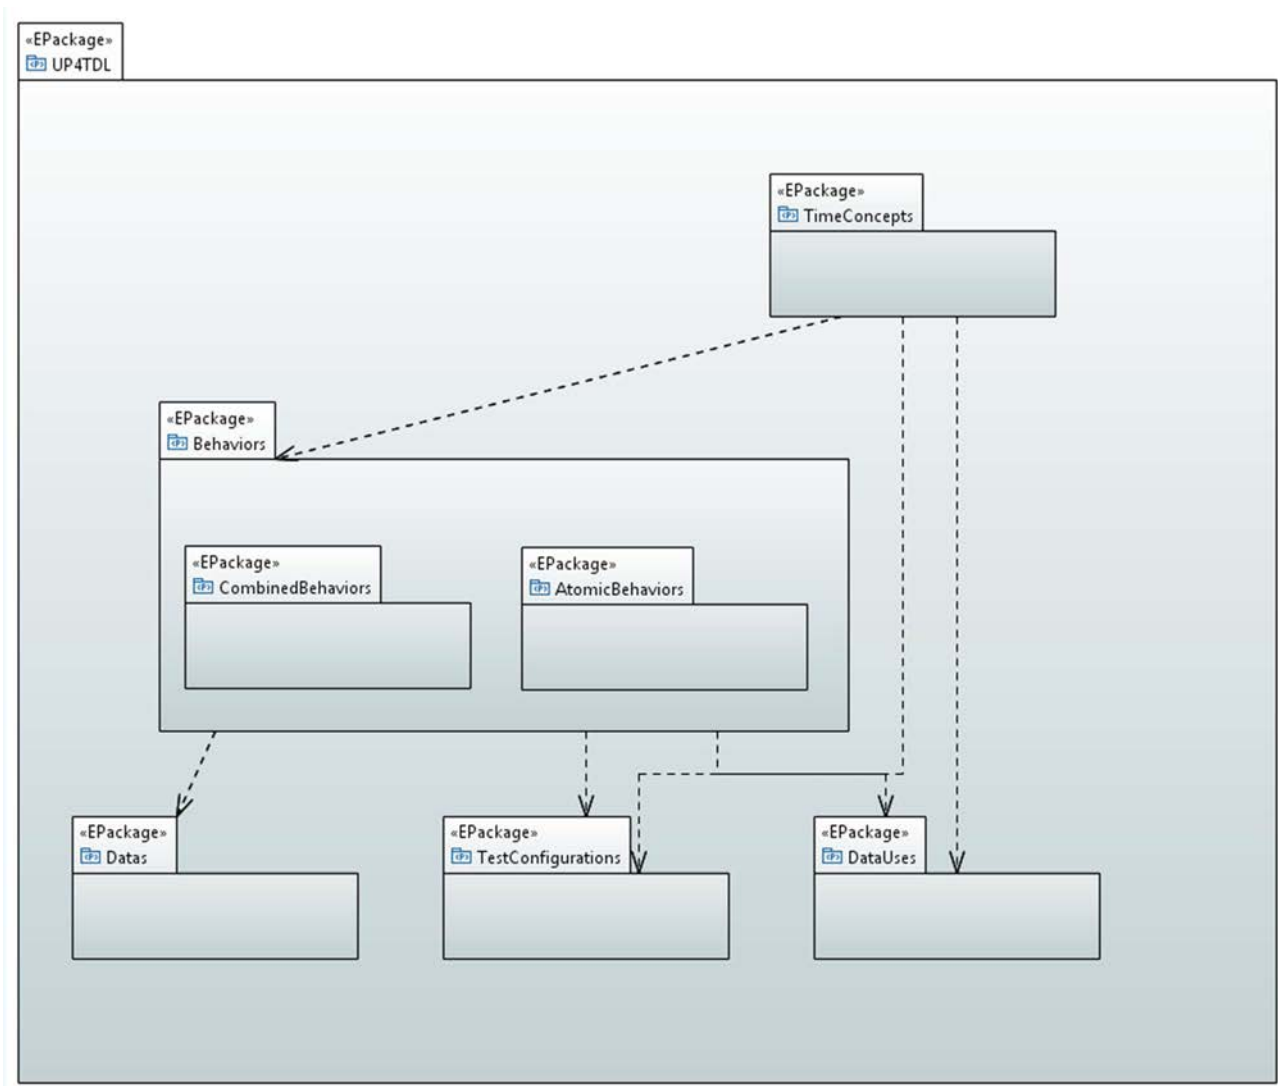


Figure 4.1: Structure of UMLProfile4TDL

The following clauses describe the content of each package. The subclasses describe how the TDL meta-model elements can be mapped to UML.

5 Foundation

5.1 Overview

Most concepts of the Foundation Package are directly mapped to UML meta-classes. Exceptions are:

- TDL::Element : a stereotype is created to allow elements to have Annotations;
- TDL::Annotations and TDL::TestObjective for which there is no equivalent concept in UML.

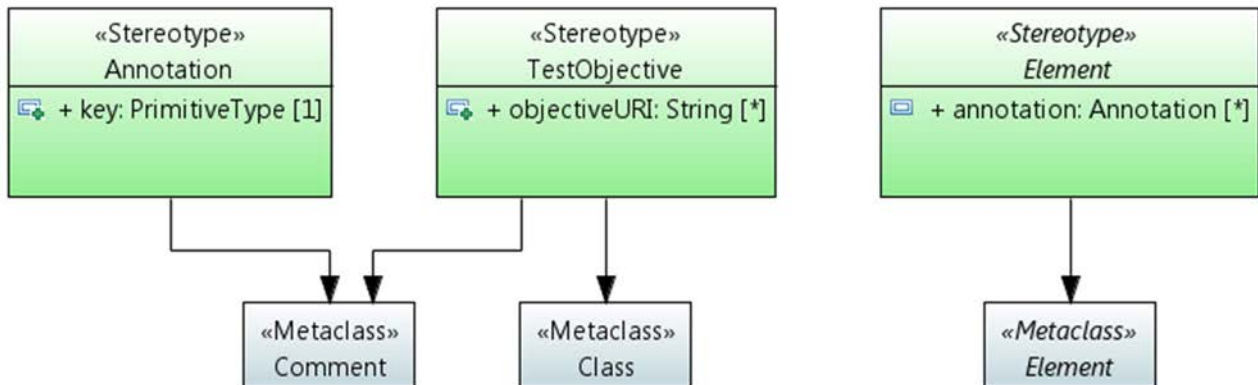


Figure 5.1: Foundational language concepts

5.2 Element

Extended UML Meta-Class

- UML::Element

Generalization

None.

Properties

- <<UP4TDL::Element>>
- TDL::Element.comment := Computed as the set of Comment whose *annotatedElement* Property contains this element
- TDL::Element.annotation := UP4TDL::Element.annotation : new (derived) property computed as the set of Comment with stereotype Annotation applied whose *annotatedElement* property contains this Element

Constraints

None.

5.3 NamedElement

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::NamedElement

Generalization

None.

Properties

- TDL::NamedElement.qualifiedName := UML::NamedElement.qualifiedName

Constraints

None.

5.4 PackageableElement

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::PackageableElement

Generalization

None.

Properties

None.

Constraints

None.

5.5 Package

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Package

Generalization

None.

Properties

- TDL::Package.packagedElement:= UML::Package.packagedElement
- TDL::Package.import := UML::Package.elementImport
- TDL::Package.nestedPackage := UML::Package.nestedPackage

Constraints

None.

5.6 ElementImport

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::ElementImport

Generalization

None.

Properties

- TDL::ElementImport is resolved in UML by a set of UML::ElementImport
- TDL::ElementImport.importedPackage := UML::ElementImport.importedElement.namespace
- TDL::ElementImport.importedElement := UML::ElementImport.importedElement

Constraints

None.

Model to Model transformation advice

- In UML, an ElementImport can import exactly one element. This implies that for one TDL::ElementImport, the equivalent model in UP4TDL can have several UML::ElementImport

5.7 Comment

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Comment

Generalization

None.

Properties

- TDL::Comment.commentedElement := UML::Comment.annotatedElement
- TDL::Comment.body := UML::Comment.body

Constraints

None.

5.8 Annotation

Extended UML Meta-Class

- UML::Comment

Generalization

None.

Properties

- <<UP4TDL::Annotation>>
- TDL::Annotation.key :=UP4TDL::Annotation.key (new property)
- TDL::Annotation.value := UP4TDL::Annotation.base_Comment.body

- TDL::Annotation.annotatedElement := UP4TDL::Annotation.base_Comment.annotatedElement

Constraints

None.

5.9 AnnotationType

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::PrimitiveType

Generalization

None.

Properties

None.

Constraints

None.

5.10 TestObjective

Extended UML Meta-Class

- UML::Comment
- UML::Class

Generalization

None.

Properties

- <<UP4TDL::TestObjective>>
- TDL::TestObjective.description := UP4TDL::TestObjective.description
- TDL::TestObjective.objectiveURI := UP4 TDL::TestObjective.objectiveURI (new property)

Constraints

None.

6 Data

6.1 Data Definition

6.1.1 Overview

TDL Data Mapping-related concepts are mapped to stereotypes in UML.

TDL::Function concept is mapped to a stereotype to make it possible to add the constraint that a Function has exactly one return parameter.

All the other TDL Data Definition concepts are directly mapped to UML meta-classes without stereotypes.

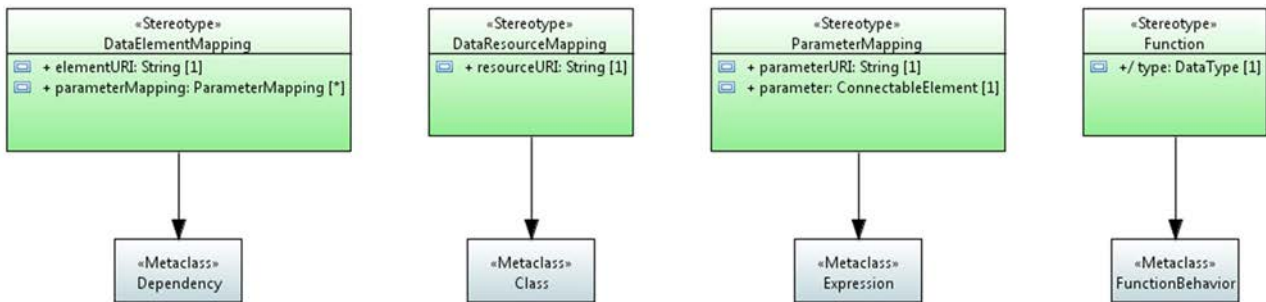


Figure 6.1: Data Definition concepts

6.1.2 DataResourceMapping

Extended UML Meta-Class

- UML::Class

Generalization

None.

Properties

- <<UP4TDL::DataresourceMapping>>
- TDL::DataResourceMapping.resourceURI := UP4TDL::DataresourceMapping.reourceURI (new property)

Constraints

None.

6.1.3 MappableDataElement

This MetaClass shall not be mapped.

6.1.4 DataElementMapping

Extended UML Meta-Class

- UML::Dependency

Generalization

None.

Properties

- <<UP4TDL::DataElementMapping>>
- TDL::DataElementMapping.elementURI :=UP4TDL::DataElementMapping.elementURI (new property)

- TDL::DataElementMapping.dataResourceMapping := UP4TDL::DataElementMapping.base_AssociationClass.memberEnd[0]
- TDL::DataElementMapping.mappableDataElement := UP4TDL::DataElementMapping.base_AssociationClass.memberEnd[1]
- TDL::DataElementMapping.parameterMapping := UP4TDL::DataElementMapping.parameterMapping (new property)

Constraints

None.

6.1.5 ParameterMapping

Extended UML Meta-Class

- UML::Expression

Generalization

None.

Properties

- <<UP4TDL::ParameterMapping>>
- TDL::ParameterMapping.memberURI := UP4TDL::ParameterMapping.memberURI (new property)
- TDL::ParameterMapping.parameter := UP4TDL::ParameterMapping.parameter (new property)

Constraints

None.

6.1.6 DataType

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Classifier

Generalization

None.

Properties

None.

Constraints

None.

6.1.7 DataInstance

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::InstanceSpecification

Generalization

None.

Properties

- TDL::DataInstance.dataType := UML::InstanceSpecification.classifier

Constraints

- TDL data instance shall have only one classifier

6.1.8 SimpleDataType

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::PrimitiveType

Generalization

None.

Properties

None.

Constraints

None.

6.1.9 SimpleDataInstance

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::InstanceSpecification

Generalization

None.

Properties

None.

Constraints

None.

Model to Model Transformation advice

- TDL::SimpleDataInstance and TDL::StructuredDataInstance are mapped to the same UML concept: UML::InstanceSpecification. To know whether an InstanceSpecification represents a TDL::SimpleDataInstance or a TDL::StructuredDataInstance, one shall look at UML::InstanceSpecification.classifier. If it is a PrimitiveType, then the InstanceSpecification represents a TDL::SimpleDataInstance, otherwise, it represents a TDL::StructuredDataInstance

6.1.10 StructuredDataType

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::DataType

Generalization

None.

Properties

- TDL::StructuredDataType.member := UML::DataType.ownedAttribute

Constraints

None.

6.1.11 Member

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Property

Generalization

None.

Properties

None.

Constraints

None.

Model to Model Transformation advice

- TDL::Members correspond to Properties that are owned by a DataType

6.1.12 StructuredDataInstance

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::InstanceSpecification

Generalization

None.

Properties

- TDL::StructuredDataInstance.memberAssignment:= UML::InstanceSpecification.slot

Constraints

None.

Model to Model Transformation advice

- TDL::SimpleDataInstance and TDL::StructuredDataInstance are mapped to the same UML concept : UML::InstanceSpecification. To know whether an InstanceSpecification represents a TDL::SimpleDataInstance or a TDL::StructuredDataInstance, one shall look at UML::InstanceSpecification.classifier. If it is a PrimitiveType, then the InstanceSpecification represents a TDL::SimpleDataInstance, otherwise, it represents a TDL::StructuredDataInstance

6.1.13 MemberAssignment

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Slot

Generalization

None.

Properties

- TDL::MemberAssignment.memberSpec := UML::Slot.value
- TDL::MemberAssignment.member := UML::Slot.definingFeature

Constraints

None.

6.1.14 Parameter

Extended UML Meta-Class

- Direct mapping without a stereotype to ConnectableElement

Generalization

None.

Properties

- TDL::Parameter.dataType:= UML::ConnectableElement.type

Constraints

None.

6.1.15 FormalParameter

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Parameter

Generalization

None.

Properties

None.

Constraints

None.

6.1.16 Variable

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Property

Generalization

None.

Properties

- TDL::Variable.dataType := UML.Property.type

Constraints

None.

6.1.17 Action

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::OpaqueBehaviour

Generalization

None.

Properties

- TDL::Action.body := UML::OpaqueBehaviour.body
- TDL::Action.formalParameter := UML::OpaqueBehaviour.ownedParameter

Constraints

None.

6.1.18 Function

Extended UML Meta-Class

- UML::FunctionBehaviour

Generalization

None.

Properties

- TDL::Function.returnType := UP4TDL::Function.returnType (Derived property computed as the type of the out parameter of the underlying behaviour)

Constraints

- There shall be exactly one parameter of a Function that is of kind return.

6.2 Data Use

6.2.1 Overview

Most of the Data Use concepts require a stereotype. In most of the cases these stereotypes extend the UML::Expression meta-class, except for DataUse, which extends ValueSpecification.

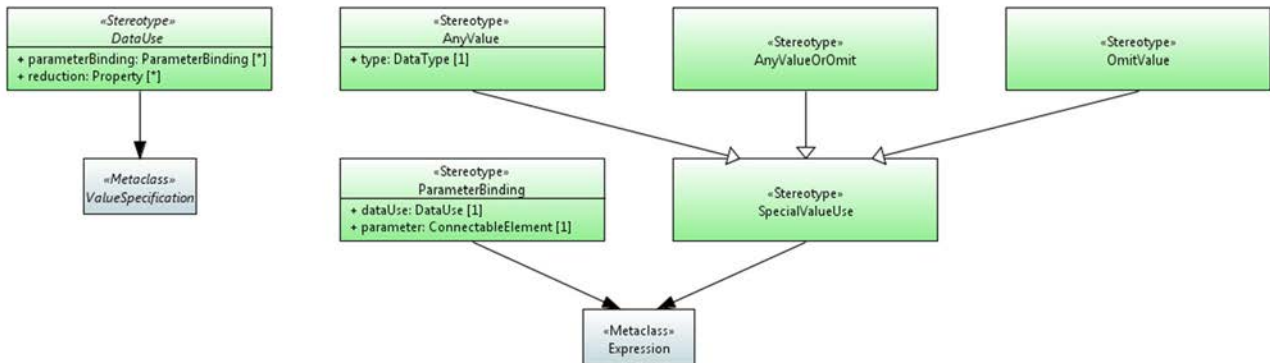


Figure 6.2: Data use concepts Part 1

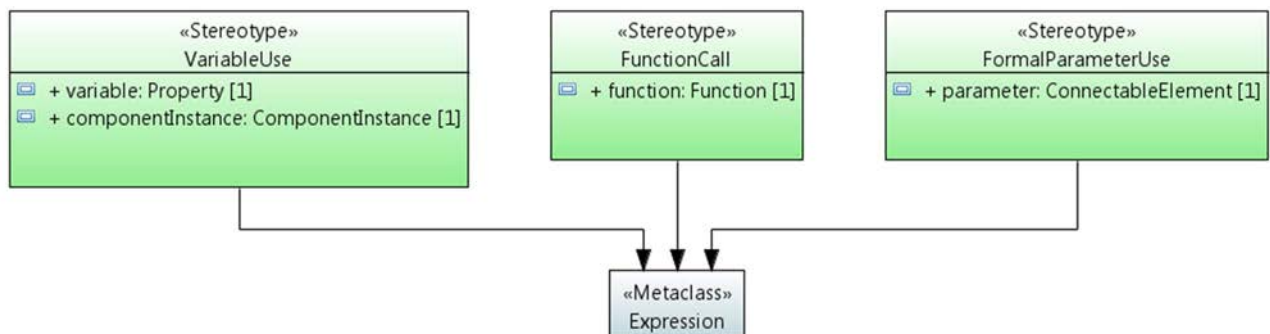


Figure 6.3: Data use concepts Part 2

6.2.2 DataUse

Extended UML Meta-Class

- UML::ValueSpecification. This is a required extension

Generalization

None.

Properties

- <<UP4TDL::DataUse>>
- TDL::DataUse.argument := UP4TDL::DataUse.argument (new property)
- TDL::DataUse.reduction := UP4TDL::DataUse.reduction (new property)

Constraints

None.

6.2.3 ParameterBinding

Extended UML Meta-Class

- UML::Expression

Generalization

None.

Properties

- <<UP4TDL::ParameterBinding>>
- TDL::ParameterBinding.dataUse := UML::Expression.operand
- TDL::ParameterBinding.parameter := UP4TDL::ParameterBinding.parameter (new property)

Constraints

None.

6.2.4 StaticDataUse

Extended UML Meta-Class

N/A.

Generalization

N/A.

Properties

N/A.

Constraints

None.

6.2.5 DataInstanceUse

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::InstanceValue

Generalization

None.

Properties

- TDL::DataInstanceUse.dataInstance := UML::InstanceValue.instance

Constraints

None.

6.2.6 SpecialValueUse

Extended UML Meta-Class

- UML::Expression

Generalization

None.

Properties

- <<UP4TDL::SpecialValueUse>>

Constraints

None.

6.2.7 AnyValue

Extended UML Meta-Class

- UML::Expression

Generalization

- UP4TDL::SpecialValueUse

Properties

- <<UP4TDL::AnyValue>>
- TDL:: AnyValue.type := UP4TDL:: AnyValue.type (new property)

Constraints

None.

6.2.8 AnyValueOrOmit

Extended UML Meta-Class

- UML::Expression

Generalization

- UP4TDL::SpecialValueUse

Properties

- <<UP4TDL::AnyValueOrOmit>>

Constraints

None.

6.2.9 OmitValue

Extended UML Meta-Class

- UML::Expression

Generalization

- UP4TDL::SpecialValueUse

Properties

- <<UP4TDL::OmitValue>>

Constraints

None.

6.2.10 DynamicDataUse

Extended UML Meta-Class

N/A.

Generalization

N/A.

Properties

N/A.

Constraints

None.

6.2.11 FunctionCall

Extended UML Meta-Class

- UML::Expression

Generalization

None.

Properties

- <<UP4TDL::FunctionCall>>
- TDL::FunctionCall.function := UP4TDL::FunctionCall.function (new property)

Constraints

None.

6.2.12 FormalParameterUse

Extended UML Meta-Class

- UML::Expression

Generalization

None.

Properties

- <<UP4TDL::FormalParameterUse>>
- TDL::FormalParameterUse.parameter = UP4TDL::FormalParameterUse.parameter (new property)

Constraints

None.

6.2.13 VariableUse

Extended UML Meta-Class

- UML::Expression

Generalization

None.

Properties

- <<UP4TDL::VariableUse>>
- TDL::VariableUse.variable := UP4TDL::VariableUse.variable (new property)
- TDL::VariableUse.componentInstance := UP4TDL::VariableUse.componentInstance (new property)

Constraints

None.

7 Time

7.1 Overview

All Time-related TDL concepts require stereotypes as shown in Figure 7.1 to Figure 7.3.

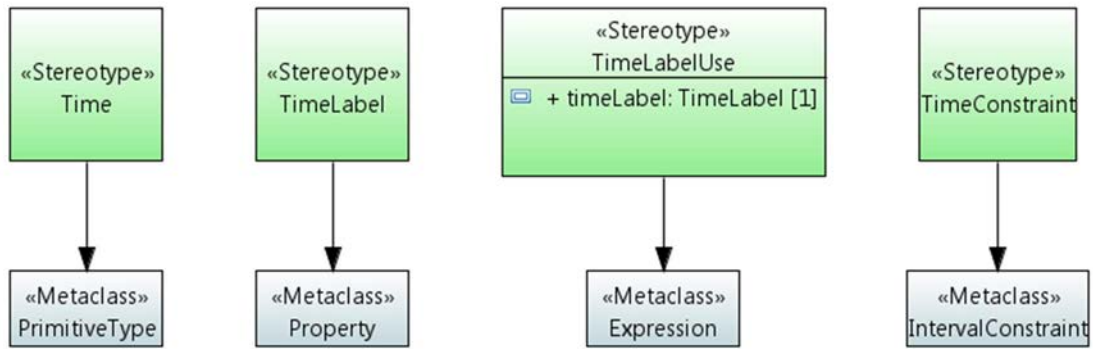


Figure 7.1: General time-related concepts

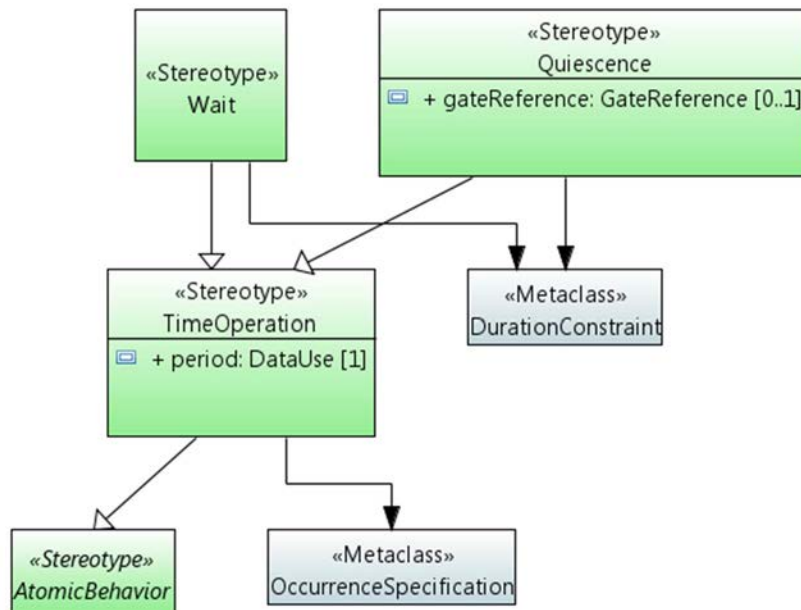


Figure 7.2: Time operations

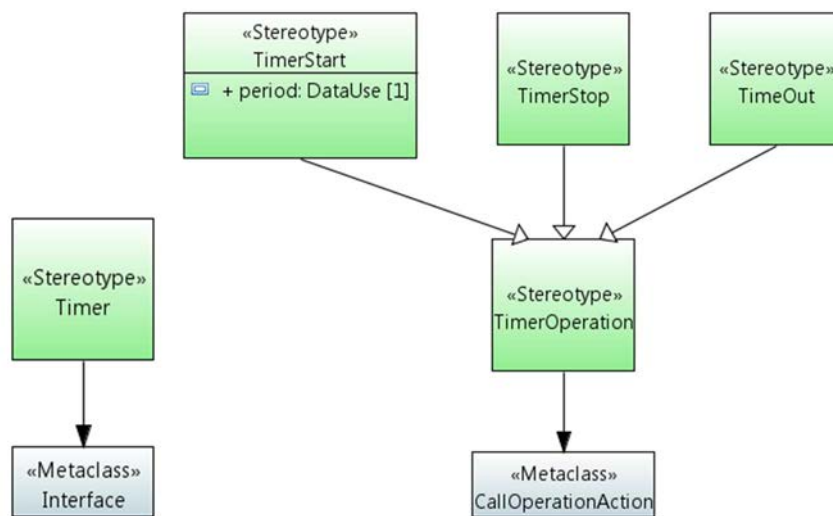


Figure 7.3: Timer and Timer Operations

7.2 Time

Extended UML Meta-Class

- UML::PrimitiveType (by generalization)

Generalization

None.

Properties

- <<UP4TDL::Time>>

Constraints

None.

7.3 TimeLabel

Extended UML Meta-Class

- UML::Property

Generalization

None.

Properties

- <<UP4TDL::TimeLabel>>

Constraints

None.

7.4 TimeLabelUse

Extended UML Meta-Class

- UML::Expression (by generalization)

Generalization

None.

Properties

- <<UP4TDL::TimeLabelUse>>
- TDL::TimeLabelUse.timeLabel := UP4TDL::TimeLabelUse.timeLabel (new property)

Constraints

None.

7.5 TimeConstraint

Extended UML Meta-Class

- UML::IntervalConstraint

Generalization

None.

Properties

- <<UP4TDL::TimeConstraint>>
- TDL::TimeConstraint.timeConstraintExpression := UP4TDL::TimeConstraint.timeConstraintExpression (new property)

Constraints

None.

7.6 TimeOperation

Extended UML Meta-Class

- UML::OccuranceSpecification

Generalization

- UP4TDL::AtomicBehaviour

Properties

- <<UP4TDL::TimeOperation>>
- TDL::TimeOperation.period := UP4TDL::TimeOperation.period (new property)
- TDL::TimeOperation.ComponentInstance:=
UP4TDL::ComponentInstance.base_OccuranceSpecification.covered.represents

Constraints

None.

7.7 Wait

Extended UML Meta-Class

- UML::DurationConstraint

Generalization

- UP4TDL::TimeOperation

Properties

- <<UP4TDL::Wait>>

Constraints

None.

7.8 Quiescence

Extended UML Meta-Class

- UML::DurationConstraint

Generalization

- UP4TDL::TimeOperation

Properties

- <<UP4TDL::Quiescence>>
- TDL::Quiescence.gateReference := UP4TDL::Quiescence.gateReference (new property)

Constraints

None.

7.9 Timer

Extended UML Meta-Class

- UML::Interface

Generalization

None.

Properties

None.

Constraints

None.

7.10 TimerOperation

Extended UML Meta-Class

- UML::CallOperationAction

Generalization

None.

Properties

- <<UP4TDL::TimerOperation>>
- TDL::TimerOperation.timer := UP4TDL::TimerOperation.timer (new property)

- TDL::TimerOperation.componentInstance := UP4TDL::TimerOperation..componentInstance (new property)

Constraints

None.

7.11 TimerStart

Extended UML Meta-Class

- UML::CallOperationAction

Generalization

- UP4TDL::TimerOperation

Properties

- <<UP4TDL::TimerStart>>
- TDL::TimerStart.period := UP4TDL::TimerStart.period (new property)

Constraints

None.

7.12 TimerStop

Extended UML Meta-Class

- UML::CallOperationAction

Generalization

- UP4TDL::TimerOperation

Properties

- <<UP4TDL::TimerStop>>

Constraints

None.

7.13 TimeOut

Extended UML Meta-Class

- UML::CallOperationAction

Generalization

- UP4TDL::TimerOperation

Properties

- <<UP4TDL::TimeOut>>

Constraints

None.

8 Test Configuration

8.1 Overview

The TDL concepts shown on Figure 8.1 and Figure 8.2 require stereotypes in UP4TDL. The other Test Configuration-related concepts are directly mapped.

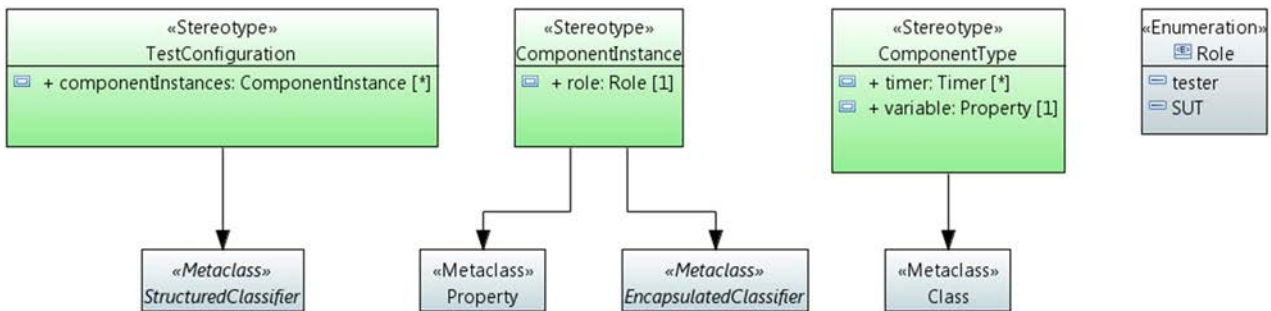


Figure 8.1: Test Configuration concepts Part 1

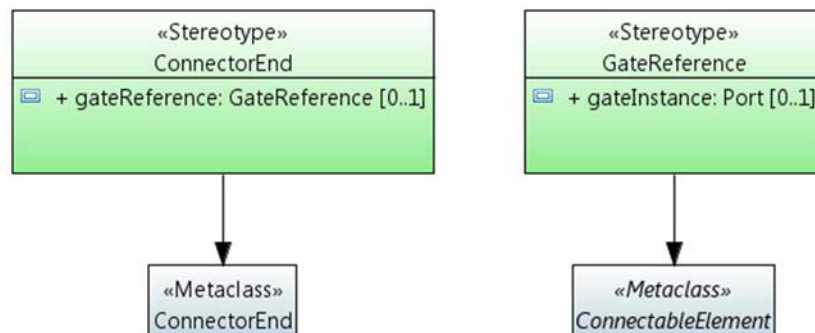


Figure 8.2: Test Configuration concepts Part 2

8.2 GateType

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::DataType or UML::Interface containing several datatype (for the case of multipleDataType handled by the GateInstance)

Generalization

None.

Properties

- TDL::GateType.dataType := UML::Interface.ownedAttribute.type[1..*] {unique}

Constraints

None.

8.3 GateInstance

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Port

Generalization

None.

Properties

- TDL::GateInstance.gateType := UML::Port.type

Constraints

None.

8.4 ComponentType

Extended UML Meta-Class

- UML::Class

Generalization

None.

Properties

- <UP4TDL::ComponentType>>
- TDL::ComponentType.timer:=UP4TDL::ComponentType.timer (new property)
- TDL::ComponentType.variable := UP4TDL::ComponentType.base_Class.ownedProperty
- TDL::ComponentType.gateInstance := UP4TDL::ComponentType.base_Class.ownedPorts

Constraints

None.

8.5 ComponentInstance

Extended UML Meta-Class

- UML::Property
- UML::Component

Generalization

None.

Properties

- <<UP4TDL::ComponentInstance>>

- TDL::ComponentInstance.type: ComponentType:= UP4TDL::ComponentInstance.base_Property.type
- TDL::ComponentInstance.role := UP4TDL::ComponentInstance.role (.new property)

Constraints

- Type of ComponentInstance shall be ComponentType

8.6 ComponentInstanceRole

Extended UML Meta-Class

- ComponentInstanceRole is modelled as an instance of a UML::Enumeration and not as a meta-class

Generalization

None.

Properties

None.

Literals

- SUT
UML::EnumerationLiteral <<SUT>>
- Tester
UML::EnumerationLiteral <<Tester>>

Constraints

None.

8.7 GateReference

The TDL::GateReference concept directly mapped to the UML::ConnectorEnd concept.

Extended UML Meta-Class

- Direct mapping to UML::ConnectorEnd

Generalization

None.

Properties

- TDL::GateReference.component := UMLConnectorEnd.partWithPort (new property)
- TDL::GateReference.gate := UML::ConnectorEnd.role

Constraints

None.

8.8 Connection

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::Connector

Generalization

None.

Properties

- TDL::Connection.endPoint := UML::Connector.end

Constraints

None.

8.9 TestConfiguration

Extended UML Meta-Class

- UML::StructuredClassifier

Generalization

None.

Properties

- <<UP4TDL::TestConfiguration>>
- TDL::TestConfiguration.component := UP4TDL::TestConfiguration.componentInstance (new derived property computed as the subset of ownedAttribute that have stereotype componentInstance applied on)
- TDL::TestConfiguration.connector := UP4TDL::TestConfiguration.base_StructuredClassifier.ownedConnector

Constraints

None.

9 Test Behaviour

9.1 Test Description

9.1.1 Overview

TDL::TestDescription is mapped to UML::BehaviourClassifier, while there is no need to map TDL::BehaviourDescription.

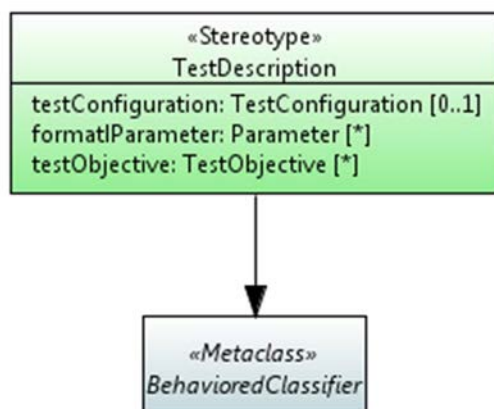


Figure 9.1: Test Description

9.1.2 TestDescription

Extended UML Meta-Class

- UML::BehavioredClassifier

Generalization

None.

Properties

- << UP4TDL::TestDescription >>
- TDL::TestDescription.testConfiguration := UP4TDL::TestDescription.testConfiguration (new property)
- TDL::TestDescription.formalParameter := UP4TDL::TestDescription.parameter (new property)
- TDL::TestDescription.behaviourDescription := UP4TDL::TestDescription.base_BehavioredClassifier.classifierBehaviour
- TDL::TestDescription.testObjective := UP4TDL::TestDescription.testObjective (new property)

Constraints

None.

9.1.3 BehaviourDescription

Extended UML Meta-Class

- Direct mapping without a stereotype to UML::InteractionFragment

Generalization

None.

Properties

None.

Constraints

None.

Model to Model transformation advice

- The BehaviourDescription is the first retrieved as the classifierBehaviour of the TestDescription

9.2 Combined Behaviour

9.2.1 Overview

Behaviour is mapped to UML::InteractionFragment, CombinedBehaviours are mapped to CombinedFragment, Blocks are mapped to UML::InteractionOperand. They are required extensions. SingleCombinedBehaviour and MultipleCombinedBehaviour are not to be mapped, but all of their sub-classes are mapped to UML::CombinedFragment.

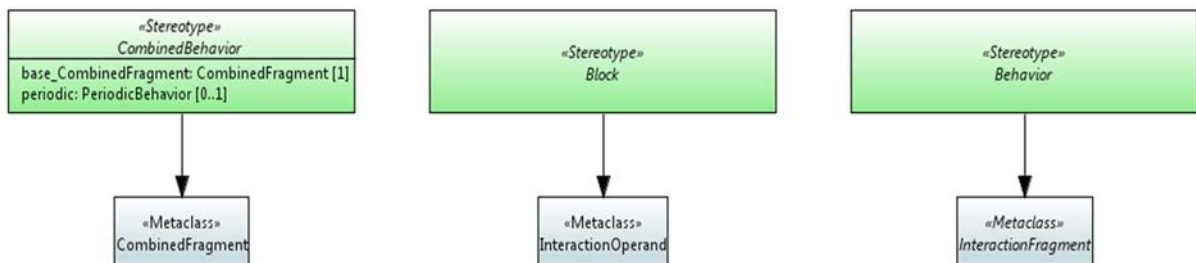


Figure 9.2: Behaviour, CombinedBehaviour and Block Concepts

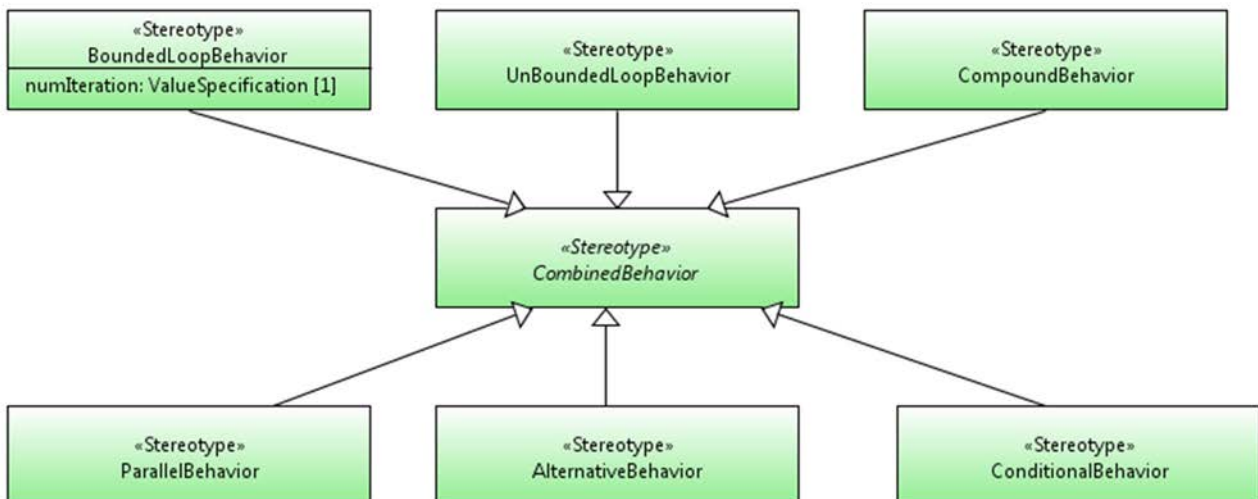


Figure 9.3: Single and Multiple Combined Behaviour Concepts

9.2.2 Behaviour

Extended UML Meta-Class

- UML::InteractionFragment. This is a required extension

Generalization

None.

Properties

- <<UP4TDL::Behaviour>>
- TDL::Behaviour.testObjective := UP4TDL::Behaviour.testObjective

Constraints

None.

9.2.3 Block

Extended UML Meta-Class

- UML::InteractionOperand. This is a required extension

Generalization

None.

Properties

- <<UP4TDL::Block>>
- TDL::Block.behaviour := UP4TDL::Block.base_InteractionOperand.fragment
- TDL::Block.guard := UP4TDL::Block.base_InteractionOperand.guard.specification

Constraints

None.

9.2.4 CombinedBehaviour

Extended UML Meta-Class

- UML::CombinedFragment

Generalization

- UP4TDL::Behaviour

Properties

- <<UP4TDL::CombinedBehaviour>>
- TDL::CombinedBehaviour.periodic := UP4TDL::CombinedBehaviour.periodic (new property)
- TDL::CombinedBehaviour.exceptional := UP4TDL::CombinedBehaviour.exceptional (new property)

Constraints

None.

9.2.5 SingleCombinedBehaviour

This MetaClass shall not be mapped. The constraints on the number of owned blocks is transferred to the actual Combined Behaviours (i.e. CompoundBehaviour, BoundedLoopBehaviour and UnboundedLoopBehaviour). This is done in order to limit the number of stereotypes and the stereotype hierarchy length.

9.2.6 CompoundBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization) with one InteractionOperand (block)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- << UP4TDL::CombinedBehaviour >>

Constraints

None.

9.2.7 BoundedLoopBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization) with one InteractionOperand (block)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- << UP4TDL::BoundedLoopBehaviour >>
- TDL::BoundedLoopBehaviour.numIteration := UP4TDL::BoundedLoopBehaviour.numIteration (new property)

Constraints

None.

9.2.8 UnboundedLoopBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization) with one InteractionOperand (block)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- <<UP4TDL::UnboundedLoopBehaviour >>

Constraints

None.

9.2.9 MultipleCombinedBehaviour

This MetaClass shall not be mapped. The constraints on the number of owned blocks is transferred to the actual Combined Behaviour. This is done in order to limit the number of stereotypes and the stereotype hierarchy length.

9.2.10 AlternativeBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization) with at least 2 InteractionOperand (block)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- <<UP4TDL::AlternativeBehaviour >>

Constraints

None.

9.2.11 ConditionalBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization) with one or moreInteractionOperand (block)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- <<UP4TDL::ConditionalBehaviour >>

Constraints

None.

9.2.12 ParallelBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization) with one or moreInteractionOperand (block)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- <<UP4TDL::ParallelBehaviour >>

Constraints

None.

9.2.13 ExceptionalBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization) with one InteractionOperand (block)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- <<UP4TDL::ExceptionalBehaviour >>
- TDL:: ExceptionalBehaviour.block := UP4TDL:: ExceptionalBehaviour.base_CombinedFragment.operand
- TDL:: ExceptionalBehaviour.guardedComponent := UP4TDL::ExceptionalBehaviour. guardedComponent (new property)

Constraints

None.

9.2.14 DefaultBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization)

Generalization

- UP4TDL::ExceptionalBehaviour

Properties

- << UP4TDL::DefaultBehaviour>>

Constraints

None.

9.2.15 InterruptBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization)

Generalization

- UP4TDL::ExceptionalBehaviour

Properties

- << UP4TDL::InterruptBehaviour>>

Constraints

None.

9.2.16 PeriodicBehaviour

Extended UML Meta-Class

- UML::CombinedFragment (by generalization)

Generalization

- UP4TDL::CombinedBehaviour

Properties

- << UP4TDL::PeriodicBehaviour >>
- TDL:: PeriodicBehaviour.block := UP4TDL::PeriodicBehaviour.base_CombinedFragment.operand
- TDL:: PeriodicBehaviour.period := UP4TDL:: PeriodicBehaviour (new property)

Constraints

None.

9.3 Atomic Behaviour

9.3.1 Overview

All TDL::AtomicBehaviour-related concepts require stereotypes, as shown in Figure 9.4 to Figure 9.7.

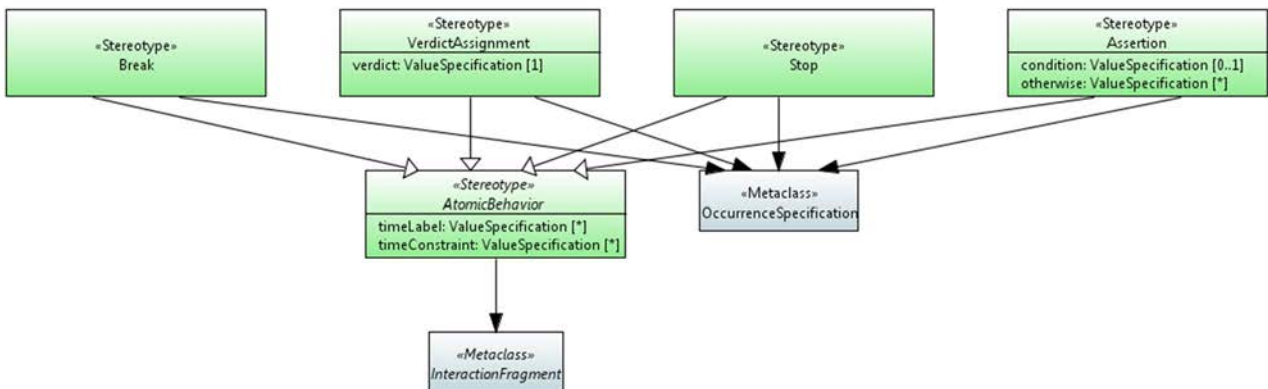


Figure 9.4: Global Atomic Behaviour concepts

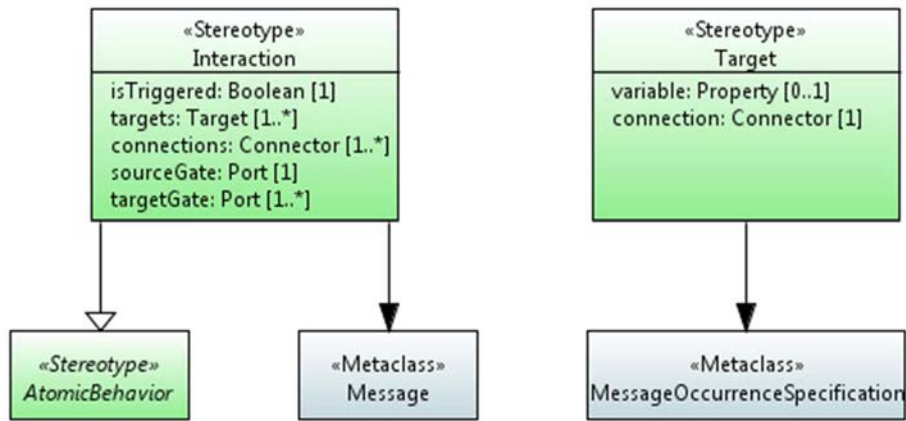


Figure 9.5: Interaction behaviour

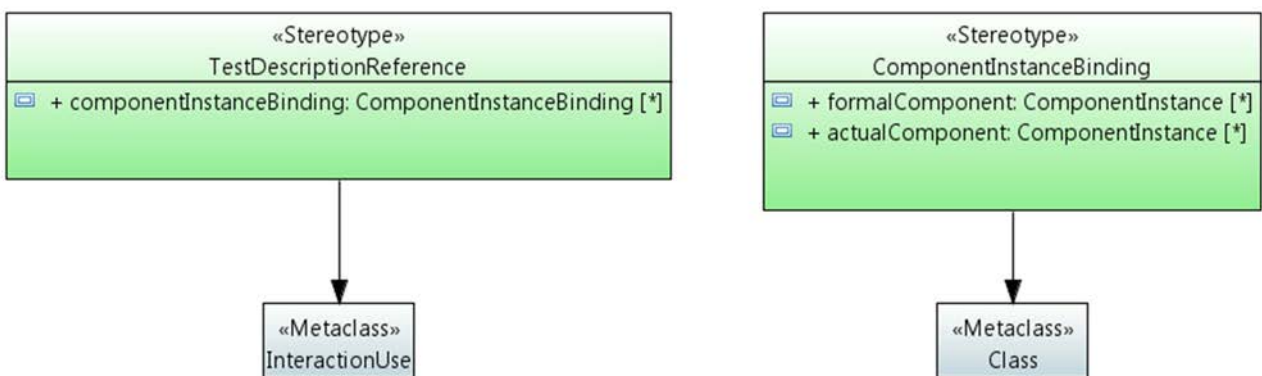


Figure 9.6: Test Description Reference

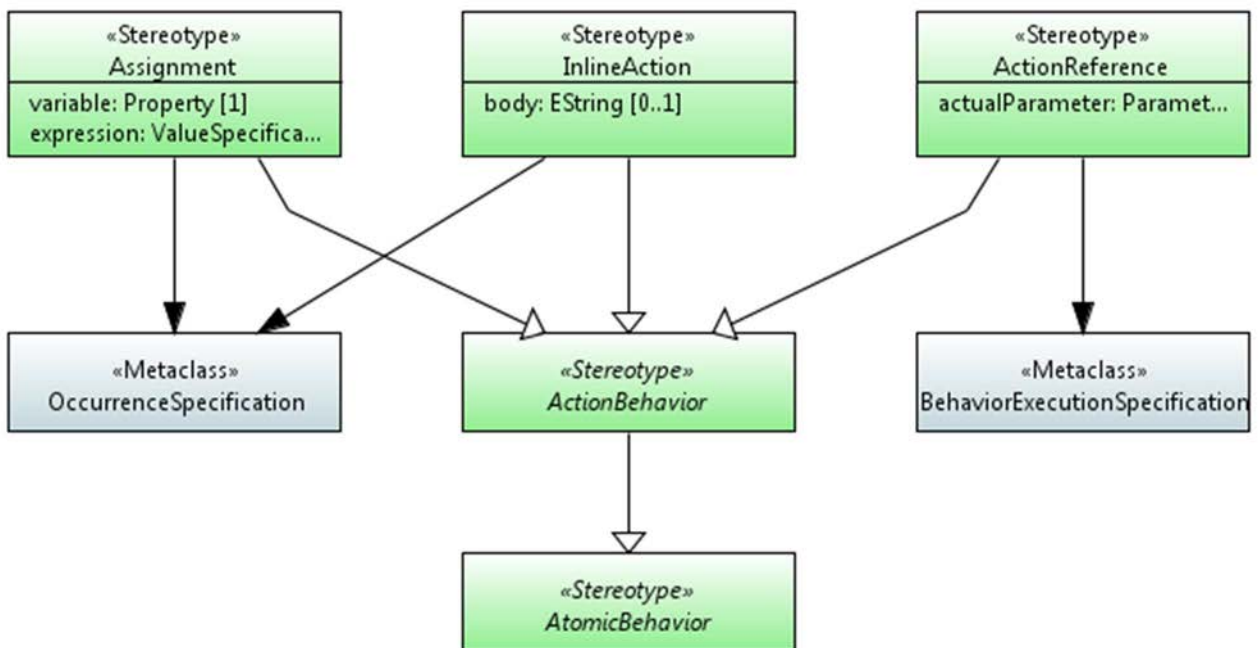


Figure 9.7: Action behaviour concepts

9.3.2 AtomicBehaviour

Extended UML Meta-Class

- UML::InteractionFragment

Generalization

None.

Properties

- <<UP4TDL::AtomicBehaviour>>
- TDL::AtomicBehaviour.timeLabel := UP4TDL::AtomicBehaviour.timeLabel (new property)
- TDL::AtomicBehaviour.timeConstraint := UP4TDL::AtomicBehaviour.timeConstraint (new property)

Constraints

None.

9.3.3 Break

Extended UML Meta-Class

- UML::OccurrenceSpecification

Generalization

- UP4TDL::AtomicBehaviour

Properties

- <<UP4TDL::Break>>

Constraints

None.

9.3.4 Stop

Extended UML Meta-Class

- UML::OccurrenceSpecification

Generalization

- UP4TDL::AtomicBehaviour

Properties

- <<UP4TDL::Stop>>

Constraints

None.

9.3.5 VerdictAssignment

Extended UML Meta-Class

- UML::OccurrenceSpecification
- UML::StateInvariant

Generalization

- UP4TDL::AtomicBehaviour

Properties

- << UP4TDL::VerdictAssignment >>
- TDL::VerdictAssignment.verdict := UP4TDL::VerdictAssignment.verdict

Constraints

None.

9.3.6 Assertion

Extended UML Meta-Class

- UML::OccurrenceSpecification
- UML::StateInvariant

Generalization

- UP4TDL::AtomicBehaviour

Properties

- << UP4TDL::Assertion >>
- TDL::Assertion.condition := UP4TDL::Assertion.condition (new property)
- TDL::Assertion.otherwise := UP4TDL::Assertion.otherwise (new property)

Constraints

None.

9.3.7 Interaction

Extended UML Meta-Class

- UML::Message

Generalization

- UP4TDL::AtomicBehaviour

Properties

- <<UP4TDL::Interaction >>

- TDL::Interaction.isTrigger := UP4TDL::Interaction.isTrigger (new property)
- TDL::Interaction.argument := UP4TDL::Interaction.base_Message.argument
- TDL::Interaction.target := UP4TDL::Interaction.targets ; (the first is UP4TDL::Interaction.base_Message.receiveEvent)
- UP4TDL::Interaction contains a set of connector UP4TDL::Interaction.connection (new derived property computed as the union of all target connectors of the interactions) that allows the derivation of the source gate and the target gates
- TDL::Interaction.sourceGate : UP4TDL::Interaction.sourceGate (new derived property computed from as the single sending Port)
- TDL::Interaction.targetGate:= UP4TDL::Interaction.targetGate (new derived property computed as the union of all receiving Ports)

Constraints

None.

9.3.8 Target

Extended UML Meta-Class

- UML::(Message)OccurrenceSpecification

Generalization

None.

Properties

- <<UP4TDL::Target>>
- TDL::Target.variable := UP4TDL::Target.variable
- TDL::Target.targetGate := UP4TDL::Target retrieved from UP4TDL::Target.connection (see Model to model Transformation advice)

Constraints

None.

Model to model Transformation Advice

- UP4TDL::Target contains a property connection of type UML::Connector. TDL::Target.targetGate *t* is the Retrieved from a UP4TDL::Target as follow:
 - It is the end of UP4TDL::Target.end *ce* such that : *ce.partWithPort* is the same as *t.covered.represents*.

9.3.9 TestDescriptionReference

Extended UML Meta-Class

- UML::InteractionUse

Generalization

None.

Properties

- <<UP4TDL::TestDescriptionReference>>
- TDL::TestDescriptionReference.testDescription := UP4TDL::TestDescriptionReference.base_InteractionUse.referTo
- TDL::TestDescriptionReference.actualParameter := UP4TDL::TestDescriptionReference.base_InteractionUse.argument
- TDL::TestDescriptionReference.componentInstanceBinding := UP4TDL::TestDescriptionReference.componentInstanceBinding (new property)

Constraints

None.

9.3.10 ComponentInstanceBinding

Extended UML Meta-Class

- UML::Class

Generalization

None.

Properties

- <<UP4TDL::ComponentInstanceBinding>>
- TDL::ComponentInstanceBinding.formalComponent := UP4TDL::ComponentInstanceBinding.formalComponent (new property)
- TDL::ComponentInstanceBinding.actualComponent := UP4TDL::ComponentInstanceBinding.actualComponent (new property)

Constraints

None.

9.3.11 ActionBehaviour

Extended UML Meta-Class

- UML::InstanceFragment (by generalization)

Generalization

- UP4TDL::AtomicBehaviour

Properties

- <<UP4TDL::ActionBehaviour>>
- TDL::ActionBehaviour.componentInstance := retrieved from the lifeline that this UP4TDL::ActionBehaviour covers. (see Model to model Transformation advice)

Constraints

None.

Model to model transformation advice

- The componentInstance is retrieved from the child concepts
- For ActionReference:
 - TDL::ActionBehaviour.componentInstance = UP4TDL::ActionReference.base_BehaviourExecutionSpecification.start.covered.represents
- For InlineAction:
 - TDL::ActionBehaviour.componentInstance = InlineAction.base_OccurrenceSpecification.covered.represents
- For Assignment:
 - TDL::ActionBehaviour.componentInstance = Assignment.base_OccurrenceSpecification.covered.represents

9.3.12 ActionReference

Extended UML Meta-Class

- UML::BehaviourExecutionSpecification
- UML::ActionExecutionSpecification

Generalization

- UP4TDL::ActionBehaviour

Properties

- << UP4TDL::ActionReference >>
- TDL::ActionReference.action := UP4TDL::ActionReference.base_BehaviourExecutionSpecification.behaviour
- TDL::ActionReference.actualParameter := UP4TDL::ActionReference.actualParameter (new property)

Constraints

None.

9.3.13 InlineAction

Extended UML Meta-Class

- UML::OccurrenceSpecification

Generalization

- UP4TDL::ActionBehaviour

Properties

- <<UP4TDL::InlineAction>>

- TDL::InlineAction.body := UP4TDL::InlineAction.body (new property)

Constraints

None.

9.3.14 Assignment

Extended UML Meta-Class

- UML::OccurrenceSpecification

Generalization

- UP4TDL::ActionBehaviour

Properties

- <<UP4TDL::Assignment>>
- TDL::Assignment.variable := UP4TDL::Assignment.variable
- TDL::Assignment.expression := UP4TDL::Assignment.expression

Constraints

None.

History

Document history		
V1.1.1	March 2018	Membership Approval Procedure MV 20180520: 2018-03-21 to 2018-05-21
V1.1.1	May 2018	Publication