



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 182-1

April 1993

Source: ETSI TC-SPS

Reference: T/S 46-33K

ICS: 33.080

Key words: ISDN, supplementary service

**Integrated Services Digital Network (ISDN);
Advice of Charge (AOC) supplementary service;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 1: Protocol specification**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1993. All rights reserved.

Contents

Foreword.....	5
1 Scope	7
2 Normative references	7
3 Definitions.....	8
4 Symbols and abbreviations.....	9
5 Description	10
5.1 General description	10
5.2 Charging information at call set-up time (AOC-S).....	10
5.3 Charging information during the call (AOC-D)	10
5.4 Charging information at the end of the call (AOC-E).....	10
6 Operational requirements.....	11
6.1 Provision and withdrawal	11
6.2 Requirements on the originating network side.....	11
6.3 Requirements on the destination network side	11
7 Coding requirements.....	12
7.1 General.....	12
7.2 Coding of the Facility information element components.....	12
8 State definitions	17
9 Signalling procedures at the coincident S and T reference point	17
9.1 Activation, deactivation and registration.....	17
9.1.1 Normal operation.....	17
9.1.2 Exceptional procedures.....	18
9.2 Invocation and operation	19
9.2.1 Transfer of charging information in the call establishment phase.....	19
9.2.1.1 Normal operation	19
9.2.1.2 Exceptional procedures.....	20
9.2.2 Transfer of charging information in the Active state	20
9.2.2.1 Normal operation	20
9.2.2.2 Exceptional procedures.....	21
9.2.3 Transfer of charging information in the call clearing phase	22
9.2.3.1 Normal operation	22
9.2.3.2 Exceptional procedures.....	23
9.2.4 Transfer of charging information independent of a bearer at the user- network interface	24
9.2.4.1 Normal operation	24
9.2.4.2 Exceptional procedures.....	24
10 Procedures for interworking with private ISDNs	25
11 Interactions with other networks	25
12 Interactions with other supplementary services	25
13 Parameter values (timers).....	25

14	Dynamic description (SDLs)	25
Annex A (informative):	Signalling flows	37
History		42

Foreword

This European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS is part 1 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Advice of Charge (AOC) supplementary service, as described below:

- Part 1: "Protocol specification";**
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "TSS&TP specification for the network";
- Part 6: "ATS and partial PIXIT proforma specification for the network".

In accordance with CCITT Recommendation I.130, the following three level structure is used to describe the supplementary telecommunications services as provided by European public telecommunications operators under the pan-European Integrated Services Digital Network (ISDN):

- Stage 1: is an overall service description, from the user's standpoint;
- Stage 2: identifies the functional capabilities and information flows needed to support the service described in stage 1; and
- Stage 3: defines the signalling system protocols and switching functions needed to implement the service described in stage 1.

This ETS details the stage 3 aspects (signalling system protocols and switching functions) needed to support the Advice of Charge (AOC) supplementary service. The stage 1 and stage 2 aspects are detailed in ETSs 300 178-180 (1992) and ETS 300 181 (1993), respectively.

This reprint includes all previous Corrigenda as shown in the History box at the last page.

Blank page

1 Scope

This first part of ETS 300 182 specifies the stage three of the Advice of Charge (AOC) supplementary service for the pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators at the T reference point or coincident S and T reference point (as defined in CCITT Recommendation I.411 [1]) by means of the Digital Subscriber Signalling System No. one (DSS1). Stage three identifies the protocol procedures and switching functions needed to support a telecommunications service (see CCITT Recommendation I.130 [2]).

In addition, this standard specifies the protocol requirements at the T reference point where the service is provided to the user via a private ISDN.

This standard does not specify the additional protocol requirements where the service is provided to the user via a telecommunications network that is not an ISDN.

Three AOC supplementary services exist:

a) Charging information at call set-up time (AOC-S)

The AOC-S supplementary service enables a user to receive information about the charging rates at call set-up time and also to receive further information during the call if there is a change of charging rates.

b) Charging information during the call (AOC-D)

The AOC-D supplementary service enables a user to receive information on the recorded charges for a call during the active phase of the call.

c) Charging information at the end of the call (AOC-E)

The AOC-E supplementary service enables a user to receive information on the recorded charges for a call when the call is terminated.

The AOC supplementary service is applicable to all circuit-switched telecommunication services.

Further parts of this standard specify the method of testing required to identify conformance to this standard.

This standard is applicable to equipment, supporting the AOC supplementary service, to be attached at either side of a T reference point or coincident S and T reference point when used as an access to the public ISDN.

2 Normative references

This standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of any of these publications apply to this standard only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] CCITT Recommendation I.411 (1988): "ISDN user-network interfaces - Reference configurations".
- [2] CCITT Recommendation I.130 (1988): "Method for the characterisation of telecommunication services supported by an ISDN and network capabilities of an ISDN".
- [3] CCITT Recommendation I.112 (1988): "Vocabulary of terms for ISDNs".

- [4] CCITT Recommendation I.210 (1988): "Principles of telecommunication services supported by an ISDN and the means to describe them".
- [5] ETS 300 102-1 (1990): "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specification for basic call control".
- [6] ETS 300 178 (1992): "Integrated Services Digital Network (ISDN); Advice of Charge: charging information at call set-up time (AOC-S); Service description".
- [7] ETS 300 179 (1992): "Integrated Services Digital Network (ISDN); Advice of Charge: charging information during the call (AOC-D); Service description".
- [8] ETS 300 180 (1992): "Integrated Services Digital Network (ISDN); Advice of Charge: charging information at the end of the call (AOC-E); Service description".
- [9] CCITT Recommendation X.208 (1988): "Specification of Abstract Syntax Notation One (ASN.1)".
- [10] CCITT Recommendation X.219 (1988): "Remote Operations: Model, Notation and Service Definitions".
- [11] ETS 300 196-1 (1993): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [12] ETS 300 195-1: "Integrated Services Digital Network (ISDN); Supplementary service interactions; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [13] CCITT Recommendation Z.100 (1988): "Functional Specification and Description Language (SDL)".

3 Definitions

For the purpose of this standard, the following definitions apply:

Activation: implies either a user request for AOC supplementary service(s) or a network performed activation of the subscribed AOC supplementary service(s) whenever the served user makes an outgoing call.

NOTE 1: The stage 1 description, as specified in ETS 300 178 [6], ETS 300 179 [7] and ETS 300 180 [8], defines activation as being performed at the time of subscription.

Basic communication: this charged item indicates the rate to be applied for the connection to the called user.

Billing identification: elements for billing identification inform the served user that the associated charges have been incurred due to the indicated situation (e.g. a call that has been forwarded at the served user's access).

Call attempt: this charged item indicates the cost applied for a call which has been sent to the called user, but the called user has not yet answered the call.

Call control message: a message as defined in ETS 300 102-1 [5], subclause 3.1, which on sending or receipt causes a change of the call state at either the network or the user.

Call setup: this charged item indicates the cost applied for the connection to the called user when the called user answers the call.

Charging information: information sent to a user in an invoke component or a return result component showing charging-related information (i.e. either charging rate information, special charging rates, or the recorded charges for the call).

Continuous: see subclause A.2.3.1 of ETS 300 178 [6].

Flat rate: this specific rate indicates a fixed currency value per event.

Integrated Services Digital Network (ISDN): see CCITT Recommendation I.112 [3], § 2.3, definition 308.

Invocation: implies the sending of charging information from the network to the served user.

NOTE 2: The stage 1 description, as specified in ETS 300 178 [6], ETS 300 179 [7] and ETS 300 180 [8], defines invocation as either a user request for an AOC supplementary service or as the network invocation for all calls.

Invoke component: see ETS 300 196-1 [11], subclause 8.2.2.1.

Network: the DSS1 protocol entity at the network side of the user-network interface.

Operation of supplementary services: this charged item indicates the cost applied for the operation of requested supplementary services.

Recorded charges: this information indicates the number of charging units or currency units incurred for a call.

Return error component: see ETS 300 196-1 [11], subclause 8.2.2.3.

Return result component: see ETS 300 196-1 [11], subclause 8.2.2.2.

Served user: the user of a particular ISDN number, who is requesting that charging information should be provided (for all calls or on request).

Service: telecommunications service: see CCITT Recommendation I.112 [3], § 2.2, definition 201.

Special charging arrangement: this charged item indicates that a special charging arrangement exists for calculating the cost of the call.

NOTE 3: The use of this charged item is outside the scope of the standard. It is a matter for the network operator and the user to which it is sent.

Special charging code: this specific code indicates a rate which can identify a charging algorithm that can be used as a basis for determining the cost of a call.

Step function: see subclause A.2.3.1 of ETS 300 178 [6]

Supplementary service: see CCITT Recommendation I.210 [4], § 2.4.

User: the DSS1 protocol entity at the user side of the user-network interface.

User-to-user information transfer: this charged item indicates the rate to be applied to the transfer of user-to-user information.

4 Symbols and abbreviations

AOC Advice of Charge

AOC-D AOC during the call

AOC-E	AOC at the end of the call
AOC-S	AOC at call set-up time
ASN.1	Abstract Syntax Notation One
DSS1	Digital Subscriber Signalling System No. one
ISDN	Integrated Services Digital Network
PSTN	Public Switched Telephone Network

5 Description

5.1 General description

Depending on subscription by the served user, charging information for any of the three supplementary services may be provided either:

- for all calls; or
- for any call, after a user request to provide charging information.

The charging information given shall relate to the charges incurred on the network to which the user is attached.

Charging information for applications using higher layer protocols which are not defined as teleservices, shall be based on the bearer services specified.

5.2 Charging information at call set-up time (AOC-S)

When the AOC-S supplementary service is activated, the network shall provide the user with information about the charging rates at call establishment. In addition, the network shall inform the served user if a change in charging rates takes place during the call.

The network shall provide the charging information during call establishment or at the latest at call connection. When there is a change in the charging rate during the call, the network shall send information about the new charging rate to the served user.

5.3 Charging information during the call (AOC-D)

When the AOC-D supplementary service is activated, the network shall provide the user with charging information for a call during the active phase of a call. The network shall provide the charging information and transfer it to the served user in an appropriate message. The supplied charging information shall be provided as a cumulative charge incurred so far for the call (i.e. charges recorded from the start of the call and until the moment the charging information is sent to the served user).

When the call is released, the network shall send the recorded charges for the call to the served user in one of the call control messages clearing the call.

If the network has determined that the call is free of charge, then the network shall send a free-of-charge indication in the first subsequent message sent to the served user. The network shall not send any further charging information during the call. When the call is released, the network shall send the charged amount (zero) in a call control message clearing the call.

5.4 Charging information at the end of the call (AOC-E)

When the AOC-E supplementary service is activated, the network shall provide the served user with charging information indicating the recorded charges for a call when the call is released. The network shall send the charging information to the served user in one of the call control messages clearing the call.

6 Operational requirements

6.1 Provision and withdrawal

These supplementary services shall be provided separately by arrangement with the service provider or be generally available. Withdrawal of the service shall be made at subscriber request or for administrative reasons.

The following subscription options exist for each of the three AOC supplementary services, as defined in table 1.

Table 1: Advice of charge subscription options

Subscription options	Value
Provision of service	1. For all calls; or 2. On request on a per call basis.

6.2 Requirements on the originating network side

For the purpose of this standard, the served user of the AOC supplementary service is connected to the originating network.

The originating network shall make available the type of charging information that is indicated, related to a certain call.

The originating network shall assemble the appropriate charging information, according to the service requirements, and send it to the user.

NOTE: The charging information may either be generated at the originating network, or generated elsewhere and sent to the originating network, in due time for the information to be provided to the user according to the procedures of this standard.

The network shall only include a charged item if the charged item contains information concerning the charges applied to that call.

The network shall only use those charged items which are appropriate to that network charging mechanism. Thus, in some networks, the network may, but need not, send some of these items, or combinations of items. Different networks could give information about the same call in different ways.

If the served user suspends a call, then, as a network option, the originating network shall retain the charging information for the suspended call as long as the network retains the call identity of the suspended call of the served user.

6.3 Requirements on the destination network side

None identified.

7 Coding requirements

7.1 General

The charging information that the network shall convey to the served user may consist of a number of information units. The information to be transferred is specified in Clause 5 of the stage 1 service descriptions ETS 300 178 [6], ETS 300 179 [7], and ETS 300 180 [8].

7.2 Coding of the Facility information element components

Table 2 shows the definition of the operations and errors required for the AOC supplementary service using Abstract Syntax Notation one (ASN.1) as defined in CCITT Recommendation X.208 [9] and using the OPERATION and ERROR macro as defined in CCITT Recommendation X.219 [10], figure 4/X.219.

The formal definition of the component types to encode these operations and errors is provided in ETS 300 196-1 [11], Annex D, Clause D.1.

The inclusion of components in Facility information elements is defined in ETS 300 196-1 [11], subclause 11.1.

Table 2: ASN.1 description of AOC information

```
Advice-of-Charge-Operations {ccitt identified-organization etsi (0) 182 operations-and-errors (1)}
DEFINITIONS IMPLICIT TAGS ::=
BEGIN
EXPORTS
    ChargingRequest, AOCSCurrency, AOCSSpecialArr,
    AOCDCurrency, AOCDChargingUnit, AOCECurrency, AOCEChargingUnit,
    NoChargingInfoAvailable, ChargingAssociation;
IMPORTS
    OPERATION, ERROR
    FROM Remote-Operation-Notation
        {joint-iso-ccitt remote-operations (4) notation (0)}

    notSubscribed, notAvailable, notImplemented, invalidCallState
    FROM General-Errors
        {ccitt identified-organization etsi (0) 196 general-errors (2)}

    PartyNumber
    FROM Addressing-Data-Elements
        {ccitt identified-organization etsi (0) 196 addressing-data-elements (6)};

ChargingRequest ::= OPERATION
    ARGUMENT ChargingCase
    RESULT CHOICE {
        AOCSCurrencyInfoList,
        AOCSSpecialArrInfo,
        chargingInfoFollows NULL}
    ERRORS {notSubscribed, notAvailable, notImplemented,
        invalidCallState, NoChargingInfoAvailable}

AOCSCurrency ::= OPERATION          -- AOC-S given in currency units
    ARGUMENT CHOICE {
        chargeNotAvailable NULL,
        AOCSCurrencyInfoList }
```

Table 2: ASN.1 description of AOC information (continued)

AOCSSpecialArr ::=	OPERATION -- AOC-S for special charging arrangement ARGUMENT CHOICE { chargeNotAvailable NULL, AOCSSpecialArrInfo }
AOCDCurrency ::=	OPERATION -- AOC-D given in currency units ARGUMENT CHOICE { chargeNotAvailable NULL, AOCDCurrencyInfo }
AOCDChargingUnit ::=	OPERATION -- AOC-D given in charging units ARGUMENT CHOICE { chargeNotAvailable NULL, AOCDChargingUnitInfo }
AOCECurrency ::=	OPERATION -- AOC-E given in currency units ARGUMENT CHOICE { chargeNotAvailable NULL, AOCECurrencyInfo }
AOCEChargingUnit ::=	OPERATION -- AOC-E given in charging units ARGUMENT CHOICE { chargeNotAvailable NULL, AOCEChargingUnitInfo }
ChargingCase ::=	ENUMERATED { chargingInformationAtCallSetup (0), chargingDuringACall (1), chargingAtTheEndOfACall (2) }
AOCSCurrencyInfoList ::=	SEQUENCE SIZE (1..10) OF AOCSCurrencyInfo
AOCSCurrencyInfo ::=	SEQUENCE { chargedItem ChargedItem, CHOICE { specificCurrency CHOICE { durationCurrency [1] DurationCurrency, flatRateCurrency [2] FlatRateCurrency, volumeRateCurrency [3] VolumeRateCurrency}, specialChargingCode SpecialChargingCode, freeOfCharge [4] NULL, currencyInfoNotAvailable [5] NULL} }
AOCSSpecialArrInfo ::=	INTEGER (1..10)
ChargedItem ::=	ENUMERATED { basicCommunication (0), callAttempt (1), callSetup (2), userToUserInfo (3), operationOfSupplementaryServ (4) }

Table 2: ASN.1 description of AOC information (continued)

DurationCurrency	::=	SEQUENCE { dCurrency [1] Currency, dAmount [2] Amount, dChargingType [3] ChargingType, dTime [4] Time, dGranularity [5] Time OPTIONAL }
FlatRateCurrency	::=	SEQUENCE { fRCurrency [1] Currency, fRAmount [2] Amount }
VolumeRateCurrency	::=	SEQUENCE { vRCurrency [1] Currency, vRAmount [2] Amount, vRVolumeUnit [3] VolumeUnit}
SpecialChargingCode	::=	INTEGER (1..10)
AOCDCurrencyInfo	::=	CHOICE { specificCurrency SEQUENCE { recordedCurrency [1] RecordedCurrency, typeOfChargingInfo [2] TypeOfChargingInfo, aOCDBillingId [3] AOCDBillingId OPTIONAL }, freeOfCharge [1] NULL}
AOCDChargingUnitInfo	::=	CHOICE { specificChargingUnits SEQUENCE { recordedUnitsList [1] RecordedUnitsList, typeOfChargingInfo [2] TypeOfChargingInfo, aOCDBillingId [3] AOCDBillingId OPTIONAL }, freeOfCharge [1] NULL}
RecordedCurrency	::=	SEQUENCE { rCurrency [1] Currency, rAmount [2] Amount }
RecordedUnitsList	::=	SEQUENCE SIZE (1..32) OF RecordedUnits
TypeOfChargingInfo	::=	ENUMERATED { subTotal (0), total (1)}
RecordedUnits	::=	SEQUENCE { CHOICE{ recordedNumberOfUnits NumberOfUnits, notAvailable NULL}, recordedTypeOfUnits TypeOfUnit OPTIONAL }
AOCDBillingId	::=	ENUMERATED { normalCharging (0), reverseCharging (1), creditCardCharging (2)}

Table 2: ASN.1 description of AOC information (continued)

AOCECurrencyInfo	::=	SEQUENCE { CHOICE { specificCurrency SEQUENCE { recordedCurrency [1] RecordedCurrency, aOCEBillingId [2] AOCEBillingId OPTIONAL}, freeOfCharge [1] NULL}, chargingAssociation ChargingAssociation OPTIONAL}
AOCEChargingUnitInfo	::=	SEQUENCE { CHOICE { specificChargingUnits SEQUENCE { recordedUnitsList [1] RecordedUnitsList, aOCEBillingId [2] AOCEBillingId OPTIONAL}, freeOfCharge [1] NULL}, chargingAssociation ChargingAssociation OPTIONAL}
AOCEBillingId	::=	ENUMERATED { normalCharging (0), reverseCharging (1), creditCardCharging (2), callForwardingUnconditional (3), callForwardingBusy (4), callForwardingNoReply (5), callDeflection (6), callTransfer (7)}
Currency	::=	IA5String (SIZE (1..10))
Amount	::=	SEQUENCE { currencyAmount [1] CurrencyAmount, multiplier [2] Multiplier }
CurrencyAmount	::=	INTEGER (0..16777215)
Multiplier	::=	ENUMERATED { oneThousandth (0), oneHundredth (1), oneTenth (2), one (3), ten (4), hundred (5), thousand (6)}
Time	::=	SEQUENCE { lengthOfTimeUnit [1] LengthOfTimeUnit, scale [2] Scale }
LengthOfTimeUnit	::=	INTEGER (0..16777215)

Table 2: ASN.1 description of AOC information (concluded)

Scale	::=	ENUMERATED { oneHundredthSecond (0), oneTenthSecond (1), oneSecond (2), tenSeconds (3), oneMinute (4), oneHour (5), twentyFourHours (6)}	
VolumeUnit	::=	ENUMERATED { octet (0), segment (1), message (2) }	
TypeOfUnit	::=	INTEGER (1..16)	-- Value 1-16
NumberOfUnits	::=	INTEGER (0..16777215)	
ChargingType	::=	ENUMERATED { continuousCharging (0), stepFunction (1) }	
ChargingAssociation	::=	CHOICE { chargeNumber chargelIdentifier	[0] EXPLICIT PartyNumber, ChargelIdentifier}
ChargelIdentifier	::=	INTEGER (-32768..32767)	
NoChargingInfoAvailable	::=	ERROR	
chargingRequest	ChargingRequest	::=	30
aOCSCurrency	AOCSCurrency	::=	31
aOCSSpecialArr	AOCSSpecialArr	::=	32
aOCDCurrency	AOCDCurrency	::=	33
aOCDChargingUnit	AOCDChargingUnit	::=	34
aOCECurrency	AOCECurrency	::=	35
aOCEChargingUnit	AOCEChargingUnit	::=	36
noChargingInfoAvailable	NoChargingInfoAvailable	::=	26
END			

8 State definitions

The following states have been defined for the user:

- AOC Request:** The user has sent an AOC request to the network and is waiting for a response (NOTE).
- AOC Active:** An AOC supplementary service has been activated by a user on a per call basis (NOTE).

The following states have been defined for the network:

- AOC Idle:** An AOC supplementary service is not activated (NOTE).
- AOC-S Activated:** The AOC-S supplementary service has been activated either on a per call basis or for all calls.
- AOC-D Activated:** The AOC-D supplementary service has been activated either on a per call basis or for all calls.
- AOC-E Activated:** The AOC-E supplementary service has been activated either on a per call basis or for all calls.
- AOC-S Idle:** The network has sent the AOC-S charging information to the served user. This is a "waiting" condition where either a change in the charging rate, or the suspension of the basic call occurs, or the call is cleared.
- AOC-S Suspended:** The AOC-S supplementary service is activated, and the served user has invoked the terminal portability supplementary service for this call.
- AOC-D Suspended:** The AOC-D supplementary service is activated, and the served user has invoked the terminal portability supplementary service for this call.
- AOC-E Suspended:** The AOC-E supplementary service is activated, and the served user has invoked the terminal portability supplementary service for this call.

NOTE: These states exist for each instance of the AOC supplementary service.

9 Signalling procedures at the coincident S and T reference point

9.1 Activation, deactivation and registration

9.1.1 Normal operation

These supplementary services may be activated on a per call basis or they may be active for all calls. The activation on a per-call basis is only active for the lifetime of that call.

If an AOC supplementary service is subscribed to for all calls, no signalling procedure is defined for the activation of the service. The network shall automatically activate the subscribed AOC supplementary service at each call setup.

To activate an AOC supplementary service, the user shall include in the SETUP message a Facility information element containing a ChargingRequest invoke component. The ChargingRequest invoke component shall indicate the AOC supplementary service to be activated. Each AOC supplementary service is activated independently and one, two, or three activations can thus occur in the same SETUP message.

If the network activates the requested AOC supplementary service (e.g. the served user is allowed to request the information), the network shall acknowledge the request by returning a ChargingRequest return result component within a Facility information element in a call control message (i.e. SETUP ACKNOWLEDGE, CALL PROCEEDING, PROGRESS, ALERTING, or CONNECT message - whichever is appropriate). Alternatively, the network can use a FACILITY message to convey the ChargingRequest return result component if a call control message is not available when the information is to be sent.

If a user has requested the AOC-S supplementary service and the activation request is accepted by the network, the procedure of subclause 9.2.1.1 shall be followed.

If a user has requested the AOC-D or AOC-E supplementary services and the activation request is accepted by the network, the network shall send a ChargingRequest return result component to the user indicating "chargingInfoFollows".

If the user receives a correctly encoded ChargingRequest return result component, the user shall accept the provided information and shall not respond to the network.

No signalling procedure is defined for the registration of an AOC supplementary service.

9.1.2 Exceptional procedures

The following exceptional procedures shall apply:

- a) if the AOC supplementary service is activated for all calls and the network cannot provide the charging information, the network shall, at the time it determines that the information is not available, send a Facility information element including an AOCSCurrency, AOCSSpecialArr, AOCDCurrency, AOCDChargingUnit, AOCECurrency or AOCEChargingUnit invoke component indicating "chargeNotAvailable" to the user and continue normal call handling;
- b) if the user receives a correctly encoded AOCSCurrency, AOCSSpecialArr, AOCDCurrency, AOCDChargingUnit, AOCECurrency or AOCEChargingUnit invoke component, the user shall accept the provided information and shall not respond to the network;
- c) if the AOC supplementary service is requested on a per-call basis and the network cannot provide the charging information, the network shall include the Facility information element containing a ChargingRequest return error component in a call control or FACILITY message and continue the basic call. The ChargingRequest return error component shall indicate either:
 - 1) one of the errors from the General-Errors list; or,
 - 2) "NoChargingInfoAvailable", whichever is appropriate.

The "NoChargingInfoAvailable" value indicates that the served user would normally receive charging information but that in this case the information cannot be sent to the served user;

- d) if the network receives a request for any of the AOC supplementary services in any other message than a SETUP message, and item c) does not apply, then the network shall send a ChargingRequest return error component indicating "invalidCallState" to the user;
- e) if a user receives a ChargingRequest return error component from the network, the user shall not take any further protocol action. However, the user shall continue normal call handling;
- f) if a user or the network receives a reject component, no protocol actions shall be taken;
- g) if the user receives no response to the ChargingRequest invoke component and subsequently receives an AOCSCurrency, AOCSSpecialArr, AOCDCurrency, AOCDChargingUnit, AOCECurrency or AOCEChargingUnit invoke component, the user shall ignore this component;

- h) if the user receives a ChargingRequest return error component or a reject component as a response to a ChargingRequest invoke component and subsequently receives an AOCSCurrency, AOCSSpecialArr, AOCDCurrency, AOCDChargingUnit, AOCECurrency or AOCEChargingUnit invoke component, the user shall accept the information provided and shall not respond to the network;
- i) if a user requests on a per call basis an AOC supplementary service which is activated for all calls, the network shall acknowledge the request as specified in subclause 9.1.1. However, the network shall only send charging information as a result of one activation of each AOC supplementary service activated.

9.2 Invocation and operation

In the following subclauses the procedures for the transfer of charging information are given.

The transfer of charging information may occur:

- during the call establishment phase (AOC-S supplementary service);
- in the Active state of a call (AOC-S and AOC-D supplementary services);
- during the call clearing phase (AOC-S, AOC-D, and AOC-E supplementary services); or,
- independent of a bearer at the user-network interface (AOC-E supplementary service).

NOTE: The transfer of charging information in an invoke component is done according to the operation class 5. Operation class 5 implies that neither a return result component nor a return error component will be received as an answer to an invoke component. A consequence of using this operation class is that the sending of information in an invoke component is not a confirmed service.

9.2.1 Transfer of charging information in the call establishment phase

9.2.1.1 Normal operation

For the AOC-S supplementary service, the activation and invocation of the supplementary service is performed simultaneously - i.e. the activation works as both an activation and an invocation of the supplementary service.

For the AOC-S supplementary service, the network shall give charging information either in currency units or as a special charging arrangement.

NOTE: The parameters described for the AOC-S supplementary service to express the duration rate provides a solution both for continuous charging as well as for charging with charging units. It is up to the network to specify the value of the parameters in a manner that it will fit with the continuous charging method or with the step function method.

If sending AOC-S supplementary service information to the served user, the network shall include charging rate information related only to the particular service(s) requested by the user at call setup.

When the network sends charging information to the served user in the call establishment phase, the network shall include the Facility information element in a call control message which is sent to the user (i.e. SETUP ACKNOWLEDGE, CALL PROCEEDING, PROGRESS, ALERTING, or CONNECT message - whichever is appropriate). Alternatively, the network can use a FACILITY message to send charging information to the user, if a call control message is not available when the information is to be sent.

The Facility information element shall contain information about the charging rate applicable to that call. If the AOC-S supplementary service is activated on a per call basis, the Facility information element shall contain the ChargingRequest return result component. If the AOC-S supplementary service is activated for all calls, the Facility information element shall contain an AOCSCurrency invoke component or an AOCSSpecialArr invoke component. This charging information shall consist of one of the following types:

- AOCSCurrencyInfoList; or,
- AOCSSpecialArrInfo.

If the user receives a correctly encoded ChargingRequest return result component, the user shall accept the provided information and shall not respond to the network.

If the user receives a correctly encoded AOCSCurrency or AOCSSpecialArr invoke component, the user shall accept the provided information and shall not respond to the network.

9.2.1.2 Exceptional procedures

In the case that charging information is not available in the network, the network shall inform the served user and the call shall be allowed to continue according to normal call handling procedures.

If the AOC-S supplementary service has been activated on a per call basis and if charging information is not available within the call establishment time, the network shall include a Facility information element within an appropriate message sent to the user. The Facility information element shall contain the ChargingRequest return error component indicating "NoChargingInfoAvailable".

If the user receives a correctly encoded ChargingRequest return error component, the user shall accept the reason for error and shall not respond to the network.

If the AOC-S supplementary service is activated for all calls and if charging information is not available within the call establishment time, the network shall include a Facility information element within an appropriate message sent to the user. The Facility information element shall contain the invoke component indicating "chargeNotAvailable".

If the user receives a correctly encoded AOCSCurrency or AOCSSpecialArr invoke component, the user shall accept the provided information and shall not respond to the network.

If the network receives a reject component from the user, the network shall take no further protocol actions. Normal call handling shall continue.

9.2.2 Transfer of charging information in the Active state

9.2.2.1 Normal operation

If the AOC-D supplementary service is offered, the originating network shall send charging information during a call. The rate of sending messages may vary from call to call and during a call.

If the AOC-S supplementary service is offered and if there is a subsequent change in the charging rate, the network shall indicate to the user when the change in the charging rate has occurred (e.g. the user has invoked a supplementary service during the Active state and this has an impact on the cost of the call, the changed charging rate information can only be given at the time the supplementary service is invoked).

When the network transfers charging information to the served user during the Active state, the network shall include the Facility information element in the FACILITY message sent to the user. The Facility information element shall contain one of the following types of charging information in an invoke component:

- a) charging rate, if a change in the charging rates has occurred and the AOC-S supplementary service has been activated; or,
- b) cumulative charging information related to the AOC-D supplementary service. The network shall set `TypeOfChargingInfo = "subTotal (0)"`.

In case a), the network shall send one of the following types of charging information to the served user:

- `AOCSCurrencyInfoList` in an `AOCSCurrency` invoke component; or,
- `AOCSSpecialArrInfo` in an `AOCSSpecialArr` invoke component.

For the AOC-S supplementary service, the network shall give charging information either in currency units or as a special charging arrangement.

NOTE: The parameters described for the AOC-S supplementary service to express the duration rate provides a solution both for continuous charging as well as for charging with charging units. It is up to the network to specify the value of the parameters in a manner that it will fit with the continuous charging method or with the step function method.

In case b), the network shall send one of the following types of charging information to the served user:

- `AOCDCurrencyInfo` in an `AOCDCurrency` invoke component; or,
- `AOCDChargingUnitInfo` in an `AOCDChargingUnit` invoke component.

If the AOC-D supplementary service is provided, the network shall give charging information, as a network option, either based on currency units or on charging units. Only the charged items that affect the charging applied to that call shall be covered.

If the user receives a correctly encoded `AOCSCurrency`, `AOCSSpecialArr`, `AOCDCurrency` or `AOCDChargingUnit` invoke component, the user shall accept the provided information and shall not respond to the network.

9.2.2.2 Exceptional procedures

In the case that charging information is temporarily not available in the network, the network shall continue normal call handling and no indication shall be sent to the user. This applies to the cases where the AOC-S or AOC-D supplementary services are activated.

If the network receives a reject component from the user, the network shall take no further protocol actions. Normal call handling shall continue.

9.2.3 Transfer of charging information in the call clearing phase

9.2.3.1 Normal operation

When the network transfers charging information to the served user in the call clearing phase, the network shall include the Facility information element either in the DISCONNECT or the RELEASE message, depending on who initiates the call clearing. If the served user initiates call clearing by sending a DISCONNECT message to the network, the network shall include the charging information in the RELEASE message sent from the network to the served user. If the remote user or the network initiates call clearing, the network shall include the charging information in the DISCONNECT message sent from the network to the served user.

In both these cases, if the AOC-S or AOC-D or the AOC-E supplementary services are activated, the network shall include the charging information in an invoke component within the Facility information element.

If the AOC-S supplementary service is activated, the network can send one of the following types of charging information:

- AOCSCurrencyInfoList in an AOCSCurrency invoke component; or,
- AOCSSpecialArrInfo in an AOCSSpecialArr invoke component.

For the AOC-S supplementary service, the network shall give charging information either in currency units or as a special charging arrangement.

NOTE: The parameters described for the AOC-S supplementary service to express the duration rate provides a solution both for continuous charging as well as for charging with charging units. It is up to the network to specify the value of the parameters in a manner that it will fit with the continuous charging method or with the step function method.

If the AOC-D supplementary service is activated, the network shall send one of the following types of charging information:

- AOCDCurrencyInfo in an AOCDCurrency invoke component; or,
- AOCDChargingUnitInfo in an AOCDChargingUnit invoke component.

In addition, for the AOC-D supplementary service the network shall set the TypeOfChargingInfo = "total (1)".

If the AOC-E supplementary service is activated, the network shall send one of the following types of charging information:

- AOCECurrencyInfo in an AOCECurrency invoke component; or,
- AOCEChargingUnitInfo in an AOCEChargingUnit invoke component.

If the AOC-D or AOC-E supplementary services are provided, the network shall give charging information, as a network option, either based on currency units or on charging units. Only the charged items that affects the charging applied to that call shall be covered.

If the user receives a correctly encoded AOCSCurrency, AOCSSpecialArr, AOCDCurrency, AOCDChargingUnit, AOCECurrency or AOCEChargingUnit invoke component, the user shall accept the provided information and shall not respond to the network.

In the case that the served user does not respond to a DISCONNECT message sent from the network, the network shall include the charging information, previously sent in the DISCONNECT message, in the subsequent RELEASE message(s) sent to the served user.

In the case that the served user does not respond to a RELEASE message sent from the network, the network shall include the charging information contained in the first RELEASE message in the retransmitted RELEASE message.

In the case that the network receives a RELEASE message as the first clearing message from the served user, the network shall send an invoke component containing charging information to the served user in the Facility information element within the RELEASE COMPLETE message.

9.2.3.2 Exceptional procedures

In the case that charging information is not available in the network, the network shall inform the served user and continue normal call handling procedures.

If an AOC supplementary service has been activated and:

- a) if charging information is not available to be sent to the served user and the network provides charging information based on currency units, then the network shall include the Facility information element in an appropriate message containing an invoke component indicating "chargeNotAvailable";
- b) if charging information is available but not complete and the network provides charging information based on currency units or only one type of charging unit, then the network shall include an invoke component in the Facility information element in a clearing message sent from the network to the served user. The invoke component shall indicate "chargeNotAvailable";
- c) if charging information is not available to be sent to the served user and only one type of charging unit is used, then the network shall include the Facility information element in an appropriate message containing an invoke component indicating "chargeNotAvailable"; or,
- d) if more than one type of charging unit is used in the network and charging information related to all charging unit types is not available when charging information is to be sent to the served user, then the network shall send the available charging information and indicate "notAvailable" for the remaining charging unit types. This applies to both AOCDChargingUnitInfo and AOCEChargingUnitInfo.

If the call fails and the network knows that charges have been applied to the call, the recorded charges shall be transferred to the user. An invoke component contained in the Facility information element shall indicate the relevant charging information which is transferred to the served user. If the AOC-D supplementary service is activated, the network shall send one of the following types of charging information:

- AOCDCurrencyInfo in an AOCDCurrency invoke component; or,
- AOCDChargingUnitInfo in an AOCDChargingUnit invoke component.

If the AOC-E supplementary service is activated, the network shall send one of the following types of charging information:

- AOCECurrencyInfo in an AOCECurrency invoke component; or,
- AOCEChargingUnitInfo in an AOCEChargingUnit invoke component.

If the user receives a correctly encoded AOCDCurrency, AOCDChargingUnit, AOCECurrency or AOCEChargingUnit invoke component, the user shall accept the provided information and shall not respond to the network.

If the network receives a reject component from the user, the network shall take no further protocol actions. Normal call handling shall continue.

9.2.4 Transfer of charging information independent of a bearer at the user-network interface

9.2.4.1 Normal operation

In some cases, the network shall transfer charging information to the served user, without a bearer being established at the user-network interface (e.g. in connection with the invocation of a Diversion supplementary service). This can occur only when the AOC-E supplementary service is activated. The network shall send the charging information to the served user when the call, incurring the charge, is released (e.g. the diverted call).

The network shall send the charging information in a FACILITY message containing in the Called party number information element the ISDN number used in the activation and/or invocation of the supplementary service for which charging information is to be sent. If the network has not received an ISDN number from the user, then the network shall not include the Called party number information element in the FACILITY message when the charging information is sent.

The network shall send the FACILITY message using the dummy call reference, as specified in Clause 8 of ETS 300 196-1 [11]. If the network knows that a point-to-multipoint configuration exists at the served user's access, the network shall send the FACILITY message using the broadcast datalink (as specified in subclause 8.3.2.4 of ETS 300 196-1 [11]). Otherwise the network shall send the FACILITY message using the already established datalink (as specified in subclause 8.3.2.2 of ETS 300 196-1 [11]).

The FACILITY message shall contain the Facility information element and indicate in the "AOCEBillingId" of the invoke component why this charge is incurred (e.g. a call has been diverted and the served user is paying for some part of the diverted call). The "AOCEBillingId" is transferred in one of the following types of charging information:

- AOCECurrencyInfo in an AOCECurrency invoke component; or,
- AOCEChargingUnitInfo in an AOCEChargingUnit invoke component.

If the user receives a correctly encoded AOCECurrency or AOCEChargingUnit invoke component, the user shall accept the provided information and shall not respond to the network.

If the AOC-E supplementary service is provided, the network shall give charging information, as a network option, either based on currency units or on charging units. Only the charged items that affect the charging applied to that call shall be covered.

In order to identify that the charging information is associated with a particular call, an optional chargingAssociation parameter can be included in the charging information which is sent to the served user when such a call is cleared. The procedures for generating and using the "chargingAssociation" parameter shall be as defined in ETS 300 195-1 [12].

9.2.4.2 Exceptional procedures

If an AOC supplementary service has been activated and:

- a) if charging information is not available to be sent to the served user and the network provides charging information based on currency units, then the network shall send an invoke component indicating "chargeNotAvailable" in a Facility information element within a FACILITY message to the served user;
- b) if charging information is available but not complete and the network provides charging information based on currency units or only one type of charging unit, then the network shall include an invoke component in the Facility information element within a FACILITY message sent from the network to the served user. The invoke component shall indicate "chargeNotAvailable";
- c) if charging information is not available to be sent to the served user and only one type of charging unit is used, then the network shall send a Facility information element containing an invoke component indicating "chargeNotAvailable" within a FACILITY message to the served user; or,

- d) if more than one type of charging unit is used in the network and charging information related to all charging unit types is not available when charging information is to be sent to the served user, then the network shall send the available charging information and indicate "notAvailable" for the remaining charging unit types in a FACILITY message.

If provided, the FACILITY message shall contain in the Called party number information element the ISDN number used in the activation and/or invocation of the supplementary service for which charging information is to be sent. If the network has not received an ISDN number from the user, then the network shall not include the Called party number information element in the FACILITY message when the charging information is sent.

The network shall send the FACILITY message using the dummy call reference, as specified in Clause 8 of ETS 300 196-1 [11]. If the network knows that a point-to-multipoint configuration exists at the served user's access, the network shall send the FACILITY message using the broadcast datalink (as specified in subclause 8.3.2.4 of ETS 300 196-1 [11]). Otherwise the network shall send the FACILITY message using the already established datalink (as specified in subclause 8.3.2.2 of ETS 300 196-1 [11]).

In order to identify that the charging information is associated with a particular call, an optional ChargingAssociation parameter can be included in the charging information which is sent to the served user when such a call is cleared. The procedures for generating and using the "chargingAssociation" parameter shall be as defined in ETS 300 195-1 [12].

If the network receives a reject component from the user, the network shall take no further protocol actions. Normal call handling shall continue.

10 Procedures for interworking with private ISDNs

The same procedures apply as for the coincident S and T reference point, as specified in Clause 9.

11 Interactions with other networks

Not applicable.

12 Interactions with other supplementary services

The interaction of any of the AOC supplementary services with other supplementary services shall be as specified in ETS 300 195-1 [12].

13 Parameter values (timers)

No specific timers are required.

14 Dynamic description (SDLs)

The dynamic descriptions are specified in figures 1 to 9, according to CCITT Recommendation Z.100 [13]. Figures 1 and 2 show the user side of the AOC supplementary service. Figures 3 to 9 show the network side.

In figure 3, one instance of the described process shall exist for each AOC supplementary service requested. These instances of the described process shall operate independently of each other. Each request for an AOC supplementary service shall be handled by a separate process and multiple requests for AOC supplementary services can be included in a SETUP message.

The following abbreviations are used in the SDL diagrams:

- Key:**
- AOC-S invoke = AOCSSpecialArr or AOCSCurrency invoke component
 - AOC-D invoke = AOCDCurrency or AOCDChargingUnit invoke component
 - AOC-E invoke = AOCECurrency or AOCEChargingUnit invoke component

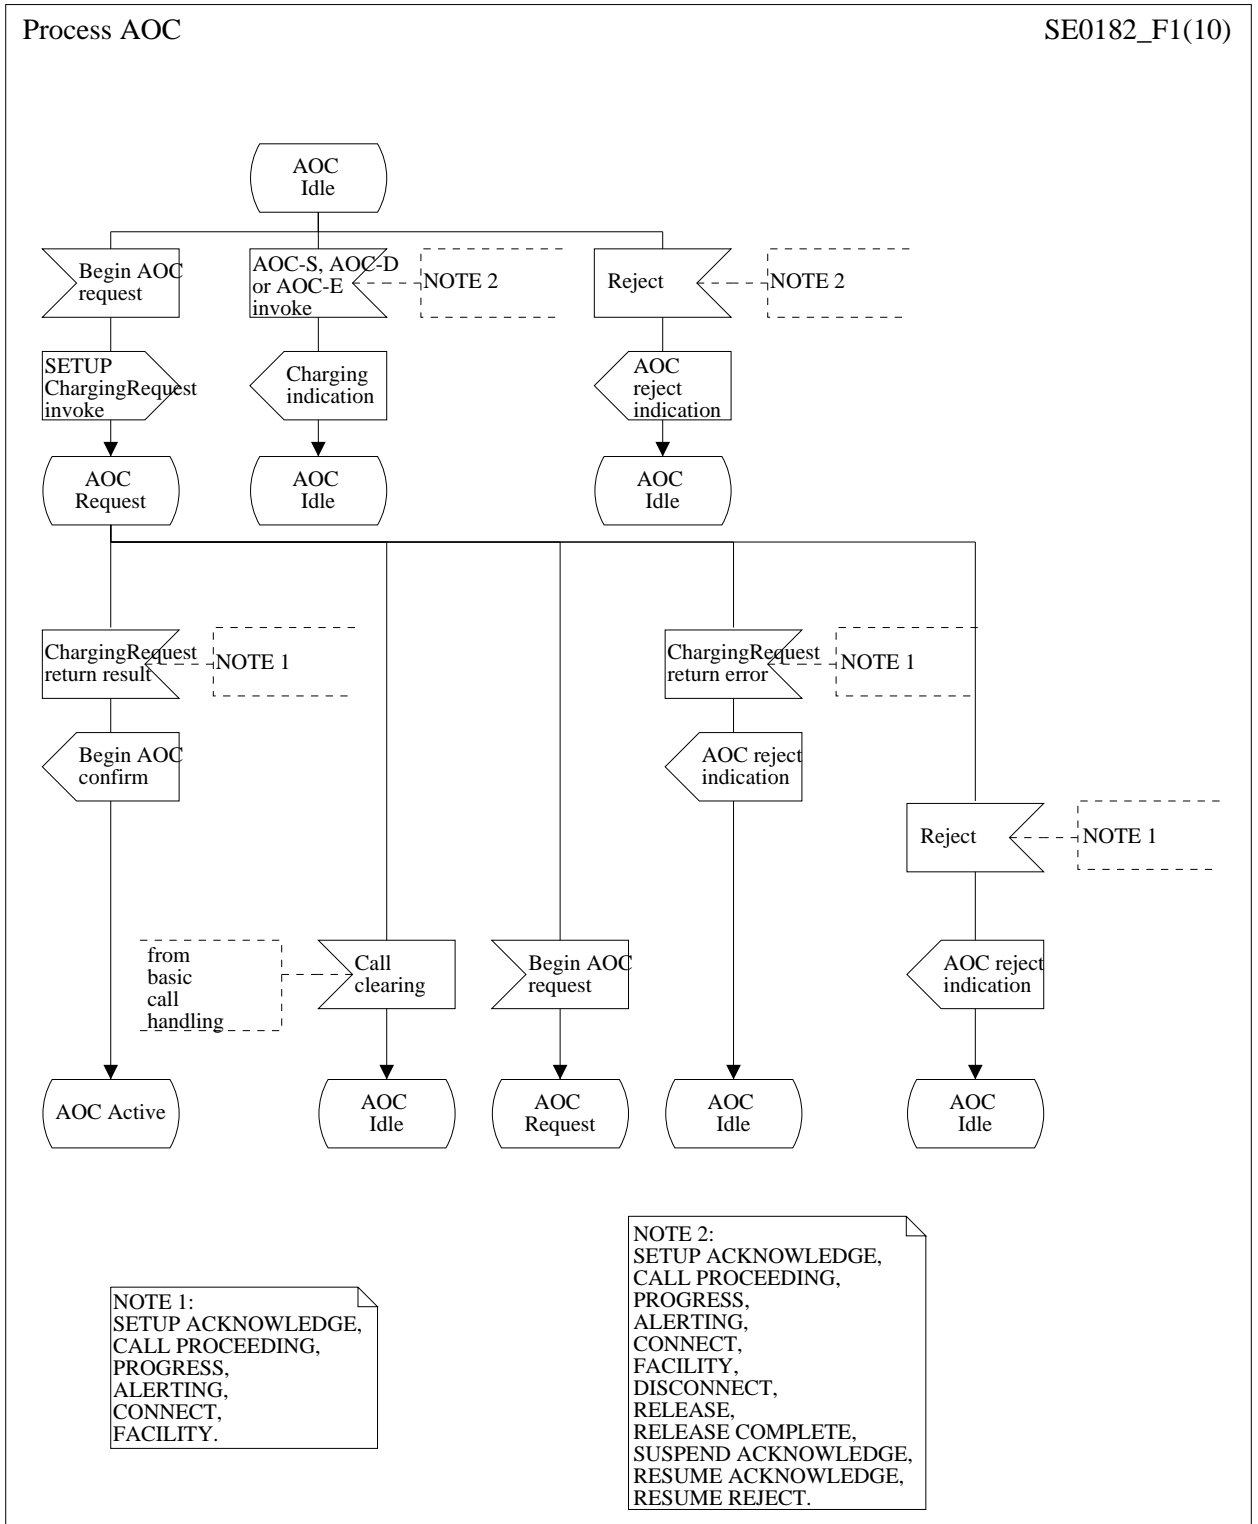


Figure 1: User side - AOC Idle

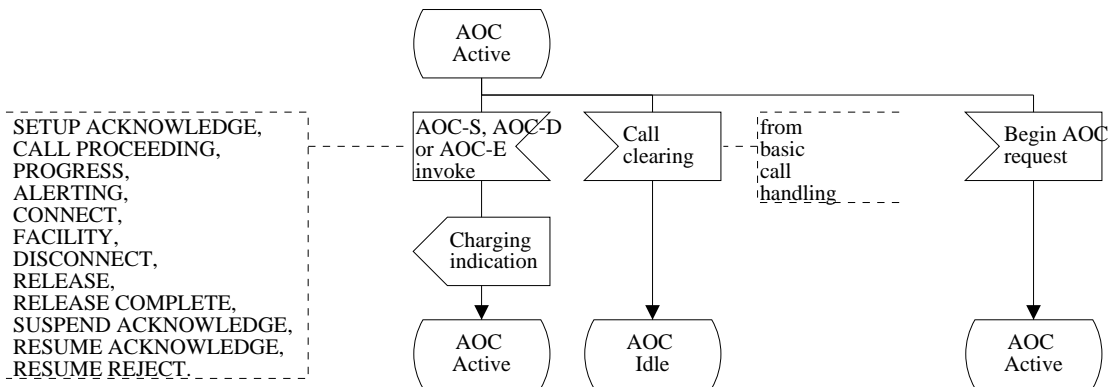


Figure 2: User side - AOC Active

Process AOC

SE0182_F3.1(10)

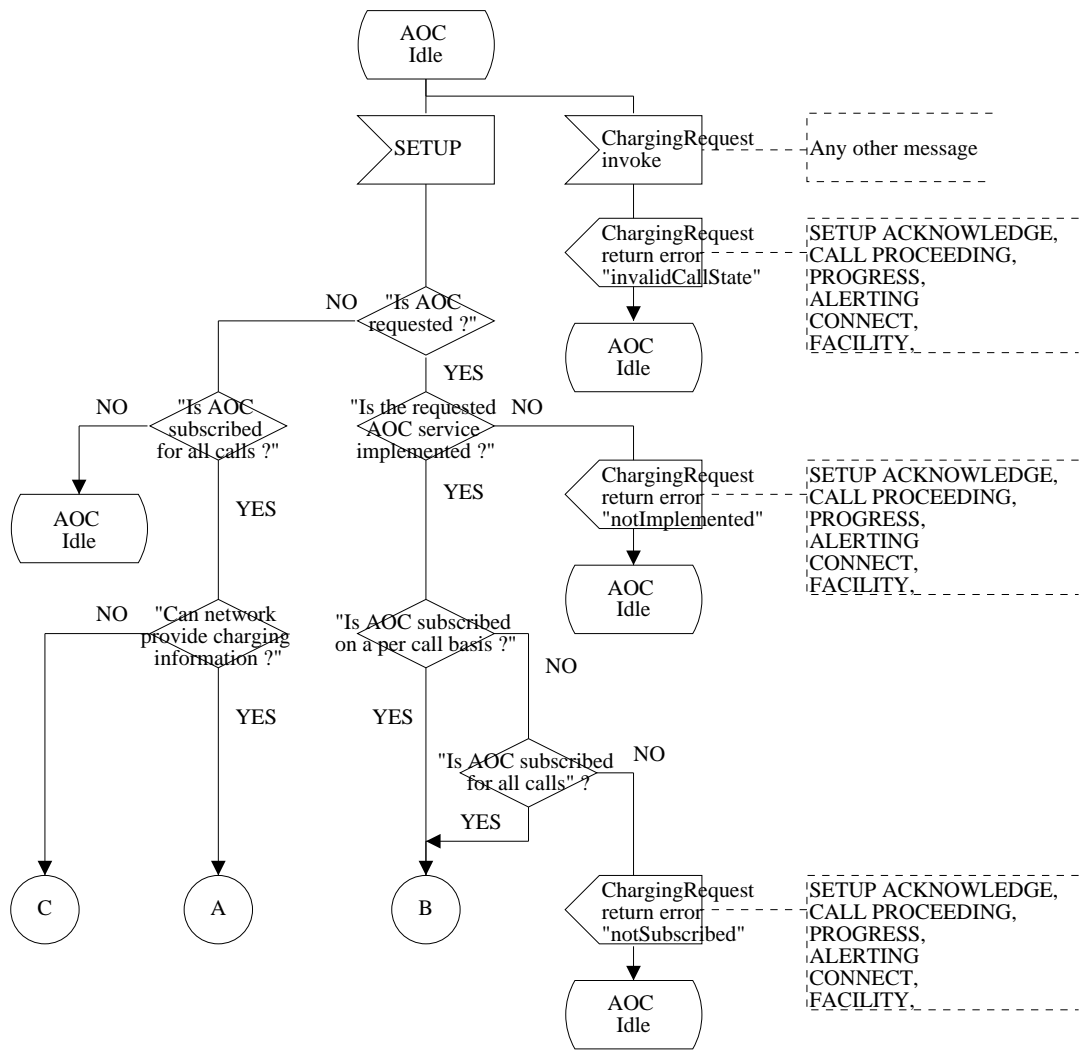


Figure 3 (sheet 1 of 2): Network side - AOC Idle

Process AOC

SE0182_F3.2(10)

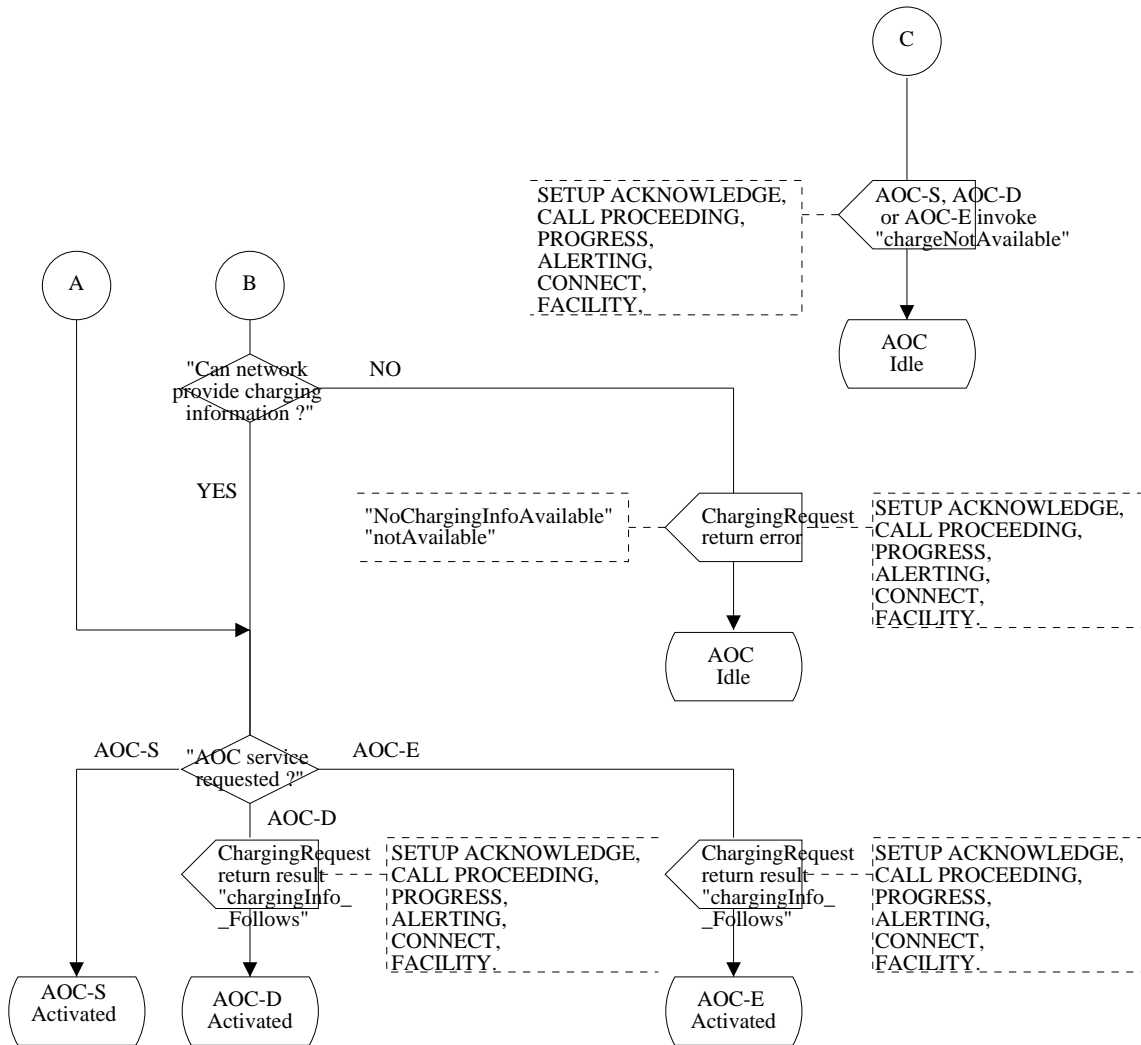


Figure 3 (sheet 2 of 2): Network side - AOC Idle

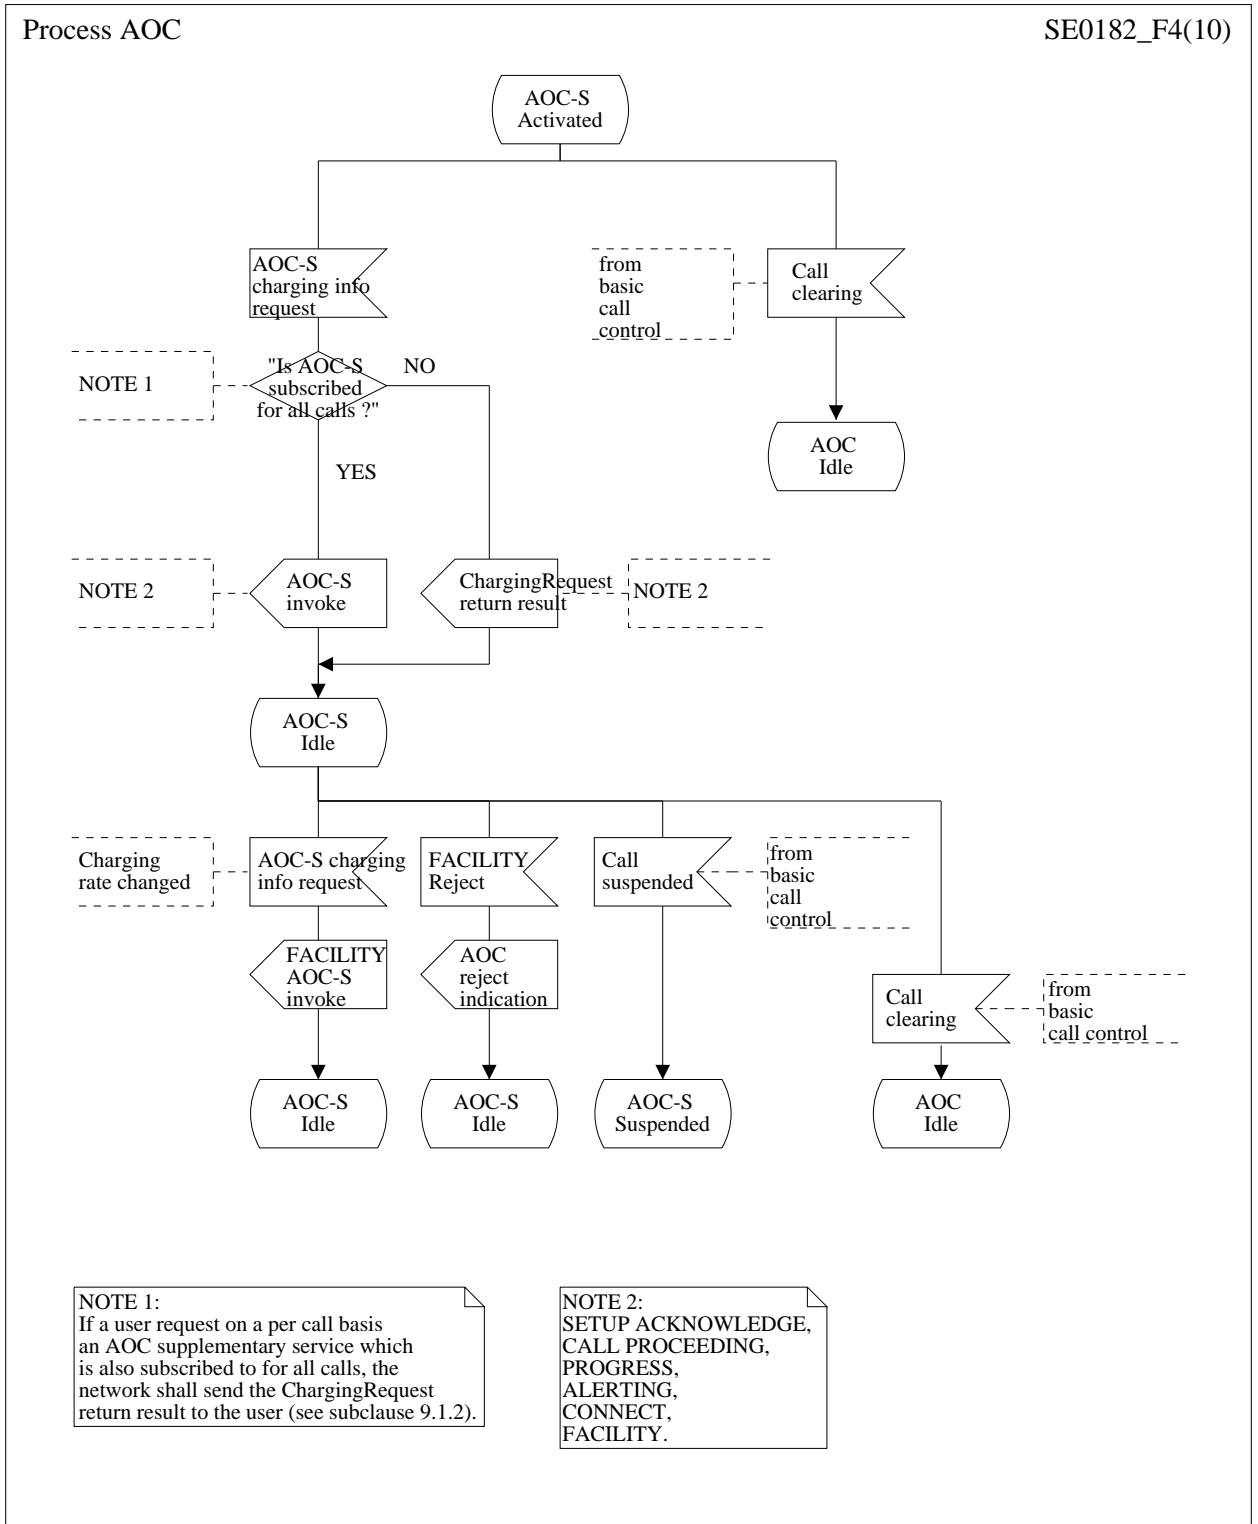


Figure 4: Network side - AOC-S Activated

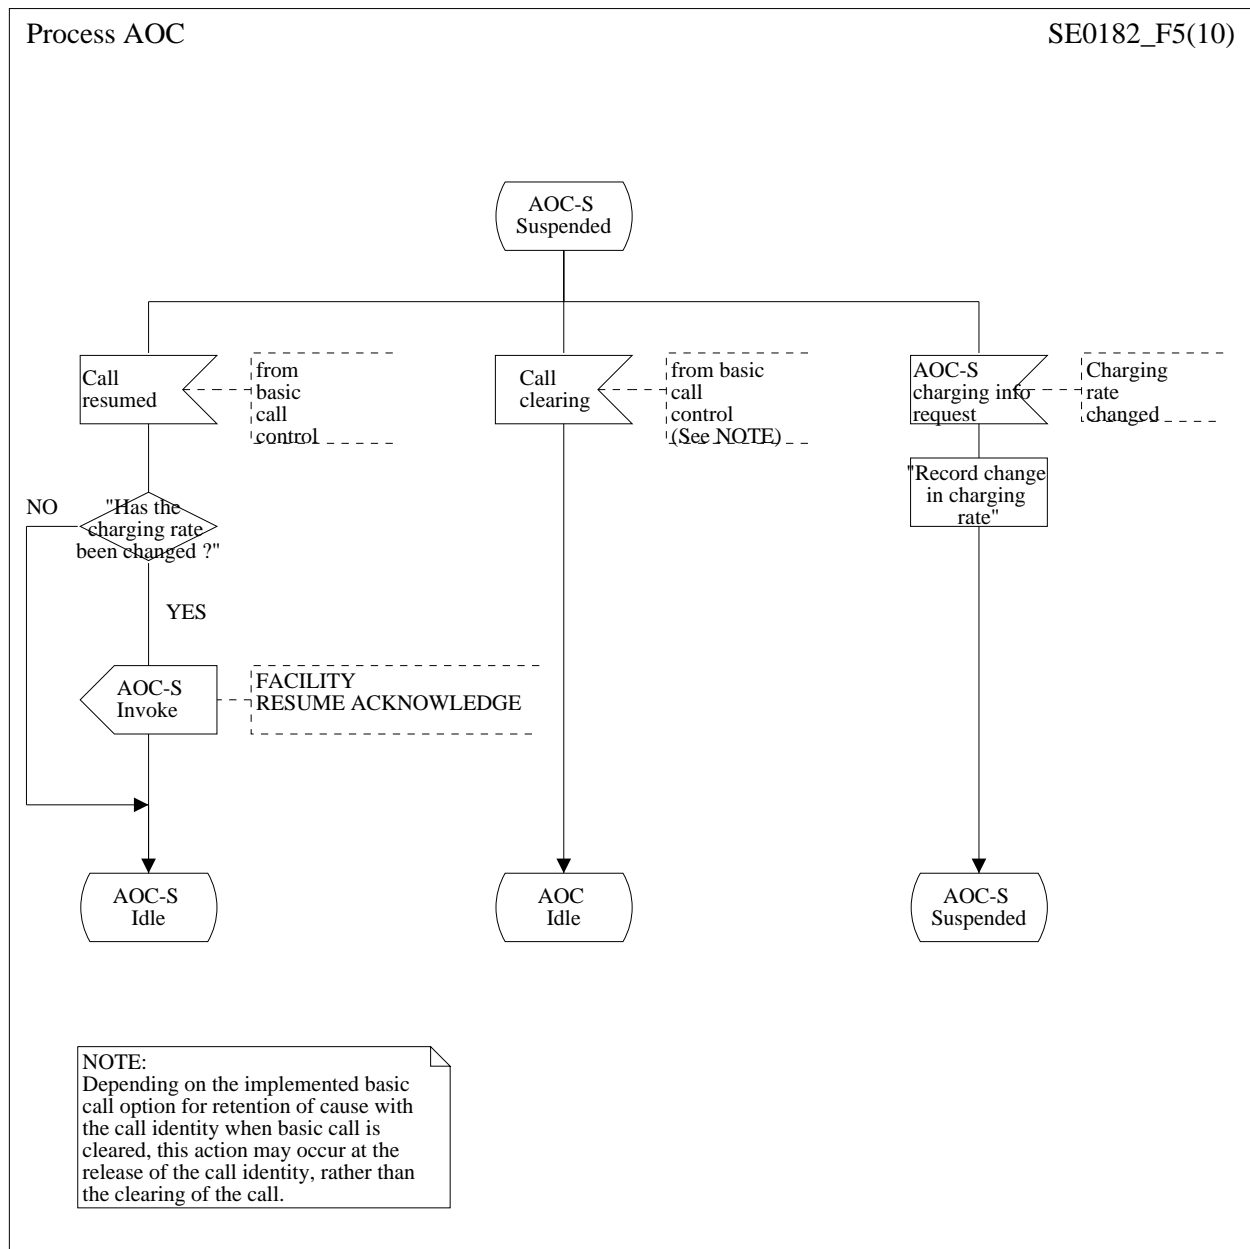


Figure 5: Network side - AOC-S Suspended

Process AOC

SE0182_F6(10)

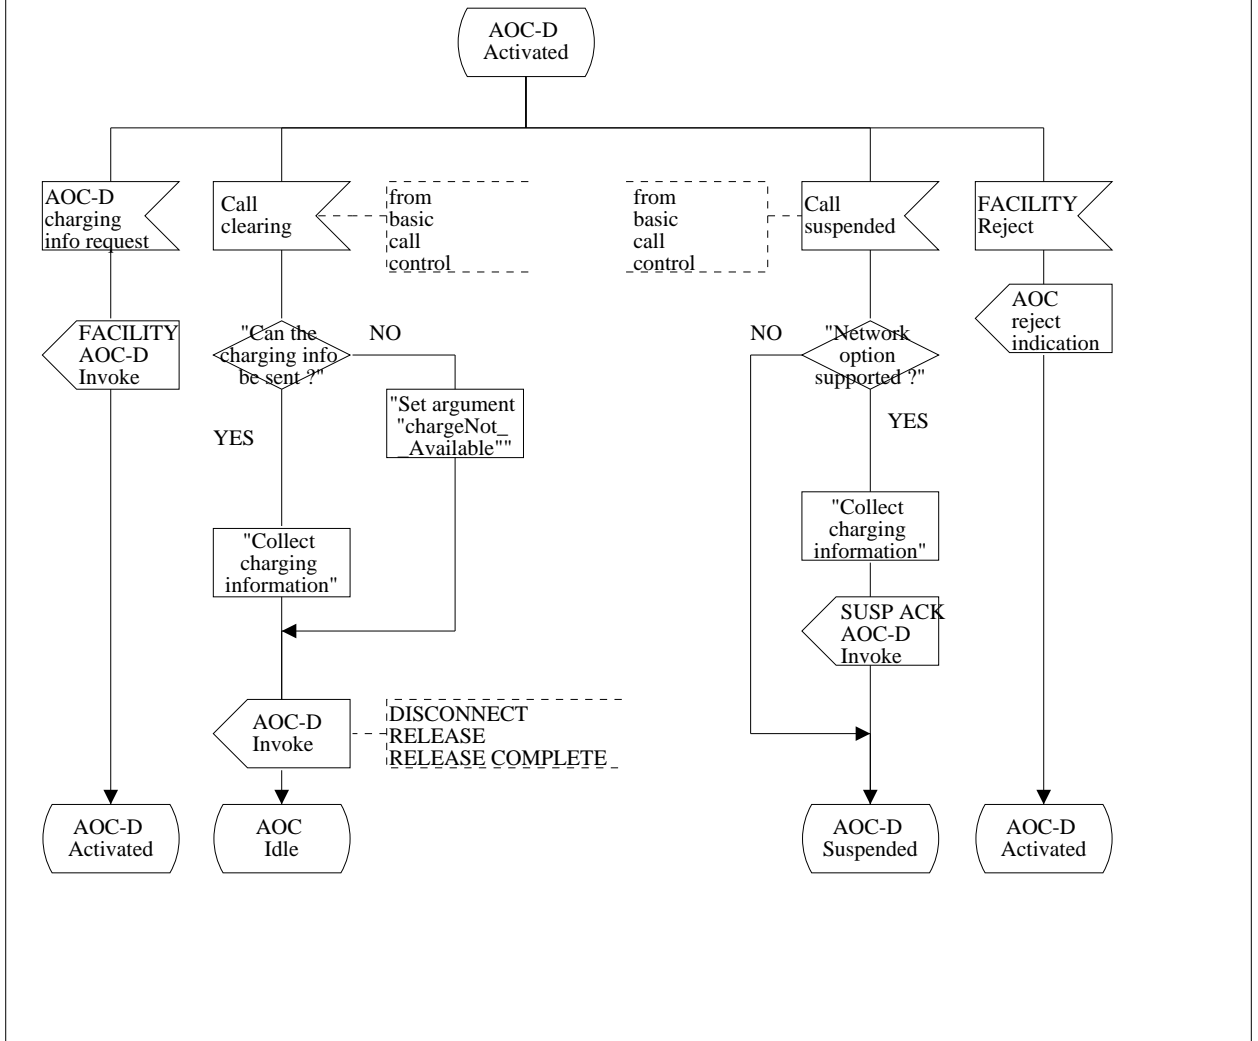


Figure 6: Network side - AOC-D Activated


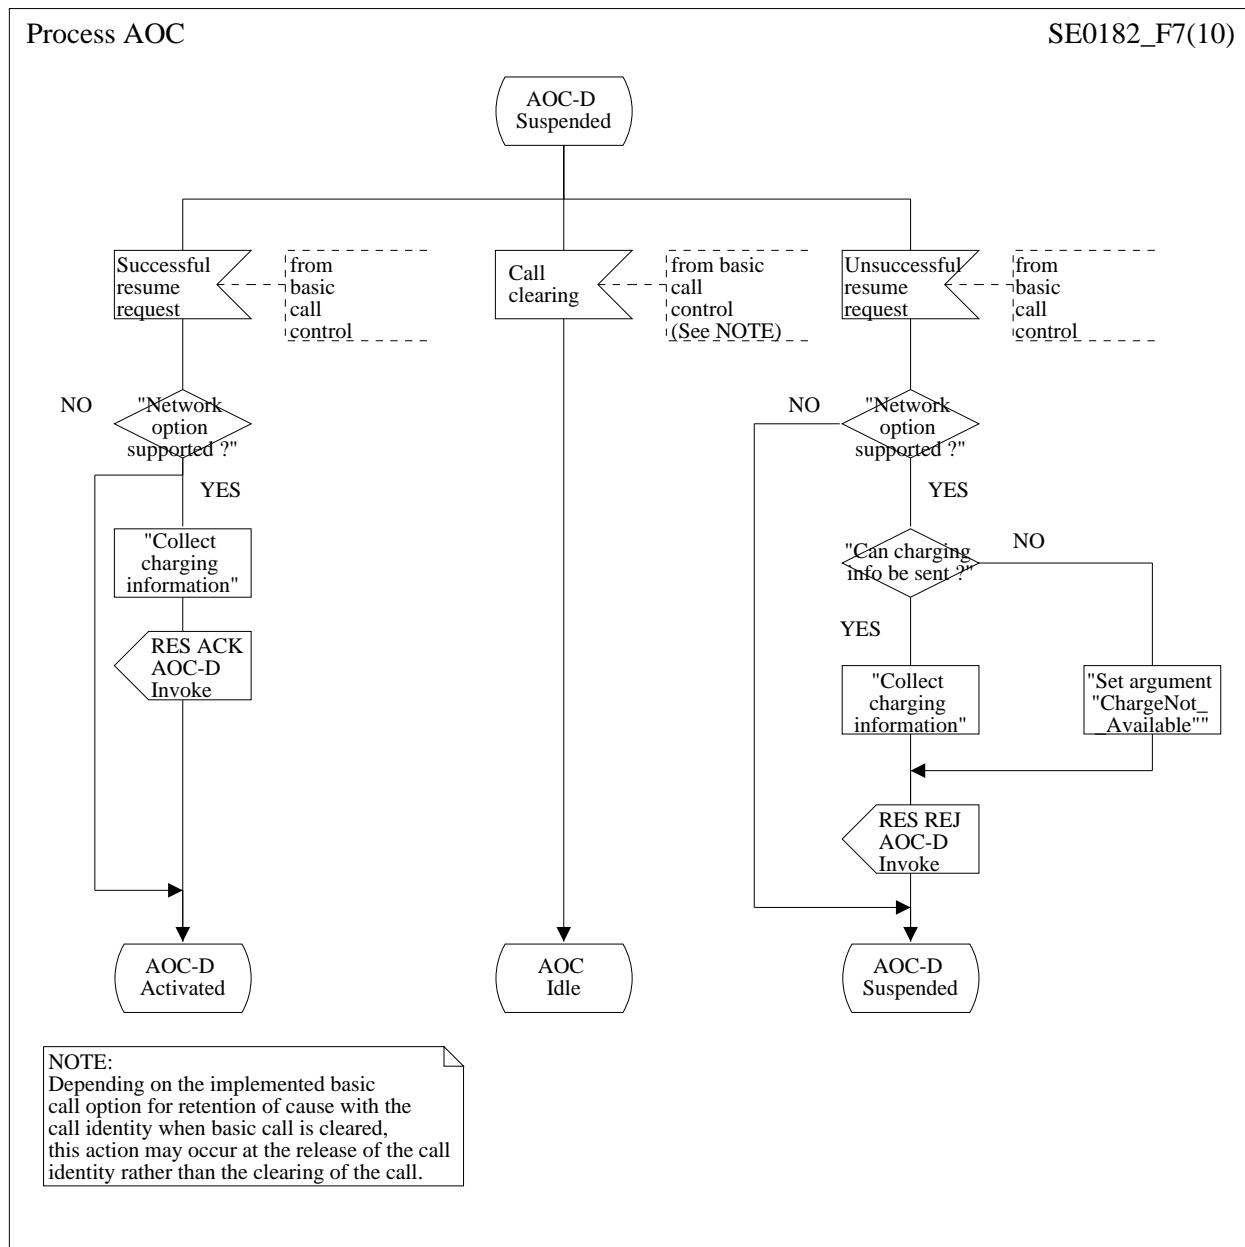


Figure 7: Network side - AOC-D Suspended


Process AOC

SE0182_F8(10)

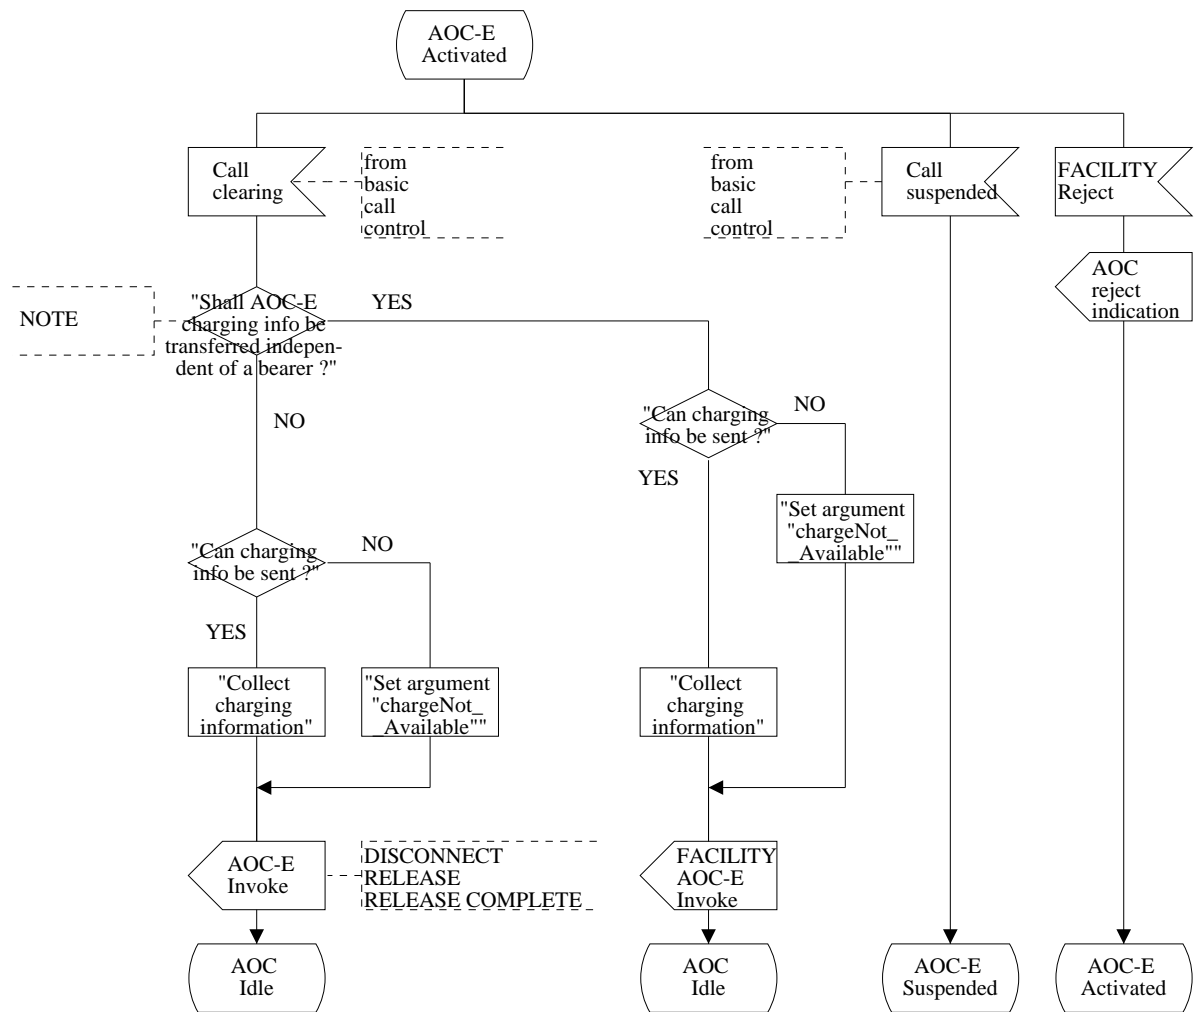

NOTE:
 If the AOC charging information is to be sent independent of bearer at the user-network interface, then the network shall send the charging information in the FACILITY message, as specified in subclause 9.2.4.

Figure 8: Network side - AOC-E Activated

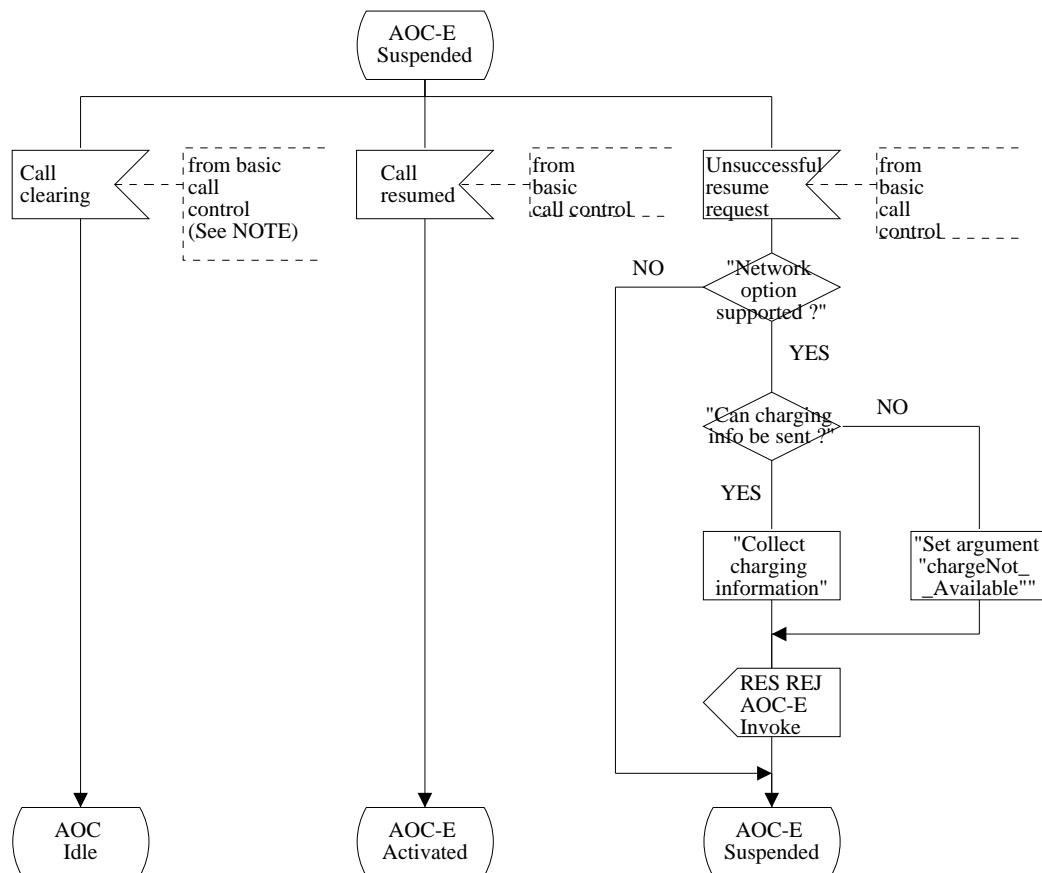

NOTE:
 Depending on the implemented basic call option for retention of cause with the call identity when basic call is cleared, this action may occur at the release of the call identity rather than the clearing of the call.

Figure 9: Network side - AOC-E Suspended

Annex A (informative): Signalling flows

In the following signalling flows it is assumed that the network has knowledge about the charging rate or the charges applied to a particular call. This does not exclude the possibility for the network to collect this information from another point in the network. The signalling flows across the user-network interface are the same for both cases.

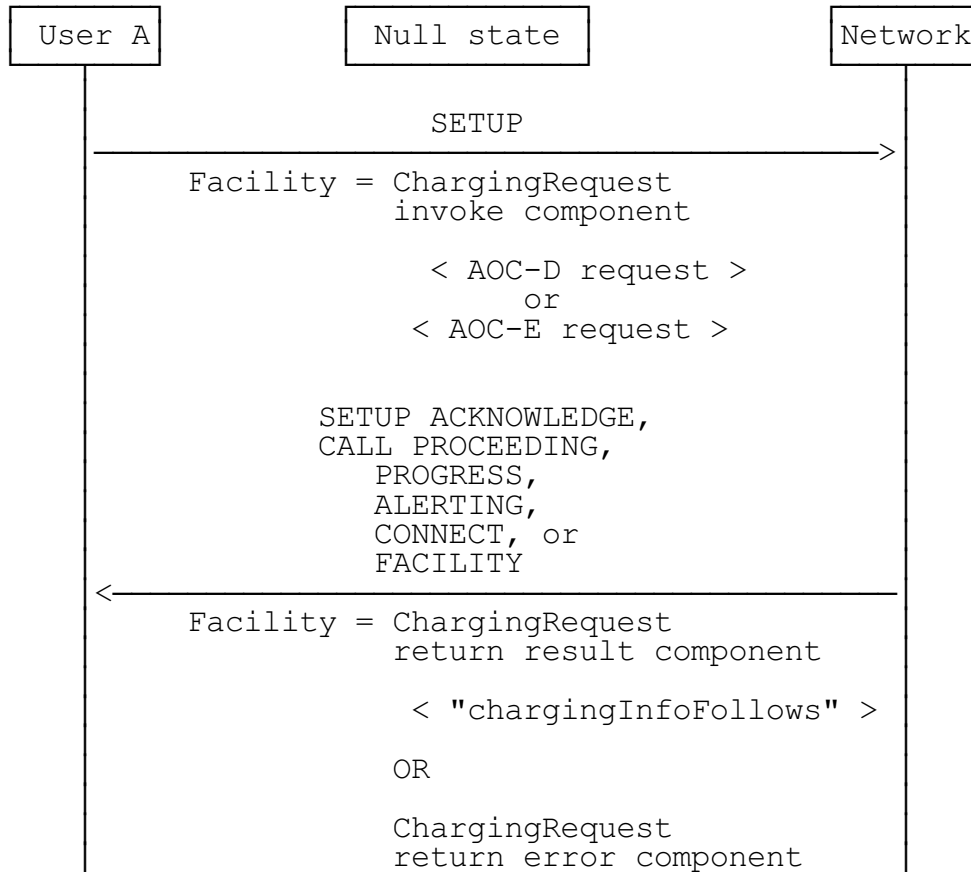


Figure A.1: AOC-D or AOC-E request procedure during call establishment

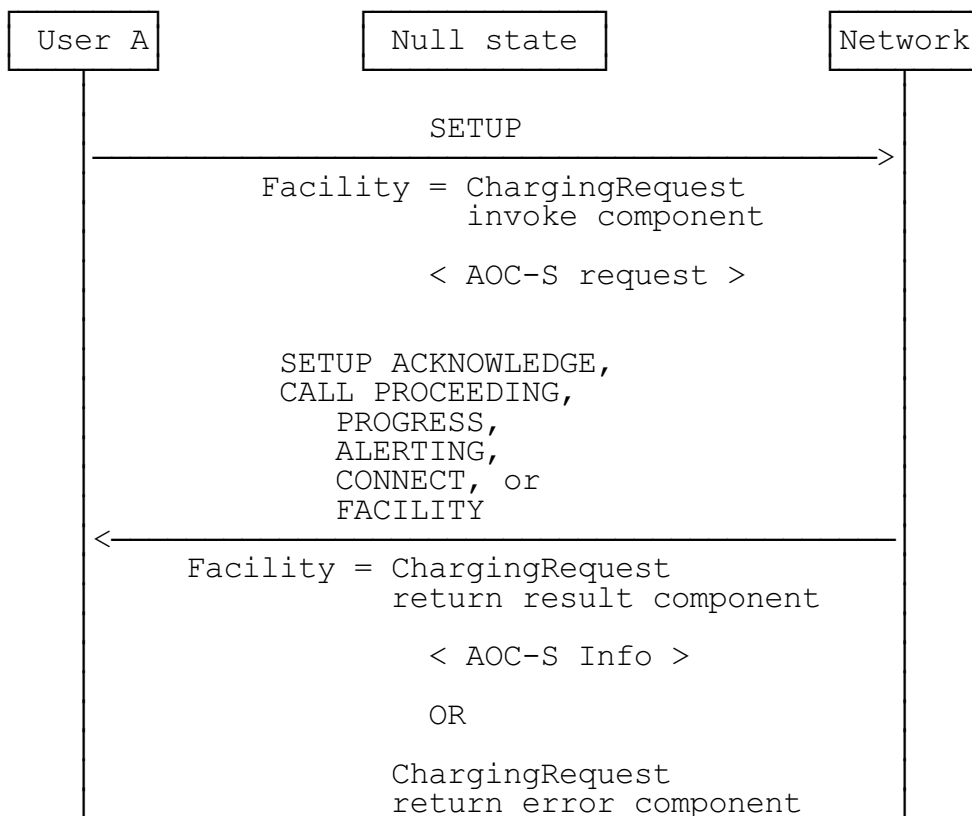


Figure A.2: Information about charging rates during call establishment, AOC-S activated on a per call basis


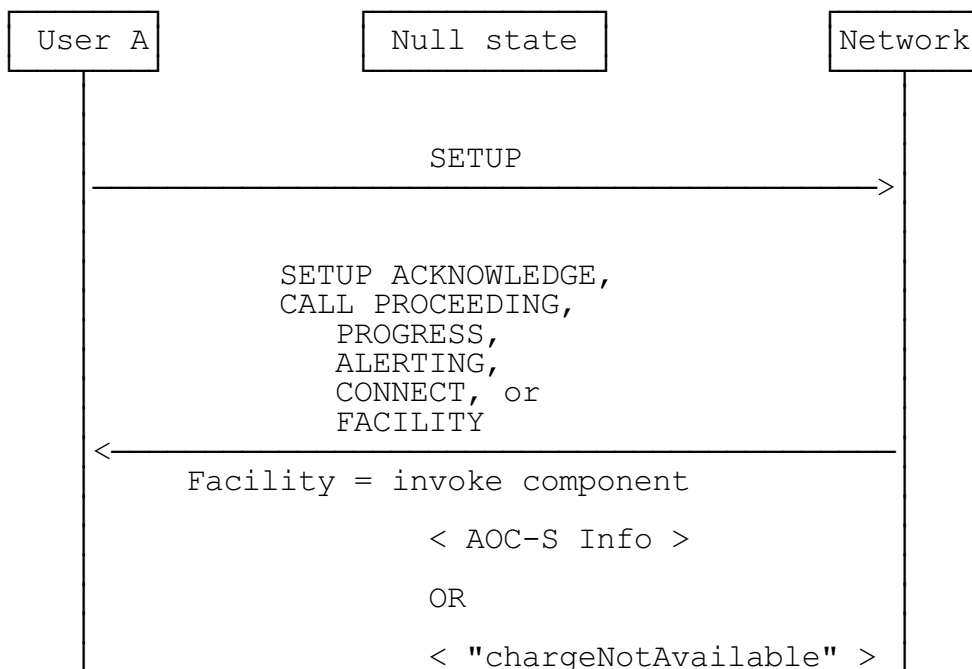


Figure A.3: Information about charging rates during call establishment, AOC-S activated for all calls

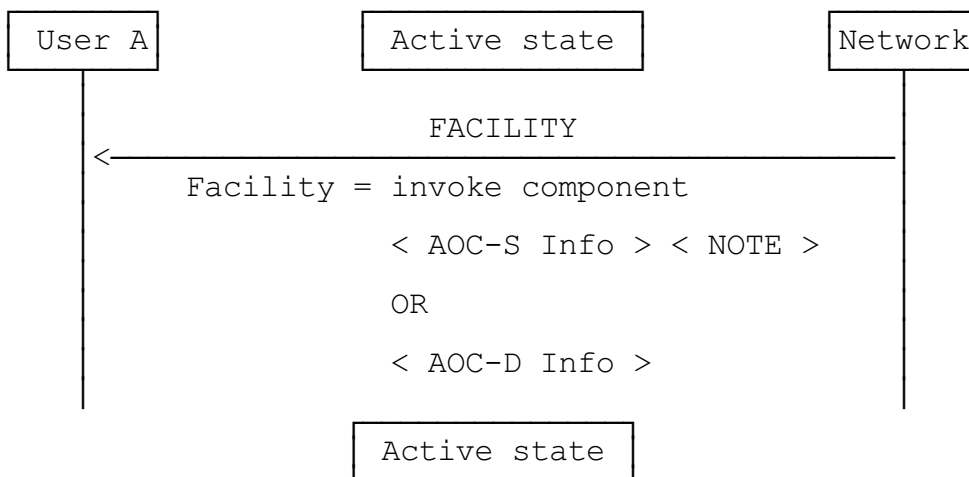

NOTE: Only sent if a change in the charging rate has occurred.

Figure A.4: Transfer of charging information during the Active state of a call

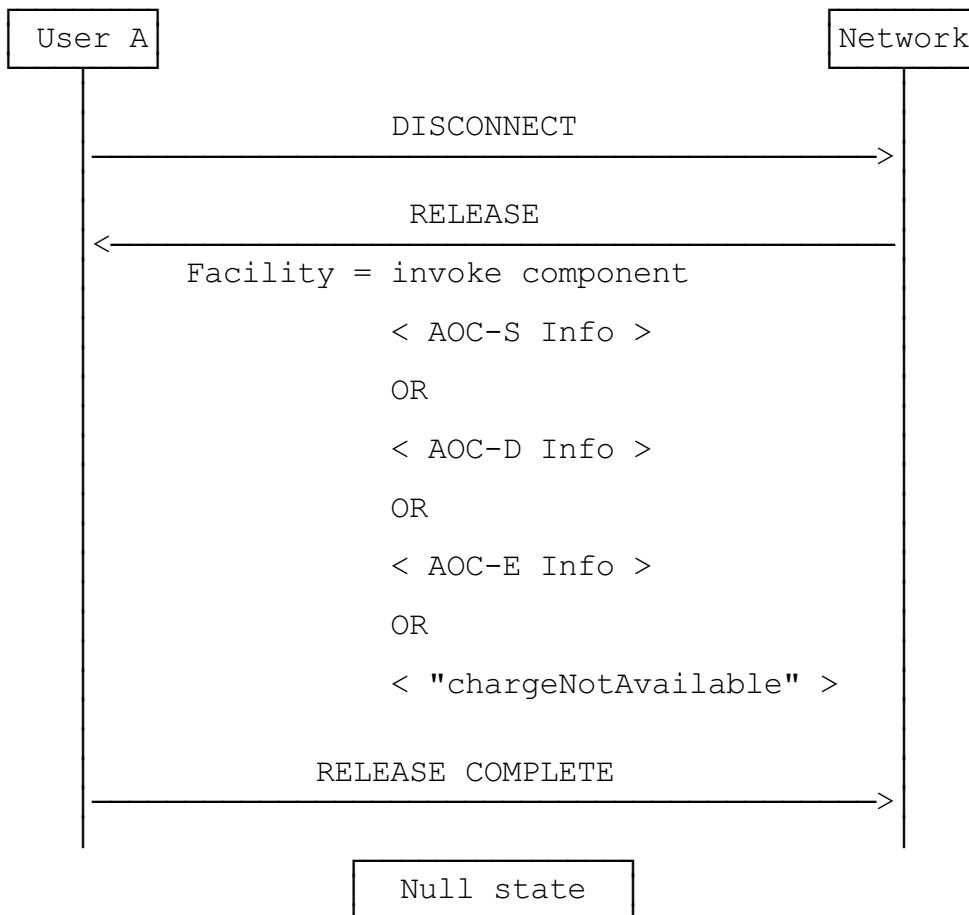


Figure A.5: Transfer of charging information during the call clearing phase, clearing initiated by the calling user

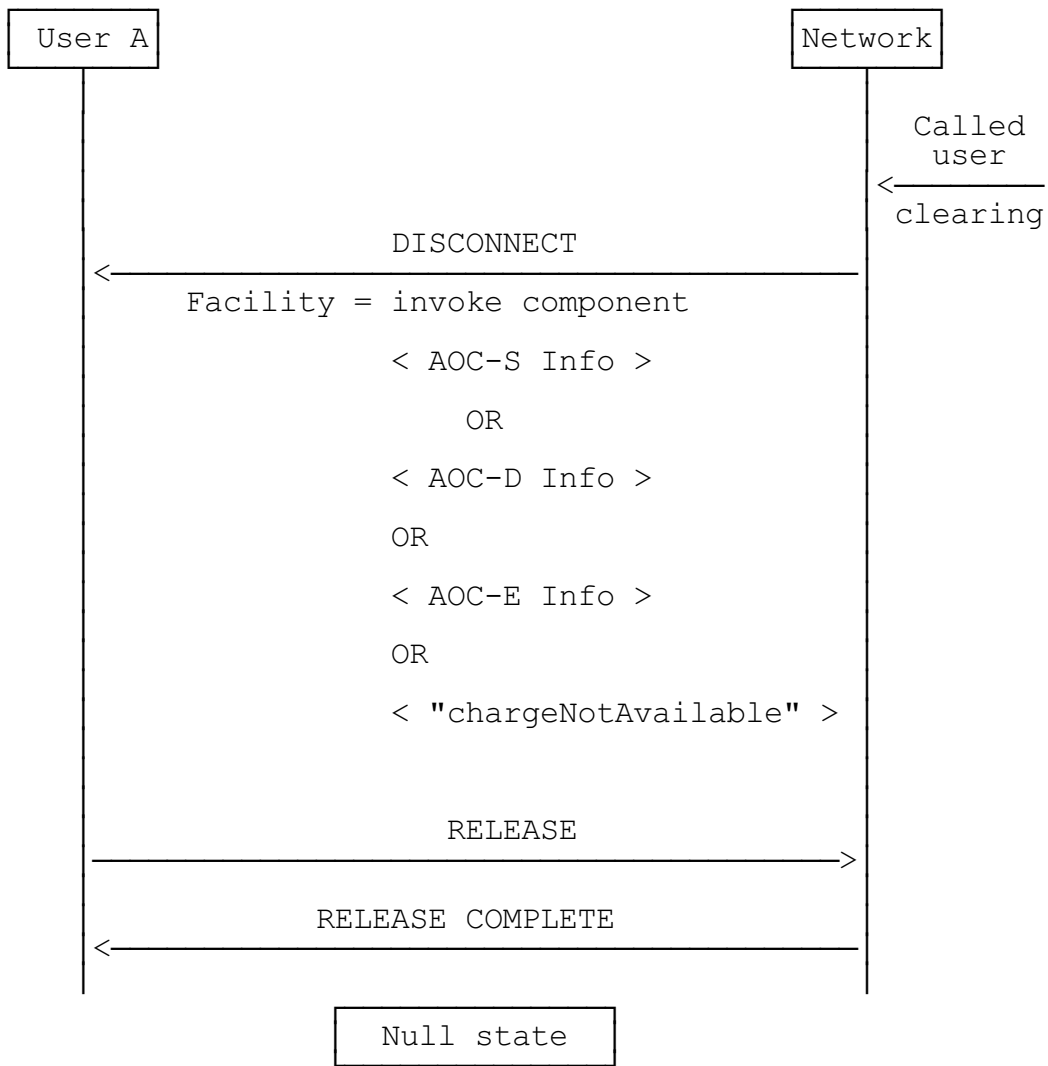


Figure A.6: Transfer of charging information during the call clearing phase, clearing initiated by the called user

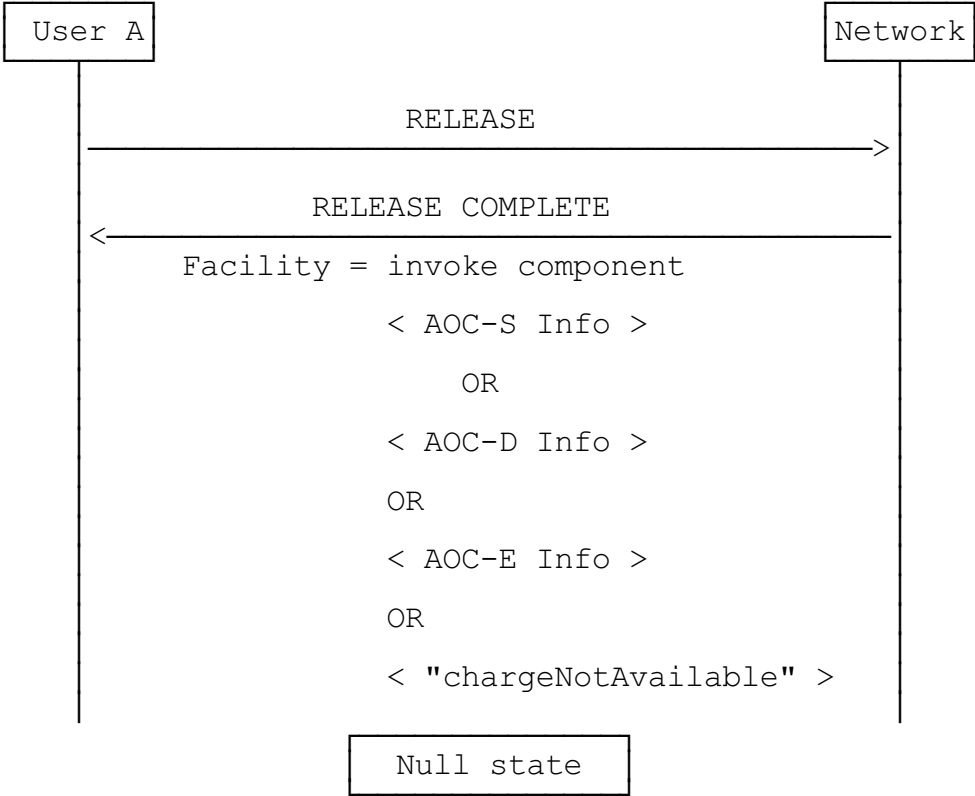


Figure A.7: Transferring charging information in the case the network receives a RELEASE message as the first message in the release procedure

History

Document history	
April 1993	First Edition
September 1993	Corrigendum to First Edition
April 1994	Corrigendum to First Edition: change to part 1 of a multi-part standard
March 1996	Converted into Adobe Acrobat Portable Document Format (PDF) and incorporation of all prior Corrigenda