

ETSI TS 103 410-10 V1.1.1 (2020-07)



TECHNICAL SPECIFICATION

**SmartM2M;
Extension to SAREF;
Part 10: Water Domain**

Reference

DTS/SmartM2M-103410-10-SRF4WTR

Keywords

IoT, oneM2M, ontology, SAREF, semantic, smart watering

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	6
3.1 Terms.....	6
3.2 Symbols.....	6
3.3 Abbreviations	6
4 SAREF4WATR ontology and semantics	6
4.1 Introduction and overview.....	6
4.2 SAREF4WATR.....	7
4.2.1 General Overview	7
4.2.2 Measurement.....	9
4.2.3 Water meter	10
4.2.4 Water flow	11
4.2.5 Tariff.....	11
4.2.6 Water types	13
4.2.7 Water properties.....	13
4.2.8 Water infrastructure	14
4.2.9 Key Performance Indicator	16
4.3 Instantiating SAREF4WATR.....	17
4.4 Observations.....	20
History	21

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Smart Machine-to-Machine communications (SmartM2M).

The present document is part 10 of a multi-part deliverable covering SmartM2M; Extension to SAREF, as identified below:

- Part 1: "Energy Domain";
- Part 2: "Environment Domain";
- Part 3: "Building Domain";
- Part 4: "Smart Cities Domain";
- Part 5: "Industry and Manufacturing Domains";
- Part 6: "Smart Agriculture and Food Chain Domain";
- Part 7: "Automotive Domain";
- Part 8: "eHealth/Ageing-well Domain";
- Part 9: "Wearables Domain";
- Part 10: "Water Domain".**

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document presents SAREF4WATR, an extension of SAREF for the Water domain.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 103 264 (V3.1.1) (02-2020): "SmartM2M; Smart Applications; Reference Ontology and oneM2M Mapping".
- [2] ETSI TS 103 410-4 (V1.1.2) (05-2020): "SmartM2M; Extension to SAREF; Part 4: Smart Cities Domain".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI TR 103 547 (V1.1.1) (10-2019): "SmartM2M; SAREF extension investigation; Requirements for the Water domain".
- [i.2] EN 13757-2:2017: "Communication systems for meters - Part 2: Wired M-Bus communication", (produced by CEN).
- [i.3] TR 17167: "Communication system for meters - Accompanying TR to EN 13757-2,-3 and -7, Examples and supplementary information", (produced by CEN).
- [i.4] World Health Organization (2017): "Guidelines for Drinking-water Quality. Fourth edition incorporating the first addendum".
- [i.5] Council Directive 98/83/EC of 3 November 1998 on the quality of water intended for human consumption.
- [i.6] Directive 2006/7/EC of the European Parliament and of the Council of 15 February 2006 concerning the management of bathing water quality and repealing Directive 76/160/EEC.
- [i.7] Directive 2006/118/EC of the European Parliament and of the Council of 12 December 2006 on the protection of groundwater against pollution and deterioration.

[i.8] OGC 11-052r4: "OGC GeoSPARQL - A Geographic Query Language for RDF Data". Version 1.0.

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

ontology: formal specification of a conceptualization, used to explicit capture the semantics of a certain reality

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

EC	European Commission
M-Bus	Meter-Bus
OWL-DL	Web Ontology Language - Description Logics
RDF	Resource Description Framework
RDF-S	Resource Description Framework Schema
SAREF	Smart Applications REFerence ontology
SAREF4SYST	SAREF extension for Systems
SAREF4WATR	SAREF extension for the Water domain
WKT	Well-Known Text

4 SAREF4WATR ontology and semantics

4.1 Introduction and overview

The present document is a technical specification of SAREF4WATR, an extension of SAREF for the Water domain. This extension has been created by investigating resources from potential stakeholders of the ontology, such as standardization initiatives, associations, European projects, EC directives, existing ontologies, and data repositories, as reported in ETSI TR 103 547 [i.1]. In addition, the use cases defined in [i.1] were also taken into account, namely:

- **Use case 1:** Remote reading of metrological registers
- **Use case 2:** Advanced meter reading and configuration
- **Use case 3:** Risk management over water critical infrastructure
- **Use case 4:** Interaction of cross-domain variables and models for policy-making

Taking into account ontologies, data models, standards and datasets provided by the identified stakeholders, a set of requirements were identified and grouped in the following categories: Water infrastructure, Water meter, Meter measurements, Infrastructure measurements, Water measurements, Indicators, and Tariff. Such requirements and categories were validated during the "SAREF4WATR Validation Workshop" at the ICT4Water Cluster annual event in Brussels on 11th June 2019. During the workshop, attendees validated the use cases proposed above and the list of requirements for the above-mentioned categories. According to the feedback and outcomes of the workshop, some actions were taken such as to better define the geolocation of meters or to allow connecting information from the water domain to other domains. The concrete decisions were reported in ETSI TR 103 547 [i.1]. The requirements listed in ETSI TR 103 547 were taken as input for the ontology development.

SAREF4WATR is an OWL-DL ontology that extends SAREF and reuses six other ontologies. SAREF4WATR includes 54 classes (40 defined in SAREF4WATR and 14 reused from the SAREF, SAREF4CITY, SAREF4SYST, time, geosp, and sf), 34 object properties (8 defined in SAREF4WATR and 26 reused from SAREF, SAREF4CITY, SAREF4SYST, and geosp), 19 data type properties (12 defined in SAREF4WATR and 7 reused from SAREF and SAREF4CITY), and 65 individuals.

SAREF4WATR focuses on extending SAREF in order to create a common core of general concepts for water data oriented to the IoT field. The main idea is to identify the core components, as mentioned, that could be extended for particular water subdomains, for example, for water supply.

The prefixes and namespaces used in SAREF4WATR and in the present document are listed in Table 1.

Table 1: Prefixes and namespaces used within the SAREF4WATR ontology

Prefix	Namespace
s4watr	https://saref.etsi.org/saref4watr/
s4city	https://saref.etsi.org/saref4city/
s4syst	https://saref.etsi.org/saref4syst/
saref	https://saref.etsi.org/core/
dc	http://purl.org/dc/elements/1.1/
dcterms	http://purl.org/dc/terms/
geosp	http://www.opengis.net/ont/geosparql#
owl	http://www.w3.org/2002/07/owl#
time	http://www.w3.org/2006/time#
rdf	http://www.w3.org/1999/02/22-rdf-syntax-ns#
rdfs	http://www.w3.org/2000/01/rdf-schema#
sf	http://www.opengis.net/ont/sf#
vann	http://purl.org/vocab/vann/
xsd	http://www.w3.org/2001/XMLSchema#

4.2 SAREF4WATR

4.2.1 General Overview

An overview of the SAREF4WATR ontology is provided in Figures 1 and 2. For all the entities described in the present document, it is indicated whether they are defined in the SAREF4WATR extension or elsewhere by the prefix included before their identifier, i.e. if the element is defined in SAREF4WATR, the prefix is `s4watr`, while if the element is reused from another ontology it is indicated by a prefix according to Table 1.

Arrows are used to represent properties between classes and to represent some RDF, RDF-S and OWL constructs, more precisely:

- Plain arrows with white triangles represent the `rdfs:subClassOf` relation between two classes. The origin of the arrow is the class to be declared as subclass of the class at the destination of the arrow.
- Dashed arrows between two classes indicate a local restriction in the origin class, i.e. that the object property can be instantiated between the classes in the origin and the destination of the arrow. The identifier of the object property is indicated within the arrow.
- Dashed arrows with no identifier are used to represent the `rdf:type` relation, indicating that the element in the origin of the arrow is an instance of the class in the destination of the arrow.

Datatype properties are denoted by rectangles attached to the classes, in an UML-oriented way. Dashed boxes represent local restrictions in the class, i.e. datatype properties that can be applied to the class they are attached to.

Individuals are denoted by rectangles in which the identifier is underlined.

Note that Figures 1 and 2 aim at showing a global overview of the main classes of SAREF4WATR and their mutual relations. More details on the different parts of the figures are provided from clause 4.2.2 to clause 4.2.9.

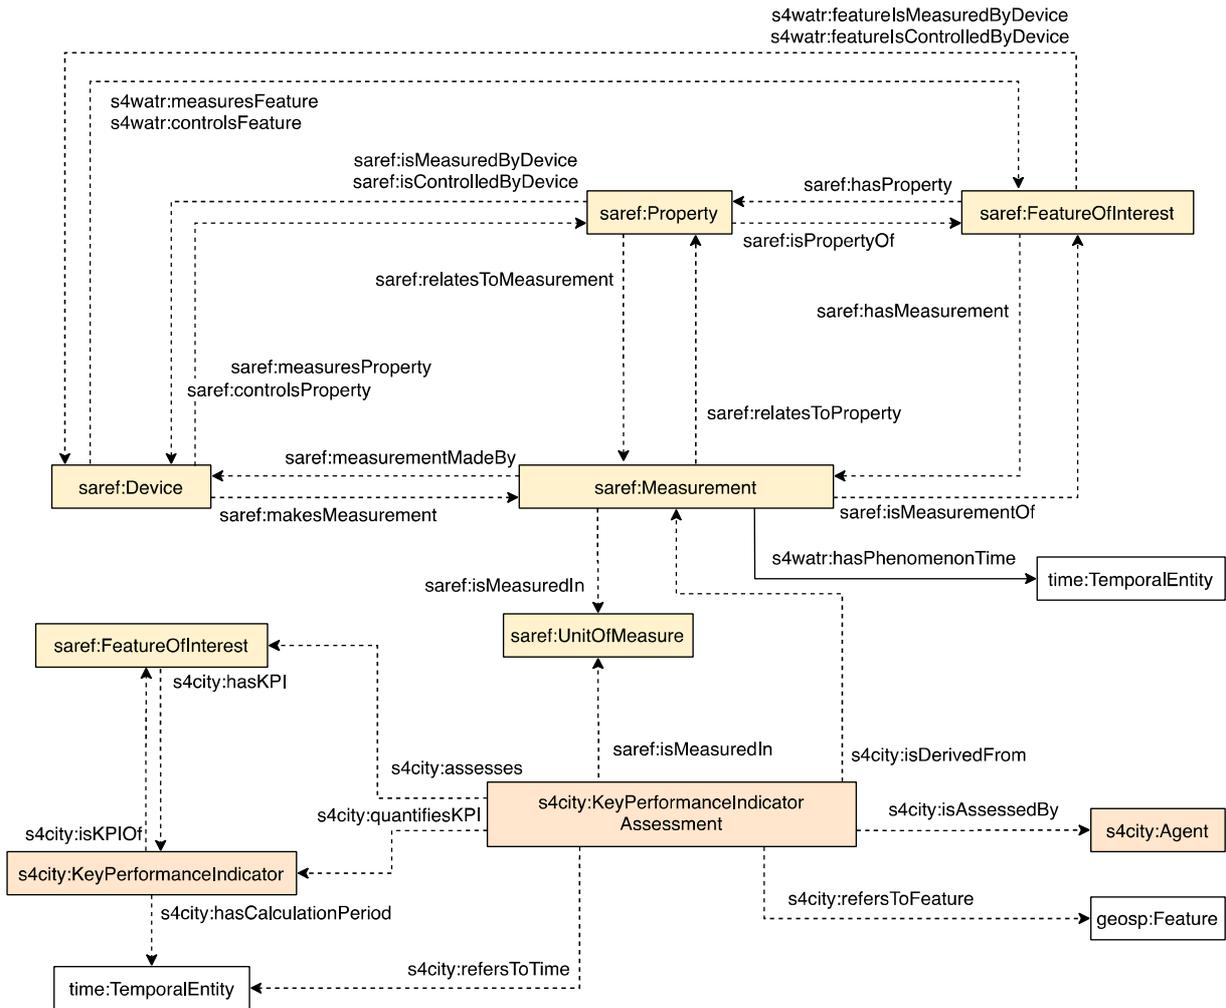


Figure 1: SAREF4WATR overview, Measurements and KPIs

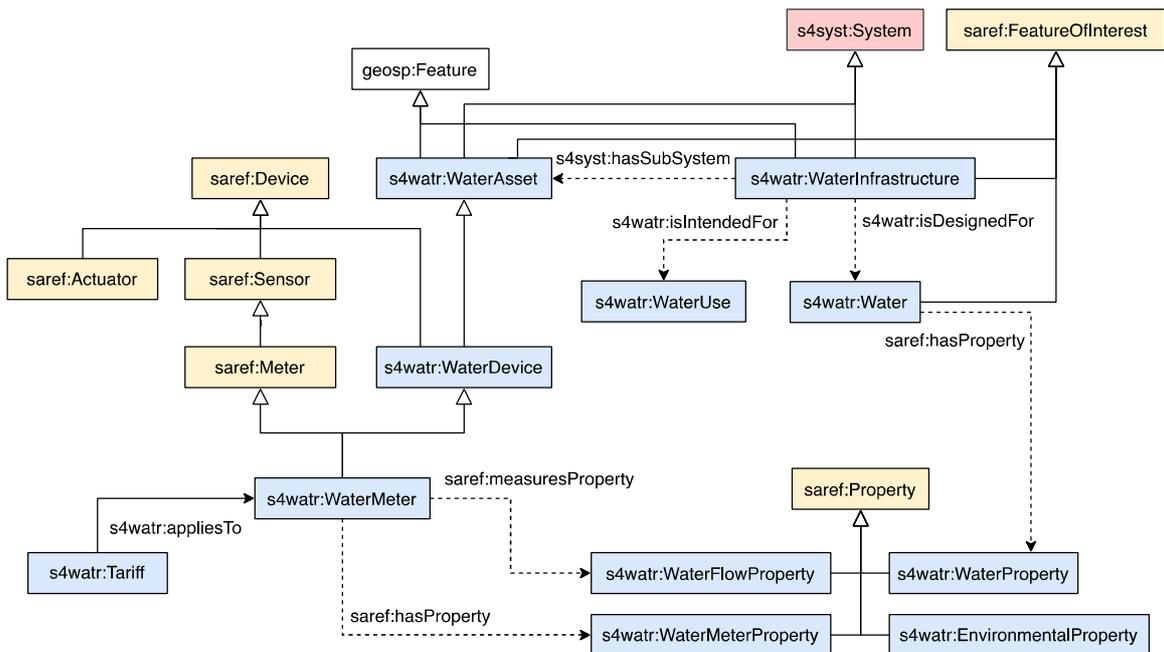


Figure 2: SAREF4WATR overview, Water-related terms

4.2.2 Measurement

As it can be observed in Figure 3, the modelling of measurements in the SAREF4WATR ontology mostly relies on the measurement model proposed in SAREF. In order to reduce duplication with SAREF documentation, the reader is referred to the SAREF specification [1] for details about measurement modelling including here details only for the new concepts.

SAREF allows to define the temporal extent of a measurement by defining the timestamp for it (using the `saref:hasTimestamp` property). However, the SAREF4WATR extension also required to be able to define the temporal interval to which a measurement applies, apart from the temporal instant defined by the timestamp. Therefore, the `s4watr:hasPhenomenonTime` property has been defined in this extension to define the time for which the measurement applies to a feature of interest. The range of this property time has been defined as a `time:TemporalEntity`, which allows defining temporal intervals or instants.

Besides, the extension requires to be able to represent those devices that measure a certain feature of interest (and those features of interest that are measured by a device) independently of having measures from which this relationship could be inferred. Because of this, in this extension four new properties have been created to relate `saref:Device` and `saref:FeatureOfInterest`: `s4watr:featureIsMeasuredByDevice`, `s4watr:featureIsControlledByDevice`, `s4watr:measuresFeature`, and `s4watr:controlsFeature`.

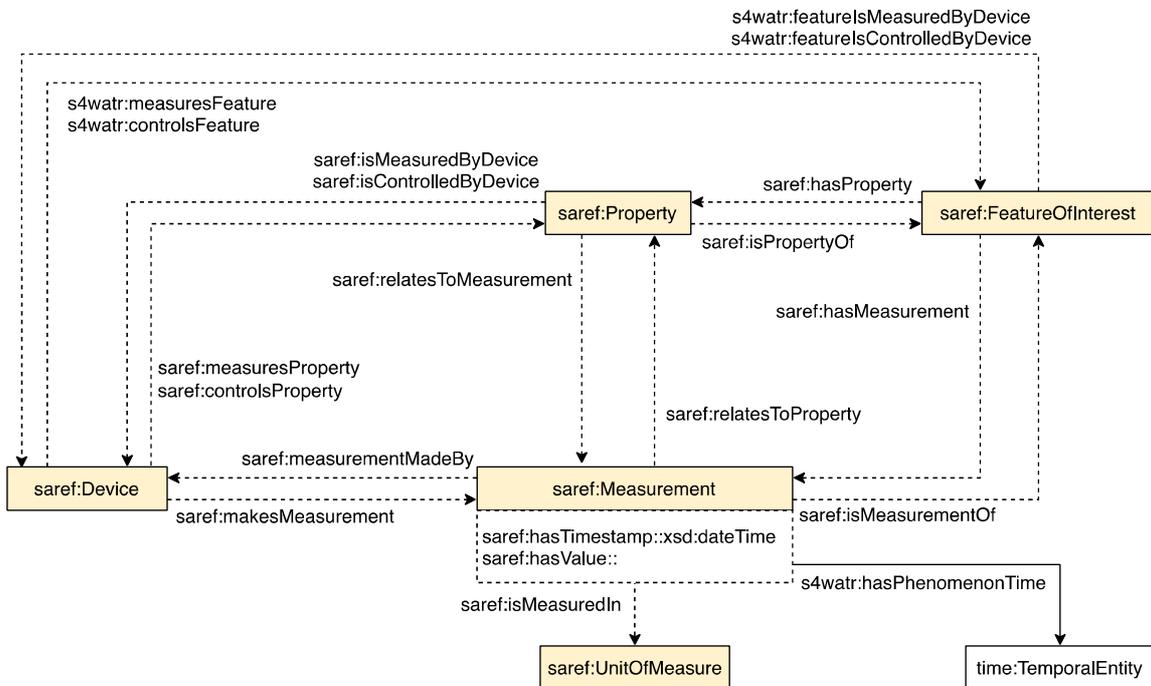


Figure 3: Measurement model

Table 2 summarizes the new property that characterizes the `saref:Measurement` class.

Table 2: New property of the `saref:Measurement` class

Property	Definition
<code>s4watr:hasPhenomenonTime</code>	The time for which the value of a measurement applies to the feature of interest.

Table 3 summarizes the new properties that characterize the `saref:Device` class.

Table 3: New properties of the `saref:Device` class

Property	Definition
<code>s4watr:featureIsMeasuredByDevice</code>	The features of interest that are measured by a device.
<code>s4watr:featureIsControlledByDevice</code>	The features of interest that are controlled by a device.

Table 4 summarizes the new properties that characterize the `saref:FeatureOfInterest` class.

Table 4: New properties of the `saref:FeatureOfInterest` class

Property	Definition
<code>s4watr:measuresFeature</code>	The devices that measure a feature of interest.
<code>s4watr:controlsFeature</code>	The devices that control a feature of interest.

4.2.3 Water meter

Figure 4 provides an overview of how to represent a water meter using the `s4watr:WaterMeter` class. The representation of water meters and their properties has been extracted from the European M-Bus standard (EN 13757-2 [i.2]).

A water meter may be defined by the properties inherited from SAREF (e.g. `saref:hasManufacturer` or `saref:hasModel`) and also by a set of properties defined in SAREF4WATR to indicate: its fabrication number (`s4watr:hasFabricationNumber`), its firmware version (`s4watr:hasFirmwareVersion`), its hardware version (`s4watr:hasHardwareVersion`), its version (`s4watr:hasVersion`), the radio frequency in which it operates (`s4watr:operatesAtRadioFrequency`), and its required power (`s4watr:requiresPower`).

Measurements may be taken from the water meter themselves. To enable the representation of such measurements, water meters are defined as features of interest (`saref:FeatureOfInterest`) and a non-exhaustive list of properties has been defined based on the M-Bus standard to allow measuring: on time (`s4watr:MeterOnTime`), operating time (`s4watr:MeterOperatingTime`), battery operating time (`s4watr:BatteryOperatingTime`), battery last change (`s4watr:BatteryLastChange`), and battery remaining time (`s4watr:BatteryRemainingTime`).

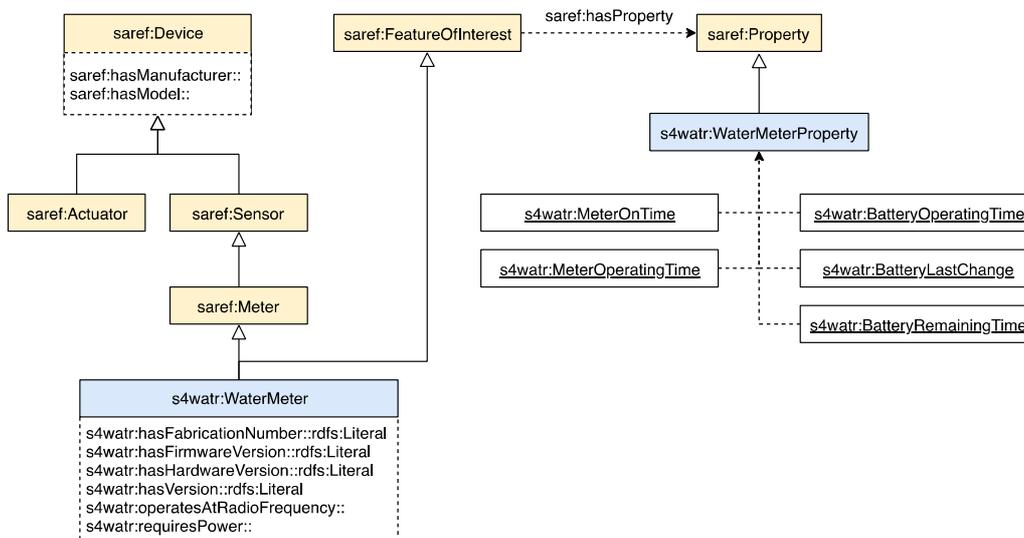


Figure 4: Water meter model

Table 5 summarizes the properties that characterize the `s4watr:WaterMeter` class.

Table 5: Properties of the `s4watr:WaterMeter` class

Property	Definition
<code>s4watr:hasFabricationNumber max 1</code>	The fabrication number of a device.
<code>s4watr:hasFirmwareVersion max 1</code>	The firmware version of a device.
<code>s4watr:hasHardwareVersion max 1</code>	The hardware version of a device.
<code>s4watr:hasVersion max 1</code>	The version of a device.
<code>s4watr:operatesAtRadioFrequency</code>	The radio frequency at which a device operates.
<code>s4watr:requiresPower</code>	The power required by a device.
<code>saref:hasProperty only s4watr:WaterMeterProperty</code>	The relation between a water meter and its properties.

4.2.4 Water flow

Water meters are mainly intended to measure water flows. SAREF4WATR defines the main properties related to the water flow that are defined in the European M-Bus standard (EN 13757-2 [i.2]): pressure (`s4watr:FlowPressure`), rate (`s4watr:FlowRate`), temperature (`s4watr:FlowTemperature`), and volume (`s4watr:FlowVolume`). These properties are depicted in Figure 5.

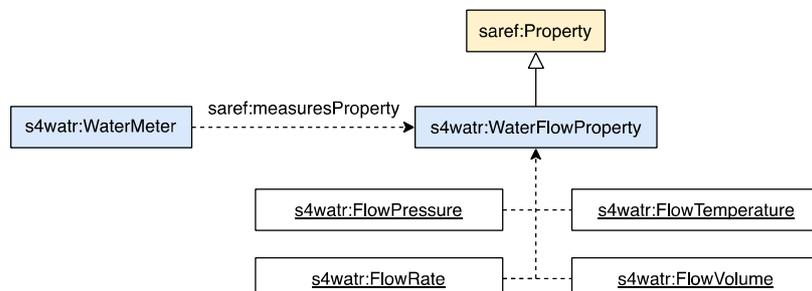


Figure 5: Water flow model

Table 6 summarizes another property that characterizes the `s4watr:WaterMeter` class.

Table 6: Property of the `s4watr:WaterMeter` class

Property	Definition
<code>saref:measuresProperty</code> <code>s4watr:WaterFlowProperty</code>	The relation between a water meter and the water flow properties it measures.

There are also other environmental factors that are relevant since they affect water and the infrastructures using it. Therefore, the following environmental properties, depicted in Figure 6, are defined: atmospheric pressure (`s4watr:AtmosphericPressure`), humidity (`s4watr:Humidity`), precipitation (`s4watr:Precipitation`) and temperature (`s4watr:ExternalTemperature`).

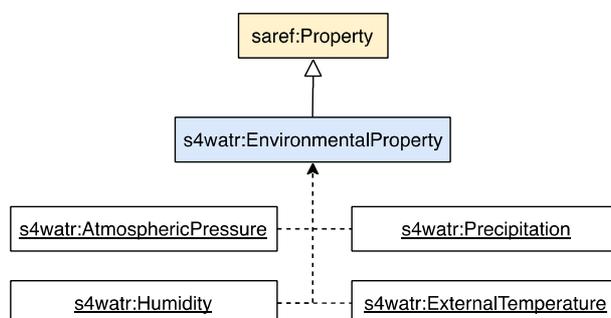


Figure 6: Environmental properties model

4.2.5 Tariff

SAREF4WATR allows describing the tariff that is applied to a water meter by means of the `s4watr:Tariff` class, as presented in Figure 7. The representation of tariffs has been extracted from the TR 17167 [i.3].

A tariff may be described using different properties to describe its: start timestamp (`s4watr:hasStartTimestamp`), duration (`s4watr:hasDuration`), period (`s4watr:hasPeriod`), billing date (`s4watr:hasBillingDate`), and billing period (`s4watr:hasBillingPeriod`). Besides, a tariff can be related to a water meter by means of the `s4watr:appliesTo` property.

There are different types of tariffs, depending on whether they are based on thresholds (`s4watr:ThresholdBasedTariff`), consumption (`s4watr:ConsumptionBasedTariff`), or time (`s4watr:TimeBasedTariff`). Each of these types of tariffs has its own properties: for threshold-based ones their volume flow can be defined (`s4watr:forVolumeFlow`), for consumption-based ones their volume and financial consumption can be defined (`s4watr:forVolumeConsumption` and `s4watr:forFinancialConsumption`, respectively), and for time-based ones their absolute time at day, week day and day in month can be defined (`s4watr:forAbsoluteTimeAtDay`, `s4watr:forWeekDay` and `s4watr:forDayInMonth`, respectively). It is also possible to define a combined tariff by making it an instance of more than one type of tariff.

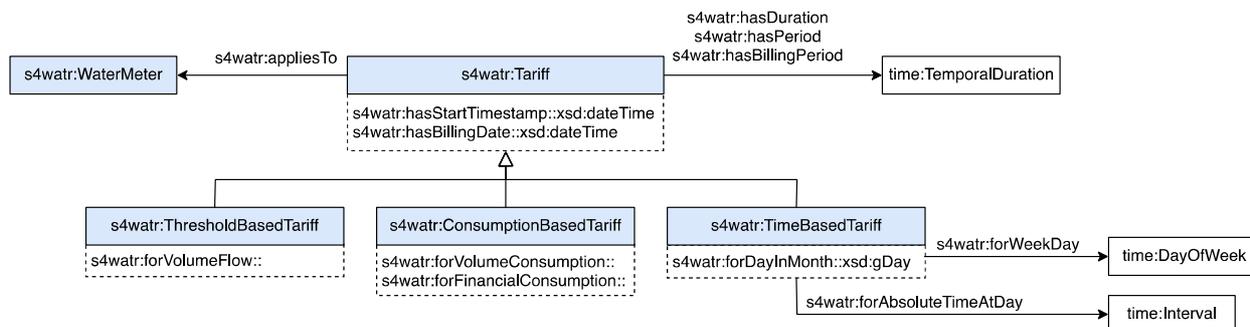


Figure 7: Tariff model

Table 7 summarizes the properties that characterize the `s4watr:Tariff` class.

Table 7: Properties of the `s4watr:Tariff` class

Property	Definition
<code>s4watr:appliesTo</code>	The water meter to which a tariff applies to.
<code>s4watr:hasStartTimestamp</code>	The start date and time of a tariff.
<code>s4watr:hasDuration</code>	The duration of a tariff.
<code>s4watr:hasPeriod</code>	The period of a tariff.
<code>s4watr:hasBillingDate</code>	The billing date of a tariff.
<code>s4watr:hasBillingPeriod</code>	The billing period of a tariff.

Table 8 summarizes the properties that characterize the `s4watr:ThresholdBasedTariff` class.

Table 8: Properties of the `s4watr:ThresholdBasedTariff` class

Property	Definition
<code>s4watr:forVolumeFlow</code>	The volume flow related to a tariff.

Table 9 summarizes the properties that characterize the `s4watr:ConsumptionBasedTariff` class.

Table 9: Properties of the `s4watr:ConsumptionBasedTariff` class

Property	Definition
<code>s4watr:forVolumeConsumption</code>	The volume consumption related to a tariff (e.g. after consumption of 900 litres).
<code>s4watr:forFinancialConsumption</code>	The financial consumption related to a tariff (e.g. prepaid tariffs).

Table 10 summarizes the properties that characterize the `s4watr:TimeBasedTariff` class.

Table 10: Properties of the `s4watr:TimeBasedTariff` class

Property	Definition
<code>s4watr:forAbsoluteTimeAtDay</code>	The time interval in each day for which a tariff is applied (e.g. 8:00 to 10:00).
<code>s4watr:forWeekDay</code>	The day of the week for which a tariff is applied (e.g. each Saturday and Sunday).
<code>s4watr:forDayInMonth</code>	The day of the month for which a tariff is applied (e.g. each 15).

4.2.6 Water types

SAREF4WATR defines four types of water as instances of the `s4watr:Water` class: raw water (`s4watr:RawWater`), drinking water (`s4watr:DrinkingWater`), storm water (`s4watr:StormWater`), and waste water (`s4watr:WasteWater`). All these types of water, depicted in Figure 8, are defined as features of interest (`saref:FeatureOfInterest`), so measurements and key performance indicators can be defined over them.

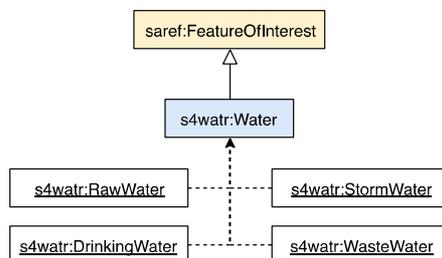


Figure 8: Water types model

4.2.7 Water properties

SAREF4WATR includes a classification of the different water properties based on the classification proposed by the World Health Organization [i.4], as shown in Figure 9. Water properties (`s4watr:WaterProperty`) are classified into acceptability (`s4watr:AcceptabilityProperty`), chemical (`s4watr:ChemicalProperty`), and microbial (`s4watr:MicrobialProperty`) ones, being bacterial (`s4watr:BacterialProperty`) properties a subclass of microbial ones.

The extension defines different individuals for each type of water property, based in different EC directives on the quality of drinking water [i.5], bathing water [i.6], and groundwater [i.7]. This list of individuals does not aim to be exhaustive but to reflect the potential use of the ontology. Note, for example, that it is out of the scope to categorize chemical compounds according to their intended use (e.g. pesticide, fertilizer, etc.).

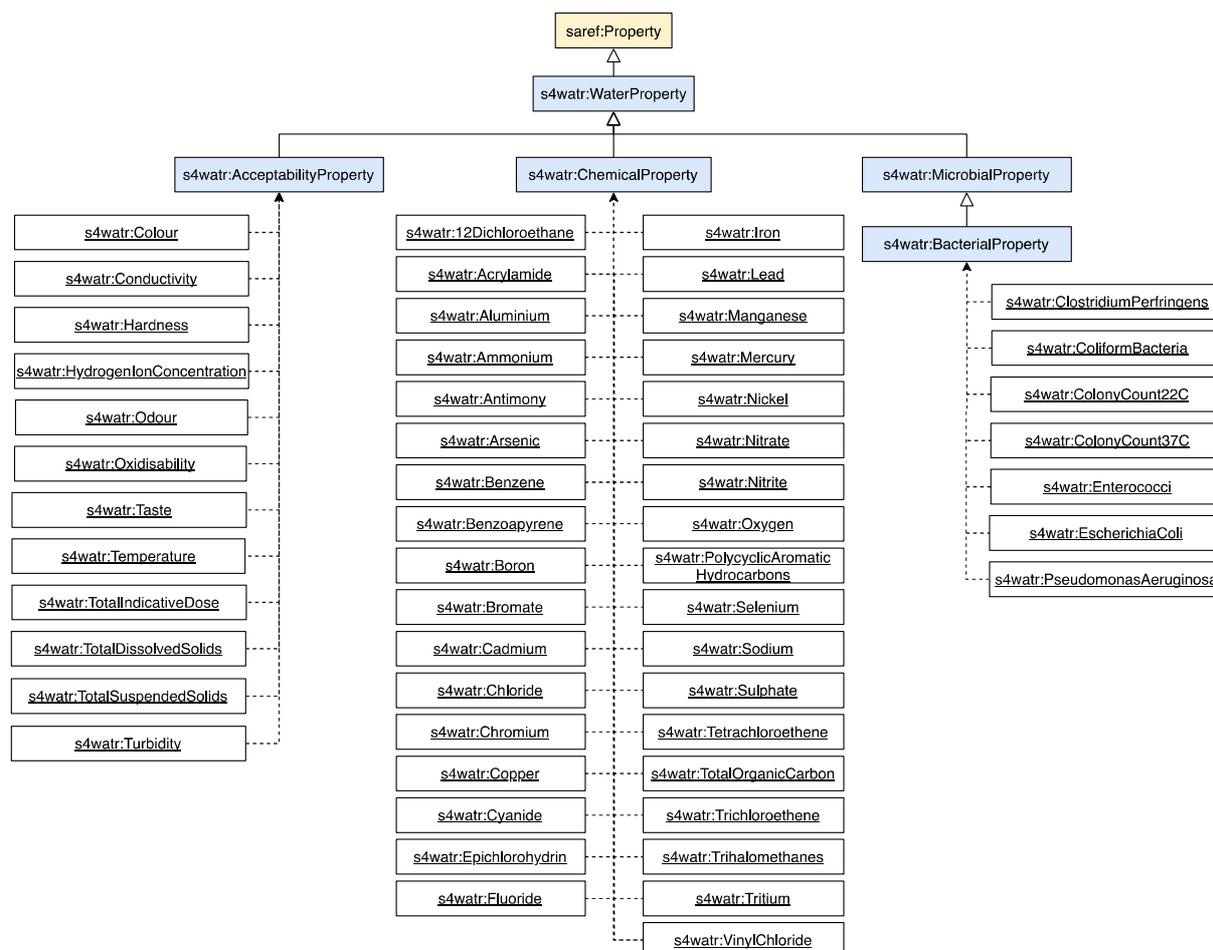


Figure 9: Water properties model

4.2.8 Water infrastructure

In SAREF4WATR water infrastructures can be defined using the `s4watr:WaterInfrastructure` class. Such infrastructures may be designed for one of the water types described in clause 4.2.6 (through the `s4watr:isDesignedFor` property), may have an intended use (through the `s4watr:isIntendedFor` property), and may be classified into five different types, although others may be defined if needed: distribution systems (`s4watr:DistributionSystem`), storage infrastructures (`s4watr:StorageInfrastructure`), treatment plants (`s4watr:TreatmentPlant`), hydroelectric power plants (`s4watr:HydroelectricPowerPlant`), and monitoring infrastructures (`s4watr:MonitoringInfrastructure`).

In order to represent the topology of a water infrastructure or its assets, the GeoSPARQL ontology has been reused and connected to the SARE4WATR terms. As shown in Figure 10, for representing spatial objects the `geosp:SpatialObject` class from GeoSPARQL has been reused along with its subclasses that allow defining spatial features (`geosp:Feature`) and geometries (`geosp:Geometry`). Different properties from GeoSPARQL can be reused to define spatial relations among spatial objects (e.g. `geosp:sfContains`, or `geosp:sfWithin`) or to define the geometry of a feature (`geosp:hasGeometry`). Two types of geometries from the GeoSPARQL Simple Features ontology are proposed to be used: points (`sf:Point`) and polygons (`sf:Polygon`), although others may also be used from that same ontology or from another one.

GeoSPARQL standard [i.8] reference is provided for further details on how to define the topology of water infrastructures.

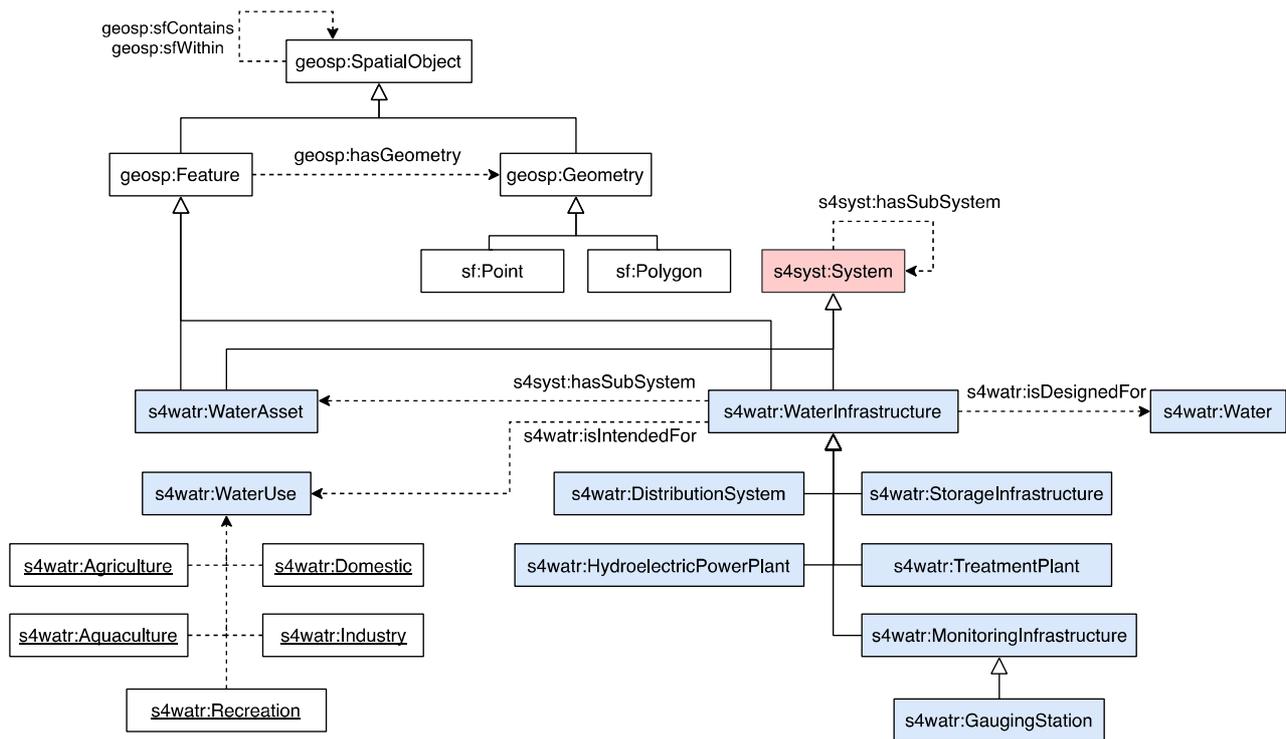


Figure 10: Water infrastructure model

By reusing the SAREF4SYST ontology, the different subsystems of a water infrastructure may be defined. A water infrastructure is a complex system (`s4syst:System`) and each of its subsystems may be defined (using the `s4syst:hasSubSystem` property) as a water asset (`s4watr:WaterAsset`).

As shown in Figure 11, SAREF4WATR defines the main types of water assets found in the literature in a hierarchy that is not intended to be exhaustive and that may be extended if needed. This hierarchy classifies water assets into source assets (`s4watr:SourceAsset`), sink assets (`s4watr:SinkAsset`), storage assets (`s4watr:StorageAsset`), and transport assets (`s4watr:TransportAsset`).

A dedicated class has been defined for water devices (`s4watr:WaterDevice`), which are those water assets that are also devices according to SAREF (`saref:Device`). A water meter, described in clause 4.2.3, is one special type of water device, among other possible water-related sensors and actuators.

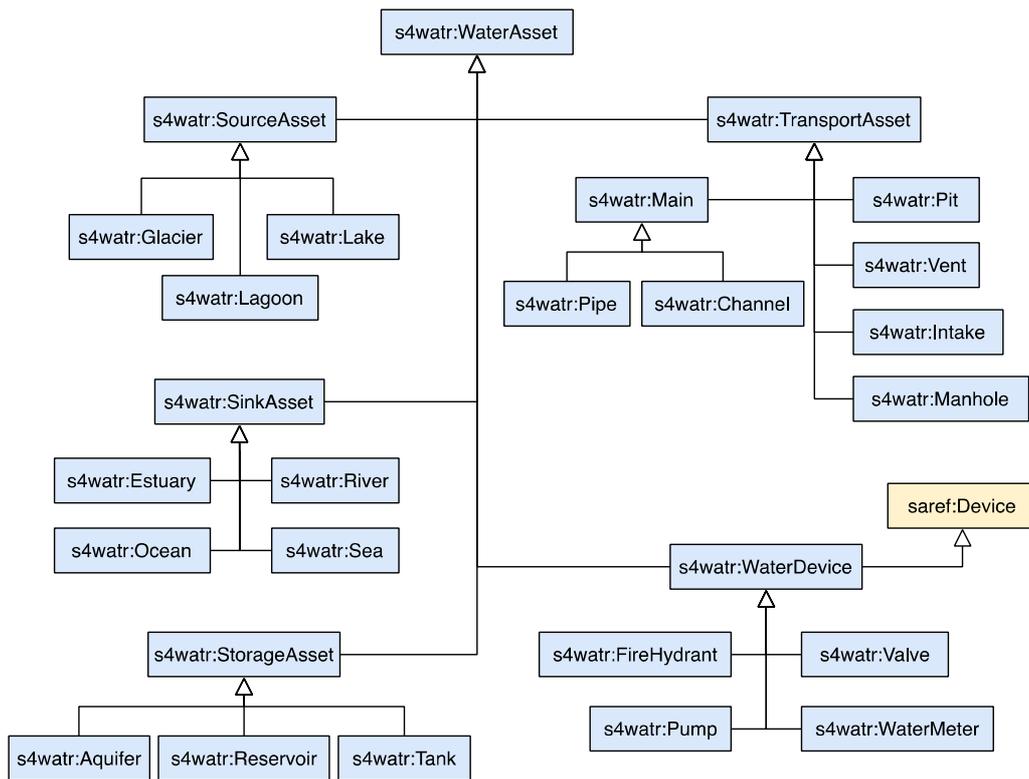


Figure 11. Water asset model

Table 11 summarizes the properties that characterize the `s4watr:WaterInfrastructure` class.

Table 11: Properties of the `s4watr:WaterInfrastructure` class

Property	Definition
<code>s4watr:intendedFor</code> some <code>s4watr:Water</code>	The relation between a water infrastructure and the type of water it is intended for.
<code>s4sys:hasSubSystem</code>	The relation between a water infrastructure and the water assets it is composed of.

4.2.9 Key Performance Indicator

Figure 12 provides an overview of the modelling of Key Performance Indicators (KPI). The KPI modelling involves two main concepts, namely `s4city:KeyPerformanceIndicator` and `s4city:KeyPerformanceIndicatorAssessment`. As can be seen in the figure, the modelling of KPIs in SAREF4WATR totally relies on the KPI model proposed in SAREF4CITY [2]. In order to reduce duplication with the SAREF4CITY documentation, the reader is referred to the SAREF4CITY specification for details about KPI modelling.

In SAREF4WATR, KPIs are intended to be defined for water infrastructures (`s4watr:WaterInfrastructure`). However, KPIs may also be defined for other features of interest.

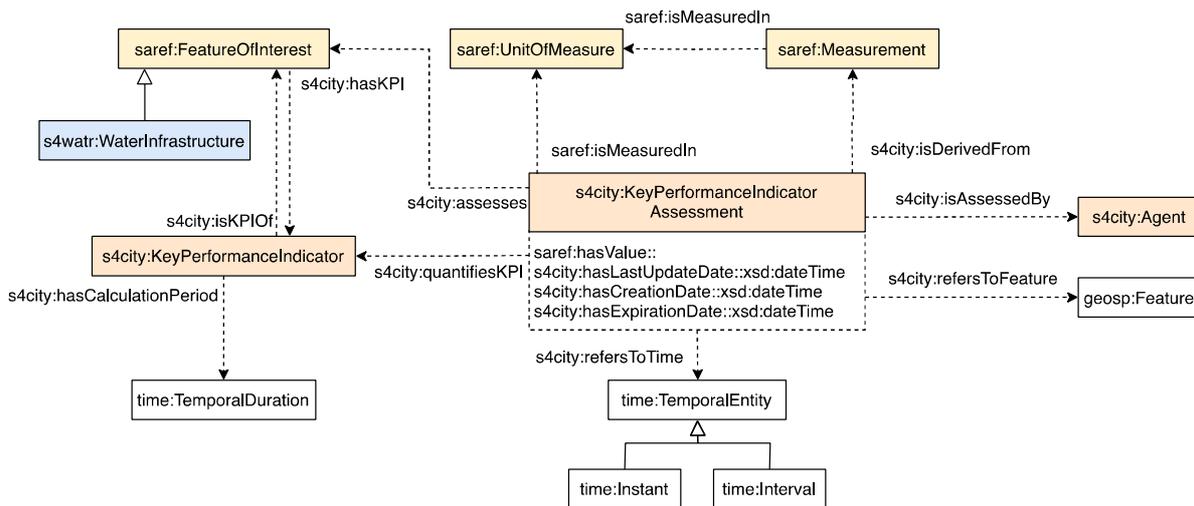


Figure 12: Key Performance Indicator model

4.3 Instantiating SAREF4WATR

This clause shows different examples of how to instantiate the SAREF4WATR extension of SAREF.

The example presented in Figure 13 depicts a water meter (ex: Meter4837QW123). It can be described by a set of static properties either reused from SAREF (e.g. saref:hasModel) or from SAREF4WATR (e.g. s4watr:hasFirmwareVersion). The spatial extent of the meter is described by its geometry (ex: MeterGeom) that is represented as a point in space following its WKT representation. SAREF4WATR defines different measurable properties of a water meter, among them the battery remaining time (s4watr:BatteryRemainingTime) that is the one used in the example. Measurements of the meter for this property can be represented (ex: WMMeasurement200206) using for example the time instant of the measurement, its value and the unit of measure.

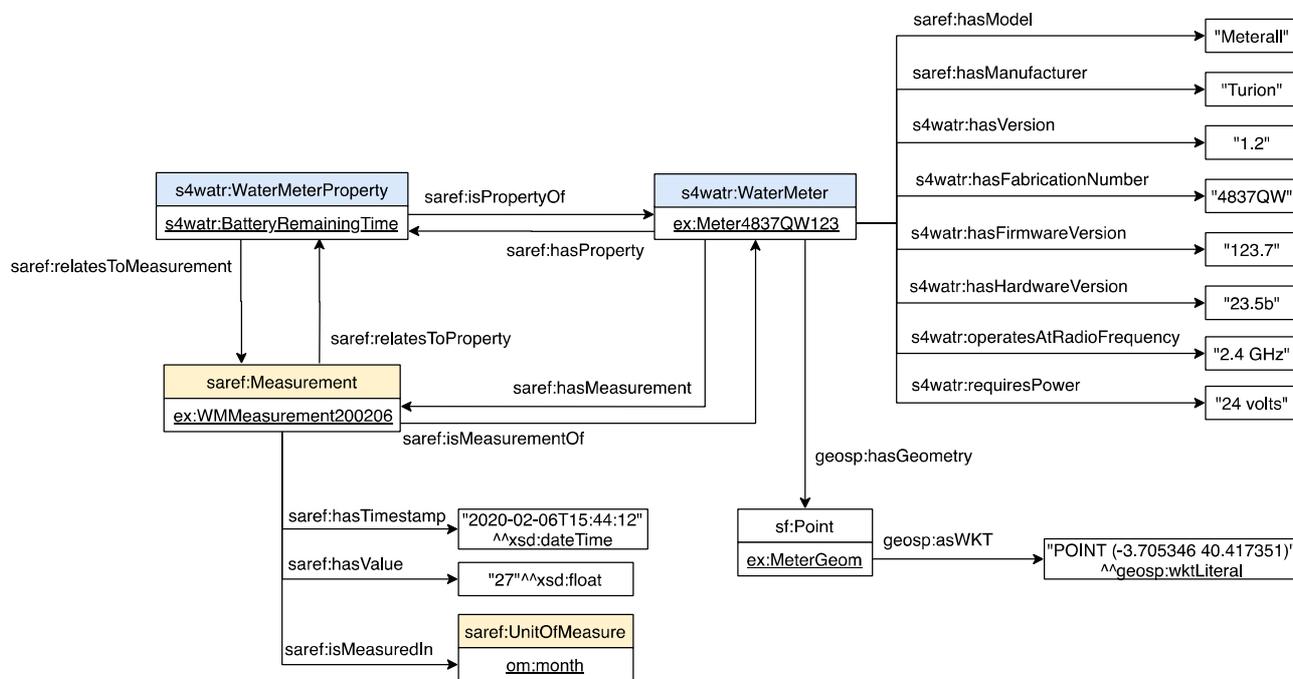


Figure 13: Example of water meter

The main function of water meters is to measure water flow. Figure 14 presents two examples of water flow measurements (ex:WFMeasurement170206 and ex:WFMeasurement643234) for a water flow property (s4watr:FlowVolume) and an environmental one (s4watr:ExternalTemperature), respectively. Notice how the flow volume measurement is described with a time instant while the external temperature one is described with a time interval (ex:PT838452).

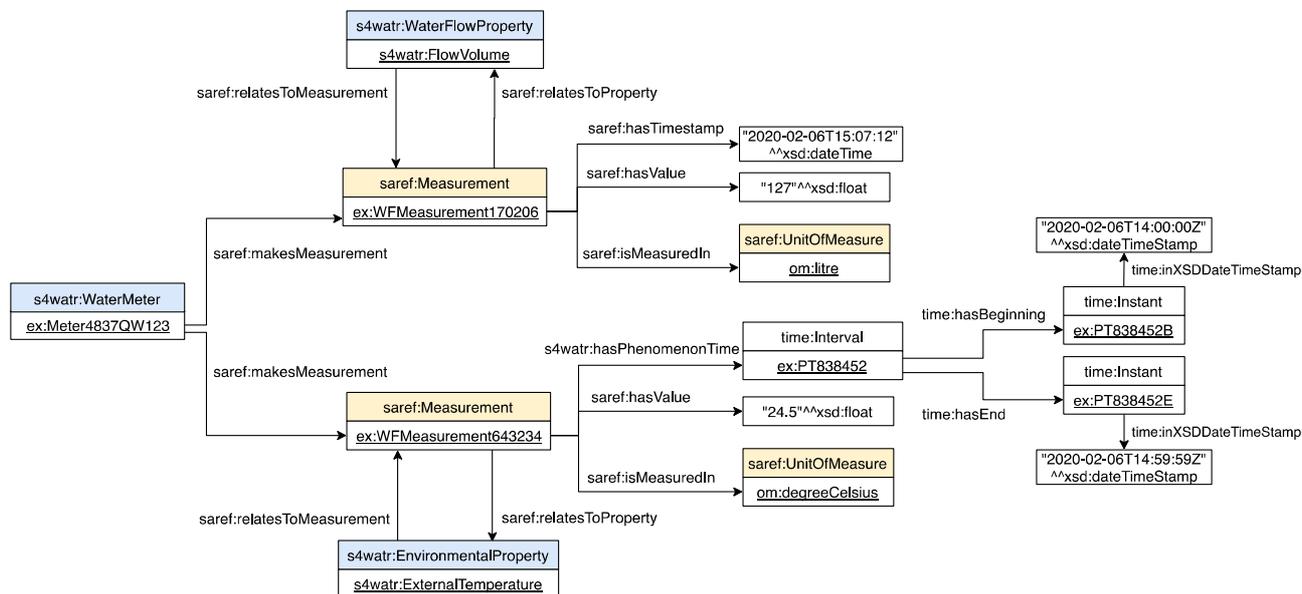


Figure 14: Example of water meter measurements

Different tariffs can be applied to water meters. Figure 15 presents an example of a consumption-based tariff (ex:Meter4837QW123Tariff) for a water meter (ex:Meter4837QW123). Different individuals are defined for describing the duration (ex:FiveYears), period (ex:OneYear) and billing period (ex:OneMonth) of the tariff. SAREF4WATR does not restrict how to define particular conditions of a tariff; in the example, for the consumption description a string literal is used.

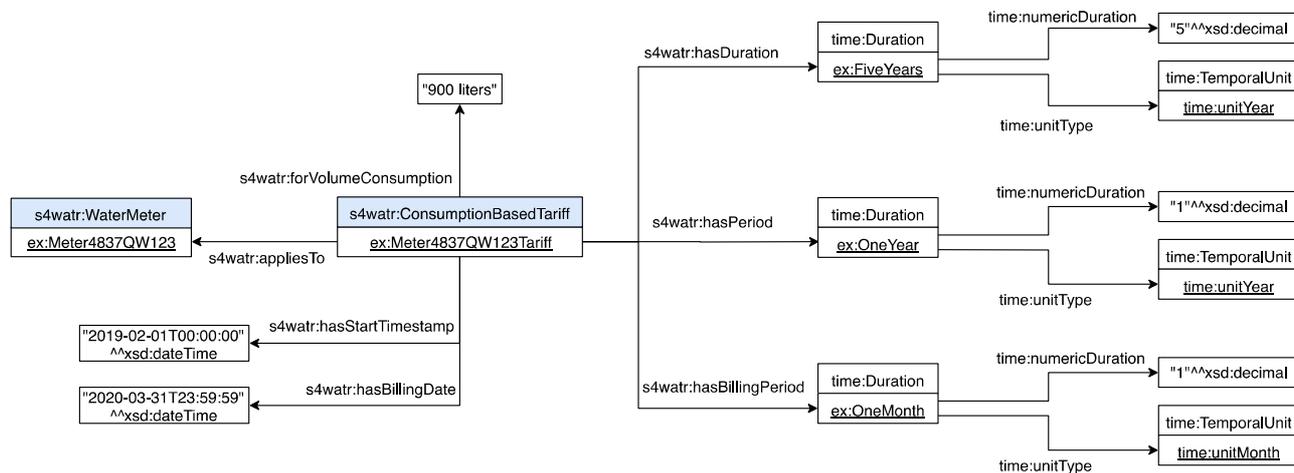


Figure 15: Example of tariff

The measurement of the different properties of the water itself is also of interest. Figure 16 presents two measurements (ex:DTSMeasurement106 and ex:DTSMeasurement107) of one chemical property (s4watr:Cadmium) and of one bacterial property (s4watr:EscherichiaColi), along with their timestamps, values and units. Even if SAREF4WATR includes a set of predefined water properties, other properties could be defined by instantiating the corresponding s4watr:WaterProperty subclass.

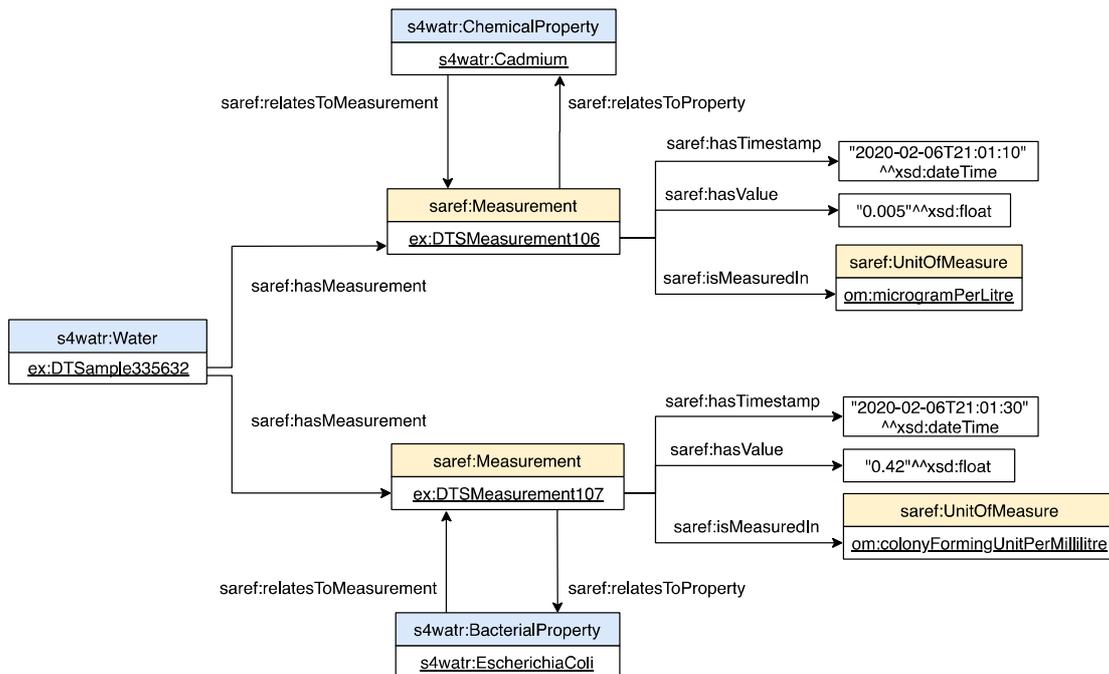


Figure 16: Example of water measurements

Figure 17 depicts a water infrastructure (`ex:DowntownDS`) that represents a distribution system for drinking water (`s4watr:DrinkingWater`) intended for domestic use (`s4watr:Domestic`). The spatial extent of the infrastructure is described by its geometry (`ex:DSGeom`) that is represented as a polygon in space following its WKT representation. The water distribution system has different subsystems: a water meter (`ex:Meter4837QW123`), a tank (`ex:Tank38472`) and a pump (`ex:PumpRT73467`). These subsystems can be represented through their geometries, as points in the example (`ex:MeterGeom`, `ex:TankGeom`, `ex:PumpGeom`), and different measures could be made of them such as the one depicted (`ex:PMeasurement854306`) that measures the flow rate (`s4watr:FlowRate`) of the pump.

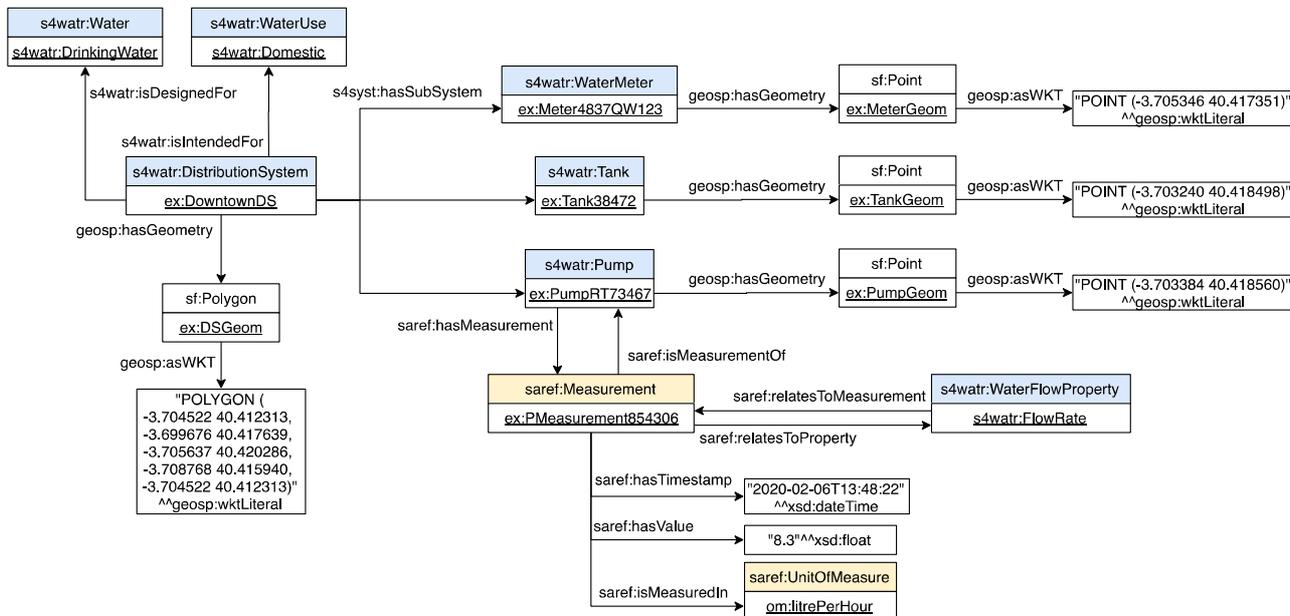


Figure 17: Example of water infrastructure and water assets

Figure 18 contains an example of a key performance indicator (`ex:MinimumPressureLevel`) defined for a water distribution system (`ex:DowntownDS`). The key performance indicator is defined with its name and calculation period (`ex:OneWeek`). Besides, an assessment is made for the KPI (`ex:MPL2020020723`), derived from existing measurements (`ex:PLMeasurement56206`, `ex:PLMeasurement56207` and `ex:PLMeasurement56208`), indicating the value of the assessment and its temporal properties.

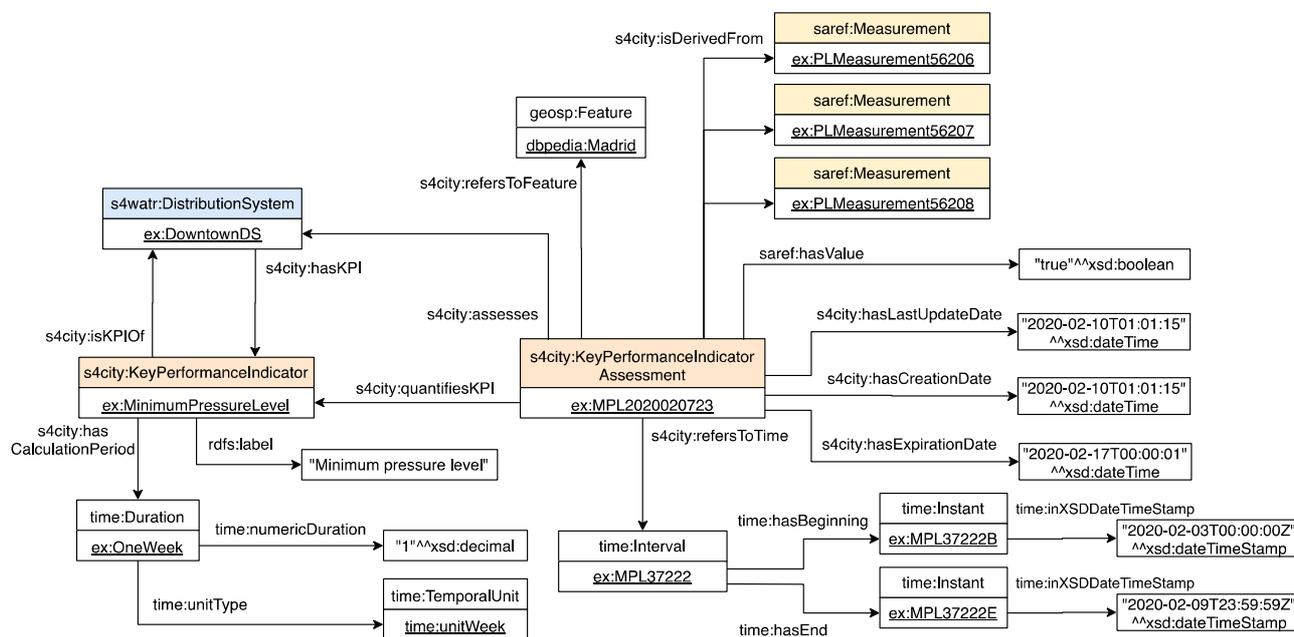


Figure 18: Example of key performance indicator

4.4 Observations

In the following paragraphs, several observations about the SAREF4WATER ontology and its usage are mentioned.

The hierarchies and individuals defined in the extension should not be considered exhaustive, the ontology currently represents those devices described in different relevant standards and directives. It might be needed to extend the hierarchies and lists of individuals for particular use cases, as well as to specialize some of the defined classes.

The SAREF ontology has been used for the representation of measurements. However, the measurement model had to be extended to include measurements that are related not to a time instant but to a time interval. This has been done by adding the `s4watr:hasPhenomenonTime` property, which could be moved to SAREF if required by other extensions.

Apart from this, some of the properties defined for a water meter that were extracted from the M-Bus standard are quite generic (e.g. `s4watr:hasVersion` or `s4watr:hasFirmwareVersion`) and could be applicable to other domains (at least those covered by the standard: energy and gas). Therefore, they could also be moved to SAREF.

The SAREF4WATER extension requires to be able to represent those devices that measure a certain feature of interest (and those features of interest that are measured by a device) independently of having measures from which this relationship could be inferred. Because of this, in this extension, four new properties have been created to relate `saref:Device` and `saref:FeatureOfInterest`: `s4watr:featureIsMeasuredByDevice`, `s4watr:featureIsControlledByDevice`, `s4watr:measuresFeature`, and `s4watr:controlsFeature`. These new properties, since they are generic and could be used in other extensions, might be included in a future version of the SAREF ontology.

History

Document history		
V1.1.1	July 2020	Publication