

ETSI TS 129 486 V16.1.0 (2020-08)



**LTE;
5G;
Vehicle-to-Everything (V2X) Application Enabler (VAE) service;
Stage 3
(3GPP TS 29.486 version 16.1.0 Release 16)**



Reference

DTS/TSGC-0329486vg10

Keywords

5G,LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	9
1 Scope	10
2 References	10
3 Definitions of terms, symbols and abbreviations	11
3.1 Terms.....	11
3.2 Symbols.....	11
3.3 Abbreviations	11
4 Overview	11
5 Services offered by the V2X Application Enabler.....	12
5.1 Introduction	12
5.2 VAE_MessageDelivery Service	12
5.2.1 Service Description.....	12
5.2.2 Service Operations	13
5.2.2.1 Introduction.....	13
5.2.2.2 V2X_MessageDelivery_Subscribe	13
5.2.2.2.1 General	13
5.2.2.2.2 Message Delivery Subscribe	13
5.2.2.3 V2X_MessageDelivery_Unsubscribe	14
5.2.2.3.1 General	14
5.2.2.3.2 Message Delivery Unsubscribe	14
5.2.2.4 Deliver_DL_Message	14
5.2.2.4.1 General	14
5.2.2.4.2 Deliver Downlink Message	14
5.2.2.5 Deliver_UL_Message	15
5.2.2.5.1 General	15
5.2.2.5.2 Deliver Uplink Message	15
5.3 VAE_FileDistribution Service	16
5.3.1 Service Description.....	16
5.3.2 Service Operations	16
5.3.2.1 Introduction.....	16
5.3.2.2 Distribute File	16
5.3.2.2.1 General	16
5.3.2.2.2 Distribute File.....	16
5.4 VAE_ApplicationRequirement Service	17
5.4.1 Service Description.....	17
5.4.2 Service Operations	17
5.4.2.1 Introduction.....	17
5.4.2.2 Reserve_NetworkResource	18
5.4.2.2.1 General	18
5.4.2.2.2 Reserve Network Resource	18
5.4.2.3 Notify_NetworkResource	19
5.4.2.3.1 General	19
5.4.2.3.2 Notify Network Resource	19
5.5 VAE_DynamicGroup Service.....	19
5.5.1 Service Description.....	19
5.5.2 Service Operations	19
5.5.2.1 Introduction.....	19
5.5.2.2 Configure_DynamicGroup.....	20
5.5.2.2.1 General	20
5.5.2.2.2 Configure Dynamic Group	20

5.5.2.3	Notify_DynamicGroup	21
5.5.2.3.1	General	21
5.5.2.3.2	Notify Dynamic Group	21
5.6	VAE_ServiceContinuity Service	21
5.6.1	Service Description	21
5.6.2	Service Operations	21
5.6.2.1	Introduction	21
5.6.2.2	Query_ServiceContinuity	21
5.6.2.2.1	General	21
5.6.2.2.2	Query service continuity	22
6	API Definitions	22
6.1	VAE_MessageDelivery Service API	22
6.1.1	Introduction	22
6.1.2	Usage of HTTP	22
6.1.2.1	General	22
6.1.2.2	HTTP standard headers	23
6.1.2.2.1	General	23
6.1.2.2.2	Content type	23
6.1.2.3	HTTP custom headers	23
6.1.2.3.1	General	23
6.1.3	Resources	23
6.1.3.1	Overview	23
6.1.3.2	Resource: Message Delivery Subscriptions	24
6.1.3.2.1	Description	24
6.1.3.2.2	Resource Definition	24
6.1.3.2.3	Resource Standard Methods	24
6.1.3.2.3.1	POST	24
6.1.3.2.4	Resource Custom Operations	25
6.1.3.3	Resource: Individual Message Delivery Subscription	25
6.1.3.3.1	Description	25
6.1.3.3.2	Resource definition	25
6.1.3.3.3	Resource Standard Methods	25
6.1.3.3.3.1	GET	25
6.1.3.3.3.2	DELETE	26
6.1.3.3.4	Resource Custom Operations	26
6.1.3.4	Resource: Downlink Message Deliveries	26
6.1.3.4.1	Description	26
6.1.3.4.2	Resource Definition	26
6.1.3.4.3	Resource Standard Methods	27
6.1.3.4.3.1	POST	27
6.1.3.4.4	Resource Custom Operations	27
6.1.3.5	Resource: Individual Downlink Message Delivery	28
6.1.3.5.1	Description	28
6.1.3.5.2	Resource definition	28
6.1.3.5.3	Resource Standard Methods	28
6.1.3.5.3.1	GET	28
6.1.3.5.3.2	DELETE	28
6.1.3.5.4	Resource Custom Operations	29
6.1.4	Custom Operations without associated resources	29
6.1.5	Notifications	29
6.1.5.1	General	29
6.1.5.2	Notification Delivery using a separate HTTP connection	29
6.1.5.3	Notification Test Event	29
6.1.5.4	Notification Delivery using Websocket	30
6.1.5.5	Methods	30
6.1.5.6	Uplink Message Delivery	30
6.1.5.6.1	Description	30
6.1.5.6.2	Operation Definition	30
6.1.6	Data Model	30
6.1.6.1	General	30
6.1.6.2	Structured data types	31

6.1.6.2.1	Introduction	31
6.1.6.2.2	Type: DownlinkMessageDeliveryData	32
6.1.6.2.3	Type: MessageDeliverySubscriptionData	32
6.1.6.2.4	Type: UplinkMessageDeliveryData	33
6.1.6.3	Simple data types and enumerations	33
6.1.6.3.1	Introduction	33
6.1.6.3.2	Simple data types.....	33
6.1.7	Error Handling	33
6.1.7.1	General	33
6.1.7.2	Protocol Errors	33
6.1.7.3	Application Errors	33
6.1.8	Feature negotiation	34
6.2	VAE_FileDistribution Service API	34
6.2.1	Introduction.....	34
6.2.2	Usage of HTTP	34
6.2.2.1	General	34
6.2.2.2	HTTP standard headers	35
6.2.2.2.1	General	35
6.2.2.2.2	Content type	35
6.2.2.3	HTTP custom headers	35
6.2.2.3.1	General	35
6.2.3	Resources	35
6.2.3.1	Overview	35
6.2.3.2	Resource: File Distributions.....	36
6.2.3.2.1	Description	36
6.2.3.2.2	Resource Definition.....	36
6.2.3.2.3	Resource Standard Methods	36
6.2.3.2.3.1	POST.....	36
6.2.3.2.4	Resource Custom Operations	36
6.2.3.3	Resource: Individual File Distribution	37
6.2.3.3.1	Description	37
6.2.3.3.2	Resource definition.....	37
6.2.3.3.3	Resource Standard Methods	37
6.2.3.3.3.1	GET.....	37
6.2.3.3.3.2	DELETE	37
6.2.3.4	Resource Custom Operations	38
6.2.4	Custom Operations without associated resources	38
6.2.5	Notifications	38
6.2.6	Data Model	38
6.2.6.1	General	38
6.2.6.2	Structured data types	39
6.2.6.2.1	Introduction	39
6.2.6.2.2	Type: FileDistributionData.....	39
6.2.6.2.3	Type: FileList	39
6.2.6.3	Simple data types and enumerations	40
6.2.6.3.1	Introduction	40
6.2.6.3.2	Simple data types.....	40
6.2.6.3.3	Enumeration: FileStatus	40
6.2.7	Error Handling	40
6.2.7.1	General	40
6.2.7.2	Protocol Errors	40
6.2.7.3	Application Errors	40
6.2.8	Feature negotiation	40
6.3	VAE_ApplicationRequirement API	41
6.3.1	Introduction.....	41
6.3.2	Usage of HTTP	41
6.3.2.1	General	41
6.3.2.2	HTTP standard headers	41
6.3.2.2.1	General	41
6.3.2.2.2	Content type	41
6.3.2.3	HTTP custom headers	41
6.3.2.3.1	General	41

6.3.3	Resources	42
6.3.3.1	Overview	42
6.3.3.2	Resource: Application Requirements	42
6.3.3.2.1	Description	42
6.3.3.2.2	Resource Definition	42
6.3.3.2.3	Resource Standard Methods	43
6.3.3.2.3.1	POST	43
6.3.3.2.4	Resource Custom Operations	43
6.3.3.3	Resource: Individual Application Requirement	43
6.3.3.3.1	Description	43
6.3.3.3.2	Resource definition	43
6.3.3.3.3	Resource Standard Methods	44
6.3.3.3.3.1	GET	44
6.3.3.3.3.2	DELETE	44
6.3.3.4	Resource Custom Operations	45
6.3.4	Custom Operations without associated resources	45
6.3.5	Notifications	45
6.3.5.1	General	45
6.3.5.2	Notification Delivery using a separate HTTP connection	45
6.3.5.3	Notification Test Event	45
6.3.5.4	Notification Delivery using Websocket	45
6.3.5.5	Methods	46
6.3.5.6	Notify Network Resource	46
6.3.5.6.1	Description	46
6.3.5.6.2	Operation Definition	46
6.3.6	Data Model	46
6.3.6.1	General	46
6.3.6.2	Structured data types	47
6.3.6.2.1	Introduction	47
6.3.6.2.2	Type: ApplicationRequirementData	48
6.3.6.2.3	Type: ApplicationRequirement	48
6.3.6.2.4	Type: AppReqNotification	49
6.3.6.3	Simple data types and enumerations	49
6.3.6.3.1	Introduction	49
6.3.6.3.2	Simple data types	49
6.3.6.3.3	Enumeration: ServiceLevel	49
6.3.6.3.4	Enumeration: ReservationResult	49
6.3.7	Error Handling	49
6.3.7.1	General	49
6.3.7.2	Protocol Errors	50
6.3.7.3	Application Errors	50
6.3.8	Feature negotiation	50
6.4	VAE_DynamicGroup API	50
6.4.1	Introduction	50
6.4.2	Usage of HTTP	50
6.4.2.1	General	50
6.4.2.2	HTTP standard headers	51
6.4.2.2.1	General	51
6.4.2.2.2	Content type	51
6.4.2.3	HTTP custom headers	51
6.4.2.3.1	General	51
6.4.3	Resources	51
6.4.3.1	Overview	51
6.4.3.2	Resource: Group Configurations	52
6.4.3.2.1	Description	52
6.4.3.2.2	Resource Definition	52
6.4.3.2.3	Resource Standard Methods	52
6.4.3.2.3.1	POST	52
6.4.3.2.4	Resource Custom Operations	53
6.4.3.3	Resource: Individual Group Configuration	53
6.4.3.3.1	Description	53
6.4.3.3.2	Resource definition	53

6.4.3.3.3	Resource Standard Methods	53
6.4.3.3.3.1	GET	53
6.4.3.3.3.2	DELETE	54
6.4.3.4	Resource Custom Operations	54
6.4.4	Custom Operations without associated resources	54
6.4.5	Notifications	54
6.4.5.1	General	54
6.4.5.2	Notification Delivery using a separate HTTP connection	55
6.4.5.3	Notification Test Event	55
6.4.5.4	Notification Delivery using WebSocket	55
6.4.5.5	Methods	55
6.4.5.6	Notify Dynamic Group	55
6.4.5.6.1	Description	55
6.4.5.6.2	Operation Definition	55
6.4.6	Data Model	56
6.4.6.1	General	56
6.4.6.2	Structured data types	56
6.4.6.2.1	Introduction	56
6.4.6.2.2	Type: GroupConfigurationData	57
6.4.6.2.3	Type: DynamicGroupNotification	57
6.4.6.3	Simple data types and enumerations	58
6.4.6.3.1	Introduction	58
6.4.6.3.2	Simple data types	58
6.4.7	Error Handling	58
6.4.7.1	General	58
6.4.7.2	Protocol Errors	58
6.4.7.3	Application Errors	58
6.4.8	Feature negotiation	58
6.5	VAE_ServiceContinuity Service API	58
6.5.1	Introduction	58
6.5.2	Usage of HTTP	59
6.5.2.1	General	59
6.5.2.2	HTTP standard headers	59
6.5.2.2.1	General	59
6.5.2.2.2	Content type	59
6.5.2.3	HTTP custom headers	59
6.5.2.3.1	General	59
6.5.3	Resources	59
6.5.3.1	Overview	59
6.5.3.2	Resource: Individual Geographical Area	60
6.5.3.2.1	Description	60
6.5.3.2.2	Resource Definition	60
6.5.3.2.3	Resource Standard Methods	60
6.5.3.2.3.1	GET	60
6.5.3.2.4	Resource Custom Operations	61
6.5.4	Custom Operations without associated resources	61
6.5.5	Notifications	61
6.5.6	Data Model	61
6.5.6.1	General	61
6.5.6.2	Structured data types	62
6.5.6.2.1	Introduction	62
6.5.6.2.2	Type: V2xServiceInfo	62
6.5.6.3	Simple data types and enumerations	62
6.5.6.3.1	Introduction	62
6.5.6.3.2	Simple data types	62
6.5.7	Error Handling	62
6.5.7.1	General	62
6.5.7.2	Protocol Errors	62
6.5.7.3	Application Errors	62
6.5.8	Feature negotiation	63
7	Security	63

Annex A (normative): OpenAPI specification.....64

A.1 General64

A.2 VAE_MessageDelivery API64

A.3 VAE_FileDistribution API.....69

A.4 VAE_ApplicationRequirement API.....72

A.5 VAE_DynamicGroup API75

A.6 VAE_ServiceContinuity API78

Annex B (informative): Change history80

History81

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the stage 3 protocol and data model for Vs interface between the V2X application specific server and VAE server and VAE-E interface between VAE servers. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the VAE server. The Vs, VAE-E interfaces and the related stage 2 functional requirements are defined in 3GPP TS 23.286 [4].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [3] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [4] 3GPP TS 23.286: "Application layer support for Vehicle-to-Everything (V2X) services; Functional architecture and information flows".
- [5] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [6] OpenAPI: "OpenAPI 3.0.0 Specification", <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.0.md>.
- [7] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [8] 3GPP TR 21.900: "Technical Specification Group working methods".
- [11] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [12] IETF RFC 7230: "Hypertext Transfer Protocol (HTTP/1.1): Message Syntax and Routing".
- [13] IETF RFC 7231: "Hypertext Transfer Protocol (HTTP/1.1): Semantics and Content".
- [14] IETF RFC 7232: "Hypertext Transfer Protocol (HTTP/1.1): Conditional Requests".
- [15] IETF RFC 7233: "Hypertext Transfer Protocol (HTTP/1.1): Range Requests".
- [16] IETF RFC 7234: "Hypertext Transfer Protocol (HTTP/1.1): Caching".
- [17] IETF RFC 7235: "Hypertext Transfer Protocol (HTTP/1.1): Authentication".
- [18] IETF RFC 5246, "The Transport Layer Security (TLS) Protocol Version 1.2".
- [19] 3GPP TS 29.116: "Representational state transfer over xMB reference point between Content Provider and BM-SC".
- [20] 3GPP TS 29.572: "5G System; Location Management Services; Stage 3".
- [21] IETF RFC 6455: "The WebSocket Protocol".
- [22] 3GPP TS 29.122: "T8 reference point for Northbound APIs".

- [23] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [24] IETF RFC 5246, "The Transport Layer Security (TLS) Protocol Version 1.2".

3 Definitions of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

Void

3.2 Symbols

For the purposes of the present document, the following symbols apply:

Void

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

V2X	Vehicle-to-Everything
VAE	V2X Application Enabler

4 Overview

The Vs interface is between the V2X application specific server and the VAE Server. It specifies RESTful APIs that allow the V2X application specific server to access the services and capabilities provided by VAE Server.

The stage 2 level requirements and signalling flows for the Vs interface are defined in 3GPP TS 23.286 [4].

The Vs interface supports the following APIs:

- VAE_MessageDelivery
- VAE_FileDistribution
- VAE_ApplicationRequirement
- VAE_DynamicGroup

The VAE-E interface is between VAE Servers. It specifies RESTful APIs that allow the VAE server to access the services and capabilities provided by other VAE Server.

The stage 2 level requirements and signalling flows for the VAE-E interface are defined in 3GPP TS 23.286 [4].

The VAE-E interface supports the following APIs:

- VAE_ServiceContinuity

5 Services offered by the V2X Application Enabler

5.1 Introduction

The table 5.1-1 shows the services provided by the VAE server and corresponding Service Operations:

Table 5.1-1 List of services provided by the VAE Server

Service Name	Service Operations	Operation Semantics	Example Consumer(s)
VAE_MessageDelivery	Deliver_DL_Message	Request/Response	V2X application specific server
	Deliver_UL_Message	Subscribe/Notify	V2X application specific server
	V2X_MessageDelivery_Subscribe		V2X application specific server
	V2X_MessageDelivery_Unsubscribe		V2X application specific server
VAE_FileDistribution	Distribute_File	Request/ Response	V2X application specific server
VAE_ApplicationRequirement	Reserve_NetworkResource	Subscribe/Notify	V2X application specific server
	Notify_NetworkResource		
VAE_DynamicGroup	Configure_DynamicGroup	Subscribe/Notify	V2X application specific server
VAE_ServiceContinuity	Query_ServiceContinuity	Request/Response	VAE server

Table 5.1-2 summarizes the corresponding APIs defined in this specification.

Table 5.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
VAE_MessageDelivery	6.1	VAE Message Delivery Service	TS29486_VAE_MessageDelivery.yaml	vae-message-delivery	A.2
VAE_FileDistribution	6.2	VAE File Distribution Service	TS29486_VAE_FileDistribution.yaml	vae-file-distribution	A.3
VAE_ApplicationRequirement	6.3	VAE Application Requirement Provision Service	TS29486_VAE_ApplicationRequirement.yaml	vae-app-req	A.4
VAE_DynamicGroup	6.4	VAE Configure Dynamic Group Information Service	TS29486_VAE_DynamicGroup.yaml	vae-dynamic-group	A.5
VAE_ServiceContinuity	6.5	VAE Service Continuity Service	TS29486_VAE_ServiceContinuity.yaml	vae-service-continuity	A.6

5.2 VAE_MessageDelivery Service

5.2.1 Service Description

This service enables a NF service consumer to communicate with the VAE server to exchange V2X messages with the V2X UEs.

5.2.2 Service Operations

5.2.2.1 Introduction

The VAE_MessageDelivery service supports following service operations:

- V2X_MessageDelivery_Subscribe;
- V2X_MessageDelivery_Unsubscribe;
- Deliver_DL_Message; and
- Deliver_UL_Message.

5.2.2.2 V2X_MessageDelivery_Subscribe

5.2.2.2.1 General

The V2X_MessageDelivery_Subscribe service operation is used to create a subscription for V2X messages delivery between the V2X application specific server and VAE server.

5.2.2.2.2 Message Delivery Subscribe

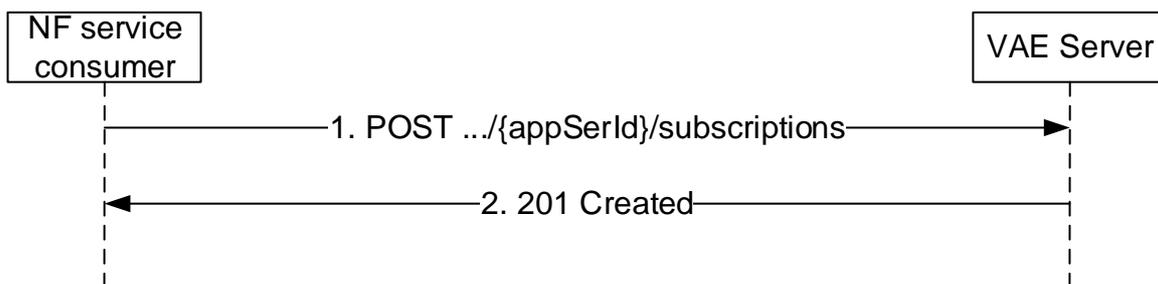


Figure 5.2.2.3.2-1: Message delivery subscribe

When the NF service consumer (e.g. V2X application specific server) needs to receive the message from the V2X UE and/or send the message to the V2X UE, the NF service consumer shall send the POST method as step 1 of the figure 5.2.2.2.2-1 to request to create an "Individual Message Delivery Subscription".

The NF service consumer shall include MessageDeliverySubscriptionData data structure in the payload body of the HTTP POST to request a creation of representation of the "Individual Message Delivery Subscription" resource. The "Individual Message Delivery Subscription" resource is created as described below.

The NF service consumer MessageDeliverySubscriptionData data structure shall include:

- The identity of the V2X application specific server within the "appSerId" attribute;
- The V2X service ID within the "serviceId" attribute;
- The notification URI within the "notifUri" attribute; and
- The supported features with the "suppFeat" attribute;

and may include

- The geographical area identifier within the "geoId" attribute.

When the VAE Server receives the HTTP POST request from the NF service consumer, the VAE server shall make an authorization based on the information received from the NF service consumer. If the authorization is successful, the VAE Server shall create a new resource, which represents "Individual Message Delivery Subscription", addressed by a URI as defined in clause 6.1.3.3.2 and contains a VAE Server created resource identifier. The VAE Server shall respond to the NF service consumer with a 201 Created message, including Location header field containing the URI for the created resource.

The NF service consumer shall use the URI received in the Location header in subsequent requests to the VAE Server to refer to the "Individual Message Delivery Subscription".

5.2.2.3 V2X_MessageDelivery_Unsubscribe

5.2.2.3.1 General

The V2X_MessageDelivery_Unsubscribe service operation is used to remove the V2X messages delivery subscription.

5.2.2.3.2 Message Delivery Unsubscribe

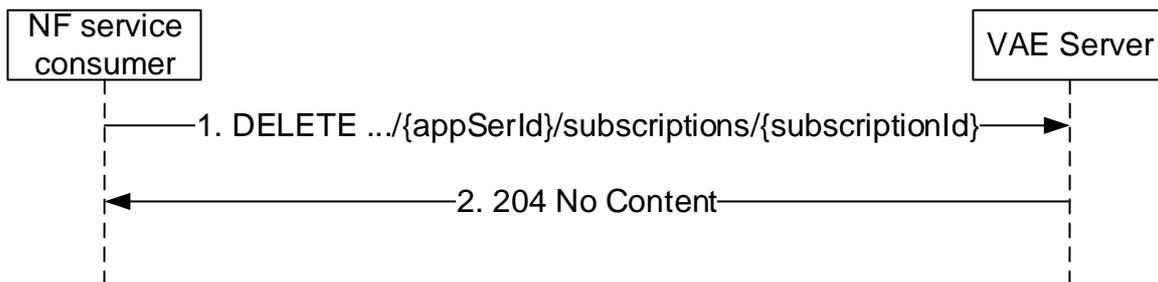


Figure 5.2.2.3.2-1: message delivery unsubscribe

When the NF service consumer (e.g. V2X application specific server) needs to remove an existing subscription for receiving the message from the V2X UE or sending the message to the V2X UE, the NF service consumer shall send the DELETE method as step 1 of the figure 5.2.2.3.2-1 to request to delete an "Individual Message Delivery Subscription".

Upon the reception of the HTTP DELETE request, the SMF shall:

- remove the corresponding subscription; and
- send an HTTP "204 No Content" response.

5.2.2.4 Deliver_DL_Message

5.2.2.4.1 General

The Deliver_DL_Message service operation is used to deliver the V2X messages to the V2X UEs.

5.2.2.4.2 Deliver Downlink Message



Figure 5.2.2.4.2-1: V2X message delivery

When the NF service consumer (e.g. V2X application specific server) needs to send the message to the V2X UE, the NF service consumer shall send the POST method as step 1 of the figure 5.2.2.4.2-1 to request to create an "Individual Message Delivery".

The NF service consumer shall include V2xMessageDeliveryData data structure in the payload body of the HTTP POST to request a creation of representation of the "Individual Message Delivery" resource. The "Individual Message Delivery" resource is created as described below.

The NF service consumer within the MessageDeliveryData data structure shall include:

- Either the V2X UE ID within the "ueId" attribute or the V2X Group ID within the "groupId" attribute;
 - V2X message payload carried by the V2X message within the "payload" attribute;
- and may include:
- The duration within the "duration" attribute; and
 - The geographical area identifier within the "geoId" attribute.

When the VAE Server receives the HTTP POST request from the NF service consumer, the VAE server shall make an authorization based on the information received from the NF service consumer. If the authorization is successful, the VAE Server shall create a new resource, which represents "Individual Message Delivery", addressed by a URI as defined in clause 6.1.3.5.2 and contains a VAE Server created resource identifier. The VAE Server shall respond to the NF service consumer with a 201 Created message, including Location header field containing the URI for the created resource.

The NF service consumer shall use the URI received in the Location header in subsequent requests to the VAE Server to refer to the "Individual Message Delivery".

Upon receipt of the HTTP DELETE message from the NF service consumer, the VAE Server shall check if the Individual Message Delivery resource identified by the URI already exists. If the resource exists, the VAE Server shall delete the resource and respond to the NF service consumer with a 204 No Content success message.

When the message delivery duration expires, the VAE server may remove the associated Individual Message Delivery resource locally.

5.2.2.5 Deliver_UL_Message

5.2.2.5.1 General

The Deliver_UL_Message service operation is used to deliver the uplink message to the NF service consumer (e.g. V2X application specific server).

5.2.2.5.2 Deliver Uplink Message

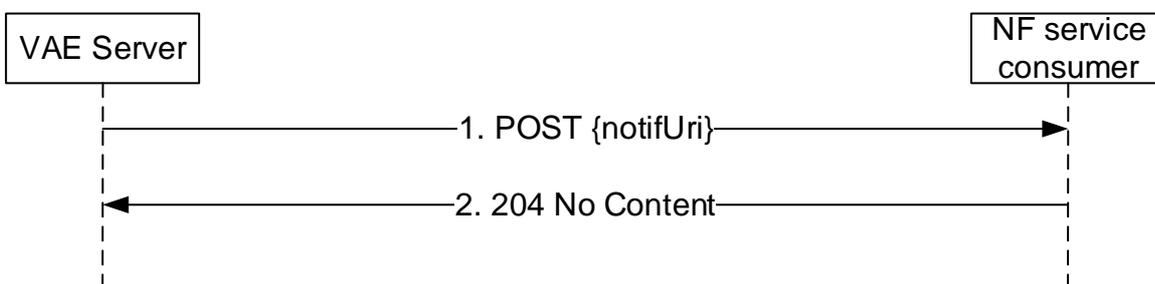


Figure 5.2.2.5.2-1: Deliver Uplink Message

If the VAE Server receives the uplink message for a V2X UE which an NF service consumer has subscribed to or a V2X UE belongs to a V2X group which the NF service consumer has subscribed to, the VAE Server shall send an HTTP POST request with "{notifUri}" as previously provided by the NF service consumer within the corresponding subscription as URI and UplinkMessageDeliveryData data structure as request body that shall include:

- resource URI of the individual Message Delivery Subscription related to the notification within the "resourceUri" attribute;

- The V2X UE ID within the "ueId" attribute;
- V2X message payload carried by the V2X message within the "payload" attribute; and
- The geographical area identifier within the "geoId" attribute if available.

Upon the reception of the HTTP POST message, the NF shall send an "204 No Content" HTTP response for a successful processing.

5.3 VAE_FileDistribution Service

5.3.1 Service Description

This API enables the V2X application specific server to communicate with the VAE server to initiate file distribution to the V2X UEs.

5.3.2 Service Operations

5.3.2.1 Introduction

The VAE_FileDistribution service supports following service operations:

- Distribute_File

5.3.2.2 Distribute File

5.3.2.2.1 General

The Distribute File service operation is used to distribute files to the V2X UEs.

5.3.2.2.2 Distribute File



Figure 5.3.2.2.2-1: Distribute File

When the NF service consumer (e.g. V2X application specific server) needs to distribute the file to the V2X UEs, the NF service consumer shall send the POST method as step 1 of the figure 5.3.2.2.2-1 to request to create an "Individual File Distribution".

The NF service consumer shall include FileDistributionData data structure in the payload body of the HTTP POST to request a creation of representation of the "Individual File Distribution" resource. The "Individual File Distribution" resource is created as described below.

The NF service consumer within the FileDistributionData data structure shall include:

- The file lists within the "fileLists" attribute;
- The geographical area within the "geoArea" attribute;
- maximum bitrate for the V2X application within the "maxBitrate" attribute; and

- maximum delay for the V2X application within the "maxDelay" attribute;
- and may include:
- The V2X Group ID within the "groupId" attribute;
 - The serving class within the "serviceClass" attribute; and
 - The duration within the "duration" attribute.

When the VAE Server receives the HTTP POST request from the NF service consumer, the VAE server shall make an authorization based on the information received from the NF service consumer. If the authorization is successful, the VAE Server shall create a new resource, which represents "Individual File Distribution", addressed by a URI as defined in clause 6.2.3.3.2 and contains a VAE Server created resource identifier. The VAE Server shall respond to the NF service consumer with a 201 Created message, including Location header field containing the URI for the created resource.

The VAE Server shall use the URI received in the Location header in subsequent requests to the VAE Server to refer to the "Individual File Distribution".

Upon receipt of the HTTP DELETE message from the NF service consumer, the VAE Server shall check if the Individual Message Delivery resource identified by the URI already exists. If the resource exists, the VAE Server shall delete the resource and respond to the NF service consumer with a 204 No Content success message.

When the message delivery duration expires, the VAE server may remove the associated Individual Message Delivery resource locally.

The VAE server makes use of the xMB procedures as defined 3GPP TS 29.116 [y] to create MBMS sessions whose type is set to "files" and to request the delivery of files over these sessions. Before provisioning files to the BM-SC, the VAE server prepares the file for distribution, which may include partition of large files into smaller files or encryption.

The VAE server is responsible for translating the parameters related to the V2X application triggering the file delivery into corresponding xMB parameters. Table 5.3.2.2.2-1 describes the mapping between the VAE_FileDistribution API attribute and the xMB API properties specified in 3GPP TS 29.116 [19].

Table 5.3.2.2.2-1: Mapping between VAE_FileDistribution API and xMB API

V2X parameter	Corresponding xMB API property
serviceClass	service-class
fileLists	file-list
geoArea	geographical-area
maxBitrate	max-bitrate
maxDelay	max-delay

NOTE: The list of V2X parameters needed for file delivery is not exhaustive and can be updated based on the specific V2X application requirements.

5.4 VAE_ApplicationRequirement Service

5.4.1 Service Description

This API enables the V2X application specific server to communicate with the VAE server to provide V2X application requirement to the underlying 3GPP network.

5.4.2 Service Operations

5.4.2.1 Introduction

The VAE_ApplicationRequirement service supports following service operations:

- Reserve_NetworkResource

- Notify_NetworkResource

5.4.2.2 Reserve_NetworkResource

5.4.2.2.1 General

The Reserve_NetworkResource service operation is used to provide V2X application requirement to underlying 3GPP network.

5.4.2.2.2 Reserve Network Resource

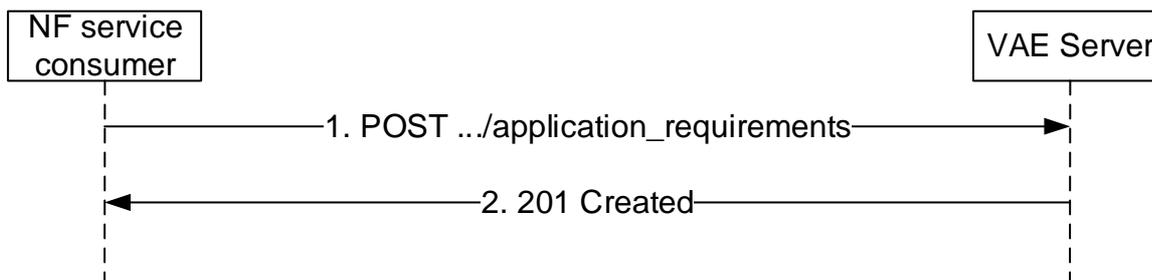


Figure 5.4.2.2.2-1: Reserve Network Resource

When the NF service consumer (e.g. V2X application specific server) needs to provide V2X application requirement to the underlying 3GPP network, the NF service consumer shall send the POST method as step 1 of the figure 5.4.2.2.2-1 to request to create an "Individual Application Requirement".

The NF service consumer shall include ApplicationRequirementData data structure in the payload body of the HTTP POST to request a creation of representation of the "Individual Application Requirement" resource. The "Individual Application Requirement" resource is created as described below.

The NF service consumer within the ApplicationRequirementData data structure shall include:

- Either the V2X Group ID within the "groupId" attribute or the V2X UE ID within the "ueId" attribute;
- notification URI within the "notifUri" attribute;
- The service Id within the "serviceId" attribute; and
- V2X application requirement within the "appRequirement" attribute;

and may include:

- The duration within the "duration" attribute.

When the VAE Server receives the HTTP POST request from the NF service consumer, the VAE server shall make an authorization based on the information received from the NF service consumer. If the authorization is successful, the VAE Server shall create a new resource, which represents "Individual Application Requirement", addressed by a URI as defined in clause 6.3.3.3.2 and contains a VAE Server created resource identifier. The VAE Server shall respond to the NF service consumer with a 201 Created message, including Location header field containing the URI for the created resource.

The NF service consumer shall use the URI received in the Location header in subsequent requests to the VAE Server to refer to the "Individual Application Requirement".

Upon receipt of the HTTP DELETE message from the NF service consumer, the VAE Server shall check if the Individual Application Requirement resource identified by the URI already exists. If the resource exists, the VAE Server shall delete the resource and respond to the NF service consumer with a 204 No Content success message.

When the message delivery duration expires, the VAE server may remove the associated Individual Application Requirement resource locally.

5.4.2.3 Notify_NetworkResource

5.4.2.3.1 General

The Notify_NetworkResource service operation is used to notify the result of network resource adaptation corresponding to the V2X application requirement.

5.4.2.3.2 Notify Network Resource

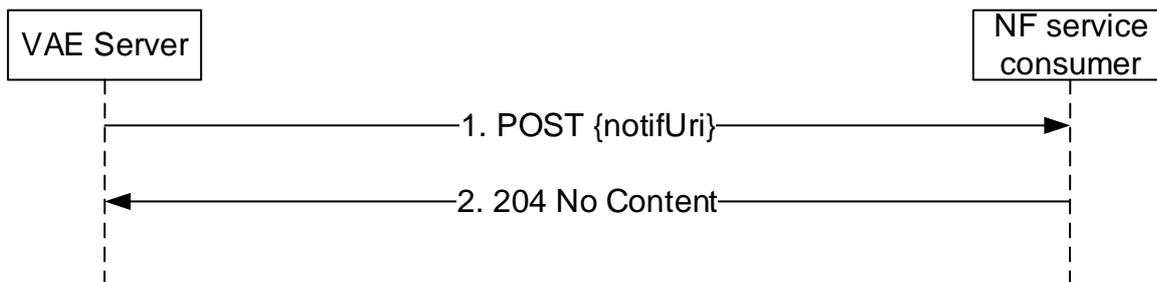


Figure 5.4.2.3.2-1: Notify Network Resource

If the VAE Server receives the result of network resource adaptation corresponding to the V2X application requirement, the VAE Server shall send an HTTP POST request with "{notifUri}" as previously provided by the NF service consumer within the corresponding subscription as URI and AppReqNotification data structure as request body that shall include:

- resource URI of the individual Application Requirement related to the notification within the "resourceUri" attribute;
- the result of the network resource adaptation corresponding to the V2X application requirement within the "result" attribute.

Upon the reception of the HTTP POST message, the NF service consumer shall send an "204 No Content" HTTP response for a successful processing.

5.5 VAE_DynamicGroup Service

5.5.1 Service Description

This API enables the V2X application specific server to communicate with the VAE server to configure dynamic group information.

5.5.2 Service Operations

5.5.2.1 Introduction

The VAE_DynamicGroup service supports following service operations:

- Configure_DynamicGroup
- Notify_DynamicGroup

5.5.2.2 Configure_DynamicGroup

5.5.2.2.1 General

The Configure_DynamicGroup service operation is used to configure the dynamic group information at the VAE server.

5.5.2.2.2 Configure Dynamic Group

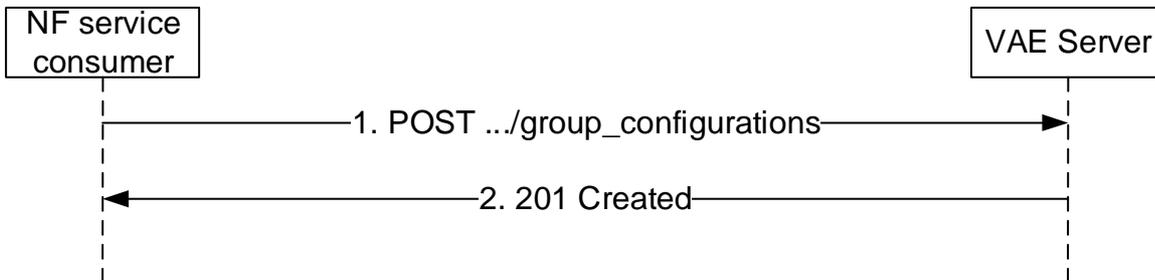


Figure 5.5.2.2-1: Configure Dynamic Group

When the NF service consumer (e.g. V2X application specific server) needs to configure the dynamic group information at the VAE server, the NF service consumer shall send the POST method as step 1 of the figure 5.5.2.2.2-1 to request to create an "Individual Group Configuration".

The NF service consumer shall include GroupConfigurationData data structure in the payload body of the HTTP POST to request a creation of representation of the "Individual Group Configuration" resource. The "Individual Group Configuration" resource is created as described below.

The NF service consumer within GroupConfigurationData data structure shall include:

- The dynamic Group ID within the "groupId" attribute;
- The group definition within the "definition" attribute;
- The group leader Id within the "leaderId" attribute; and
- The notification URI within the "notifUri" attribute.

and may include:

- The duration within the "duration" attribute.

When the VAE Server receives the HTTP POST request from the NF service consumer, the VAE server shall make an authorization based on the information received from the NF service consumer. If the authorization is successful, the VAE Server shall create a new resource, which represents "Individual Group Configuration", addressed by a URI as defined in clause 6.4.3.2.2 and contains a VAE Server created resource identifier. The VAE Server shall respond to the NF service consumer with a 201 Created message, including Location header field containing the URI for the created resource.

The NF service consumer shall use the URI received in the Location header in subsequent requests to the VAE Server to refer to the "Individual Application Requirement".

Upon receipt of the HTTP DELETE message from the NF service consumer, the VAE Server shall check if the Individual Message Delivery resource identified by the URI already exists. If the resource exists, the VAE Server shall delete the resource and respond to the NF service consumer with a 204 No Content success message.

When the message delivery duration expires, the VAE server may remove the associated Individual Message Delivery resource locally.

5.5.2.3 Notify_DynamicGroup

5.5.2.3.1 General

The Notify_DynamicGroup service operation is used to notify the dynamic group information (i.e. group member joins or leaves) at the VAE server.

5.5.2.3.2 Notify Dynamic Group

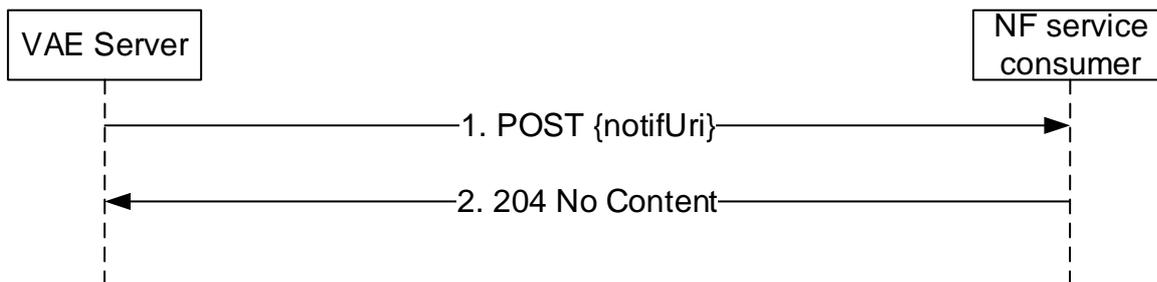


Figure 5.5.2.3.2-1: Notify Dynamic Group

If the VAE Server receives the dynamic group information (i.e. group member joins or leaves), the VAE Server shall send an HTTP POST request with "{notifUri}" as previously provided by the NF service consumer within the corresponding subscription as URI and DynamicGroupNotification data structure as request body that shall include:

- resource URI of the individual Application Requirement related to the notification within the "resourceUri" attribute;
- one or more joined group member within the "joinedUeIds" attribute if available; and
- one or more left group member within the "leftUeIds" attribute if available.

Upon the reception of the HTTP POST message, the NF service consumer shall send an "204 No Content" HTTP response for a successful processing.

5.6 VAE_ServiceContinuity Service

5.6.1 Service Description

This service provided by the VAE server enables exposing information to facilitate the V2X service continuity.

5.6.2 Service Operations

5.6.2.1 Introduction

The VAE_ServiceContinuity service supports following service operations:

- Query_ServiceContinuity

5.6.2.2 Query_ServiceContinuity

5.6.2.2.1 General

The Query_ServiceContinuity service operation is used to query the VAE server whether it can support the desired V2X service in the designated geographical area.

5.6.2.2.2 Query service continuity

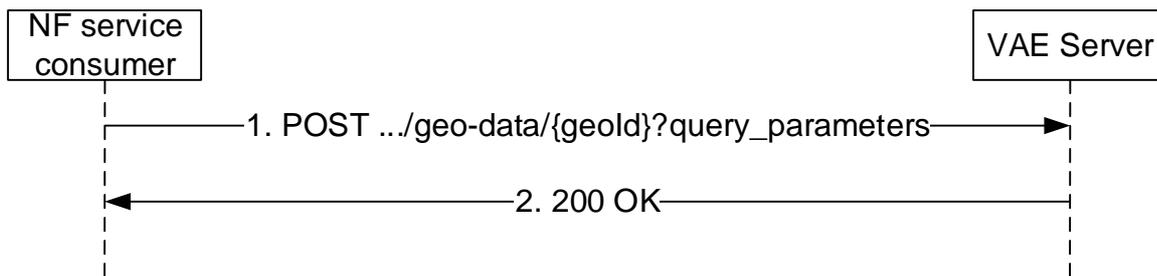


Figure 5.6.2.2.2-1: Query service continuity

When the NF service consumer (e.g. V2X server) needs to query service continuity information, the NF service consumer shall send an HTTP GET request as step 1 of the figure 5.6.2.2.2-1 to the "Individual Geographical Area" resource with query parameter V2X service id in "service-id". When the VAE Server receives the HTTP GET request from the NF service consumer, the VAE Server shall perform the query.

On success, "200 OK" shall be returned as step 2 of the figure 5.6.2.2.2-1 to indicate that the VAE server can support the desired V2X service for the target "Individual Geographical Area" resource. The response body shall contain the "Individual Geographical Area" resource including the requested V2X service id.

6 API Definitions

6.1 VAE_MessageDelivery Service API

6.1.1 Introduction

The VAE_MessageDelivery shall use the VAE_MessageDelivery API.

The API URI of the VAE_MessageDelivery shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URIs used in HTTP requests from the NF service consumer towards the VAE Server shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [3], i.e.:

All resource URIs of this API shall have the following root:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [3].
- The <apiName> shall be "vae-message-delivery".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.1.3.

6.1.2 Usage of HTTP

6.1.2.1 General

Support of HTTP/1.1 (IETF RFC 7230 [12], IETF RFC 7231 [13], IETF RFC 7232 [14], IETF RFC 7233 [15], IETF RFC 7234 [16] and IETF RFC 7235 [17]) over TLS (IETF RFC 5246 [18]) is mandatory and support of HTTP/2 as specified in clause 5 of 3GPP TS 29.500 [2] is recommended. A V2X application specific server desiring to use

HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 7540 [5].

HTTP/2, shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [2].

An OpenAPI [6] specification of HTTP messages and content bodies for the VAE_MessageDelivery is contained in Annex A.2.

6.1.2.2 HTTP standard headers

6.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [2] for the usage of HTTP standard headers.

6.1.2.2.2 Content type

JSON, IETF RFC 8259 [7], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [2]. The use of the JSON format shall be signalled by the content type "application/json".

6.1.2.3 HTTP custom headers

6.1.2.3.1 General

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [2] shall be applicable.

6.1.3 Resources

6.1.3.1 Overview

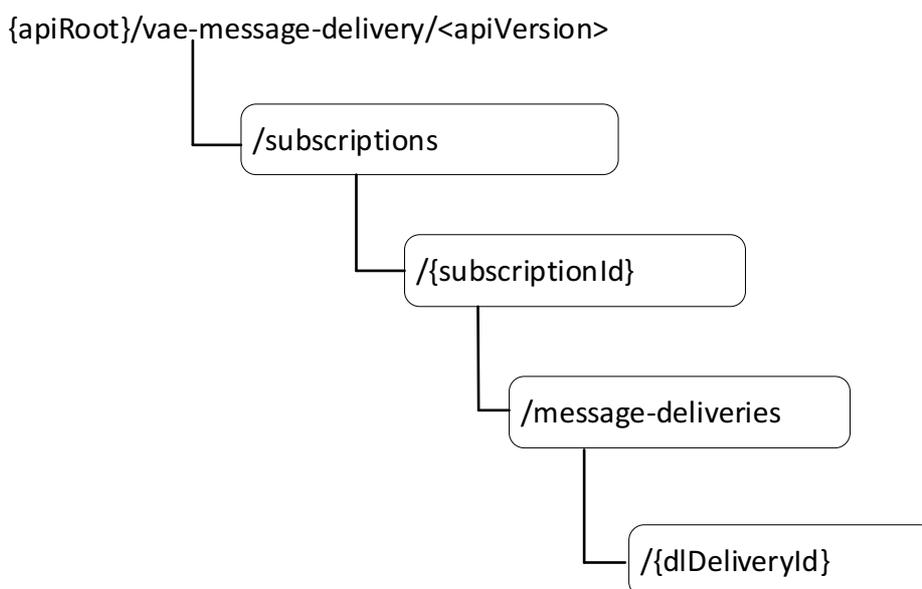


Figure 6.1.3.1-1: Resource URI structure of the VAE_V2X_Message_Delivery API

Table 6.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.1.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Message Delivery Subscriptions	{apiRoot}/vae-message-delivery/<apiVersion>/subscriptions	POST	Create a new Individual Message Delivery Subscription resource.
Individual Message Delivery Subscription	{apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}	GET	Read an Individual Message Delivery Subscription resource.
		DELETE	Delete an Individual Message Delivery Subscription resource.
Downlink Message Deliveries	{apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}/message-deliveries	POST	Create a new Individual Downlink Message Delivery resource for a V2X UE ID or V2X group ID.
Individual Message Delivery	{apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}/message-deliveries/{deliveryId}	GET	Read the Individual Downlink Message Delivery resource.
		DELETE	Delete the Individual Downlink Message Delivery resource.

6.1.3.2 Resource: Message Delivery Subscriptions

6.1.3.2.1 Description

This resource represents the collection of the Individual Message Delivery Subscription resources created in the VAE Server.

6.1.3.2.2 Resource Definition

Resource URI: **{apiRoot}/vae-message-delivery/<apiVersion>/subscriptions**

This resource shall support the resource URI variables defined in table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1

6.1.3.2.3 Resource Standard Methods

6.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.1.3.2.3.1-1.

Table 6.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.2.3.1-2 and the response data structures and response codes specified in table 6.1.3.2.3.1-3.

Table 6.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MessageDeliverySubscriptionData	M	1	Parameters to create an Individual Message Delivery Subscription resources.

Table 6.1.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MessageDeliverySubscriptionData	O	0..1	201 Created	An Individual Message Delivery Subscription resource for the V2X UE ID or V2X group ID is created successfully.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

Table 6.1.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}

6.1.3.2.4 Resource Custom Operations

None.

6.1.3.3 Resource: Individual Message Delivery Subscription

6.1.3.3.1 Description

The Individual Message Subscription resource represents an Individual Message Delivery Subscription created in the VAE Server and associated with the V2X UE ID or V2X group ID.

6.1.3.3.2 Resource definition

Resource URI: {apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 6.1.3.3.2-1.

Table 6.1.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1
subscriptionId	string	Unique identifier of the individual Message Delivery Subscription resource for the V2X UE ID or V2X group ID.

6.1.3.3.3 Resource Standard Methods

6.1.3.3.3.1 GET

This method shall support the URI query parameters specified in table 6.1.3.3.3.1-1.

Table 6.1.3.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.1.3.3.3.1-2 and the response data structures and response codes specified in table 6.1.3.3.3.1-3.

Table 6.1.3.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MessageDeliverySubscriptionData	M	1	200 OK	An individual Message Delivery Subscription resource for the V2X UE ID or V2X group ID is returned successfully.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

6.1.3.3.3.2 DELETE

This method shall support the URI query parameters specified in table 6.1.3.3.3.2-1.

Table 6.1.3.3.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.1.3.3.3.2-2 and the response data structures and response codes specified in table 6.1.3.3.3.2-3.

Table 6.1.3.3.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.3.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Individual Message Delivery Subscription was successfully deleted.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [5] also apply.				

6.1.3.3.4 Resource Custom Operations

None.

6.1.3.4 Resource: Downlink Message Deliveries

6.1.3.4.1 Description

This resource represents the collection of the individual Downlink Message Delivery resources created in the VAE Server.

6.1.3.4.2 Resource Definition

Resource URI: {apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}/message-deliveries

This resource shall support the resource URI variables defined in table 6.1.3.4.2-1.

Table 6.1.3.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1
subscriptionId	string	Unique identifier of the individual Message Delivery Subscription resource for the V2X UE ID or V2X group ID.

6.1.3.4.3 Resource Standard Methods

6.1.3.4.3.1 POST

This method shall support the URI query parameters specified in table 6.1.3.4.3.1-1.

Table 6.1.3.4.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.4.3.1-2 and the response data structures and response codes specified in table 6.1.3.4.3.1-3.

Table 6.1.3.4.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
DownlinkMessageDeliveryData	M	1	Parameters to create an individual Message Delivery resources.

Table 6.1.3.4.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
DownlinkMessageDeliveryData	O	0..1	201 Created	An individual Message Delivery resource for the V2X UE ID or V2X group ID is created successfully.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

Table 6.1.3.4.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}/message-deliveries/{dlDeliveryId}

6.1.3.4.4 Resource Custom Operations

None.

6.1.3.5 Resource: Individual Downlink Message Delivery

6.1.3.3.1 Description

The Individual Downlink Message Delivery resource represents an Individual Downlink Message Delivery created in the VAE Server and associated with the V2X UE ID or V2X group ID.

6.1.3.5.2 Resource definition

Resource URI: **{apiRoot}/vae-message-delivery/<apiVersion>/subscriptions/{subscriptionId}/message-deliveries/{dlDeliveryId}**

This resource shall support the resource URI variables defined in table 6.1.3.5.2-1.

Table 6.1.3.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1
subscriptionId	string	Unique identifier of the individual Message Delivery Subscription resource for the V2X UE ID or V2X group ID.
dlDeliveryId	string	Unique identifier of the Individual Downlink Message Delivery resource for the V2X UE ID or V2X group ID.

6.1.3.5.3 Resource Standard Methods

6.1.3.5.3.1 GET

This method shall support the URI query parameters specified in table 6.1.3.5.3.1-1.

Table 6.1.3.5.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.1.3.5.3.1-2 and the response data structures and response codes specified in table 5.1.3.5.3.1-3.

Table 6.1.3.5.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.5.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
DownlinkMessageDeliveryData	M	1	200 OK	An individual Downlink Message Delivery resource for the V2X UE ID or V2X group ID is returned successfully.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

6.1.3.5.3.2 DELETE

This method shall support the URI query parameters specified in table 6.1.3.5.3.2-1.

Table 6.1.3.5.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.1.3.5.3.2-2 and the response data structures and response codes specified in table 6.1.3.5.3.2-3.

Table 6.1.3.5.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.5.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Individual Downlink Message Delivery resource was successfully deleted.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [5] also apply.				

6.1.3.3.4 Resource Custom Operations

None.

6.1.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on VAE_MessageDelivery.

6.1.5 Notifications

6.1.5.1 General

The VAE server and NF service consumer shall support the delivery of Notifications using a separate HTTP connection towards an address as assigned the NF service consumer described in clause 6.1.5.2.

A VAE server and NF service consumer may support testing a notification connection as described in clause 6.1.5.3. A VAE server and NF service consumer may support the delivery of Notification using Websocket (IETF RFC 6455 [21]) as described in clause 6.1.5.4.

6.1.5.2 Notification Delivery using a separate HTTP connection

The descriptions in clause 5.2.5.2 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer;
- description of SCEF applies to the VAE server; and
- "notificationDestination" attribute is replaced by the "notifUri" attribute.

6.1.5.3 Notification Test Event

The descriptions in clause 5.2.5.3 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer; and
- description of SCEF applies to the VAE server.

6.1.5.4 Notification Delivery using Websocket

The descriptions in clause 5.2.5.4 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer; and
- description of SCEF applies to the VAE server.

6.1.5.5 Methods

Table 6.1.5.5-1: Notifications

Custom operation URI	Mapped HTTP method	Description
{notifUri}	POST	Uplink Message Delivery.

6.1.5.6 Uplink Message Delivery

6.1.5.6.1 Description

This notification is used by the VAE Server to deliver the uplink message to the update the policy.

6.1.5.6.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.5.6.2-1 and the response data structure and response codes specified in table 6.1.5.6.2-2.

Table 6.1.5.6.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
UplinkMessageDeliveryData	M	1	Contains the uplink message delivery data

Table 6.1.5.6.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The uplink message is delivery successfully.
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				

6.1.6 Data Model

6.1.6.1 General

This clause specifies the application data model supported by the API.

Table 6.1.6.1-1 specifies the data types defined for the VAE_MessageDelivery API.

Table 6.1.6.1-1: VAE_MessageDelivery specific Data Types

Data type	Section defined	Description	Applicability
DownlinkMessageDeliveryData	6.1.6.2.2	Contains the downlink V2X message delivery data	
Geold	6.1.6.3.2	Geographical area identifier	
UplinkMessageDeliveryData	6.1.6.2.4	Contains the uplink V2X message delivery data	
MessageDeliverySubscriptionData	6.1.6.2.3	Contains the V2X message delivery subscription data	
V2xGroupID	6.1.6.3.2	The group ID for which the V2X message is addressed	
V2xServiceID	6.1.6.3.2	The V2X service ID to which the V2X message belongs to	
V2xUeID	6.1.6.3.2	Identifier of the destination V2X UE	
V2xMessagePayload	6.1.6.3.2	V2X message payload carried by the V2X message	

Table 6.1.6.1-2 specifies data types re-used by the VAE_MessageDelivery service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the VAE_MessageDelivery service based interface.

Table 6.1.6.1-2: VAE_MessageDelivery re-used Data Types

Data type	Reference	Comments	Applicability
Bytes	3GPP TS 29.571 [11]	String with format "byte" as defined in OpenAPI Specification [6], i.e, base64-encoded characters	
DateTime	3GPP TS 29.571 [11]	String with format "date-time" as defined in OpenAPI Specification [6].	
SupportedFeatures	3GPP TS 29.571 [11]		
TestNotification	3GPP TS 29.122 [22]	Represents a notification that can be sent to test whether a chosen notification mechanism works.	Notification_test_event
Uri	3GPP TS 29.571 [11]		
WebsocketNotifConfig	3GPP TS 29.122 [22]	Represents configuration for the delivery of notifications over Websockets.	Notification_websocket

6.1.6.2 Structured data types

6.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.1.6.2.2 Type: DownlinkMessageDeliveryData

Table 6.1.6.2.2-1: Definition of type DownlinkMessageDeliveryData

Attribute name	Data type	P	Cardinality	Description	Applicability
ueId	V2xUeId	O	0..1	Indicates an identifier of the V2X UE.	
groupId	V2xGroupId	O	0..1	Indicates a group ID for which the V2X message is addressed.	
geoid	Geoid	O	0..1	Indicates a geographical area identifier.	
payload	V2xMessagePayload	M	1	Contains the V2X message payload carried by the V2X message	
duration	DateTime	O	0..1	Identifies the absolute time at which the related Individual Message Delivery resource is considered to expire. When omitted in the request, it indicates the resource is requested to be valid forever by the NF service consumer. When omitted in the response, it indicates the resource is set to valid forever by the VAE server	
NOTE: Either "ueId" attribute or "groupId" attribute shall be included.					

6.1.6.2.3 Type: MessageDeliverySubscriptionData

Table 6.1.6.2.3-1: Definition of type MessageDeliverySubscriptionData

Attribute name	Data type	P	Cardinality	Description	Applicability
appServerId	AppServerId	M	1	Identity of the V2X application specific server.	
serviceId	V2xServiceId	M	1	Indicates a V2X service ID to which the V2X message belongs to.	
geoid	Geoid	O	0..1	Indicates a geographical area identifier.	
notifUri	Uri	M	1	Contains the notification URI.	
requestTestNotification	boolean	O	0..1	Set to true by the NF service consumer to request the VAE server to send a test notification as defined in clause 6.1.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	O	0..1	Configuration parameters to set up notification delivery over WebSocket protocol as defined in clause 6.1.5.4.	Notification_websocket
suppFeat	SupportedFeatures	C	0..1	Indicates the features supported by the service consumer and VAE server. It shall be included in the request and response of the creation of individual Message Delivery Subscription resource.	

6.1.6.2.4 Type: UplinkMessageDeliveryData

Table 6.1.6.2.4-1: Definition of type UplinkMessageDeliveryData

Attribute name	Data type	P	Cardinality	Description	Applicability
resourceUri	Uri	M	1	The resource URI of the individual Uplink Message Delivery Subscription related to the notification.	
ueld	V2xUeld	M	1	Indicates an identifier of the V2X UE.	
geold	Geold	O	0..1	Indicates a geographical area identifier.	
payload	V2xMessagePayload	M	1	Contains the V2X message payload carried by the V2X message	

6.1.6.3 Simple data types and enumerations

6.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.1.6.3.2 Simple data types

The simple data types defined in table 6.1.6.3.2-1 shall be supported.

Table 6.1.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability
AppServerId	string	Identity of the V2X application specific server	
Geold	string	Defines a geographical area identifier.	
V2xGroupId	string	Defines a group ID for which the V2X message is addressed.	
V2xServiceId	string	Defines a V2X service ID to which the V2X message belongs to	
V2xUeld	string	Identifier of the V2X UE	
V2xMessagePayload	Bytes	V2X message payload carried by the V2X message.	

6.1.7 Error Handling

6.1.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of 3GPP TS 29.500 [2].

6.1.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the VAE_MessageDelivery API.

6.1.7.3 Application Errors

The application errors defined for the VAE_MessageDelivery service are listed in Table 6.1.7.3-1.

Table 6.1.7.3-1: Application errors

Application Error	HTTP status code	Description

6.1.8 Feature negotiation

The optional features in table 6.1.8-1 are defined for the VAE_MessageDelivery API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [2].

Table 6.1.8-1: Supported Features

Feature number	Feature Name	Description
1	Notification_test_event	The testing of notification connection is supported according to clause 6.1.5.3.
2	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 6.1.5.4. This feature requires that the Notification_test_event feature is also supported.

6.2 VAE_FileDistribution Service API

6.2.1 Introduction

The VAE_FileDistribution shall use the VAE_FileDistribution API.

The API URI of the VAE_FileDistribution shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URIs used in HTTP requests from the NF service consumer towards the VAE Server shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [3], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [3].
- The <apiName> shall be "vae-file-distribution".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.2.3.

6.2.2 Usage of HTTP

6.2.2.1 General

Support of HTTP/1.1 (IETF RFC 7230 [12], IETF RFC 7231 [13], IETF RFC 7232 [14], IETF RFC 7233 [15], IETF RFC 7234 [16] and IETF RFC 7235 [17]) over TLS (IETF RFC 5246 [18]) is mandatory and support of HTTP/2 as specified in clause 5 of 3GPP TS 29.500 [2] is recommended. A V2X application specific server desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 7540 [5].

HTTP/2, shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [2].

An OpenAPI [6] specification of HTTP messages and content bodies for the VAE_FileDistribution is contained in Annex A.3.

6.2.2.2 HTTP standard headers

6.2.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [2] for the usage of HTTP standard headers.

6.2.2.2.2 Content type

JSON, IETF RFC 8259 [7], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [2]. The use of the JSON format shall be signalled by the content type "application/json".

6.2.2.3 HTTP custom headers

6.2.2.3.1 General

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [2] shall be applicable.

6.2.3 Resources

6.2.3.1 Overview

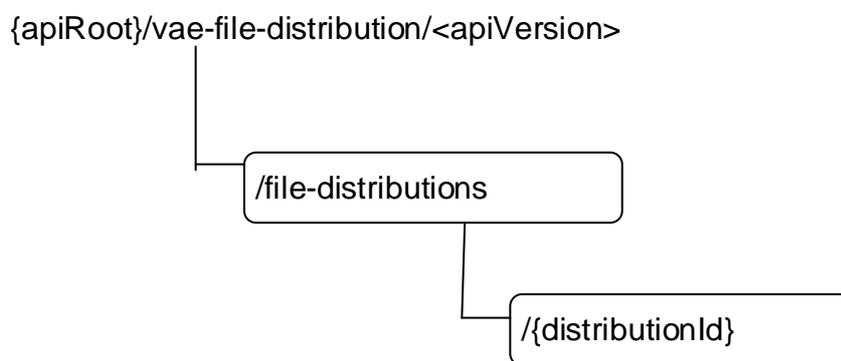


Figure 6.2.3.1-1: Resource URI structure of the VAE_FileDistribution API

Table 6.2.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.2.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
File Distributions	{apiRoot}/vae-file-distribution/<apiVersion>/file-distributions	POST	Create a new Individual File Distribution resource for a V2X group ID.
Individual File Distribution	{apiRoot}/vae-file-distribution/<apiVersion>/file-distributions/{distributionId}	GET	Read the Individual File Distribution resource.
		DELETE	Delete the Individual File Distribution resource.

6.2.3.2 Resource: File Distributions

6.2.3.2.1 Description

This resource represents the collection of the individual File Distribution resources created in the VAE Server.

6.2.3.2.2 Resource Definition

Resource URI: **{apiRoot}/vae-file-distribution/<apiVersion>/file-distributions**

This resource shall support the resource URI variables defined in table 6.2.3.2.2-1.

Table 6.2.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1

6.2.3.2.3 Resource Standard Methods

6.2.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.2.3.2.3.1-1.

Table 6.2.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.2.3.1-2 and the response data structures and response codes specified in table 6.2.3.2.3.1-3.

Table 6.2.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
FileDistributionData	M	1	Parameters to create an individual File Distribution resource.

Table 6.2.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
FileDistributionData	O	0..1	201 Created	An individual File Distribution resource for the V2X group ID is created successfully.
NOTE : The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

Table 6.2.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/vae-file-distribution/<apiVersion>/file-distributions/{distributionId}

6.2.3.2.4 Resource Custom Operations

None.

6.2.3.3 Resource: Individual File Distribution

6.2.3.3.1 Description

The individual File Distribution resource represents an individual File Distribution created in the VAE Server and associated with the V2X group ID.

6.2.3.3.2 Resource definition

Resource URI: {apiRoot}/vae-file-distribution/<apiVersion>/file-distributions/{distributionId}

This resource shall support the resource URI variables defined in table 6.2.3.3-1.

Table 6.2.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1
distributionId	string	Unique identifier of the individual File Distribution resource for the V2X group ID.

6.2.3.3.3 Resource Standard Methods

6.2.3.3.3.1 GET

This method shall support the URI query parameters specified in table 6.2.3.3.3.1-1.

Table 6.2.3.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.3.3.1-2 and the response data structures and response codes specified in table 6.2.3.3.3.1-3.

Table 6.2.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.2.3.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
FileDistributionData	M	1	200 OK	An individual File Distribution resource for the V2X group ID is returned successfully.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

6.2.3.3.3.2 DELETE

This method shall support the URI query parameters specified in table 6.2.3.3.3.2-1.

Table 6.2.3.3.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.3.2-2 and the response data structures and response codes specified in table 6.2.3.3.2-3.

Table 6.2.3.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.2.3.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Individual File Distribution resource was successfully deleted.

6.2.3.4 Resource Custom Operations

None.

6.2.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on VAE_FileDistribution.

6.2.5 Notifications

N/A

6.2.6 Data Model

6.2.6.1 General

This clause specifies the application data model supported by the API.

Table 6.2.6.1-1 specifies the data types defined for the VAE_FileDistribution API.

Table 6.2.6.1-1: VAE_FileDistribution specific Data Types

Data type	Section defined	Description	Applicability
FileStatus	6.2.6.3.3		
FileDistributionData	6.2.6.2.2		

Table 6.1.6.1-2 specifies data types re-used by the VAE_FileDistribution service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the VAE_FileDistribution service based interface.

Table 6.2.6.1-2: VAE_FileDistribution re-used Data Types

Data type	Reference	Comments	Applicability
BitRate	3GPP TS 29.571 [11]		
DateTime	3GPP TS 29.571 [11]		
DurationSec	3GPP TS 29.571 [11]		
GeographicArea	3GPP TS 29.572 [20]		
SupportedFeatures	3GPP TS 29.571 [11]		
UInteger	3GPP TS 29.571 [11]		
V2xGroupId	6.1.6.3.2		

6.2.6.2 Structured data types

6.2.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.2.6.2.2 Type: FileDistributionData

Table 6.2.6.2.2-1: Definition of type FileDistributionData

Attribute name	Data type	P	Cardinality	Description	Applicability
groupId	V2xGroupId	O	0..1	Indicates a group ID for which the V2X message is addressed.	
fileLists	array(FileList)	M	1..N	File lists.	
serviceClass	string	O	0..1	Information about the V2X application (e.g., software update, HD map download)	
geoArea	GeographicArea	M	1	Target geographical area for the V2X Uses	
maxBitrate	BitRate	M	1	Maximum bitrate for the V2X application.	
maxDelay	UInteger	M	1	Unsigned integer identifying a maximum delay in units of milliseconds for the V2X application.	
duration	DateTime	O	0..1	Identifies the absolute time at which the related Individual File Distribution Data resource is considered to expire. When omitted in the request, it indicates the resource is requested to be valid forever by the NF service consumer. When omitted in the response, it indicates the resource is set to valid forever by the VAE server	
suppFeat	SupportedFeatures	C	0..1	Indicates the features supported by the service consumer and VAE server. It shall be included in the request and response of the Creation of Individual File Distribution Data resource..	

6.2.6.2.3 Type: FileList

Table 6.2.6.2.4-1: Definition of type FileList

Attribute name	Data type	P	Cardinality	Description	Applicability
fileUri	Uri	M	1		
fileDisplayUri	Uri	M	1		
fileEarFetchTime	DateTime	M	1		
fileLatFetchTime	DateTime	M	1		
fileSize	UInteger	O	0..1		
fileStatus	FileStatus	M	1		
completionTime	DateTime	M	1		
keepUpdateInterval	DurationSec	M	1		
uniAvailability	Boolean	O	0..1		
fileRepetition	UInteger	O	0..1		

6.2.6.3 Simple data types and enumerations

6.2.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.2.6.3.2 Simple data types

The simple data types defined in table 6.1.6.3.2-1 shall be supported.

Table 6.2.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

6.2.6.3.3 Enumeration: FileStatus

Table 6.2.6.3.3-1: Enumeration FileStatus

Enumeration value	Description	Applicability
PENDING	The file is pending.	
FETCHED	The file is fetched	
PREPARED	The file is prepared	
TRANSMITTING	The file is transmitting	
SENT	The file is sent.	

6.2.7 Error Handling

6.2.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of 3GPP TS 29.500 [2].

6.2.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the VAE_FileDistribution API.

6.2.7.3 Application Errors

The application errors defined for the VAE_FileDistribution service are listed in Table 6.2.7.3-1.

Table 6.2.7.3-1: Application errors

Application Error	HTTP status code	Description

6.2.8 Feature negotiation

The optional features in table 6.1.8-1 are defined for the VAE_FileDistribution API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [2].

Table 6.1.8-1: Supported Features

Feature number	Feature Name	Description

6.3 VAE_ApplicationRequirement API

6.3.1 Introduction

The VAE_ApplicationRequirement Service shall use the VAE_ApplicationRequirement API.

The API URI of the VAE_ApplicationRequirement API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URIs used in HTTP requests from the NF service consumer towards the VAE Server shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [3], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [3].
- The <apiName> shall be "vae-app-req".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.3.3.

6.3.2 Usage of HTTP

6.3.2.1 General

Support of HTTP/1.1 (IETF RFC 7230 [12], IETF RFC 7231 [13], IETF RFC 7232 [14], IETF RFC 7233 [15], IETF RFC 7234 [16] and IETF RFC 7235 [17]) over TLS (IETF RFC 5246 [18]) is mandatory and support of HTTP/2 as specified in clause 5 of 3GPP TS 29.500 [2] is recommended. A V2X application specific server desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 7540 [5].

HTTP/2, shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [2].

An OpenAPI [6] specification of HTTP messages and content bodies for the VAE_ApplicationRequirement is contained in Annex A.4.

6.3.2.2 HTTP standard headers

6.3.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [2] for the usage of HTTP standard headers.

6.3.2.2.2 Content type

JSON, IETF RFC 8259 [7], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [2]. The use of the JSON format shall be signalled by the content type "application/json".

6.3.2.3 HTTP custom headers

6.3.2.3.1 General

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [2] shall be applicable.

6.3.3 Resources

6.3.3.1 Overview

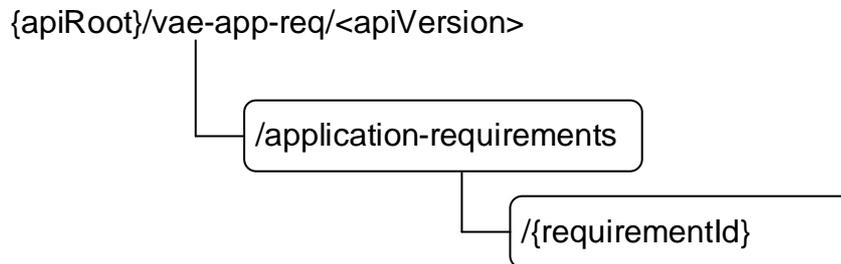


Figure 6.3.3.1-1: Resource URI structure of the VAE_ApplicationRequirement API

Table 6.3.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.3.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Application Requirements	<code>{apiRoot}/vae-app-req/<apiVersion>/application-requirements</code>	POST	Create a new Individual Application Requirements resource for a V2X UE or V2X group ID.
Individual Application Requirement	<code>{apiRoot}/vae-app-req/<apiVersion>/application-requirements/{requirementId}</code>	GET	Read the Individual Application Requirements resource.
		DELETE	Delete the Individual Application Requirements resource.

6.3.3.2 Resource: Application Requirements

6.3.3.2.1 Description

This resource represents the collection of the individual Application Requirement resources created in the VAE Server.

6.3.3.2.2 Resource Definition

Resource URI: `{apiRoot}/vae-app-req/<apiVersion>/application-requirements`

This resource shall support the resource URI variables defined in table 6.3.3.2.2-1.

Table 6.3.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.3.1
apiVersion	string	See clause 6.3.1

6.3.3.2.3 Resource Standard Methods

6.3.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.3.3.2.3.1-1.

Table 6.3.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.3.3.2.3.1-2 and the response data structures and response codes specified in table 6.3.3.2.3.1-3.

Table 6.3.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
ApplicationRequirementData	M	1	Parameters to create an individual Application Requirement resource.

Table 6.3.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ApplicationRequirementData	O	0..1	201 Created	An individual Application Requirement resource for the V2X UE ID or the V2X group ID is created successfully.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

Table 6.3.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/vae-app-req/<apiVersion>/application-requirements/{requirementId}

6.3.3.2.4 Resource Custom Operations

None.

6.3.3.3 Resource: Individual Application Requirement

6.3.3.3.1 Description

The individual Application Requirement resource represents an individual Application Requirement created in the VAE Server and associated with the V2X UE ID or V2X group ID.

6.3.3.3.2 Resource definition

Resource URI: {apiRoot}/vae-app-req/<apiVersion>/application-requirements/{requirementId}

This resource shall support the resource URI variables defined in table 6.2.3.3-1.

Table 6.3.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.3.1
apiVersion	string	See clause 6.3.1
requirementId	string	Unique identifier of the individual Application Requirement resource for the V2X UE ID or the V2X group ID.

6.3.3.3.3 Resource Standard Methods

6.3.3.3.3.1 GET

This method shall support the URI query parameters specified in table 6.3.3.3.3.1-1.

Table 6.3.3.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.3.3.3.3.1-2 and the response data structures and response codes specified in table 6.3.3.3.3.1-3.

Table 6.3.3.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.3.3.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ApplicationRequirementData	M	1	200 OK	An individual Application Requirement resource for the V2X UE ID or V2X group ID is returned successfully.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

6.3.3.3.3.2 DELETE

This method shall support the URI query parameters specified in table 6.3.3.3.3.2-1.

Table 6.3.3.3.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.3.3.3.3.2-2 and the response data structures and response codes specified in table 6.3.3.3.3.2-3.

Table 6.3.3.3.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.3.3.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Individual Application Requirement resource was successfully deleted

6.3.3.4 Resource Custom Operations

None.

6.3.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on VAE_ApplicationRequirement.

6.3.5 Notifications

6.3.5.1 General

The VAE server and NF service consumer shall support the delivery of Notifications using a separate HTTP connection towards an address as assigned the NF service consumer described in clause 6.3.5.2.

A VAE server and NF service consumer may support testing a notification connection as described in clause 6.3.5.3. A VAE server and NF service consumer may support the delivery of Notification using Websocket (IETF RFC 6455 [21]) as described in clause 6.1.5.4.

6.3.5.2 Notification Delivery using a separate HTTP connection

The descriptions in clause 5.2.5.2 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer;
- description of SCEF applies to the VAE server; and
- "notificationDestination" attribute is replaced by the "notifUri" attribute.

6.3.5.3 Notification Test Event

The descriptions in clause 5.2.5.3 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer; and
- description of SCEF applies to the VAE server.

6.3.5.4 Notification Delivery using Websocket

The descriptions in clause 5.2.5.4 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer; and
- description of SCEF applies to the VAE server.

6.3.5.5 Methods

Table 6.3.5.5-1: Methods

Custom operation URI	Mapped HTTP method	Description
{notifUri}	POST	Notify the result of the network resource adaptation corresponding to the V2X application requirement.

6.3.5.6 Notify Network Resource

6.3.5.6.1 Description

This notification is used by the VAE Server to notify the result of the network resource adaptation corresponding to the V2X application requirement.

6.3.5.6.2 Operation Definition

This operation shall support the request data structures specified in table 6.3.5.6.2-1 and the response data structure and response codes specified in table 6.3.5.6.2-2.

Table 6.3.5.6.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AppReqNotification	M	1	Notify the result of the network resource adaptation corresponding to the V2X application requirement.

Table 6.3.5.6.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	.
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				

6.3.6 Data Model

6.3.6.1 General

This clause specifies the application data model supported by the API.

Table 6.3.6.1-1 specifies the data types defined for the VAE_ApplicationRequirement API.

Table 6.3.6.1-1: VAE_ApplicationRequirement specific Data Types

Data type	Section defined	Description	Applicability
ApplicationRequirement	6.3.6.2.3		
AppReqNotification	6.3.6.2.4		
ApplicationRequirementData	6.3.6.2.2		
ReservationResult	6.3.6.3.4		
ServiceLevel	6.3.6.3.3		

Table 6.3.6.1-2 specifies data types re-used by the VAE_ApplicationRequirement service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the VAE_ApplicationRequirement service based interface.

Table 6.3.6.1-2: VAE_ApplicationRequirement re-used Data Types

Data type	Reference	Comments	Applicability
DateTime	3GPP TS 29.571 [11]		
SupportedFeatures	3GPP TS 29.571 [11]		
TestNotification	3GPP TS 29.122 [22]	Represents a notification that can be sent to test whether a chosen notification mechanism works.	Notification_test_event
Uri	3GPP TS 29.571 [11]	URI.	
V2xGroupld	6.1.6.3.2		
V2xServiceID	6.1.6.3.2	The V2X service ID to which the V2X message belongs to	
V2xUeld	6.1.6.3.2	Identifier of the destination V2X UE	
WebsockNotifConfig	3GPP TS 29.122 [22]	Peprresents configuration for the delivery of notifications over Websockets.	Notification_websocket

6.3.6.2 Structured data types

6.3.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.3.6.2.2 Type: ApplicationRequirementData

Table 6.3.6.2.2-1: Definition of type ApplicationRequirementData

Attribute name	Data type	P	Cardinality	Description	Applicability
ueId	V2xUeId	O	0..1	Indicates a UE ID for which the V2X message is addressed. (NOTE)	
groupId	V2xGroupId	O	0..1	Indicates a group ID for which the V2X message is addressed. (NOTE)	
serviceId	V2xServiceId	M	1	The V2X service ID for which application requirement corresponds to.	
appRequirement	ApplicationRequirement	M	1	The requirement for application change. E.g. service levels for application service.	
notifUri	Uri	M	1	Identifies the recipient of V2X application requirement notification sent by the VAE server.	
duration	DateTime	O	0..1	Identifies the absolute time at which the related Individual Application Requirement resource is considered to expire. When omitted in the request, it indicates the resource is requested to be valid forever by the NF service consumer. When omitted in the response, it indicates the resource is set to valid forever by the VAE server	
requestTestNotification	boolean	O	0..1	Set to true by the NF service consumer to request the VAE server to send a test notification as defined in clause 6.3.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	O	0..1	Configuration parameters to set up notification delivery over WebSocket protocol as defined in clause 6.3.5.4.	Notification_websocket
suppFeat	SupportedFeatures	C	0..1	Indicates the features supported by the service consumer. It shall be included in the first interaction.	

NOTE: Either the "ueId" attribute or "groupId" attribute shall be included.

6.3.6.2.3 Type: ApplicationRequirement

Table 6.3.6.2.3-1: Definition of type ApplicationRequirement

Attribute name	Data type	P	Cardinality	Description	Applicability
serviceLevel	ServiceLevel	O	0..1	Indicates a service level for application service.	

6.3.6.2.4 Type: AppReqNotification

Table 6.3.6.2.4-1: Definition of type AppReqNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
resourceUri	Uri	M	1	The resource URI of the individual Application Requirement related to the notification.	
result	ReservationResult	M	1	The result of the network resource adaptation corresponding to the V2X application requirement.	

6.3.6.3 Simple data types and enumerations

6.3.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.3.6.3.2 Simple data types

The simple data types defined in table 6.3.6.3.2-1 shall be supported.

Table 6.3.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

6.3.6.3.3 Enumeration: ServiceLevel

Table 6.3.6.3.3-1: Enumeration ServiceLevel

Enumeration value	Description	Applicability
HIGH	Service level is high.	
MEDIUM	Service level is medium.	
LOW	Service level is low.	

6.3.6.3.4 Enumeration: ReservationResult

Table 6.3.6.3.4-1: Enumeration ReservationResult

Enumeration value	Description	Applicability
SUCCESSFUL	The resource reservation is successful.	
FAILURE	The resource reservation is failure.	

6.3.7 Error Handling

6.3.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of 3GPP TS 29.500 [2].

6.3.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the VAE_ApplicationRequirement API.

6.3.7.3 Application Errors

The application errors defined for the VAE_ApplicationRequirement service are listed in Table 6.3.7.3-1.

Table 6.3.7.3-1: Application errors

Application Error	HTTP status code	Description

6.3.8 Feature negotiation

The optional features in table 6.3.8-1 are defined for the VAE_ApplicationRequirement API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [2].

Table 6.3.8-1: Supported Features

Feature number	Feature Name	Description
1	Notification_test_event	The testing of notification connection is supported according to clause 6.3.5.3.
2	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 6.3.5.4. This feature requires that the Notification_test_event feature is also supported.

6.4 VAE_DynamicGroup API

6.4.1 Introduction

The VAE_DynamicGroup service shall use the VAE_DynamicGroup API.

The API URI of the VAE_ApplicationRequirement API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URIs used in HTTP requests from the NF service consumer towards the VAE Server shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [3], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [3].
- The <apiName> shall be "vae-dynamic-group".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.4.3.

6.4.2 Usage of HTTP

6.4.2.1 General

Support of HTTP/1.1 (IETF RFC 7230 [12], IETF RFC 7231 [13], IETF RFC 7232 [14], IETF RFC 7233 [15], IETF RFC 7234 [16] and IETF RFC 7235 [17]) over TLS (IETF RFC 5246 [18]) is mandatory and support of HTTP/2

as specified in clause 5 of 3GPP TS 29.500 [2] is recommended. A V2X application specific server desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 7540 [5].

HTTP/2, shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [2].

An OpenAPI [6] specification of HTTP messages and content bodies for the VAE_DynamicGroup is contained in Annex A.5.

6.4.2.2 HTTP standard headers

6.4.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [2] for the usage of HTTP standard headers.

6.4.2.2.2 Content type

JSON, IETF RFC 8259 [7], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [2]. The use of the JSON format shall be signalled by the content type "application/json".

6.4.2.3 HTTP custom headers

6.4.2.3.1 General

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [2] shall be applicable.

6.4.3 Resources

6.4.3.1 Overview

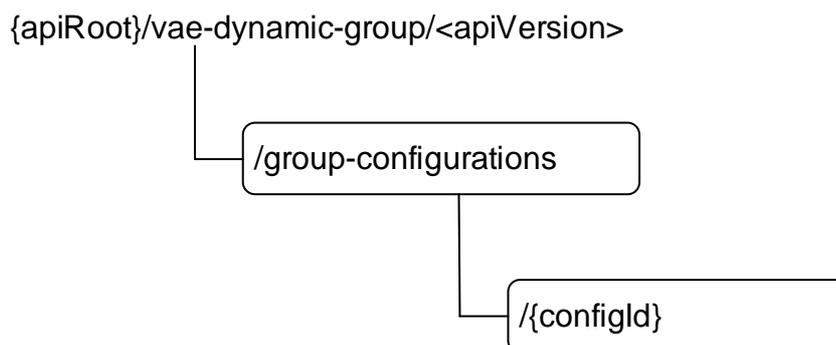


Figure 6.4.3.1-1: Resource URI structure of the VAE_DynamicGroup API

Table 6.4.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.4.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Group Configurations	{apiRoot}/vae-dynamic-group/<apiVersion>/group-configurations	POST	Create a new Individual Group Configuration resource for a V2X group ID.
Individual Group Configuration	{apiRoot}/vae-dynamic-group/<apiVersion>/group-configurations /{configId}	GET	Read the Individual Group Configuration resource.
		DELETE	Delete the Individual Group Configuration resource.

6.4.3.2 Resource: Group Configurations

6.4.3.2.1 Description

This resource represents the collection of the individual Application Requirement resources created in the VAE Server.

6.4.3.2.2 Resource Definition

Resource URI: {apiRoot}/vae-dynamic-group/<apiVersion>/group-configurations

This resource shall support the resource URI variables defined in table 6.4.3.2.2-1.

Table 6.4.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.4.1
apiVersion	string	See clause 6.4.1

6.4.3.2.3 Resource Standard Methods

6.4.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.4.3.2.3.1-1.

Table 6.4.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.4.3.2.3.1-2 and the response data structures and response codes specified in table 6.4.3.2.3.1-3.

Table 6.4.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
GroupConfigurationData	M	1	Parameters to create an individual Group Configuration resource.

Table 6.3.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
GroupConfigurationData	O	0..1	201 Created	An individual Group Configuration resource for the V2X group ID is created successfully.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

Table 6.4.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/vae-dynamic-group/<apiVersion>/group-configurations/{configId}

6.4.3.2.4 Resource Custom Operations

None.

6.4.3.3 Resource: Individual Group Configuration

6.4.3.3.1 Description

The individual Group Configuration resource represents an individual Group Configuration created in the VAE Server and associated with the V2X group ID.

6.4.3.3.2 Resource definition

Resource URI: {apiRoot}/vae-dynamic-group/<apiVersion>/group-configurations /{configId}

This resource shall support the resource URI variables defined in table 6.2.3.3-1.

Table 6.4.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.4.1.
apiVersion	string	See clause 6.4.1
configId	string	Unique identifier of the individual group configuration resource for the V2X group ID.

6.4.3.3.3 Resource Standard Methods

6.4.3.3.3.1 GET

This method shall support the URI query parameters specified in table 6.4.3.3.3.1-1.

Table 6.4.3.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.4.3.3.3.1-2 and the response data structures and response codes specified in table 6.4.3.3.3.1-3.

Table 6.4.3.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.4.3.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
GroupConfigurationData	M	1	200 OK	An individual Group Configuration resource for the V2X group ID is returned successfully.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

6.4.3.3.3.2 DELETE

This method shall support the URI query parameters specified in table 6.4.3.3.3.2-1.

Table 6.4.3.3.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.4.3.3.3.2-2 and the response data structures and response codes specified in table 6.4.3.3.3.2-3.

Table 6.4.3.3.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.4.3.3.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

6.4.3.4 Resource Custom Operations

None.

6.4.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on VAE_DynamicGroup API.

6.4.5 Notifications

6.4.5.1 General

The VAE server and NF service consumer shall support the on-network dynamic group notifications using a separate HTTP connection towards an address as assigned the NF service consumer described in clause 6.4.5.2.

A VAE server and NF service consumer may support testing a notification connection as described in clause 6.4.5.3. A VAE server and NF service consumer may support the delivery of Notification using Websocket (IETF RFC 6455 [21]) as described in clause 6.4.5.4.

6.4.5.2 Notification Delivery using a separate HTTP connection

The descriptions in clause 5.2.5.2 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer;
- description of SCEF applies to the VAE server; and
- "notificationDestination" attribute is replaced by the "notifUri" attribute.

6.4.5.3 Notification Test Event

The descriptions in clause 5.2.5.3 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer; and
- description of SCEF applies to the VAE server.

6.4.5.4 Notification Delivery using Websocket

The descriptions in clause 5.2.5.4 of 3GPP TS 29.122 [22] apply with following differences:

- description of SCS/AS applies to the NF service consumer; and
- description of SCEF applies to the VAE server.

6.4.5.5 Methods

Table 6.4.5.5-1: Methods

Custom operation URI	Mapped HTTP method	Description
{notifUri}	POST	Notify the dynamic group information (i.e. group member joins or leaves).

6.4.5.6 Notify Dynamic Group

6.4.5.6.1 Description

This notification is used by the VAE Server to notify the dynamic group information (i.e. group member joins or leaves).

6.4.5.6.2 Operation Definition

This operation shall support the request data structures specified in table 6.4.5.6.2-1 and the response data structure and response codes specified in table 6.4.5.6.2-2.

Table 6.4.5.6.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
DynamicGroupNotification	M	1	Notify the dynamic group information (i.e. group member joins or leaves).

Table 6.3.5.6.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	.
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				

6.4.6 Data Model

6.4.6.1 General

This clause specifies the application data model supported by the API.

Table 6.4.6.1-1 specifies the data types defined for the VAE_DynamicGroup API.

Table 6.4.6.1-1: VAE_DynamicGroup specific Data Types

Data type	Section defined	Description	Applicability
DynamicGroupNotification	6.3.6.2.3		
GroupConfigurationData	6.3.6.2.2		

Table 6.4.6.1-2 specifies data types re-used by the VAE_DynamicGroup service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the VAE_DynamicGroup service based interface.

Table 6.4.6.1-2: VAE_DynamicGroup re-used Data Types

Data type	Reference	Comments	Applicability
DateTime	3GPP TS 29.571 [11]	String with format "date-time" as defined in OpenAPI Specification [6].	
SupportedFeatures	3GPP TS 29.571 [11]		
TestNotification	3GPP TS 29.122 [22]	Represents a notification that can be sent to test whether a chosen notification mechanism works.	Notification_test_event
V2xGroupId	6.1.6.3.2		
V2xUeId	6.1.6.3.2	Identifier of the destination V2X UE	
WebsockNotifConfig	3GPP TS 29.122 [22]	Represents configuration for the delivery of notifications over Websockets.	Notification_websocket

6.4.6.2 Structured data types

6.4.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.4.6.2.2 Type: GroupConfigurationData

Table 6.4.6.2.2-1: Definition of type GroupConfigurationData

Attribute name	Data type	P	Cardinality	Description	Applicability
groupId	V2xGroupId	M	1	Indicates a group ID to be used for the V2X group.	
definition	string	M	1	Information about the V2X group.	
leaderId	V2xUeId	M	1	Indicates a UE ID to be used for user controlled group join.	
duration	DateTime	O	0..1	Identifies the absolute time at which the related Individual Group Configuration resource is considered to expire. When omitted in the request, it indicates the resource is requested to be valid forever by the NF service consumer. When omitted in the response, it indicates the resource is set to valid forever by the VAE server	
notifUri	Uri	M	1	Identifies the recipient of V2X dynamic group notification sent by the VAE server.	
requestTestNotification	boolean	O	0..1	Set to true by the NF service consumer to request the VAE server to send a test notification as defined in clause 6.1.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	O	0..1	Configuration parameters to set up notification delivery over WebSocket protocol as defined in clause 6.1.5.4.	Notification_websocket
suppFeat	SupportedFeatures	C	0..1	Indicates the features supported by the service consumer and VAE server. It shall be included in the request and response of the Creation of Individual Group Configuration resource.	

6.4.6.2.3 Type: DynamicGroupNotification

Table 6.4.6.2.2-1: Definition of type DynamicGroupNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
resourceUri	Uri	M	1	The resource URI of the individual Group Configuration related to the notification.	
joinedUeIds	array(V2xUeId)	O	1..N	The joined group member(s).	
leftUeIds	array(V2xUeId)	O	1..N	The left group member(s).	

6.4.6.3 Simple data types and enumerations

6.4.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.4.6.3.2 Simple data types

The simple data types defined in table 6.4.6.3.2-1 shall be supported.

Table 6.4.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

6.4.7 Error Handling

6.4.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of 3GPP TS 29.500 [2].

6.4.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the VAE_DynamicGroup API.

6.4.7.3 Application Errors

The application errors defined for the VAE_DynamicGroup service are listed in Table 6.4.7.3-1.

Table 6.4.7.3-1: Application errors

Application Error	HTTP status code	Description

6.4.8 Feature negotiation

The optional features in table 6.4.8-1 are defined for the VAE_DynamicGroup API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [2].

Table 6.4.8-1: Supported Features

Feature number	Feature Name	Description
1	Notification_test_event	The testing of notification connection is supported according to clause 6.4.5.3.
2	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 6.4.5.4. This feature requires that the Notification_test_event feature is also supported.

6.5 VAE_ServiceContinuity Service API

6.5.1 Introduction

The VAE_ServiceContinuity shall use the VAE_ServiceContinuity API.

The API URI of the VAE_ServiceContinuity API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URIs used in HTTP requests from the NF service consumer towards the VAE Server shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [3], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [3].
- The <apiName> shall be "vae-service-continuity".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.5.3.

6.5.2 Usage of HTTP

6.5.2.1 General

Support of HTTP/1.1 (IETF RFC 7230 [12], IETF RFC 7231 [13], IETF RFC 7232 [14], IETF RFC 7233 [15], IETF RFC 7234 [16] and IETF RFC 7235 [17]) over TLS (IETF RFC 5246 [18]) is mandatory and support of HTTP/2 as specified in clause 5 of 3GPP TS 29.500 [2] is recommended. A V2X application specific server desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 7540 [5].

HTTP/2, shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [2].

An OpenAPI [6] specification of HTTP messages and content bodies for the VAE_ServiceContinuity is contained in Annex A.6.

6.5.2.2 HTTP standard headers

6.5.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [2] for the usage of HTTP standard headers.

6.5.2.2.2 Content type

JSON, IETF RFC 8259 [7], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [2]. The use of the JSON format shall be signalled by the content type "application/json".

6.5.2.3 HTTP custom headers

6.5.2.3.1 General

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [2] shall be applicable.

6.5.3 Resources

6.5.3.1 Overview

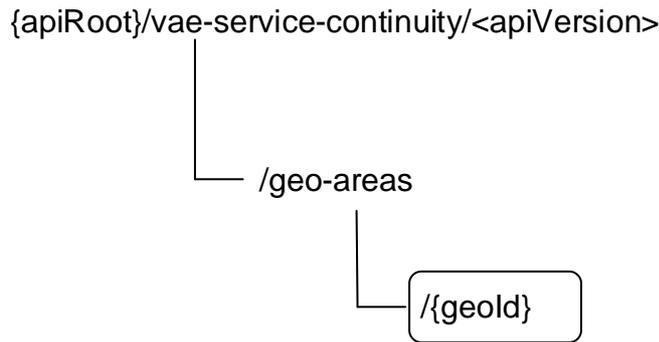


Figure 6.5.3.1-1: Resource URI structure of the VAE_ServiceContinuity API

Table 6.5.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.5.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Individual Geographical Area	{apiRoot}/vae-service-continuity/<apiVersion>/geo-areas/{geold}	GET	Query the Individual Geographical Area resource.

6.5.3.2 Resource: Individual Geographical Area

6.5.3.2.1 Description

This resource represents the individual geographical area resource in the VAE Server.

6.5.3.2.2 Resource Definition

Resource URI: {apiRoot}/vae-service-continuity/<apiVersion>/geo-areas/{geoId}

This resource shall support the resource URI variables defined in table 6.5.3.2.2-1.

Table 6.5.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.5.1
apiVersion	string	See clause 6.5.1
geold	string	Geographical area id.

6.5.3.2.3 Resource Standard Methods

6.5.3.2.3.1 GET

This method shall support the URI query parameters specified in table 6.5.3.2.3.1-1.

Table 6.5.3.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
service-id	V2xServiceId	M	1	V2X service id	
supp-feat	SupportedFeatures	O	0..1	To filter irrelevant responses related to unsupported features.	

This method shall support the request data structures specified in table 6.5.3.2.3.1-2 and the response data structures and response codes specified in table 6.5.3.2.3.1-3.

Table 6.5.3.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.5.3.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
V2xServiceInfo	M	1	200 OK	An individual geographical area resource including the designated V2X service id is returned successfully.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [2] shall also apply.				

6.5.3.2.4 Resource Custom Operations

None.

6.5.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on VAE_ServiceContinuity.

6.5.5 Notifications

Notifications are not applicable for the current Release.

6.5.6 Data Model

6.5.6.1 General

This clause specifies the application data model supported by the API.

Table 6.5.6.1-1 specifies the data types defined for the VAE_ServiceContinuity API.

Table 6.5.6.1-1: VAE_ServiceContinuity specific Data Types

Data type	Section defined	Description	Applicability
V2xServiceInfo	6.5.6.2.2		

Table 6.5.6.1-2 specifies data types re-used by the VAE_ServiceContinuity service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the VAE_ServiceContinuity service based interface.

Table 6.5.6.1-2: VAE_ServiceContinuity re-used Data Types

Data type	Reference	Comments	Applicability
V2xServiceId	6.1.6.3.2	Defines a V2X service ID.	

6.5.6.2 Structured data types

6.5.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.5.6.2.2 Type: V2xServiceInfo

Table 6.5.6.2.2-1: Definition of type V2xServiceInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
serviceIds	array(V2xServiceId)	M	1..N	Indicates a list of supported V2X service identifiers.	
suppFeat	SupportedFeatures	C	0..1	Indicates the features supported by the service consumer and VAE server. It shall be included if the query request includes supported features.	

6.5.6.3 Simple data types and enumerations

6.5.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.5.6.3.2 Simple data types

The simple data types defined in table 6.5.6.3.2-1 shall be supported.

Table 6.5.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

6.5.7 Error Handling

6.5.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of 3GPP TS 29.500 [2].

6.5.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the VAE_ServiceContinuity API.

6.5.7.3 Application Errors

The application errors defined for the VAE_ServiceContinuity service are listed in Table 6.5.7.3-1.

Table 6.5.7.3-1: Application errors

Application Error	HTTP status code	Description

6.5.8 Feature negotiation

The optional features in table 6.5.8-1 are defined for the VAE_ServiceContinuity API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [2].

Table 6.5.8-1: Supported Features

Feature number	Feature Name	Description

7 Security

TLS (IETF RFC 5246 [24]) shall be used to support the security communication between the VAE server and the V2X application specific server over Vs interface, and also between different VAE servers over VAE-E interface. The access to the VAE service APIs shall be authorized by means of OAuth2 protocol (see IETF RFC 6749 [23]), based on local configuration, using the "Client Credentials" authorization grant. If OAuth2 is used, a client, prior to consuming services offered by the VAE service APIs, shall obtain a "token" from the authorization server.

Annex A (normative): OpenAPI specification

A.1 General

This Annex is based on the OpenAPI 3.0.0 specification [6] and provides corresponding representations of all APIs defined in the present specification.

NOTE 1: An OpenAPIs representation embeds JSON Schema representations of HTTP message bodies.

This Annex shall take precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 2: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository hosted in ETSI Forge, that uses the GitLab software version control system (see clause 5B of the 3GPP TS 21.900 [8] and clause 5.3.1 of the 3GPP TS 29.501 [3] for further information).

A.2 VAE_MessageDelivery API

```

openapi: 3.0.0
info:
  version: 1.0.0
  title: VAE_MessageDelivery
  description: |
    API for VAE Message Delivery Service
    © 2020, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.486 V16.1.0 V2X Application Enabler (VAE) Services
  url: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.486/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/vae-message-delivery/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
paths:
  /subscriptions:
    post:
      summary: Create a new Individual Message Delivery Data Subscription resource
      operationId: CreateIndividualMessageDeliveryDataSubscription
      tags:
        - Message Delivery Data Subscriptions (Collection)
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/MessageDeliverySubscriptionData'
      responses:
        '201':
          description: The subscription was created successfully.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/MessageDeliverySubscriptionData'
          headers:
            Location:
              description: 'Contains the URI of the newly created resource'
              required: true
              schema:

```

```

    type: string
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  uplinkMessageDelivery:
    '{$request.body#/notifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/UplinkMessageDeliveryData'
  responses:
    '204':
      description: No Content, Notification was successful
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/subscriptions/{subscriptionId}:
  get:
    summary: Get an existing individual Message Delivery Subscription resource
    operationId: ReadIndividualMessageDeliverySubscription
    tags:
      - Individual Message Delivery Subscription (Document)
    parameters:
      - name: subscriptionId
        in: path
        description: String identifying a subscription to the Individual Message Delivery
Subscription
        required: true
        schema:
          type: string
    responses:
      '200':
        description: The subscription information is returned.
        content:
          application/json:

```

```

    schema:
      $ref: '#/components/schemas/MessageDeliverySubscriptionData'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
delete:
  summary: Delete an individual Message Delivery Subscription resource
  operationId: DeleteMessageDeliverySubscription
  tags:
    - Individual Message Delivery Subscription (Document)
  parameters:
    - name: subscriptionId
      in: path
      description: String identifying a subscription to the Individual Message Delivery
Subscription
      required: true
      schema:
        type: string
  responses:
    '204':
      description: The subscription was terminated successfully.
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/subscriptions/{subscriptionId}/message-deliveries:
  post:
    summary: VAE Message delivery resource create service Operation
    tags:
      - message deliveries collection (Collection)
    operationId: CreateDownlinkMessageDelivery
    parameters:
      - name: subscriptionId
        in: path
        description: String identifying a subscription to the Individual Message Delivery
Subscription
        required: true
        schema:
          type: string
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/DownlinkMessageDeliveryData'
      required: true
    responses:
      '201':
        description: Downlink Message Delivery Resource Created
        headers:

```

```

    Location:
      description: 'Contains the URI of the newly created resource'
      required: true
      schema:
        type: string
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/DownlinkMessageDeliveryData'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  description: Unexpected error
/subscriptions/{subscriptionId}/message-deliveries/{dlDeliveryId}:
get:
  summary: VAE Message delivery resource Read service Operation
  tags:
    - Individual downlink message delivery (Document)
  operationId: ReadIndividualDownlinkMessageDelivery
  parameters:
    - name: subscriptionId
      in: path
      description: String identifying a subscription to the Individual Message Delivery
Subscription
  required: true
  schema:
    type: string
- name: dlDeliveryId
  in: path
  description: Identifier of a downlink message delivery resource
  required: true
  schema:
    type: string
responses:
'200':
  description: OK. Resource representation is returned
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/DownlinkMessageDeliveryData'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29571_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
delete:
  summary: VAE Message delivery resource delete service Operation

```

```

tags:
  - Individual message delivery (Document)
operationId: DeleteMessageDelivery
parameters:
  - name: subscriptionId
    in: path
    description: String identifying a subscription to the Individual Message Delivery
Subscription
  required: true
  schema:
    type: string
  - name: dlDeliveryId
    in: path
    required: true
    description: Unique ID of the message delivery to be deleted
    schema:
      type: string
responses:
  '204':
    description: No Content (Successful deletion of the existing subscription)
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  description: Unexpected error
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    DownlinkMessageDeliveryData:
      type: object
      properties:
        ueId:
          $ref: '#/components/schemas/V2xUeId'
        groupId:
          $ref: '#/components/schemas/V2xGroupId'
        duration:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
        geoId:
          $ref: '#/components/schemas/GeoId'
        payload:
          $ref: '#/components/schemas/V2xMessagePayload'
      required:
        - payload
    MessageDeliverySubscriptionData:
      type: object
      properties:
        appSerId:
          $ref: '#/components/schemas/AppServerId'
        serviceId:
          $ref: '#/components/schemas/V2xServiceId'
        geoId:
          $ref: '#/components/schemas/GeoId'
        notifUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        requestTestNotification:
          type: boolean
          description: Set to true by the NF service consumer to request the VAE server to send a
test notification as defined in clause 6.1.5.3. Set to false or omitted otherwise.
        websocketNotifConfig:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
        suppFeat:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - appSerId
    - serviceId
    - notifUri
  UplinkMessageDeliveryData:
    type: object
    properties:
      resourceUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      ueId:
        $ref: '#/components/schemas/V2xUeId'
      geoId:
        $ref: '#/components/schemas/GeoId'
      payload:
        $ref: '#/components/schemas/V2xMessagePayload'
    required:
      - resourceUri
      - ueId
      - payload
  AppServerId:
    type: string
  V2xUeId:
    type: string
  V2xGroupId:
    type: string
  V2xServiceId:
    type: string
  GeoId:
    type: string
  V2xMessagePayload:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'

```

A.3 VAE_FileDistribution API

```

openapi: 3.0.0
info:
  version: 1.0.0
  title: VAE_FileDistribution
  description: |
    API for VAE File Distribution Service
    © 2020, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  externalDocs:
    description: 3GPP TS 29.486 V16.1.0 V2X Application Enabler (VAE) Services
    url: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.486/'
  security:
    - {}
    - oAuth2ClientCredentials: []
  servers:
    - url: '{apiRoot}/vae-file-distribution/v1'
      variables:
        apiRoot:
          default: https://example.com
          description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
paths:
  /file-distributions:
    post:
      summary: VAE File Distributions resource create service Operation
      tags:
        - file distributions collection (Document)
      operationId: CreateFileDistributions
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/FileDistributionData'
            required: true
      responses:
        '201':
          description: File Distribution Resource Created
          headers:
            Location:
              description: 'Contains the URI of the newly created resource'
              required: true
              schema:
                type: string

```

```

    content:
      application/json:
        schema:
          $ref: '#/components/schemas/FileDistributionData'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    description: Unexpected error
/file-distributions/{distributionId}:
  get:
    summary: Get an existing individual file distribution resource
    operationId: ReadIndividualFileDistribution
    tags:
      - Individual File Distribution (Document)
    parameters:
      - name: distributionId
        in: path
        description: Identifier of a file distribution resource
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK. Resource representation is returned
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/FileDistributionData'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29571_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  delete:
    summary: VAE File Distribution resource delete service Operation
    tags:
      - Individual file distribution (Document)
    operationId: DeleteFileDistribution
    parameters:
      - name: distributionId
        in: path
        required: true
        description: Unique ID of the file distribution to be deleted
        schema:
          type: string
    responses:
      '204':

```

```

    description: The subscription was terminated successfully.
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    description: Unexpected error
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
schemas:
  FileDistributionData:
    type: object
    properties:
      groupId:
        $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xGroupId'
      fileLists:
        type: array
        items:
          $ref: '#/components/schemas/FileList'
        minItems: 1
      serviceClass:
        type: string
      geoArea:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
      maxBitrate:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
      maxDelay:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - fileLists
      - geoArea
      - maxBitrate
      - maxDelay
  FileList:
    type: object
    properties:
      fileUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      fileDisplayUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      fileEarFetchTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      fileLatFetchTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      fileSize:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
      fileStatus:
        $ref: '#/components/schemas/FileStatus'
      completionTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      keepUpdateInterval:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      uniAvailability:
        type: boolean
      fileRepetition:
        type: integer
    required:
      - fileUri
      - fileDisplayUri
      - fileEarFetchTime

```

```

- fileLatFetchTime
- fileStatus
- completionTime
- keepUpdateInterval

FileStatus:
  anyOf:
  - type: string
    enum:
      - PENDING
      - FETCHED
      - PREPARED
      - TRANSMITTING
      - SENT
  - type: string

```

A.4 VAE_ApplicationRequirement API

```

openapi: 3.0.0
info:
  version: 1.0.0
  title: VAE_ApplicationRequirement
  description: |
    API for VAE Application Requirement Service
    © 2020, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  externalDocs:
    description: 3GPP TS 29.486 V16.1.0 V2X Application Enabler (VAE) Services
    url: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.486/'
  security:
    - {}
    - oAuth2ClientCredentials: []
  servers:
    - url: '{apiRoot}/vae-app-req/v1'
      variables:
        apiRoot:
          default: https://example.com
          description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
paths:
  /application-requirements:
    post:
      summary: VAE_Application_Requirements resource create service Operation
      tags:
        - application requirements collection (Document)
      operationId: CreateApplicationRequirement
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ApplicationRequirementData'
            required: true
      responses:
        '201':
          description: Application Requirement Resource Created
          headers:
            Location:
              description: 'Contains the URI of the newly created resource'
              required: true
              schema:
                type: string
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/ApplicationRequirementData'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  NotifyNetworkResource:
    '{$request.body#/notifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AppReqNotification'
        responses:
          '204':
            description: No Content, Notification was succesfull
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/application-requirement/{requirementId}:
  get:
    summary: VAE Application Requirement resource read service Operation
    tags:
      - Individual application requirement (Document)
    operationId: ReadApplicationRequirement
    parameters:
      - name: requirementId
        in: path
        description: Identifier of an application requirement resource
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK. Resource representation is returned
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ApplicationRequirementData'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29571_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'

```

```

    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  delete:
    summary: VAE Application Requirement resource delete service Operation
    tags:
      - Individual application requirement (Document)
    operationId: DeleteApplicationRequirement
    parameters:
      - name: requirementId
        in: path
        required: true
        description: Unique ID of the application requirement to be deleted
        schema:
          type: string
    responses:
      '204':
        description: The subscription was terminated successfully.
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  components:
    securitySchemes:
      oAuth2ClientCredentials:
        type: oauth2
        flows:
          clientCredentials:
            tokenUrl: '{tokenUrl}'
            scopes: {}
    schemas:
      ApplicationRequirementData:
        type: object
        properties:
          ueId:
            $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xUeId'
          groupId:
            $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xGroupId'
          duration:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
          serviceId:
            $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xServiceId'
          appRequirement:
            $ref: '#/components/schemas/ApplicationRequirement'
          notifUri:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
          requestTestNotification:
            type: boolean
            description: Set to true by the NF service consumer to request the VAE server to send a
            test notification as defined in clause 6.3.5.3. Set to false or omitted otherwise.
          websocketNotifConfig:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
          suppFeat:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        required:
          - serviceId
          - appRequirement
          - notifUri
      ApplicationRequirement:
        type: object
        properties:
          serviceLevel:
            $ref: '#/components/schemas/ServiceLevel'
      AppReqNotification:
        type: object

```

```

properties:
  resourceUri:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  result:
    $ref: '#/components/schemas/ReservationResult'
required:
  - resourceUri
  - result
ServiceLevel:
  anyOf:
  - type: string
    enum:
      - HIGH
      - MEDIUM
      - LOW
  - type: string
ReservationResult:
  anyOf:
  - type: string
    enum:
      - SUCCESSFUL
      - FAILURE
  - type: string

```

A.5 VAE_DynamicGroup API

```

openapi: 3.0.0
info:
  version: 1.0.0
  title: VAE_DynamicGroup
  description: |
    VAE_Dynamic_Group Service
    © 2020, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.486 V16.1.0 V2X Application Enabler (VAE) Services
  url: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.486/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/vae-dynamic-group/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause clause 4.4 of 3GPP TS 29.501
paths:
  /group-configurations:
    post:
      summary: VAE_Dynamice_Group resource create service Operation
      tags:
        - application requirements collection (Document)
      operationId: CreateGroupConfiguration
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/GroupConfigurationData'
            required: true
      responses:
        '201':
          description: Application Requirement Resource Created
          headers:
            Location:
              description: 'Contains the URI of the newly created resource'
              required: true
              schema:
                type: string
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/GroupConfigurationData'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'

```

```

'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  NotifyDynamicGroup:
    '{$request.body#/notifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/DynamicGroupNotification'
        responses:
          '204':
            description: No Content, Notification was succesfull
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/group-configuration/{configId}:
  get:
    summary: VAE Group Configuration resource read service Operation
    tags:
      - Individual Group Configuration(Document)
    operationId: ReadDynamicGroupConfiguration
    parameters:
      - name: configId
        in: path
        description: Identifier of an group configuration resource
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK. Resource representation is returned
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/GroupConfigurationData'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
delete:
  summary: VAE Group Configuration resource delete service Operation
  tags:
    - Individual group configuration (Document)
  operationId: DeleteGroupConfiguration
  parameters:
    - name: configId
      in: path
      required: true
      description: Unique ID of the group configuration to be deleted
      schema:
        type: string
  responses:
    '204':
      description: The subscription was terminated successfully.
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    GroupConfigurationData:
      type: object
      properties:
        groupId:
          $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xGroupId'
        definition:
          type: string
        leaderId:
          $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xUeId'
        notifUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        duration:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
        requestTestNotification:
          type: boolean
          description: Set to true by the NF service consumer to request the VAE server to send a
test notification as defined in clause 6.4.5.3. Set to false or omitted otherwise.
        websocketNotifConfig:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - groupId
        - definition
        - leaderId

```

```

    - notifUri
  DynamicGroupNotification:
    type: object
    properties:
      resourceUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      joinedUeIds:
        type: array
        items:
          $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xUeId'
        minItems: 1
      leftUeIds:
        type: array
        items:
          $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xUeId'
        minItems: 1
    required:
      - resourceUri

```

A.6 VAE_ServiceContinuity API

```

openapi: 3.0.0
info:
  version: 1.0.0
  title: VAE_Service Continuity
  description: |
    API for VAE Service Continuity Service
    © 2020, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  externalDocs:
    description: 3GPP TS 29.486 V16.1.0 V2X Application Enabler (VAE) Services
    url: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.486/'
  security:
    - {}
    - oAuth2ClientCredentials: []
  servers:
    - url: '{apiRoot}/vae-service-continuity/v1'
      variables:
        apiRoot:
          default: https://example.com
          description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
  paths:
    /geo-areas/{geoId}:
      get:
        summary: VAE service continuity query service operation
        tags:
          - Individual geographical area (Document)
        operationId: QueryServiceContinuity
        parameters:
          - name: geoId
            in: path
            description: Identifier of a geographical area
            required: true
            schema:
              type: string
          - name: service-id
            in: query
            description: Identifier of a V2X service
            required: true
            schema:
              $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xServiceId'
          - name: supp-feat
            in: query
            description: To filter irrelevant responses related to unsupported features
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        responses:
          '200':
            description: OK. Resource representation is returned
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/V2xServiceInfo'
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'

```

```
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29571_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    V2xServiceInfo:
      type: object
      properties:
        serviceIds:
          type: array
          items:
            $ref: 'TS29486_VAE_MessageDelivery.yaml#/components/schemas/V2xServiceId'
          minItems: 1
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - serviceIds
```

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-06						TS skeleton of V2X Application Enabler (VAE) Services	0.0.0
2019-09	CT3#105					Inclusion of C3-193499, C3-193310, C3-193501, C3-193603, C3-193604 and editorial changes from Rapporteur	0.1.0
2019-10	CT3#106					Inclusion of C3-193142, C3-194143, C3-194309, C3-194417, C3-194311 and editorial changes from Rapporteur	0.2.0
2019-11	CT3#107					Inclusion of C3-195320, C3-195102, C3-195321, C3-195322, C3-195323, C3-195407 and editorial changes from Rapporteur	0.3.0
2020-02	CT3#108e					Inclusion of C3-201341, C3-201342, C3-201343, C3-201344, C3-201345, C3-201453, C3-201454, C3-201455 and editorial changes from Rapporteur	0.4.0
2020-03	CT#87e	CP-200186				TS sent to plenary for approval	1.0.0
2020-03	CT#87e	CP-200186				TS approved by plenary	16.0.0
2020-06	CT#88e	CP-201251	0001	1	B	Apiversion of VAE_FileDistribution API	16.1.0
2020-06	CT#88e	CP-201251	0003	-	F	Correction to DELETE method of VAE_FileDistribution API	16.1.0
2020-06	CT#88e	CP-201251	0004	1	F	Editorial corrections of 29.486	16.1.0
2020-06	CT#88e	CP-201251	0005	1	F	Storage of YAML files	16.1.0
2020-06	CT#88e	CP-201256	0006	1	F	URI of the VAE APIs	16.1.0
2020-06	CT#88e	CP-201251	0007	1	F	Correct resource tree and service	16.1.0
2020-06	CT#88e	CP-201251	0009	1	F	Corrections to apiVersion	16.1.0
2020-06	CT#88e	CP-201251	0010	1	F	Supported headers, Resource Data type and yaml mapping	16.1.0
2020-06	CT#88e	CP-201255	0011	-	F	Update of OpenAPI version and TS version in externalDocs field	16.1.0

History

Document history		
V16.1.0	August 2020	Publication