



LTE;
5G;
5G System;
Network Exposure (NE)
function services for Non-IP Data Delivery (NIDD);
Stage 3
(3GPP TS 29.541 version 16.5.0 Release 16)



Reference

RTS/TSGC-0429541vg50

Keywords

5G,LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2021.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.
oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and
of the oneM2M Partners.
GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	7
2 References	7
3 Definitions, symbols and abbreviations	8
3.1 Terms.....	8
3.2 Symbols.....	8
3.3 Abbreviations	8
4 Overview	8
4.1 Introduction	8
5 Services offered by the NEF for NIDD	9
5.1 Introduction	9
5.2 Nnef_SMContext Service	9
5.2.1 Service Description.....	9
5.2.2 Service Operations	9
5.2.2.1 Introduction.....	9
5.2.2.2 Create Service Operation	10
5.2.2.2.1 General	10
5.2.2.3 Delete Service Operation	11
5.2.2.3.1 General	11
5.2.2.4 Status Notify Service Operation.....	11
5.2.2.4.1 General	11
5.2.2.4.2 Notify of Individual SM Context Release (Nnef_SMContext_DeleteNotify).....	12
5.2.2.5 Update Service Operation	12
5.2.2.5.1 General	12
5.2.2.6 Deliver Service Operation.....	13
5.2.2.6.1 General	13
6 API Definitions	14
6.1 Nnef_SMContext Service API	14
6.1.1 Introduction.....	14
6.1.2 Usage of HTTP	14
6.1.2.1 General.....	14
6.1.2.2 HTTP standard headers	14
6.1.2.2.1 General	14
6.1.2.2.2 Content type	14
6.1.2.3 HTTP custom headers	14
6.1.3 Resources.....	15
6.1.3.1 Overview	15
6.1.3.2 Resource: SM Contexts Collection	15
6.1.3.2.1 Description	15
6.1.3.2.2 Resource Definition.....	16
6.1.3.2.3 Resource Standard Methods	16
6.1.3.2.3.1 POST.....	16
6.1.3.2.4 Resource Custom Operations	17
6.1.3.3 Resource: Individual SM Context	17
6.1.3.3.1 Description	17
6.1.3.3.2 Resource Definition.....	17
6.1.3.3.3 Resource Standard Methods	17
6.1.3.3.4 Resource Custom Operations	17
6.1.3.3.4.1 Overview.....	17

6.1.3.3.4.2	Operation: release	18
6.1.3.3.4.2.1	Description	18
6.1.3.3.4.2.2	Operation Definition	18
6.1.3.3.4.3	Operation: update	19
6.1.3.3.4.3.1	Description	19
6.1.3.3.4.3.2	Operation Definition	19
6.1.3.3.4.4	Operation: deliver	20
6.1.3.3.4.4.1	Description	20
6.1.3.3.4.4.2	Operation Definition	20
6.1.5	Notifications	21
6.1.5.1	General	21
6.1.5.2	Status Notification	22
6.1.5.2.1	Description	22
6.1.5.2.2	Target URI	22
6.1.5.2.3	Standard Methods	22
6.1.5.2.3.1	POST	22
6.1.6	Data Model	23
6.1.6.1	General	23
6.1.6.2	Structured data types	24
6.1.6.2.1	Introduction	24
6.1.6.2.2	Type: SmContextCreateData	25
6.1.6.2.3	Type: SmContextCreatedData	26
6.1.6.2.4	Type: SmContextReleaseData	26
6.1.6.2.5	Type: SmContextReleasedData	27
6.1.6.2.6	Type: SmContextStatusNotification	27
6.1.6.2.7	Type: NiddInformation	27
6.1.6.2.8	Type: SmContextConfiguration	28
6.1.6.2.9	Type: SmallDataRateControl	28
6.1.6.2.10	Type: SmContextUpdateData	29
6.1.6.2.11	Type: DeliverReqData	29
6.1.6.3	Simple data types and enumerations	29
6.1.6.3.1	Introduction	29
6.1.6.3.2	Simple data types	29
6.1.6.3.3	Enumeration: SmContextStatus	29
6.1.6.3.4	Enumeration: SmallDataRateControlTimeUnit	30
6.1.6.3.5	Enumeration: ReleaseCause	30
6.1.7	Error Handling	30
6.1.7.1	General	30
6.1.7.2	Protocol Errors	30
6.1.7.3	Application Errors	30
6.1.8	Feature negotiation	31
6.1.9	Security	31
6.1.10	HTTP redirection	31
Annex A (normative):	OpenAPI specification	32
A.1	General	32
A.2	Nnef_SMContext API	32
Annex B (informative):	Change history	39
History	40	

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

shall indicates a mandatory requirement to do something

shall not indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

should indicates a recommendation to do something

should not indicates a recommendation not to do something

may indicates permission to do something

need not indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

can indicates that something is possible

cannot indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

will indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

will not indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

might indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the stage 3 protocol and data model for the Nnef Service Based South-Bound Interfaces for NIDD. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the NEF.

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2] and 3GPP TS 23.502 [3].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI 3.0.0 Specification", <https://github.com/OAI/OpenAPI-Specification/blob/master VERSIONS/3.0.0.md>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 7807: "Problem Details for HTTP APIs".
- [14] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [15] 3GPP TS 29.522: "5G System; Network Exposure Function Northbound APIs; Stage 3".
- [16] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".
- [17] 3GPP TS 29.542: "5G System; Session management services for Non-IP Data Delivery (NIDD); Stage 3".

3 Definitions, symbols and abbreviations

3.1 Terms

Void.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

DNN	Data Network Name
MO	Mobile Originated
NEF	Network Exposure Function
NIDD	Non-IP Data Delivery
SM	Session Management
SMF	Session Management Function
NSSAI	Network Slice Selection Assistance Information
RDS	Reliable Data Service
SUPI	Subscription Permanent Identifier

4 Overview

4.1 Introduction

Within the 5GC, the NEF offers NIDD services to the NF (e.g. SMF) via the Nnef service based southbound interface (see 3GPP TS 23.501 [2] and 3GPP TS 23.502 [3]).

Figure 4.1-1 provides the reference model (in service based interface representation and in reference point representation), with focus on the NEF and the scope of the present specification.

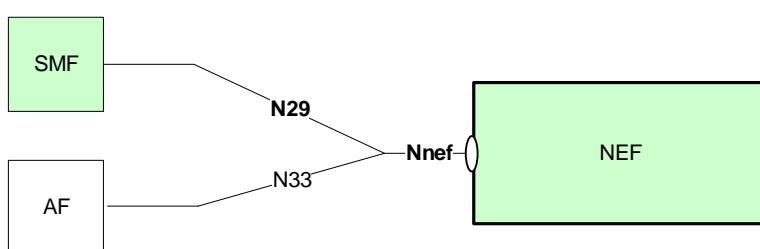


Figure 4.1-1: Reference model – NEF

The functionalities supported by the NEF are listed in clause 6.2.5 of 3GPP TS 23.501 [2].

5 Services offered by the NEF for NIDD

5.1 Introduction

The table 5.1-1 shows the NEF Services and Service Operations for NIDD:

Table 5.1-1 List of NEF Services for NIDD

Service Name	Service Operations	Operation Semantics	Example Consumer(s)	Mapped Service Operation
Nnef_SMContext	Create	Request/Response	SMF	Nnef_SMContext_Create
	Delete	Request/Response	SMF	Nnef_SMContext_Delete
	Status Notify	Subscribe/Notify	SMF	Nnef_SMContext_DeleteNotify (NOTE)
	Update	Request/Response	SMF	
	Delivery	Request/Response	SMF	Nnef_SMContext_Delivery
NOTE: The Status Notify service operation models the Nnef_SMContext_DeleteNotify service operation specified in 3GPP TS 23.502 [3] (see clause 5.2.2.4.2).				

Table 5.1-2 summarizes the corresponding APIs defined for this specification.

Table 5.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
Nnef_SMContext	6.1	Nnef SMContext Service	TS29541_Nnef_SMContext.yaml	nnef-smcontext	A.2

5.2 Nnef_SMContext Service

5.2.1 Service Description

The service allows a NF to manage the SM Contexts on NEF for NIDD. A NF as service consumer (e.g. SMF) can create, update or release SM Contexts for NIDD on NEF. A created SM Context for NIDD may also be released by NEF.

5.2.2 Service Operations

5.2.2.1 Introduction

The Nnef_SMContext service supports following service operations:

- Create
- Delete
- StatusNotify
- Update
- Deliver

5.2.2.2 Create Service Operation

5.2.2.2.1 General

The Create service operation is used during the following procedure:

- SMF-NEF Connection Establishment procedure (see 3GPP TS 23.502 [3], clause 4.25.2)

The Create service operation is invoked by a NF Service Consumer (e.g. a SMF) towards the NEF, when the SMF received a PDU Session establishment request from the UE with PDU Session type of "Unstructured", and the subscription information corresponding to the UE requested DNN includes the "NEF Identity for NIDD". There shall be only one individual SM context per PDU session.

The NF Service Consumer (e.g. the SMF) shall create the SM Context for NIDD on NEF by sending the HTTP POST request towards the SM Contexts Collection resource as shown in Figure 5.2.2.2.1-1.

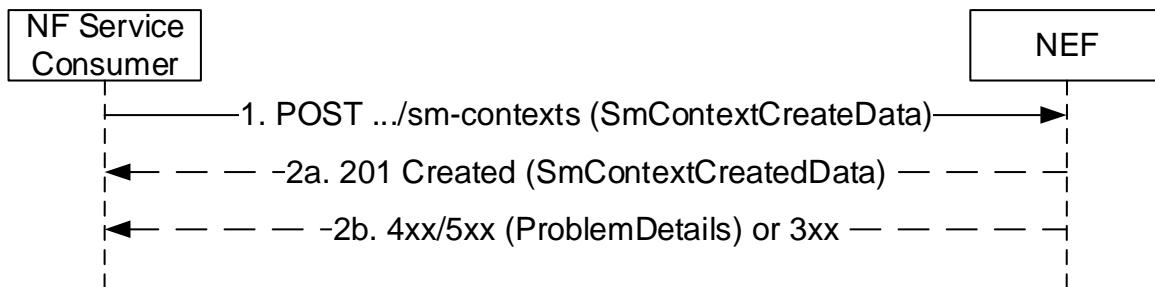


Figure 5.2.2.2.1-1: Create Service Operation

1. The NF Service Consumer shall send a POST request to the resource representing the SM Contexts Collection resource of the NEF with a "SmContextCreateData" object in request body, including:

- SUPI of the UE;
- PDU session ID;
- S-NSSAI associated with the PDU session;
- DNN of the PDU session;
- NIDD information, such as GPSI, AF ID, etc.;
- NEF ID, indicating the provisioned identity for NIDD service;
- URI of the Individual PDU session resource for downlink data delivery (see clause 6.1.3.2 of 3GPP TS 29.542 [17]);
- Notification URI to receive the SM Context notifications;
- optionally the indication of UE capability to support Reliable Data Service (RDS);
- optionally the configuration parameters, e.g. serving PLMN rate control, small data rate control, etc.;
- optionally small data rate control status, if small data rate control is previously enabled and to be resumed

- 2a. On success, "201 Created" shall be returned and the "Location" header shall be present and shall contain the URI of the created Individual SM Context resource.

The payload body of the POST response shall contain a "SmContextCreatedData" object, including:

- SUPI of the UE;
- PDU session ID;
- S-NSSAI associated with the PDU session;

- DNN of the PDU session;
- NEF ID, indicating the provisioned identity for NIDD service;
- optionally the indication of NEF capability to support Reliable Data Service (RDS);
- optionally the indication of NEF capability to support Extended Buffering;
- optionally Maximum Packet Size in bytes for NIDD data packet.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.2.3.1-3 shall be returned, the response body should contain a "ProblemDetails" object with "cause" attribute set to one of the application errors listed in Table 6.1.3.2.3.1-3.

5.2.2.3 Delete Service Operation

5.2.2.3.1 General

The Delete service operation is used during the following procedure:

- SMF Initiated SMF-NEF Connection Release procedure (see 3GPP TS 23.502 [3], clause 4.25.7)

The Delete service operation is invoked by a NF Service Consumer (e.g. a SMF) towards the NEF, when the PDU Session Release is initiated and a SM context for NIDD has been previously created on NEF for the PDU session.

The NF Service Consumer (e.g. the SMF) shall delete the SM Context for NIDD on NEF by invoking the "release" custom operation on the Individual SM Context resource as shown in Figure 5.2.2.3.1-1.

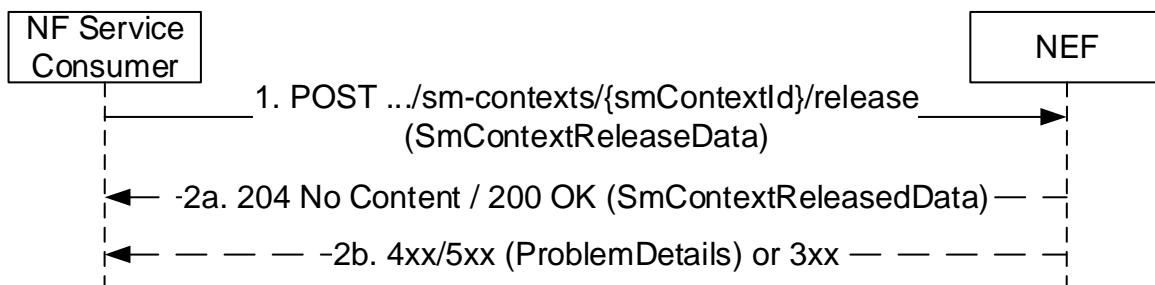


Figure 5.2.2.3.1-1: Delete Service Operation

1. The NF Service Consumer shall send a HTTP POST request towards the URI of "release" custom operation on the Individual SM Context resource received from the "Location" header during a successful Create service operation invocation (See clause 5.2.2.2). The request body shall contain a "SmContextReleaseData" object.
- 2a. On success, "204 No Content" shall be returned if no information is to be returned to the NF service consumer; otherwise "200 OK" shall be returned with a "SmContextReleasedData" object in response body including necessary information to the NF service consumer, e.g.:
 - Small Data Rate Control status, if Small Data Rate Control is enforced;
 - APN Rate Status, if APN Rate Control is enforced
- 2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.3.4.2-2 shall be returned, the response body should contain a "ProblemDetails" object with "cause" attribute set to one of the application errors listed in Table 6.1.3.3.4.2.2-2.

5.2.2.4 Status Notify Service Operation

5.2.2.4.1 General

The Status Notify service operation is used during the following procedure:

- NEF Initiated SMF-NEF Connection Release procedure (see 3GPP TS 23.502 [3], clause 4.25.8)

The Status Notify service operation is invoked by the NEF to inform a NF Service Consumer (e.g. a SMF), when the status of the Individual SM Context has changed.

The NEF shall inform the status change of the Individual SM Context resource by sending the HTTP POST method towards the Notification URI as shown in Figure 5.2.2.4.1-1.

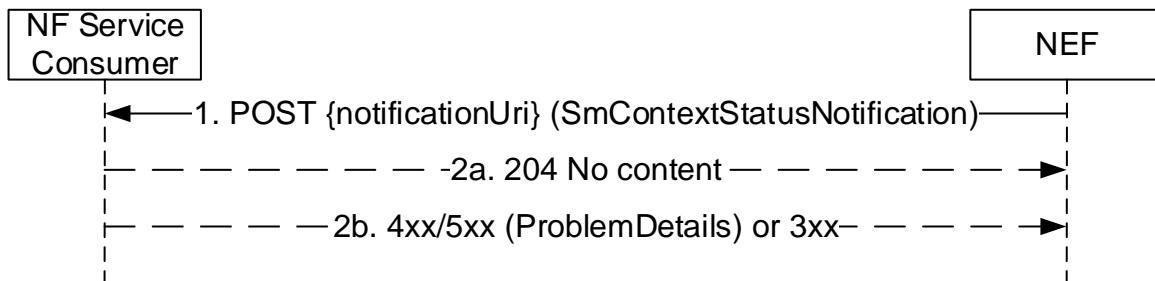


Figure 5.2.2.4.1-1: Status Notify Service Operation

1. The NEF shall send a POST request towards the Notification URI received in the Create service operation request (See clause 5.2.2.2). The request body shall contain a "SmContextStatusNotification" object indicating the changed status of the Individual SM Context resource. The "smContextId" attribute shall contain the URI of the SM Context resource that triggers the notification.
- 2a. On success, "204 No content" shall be returned without response body.
- 2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.5.2.3.1-2 shall be returned, the response body should contain a "ProblemDetails" object.

5.2.2.4.2 Notify of Individual SM Context Release (Nnef_SMContext_DeleteNotify)

During NEF initiated SMF-NEF connection release procedure (see 3GPP TS 23.502 [3], clause 4.25.8), the NEF shall send Status Notification to inform the NF service consumer that the Individual SM Context is released.

The requirements in clause 5.2.2.4.1 shall be applied, with following additions:


1. Same as step 1 of Figure 5.2.2.4.1-1, the NEF shall set the value of "status" attribute in the request body to "RELEASED".
 - If Small Data Rate Control is enforced, the response body should include the Small Data Rate Control status.
 - If APN Rate Control is enforced, the response body should include the APN Rate Status.

5.2.2.5 Update Service Operation

5.2.2.5.1 General

The Update service operation is invoked by a NF Service Consumer, e.g. a SMF, towards the NEF, when the SMF detects that some of the configurations of the PDU session has changed and the related SM Context for NIDD needs to be updated accordingly.

The NF Service Consumer (e.g. the SMF) shall update the SM Context for NIDD on NEF by invoking the "update" custom operation of the Individual SM Context resource as shown in Figure 5.2.2.5.1-1.

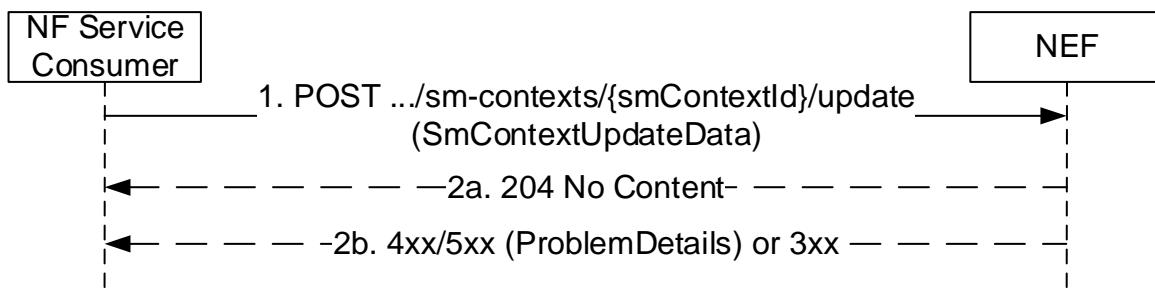**Figure 5.2.2.5.1-1: Update Service Operation**


1. The NF Service Consumer shall send a POST request to the URI of "update" custom operation on an Individual SM Context resource, with a "SmContextUpdateData" object in request body containing the attributes to be updated, e.g.:
 - URI of the resource to receive downlink data delivery for NIDD;
 - Notification URI to receive the SM Context notifications;
 - modified configuration parameters, e.g. serving PLMN rate control, small data rate control, etc.
- 2a. On success, "204 No Content" shall be returned.
- 2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.3.4.3.2-2 shall be returned, the response body should contain a ProblemDetails object with "cause" attribute set to one of the application errors listed in Table 6.1.3.3.4.3.2-2.

5.2.2.6 Deliver Service Operation

5.2.2.6.1 General

The Deliver service operation is invoked by a NF Service Consumer, e.g. a SMF, to transport Mobile Originated data packet via NEF.

The NF Service Consumer (e.g. the SMF) shall deliver Mobile Originate data via NEF by invoking the "deliver" custom operation of the Individual SM Context resource as shown in Figure 5.2.2.6.1-1.

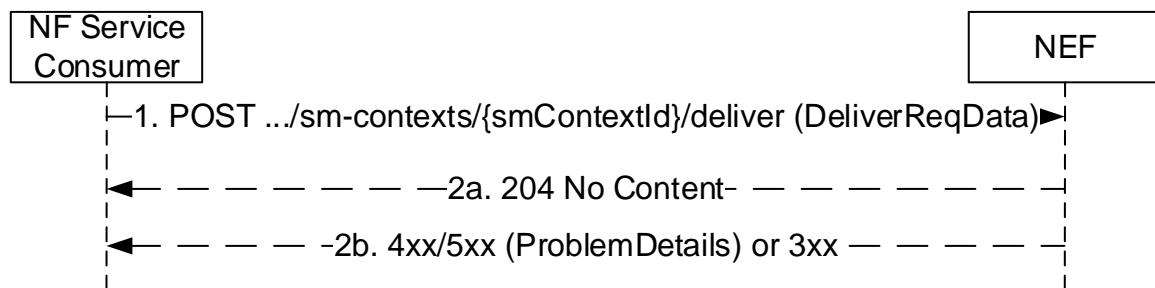**Figure 5.2.2.5.6-1: Deliver Service Operation**

1. The NF Service Consumer shall send a POST request to the URI of "deliver" custom operation on an Individual SM Context resource, with the request body containing:
 - the MO data as binary body part with content type set as "application/octet-stream"; and
 - a "DeliverReqData" object as another body part with "data" attribute refer to the MO data binary part.
- 2a. On success, "204 No Content" shall be returned.
- 2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.3.4.4.2-2 shall be returned. The response body should contain a ProblemDetails object with "cause" attribute set to one of the application errors listed in Table 6.1.3.3.4.4.2-2.

6 API Definitions

6.1 Nnef_SMContext Service API

6.1.1 Introduction

The Nnef_SMContext service shall use the Nnef_SMContext service API.

The request URI used in HTTP request from the NF service consumer towards the NF service producer shall have the structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nnef-smcontext".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.1.3.

6.1.2 Usage of HTTP

6.1.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nnef_SMContext API is contained in Annex A.

6.1.2.2 HTTP standard headers

6.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

6.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

6.1.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be applicable. In this release of the specification, no specific custom headers are defined for the Nnef_SMContext service.

6.1.3 Resources

6.1.3.1 Overview

Figure 6.1.3.1-1 describes the resource URI structure of the Nnef_SMContext API.

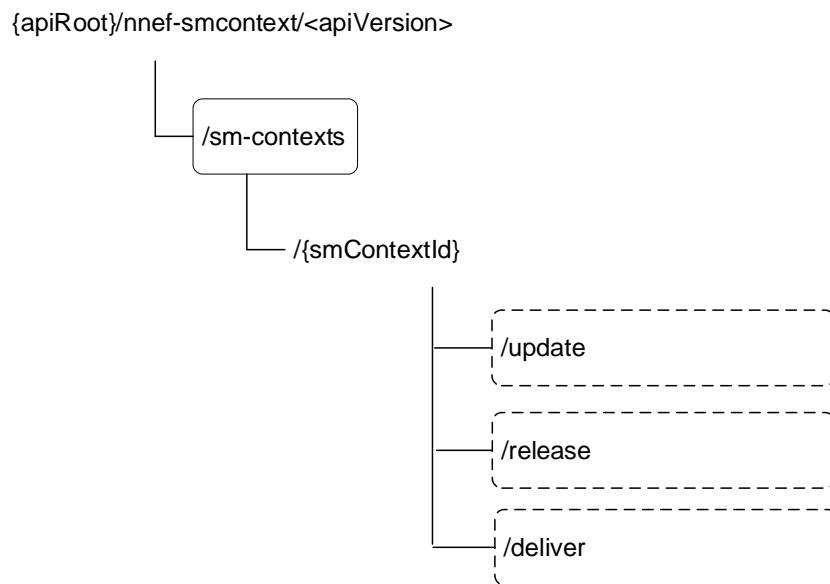


Figure 6.1.3.1-1: Resource URI structure of the Nnef_SMContext API

Table 6.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.1.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
SM Contexts Collection	{apiRoot}/nnef-smcontext/<apiVersion>/sm-contexts	POST	Creates an Individual SM Context resource.
Individual SM Context	{apiRoot}/nnef-smcontext/<apiVersion>/sm-contexts/{smContextId}/release	release (POST)	Deletes an Individual SM Context resource.
	{apiRoot}/nnef-smcontext/<apiVersion>/sm-contexts/{smContextId}/update	update (POST)	Updates an Individual SM Context resource.
	{apiRoot}/nnef-smcontext/<apiVersion>/sm-contexts/{smContextId}/deliver	deliver (POST)	Delivers Mobile Originated data packet.

6.1.3.2 Resource: SM Contexts Collection

6.1.3.2.1 Description

This resource represents the collection of the Individual SM Context resources created in the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [5]).

6.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nnef-smcontext/<apiVersion>/sm-contexts

This resource shall support the resource URI variables defined in table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See clause 6.1.1
apiVersion	See clause 6.1.1

6.1.3.2.3 Resource Standard Methods

6.1.3.2.3.1 POST

This method creates an Individual SM Context resource in the SM Context Collection.

This method shall support the URI query parameters specified in table 6.1.3.2.3.1-1.

Table 6.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.2.3.1-2 and the response data structures and response codes specified in table 6.1.3.2.3.1-3.

Table 6.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description	
SmContextCreateData	M	1	Representation of the Individual SM context to be created.	

Table 6.1.3.2.3.1-3: Data structures supported by the <method 1> Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmContextCreateData	M	1	201 Created	Successful creation of an Individual SM context.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
ProblemDetails	O	1	403 Forbidden	The "cause" attribute may be used to indicate the following application errors: - USER_UNKNOWN - NIDD_CONFIGURATION_NOT_AVAILABLE See table 6.1.7.3-1 for the description of these errors.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] other than those specified in the table above also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of 3GPP TS 29.500 [4]).				

Table 6.1.3.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.2.4 Resource Custom Operations

None.

6.1.3.3 Resource: Individual SM Context

6.1.3.3.1 Description

This resource represents an Individual SM Context resource in the NEF.

This resource is modelled with the Document resource archetype (see clause C.2 of 3GPP TS 29.501 [5]).

6.1.3.3.2 Resource Definition

Resource URI: {apiRoot}/nnef-smcontext/<apiVersion>/sm-contexts/{smContextId}

This resource shall support the resource URI variables defined in table 6.1.3.3.2-1.

Table 6.1.3.3.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See clause 6.1.1
apiVersion	See clause 6.1.1
smContextId	SM context identifier assigned by the NEF during the Create service operation.

6.1.3.3.3 Resource Standard Methods

There is no standard HTTP method supported by this resource.

6.1.3.3.4 Resource Custom Operations

6.1.3.3.4.1 Overview

This resource supports custom operation(s) as specified in table 6.1.3.3.4.1-1.

Table 6.1.3.3.4.1-1: Custom operations

Custom operation URI	Mapped HTTP method	Description
{resourceUri}/release	POST	Delete service operation.
{resourceUri}/update	POST	Update service operation.
{resourceUri}/deliver	POST	Deliver service operation

6.1.3.3.4.2 Operation: release

6.1.3.3.4.2.1 Description

This custom operation releases an Individual SM Context resource previously created in the NEF.

6.1.3.3.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.2.4.2.2-1 and the response data structure and response codes specified in table 6.1.3.2.4.2.2-2.

Table 6.1.3.3.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
SmContextReleasedData	M	1	Representation of the information to release the Individual SM context.

Table 6.1.3.3.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmContextReleasedData	M	1	200 OK	Successful release of an Individual SM context with information sent to the NF service consumer.
n/a			204 No Content	Successful release of an Individual SM context without information sent to the NF service consumer.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
ProblemDetails	O	1	404 Not Found	The "cause" attribute may be used to indicate the following application errors: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of these errors.
NOTE:	The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] other than those specified in the table above also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of 3GPP TS 29.500 [4]).			

Table 6.1.3.3.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.3.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.3.4.3 Operation: update

6.1.3.3.4.3.1 Description

This custom operation updates an individual SM Context resource.

6.1.3.3.4.3.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.3.4.3.2-1 and the response data structure and response codes specified in table 6.1.3.3.4.3.2-2.

Table 6.1.3.3.4.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
SmContextUpdateData	M	1	Representation of the updates to apply to the Individual SM context.

Table 6.1.3.3.4.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful update of the Individual SM context, when the NEF does not need to return information in the response.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
ProblemDetails	O	1	404 Not Found	The "cause" attribute may be used to indicate the following application errors: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of these errors.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] other than those specified in the table above also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of 3GPP TS 29.500 [4]).				

Table 6.1.3.3.4.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.3.4.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.3.4.4 Operation: deliver

6.1.3.3.4.4.1 Description

This custom operation transports Mobile Originated data packet via NEF.

6.1.3.3.4.4.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.3.4.4.2-1 and the response data structure and response codes specified in table 6.1.3.3.4.4.2-2.

Table 6.1.3.3.4.4.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description	
DeliverReqData	M	1	The data for Deliver service request, including the Mobile Originated data to be delivered via NEF.	

Table 6.1.3.3.4.4.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful delivery of Mobile Originate data via NEF.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing a different URI, or the same URI if a request is redirected to the same target resource via a different SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set.
ProblemDetails	O	1	404 Not Found	The "cause" attribute may be used to indicate the following application errors: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of these errors.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] other than those specified in the table above also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of 3GPP TS 29.500 [4]).				

Table 6.1.3.3.4.4.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.3.4.4.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF or NEF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.5 Notifications

6.1.5.1 General

This clause specifies the notifications provided by the Nnef_SMContext service.

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

6.1.5.2 Status Notification

6.1.5.2.1 Description

If the NF Service Consumer (e.g. the SMF) has provided the Notification URI for getting notified about change of SM Context status, the NEF shall notify the NF Service Consumer when the SM Context status is updated.

6.1.5.2.2 Target URI

The Notification URI "**{notificationUri}**" shall be used with the resource URI variables defined in table 6.1.5.2.2-1.

Table 6.1.5.2.2-1: Resource URI variables for this resource

Name	Definition
notificationUri	String formatted as URI with the Notification Uri

6.1.5.2.3 Standard Methods

6.1.5.2.3.1 POST

This method shall support the request data structures specified in table 6.1.5.2.3.1-1 and the response data structures and response codes specified in table 6.1.5.2.3.1-2.

Table 6.1.5.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
SmContextStatusNotification	M	1	Representation of the SM Context status notification.

Table 6.1.5.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful notification of the SM context status change
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The NF service consumer shall generate a Location header field containing a URI pointing to the endpoint of another NF service consumer to which the notification should be sent. If an SCP redirects the message to another SCP then the location header field shall contain the same URI or a different URI pointing to the endpoint of the NF service consumer to which the notification should be sent.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The NF service consumer shall generate a Location header field containing a URI pointing to the endpoint of another NF service consumer to which the notification should be sent. If an SCP redirects the message to another SCP then the location header field shall contain the same URI or a different URI pointing to the endpoint of the NF service consumer to which the notification should be sent.
NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of 3GPP TS 29.500 [4]).				

Table 6.1.5.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the notification is redirected

Table 6.1.5.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the notification is redirected

6.1.6 Data Model

6.1.6.1 General

This clause specifies the application data model supported by the API.

Table 6.1.6.1-1 specifies the data types defined for the Nnef_SMContext service based interface protocol.

Table 6.1.6.1-1: Nnef_SMContext specific Data Types

Data type	Clause defined	Description	Applicability
SmContextCreateData	6.1.6.2.2	Information within Create SM Context Request	
SmContextCreatedData	6.1.6.2.3	Information within Create SM Context Response	
SmContextReleaseData	6.1.6.2.4		
SmContextReleasedData	6.1.6.2.5		
SmContextStatusNotification	6.1.6.2.6	Information within Notify SM Context Status Request	
NiddInformation	6.1.6.2.7	NIDD information associated to the SM Context	
SmContextConfiguration	6.1.6.2.8	NIDD related configurations that should be applied for the SM Context on NEF	
SmallDataRateControl	6.1.6.2.9	Data rate control information	
SmContextUpdateData	6.1.6.2.10	Information within Update SM Context Request	
DeliverReqData	6.1.6.2.11	Information within Deliver Service Operation Request	
SmContextStatus	6.1.6.3.3	Enumeration of the status for an Individual SM Context	
SmallDataRateControlTimeUnit	6.1.6.3.4	Enumeration of the time units that are applied to data rate control	
ReleaseCause	6.1.6.3.5	Enumeration of causes for SM Context release	

Table 6.1.6.1-2 specifies data types re-used by the Nnef_SMContext service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the N_{<NF>} service based interface.

Table 6.1.6.1-2: Nnef_SMContext re-used Data Types

Data type	Reference	Comments	Applicability
Uri	3GPP TS 29.571 [14]	Uniform Resource Identifier	
Supi	3GPP TS 29.571 [14]	Subscription Permanent Identifier	
Gpsi	3GPP TS 29.571 [14]	General Public Subscription Identifier	
SupportedFeatures	3GPP TS 29.571 [14]	Supported features	
PduSessionId	3GPP TS 29.571 [14]	PDU Session Identifier	
Dnn	3GPP TS 29.571 [14]	Data Network Name	
Snssai	3GPP TS 29.571 [14]	Single Network Slice Selection Assistance Information	
ProblemDetails	3GPP TS 29.571 [14]	Error description	
SmallDataRateStatus	3GPP TS 29.571 [14]	Small Data Rate Control Status	
ExternalGroupId	3GPP TS 29.571 [14]	External Group Identifier	
RefToBinaryData	3GPP TS 29.571 [14]	Reference to binary data part	
RedirectResponse	3GPP TS 29.571 [14]	Redirect Response	

6.1.6.2 Structured data types

6.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.1.6.2.2 Type: SmContextCreateData

Table 6.1.6.2.2-1: Definition of type SmContextCreateData

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	M	1	This IE shall contain the subscriber permanent identify of the UE.	
pduSessionId	PduSessionId	M	1	This IE shall contain the PDU Session ID indicating the PDU session associated with the SM Context for NIDD to be created.	
dnn	Dnn	M	1	This IE shall contain the requested DNN.	
snssai	Snssai	M	1	This IE shall contain the requested S-NSSAI for the home PLMN.	
nefId	string	M	1	This IE shall contain the NEF ID of the target NEF (see clause 6.1.6.2.48 of 3GPP TS 29.510 [10]).	
dlNiddEndPoint	Uri	M	1	This IE shall contain the URI of the Individual PDU session resource (see clause 6.1.3.2 of 3GPP TS 29.542 [17]) provided by the NF service consumer to handle downlink NIDD data delivery.	
notificationUri	Uri	M	1	This IE shall contain the URI to receive SM Context Status Notifications sent by the NEF.	
niddInfo	NiddInformation	O	0..1	When present, this IE shall contain the information used for the SM Context.	
rdsSupport	boolean	O	0..1	When present, this IE shall indicate the UE capability to support RDS. The value of this IE shall be set as following: - true: UE supports RDS - false (default): UE does not support RDS	
smContextConfig	SmContextConfiguration	O	0..1	When present, this IE shall contain the configuration for the NIDD.	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.1.8 is supported.	

6.1.6.2.3 Type: SmContextCreatedData

Table 6.1.6.2.3-1: Definition of type SmContextCreatedData

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	M	1	This IE shall contain the subscriber permanent identify of the UE.	
pduSessionId	PduSessionId	M	1	This IE shall contain the PDU Session ID indicating the PDU session associated with the SM Context for NIDD to be created.	
dnn	Dnn	M	1	This IE shall contain the requested DNN.	
snssai	Snssai	M	1	This IE shall contain the requested S-NSSAI for the home PLMN.	
nefId	string	M	1	This IE shall contain the NEF ID of the target NEF (see clause 6.1.6.2.48 of 3GPP TS 29.510 [10]).	
rdsSupport	boolean	O	0..1	<p>When present, this IE shall indicate the NEF capability to support RDS.</p> <p>The value of this IE shall be set as following:</p> <ul style="list-style-type: none"> - true: NEF supports RDS - false (default): NEF does not support RDS 	
extBufSupport	boolean	O	0..1	<p>When present, this IE shall indicate whether Extended Buffering applies or not.</p> <p>The value of this IE shall be set as following:</p> <ul style="list-style-type: none"> - true: Extended Buffering applies - false (default): Extended Buffering does not apply 	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.1.8 is supported.	
maxPacketSize	integer	O	0..1	<p>Maximum Packet Size in bytes for NIDD data packet.</p> <p>When received from the NEF, SMF shall inform the UE of the Maximum Packet Size in the PCO in the PDU Session Establishment Accept message.</p>	

6.1.6.2.4 Type: SmContextReleaseData

Table 6.1.6.2.4-1: Definition of type SmContextReleaseData

Attribute name	Data type	P	Cardinality	Description	Applicability
cause	ReleaseCause	M	1	The cause to release the SM Context	

6.1.6.2.5 Type: SmContextReleasedData

Table 6.1.6.2.5-1: Definition of type SmContextReleasedData

Attribute name	Data type	P	Cardinality	Description	Applicability
smallDataRateStatus	SmallDataRateStatus	C	0..1	This IE shall be present if the Small Data Rate Control is enabled for the SM Context. When present, this IE shall contain the Small Data Rate Control Status, as specified in clause 5.31.14.3 of 3GPP TS 23.501 [2].	
apnRateStatus	ApnRateStatus	C	0..1	This IE shall be present if the APN Rate Control is enabled for the SM Context. When present, this IE shall contain the APN Rate Status, as specified in clause 5.4.4.40 of 3GPP TS 29.571 [14].	

6.1.6.2.6 Type: SmContextStatusNotification

Table 6.1.6.2.6-1: Definition of type SmContextStatusNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
status	SmContextStatus	M	1	This IE shall contain the current status of the SM Context	
smContextId	Uri	M	1	This IE shall contain the URI of the SM Context resource that triggers the notification.	
cause	ReleaseCause	M	1	The cause to release the SM Context	
smallDataRateStatus	SmallDataRateStatus	C	0..1	This IE shall be present if the SM Context is released and Small Data Rate Control is enabled for the SM Context. When present, this IE shall contain the Small Data Rate Control Status, as specified in clause 5.31.14.3 of 3GPP TS 23.501 [2].	
apnRateStatus	ApnRateStatus	C	0..1	This IE shall be present if the APN Rate Control is enabled for the SM Context. When present, this IE shall contain the APN Rate Status, as specified in clause 5.4.4.40 of 3GPP TS 29.571 [14].	

6.1.6.2.7 Type: NiddInformation

Table 6.1.6.2.7-1: Definition of type NiddInformation

Attribute name	Data type	P	Cardinality	Description	Applicability
extGroupId	ExternalGroupId	O	0..1	When present, this IE shall contain the External group Id of the UE.	
gpsi	Gpsi	O	0..1	When present, this IE shall contain the GPSI of the UE.	
afId	string	O	0..1	The string identifying the AF as the owner of associated NIDD Configuration, which is received from Nidd Information in UDM (See clause 6.1.6.2.35 of 3GPP TS 29.503 [16]).	

NOTE: At least one of the attributes in the table shall be present.

6.1.6.2.8 Type: SmContextConfiguration

Table 6.1.6.2.8-1: Definition of type SmContextConfiguration

Attribute name	Data type	P	Cardinality	Description	Applicability
smalDataRateControl	SmallDataRateControl	O	0..1	When present, this IE shall contain the configured Small Data Rate Control for downlink data, as specified in clause 5.31.14.3 of 3GPP TS 23.501 [2].	
smallDataRateStatus	SmallDataRateStatus	C	0..1	This IE shall contain the Small Data Rate Status if the Small Data Rate Status is available (see clause 5.31.14.3 of 3GPP TS 23.501 [2]).	
servPlmnDataRateCtl	integer	O	0..1	When present, this IE shall contain the maximum allowed number of Downlink NAS Data PDUs per deci hour of the serving PLMN, as specified in clause 5.31.14.2 of 3GPP TS 23.501 [2]. In Update service operation, this IE may be set to null value indicating the Serving PLMN Rate Control is disabled. Minimum: 10	

NOTE: At least one of the attributes in the table shall be present.

6.1.6.2.9 Type: SmallDataRateControl

Table 6.1.6.2.8-1: Definition of type SmallDataRateControl

Attribute name	Data type	P	Cardinality	Description	Applicability
timeUnit	SmallDataRateControlTimeUnit	M	1	This IE shall indicate the time unit for which the data rate control is applied.	
maxPacketRateUI	integer	O	0..1	If present, this IE shall indicate the maximum number of uplink packets allowed to be sent within the time unit. (NOTE 1)	
maxPacketRateDI	integer	O	0..1	If present, this IE shall indicate the maximum number of downlink packets allowed to be sent within the time unit. (NOTE 1)	
maxAdditionalPacketRateUI	integer	O	0..1	If present, this IE shall indicate the additional maximum number of uplink packets allowed to be sent within the time unit. (NOTE 2)	
maxAdditionalPacketRateDI	integer	O	0..1	If present, this IE shall indicate the additional maximum number of downlink packets allowed to be sent within the time unit. (NOTE 3)	

NOTE 1: At least one of parameters maxPacketRateUI, or maxPacketRateDI should be included.

NOTE 2: Parameter maxAdditionalPacketRateUI should be absent if parameter maxPacketRateUI is absent.

NOTE 3: Parameter maxAdditionalPacketRateDI should be absent if parameter maxPacketRateDI is absent.

6.1.6.2.10 Type: SmContextUpdateData

Table 6.1.6.2.10-1: Definition of type SmContextUpdateData

Attribute name	Data type	P	Cardinality	Description	Applicability
dlNiddEndPoint	Uri	O	0..1	When present, this IE shall contain a new URI of Individual PDU session resource (see clause 6.1.3.2 of 3GPP TS 29.542 [17]) handling downlink NIDD data delivery. The NEF shall send downlink data to the resource identified by the new URI after the update is completed.	
notificationUri	Uri	O	0..1	When present, this IE shall contain a new URI to receive SM Context Status Notifications sent by the NEF. The NEF shall send SM Contact Status Notification to this new URI after the update is completed.	
smContextConfig	SmContextConfiguration	O	0..1	When present, this IE shall contain the configuration for the NIDD.	
NOTE: At least one of the attributes in the table shall be present.					

6.1.6.2.11 Type: DeliverReqData

Table 6.1.6.2.12-1: Definition of type DeliverReqData

Attribute name	Data type	P	Cardinality	Description
data	RefToBinaryData	M	1	This IE shall contain the reference to Mobile Originated data to be delivered via NEF.

6.1.6.3 Simple data types and enumerations

6.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.1.6.3.2 Simple data types

The simple data types defined in table 6.1.6.3.2-1 shall be supported.

Table 6.1.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

6.1.6.3.3 Enumeration: SmContextStatus

The enumeration SmContextStatus represents status of Individual SM Context in the NEF. It shall comply with the provisions defined in table 6.1.5.3.3-1.

Table 6.1.6.3.3-1: Enumeration SmContextStatus

Enumeration value	Description	Applicability
"RELEASED"	Indicates that the Individual SM Context for NIDD is released.	

6.1.6.3.4 Enumeration: SmallDataRateControlTimeUnit

The enumeration SmallDataRateControlTimeUnit represents the allowed time unit. It shall comply with the provisions defined in table 6.1.5.3.3-1.

Table 6.1.6.3.4-1: Enumeration SmallDataRateControlTimeUnit

Enumeration value	Description	Applicability
"MINUTE"	Indicates the rate control is applied per minute.	
"HOUR"	Indicates the rate control is applied per hour.	
"DAY"	Indicates the rate control is applied per day.	
"WEEK"	Indicates the rate control is applied per week.	
"6MINUTES"	Indicates the rate control is applied per 6 minutes.	

6.1.6.3.5 Enumeration: ReleaseCause

The enumeration ReleaseCause represents cause for release of the SM Context in the NEF. It shall comply with the provisions defined in table 6.1.6.3.5-1.

Table 6.1.6.3.5-1: Enumeration ReleaseCause

Enumeration value	Description	Applicability
"PDU_SESSION_RELEASED"	Indicates the SM Context is to be released due to corresponding PDU Session is released.	

6.1.7 Error Handling

6.1.7.1 General

For the Nnef_SMContext API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nnef_SMContext API.

6.1.7.2 Protocol Errors

Protocol errors handling shall be supported as specified in clause 5.2.7 of 3GPP TS 29.500 [4]. No specific procedures for the Nnef_SMContext service are specified.

6.1.7.3 Application Errors

The application errors defined for the Nnef_SMContext service are listed in Table 6.1.7.3-1.

Table 6.1.7.3-1: Application errors

Application Error	HTTP status code	Description
"USER_UNKNOWN"	403	This application error indicates that the User Identity does not exist in the NEF.
"NIDD_CONFIGURATION_NOT_AVAILABLE"	403	This application error indicates that there is no valid NIDD configuration exists for the requested SM Context in the NEF, and NIDD configuration triggered by the NEF (see clause 4.4.12.2 of 3GPP TS 29.522 [15]) is not supported or has failed.
"CONTEXT_NOT_FOUND"	404	This application error indicates that the SM Context referred by the requested resource URI does not exist in the NEF.

6.1.8 Feature negotiation

The optional features in table 6.1.8-1 are defined for the Nnef_SMContext API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 6.1.8-1: Supported Features

Feature number	Feature Name	Description

6.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nnef_SMContext API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nnef_SMContext API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nnef_SMContext service.

The Nnef_SMContext API defines a single scope "nnef-smcontext" for the entire service, and it does not define any additional scopes at resource or operation level.

6.1.10 HTTP redirection

An HTTP request may be redirected to a different NEF service instance, within the same NEF or a different NEF of an NEF set, e.g. when an NEF service instance is part of an NEF (service) set or when using indirect communications (see 3GPP TS 29.500 [4]).

An SCP that reselects a different NEF producer instance will return the NF Instance ID of the new NEF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of 3GPP TS 29.500 [4].

If an NEF within an NEF set redirects a service request to a different NEF of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new NEF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of 3GPP TS 29.500 [4].

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the formal definition of the Nnef_SMContext API. It consists of OpenAPI 3.0.0 specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository, that uses the GitLab software version control system (see 3GPP TS 29.501 [5] clause 5.3.1 and 3GPP TR 21.900 [7] clause 5B).

A.2 Nnef_SMContext API

```
openapi: 3.0.0

info:
  title: Nnef_SMContext
  version: 1.0.2
  description: |
    Nnef SMContext Service.
    © 2021, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

  externalDocs:
    description: 3GPP TS 29.541 V16.4.0; 5G System; Session Management Services for Non-IP Data
    Delivery (NIDD).
    url: http://www.3gpp.org/ftp/Specs/archive/29_series/29.541/

  servers:
    - url: '{apiRoot}/nnef-smcontext/v1'
      variables:
        apiRoot:
          default: https://example.com
          description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

  security:
    - {}

  securitySchemes:
    - nnef-smcontext

paths:
  /sm-contexts:
    post:
      summary: Create SM Context
      operationId: Create
      tags:
        - SM Contexts Collection (Collection)
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SmContextCreateData'
      responses:
        '201':
          description: Success
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/SmContextCreatedData'
        headers:
```

```

Location:
  description: >
    'Contains the URI of the newly created Individual SM Context resource, according to
the structure:
  {apiRoot}/nnef-smcontext/<version>/sm-contexts/{smContextId}'
  required: true
  schema:
    type: string
'307':
  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  StatusNotify:
    '{$request.body#/notificationUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/SmContextStatusNotification'
        responses:
          '204':
            description: No Content, Notification was successful
          '307':
            $ref: 'TS29571_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29571_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/sm-contexts/{smContextId}/release:
  post:
    summary: Delete SM Context
    operationId: Delete
    tags:
      - Individual SM Context (Document)
    parameters:
      - name: smContextId
        in: path
        description: SM Context Resource ID
        required: true
        schema:
          type: string
    requestBody:

```

```

required: true
content:
  application/json:
    schema:
      $ref: '#/components/schemas/SmContextReleaseData'
responses:
  '200':
    description: OK. Resource representation is returned
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/SmContextReleasedData'
  '204':
    description: No Content.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/sm-contexts/{smContextId}/update:
post:
  summary: Update SM Context
  operationId: Update
  tags:
    - Individual SM Context (Document)
  parameters:
    - name: smContextId
      in: path
      description: SM Context Resource ID
      required: true
      schema:
        type: string
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/SmContextUpdateData'
  responses:
    '204':
      description: No Content.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29571_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/sm-contexts/{smContextId}/deliver:
post:
  summary: Deliver Uplink MO Data
  operationId: Deliver

```

```

tags:
  - Individual SM Context (Document)
parameters:
  - name: smContextId
    in: path
    description: SM Context Resource ID
    required: true
    schema:
      type: string
requestBody:
  required: true
  content:
    multipart/related: # message with binary body part(s)
    schema:
      type: object
      properties: # Request parts
        jsonData:
          $ref: '#/components/schemas/DeliverReqData'
        binaryMoData:
          type: string
          format: binary
encoding:
  jsonData:
    contentType: application/json
  binaryMoData:
    contentType: application/octet-stream
headers:
  Content-Id:
    schema:
      type: string
responses:
  '204':
    description: No Content.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    OAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nnef-smcontext: Access to the Nnef_SMContext API

schemas:
#
# Structured Data Types
#
  SmContextCreateData:
    type: object
    properties:
      supi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
      pduSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
      dnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      nefId:

```

```

type: string
description: This IE shall contain the NEF ID of the target NEF.
dlNiddEndPoint:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
notificationUri:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
niddInfo:
  $ref: '#/components/schemas/NiddInformation'
rdsSupport:
  type: boolean
  description: |
    When present, this IE shall indicate the UE capability to support RDS.
    The value of this IE shall be set as following
    - true  UE supports RDS
    - false (default)  UE does not support RDS
smContextConfig:
  $ref: '#/components/schemas/SmContextConfiguration'
supportedFeatures:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
required:
- supi
- pduSessionId
- dnn
- snssai
- nefId
- dlNiddEndPoint
- notificationUri

SmContextCreatedData:
type: object
properties:
  supi:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
  pduSessionId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
  dnn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  nefId:
    type: string
    description: This IE shall contain the NEF ID of the target NEF.
  rdsSupport:
    type: boolean
    default: false
    description: |
      When present, this IE shall indicate the NEF capability to support RDS.
      The value of this IE shall be set as following
      - true  NEF supports RDS
      - false (default)  NEF does not support RDS
  extBufSupport:
    type: boolean
    default: false
    description: |
      When present, this IE shall indicate whether Extended Buffering applies or not.
      The value of this IE shall be set as following
      - true  Extended Buffering applies
      - false (default)  Extended Buffering does not apply
  supportedFeatures:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
maxPacketSize:
  type: integer
required:
- supi
- pduSessionId
- dnn
- snssai
- nefId

SmContextReleaseData:
type: object
properties:
  cause:
    $ref: '#/components/schemas/ReleaseCause'
required:
- cause

SmContextReleasedData:

```

```

type: object
properties:
  smallDataRateStatus:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SmallDataRateStatus'
  apnRateStatus:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ApnRateStatus'

SmContextStatusNotification:
  type: object
  properties:
    status:
      $ref: '#/components/schemas/SmContextStatus'
    smContextId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    cause:
      $ref: '#/components/schemas/ReleaseCause'
    smallDataRateStatus:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SmallDataRateStatus'
    apnRateStatus:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ApnRateStatus'
  required:
    - status
    - smContextId

NiddInformation:
  type: object
  properties:
    extGroupId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ExternalGroupId'
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    afId:
      type: string
      description: When present, this IE shall contain the AF Id used for the SM Context.

SmContextConfiguration:
  type: object
  properties:
    smalDataRateControl:
      $ref: '#/components/schemas/SmallDataRateControl'
    smallDataRateStatus:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SmallDataRateStatus'
    servPlmnDataRateCtl:
      type: integer
      minimum: 10
      nullable: true
      description: >
        When present, this IE shall contain the maximum allowed number of
        Downlink NAS Data PDUs per deci hour of the serving PLMN, as specified
        in subclause 5.31.14.2 of 3GPP TS 23.501 [2].
        Minimum 10

SmallDataRateControl:
  type: object
  properties:
    timeUnit:
      $ref: '#/components/schemas/SmallDataRateControlTimeUnit'
    maxPacketRateUl:
      type: integer
    maxPacketRateDl:
      type: integer
    maxAdditionalPacketRateUl:
      type: integer
    maxAdditionalPacketRateDl:
      type: integer
  required:
    - timeUnit

SmContextUpdateData:
  type: object
  properties:
    dlNiddEndPoint:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    notificationUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    smContextConfig:
      $ref: '#/components/schemas/SmContextConfiguration'

```

```

DeliverReqData:
  type: object
  properties:
    data:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
  required:
    - data
#
# Simple Data Types
#


#
# Enumeration Data Types
#
SmContextStatus:
  anyOf:
    - type: string
      enum:
        - RELEASED
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
  description: >
    Possible values are
    - RELEASED: Indicates that the Individual SM Context for NIDD is released.

SmallDataRateControlTimeUnit:
  anyOf:
    - type: string
      enum:
        - MINUTE
        - HOUR
        - DAY
        - WEEK
        - 6MINUTES
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
  description: >
    Possible values are
    - MINUTE: Indicates the rate control is applied per minute.
    - HOUR: Indicates the rate control is applied per hour.
    - DAY: Indicates the rate control is applied per day.
    - WEEK: Indicates the rate control is applied per week.
    - 6MINUTES: Indicates the rate control is applied per 6 minutes.

ReleaseCause:
  anyOf:
    - type: string
      enum:
        - PDU_SESSION_RELEASED
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
  description: >
    The cause to release the SM Context. Possible values are
    - PDU_SESSION_RELEASED: Indicates that the Individual SM Context for NIDD is released.

```

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-09	CT4#93	C4-193889				Initial Draft.	0.1.0
2019-10	CT4#94	C4-194527				Incorporated pCRs agreed on CT4#94, including: C4-194208, C4-194440, C4-194441, C4-194442, C4-194443.	0.2.0
2019-11	CT4#95	C4-195642				Incorporated pCRs agreed on CT4#95, including: C4-195283, C4-195284, C4-195295.	0.3.0
2019-12	CT#86	CP-193072				TS presented for information	1.0.0
2020-03	CT4#96-e	C4-201265				Incorporated pCRs agreed on CT4#96-e, including: C4-200588, C4-200589, C4-200744, C4-200944, C4-200985, C4-201156.	1.1.0
2020-03	CT#87e	CP-200061				Presented for approval	2.0.0
2020-03	CT#87e					Approved at CT#87e	16.0.0
2020-06	CT#88e	CP-201046	0001	2	B	Add Extended Buffering	16.1.0
2020-06	CT#88e	CP-201071	0002		F	Storage of YAML files in ETSI Forge	16.1.0
2020-06	CT#88e	CP-201046	0003		F	Revert MO Exception Data Indication	16.1.0
2020-06	CT#88e	CP-201046	0004	1	F	Parameter supplement to Create Service	16.1.0
2020-06	CT#88e	CP-201046	0005	1	F	Parameter supplement to Delete Service	16.1.0
2020-06	CT#88e	CP-201046	0006	1	F	Parameter supplement to Status Notify Service	16.1.0
2020-06	CT#88e	CP-201046	0008	1	F	Miscellaneous Corrections	16.1.0
2020-06	CT#88e	CP-201073	0009		F	29.541 Rel-16 API version and External doc update	16.1.0
2020-12	CT#90e	CP-203032	0010		F	YAML files in 3GPP Forge	16.2.0
2021-03	CT#91e	CP-210037	0011	1	F	HTTP 3xx redirection	16.3.0
2021-03	CT#91e	CP-210078	0012	-	F	29.541 Rel-16 API version and External doc update	16.3.0
2021-06	CT#92e	CP-210059	0016	1	F	Redirect Response	16.4.0
2021-06	CT#92e	CP-210073	0018	-	F	29.541 Rel-16 API version and External doc update	16.4.0
2021-09	CT#93e	CP-212060	0019	-	F	3xx description correction for SCP	16.5.0

History

Document history		
V16.1.0	July 2020	Publication
V16.2.0	January 2021	Publication
V16.3.0	April 2021	Publication
V16.4.0	August 2021	Publication
V16.5.0	September 2021	Publication