

ETSI TS 129 574 V17.1.0 (2022-07)



**5G;
5G System;
Data Collection Coordination Services;
Stage 3
(3GPP TS 29.574 version 17.1.0 Release 17)**



Reference

RTS/TSGC-0329574vh10

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.

All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	7
1 Scope	9
2 References	9
3 Definitions, symbols and abbreviations	10
3.1 Definitions	10
3.2 Symbols.....	10
3.3 Abbreviations	10
4 Services offered by the DCCF.....	10
4.1 Introduction	10
4.2 Ndcf_DataManagement Service	11
4.2.1 Service Description.....	11
4.2.1.1 Overview.....	11
4.2.1.2 Service Architecture.....	11
4.2.1.3 Network Functions	12
4.2.1.3.1 Data Collection Coordination Function (DCCF).....	12
4.2.1.3.2 NF Service Consumers	12
4.2.2 Service Operations	13
4.2.2.1 Introduction.....	13
4.2.2.2 Ndcf_DataManagement_Subscribe service operation.....	13
4.2.2.2.1 General	13
4.2.2.2.2 Subscription for analytics notifications	13
4.2.2.2.3 Update subscription for analytic notifications	15
4.2.2.2.4 Subscription for data notifications.....	16
4.2.2.2.5 Update subscription for data notifications.....	17
4.2.2.3 Ndcf_DataManagement_Unsubscribe service operation.....	18
4.2.2.3.1 General	18
4.2.2.3.2 Unsubscribe from analytics notifications	18
4.2.2.3.3 Unsubscribe from data notifications	19
4.2.2.4 Ndcf_DataManagement_Notify service operation	19
4.2.2.4.1 General	19
4.2.2.4.2 Notification about subscribed analytics	19
4.2.2.4.3 Notification about subscribed data event.....	20
4.2.2.5 Ndcf_DataManagement_Fetch service operation.....	21
4.2.2.5.1 General	21
4.2.2.5.2 Retrieve notified analytics and data.....	21
4.3 Ndcf_ContextManagement Service	22
4.3.1 Service Description.....	22
4.3.1.1 Overview.....	22
4.3.1.2 Service Architecture.....	22
4.3.1.3 Network Functions	23
4.3.1.3.1 Data Collection Coordination Function (DCCF).....	23
4.3.1.3.2 NF Service Consumers	23
4.3.2 Service Operations	23
4.3.2.1 Introduction.....	23
4.3.2.2 Ndcf_ContextManagement_Register service operation	24
4.3.2.2.1 General	24
4.3.2.2.2 Register data collection profile to DCCF	24
4.3.2.3 Ndcf_ContextManagement_Update service operation.....	25
4.3.2.3.1 General	25
4.3.2.3.2 Update registered data collection profile.....	25
4.3.2.4 Ndcf_ContextManagement_Deregister service operation.....	26

4.3.2.4.1	General	26
4.3.2.4.2	Deregister Data collection profile.....	26
5	API Definitions	27
5.1	Ndcf_DataManagement Service API.....	27
5.1.1	Introduction.....	27
5.1.2	Usage of HTTP.....	27
5.1.2.1	General	27
5.1.2.2	HTTP standard headers	27
5.1.2.2.1	General	27
5.1.2.2.2	Content type	27
5.1.2.3	HTTP custom headers	27
5.1.3	Resources.....	28
5.1.3.1	Overview.....	28
5.1.3.2	Resource: DCCF Analytics Subscriptions	28
5.1.3.2.1	Description	28
5.1.3.2.2	Resource Definition.....	28
5.1.3.2.3	Resource Standard Methods	29
5.1.3.2.4	Resource Custom Operations	29
5.1.3.3	Resource: Individual DCCF Analytics Subscription.....	29
5.1.3.3.1	Description	29
5.1.3.3.2	Resource Definition.....	30
5.1.3.3.3	Resource Standard Methods	30
5.1.3.3.4	Resource Custom Operations	32
5.1.3.4	Resource: DCCF Data Subscriptions	32
5.1.3.4.1	Description	32
5.1.3.4.2	Resource Definition.....	32
5.1.3.4.3	Resource Standard Methods	32
5.1.3.4.4	Resource Custom Operations	33
5.1.3.5	Resource: Individual DCCF Data Subscription	33
5.1.3.5.1	Description	33
5.1.3.5.2	Resource Definition.....	33
5.1.3.5.3	Resource Standard Methods	33
5.1.3.5.4	Resource Custom Operations	35
5.1.4	Custom Operations without associated resources.....	35
5.1.5	Notifications	35
5.1.5.1	General	35
5.1.5.2	Analytics Notification	36
5.1.5.2.1	Description	36
5.1.5.2.2	Target URI.....	36
5.1.5.2.3	Standard Methods.....	36
5.1.5.3	Data Notification.....	37
5.1.5.3.1	Description	37
5.1.5.3.2	Target URI.....	37
5.1.5.3.3	Standard Methods.....	37
5.1.5.4	Fetch Notification	38
5.1.5.4.1	Description	38
5.1.5.4.2	Target URI.....	38
5.1.5.4.3	Standard Methods.....	38
5.1.5.4.3.1	POST.....	38
5.1.6	Data Model	39
5.1.6.1	General	39
5.1.6.2	Structured data types	41
5.1.6.2.1	Introduction	41
5.1.6.2.2	Type NdcfAnalyticsSubscription.....	42
5.1.6.2.3	Type NdcfDataSubscription	43
5.1.6.2.4	Type NdcfAnalyticsSubscriptionNotification.....	44
5.1.6.2.5	Type NdcfDataSubscriptionNotification	44
5.1.6.2.6	Type FormattingInstruction.....	44
5.1.6.2.7	Type ProcessingInstruction	45
5.1.6.2.8	Type ParameterProcessingInstruction	45
5.1.6.2.9	Type NotifSummaryReport	46

5.1.6.2.10	Type EventParamReport.....	47
5.1.6.2.11	Type ReportingOptions	48
5.1.6.2.12	Void.....	48
5.1.6.3	Simple data types and enumerations	48
5.1.6.3.1	Introduction	48
5.1.6.3.2	Simple data types.....	48
5.1.6.3.3	Enumeration: SummarizationAttribute.....	48
5.1.6.4	Data types describing alternative data types or combinations of data types	49
5.1.6.5	Binary data	49
5.1.7	Error Handling	49
5.1.7.1	General	49
5.1.7.2	Protocol Errors	49
5.1.7.3	Application Errors.....	49
5.1.8	Feature negotiation	49
5.1.9	Security	49
5.2	Ndpcf_ContextManagement Service API	50
5.2.1	Introduction.....	50
5.2.2	Usage of HTTP.....	50
5.2.2.1	General	50
5.2.2.2	HTTP standard headers	50
5.2.2.2.1	General	50
5.2.2.2.2	Content type	50
5.2.2.3	HTTP custom headers	50
5.2.3	Resources.....	51
5.2.3.1	Overview.....	51
5.2.3.2	Resource: DCCF Data Collection Profiles	51
5.2.3.2.1	Description	51
5.2.3.2.2	Resource Definition.....	51
5.2.3.2.3	Resource Standard Methods	52
5.2.3.2.4	Resource Custom Operations	52
5.2.3.3	Resource: Individual DCCF Data Collection Profile	52
5.2.3.3.1	Description	52
5.2.3.3.2	Resource Definition.....	52
5.2.3.3.3	Resource Standard Methods	53
5.2.3.3.3.1	PUT.....	53
5.2.3.3.3.2	DELETE	54
5.2.3.3.4	Resource Custom Operations	55
5.2.4	Custom Operations without associated resources	55
5.2.5	Notifications	55
5.2.6	Data Model	55
5.2.6.1	General	55
5.2.6.2	Structured data types	55
5.2.6.2.1	Introduction	55
5.2.6.2.2	Type: NdpcfDataCollectionProfile	56
5.2.6.3	Simple data types and enumerations	56
5.2.6.3.1	Introduction	56
5.2.6.3.2	Simple data types.....	56
5.2.6.4	Data types describing alternative data types or combinations of data types	56
5.2.6.5	Binary data	56
5.2.7	Error Handling	57
5.2.7.1	General	57
5.2.7.2	Protocol Errors	57
5.2.7.3	Application Errors.....	57
5.2.8	Feature negotiation	57
5.2.9	Security	57
Annex A (normative):	OpenAPI specification.....	58
A.1	General	58
A.2	Ndpcf_DataManagement API	58
A.3	Ndpcf_ContextManagement API	68
Annex B (informative):	Change history	72

History73

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the stage 3 protocol and data model for the Ndccf Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the Data Collection Coordination Function (DCCF).

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2], 3GPP TS 23.502 [3] and 3GPP TS 23.288 [14].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 7807: "Problem Details for HTTP APIs".
- [14] 3GPP TS 23.288: "Architecture enhancements for 5G System (5GS) to support network data analytics services".
- [15] 3GPP TS 29.520: "5G System; Network Data Analytics Services; Stage 3".
- [16] Void.
- [17] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [18] 3GPP TS 29.508: "5G System; Session Management Event Exposure Service; Stage 3".
- [19] 3GPP TS 29.518: "5G System; Access and Mobility Management Services; Stage 3".

- [20] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".
- [21] 3GPP TS 29.517: "5G System; Application Function Event Exposure Services; Stage 3".
- [22] 3GPP TS 29.591: "5G System; Network Exposure Function Southbound Services; Stage 3".
- [23] 3GPP TS 29.122: "T8 reference point for Northbound APIs".
- [24] IETF RFC 6901: "JavaScript Object Notation (JSON) Pointer".
- [25] 3GPP TS 29.575: "5G System; Analytics Data Repository Services; Stage 3".
- [26] 3GPP TS 29.576: "5G System; Messaging Framework Adaptor Services; Stage 3".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

None.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

None.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

ADRF	Analytics Data Repository Function
AF	Application Function
AMF	Access and Mobility Management Function
DCCF	Data Collection Coordination Function
NF	Network Function
NRF	Network Repository Function
NEF	Network Exposure Function
NSSF	Network Slice Selection Function
NWDAF	Network Data Analytics Function
PCF	Policy Control Function
SMF	Session Management Function
UDM	Unified Data Management

4 Services offered by the DCCF

4.1 Introduction

The Ndccf services are used for the DCCF to provide collected data.

The following services are specified for the NWDAF:

Table 4.1-1: Services provided by DCCF

Service Name	Description	Service Operations	Operation Semantics	Example Consumer(s)
Ndcf_DataManagement	This service enables the NF service consumers to subscribe to/unsubscribe from notifications for different collected data from the DCCF.	Subscribe	Subscribe / Notify	NWDAF, PCF, NSSF, AMF, SMF, NEF, AF, ADRF
		Unsubscribe		
		Notify		
		Fetch		
Ndcf_ContextManagement	This service enables the NF service consumers to register/deregister collected data in the DCCF.	Register	Request / Response	NWDAF, ADRF
		Update		
		Deregister		

Table 4.1-2 summarizes the corresponding APIs defined for this specification.

Table 4.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
Ndcf_DataManagement	5.1	DCCF Data Management Service	TS29574_Ndcf_DataManagement.yaml	ndcf-datamgmt	A.2
Ndcf_ContextManagement	5.2	DCCF Context Management Service	TS29574_Ndcf_ContextManagement.yaml	ndcf-contextmgmt	A.3

4.2 Ndcf_DataManagement Service

4.2.1 Service Description

4.2.1.1 Overview

The Ndcf_DataManagement service, as defined in 3GPP TS 23.288 [14], is provided by the Data Collection Coordination Function (DCCF).

This service:

- allows NF service consumers to subscribe, modify and unsubscribe for analytics or data related events;
- notifies NF service consumers with a corresponding subscription about observed events; and
- allows NF service consumers to retrieve analytics or data according to the Fetch Instructions provided by DCCF.

4.2.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Network Data Analytics Exposure architecture, including the DCCF architecture, is defined in 3GPP TS 23.288 [14].

Known consumers of the Ndcf_DataManagement service are:

- Policy Control Function (PCF)
- Network Slice Selection Function (NSSF)

- Access and Mobility Management Function (AMF)
- Session Management Function (SMF)
- Network Exposure Function (NEF)
- Application Function (AF)
- Network Data Analytics Function (NWDAF)
- Analytics Data Repository Function (ADRF)

The `Ndpcf_DataManagement` service is provided by the DCCF and consumed by the NF service consumers as shown in figure 4.2.1.2-1 for the SBI representation model and in figure 4.2.1.2-2 for the reference point representation model.

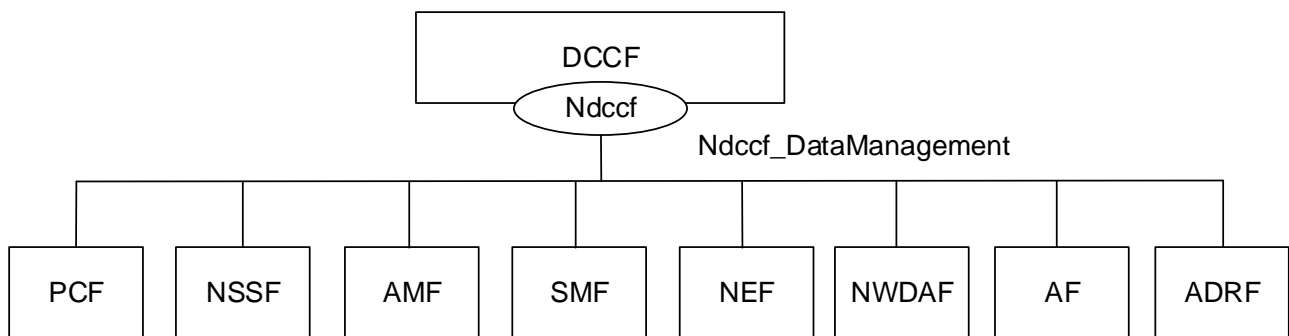


Figure 4.2.1.2-1: Ndpcf_DataManagement service architecture, SBI representation

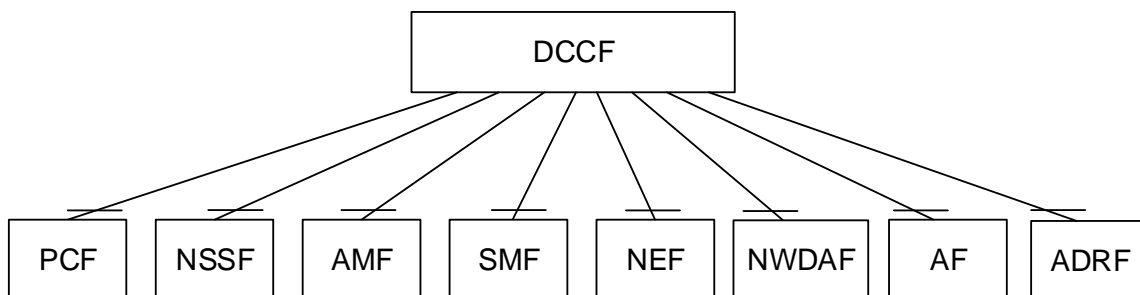


Figure 4.2.1.2-2: Ndpcf_DataManagement service architecture, reference point representation

4.2.1.3 Network Functions

4.2.1.3.1 Data Collection Coordination Function (DCCF)

The DCCF (Data Collection Coordination Function) provides the functionality to coordinate collection of analytics and/or data from one or more NFs based on requests from one or more NF service consumers.

4.2.1.3.2 NF Service Consumers

The NF service consumers for the `Ndpcf_DataManagement` service are as specified in 3GPP TS 29.520 [15] clause 4.2.1.3.2 for the `NnwdafeventsSubscription` service, with the following additions:

- The NWDAF as a service consumer supports also (un)subscription to the notification of data collection events from the DCCF.

4.2.2 Service Operations

4.2.2.1 Introduction

Service operations defined for the Ndcf_DataManagement Service are shown in table 4.2.2.1-1.

Table 4.2.2.1-1: Ndcf_DataManagement Service Operations

Service Operation Name	Description	Initiated by
Ndcf_DataManagement_Subscribe	This service operation is used by an NF service consumer to subscribe to, or modify a subscription in the DCCF for event notifications.	NF service consumer (NWDAF, PCF, NSSF, AMF, SMF, NEF, AF, ADRF)
Ndcf_DataManagement_Unsubscribe	This service operation is used by an NF service consumer to unsubscribe from event notifications.	NF service consumer (NWDAF, PCF, NSSF, AMF, SMF, NEF, AF, ADRF)
Ndcf_DataManagement_Notify	This service operation is used by the DCCF to report the detected event(s) to the NF service consumer if subscribed before.	DCCF
Ndcf_DataManagement_Fetch	This service operation is used by an NF service consumer to retrieve collected data from the DCCF.	NF service consumer (NWDAF, PCF, NSSF, AMF, SMF, NEF, AF)

4.2.2.2 Ndcf_DataManagement_Subscribe service operation

4.2.2.2.1 General

The Ndcf_DataManagement_Subscribe service operation is used by an NF service consumer to create or update a subscription for analytics or data notifications from the DCCF.

4.2.2.2.2 Subscription for analytics notifications

Figure 4.2.2.2.2-1 shows a scenario where the NF service consumer sends a request to the DCCF to subscribe for analytics notifications.

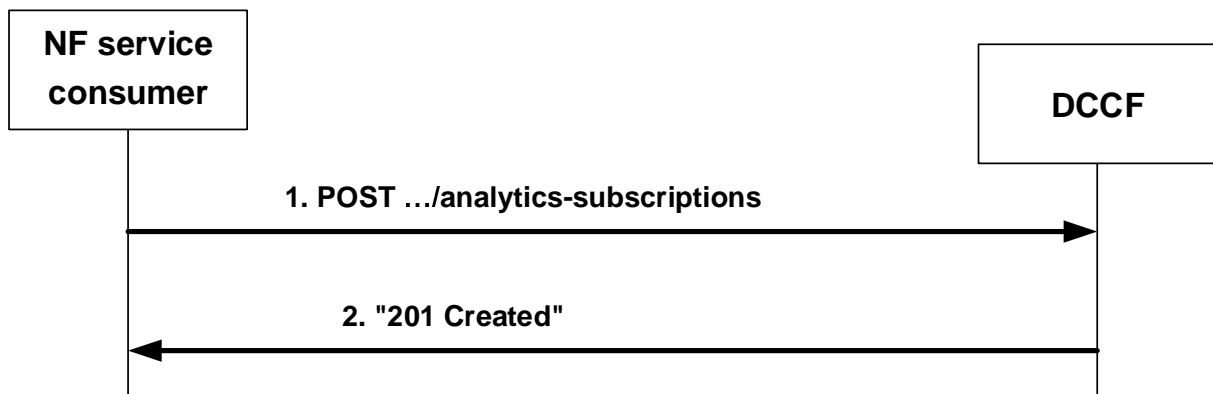


Figure 4.2.2.2.2-1: NF service consumer subscribes to analytics notifications

The NF service consumer shall invoke the Ndcf_DataManagement_Subscribe service operation to subscribe to analytics notification(s). The NF service consumer shall send an HTTP POST request with "{apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions" as Resource URI representing the "DCCF Analytics Subscriptions", as shown in figure 4.2.2.2.2-1, step 1, to create an "Individual DCCF Analytics Subscription" according

to the information in the message body. The NdccfAnalyticsSubscription data structure provided in the request body shall include:

- analytics subscription information within the "anaSub" attribute;
- a notification target address within the "anaNotifUri" attribute; and
- a notification correlation identifier in the "anaNotifCorrId" attribute;

and may include:

- formatting instructions within the "formatInstruct" attribute;
- processing instructions within the "procInstruct" attribute;
- a target NWDAF/ADRF identifier within the "targetNfId" attribute or a target NWDAF/ADRF set identifier within the "targetNfSetId" attribute; and/or
- time window of performing the requested analytics within the "timePeriod" attribute.

NOTE: This time window, over which the requested data collection or analytics was performed or to be performed, is different from the analytics target period, over which the statistics or predictions are requested. For example, in a subscription that requests "predictions that are performed during the month of May about UE_MOBILITY analytics during the month of July", this time window is "May" while the analytics target period is "July". The DCCF can use the provided time window e.g. to determine when to (un)subscribe to the NWDAF and/or what subscription duration to indicate to it.

Upon the reception of an HTTP POST request with "{apiRoot}/ndccf-datamanagement/<apiVersion>/subscriptions" as Resource URI and NdccfAnalyticsSubscription data structure as request body, the DCCF shall use the contents of the request (e.g. "anaSub" attribute in NdccfAnalyticsSubscription data structure) to determine whether the subscription can already be served or interactions with the NWDAF and/or ADRF (e.g. creation or modification of analytics subscription for Nnwdafe_AnalyticsSubscription service) are required. If the DCCF cannot use the contents of the request to determine this, the DCCF shall send an HTTP "400 Bad Request" error response including the "cause" attribute set to "SUBSCRIPTION_CANNOT_BE_SERVED".

NOTE: The "SUBSCRIPTION_CANNOT_BE_SERVED" error can occur, for example, when the request is syntactically valid and there is no DCCF internal error, but the DCCF can neither find an existing subscription to an NWDAF nor construct one based on the received subscription contents.

If the DCCF determines that the subscription can already be served (without requiring further interactions with NWDAF and/or ADRF) or a successful response from the NWDAF and/or ADRF is received for the creation or modification of subscription(s) to serve this subscription, the DCCF shall:

- create a new subscription;
- assign a subscriptionId;
- store the subscription.

If the DCCF created an "Individual DCCF Analytics Subscription" resource, the DCCF shall respond with "201 Created" with the message body containing a representation of the created subscription, as shown in figure 4.2.2.2.2-1, step 2. If not all the requested analytics events in the subscription are accepted, then the DCCF may include the "failEventReports" attribute indicating the event(s) for which the subscription failed and the associated reason(s). The DCCF shall include a Location HTTP header field. The Location header field shall contain the URI of the created subscription i.e. "{apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions/{subscriptionId}". If the immediate reporting indication in the "immRep" attribute within the "evtReq" attribute sets to true in the event subscription, the DCCF shall include the reports of the events subscribed, if available, in the HTTP POST response.

If an error occurs when processing the HTTP POST request, the DCCF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.2.3 Update subscription for analytic notifications

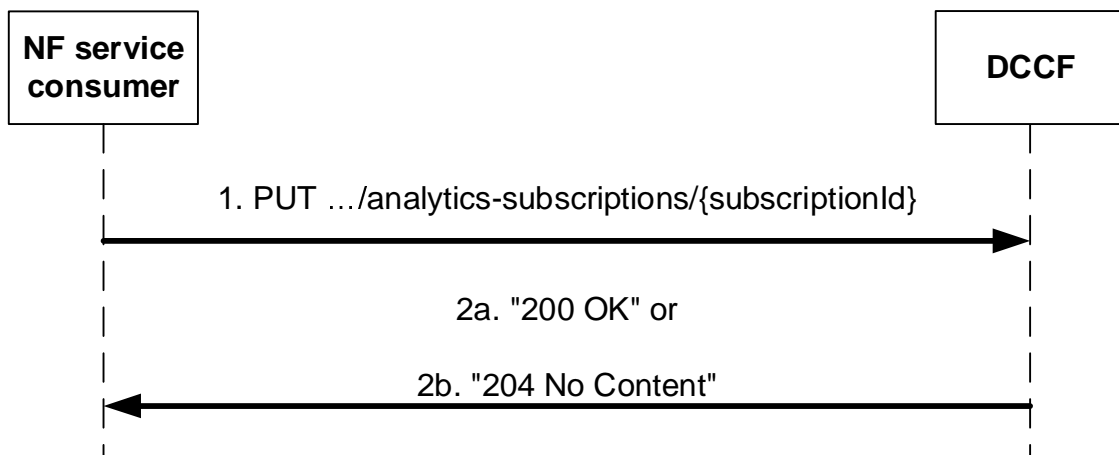


Figure 4.2.2.2.3-1: NF service consumer updates subscription to analytics notifications

The NF service consumer shall invoke the `Ndccf_DataManagement_Subscribe` service operation to update a subscription to analytics notifications. The NF service consumer shall send an HTTP PUT request with "`{apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions/{subscriptionId}`" as Resource URI, as shown in figure 4.2.2.2.3-1, step 1, to update the subscription for an "Individual DCCF Analytics Subscription" resource identified by the `{subscriptionId}`. The `NdccfAnalyticsSubscription` data structure provided in the request body shall include the same contents as described in clause 4.2.2.2.2.

Upon the reception of an HTTP PUT request with "`{apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions/{subscriptionId}`" as Resource URI and `NdccfAnalyticsSubscription` data structure as request body, the DCCF shall use the contents of the request to determine whether the updated subscription can already be served or interactions with the NWDAF and/or ADRF (e.g. modification of analytics subscriptions with the NWDAF) are required. If the DCCF cannot use the contents of the request to determine this, the DCCF shall send an HTTP "400 Bad Request" error response including the "cause" attribute set to "SUBSCRIPTION_CANNOT_BE_SERVED".

NOTE: The "SUBSCRIPTION_CANNOT_BE_SERVED" error can occur, for example, when the request is syntactically valid and there is no DCCF internal error, but the DCCF can neither find an existing subscription to an NWDAF nor construct one based on the received subscription contents.

If the DCCF determines that the updated subscription can already be served (without requiring further interactions with NWDAF and/or ADRF) or a successful response from the NWDAF and/or ADRF is received for the creation or modification of subscription(s) to serve this subscription, the DCCF shall:

- update the subscription of corresponding `subscriptionId`; and
- store the subscription.

If the DCCF successfully updated the "Individual DCCF Analytics Subscription" resource, the DCCF shall respond with:

- a) HTTP "200 OK" status code with the message body containing a representation of the updated subscription, as shown in figure 4.2.2.2.3-1, step 2a. If not all the requested analytics events in the subscription are modified successfully, then the DCCF may include the "failEventReports" attribute indicating the event(s) for which the modification failed and the associated reason(s); or
- b) HTTP "204 No Content" status code, as shown in figure 4.2.2.2.3-1, step 2b.

If an error occurs when processing the HTTP PUT request, the DCCF shall send an HTTP error response as specified in clause 5.1.7.

If the DCCF determines the received HTTP PUT request needs to be redirected, the DCCF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.2.4 Subscription for data notifications

Figure 4.2.2.2.4-1 shows a scenario where the NF service consumer sends a request to the DCCF to subscribe for data notifications.

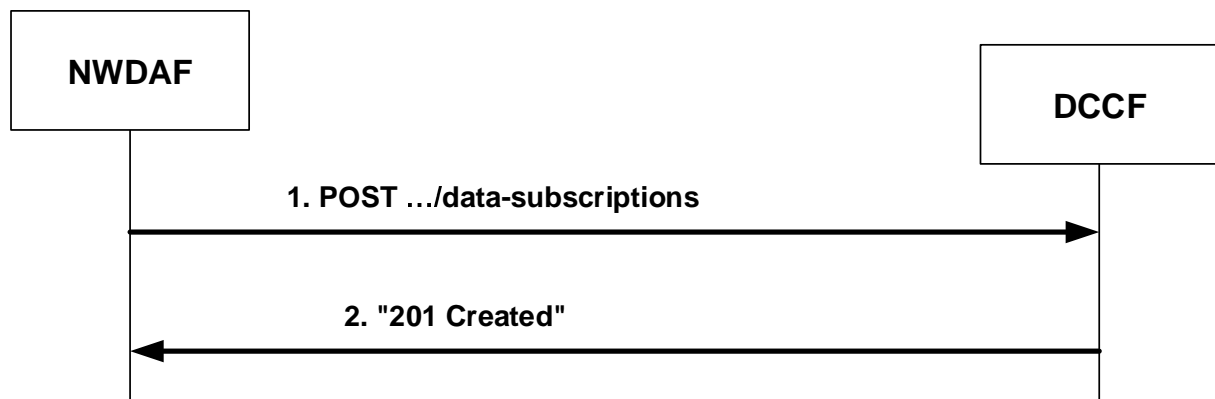


Figure 4.2.2.2.4-1: NF service consumer subscribes to data notifications

The NF service consumer (i.e. NWDAF) shall invoke the `Ndccf_DataManagement_Subscribe` service operation to subscribe to data notification(s). The NF service consumer shall send an HTTP POST request with "`{apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions`" as Resource URI, as shown in figure 4.2.2.2.4-1, step 1, to create a subscription for an "Individual DCCF Data Subscription" resource according to the information in message body. The `NdccfDataSubscription` data structure provided in the request body shall include:

- a notification target address within the "dataNotifUri" attribute;
- a notification correlation identifier within the "dataNotifCorrId" attribute; and
- a data subscription within the "dataSub" attribute, which contains one of the following:
 - access and mobility function event exposure subscription within the "amfDataSub" attribute;
 - session management function event exposure subscription within the "smfDataSub" attribute;
 - unified data management event exposure subscription within the "udmDataSub" attribute;
 - network exposure function event exposure subscription within the "nefDataSub" attribute;
 - application function event exposure subscription within the "afDataSub" attribute;

and may include:

- formatting instructions within the "formatInstruct" attribute;
- processing instructions within the "procInstrct" attribute;
- a target NF identifier within the "targetNfId" attribute" or a target NF set identifier within the "targetNfSetId" attribute"; and/or
- time window of the occurrence of the requested data collection within the "timePeriod" attribute.

NOTE: The DCCF can use the provided time window e.g. to determine when to (un)subscribe to the data source NF and/or what subscription duration to indicate to it.

Upon the reception of an HTTP POST request with: "`{apiRoot}/ndccf-datamanagement/<apiVersion>/subscriptions`" as Resource URI and `NdccfDataSubscription` data structure as request body, the DCCF shall use the contents (e.g. "smfDataSub" attribute in `NdccfDataSubscription` data structure) of the request to determine whether the subscription can already be served or interactions with data sources (e.g. creation or modification of event exposure subscription for `Nsmf_EventExposure` service) are required. If the DCCF cannot use the contents of the request to determine this, the DCCF shall send an HTTP "400 Bad Request" error response including the "cause" attribute set to "SUBSCRIPTION_CANNOT_BE_SERVED".

NOTE: The "SUBSCRIPTION_CANNOT_BE_SERVED" error can occur, for example, when the request is syntactically valid and there is no DCCF internal error, but the DCCF can neither find an existing subscription to a data source nor construct one based on the received subscription contents.

If the DCCF determines that the subscription can already be served (without requiring further interactions with the data sources) or a successful response from the data source(s) is received for the creation or modification of subscription(s) to serve this subscription, the DCCF shall:

- create a new subscription;
- assign a subscriptionId;
- store the subscription.

If the DCCF created an "Individual DCCF Data Subscription" resource, the DCCF shall respond with "201 Created" with the message body containing a representation of the created subscription, as shown in figure 4.2.2.2.4-1, step 2. The DCCF shall include a Location HTTP header field. The Location header field shall contain the URI of the created subscription i.e. "{apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}".

If an error occurs when processing the HTTP POST request, the DCCF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.2.5 Update subscription for data notifications

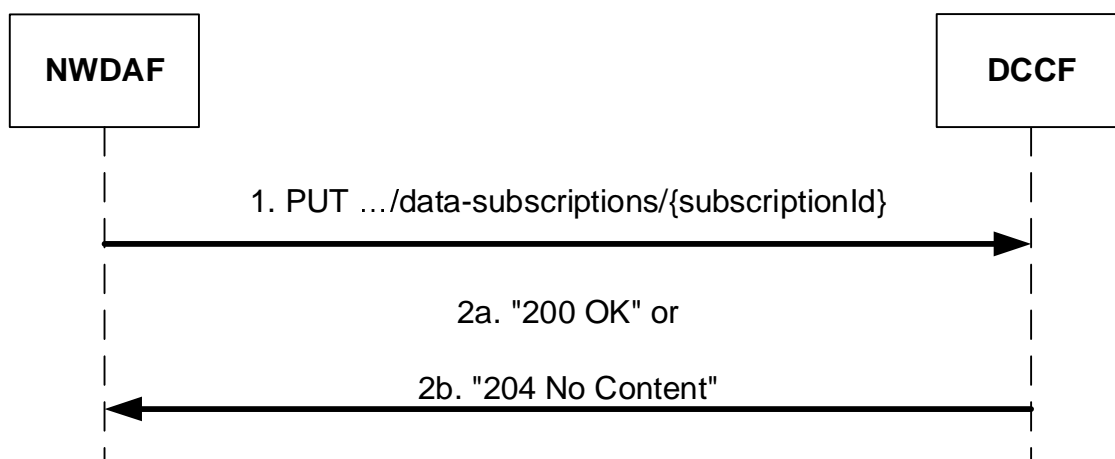


Figure 4.2.2.2.5-1: NF service consumer updates subscription to data notifications

The NF service consumer (i.e. NWDAF) shall invoke the `Ndccf_DataManagement_Subscribe` service operation to update a subscription to data notifications. The NF service consumer shall send an HTTP PUT request with "{apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}" as Resource URI, as shown in figure 4.2.2.2.5-1, step 1, to update the subscription for an "Individual DCCF Data Subscription" resource identified by the {subscriptionId}. The `NdccfDataSubscription` data structure provided in the request body shall include the same contents as described in clause 4.2.2.2.4.

Upon the reception of an HTTP PUT request with "{apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}" as Resource URI and `NdccfDataSubscription` data structure as request body, the DCCF shall use the contents of the request to determine whether the updated subscription can already be served or interactions with the data sources (e.g. modification of event exposure subscriptions) are required. If the DCCF cannot use the contents of the request to determine this, the DCCF shall send an HTTP "400 Bad Request" error response including the "cause" attribute set to "SUBSCRIPTION_CANNOT_BE_SERVED".

NOTE: The "SUBSCRIPTION_CANNOT_BE_SERVED" error can occur, for example, when the request is syntactically valid and there is no DCCF internal error, but the DCCF can neither find an existing event exposure subscription nor construct one based on the received subscription contents.

If the DCCF determines that the updated subscription can already be served (without requiring further interactions with the data sources) or a successful response from the data source(s) is received for the creation or modification of subscription(s) to serve this subscription, the DCCF shall:

- update the subscription of the corresponding subscriptionId; and
- store the subscription.

If the DCCF successfully updated the "Individual DCCF Data Subscription" resource, the DCCF shall respond with:

- a) HTTP "200 OK" status code with the message body containing a representation of the updated subscription, as shown in figure 4.2.2.2.5-1, step 2a; or
- b) HTTP "204 No Content" status code, as shown in figure 4.2.2.2.5-1, step 2b.

If an error occurs when processing the HTTP PUT request, the DCCF shall send an HTTP error response as specified in clause 5.1.7.

If the DCCF determines the received HTTP PUT request needs to be redirected, the DCCF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.3 Ndcf_DataManagement_Unsubscribe service operation

4.2.2.3.1 General

The Ndcf_DataManagement_Unsubscribe service operation is used by an NF service consumer to remove a subscription for analytics or data notifications from the DCCF.

4.2.2.3.2 Unsubscribe from analytics notifications

Figure 4.2.2.3.2-1 shows a scenario where the NF service consumer sends a request to the DCCF to unsubscribe from analytics notifications.

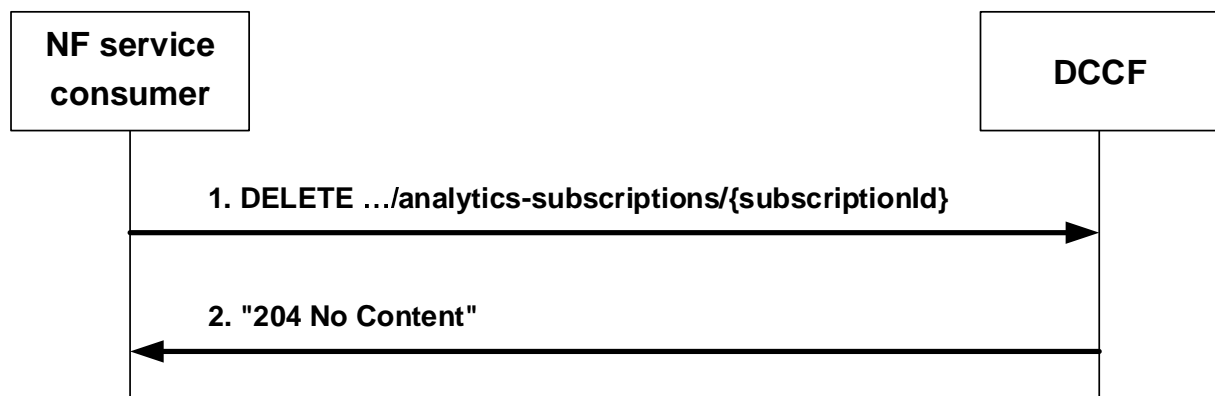


Figure 4.2.2.3.2-1: NF service consumer unsubscribes from analytics notifications

The NF service consumer shall invoke the Ndcf_DataManagement_Unsubscribe service operation to unsubscribe from analytics notifications. The NF service consumer shall send an HTTP DELETE request with "{apiRoot}/ndccf-datamanagement /<apiVersion>/analytics-subscriptions/{subscriptionId}" as Resource URI representing an "Individual DCCF Analytics Subscription" resource, as shown in figure 4.2.2.3.2-1, step 1, where "{subscriptionId}" is the identifier of the existing analytics subscription that is to be deleted.

Upon the reception of an HTTP DELETE request with "{apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions /{subscriptionId}" as Resource URI, if the DCCF successfully processed and accepted the received HTTP DELETE request, the DCCF shall:

- remove the corresponding subscription;
- respond with HTTP "204 No Content" status.

If errors occur when processing the HTTP DELETE request, the DCCF shall send an HTTP error response as specified in clause 5.1.7.

If the DCCF determines the received HTTP DELETE request needs to be redirected, the DCCF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.3.3 Unsubscribe from data notifications

Figure 4.2.2.3.3-1 shows a scenario where the NF service consumer sends a request to the DCCF to unsubscribe from data notifications.

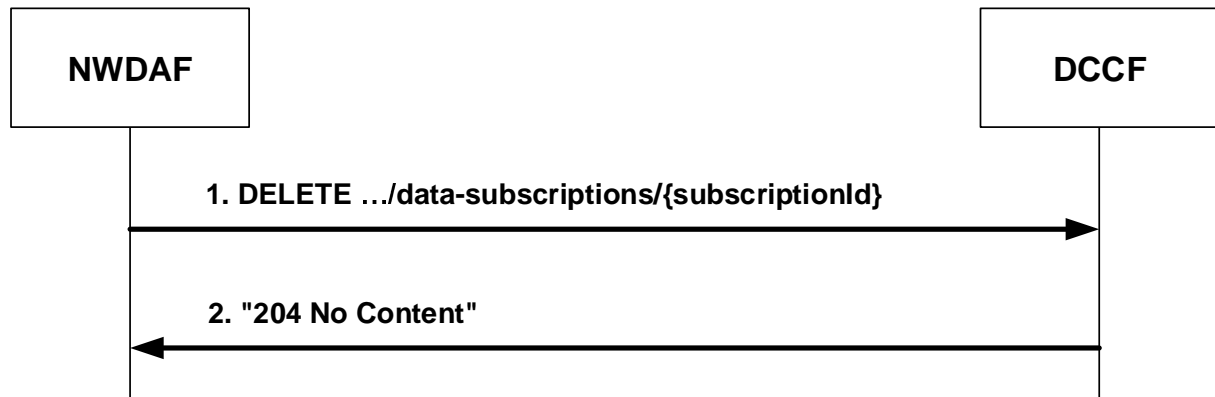


Figure 4.2.2.3.3-1: NWDaf unsubscribes from data notifications

The NWDaf shall invoke the `Ndccf_DataManagement_Unsubscribe` service operation to unsubscribe to data notifications. The NWDaf shall send an HTTP DELETE request with "`{apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}`" as Resource URI representing an "Individual DCCF Data Subscription" resource, as shown in figure 4.2.2.3.3-1, step 1, where "`{subscriptionId}`" is the identifier of the existing data subscription that is to be deleted.

Upon the reception of an HTTP DELETE request with "`{apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}`" as Resource URI, if the DCCF successfully processed and accepted the received HTTP DELETE request, the DCCF shall:

- remove the corresponding subscription;
- respond with HTTP "204 No Content" status.

If errors occur when processing the HTTP DELETE request, the DCCF shall send an HTTP error response as specified in clause 5.1.7.

If the DCCF determines the received HTTP DELETE request needs to be redirected, the DCCF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.4 `Ndccf_DataManagement_Notify` service operation

4.2.2.4.1 General

The `Ndccf_DataManagement_Notify` service operation is used by DCCF to notify NF service consumers about subscribed events related to analytics or data.

4.2.2.4.2 Notification about subscribed analytics

Figure 4.2.2.4.2-1 shows a scenario where the DCCF sends a request to the NF Service Consumer to notify it about analytics event(s).

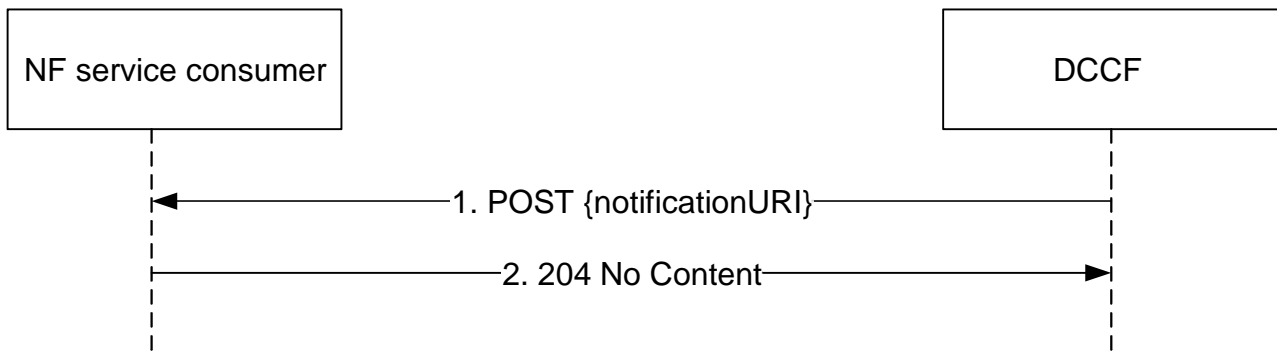


Figure 4.2.2.4.2-1: DCCF notifies the NF service consumer about a subscribed analytics event

The DCCF shall invoke the `Ndccf_DataManagement_Notify` service operation to notify about a subscribed analytics event. The DCCF shall send an HTTP POST request with "{notificationURI}" received in the `NdccfAnalyticsSubscription` data structure of the `Ndccf_DataManagement_Subscribe` service operation as Resource URI (see clause 5.1.5 for the definition of this notificationURI), as shown in figure 4.2.2.4.2-1, step 1. The `NdccfAnalyticsSubscriptionNotification` data structure provided in the request body shall include:

- the analytics notification correlation identifier within the "anaNotifCorrId" attribute;
- one of the following:
 - information about network data analytics function events that occurred in the "anaNotifications" attribute;
 - summarized analytics derived from events based on processing instructions and formatting instructions that occurred in the "anaReports" attribute;
 - information for fetching the contents of the notification in the "fetchInstruct" attribute.

Upon the reception of an HTTP POST request with "{notificationURI}" as Resource URI and `NdccfAnalyticsSubscriptionNotification` data structure as request body, if the NF service consumer successfully processed and accepted the received HTTP POST request, the NF Service Consumer shall:

- store the notification;
- respond with HTTP "204 No Content" status code.

If errors occur when processing the HTTP POST request, the NF service consumer shall send an HTTP error response as specified in clause 5.1.7.

If NF service consumer determines the received HTTP POST request needs to be redirected, the NF service consumer shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.4.3 Notification about subscribed data event

Figure 4.2.2.4.3-1 shows a scenario where the DCCF sends a request to the NF Service Consumer to notify it about data event(s).

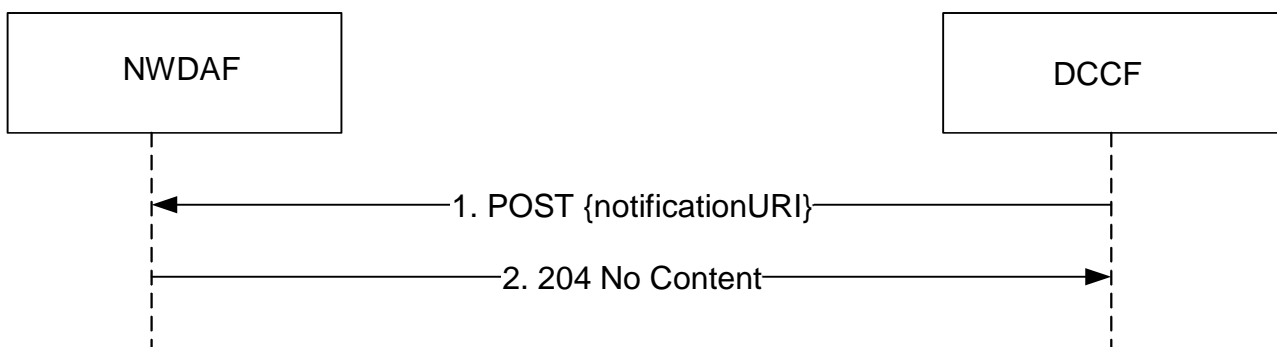


Figure 4.2.2.4.3-1: DCCF notifies the NF service consumer about a subscribed data event

The DCCF shall invoke the `Ndccf_DataManagement_Notify` service operation to notify about a subscribed data event. The DCCF shall send an HTTP POST request with "{notificationURI}" received in the `NdccfDataSubscription` data structure of the `Ndccf_DataManagement_Subscribe` service operation as Resource URI (see clause 5.1.5 for the definition of this notificationURI), as shown in figure 4.2.2.4.3-1, step 1. The `NdccfDataSubscriptionNotification` data structure provided in the request body shall include:

- the data notification correlation identifier within the "dataNotifCorrId" attribute;
- the data notification within the "dataNotif" attribute, which contains one of the following:
 - network exposure event(s) that occurred in the "nefEventNotifs" attribute;
 - application function event(s) that occurred in the "afEventNotifs" attribute;
 - access and mobility function event(s) that occurred in the "amfEventNotifs" attribute;
 - session management function event(s) that occurred in the "smfEventNotifs" attribute;
 - monitoring report event(s) that occurred in the "udmEventNotifs" attribute;
 - summarized data derived from events based on processing instructions and formatting instructions that occurred in the "dataReports" attribute;
 - information for fetching the contents of the notification in the "fetchInstruct" attribute.

Upon the reception of an HTTP POST request with "{notificationURI}" as Resource URI and `NdccfDataSubscriptionNotification` data structure as request body, if the NF service consumer successfully processed and accepted the received HTTP POST request, the NF service consumer shall:

- store the notification;
- respond with HTTP "204 No Content" status code.

If errors occur when processing the HTTP POST request, the NF service consumer shall send an HTTP error response as specified in clause 5.1.7.

If the NWDAF determines the received HTTP POST request needs to be redirected, the NWDAF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.5 `Ndccf_DataManagement_Fetch` service operation

4.2.2.5.1 General

The `Ndccf_DataManagement_Fetch` service operation is used by an NF service consumer to retrieve analytics or data notifications indicated by fetch instructions from the DCCF.

4.2.2.5.2 Retrieve notified analytics and data

Figure 4.2.2.5.2-1 shows a scenario where the NF service consumer sends a request to the DCCF to retrieve notified analytics and data.

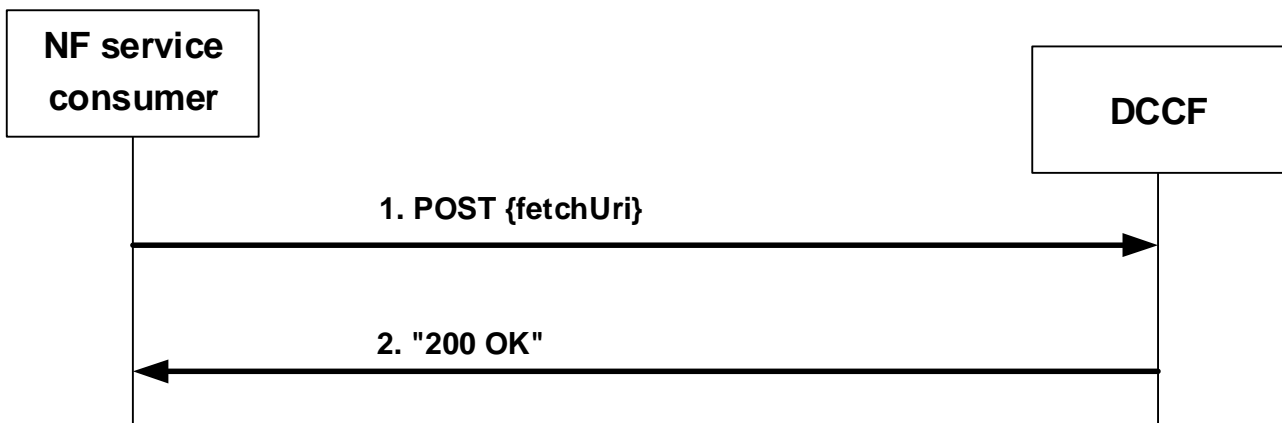


Figure 4.2.2.5.2-1: NF service consumer requesting to retrieve notified analytics

The NF service consumer shall invoke the `Ndccf_DataManagement_Fetch` service operation to retrieve notified analytics or data. The NF service consumer shall send an HTTP POST request to URI "`{fetchUri}`" previously provided by the DCCF in `FetchInstruction` as data structure shown in figure 4.2.2.5.2-1, step 1, to request DCCF notified analytics/data.

Upon the reception of the HTTP POST request, the DCCF shall:

- find the analytics/data according to the requested Uri.

If the requested analytics is found, the DCCF shall respond with "200 OK" status code with the message body containing the `NdccfAnalyticsSubscriptionNotification` data structure. The `NdccfAnalyticsSubscriptionNotification` data structure in the response body shall include the same contents as described in clause 4.2.2.4.2 with the difference that the "fetchInstruct" attribute shall not be included.

If the requested data is found, the DCCF shall respond with "200 OK" status code with the message body containing the `NdccfDataSubscriptionNotification` data structure. The `NdccfDataSubscriptionNotification` data structure in the response body shall include the same contents as described in clause 4.2.2.4.3 with the difference that the "fetchInstruct" attribute shall not be included.

If the requested data does not exist, the DCCF shall respond with "204 No Content". If an error occurs when processing the HTTP POST request, the DCCF shall send an HTTP error response as specified in clause 5.1.7.

4.3 Ndccf_ContextManagement Service

4.3.1 Service Description

4.3.1.1 Overview

The `Ndccf_ContextManagement` service, as defined in 3GPP TS 23.288 [14], is provided by the Data Collection Coordination Function (DCCF).

This service:

- allows NF service consumers to register, update or deregister the collected data or analytics information in the DCCF.

4.3.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Network Data Analytics Exposure architecture, including the DCCF architecture, is defined in 3GPP TS 23.288 [14].

Known consumers of the `Ndccf_ContextManagement` service are:

- Network Data Analytics Function (NWDAF)
- Analytics Data Repository Function (ADRF)

The Ndcf_ContextManagement service is provided by the DCCF and consumed by the NF service consumers (e.g. NWDAF, ADRF) as shown in figure 4.3.1.2-1 for the SBI representation model and in figure 4.3.1.2-2 for the reference point representation model.

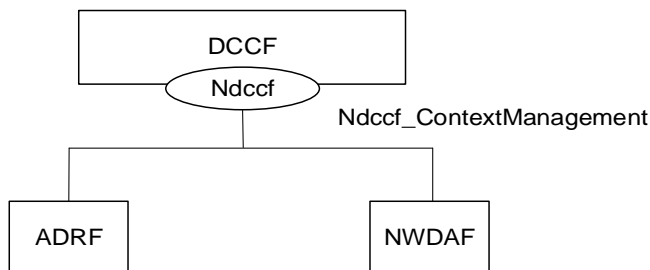


Figure 4.3.1.2-1: Ndcf_ContextManagement service architecture, SBI representation

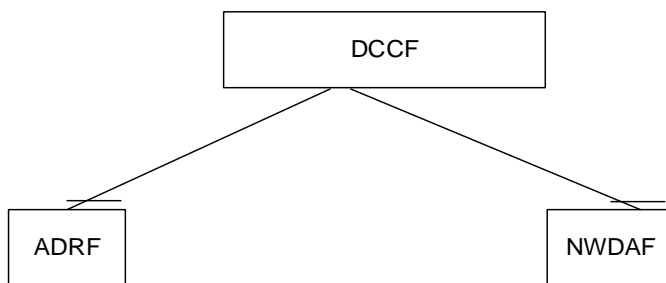


Figure 4.3.1.2-2: Ndcf_ContextManagement service architecture, reference point representation

4.3.1.3 Network Functions

4.3.1.3.1 Data Collection Coordination Function (DCCF)

The DCCF (Data Collection Coordination Function) provides functionality to create, update, and delete data collection profiles.

4.3.1.3.2 NF Service Consumers

The NWDAF and ADRF may register and/or update a data collection profile to the DCCF to enable data consumers to get the data which has been collected by NWDAF or ADRF directly (i.e. not via DCCF).

4.3.2 Service Operations

4.3.2.1 Introduction

Service operations defined for the Ndcf_ContextManagement Service are shown in table 4.3.2.1-1.

Table 4.3.2.1-1: Ndcf_ContextManagement Service Operations

Service Operation Name	Description	Initiated by
Ndcf_ContextManagement_Register	This service operation is used by an NF service consumer to register data or analytics it is collecting in the DCCF.	NF service consumer (NWDAF, ADRF)
Ndcf_ContextManagement_Update	This service operation is used by an NF service consumer to update an existing data or analytics registration.	NF service consumer (NWDAF, ADRF)
Ndcf_ContextManagement_Deregister	This service operation is used by an NF service consumer to delete an existing data or analytics registration.	NF service consumer (NWDAF, ADRF)

4.3.2.2 Ndcf_ContextManagement_Register service operation

4.3.2.2.1 General

4.3.2.2.2 Register data collection profile to DCCF

Figure 4.3.2.2.2-1 shows a scenario where the NF service consumer sends a request to the DCCF to register data or analytics it is collecting to the DCCF.

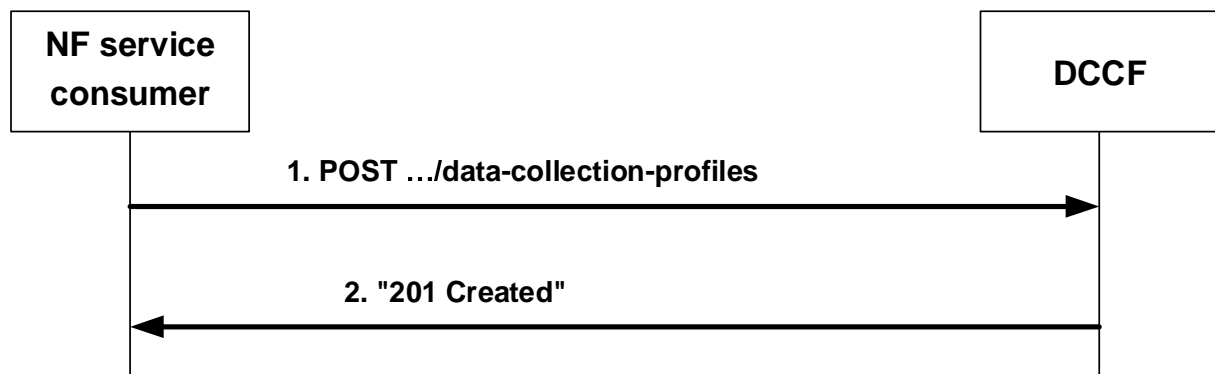


Figure 4.3.2.2.2-1: NF service consumer registers data collection profile

The NF service consumer shall invoke the Ndcf_ContextManagement_Register service operation to register data or analytics it is collecting to the DCCF. The NF service consumer shall send an HTTP POST request with "{apiRoot}/ndcf-contextmanagement/<apiVersion>/data-collection-profiles" as Resource URI representing the "DCCF Data Collection Profiles", as shown in figure 4.3.2.2.2-1, step 1, to create an "Individual DCCF Data Collection Profile" according to the information in the message body. The NdcfDataCollectionProfile data structure provided in the request body shall include:

- one of the following data or analytics collection information:
 - analytics subscription information within the "anaSub" attribute;
 - data subscription information within the "dataSub" attribute, which contains one of the following:
 - access and mobility function event exposure subscription within the "amfDataSub" attribute;
 - session management function event exposure subscription within the "smfDataSub" attribute;
 - unified data management event exposure subscription within the "udmDataSub" attribute;
 - network exposure function event exposure subscription within the "nefDataSub" attribute;
 - application function event exposure subscription within the "afDataSub" attribute;
- one of the following identifiers related to the NF service consumer:

- NWDAF instance identifier within the "nwdafId" attribute;
- ADRF instance identifier within the "adrfId" attribute;
- NWDAF set identifier within the "nwdafSetId" attribute;
- ADRF set identifier within the "adrfSetId" attribute;

Upon the reception of an HTTP POST request with "{apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles" as Resource URI and NdccfDataCollectionProfile data structure as request body, the DCCF shall:

- create a new profile;
- assign a profileId;
- store the profile.

If the DCCF created an "Individual DCCF Data Collection Profile" resource, the DCCF shall respond with "201 Created" with the message body containing a representation of the created profile, as shown in figure 4.3.2.2.2-1, step 2. The DCCF shall include a Location HTTP header field. The Location header field shall contain the URI of the created profile, i.e. "{apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}".

If an error occurs when processing the HTTP POST request, the DCCF shall send an HTTP error response as specified in clause 5.2.7.

4.3.2.3 Ndccf_ContextManagement_Update service operation

4.3.2.3.1 General

4.3.2.3.2 Update registered data collection profile

Figure 4.3.2.3.2-1 shows a scenario where the NF service consumer sends a request to the DCCF to update a registration of a data collection profile to the DCCF.

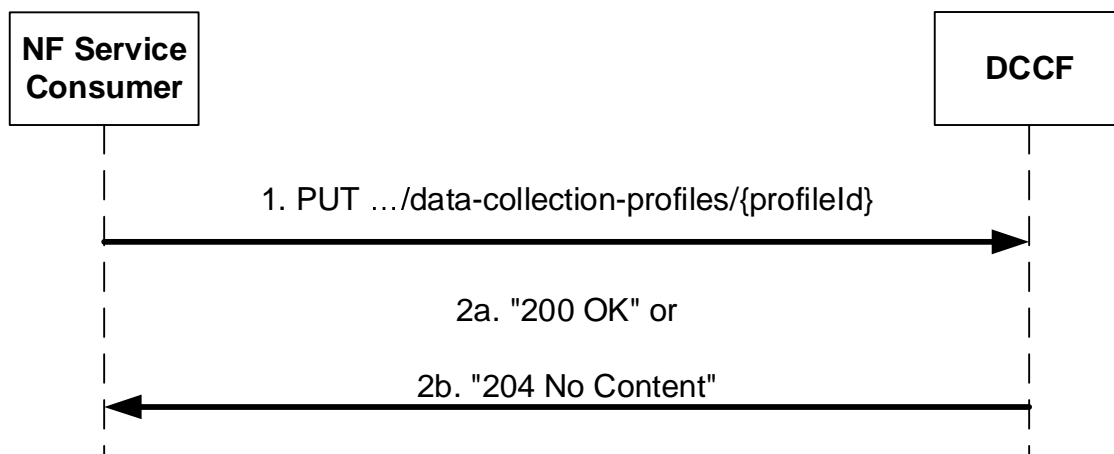


Figure 4.3.2.3.2-1: NF service consumer updates registered data collection profile

The NF service consumer (e.g. NWDAF or ADRF) shall invoke the Ndccf_ContextManagement_Update service operation to update a registration of data or analytics collection to DCCF. The NF service consumer shall send an HTTP PUT request with "{apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}" as Resource URI, as shown in figure 4.3.2.3.2-1, step 1, to update the registration of data or analytics for an "Individual DCCF Data Collection Profile" resource identified by the {profileId}. The NdccfDataCollectionProfile data structure provided in the request body shall include the same contents as described in clause 4.3.2.2.

Upon the reception of an HTTP PUT request with "{apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}" as Resource URI and NdccfDataCollectionProfile data structure as request body, the DCCF shall:

- update the profile of the corresponding profileId; and

- store the profile.

If the DCCF successfully processed and accepted the received HTTP PUT request, the DCCF shall update an "Individual DCCF Data Collection Profile" resource, and shall respond with:

- HTTP "200 OK" status code with the message body containing a representation of the updated profile, as shown in figure 4.3.2.3.2-1, step 2a; or
- HTTP "204 No Content" status code, as shown in figure 4.3.2.3.2-1, step 2b.

If an error occurs when processing the HTTP PUT request, the DCCF shall send an HTTP error response as specified in clause 5.2.7.

If the DCCF determines the received HTTP PUT request needs to be redirected, the DCCF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.3.2.4 Ndccf_ContextManagement_Deregister service operation

4.3.2.4.1 General

4.3.2.4.2 Deregister Data collection profile

Figure 4.3.2.4.2-1 shows a scenario where the NF service consumer sends a request to the DCCF to delete a registration of data collection profile.

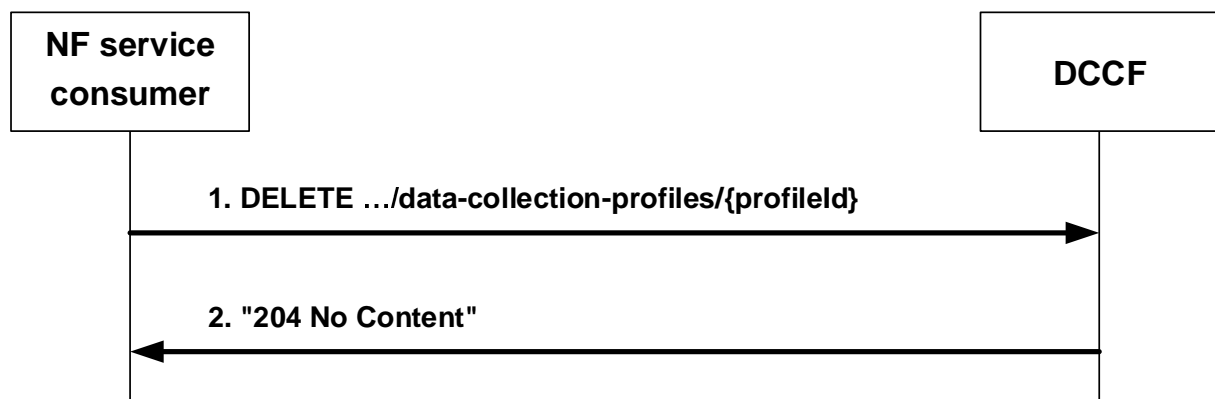


Figure 4.3.2.4.2-1: NF service consumer deregisters data collection profile

The NF service consumer shall invoke the Ndccf_ContextManagement_Deregister service operation to delete a registration of data or analytics collection profile to the DCCF. The NF service consumer shall send an HTTP DELETE request with "{apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}" as Resource URI representing an "Individual DCCF Data Collection Profile" resource, as shown in figure 4.3.2.4.2-1, step 1, where "{profileId}" is the identifier of the existing Data Collection Profile that is to be deleted.

Upon the reception of an HTTP DELETE request with "{apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}" as Resource URI, if the DCCF successfully processed and accepted the received HTTP DELETE request, the DCCF shall:

- remove the corresponding registered profile;
- respond with HTTP "204 No Content" status.

If errors occur when processing the HTTP DELETE request, the DCCF shall send an HTTP error response as specified in clause 5.2.7.

If the DCCF determines the received HTTP DELETE request needs to be redirected, the DCCF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

5 API Definitions

5.1 Ndcf_DataManagement Service API

5.1.1 Introduction

The Ndcf_DataManagement shall use the Ndcf_DataManagement API.

The API URI of the Ndcf_DataManagement API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "ndcf-datamgt".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 5.1.3.

5.1.2 Usage of HTTP

5.1.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Ndcf_DataManagement API is contained in Annex A.

5.1.2.2 HTTP standard headers

5.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

5.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

5.1.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

5.1.3 Resources

5.1.3.1 Overview

This clause describes the structure for the Resource URIs and the resources and methods used for the service.

Figure 5.1.3.1-1 depicts the resource URIs structure for the Ndcf_DataManagement API.

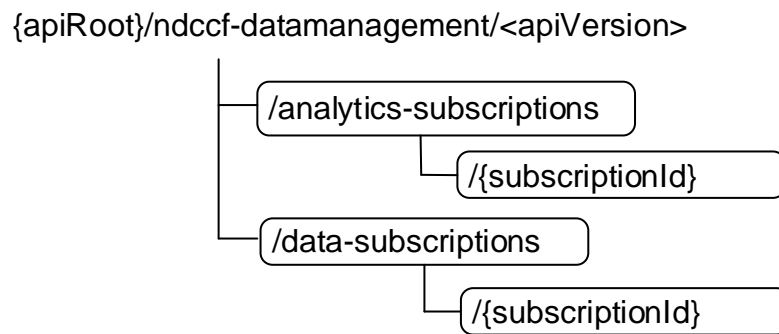


Figure 5.1.3.1-1: Resource URI structure of the Ndcf_DataManagement API

Table 5.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.1.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
DCCF Analytics Subscriptions	/analytics-subscriptions	POST	Creates a new Individual DCCF Analytics Subscription resource.
Individual DCCF Analytics Subscription	/analytics-subscriptions/{subscriptionId}	PUT	Modifies an existing Individual DCCF Analytics Subscription resource.
		DELETE	Deletes an Individual DCCF Analytics Subscription identified by {subscriptionId}.
DCCF Data Subscriptions	/data-subscriptions	POST	Creates a new Individual DCCF Data Subscription resource.
Individual DCCF Data Subscription	/data-subscriptions/{subscriptionId}	PUT	Modifies an existing DCCF Data Subscription resource.
		DELETE	Deletes an Individual DCCF Data Subscription identified by {subscriptionId}.

5.1.3.2 Resource: DCCF Analytics Subscriptions

5.1.3.2.1 Description

The DCCF Analytics Subscriptions resource represents all Analytics subscriptions to the Ndcf_DataManagement Service at a given DCCF. The resource allows an NF service consumer to create a new Individual DCCF Analytics Subscription resource.

5.1.3.2.2 Resource Definition

Resource URI: **{apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions**

This resource shall support the resource URI variables defined in table 5.1.3.2.2-1.

Table 5.1.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1

5.1.3.2.3 Resource Standard Methods

5.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.1.3.2.3.1-1.

Table 5.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.2.3.1-2 and the response data structures and response codes specified in table 5.1.3.2.3.1-3.

Table 5.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NdccfAnalyticsSubscription	M	1	New Individual DCCF Analytics Subscription resource to be created.

Table 5.1.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NdccfAnalyticsSubscription	M	1	201 Created	The creation of an Individual DCCF Analytics Subscription resource is confirmed and a representation of that resource is returned.

NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

Table 5.1.3.2.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions/{subscriptionId}

5.1.3.2.4 Resource Custom Operations

None in this release of the specification.

5.1.3.3 Resource: Individual DCCF Analytics Subscription

5.1.3.3.1 Description

The Individual DCCF Analytics Subscription resource represents a single Analytics Subscription to the Ndccf_DataManagement Service at a given DCCF.

5.1.3.3.2 Resource Definition

Resource URI: {apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.1.3.3.2-1.

Table 5.1.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1
subscriptionId	string	Identifies an analytics subscription to the Ndccf_DataManagement Service

5.1.3.3.3 Resource Standard Methods

5.1.3.3.3.1 PUT

This method shall support the URI query parameters specified in table 5.1.3.3.3.1-1.

Table 5.1.3.3.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.3.3.1-2 and the response data structures and response codes specified in table 5.1.3.3.3.1-3.

Table 5.1.3.3.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
NdccfAnalyticsSubscription	M	1	Parameters to replace a subscription to DCCF Analytics Subscription resource.

Table 5.1.3.3.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NdccfAnalyticsSubscription	M	1	200 OK	The Individual DCCF Analytics Subscription resource was modified successfully and a representation of that resource is returned.
n/a			204 No Content	The Individual DCCF Analytics Subscription resource was modified successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual DCCF Analytics Subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual DCCF Analytics Subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
NOTE: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.1.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.1.3.3.3.2 DELETE

This method shall support the URI query parameters specified in table 5.1.3.3.3.2-1.

Table 5.1.3.3.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.3.3.2-2 and the response data structures and response codes specified in table 5.1.3.3.3.2-3.

Table 5.1.3.3.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.1.3.3.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual DCCF Analytics Subscription resource was deleted successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual DCCF Analytics Subscription deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual DCCF Analytics Subscription deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.

NOTE: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

Table 5.1.3.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	String	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	String	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.1.3.3.4 Resource Custom Operations

None in this release of the specification.

5.1.3.4 Resource: DCCF Data Subscriptions

5.1.3.4.1 Description

The DCCF Data Subscriptions resource represents all data subscriptions to the Ndccf_DataManagement Service at a given DCCF. The resource allows an NF service consumer to create a new Individual DCCF Data Subscription resource.

5.1.3.4.2 Resource Definition

Resource URI: {apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions

This resource shall support the resource URI variables defined in table 5.1.3.4.2-1.

Table 5.1.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1

5.1.3.4.3 Resource Standard Methods

5.1.3.4.3.1 POST

This method shall support the URI query parameters specified in table 5.1.3.4.3.1-1.

Table 5.1.3.4.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.4.3.1-2 and the response data structures and response codes specified in table 5.1.3.4.3.1-3.

Table 5.1.3.4.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NdccfDataSubscription	M	1	Individual DCCF Data Subscription resource to be created.

Table 5.1.3.4.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NdccfDataSubscription	M	1	201 Created	The creation of an Individual DCCF Data Subscription resource is confirmed and a representation of that resource is returned.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.3.4.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}

5.1.3.4.4 Resource Custom Operations

None in this release of the specification.

5.1.3.5 Resource: Individual DCCF Data Subscription

5.1.3.5.1 Description

The Individual DCCF Data Subscription resource represents a single data subscription to the Ndccf_DataManagement Service at a given DCCF.

5.1.3.5.2 Resource Definition

Resource URI: {apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.1.3.5.2-1.

Table 5.1.3.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1
subscriptionId	string	Identifies a data subscription to the Ndccf_DataManagement Service

5.1.3.5.3 Resource Standard Methods

5.1.3.5.3.1 PUT

This method shall support the URI query parameters specified in table 5.1.3.5.3.1-1.

Table 5.1.3.5.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.5.3.1-2 and the response data structures and response codes specified in table 5.1.3.5.3.1-3.

Table 5.1.3.5.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
NdccfDataSubscription	M	1	Parameters to replace a subscription to DCCF Data Subscription resource.

Table 5.1.3.5.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NdccfDataSubscription	M	1	200 OK	The Individual DCCF Data Subscription resource was modified successfully and a representation of that resource is returned.
n/a			204 No Content	The Individual DCCF Data Subscription resource was modified successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual DCCF Data Subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual DCCF Data Subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
NOTE: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.1.3.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.1.3.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.1.3.5.3.2 DELETE

This method shall support the URI query parameters specified in table 5.1.3.5.3.2-1.

Table 5.1.3.5.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.5.3.2-2 and the response data structures and response codes specified in table 5.1.3.5.3.2-3.

Table 5.1.3.5.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.1.3.5.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual DCCF Data Subscription resource was deleted successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual DCCF Data Subscription deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual DCCF Data Subscription deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.

NOTE: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

Table 5.1.3.5.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.1.3.5.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.1.3.5.4 Resource Custom Operations

None in this release of the specification.

5.1.4 Custom Operations without associated resources

None in this release of the specification.

5.1.5 Notifications

5.1.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

Table 5.1.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Analytics Event Notification	{anaNotifUri}	POST	Report one or several observed analytics events.
Data Event Notification	{dataNotifUri}	POST	Report one or several observed data collection events.

5.1.5.2 Analytics Notification

5.1.5.2.1 Description

The Analytics Notification is used by the NF service producer to report one or several observed analytics events to an NF service consumer that has subscribed to such notifications.

5.1.5.2.2 Target URI

The Callback URI "{anaNotifUri}" shall be used with the callback URI variables defined in table 5.1.5.2.2-1.

Table 5.1.5.2.2-1: Callback URI variables

Name	Definition
anaNotifUri	String formatted as URI with the Callback Uri. The Callback Uri is assigned within the Individual DCCF Analytics Subscription resource and described within the NdccfAnalyticsSubscription type (see table 5.1.6.2.2-1).

5.1.5.2.3 Standard Methods

5.1.5.2.3.1 POST

This method shall support the request data structures specified in table 5.1.5.2.3.1-1 and the response data structures and response codes specified in table 5.1.5.2.3.2-1.

Table 5.1.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
NdccfAnalyticsSubscriptionNotification	M	1	Provides information about observed analytics events

Table 5.1.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the Notification is acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during the analytics event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during the analytics event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

5.1.5.3 Data Notification

5.1.5.3.1 Description

The Data Notification is used by the NF service producer to report one or several observed data collection events to an NF service consumer that has subscribed to such notifications.

5.1.5.3.2 Target URI

The Callback URI "{dataNotifUri}" shall be used with the callback URI variables defined in table 5.1.5.3.2-1.

Table 5.1.5.3.2-1: Callback URI variables

Name	Definition
dataNotifUri	String formatted as URI with the Callback Uri. The Callback Uri is assigned within the Individual DCCF Data Subscription resource and described within the NdcfDataSubscription type (see table 5.1.6.3.2-1).

5.1.5.3.3 Standard Methods

5.1.5.3.3.1 POST

This method shall support the request data structures specified in table 5.1.5.3.3.1-1 and the response data structures and response codes specified in table 5.1.5.3.3.1-2.

Table 5.1.5.3.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
NdcfDataSubscriptionNotification	M	1	Provides Information about observed data collection events.

Table 5.1.5.3.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the notification is acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during the data event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during the data event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

5.1.5.4 Fetch Notification

5.1.5.4.1 Description

The Fetch Notification is used by the NF service consumer to retrieve data or analytics from the DCCF.

5.1.5.4.2 Target URI

The Callback URI "{fetchUri}" shall be used with the callback URI variables defined in table 5.1.5.4.2-1.

Table 5.1.5.4.2-1: Callback URI variables

Name	Data type	Definition
fetchUri	Uri	Fetch Uri as assigned during the procedure of notification about the subscribed data or analytics within the FetchInstruction data type.

5.1.5.4.3 Standard Methods

5.1.5.4.3.1 POST

This method shall support the URI query parameters specified in table 5.1.5.4.3.1-1.

Table 5.1.5.4.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.5.4.3.1-2 and the response data structures and response codes specified in table 5.1.5.4.3.1-3.

Table 5.1.5.4.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
array(string)	M	1..N	Indicate the fetch correlation identifier(s).

Table 5.1.5.4.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NdccfAnalyticsSubscriptionNotification	C	0..1	200 OK	The stored analytics related to the "fetch-corr-ids". (NOTE 2)
NdccfDataSubscriptionNotification	C	0..1	200 OK	The stored data related to the "fetch-corr-ids". (NOTE 2)
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF.
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: One of NdccfAnalyticsSubscriptionNotification data structure and NdccfDataSubscriptionNotification data structure shall be included, depending on if the Fetch Notification included fetch correlation identifiers from an analytics notification or from a data notification.				

Table 5.1.5.4.3.1-4: Headers supported by the by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.1.5.4.3.1-5: Headers supported by the 308 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.1.6 Data Model

5.1.6.1 General

This clause specifies the application data model supported by the Ndccf_DataManagement API.

Table 5.1.6.1-1 specifies the data types defined for the Ndccf_DataManagement service based interface protocol.

Table 5.1.6.1-1: Ndcf_DataManagement specific Data Types

Data type	Clause defined	Description	Applicability
EventParamReport	5.1.6.2.10	Represents a summarized report for one event parameter.	
FormattingInstruction	5.1.6.2.6	Contains data or analytics formatting Instructions.	
NdcfAnalyticsSubscription	5.1.6.2.2	Represents an Individual DCCF Analytics Subscription resource.	
NdcfAnalyticsSubscriptionNotification	5.1.6.2.4	Represents a notification that corresponds with an Individual DCCF Analytics Subscription resource.	
NdcfDataSubscription	5.1.6.2.3	Represents an Individual DCCF Data Subscription resource.	
NdcfDataSubscriptionNotification	5.1.6.2.5	Represents a notification that corresponds with an Individual DCCF Data Subscription resource.	
NotifSummaryReport	5.1.6.2.9	Represents summarized notifications based on processing instructions.	
ParameterProcessingInstruction	5.1.6.2.8	Contains an event parameter name and the respective event parameter values and sets of attributes to be used in summarized reports.	
ProcessingInstruction	5.1.6.2.7	Contains instructions related to the processing (e.g. clubbing) of notifications.	
ReportingOptions	5.1.6.2.11	Represents reporting options for notifications that are processed.	
SummarizationAttribute	5.1.6.3.3	Represents attribute in the summarized report.	

Table 5.1.6.1-2 specifies data types re-used by the Ndcf_DataManagement service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Ndcf_DataManagement service based interface.

Table 5.1.6.1-2: Ndcf_DataManagement re-used Data Types

Data type	Reference	Comments	Applicability
DataSubscription	3GPP TS 29.575 [25]	Represents a data subscription to one of various possible data sources.	
DataNotification	3GPP TS 29.575 [25]	Represents a data subscription notification of one of various possible data sources.	
DurationSec	3GPP TS 29.571 [17]	Time in seconds.	
FetchInstruction	3GPP TS 29.576 [26]	The fetch instruction indicates whether the data or analytics can be fetched by the consumer.	
NfInstanceId	3GPP TS 29.571 [17]	NF instance identifier.	
NfSetId	3GPP TS 29.571 [17]	NF set identifier.	
NnwdafEventsSubscription	3GPP TS 29.520 [15]	Represents an NWDAF analytics subscription.	
NnwdafEventsSubscriptionNotification	3GPP TS 29.520 [15]	Represents an NWDAF analytics subscription notification.	
NumberAverage	3GPP TS 29.520 [15]	Represents average and variance of a parameter value.	
SupportedFeatures	3GPP TS 29.571 [17]	Used to negotiate the applicability of the optional features defined in table 5.1.8-1.	
TimeWindow	3GPP TS 29.122 [23]	Represents a time window.	
UInteger	3GPP TS 29.571 [17]	Unsigned Integer.	
Uri	3GPP TS 29.571 [17]	URI.	

5.1.6.2 Structured data types

5.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

5.1.6.2.2 Type NdcfAnalyticsSubscription

Table 5.1.6.2.2-1: Definition of type NdcfAnalyticsSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
anaSub	NnwdafEventsSubscription	M	1	Subscribed analytics events. (NOTE 1)	
anaNotifUri	Uri	M	1	Notification target address.	
anaNotifCorrId	string	M	1	Notification correlation identifier.	
formatInstruct	FormattingInstruction	O	0..1	Formatting instructions to be used for sending event notifications.	
procInstructs	array(ProcessingInstruction)	O	1..N	Processing instructions to be used for sending event notifications.	
targetNfId	NfInstanceId	O	0..1	NF instance identifier to which the DCCF shall create the requested subscription.	
targetNfSetId	NfSetId	O	0..1	NF set identifier to which the DCCF shall create the requested subscription.	
supFeat	SupportedFeatures	C	0..1	This IE represents a list of Supported features as described in clause 5.1.8. It shall be present if at least one feature defined in clause 5.1.8 is supported.	
timePeriod	TimeWindow	O	0..1	Represents a start time and a stop time during which the analytics was performed or is requested to be performed. If this attribute is provided, then the attribute "monDur" within the reporting information of the attribute "anaSub" shall not be provided. (NOTE 2)	
<p>NOTE 1: The "notificationURI" and "notifCorrId" attributes of NnwdafEventsSubscription data type shall be ignored by the DCCF. The DCCF will provide the notification target address and the notification correlation ID of the DCCF itself in the NnwdafEventsSubscription data type during the event subscription request to the NWDAF.</p> <p>NOTE 2: It includes the time period either in the past or in the future (i.e., start time as past time and stop time as future time is not allowed).</p>					

5.1.6.2.3 Type NdccfDataSubscription

Table 5.1.6.2.3-1: Definition of type NdccfDataSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
dataSub	DataSubscription	M	1	Represents the requested events subscription. (NOTE 1)	
dataNotifUri	Uri	M	1	Notification target address.	
dataNotifCorrId	string	M	1	Notification correlation identifier.	
formatInstruct	FormattingInstruction	O	0..1	Formatting instructions to be used for sending event notifications.	
procInstructs	array(ProcessingInstruction)	O	1..N	Processing instructions to be used for sending event notifications.	
targetNfId	NfInstanceId	O	0..1	Data Producer NF instance identifier to which the DCCF shall create the requested subscription.	
targetNfSetId	NfSetId	O	0..1	Data Producer NF set identifier to which the DCCF shall create the requested subscription.	
suppFeat	SupportedFeatures	C	0..1	This IE represents a list of Supported features as described in clause 5.1.8. It shall be present if at least one feature defined in clause 5.1.8 is supported.	
timePeriod	TimeWindow	O	0..1	Represents a start time and a stop time during which data was collected or is requested to be collected. If this attribute is included, then the internal attributes of the data subscription that indicate a subscription duration (e.g. the "targetPeriod" attribute of an "eventSubs" attribute of an "smfDataSub" attribute, or the "monDur" attribute of the ReportingInformation data type) shall not be provided. (NOTE 2)	
<p>NOTE 1: The notification target address contained in the subscription attribute that is provided within the "dataSub" attribute (i.e. "eventNotifyUri" of "amfDataSub", "notifUri" of "smfDataSub", "callbackReference" of "udmDataSub", "notifUri" of "nefDataSub", or "notifUri" of "afDataSub") and the notification correlation ID contained in the subscription attribute that is provided within the "dataSub" attribute (i.e. the "notifyCorrelationId" of "amfDataSub", "notifId" of "smfDataSub", "notifyCorrelationId" of "udmDataSub", "notifId" of "nefDataSub", "notifId" of "afDataSub") shall be ignored by the DCCF. The DCCF will provide the notification target address and the notification correlation ID of the DCCF itself in the data type during the event subscription request to each NF.</p> <p>NOTE 2: It includes the time period either in the past or in the future (i.e., start time as past time and stop time as future time is not allowed).</p>					

5.1.6.2.4 Type NdcfAnalyticsSubscriptionNotification

Table 5.1.6.2.4-1: Definition of type NdcfAnalyticsSubscriptionNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
anaNotifications	array(NnwdafEventsSubscriptionNotification)	C	1..N	List of analytics subscription notifications. (NOTE 1)	
anaReports	array(NotifSummaryReport)	C	1..N	List of reports with summarized data from multiple analytics notifications that the DCCF has received from NWDAF. (NOTE 1)	
fetchInstruct	FetchInstruction	C	0..1	Instructions for the NF service consumer to fetch the notifications itself. (NOTE 1, NOTE 2)	
anaNotifCorrId	string	M	1	Notification correlation identifier.	
NOTE 1: Exactly one of these attributes shall be provided.					
NOTE 2: The "fetchInstruct" attribute shall not be included in Ndcf_DataManagement_Fetch response body.					

5.1.6.2.5 Type NdcfDataSubscriptionNotification

Table 5.1.6.2.5-1: Definition of type NdcfDataSubscriptionNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
dataNotif	DataNotification	C	0..1	Data subscription notification. (NOTE 1)	
dataReports	array(NotifSummaryReport)	C	1..N	List of reports with summarized data from multiple notifications received from data producer. (NOTE 1)	
fetchInstruct	FetchInstruction	C	0..1	Instructions for the NF service consumer to fetch the notifications itself. (NOTE 1, NOTE 2)	
dataNotifCorrId	string	M	1	Notification correlation identifier.	
NOTE 1: Exactly one of these attributes shall be provided.					
NOTE 2: The "fetchInstruct" attribute shall not be included in the response body of a Fetch operation.					

5.1.6.2.6 Type FormattingInstruction

Table 5.1.6.2.6-1: Definition of type FormattingInstruction

Attribute name	Data type	P	Cardinality	Description	Applicability
consTrigNotif	boolean	O	0..1	Indicates that notifications shall be buffered (sending only fetch instructions to the NF service consumer) until the NF service consumer requests their delivery using Ndcf_DataManagement or Nmfaf_3caDataManagement Service.	
reportingOptions	ReportingOptions	O	0..1	This attribute is provided if the NF service consumer requires clubbing of notifications and its contents describe how the notifications shall be clubbed, i.e. when they should be sent.	

5.1.6.2.7 Type ProcessingInstruction

Table 5.1.6.2.7-1: Definition of type ProcessingInstruction

Attribute name	Data type	P	Cardinality	Description	Applicability
eventId	string	M	1	Identifies the (event exposure or analytics) event that the processing instructions apply to.	
proInterval	DurationSec	M	1	Indicates the interval (in seconds) over which the processing of data for inclusion in each notification sent to consumers shall occur.	
paramProInstructs	array(Parameter ProcessingInstruction)	O	1..N	List of event parameter name(s), and for each event parameter name, respective event parameter values and sets of the attributes to be used in the summarized reports.	

Editor's Note: It is FFS to determine how the DCCF interprets the eventId attribute, e.g. whether it needs to be defined as a new data type that is a union of all applicable enumerations (i.e. containing either an "NwdafEvent" from 29.520 for analytics events or an "SmfEvent" from 29.508 for SMF Event Exposure event or ...).

5.1.6.2.8 Type ParameterProcessingInstruction

Table 5.1.6.2.8-1: Definition of type ParameterProcessingInstruction

Attribute name	Data type	P	Cardinality	Description	Applicability
name	string	M	1	This attribute contains a JSON pointer value (as defined in IETF RFC 6901 [24]) that references an attribute, i.e. a target location, within the notification object (e.g. of NefEventExposureNotif, AfEventExposureNotif, AmfEventNotification, NsmfEventExposureNotification, or MonitoringReport data type) to which the processing instruction is applied.	
values	array(Any type)	M	1..N	A list of values for the attribute identified by the "name" attribute, which shall be matched with values contained in the notifications received and summarized by the DCCF. The data type of the elements of the list shall be the same as the type of the attribute identified by the "name" attribute.	
sumAttrs	array(SummarizationAttribute)	M	1..N	Attributes requested to be used in the summarized reports.	

5.1.6.2.9 Type NotifSummaryReport

Table 5.1.6.2.9-1: Definition of type NotifSummaryReport

Attribute name	Data type	P	Cardinality	Description	Applicability
eventId	string	M	1	Identifies the (event exposure or analytics) event that this report applies to.	
proInterval	DurationSec	M	1	Indicates the interval (in seconds) over which the processing of data for inclusion in this report occurred.	
eventReports	array(EventParamReport)	M	1..N	List of event parameter reports.	

5.1.6.2.10 Type EventParamReport

Table 5.1.6.2.10-1: Definition of type EventParamReport

Attribute name	Data type	P	Cardinality	Description	Applicability
name	string	M	1	The name of the reported parameter.	
values	array(string)	M	1..N	The list of values of the reported parameter.	
spacing	NumberAverage	C	0..1	Contains the average and variance of the time interval separating two consecutive occurrences of the same event and parameter value. It shall be provided if available and the "SPACING" value was contained in the "paramProclnstructs" attribute of the instructions.	
duration	NumberAverage	C	0..1	Contains the average and variance of time for which the parameter value applies. It shall be provided if available and the "DURATION" value was contained in the "paramProclnstructs" attribute of the instructions.	
count	UInteger	C	0..1	Represents the number of countable occurrences for the parameter. It shall be provided if available and the "OCCURRENCES" value was contained in the "paramProclnstructs" attribute of the instructions.	
avgAndVar	NumberAverage	C	0..1	Contains the average and variance of the parameter value. It shall be provided if available and the "AVG_VAR" value was contained in the "paramProclnstructs" attribute of the instructions.	
minValue	string	C	0..1	Identifies the minimum value of the parameter. It shall be provided if available and the "MIN_MAX" value was contained in the "paramProclnstructs" attribute of the instructions.	
maxValue	string	C	0..1	Identifies the maximum value of the parameter. It shall be provided if available and the "MIN_MAX" value was contained in the "paramProclnstructs" attribute of the instructions.	

5.1.6.2.11 Type ReportingOptions

Table 5.1.6.2.11-1: Definition of type ReportingOptions

Attribute name	Data type	P	Cardinality	Description	Applicability
notifyWindow	TimeWindow	C	0..1	Represents a start time and a stop time during which notifications shall be sent. (NOTE)	
notifyPeriod	DurationSec	C	0..1	Indicates the period (in seconds) with which notifications are sent to the consumer, irrespective of whether the event occurs (e.g. every 30 minutes). (NOTE)	
notifyPeriodInc	DurationSec	C	0..1	Indicates the time interval (in seconds) between the first two notifications (where the first one is sent upon event occurrence), and that the time interval between subsequent notifications shall be increased each time by the value of this attribute. (NOTE)	
depEventSubId	string	C	0..1	Notifications for the present subscription are sent only upon occurrence of events of the subscription with identifier that matches this attribute. (NOTE)	
NOTE: Exactly one of these attributes shall be provided.					

5.1.6.2.12 Void

5.1.6.3 Simple data types and enumerations

5.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.1.6.3.2 Simple data types

The simple data types defined in table 5.1.6.3.2-1 shall be supported.

Table 5.1.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability
n/a			

5.1.6.3.3 Enumeration: SummarizationAttribute

Table 5.1.6.3.3-1: Enumeration SummarizationAttribute

Enumeration value	Description	Applicability
SPACING	Average and variance of the time interval separating two consecutive occurrences of the same event and parameter value, or periodicity for periodic reporting.	
DURATION	Average and variance of the time for which the parameter value applies.	
OCCURRENCES	Number of countable occurrences for the parameter.	
AVG_VAR	Average and variance of the parameter.	
MIN_MAX	Maximum and minimum parameter values.	

5.1.6.4 Data types describing alternative data types or combinations of data types

None in this release of the specification.

5.1.6.5 Binary data

None in this release of the specification.

5.1.7 Error Handling

5.1.7.1 General

For the Ndcf_DataManagement API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Ndcf_DataManagement API.

5.1.7.2 Protocol Errors

No specific procedures for the Ndcf_DataManagement service are specified.

5.1.7.3 Application Errors

The application errors defined for the Ndcf_DataManagement service are listed in Table 5.1.7.3-1.

Table 5.1.7.3-1: Application errors

Application Error	HTTP status code	Description
SUBSCRIPTION_CANNOT_BE_SERVED	400 Bad Request	Indicates that the DCCF cannot use the contents of the request to either a) determine whether the subscription can already be served or interactions with the NWDAF and/or ADRF are required or b) determine what interactions with the NWDAF and/or ADRF are required (if it has determined that they are required).

5.1.8 Feature negotiation

The optional features in table 5.1.8-1 are defined for the Ndcf_DataManagement API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 5.1.8-1: Supported Features

Feature number	Feature Name	Description

5.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Ndcf_DataManagement API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Ndcf_DataManagement API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Ndcf_DataManagement service.

The Ndcf_DataManagement API defines a single scope "ndccf-datamngt" for the entire service, and it does not define any additional scopes at resource or operation level.

5.2 Ndcf_ContextManagement Service API

5.2.1 Introduction

The Ndcf_ContextManagement shall use the Ndcf_ContextManagement API.

The API URI of the Ndcf_ContextManagement API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "ndccf-contextmngt".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 5.2.3.

5.2.2 Usage of HTTP

5.2.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Ndcf_ContextManagement API is contained in Annex A.

5.2.2.2 HTTP standard headers

5.2.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

5.2.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

5.2.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

5.2.3 Resources

5.2.3.1 Overview

This clause describes the structure for the Resource URIs and the resources and methods used for the service.

Figure 5.2.3.1-1 depicts the resource URIs structure for the Ndcf_ContextManagement API.

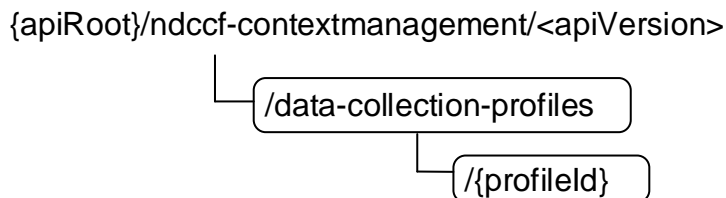


Figure 5.2.3.1-1: Resource URI structure of the Ndcf_ContextManagement API

Table 5.2.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.2.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
DCCF Data Collection Profiles	/data-collection-profiles	POST	Creates a new Individual DCCF Data Collection Profile resource.
Individual DCCF Data Collection Profile	/data-collection-profiles/{profileId}	PUT	Modifies an existing Individual DCCF Data Collection Profile resource.
		DELETE	Deletes an Individual DCCF Data Collection Profile identified by {profileId}.

5.2.3.2 Resource: DCCF Data Collection Profiles

5.2.3.2.1 Description

The DCCF Data Collection Profiles resource represents all data collection profiles that exist in the Ndcf_ContextManagement service at a given DCCF.

5.2.3.2.2 Resource Definition

Resource URI: {apiRoot}/ndccf-contextmanagement/v<apiVersion>/data-collection-profiles

This resource shall support the resource URI variables defined in table 5.2.3.2.2-1.

Table 5.2.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.2.1

5.2.3.2.3 Resource Standard Methods

5.2.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.2.3.2.3.1-1.

Table 5.2.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.2.3.2.3.1-2 and the response data structures and response codes specified in table 5.2.3.2.3.1-3.

Table 5.2.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NdccfDataCollectionProfile	M	1	New Individual DCCF Data Collection Profile resource to be created

Table 5.2.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NdccfDataCollectionProfile	M	1	201 Created	The creation of an Individual DCCF Data Collection Profile resource is confirmed and a representation of that resource is returned.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.2.3.2.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}

5.2.3.2.4 Resource Custom Operations

None in this release of the specification.

5.2.3.3 Resource: Individual DCCF Data Collection Profile

5.2.3.3.1 Description

The Individual DCCF Data Collection Profile resource represents a single data collection profile to the Ndccf_ContextManagement service at a given DCCF.

5.2.3.3.2 Resource Definition

Resource URI: {apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}

This resource shall support the resource URI variables defined in table 5.2.3.3.2-1.

Table 5.2.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1
profileId	string	Identifies a data collection profile to the Ndccf_ContextManagement Service

5.2.3.3.3 Resource Standard Methods

5.2.3.3.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.3.3.3.1-1.

Table 5.2.3.3.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.2.3.3.3.1-2 and the response data structures and response codes specified in table 5.2.3.3.3.1-3.

Table 5.2.3.3.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
NdccfDataCollectionProfile	M	1	Parameters to replace Individual DCCF Data Collection Profile resource.

Table 5.2.3.3.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NdccfDataCollectionProfile	M	1	200 OK	The Individual DCCF Data Collection Profile resource was modified successfully, and a representation of that resource is returned.
n/a			204 No Content	The Individual DCCF Data Collection Profile resource was modified successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual DCCF Data Collection Profile modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual DCCF Data Collection Profile modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.

NOTE: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

Table 5.2.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.2.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.2.3.3.3.2 DELETE

This method shall support the URI query parameters specified in table 5.2.3.3.3.2-1.

Table 5.2.3.3.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.2.3.3.3.2-2 and the response data structures and response codes specified in table 5.2.3.3.3.2-3.

Table 5.2.3.3.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.3.3.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual DCCF Data Collection Profile resource was deleted successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual DCCF Data Collection Profile deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual DCCF Data Collection Profile deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative DCCF (service) instance.

NOTE: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

Table 5.2.3.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	String	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.2.3.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative DCCF (service) instance.
3gpp-Sbi-Target-Nf-Id	String	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

5.2.3.3.4 Resource Custom Operations

None in this release of the specification.

5.2.4 Custom Operations without associated resources

None in this release of the specification.

5.2.5 Notifications

None in this release of the specification.

5.2.6 Data Model

5.2.6.1 General

This clause specifies the application data model supported by the Ndcf_ContextManagement API.

Table 5.2.6.1-1 specifies the data types defined for the Ndcf_ContextManagement service based interface protocol.

Table 5.2.6.1-1: Ndcf_ContextManagement specific Data Types

Data type	Clause defined	Description	Applicability
NdcfDataCollectionProfile	5.2.6.2.2	Represents an Individual DCCF Data Collection Profile resource.	

Table 5.2.6.1-2 specifies data types re-used by the Ndcf_ContextManagement service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Ndcf_ContextManagement service based interface.

Table 5.2.6.1-2: Ndcf_ContextManagement re-used Data Types

Data type	Reference	Comments	Applicability
AfEventExposureSubsc	3GPP TS 29.517 [21]	Represents an AF event subscription	
AmfEventSubscription	3GPP TS 29.518 [19]	Represents an AMF event subscription.	
DataSubscription	3GPP TS 29.575 [25]	Represents a data subscription to one of various possible data sources.	
EeSubscription	3GPP TS 29.503 [20]	Represents a UDM event subscription.	
NefEventExposureSubsc	3GPP TS 29.591 [22]	Represents an NEF event subscription.	
NfInstanceId	3GPP TS 29.571 [17]	NF instance identifier.	
NfSetId	3GPP TS 29.571 [17]	NF Set identifier.	
NnwdafEventsSubscription	3GPP TS 29.520 [15]	Represents an NWDAF analytics subscription.	
NsmfEventExposure	3GPP TS 29.508 [18]	Represents an SMF event subscription.	

5.2.6.2 Structured data types

5.2.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

5.2.6.2.2 Type: NdcfDataCollectionProfile

Table 5.2.6.2.2-1: Definition of type NdcfDataCollectionProfile

Attribute name	Data type	P	Cardinality	Description	Applicability
anaSub	NnwdafEventsSubscription	C	0..1	Representation of the analytics events subscription that is used to collect analytics. (NOTE 1)	
dataSub	DataSubscription	C	0..1	Representation of the data subscription that is used to collect data. (NOTE 1)	
nwdafId	NfInstanceId	C	0..1	NF instance identifier of the NWDAF that this data collection profile belongs to. (NOTE 2)	
adrfId	NfInstanceId	C	0..1	NF instance identifier of the ADRF that this data collection profile belongs to. (NOTE 2)	
nwdafSetId	NfSetId	C	0..1	Identifier of the set of the NWDAF that this data collection profile belongs to. (NOTE 2)	
adrfSetId	NfSetId	C	0..1	Identifier of the set of the ADRF that this data collection profile belongs to. (NOTE 2)	
NOTE 1: Only one of these attributes shall be provided.					
NOTE 2: Only one of these attributes shall be provided.					

5.2.6.3 Simple data types and enumerations

5.2.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.2.6.3.2 Simple data types

The simple data types defined in table 5.2.6.3.2-1 shall be supported.

Table 5.2.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.2.6.4 Data types describing alternative data types or combinations of data types

None in this release of the specification.

5.2.6.5 Binary data

None in this release of the specification.

5.2.7 Error Handling

5.2.7.1 General

For the Ndcf_ContextManagement API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Ndcf_ContextManagement API.

5.2.7.2 Protocol Errors

No specific procedures for the Ndcf_ContextManagement service are specified.

5.2.7.3 Application Errors

The application errors defined for the Ndcf_ContextManagement service are listed in Table 5.2.7.3-1.

Table 5.2.7.3-1: Application errors

Application Error	HTTP status code	Description

5.2.8 Feature negotiation

The optional features in table 5.2.8-1 are defined for the Ndcf_ContextManagement API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 5.2.8-1: Supported Features

Feature number	Feature Name	Description

5.2.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Ndcf_ContextManagement API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Ndcf_ContextManagement API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Ndcf_ContextManagement service.

The Ndcf_ContextManagement API defines a single scope "ndccf-contextmgnt" for the entire service, and it does not define any additional scopes at resource or operation level.

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the formal definition of the API(s) defined in the present specification. It consists of OpenAPI specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see 3GPP TS 29.501 [5] clause 5.3.1 and 3GPP TR 21.900 [7] clause 5B).

A.2 Ndccf_DataManagement API

```

openapi: 3.0.0
info:
  version: 1.0.0
  title: Ndccf_DataManagement
  description: |
    DCCF Data Management Service.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.574 V17.1.0; 5G System; Data Collection Coordination Services; Stage 3.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.574/'
#
servers:
- url: '{apiRoot}/ndccf-datamanagement/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501.
#
security:
- oAuth2ClientCredentials:
  - ndccf-datamanagement
- {}
#
paths:
  /analytics-subscriptions:
    post:
      summary: Creates a new Individual DCCF Analytics Subscription resource.
      operationId: CreateDCCFAnalyticsSubscription
      tags:
        - DCCF Analytics Subscriptions (Collection)
      requestBody:
        description: Contains the information for the creation the resource.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NdccfAnalyticsSubscription'
            required: true
      responses:
        '201':
          description: Create a new Individual DCCF Analytics Subscription resource.
          headers:
            Location:
              description: >
                Contains the URI of the newly created resource, according to the structure
                {apiRoot}/ndccf-datamanagement/<apiVersion>/analytics-subscriptions/{subscriptionId}
              required: true
              schema:

```

```

    type: string
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NdpcfAnalyticsSubscription'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  callbacks:
    dccfAnalyticsNotification:
      '{$request.body#/anaNotifUri}':
        post:
          requestBody:
            required: true
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/NdpcfAnalyticsSubscriptionNotification'
  responses:
    '204':
      description: The receipt of the notification is acknowledged.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  callbacks:
    Fetch:
      '{$request.body#/fetchUri}':
        post:
          requestBody:
            required: true
            content:
              application/json:
                schema:
                  type: array
                  items:
                    type: string

```

```

        minItems: 1
        description: Fetch correlation identifiers.
responses:
  '200':
    description: Expected response to a valid request
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NdccfAnalyticsSubscriptionNotification'
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/analytics-subscriptions/{subscriptionId}:
delete:
  summary: Deletes an existing Individual DCCF Data Subscription.
  operationId: DeleteDCCFAnalyticsSubscription
  tags:
    - Individual DCCF Analytics Subscription (Document)
  parameters:
    - name: subscriptionId
      in: path
      description: >
        String identifying an analytics subscription to the Ndccf_DataManagement Service.
      required: true
      schema:
        type: string
  responses:
    '204':
      description: >
        No Content. The Individual DCCF Analytics Subscription resource matching the
        subscriptionId was deleted.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
put:
  summary: Updates an existing Individual DCCF Analytics Subscription resource.

```

```

operationId: UpdateDCCFAnalyticsSubscription
tags:
  - Individual DCCF Analytics Subscription (Document)
requestBody:
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NdccfAnalyticsSubscription'
parameters:
  - name: subscriptionId
    in: path
    description: >
      String identifying an analytics subscription to the Ndccf_DataManagement Service.
    required: true
    schema:
      type: string
responses:
  '200':
    description: >
      The Individual DCCF Analytics Subscription resource was modified successfully and a
      representation of that resource is returned.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NdccfAnalyticsSubscription'
  '204':
    description: >
      The Individual DCCF Analytics Subscription resource was modified successfully.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-subscriptions:
  post:
    summary: Creates a new Individual DCCF Data Subscription resource.
    operationId: CreateDCCFDataSubscription
    tags:
      - DCCF Data Subscriptions (Collection)
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NdccfDataSubscription'
      required: true
    responses:
      '201':
        description: Creates a new Individual DCCF Data Subscription resource.
        headers:
          Location:
            description: >
              Contains the URI of the newly created resource, according to the structure
              {apiRoot}/ndccf-datamanagement/<apiVersion>/data-subscriptions/{subscriptionId}
            required: true
            schema:
              type: string

```

```

    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NdccfDataSubscription'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  callbacks:
    dccfDataNotification:
      '{$request.body#/dataNotifUri}':
        post:
          requestBody:
            required: true
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/NdccfDataSubscriptionNotification'
  responses:
    '204':
      description: The receipt of the notification is acknowledged.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  callbacks:
    Fetch:
      '{$request.body#/fetchUri}':
        post:
          requestBody:
            required: true
            content:
              application/json:
                schema:
                  type: array
                  items:
                    type: string
                  minItems: 1

```

```

        description: Fetch correlation identifiers.
    responses:
        '200':
            description: Expected response to a valid request
            content:
                application/json:
                    schema:
                        $ref: '#/components/schemas/NdccfAnalyticsSubscriptionNotification'
        '307':
            $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
            $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '406':
            $ref: 'TS29571_CommonData.yaml#/components/responses/406'
        '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
            $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-subscriptions/{subscriptionId}:
    delete:
        summary: Deletes an existing Individual DCCF Data Subscription resource.
        operationId: DeletedCCFDataSubscription
        tags:
            - Individual DCCF Data Subscription (Document)
        parameters:
            - name: subscriptionId
              in: path
              description: String identifying a data subscription to the Ndccf_DataManagement Service.
              required: true
              schema:
                  type: string
        responses:
            '204':
                description: >
                    No Content. The Individual DCCF Data Subscription resource matching the subscriptionId
                    was deleted.
            '307':
                $ref: 'TS29571_CommonData.yaml#/components/responses/307'
            '308':
                $ref: 'TS29571_CommonData.yaml#/components/responses/308'
            '400':
                $ref: 'TS29571_CommonData.yaml#/components/responses/400'
            '401':
                $ref: 'TS29571_CommonData.yaml#/components/responses/401'
            '403':
                $ref: 'TS29571_CommonData.yaml#/components/responses/403'
            '404':
                $ref: 'TS29571_CommonData.yaml#/components/responses/404'
            '429':
                $ref: 'TS29571_CommonData.yaml#/components/responses/429'
            '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
            '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
            default:
                $ref: 'TS29571_CommonData.yaml#/components/responses/default'
    put:
        summary: Updates an existing Individual DCCF Data Subscription resource.
        operationId: UpdateDCCFDataSubscription
        tags:

```



```

- Individual DCCF Data Subscription (Document)
requestBody:
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NdccfDataSubscription'
parameters:
- name: subscriptionId
  in: path
  description: >
    String identifying a data subscription to the Ndccf_DataManagement Service.
  required: true
  schema:
    type: string
responses:
'200':
  description: >
    The Individual DCCF Data Subscription resource was modified successfully and a
    representation of that resource is returned.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NdccfDataSubscription'
'204':
  description: >
    The Individual DCCF Data Subscription resource was modified successfully.
'307':
  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
#
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            ndccf-datamanagement: Access to the ndccf-datamanagement API
#
schemas:
#
  NdccfAnalyticsSubscription:
    description: Represents an Individual DCCF Analytics Subscription.
    type: object
    required:
      - anaSub
      - anaNotifUri
      - anaNotifCorrId
    properties:
      anaSub:
        $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscription'
      anaNotifUri:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  anaNotifCorrId:
    type: string
    description: Notification correlation identifier.
  formatInstruct:
    $ref: '#/components/schemas/FormattingInstruction'
  procInstructs:
    type: array
    items:
      $ref: '#/components/schemas/ProcessingInstruction'
    minItems: 1
    description: Processing instructions to be used for sending event notifications.
  targetNfId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
  targetNfSetId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
  suppFeat:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  timePeriod:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
#
NdccfDataSubscription:
  description: Represents an Individual DCCF Data Subscription.
  type: object
  required:
    - dataNotifUri
    - dataNotifCorrId
    - dataSub
  properties:
    dataSub:
      $ref: 'TS29575_Nadrf_DataManagement.yaml#/components/schemas/DataSubscription'
    dataNotifUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    dataNotifCorrId:
      type: string
      description: Notification correlation identifier.
    formatInstruct:
      $ref: '#/components/schemas/FormattingInstruction'
    procInstructs:
      type: array
      items:
        $ref: '#/components/schemas/ProcessingInstruction'
      minItems: 1
      description: Processing instructions to be used for sending event notifications.
    targetNfId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
    targetNfSetId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
    timePeriod:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
#
NdccfAnalyticsSubscriptionNotification:
  description: Represents a notification for a DCCF analytics subscription.
  type: object
  required:
    - anaNotifCorrId
  oneOf:
    - required: [anaNotifications]
    - required: [anaReports]
    - required: [fetchInstruct]
  properties:
    anaNotifCorrId:
      type: string
      description: Notification correlation identifier.
    anaNotifications:
      type: array
      items:
        $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscriptionNotification'
      minItems: 1
      description: List of analytics subscription notifications.
    anaReports:
      type: array
      items:
        $ref: '#/components/schemas/NotifSummaryReport'

```

```

    minItems: 1
    description: >
      List of reports with summarized data from multiple analytics notifications that the DCCF
      has received from NWDAF.
    fetchInstruct:
      $ref: 'TS29576_Nmfaf_3caDataManagement.yaml#/components/schemas/FetchInstruction'
#
NdccfDataSubscriptionNotification:
  description: Represents a notification for a DCCF data subscription.
  type: object
  required:
    - dataNotifCorrId
  oneOf:
    - required: [dataNotif]
    - required: [dataReports]
    - required: [fetchInstruct]
  properties:
    dataNotifCorrId:
      type: string
      description: Notification correlation identifier.
    dataNotif:
      $ref: 'TS29575_Nadrf_DataManagement.yaml#/components/schemas/DataNotification'
    dataReports:
      type: array
      items:
        $ref: '#/components/schemas/NotifSummaryReport'
      minItems: 1
      description: >
        List of reports with summarized data from multiple notifications received from data
        producer.
    fetchInstruct:
      $ref: 'TS29576_Nmfaf_3caDataManagement.yaml#/components/schemas/FetchInstruction'
#
FormattingInstruction:
  description: Contains data or analytics formatting instructions.
  type: object
  properties:
    consTrigNotif:
      type: boolean
      description: >
        Indicates that notifications shall be buffered until the NF service consumer requests
        their delivery.
    reportingOptions:
      $ref: '#/components/schemas/ReportingOptions'
#
ReportingOptions:
  description: Represents reporting options for processed notifications.
  type: object
  oneOf:
    - required: [notifyWindow]
    - required: [notifyPeriod]
    - required: [notifyPeriodInc]
    - required: [depEventSubId]
  properties:
    notifyWindow:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
    notifyPeriod:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    notifyPeriodInc:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    depEventSubId:
      type: string
      description: >
        Notifications for the present subscription are sent only upon occurrence of events of
        the
        subscription with identifier that matches this attribute.
#
ProcessingInstruction:
  description: Contains instructions related to the processing of notifications.
  type: object
  required:
    - eventId
    - procInterval
  properties:
    eventId:
      type: string
      description: >

```

```

    Identifies the (event exposure or analytics) event that the processing instructions
shall
    apply to.
    procInterval:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    paramProcInstructs:
      type: array
      items:
        $ref: '#/components/schemas/ParameterProcessingInstruction'
      minItems: 1
      description: >
        List of event parameter names, and for each event parameter name, respective event
        parameter values and sets of the attributes to be used in the summarized reports.
#
ParameterProcessingInstruction:
  description: >
    Contains an event parameter name and the respective event parameter values and sets of
    attributes to be used in summarized reports.
  type: object
  required:
    - name
    - values
    - sumAttrs
  properties:
    name:
      type: string
      description: >
        A JSON pointer value that references an attribute within the notification object to
which
        the processing instruction is applied.
    values:
      type: array
      items: {}
      minItems: 1
      description: A list of values for the attribute identified by the name attribute.
    sumAttrs:
      type: array
      items:
        $ref: '#/components/schemas/SummarizationAttribute'
      minItems: 1
      description: Attributes requested to be used in the summarized reports.
#
NotifSummaryReport:
  description: Represents summarized notifications based on processing instructions.
  type: object
  required:
    - eventId
    - procInterval
    - eventReports
  properties:
    eventId:
      type: string
      description: >
        Identifies the (event exposure or analytics) event that this report applies to.
    procInterval:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    eventReports:
      type: array
      items:
        $ref: '#/components/schemas/EventParamReport'
      minItems: 1
      description: List of event parameter reports.
#
EventParamReport:
  description: Represents a summarized report for one event parameter.
  type: object
  required:
    - name
    - values
  properties:
    name:
      type: string
      description: The name of the reported parameter.
    values:
      type: array
      items:
        type: string
      minItems: 1

```

```

    description: The list of values of the reported parameter.
  spacing:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NumberAverage'
  duration:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NumberAverage'
  avgAndVar:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NumberAverage'
  count:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
  minValue:
    type: string
    description: The minimum value of the parameter.
  maxValue:
    type: string
    description: The maximum value of the parameter.
#
  SummarizationAttribute:
    anyOf:
      - type: string
        enum:
          - SPACING
          - DURATION
          - OCCURRENCES
          - AVG_VAR
          - MIN_MAX
      - type: string
    description: |
      Possible values are:
      - SPACING: Average and variance of the time interval separating two consecutive occurrences
of the same event and parameter value, or periodicity for periodic reporting.
      - DURATION: Average and variance of the time for which the parameter value applies.
      - OCCURRENCES: Number of countable occurrences for the parameter.
      - AVG_VAR: Average and variance of the parameter.
      - MIN_MAX: Maximum and minimum parameter values.
#

```

A.3 Ndccf_ContextManagement API

```

openapi: 3.0.0
info:
  version: 1.0.0
  title: Ndccf_ContextManagement
  description: |
    DCCF Context Management Service.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.574 V17.1.0; 5G System; Data Collection Coordination Services; Stage 3.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.574/'
#
servers:
  - url: '{apiRoot}/ndccf-contextmanagement/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501.
#
security:
  - oAuth2ClientCredentials:
    - ndccf-contextmanagement
  - {}
#
paths:
  /data-collection-profiles:
    post:
      summary: Creates a new Individual DCCF Data Collection Profile resource.
      operationId: CreatedCCFDataCollectionProfile
      tags:
        - DCCF Data Collection Profiles (Collection)
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NdccfDataCollectionProfile'
            required: true
      responses:
        '201':

```

```

description: A new Individual DCCF Data Collection Profile resource created.
headers:
  Location:
    description: >
      Contains the URI of the newly created resource, according to the structure
      {apiRoot}/ndccf-contextmanagement/<apiVersion>/data-collection-profiles/{profileId}'
    required: true
    schema:
      type: string
content:
  application/json:
    schema:
      $ref: '#/components/schemas/NdccfDataCollectionProfile'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-collection-profiles/{profileId}:
delete:
  summary: Deletes an existing Individual DCCF Data Subscription resource.
  operationId: DeleteDCCFDataCollectionProfile
  tags:
    - Individual DCCF Data Collection Profile (Document)
  parameters:
    - name: profileId
      in: path
      description: >
        String identifying a data collection profile at the Ndccf_ContextManagement Service.
      required: true
      schema:
        type: string
  responses:
    '204':
      description: >
        No Content. The Individual DCCF Data Collection Profile resource matching the profileId
        was deleted.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
put:
  summary: Updates an existing Individual DCCF Data Collection Profile resource.
  operationId: UpdateDCCFDataCollectionProfile
  tags:

```

```

- Individual DCCF Data Collection Profile (Document)
requestBody:
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NdccfDataCollectionProfile'
parameters:
- name: profileId
  in: path
  description: >
    String identifying a data collection profile at the Ndccf_ContextManagement Service.
  required: true
  schema:
    type: string
responses:
'200':
  description: >
    The Individual DCCF Data Collection Profile resource was modified successfully and a
    representation of that resource is returned.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NdccfDataCollectionProfile'
'204':
  description: >
    The Individual DCCF Data Collection Profile resource was modified successfully.
'307':
  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
#
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            ndccf-contextmanagement: Access to the ndccf-contextmanagement API
#
schemas:
  NdccfDataCollectionProfile:
    description: Represents an Individual DCCF Data Collection Profile.
    type: object
    allOf:
      - oneOf:
        - required: [anaSub]
        - required: [dataSub]
      - oneOf:
        - required: [nwdafId]
        - required: [adrfId]
        - required: [nwdafSetId]
        - required: [adrfSetId]

```

```
properties:
  anaSub:
    $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscription'
  dataSub:
    $ref: 'TS29575_Nadrf_DataManagement.yaml#/components/schemas/DataNotification'
  nwdafId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
  nwdafSetId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
  adrfId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
  adrfSetId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
#
```


Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-05	CT3#116e					Skeleton of TS on 5G System; Data Collection Coordination Services; Stage 3.	0.0.0
2021-05	CT3#116e					Inclusion of documents agreed in CT3#116e: C3-213235, C3-213236, C3-213237, C3-213238 and C3-213239.	0.1.0
2021-08	CT3#117e					Inclusion of document agreed in CT3#117e: C3-214167.	0.2.0
2021-10	CT3#118e					Inclusion of document agreed in CT3#118e: C3-215182, C3-215480, C3-215184, C3-215185, C3-215186, C3-215187, C3-215188.	0.3.0
2021-11	CT3#119e					Inclusion of document agreed in CT3#119e: C3-216452, C3-216453, C3-216454, C3-216057, C3-216058, C3-216601	0.4.0
2022-01	CT3#119bis-e					Inclusion of document agreed in CT3#119bis-e: C3-220506, C3-220507, C3-220508, C3-220497, C3-220509, C3-220498, C3-220050, C3-220368, C3-220301.	0.5.0
2022-02	CT3#120-e					Inclusion of document agreed in CT3#120e: C3-221619, C3-221281, C3-221287, C3-221682, C3-221301.	0.6.0
2022-03	CT#95e	CP-220159				Presentation to TSG CT for approval	1.0.0
2022-03	CT#95e	CP-220159				Approved by TSG CT	17.0.0
2022-06	CT#96	CP-221132	0001	1	F	Adding 3XX response handling support for DCCF services	17.1.0
2022-06	CT#96	CP-221132	0003	1	F	Corrections in the Ndccf_DataManagement API	17.1.0
2022-06	CT#96	CP-221132	0004	1	F	Removing ENs about possible further data sources and attributes	17.1.0
2022-06	CT#96	CP-221132	0005	1	B	Update Ndccf_DataManagement_Fetch service operation	17.1.0
2022-06	CT#96	CP-221131	0009	1	F	Ndccf_DataManagement API corrections	17.1.0
2022-06	CT#96	CP-221130	0010	-	F	Ndccf_DataManagement API: responses on DELETE method	17.1.0
2022-06	CT#96	CP-221130	0011	-	F	Ndccf_DataManagement API: responses on DELETE method	17.1.0
2022-06	CT#96	CP-221130	0012	-	B	Remove the unused sections from TS skeleton	17.1.0
2022-06	CT#96	CP-221131	0013	1	F	Miscellaneous corrections and updates	17.1.0
2022-06	CT#96	C3-223520	0020	1	F	Update the apiVersion in the specification	17.1.0
2022-06	CT#96	CP-221133	0015	-	F	Removing UDM from the list of service consumers for DCCF subscriptions	17.1.0
2022-06	CT#96	CP-221136	0002	3	B	Cleanup of the Ndccf_DataManagement data model	17.1.0
2022-06	CT#96	CP-221133	0016	-	F	Removal of repetitive description in HTTP error response	17.1.0
2022-06	CT#96	CP-221136	0006	3	B	Support carrying Time Window in Ndccf_DataManagement_Subscribe service operation	17.1.0
2022-06	CT#96	CP-221134	0018	-	B	Remove the ENs about when the DCCF sends the response to the consumer	17.1.0
2022-06	CT#96	CP-221134	0019	1	B	Update the Notification Correlation ID for Ndccf_DataManagement_Subscribe	17.1.0
2022-06	CT#96	CP-221134	0007	1	F	add ADRF as a consumer of Ndccf_DataManagement service	17.1.0
2022-06	CT#96	CP-221135	0021	1	F	remove CEF and OAM from the list of consumers of Ndccf_DataManagement Service	17.1.0
2022-06	CT#96	CP-221135	0022	1	F	update of Abbreviations	17.1.0
2022-06	CT#96	CP-221152	0023	-	F	Update of info and externalDocs fields	17.1.0

History

Document history		
V17.0.0	May 2022	Publication
V17.1.0	July 2022	Publication