

ETSI TS 129 575 V19.7.0 (2026-07)



**5G;
5G System;
Analytics Data Repository Services;
Stage 3
(3GPP TS 29.575 version 19.7.0 Release 19)**



Reference

RTS/TSGC-0329575vj70

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part of this document may be reproduced in any form, by any means and in any media, without the prior written authorization of ETSI and except as expressly permitted below.

By way of exception and when the document is a normative deliverable (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)), ETSI authorizes to reproduce and incorporate into products, services and technical documentation only those extracts (e.g. templates) that are strictly necessary for the technical implementation of the normative deliverable, to ensure compliance with the latter. Nothing in this notice shall be construed as limiting any mandatory exceptions to copyright provided by applicable law.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)) may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

BLUETOOTH® is a trademark registered and owned by Bluetooth SIG, Inc.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	7
Introduction	8
1 Scope	9
2 References	9
3 Definitions, symbols and abbreviations	10
3.1 Definitions	10
3.2 Symbols.....	10
3.3 Abbreviations	10
4 Services offered by the ADRF	11
4.1 Introduction	11
4.2 Nadrif_DataManagement Service	12
4.2.1 Service Description.....	12
4.2.1.1 Overview	12
4.2.1.2 Service Architecture.....	12
4.2.1.3 Network Functions	13
4.2.1.3.1 Analytics Data Repository Function (ADRF)	13
4.2.1.3.2 NF Service Consumers	13
4.2.2 Service Operations	13
4.2.2.1 Introduction.....	13
4.2.2.2 Nadrif_DataManagement_StorageRequest service operation.....	14
4.2.2.2.1 General	14
4.2.2.2.2 Request Storage of data or analytics.....	14
4.2.2.3 Nadrif_DataManagement_StorageSubscriptionRequest service operation.....	15
4.2.2.3.1 General	15
4.2.2.3.2 Requesting subscription and storage of data or analytics	15
4.2.2.4 Nadrif_DataManagement_StorageSubscriptionRemoval service operation	16
4.2.2.4.1 General	16
4.2.2.4.2 Requesting removal of subscription of data or analytics	17
4.2.2.5 Nadrif_DataManagement_RetrievalRequest service operation	17
4.2.2.5.1 General	17
4.2.2.5.2 Request and get stored data or analytics from ADRF Data Store.....	17
4.2.2.6 Nadrif_DataManagement_RetrievalSubscribe service operation.....	19
4.2.2.6.1 General	19
4.2.2.6.2 Requesting retrieval and subscription of data or analytics	19
4.2.2.7 Nadrif_DataManagement_RetrievalUnsubscribe service operation	20
4.2.2.7.1 General	20
4.2.2.7.2 Requesting removal of retrieval subscription for data or analytics.....	20
4.2.2.8 Nadrif_DataManagement_RetrievalNotify service operation.....	21
4.2.2.8.1 General	21
4.2.2.8.2 Notification about subscribed data or analytics	21
4.2.2.8.3 Notification about data or analytics that are about to be deleted	22
4.2.2.9 Nadrif_DataManagement_Delete service operation	23
4.2.2.9.1 General	23
4.2.2.9.2 Requesting removal of stored data or analytics	23
4.2.2.9.3 Requesting removal of stored data or analytics using data or analytics specification	23
4.3 Nadrif_MLModelManagement Service.....	24
4.3.1 Service Description.....	24
4.3.1.1 Overview	24
4.3.1.2 Service Architecture.....	25
4.3.1.3 Network Functions	25

4.3.1.3.1	Analytics Data Repository Function (ADRF)	25
4.3.1.3.2	NF Service Consumers	25
4.3.2	Service Operations	26
4.3.2.1	Introduction	26
4.3.2.2	Nadrf_MLModelManagement_StorageRequest service operation	26
4.3.2.2.1	General	26
4.3.2.2.2	Request Storage of ML model(s)	26
4.3.2.2.3	Update Storage of ML model(s)	27
4.3.2.3	Nadrf_MLModelManagement_RetrievalRequest service operation	28
4.3.2.3.1	General	28
4.3.2.3.2	Request and get stored ML model(s) from ADRF ML Model Store	28
4.3.2.4	Nadrf_MLModelManagement_Delete service operation	29
4.3.2.4.1	General	29
4.3.2.4.2	Requesting removal of stored ML model(s)	29
4.3.2.4.3	Requesting removal of stored ML model(s) using unique ML model identifier	30
5	API Definitions	31
5.1	Nadrf_DataManagement Service API	31
5.1.1	Introduction	31
5.1.2	Usage of HTTP	31
5.1.2.1	General	31
5.1.2.2	HTTP standard headers	32
5.1.2.2.1	General	32
5.1.2.2.2	Content type	32
5.1.2.3	HTTP custom headers	32
5.1.3	Resources	32
5.1.3.1	Overview	32
5.1.3.2	Resource: ADRF Data Store Records	33
5.1.3.2.1	Description	33
5.1.3.2.2	Resource Definition	33
5.1.3.2.3	Resource Standard Methods	33
5.1.3.2.4	Resource Custom Operations	35
5.1.3.3	Resource: Individual ADRF Data Store Record	35
5.1.3.3.1	Description	35
5.1.3.3.2	Resource Definition	35
5.1.3.3.3	Resource Standard Methods	35
5.1.3.3.4	Resource Custom Operations	37
5.1.3.4	Resource: ADRF Data Retrieval Subscriptions	37
5.1.3.4.1	Description	37
5.1.3.4.2	Resource Definition	37
5.1.3.4.3	Resource Standard Methods	37
5.1.3.4.4	Resource Custom Operations	38
5.1.3.5	Resource: Individual ADRF Data Retrieval Subscription	38
5.1.3.5.1	Description	38
5.1.3.5.2	Resource Definition	38
5.1.3.5.3	Resource Standard Methods	38
5.1.3.5.4	Resource Custom Operations	39
5.1.4	Custom Operations without associated resources	39
5.1.4.1	Overview	39
5.1.4.2	Operation: request-storage-sub	40
5.1.4.2.1	Description	40
5.1.4.2.2	Operation Definition	40
5.1.4.3	Operation: request-storage-sub-removal	41
5.1.4.3.1	Description	41
5.1.4.3.2	Operation Definition	41
5.1.4.4	Operation: remove-stored-data-analytics	42
5.1.4.4.1	Description	42
5.1.4.4.2	Operation Definition	42
5.1.5	Notifications	43
5.1.5.1	General	43
5.1.5.2	Retrieval Notification	44
5.1.5.2.1	Description	44

5.1.5.2.2	Target URI.....	44
5.1.5.2.3	Standard Methods.....	44
5.1.5.3	ADRF Alert Notification.....	45
5.1.5.3.1	Description	45
5.1.5.3.2	Target URI.....	45
5.1.5.3.3	Standard Methods.....	45
5.1.6	Data Model	46
5.1.6.1	General	46
5.1.6.2	Structured data types	50
5.1.6.2.1	Introduction	50
5.1.6.2.2	Type: NadrDataStoreRecord	51
5.1.6.2.3	Type: NadrDataStoreSubscription	52
5.1.6.2.4	Type: NadrDataRetrievalSubscription	53
5.1.6.2.5	Type: NadrDataRetrievalNotification	54
5.1.6.2.6	Type: NadrDataStoreSubscriptionRef.....	54
5.1.6.2.7	Type: NadrStoredDataSpec	55
5.1.6.2.8	Type: DataSubscription	55
5.1.6.2.10	Type: StorageHandlingInfo	57
5.1.6.2.11	Type: NadrAlertNotification	57
5.1.6.2.12	Type: NadrAlertNotificationResponse	57
5.1.6.2.13	Type: DataSetTag.....	57
5.1.6.3	Simple data types and enumerations	58
5.1.6.4	Data types describing alternative data types or combinations of data types	58
5.1.7	Error Handling	58
5.1.7.1	General	58
5.1.7.2	Protocol Errors	58
5.1.7.3	Application Errors.....	58
5.1.8	Feature negotiation	58
5.1.9	Security	58
5.2	Nadr MLModelManagement Service API	59
5.2.1	Introduction.....	59
5.2.2	Usage of HTTP	59
5.2.2.1	General	59
5.2.2.2	HTTP standard headers	59
5.2.2.2.1	General	59
5.2.2.2.2	Content type	60
5.2.2.3	HTTP custom headers	60
5.2.3	Resources.....	60
5.2.3.1	Overview	60
5.2.3.2	Resource: ADRF ML Model Store Records	61
5.2.3.2.1	Description	61
5.2.3.2.2	Resource Definition.....	61
5.2.3.2.3	Resource Standard Methods	61
5.2.3.2.4	Resource Custom Operations	63
5.2.3.3	Resource: Individual ADRF ML Model Store Record.....	63
5.2.3.3.1	Description	63
5.2.3.3.2	Resource Definition.....	63
5.2.3.3.3	Resource Standard Methods	63
5.2.3.3.4	Resource Custom Operations	66
5.2.4	Custom Operations without associated resources	66
5.2.4.1	Overview	66
5.2.4.4	Operation: remove-stored-mlmodel	66
5.2.4.4.1	Description	66
5.2.4.4.2	Operation Definition.....	66
5.2.5	Notifications	67
5.2.6	Data Model	68
5.2.6.1	General	68
5.2.6.2	Structured data types	68
5.2.6.2.1	Introduction	68
5.2.6.2.2	Type: NadrMLModelStoreRecord	69
5.2.6.2.3	Type: MLModelInfo.....	69
5.2.6.2.4	Type: MLModel	70

5.2.6.2.5	Type: MLModelDelResult	70
5.2.6.2.6	Type: AllowedConsumer.....	70
5.2.6.2.7	Type: ModelStoreResult.....	70
5.2.6.3	Simple data types and enumerations	70
5.2.6.3.2	Enumeration: StoreResult.....	71
5.2.6.4	Data types describing alternative data types or combinations of data types	71
5.2.7	Error Handling	71
5.2.7.1	General	71
5.2.7.2	Protocol Errors	71
5.2.7.3	Application Errors	71
5.2.8	Feature negotiation	71
5.2.9	Security	72
Annex A (normative): OpenAPI specification		73
A.1	General	73
A.2	Nadrf_DataManagement API.....	73
A.3	Nadrf_MLModelManagement API.....	86
Annex B (informative): Change history		93
History		96

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

Introduction

This clause is optional. If it exists, it is always the second unnumbered clause.

1 Scope

The present document specifies the stage 3 protocol and data model for the ADRF Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the ADRF.

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2] and 3GPP TS 23.502 [3]. The stage 2 definition and procedures of store and retrieve the collected data and analytics are contained in 3GPP TS 23.288 [14] and 3GPP TS 23.502 [3].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI 3.0.0 Specification", <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.0.md>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 9113: "HTTP/2".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 9457: "Problem Details for HTTP APIs"
- [14] 3GPP TS 23.288: "Architecture enhancements for 5G System (5GS) to support network data analytics services".
- [15] 3GPP TS 29.520: "5G System; Network Data Analytics Services; Stage 3".
- [16] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [17] 3GPP TS 29.508: "5G System; Session Management Event Exposure Service; Stage 3".
- [18] 3GPP TS 29.518: "5G System; Access and Mobility Management Services; Stage 3".

- [19] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".
- [20] 3GPP TS 29.517: "5G System; Application Function Event Exposure Services; Stage 3".
- [21] 3GPP TS 29.591: "5G System; Network Exposure Function Southbound Services; Stage 3".
- [22] 3GPP TS 29.122: "T8 reference point for Northbound APIs".
- [23] 3GPP TS 29.574: "5G System; Data Collection Coordination Services; Stage 3".
- [24] 3GPP TS 29.576: "5G System; Messaging Framework Adaptor Services; Stage 3".
- [25] 3GPP TS 29.536: "5G System; Network Slice Admission Control Services; Stage 3".
- [26] 3GPP TS 29.564: "5G System; User Plane Function Services; Stage 3".
- [27] 3GPP TS 29.515: "5G System; Gateway Mobile Location Services; Stage 3".
- [28] 3GPP TS 29.552: "5G System; Network Data Analytics signalling flows; Stage 3".
- [29] 3GPP TS 29.572: "5G System; Location Management Services; Stage 3".
- [30] 3GPP TS 29.523: "5G System; Policy Control Event Exposure Service; Stage 3".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

None.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

None.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

ADRF	Analytics Data Repository Function
AF	Application Function
AMF	Access and Mobility Management Function
DCCF	Data Collection Coordination Function
GMLC	Gateway Mobile Location Centre
LMF	Location Management Function
MFAF	Messaging Framework Adaptor Function
NEF	Network Exposure Function
NF	Network Function
NRF	Network Repository Function
NWDAF	Network Data Analytics Function
NSACF	Network Slice Admission Control Function
PCF	Policy Control Function
SMF	Session Management Function

UDM Unified Data Management
UPF User Plane Function

4 Services offered by the ADRF

4.1 Introduction

The Analytics Data Repository Service is used for the Analytics Data Repository Function (ADRF) to storage and retrieval of data and ML model(s) by e.g. NF service consumers (e.g. NWDAF) which access the data or ML model(s) using Nadrf service. The ADRF offers to NF service consumers the following services:

Table 4.1-1: Service provided by ADRF

Service Name	Description	Service Operations	Operation Semantics	Example Consumer(s)
Nadrf_DataManagement (NOTE 1)	This service enables the NF service consumers to store, retrieve and remove the data or analytics in an ADRF.	StorageRequest	Request / Response	DCCF, NWDAF, MFAF
		StorageSubscriptionRequest	Request / Response	DCCF, NWDAF
		StorageSubscriptionRemoval	Request / Response	DCCF, NWDAF
		RetrievalRequest	Request / Response	DCCF, NWDAF
		RetrievalSubscribe	Subscribe / Notify	DCCF, NWDAF
		RetrievalUnsubscribe	Subscribe / Notify	DCCF, NWDAF
		RetrievalNotify	Subscribe / Notify	DCCF, NWDAF
		Delete	Request / Response	DCCF, NWDAF
Nadrf_MLModelManagement (NOTE 2)	This service enables the NF service consumers to store, retrieve and delete ML model(s) in an ADRF.	StorageRequest	Request / Response	NWDAF
		RetrievalRequest	Request / Response	NWDAF, LMF
		Delete	Request / Response	NWDAF
NOTE 1: The services correspond to the Nadrf_DataManagement service as defined in 3GPP TS 23.288 [14].				
NOTE 2: The services correspond to the Nadrf_MLModelManagement service as defined in 3GPP TS 23.288 [14].				

Table 4.1-2 summarizes the corresponding APIs defined for this specification.

Table 4.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
Nadrf_DataManagement	5.1	API for Nadrf_DataManagement	TS29575_Nadrf_DataManagement.yaml	nadrf-datamanagement	A.2
Nadrf_MLModelManagement	5.2	API for Nadrf_MLModelManagement	TS29575_Nadrf_MLModelManagement.yaml	nadrf-mlmodelmanagement	A.3

4.2 Nadrf_DataManagement Service

4.2.1 Service Description

4.2.1.1 Overview

The Nadrf_DataManagement service as defined in 3GPP TS 23.288 [14], is provided by the Analytics Data Repository Function (ADRF).

This service:

- allows NF service consumers to store data or analytics in the ADRF, and request/receive notifications about data or analytics that are about to be deleted;
- allows NF service consumers to retrieve data or analytics from an ADRF; and
- allows NF service consumers to delete data or analytics from an ADRF.

4.2.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Network Data Analytics Exposure architecture is defined in 3GPP TS 23.288 [14].

The Nadrf_DataManagement service is part of the Nadrf service-based interface exhibited by the Analytics Data Repository Function (ADRF).

Known consumers of the Nadrf_DataManagement service are:

- Data Collection Coordination Function (DCCF)
- Network Data Analytics Function (NWDAF)
- Messaging Framework Adaptor Function (MFAF)

The Nadrf_DataManagement service is provided by the ADRF and consumed by the NF service consumers as shown in figure 4.2.1.2-1 for the SBI representation model and in figure 4.2.1.2-2 for the reference point representation model.

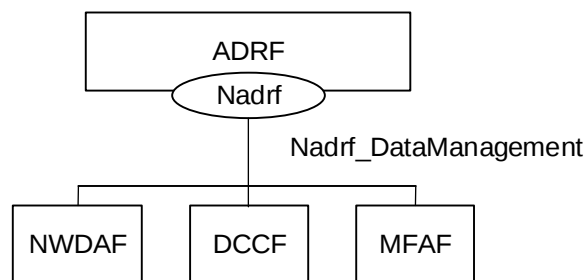


Figure 4.2.1.2-1: Reference Architecture for the Nadrf_DataManagement Service; SBI representation

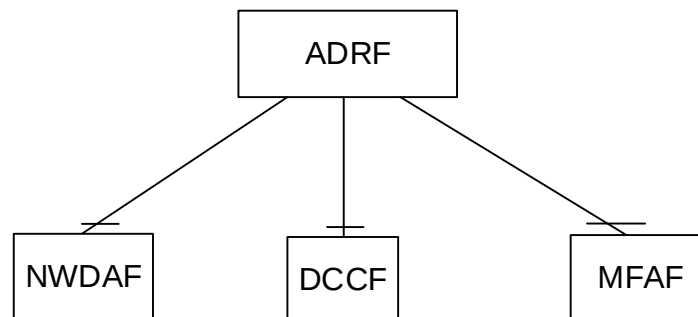


Figure 4.2.1.2-2: Nadrf_DataManagement service architecture, reference point representation

4.2.1.3 Network Functions

4.2.1.3.1 Analytics Data Repository Function (ADRF)

The Analytics Data Repository Function (ADRF) provides the functionality to allow NF service consumers to store, retrieve, and remove data or analytics from the ADRF, and request/receive notifications about data or analytics that are about to be deleted.

4.2.1.3.2 NF Service Consumers

The NWDAF and DCCF:

- supports storing data or analytics in the ADRF, and requesting/receiving notifications about data or analytics that are about to be deleted;
- supports retrieving data or analytics from an ADRF; and
- supports deletion data or analytics from an ADRF.

The MFAF:

- supports storing data or analytics in the ADRF.

4.2.2 Service Operations

4.2.2.1 Introduction

Table 4.2.2.1-1: Operations of the Nadrf_DataManagement Service

Service operation name	Description	Initiated by
Nadrf_DataManagement_StorageRequest	This service operation is used by an NF to request the ADRF to store data or analytics. Data or analytics are provided to the ADRF in the request message.	NF service consumer (DCCF, NWDAF, MFAF)
Nadrf_DataManagement_StorageSubscriptionRequest	This service operation is used by an NF to request the ADRF to initiate a subscription for data or analytics. Data or analytics provided in notifications as a result of the subsequent subscription by the ADRF are stored in the ADRF.	NF service consumer (DCCF, NWDAF)
Nadrf_DataManagement_StorageSubscriptionRemoval	This service operation is used by an NF to request that the ADRF no longer subscribes to data or analytics it is collecting and storing.	NF service consumer (DCCF, NWDAF)
Nadrf_DataManagement_RetrievalRequest	This service operation is used by an NF to retrieve stored data or analytics from the ADRF.	NF service consumer (DCCF, NWDAF)
Nadrf_DataManagement_RetrievalSubscription	This service operation is used by an NF to retrieve stored data or analytics from the ADRF and to receive future notifications containing the corresponding data or analytics received by ADRF.	NF service consumer (DCCF, NWDAF)
Nadrf_DataManagement_RetrievalUnsubscribe	This service operation is used by an NF to request that the ADRF no longer sends data or analytics to a notification endpoint.	NF service consumer (DCCF, NWDAF)
Nadrf_DataManagement_RetrievalNotify	This service operation is used by the ADRF to notify an NF with either data or analytics, or instructions to fetch the data or analytics from the ADRF. It is also used by the ADRF to notify NF service consumers about data or analytics that are about to be deleted.	ADRF
Nadrf_DataManagement_Delete	This service operation is used by an NF to delete stored data or analytics in ADRF.	NF service consumer (DCCF, NWDAF)

4.2.2.2 Ndrf_DataManagement_StorageRequest service operation

4.2.2.2.1 General

The Ndrf_DataManagement_StorageRequest service operation is used by an NF service consumer to store data or analytics.

4.2.2.2.2 Request Storage of data or analytics

Figure 4.2.2.2.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to store data or analytics.

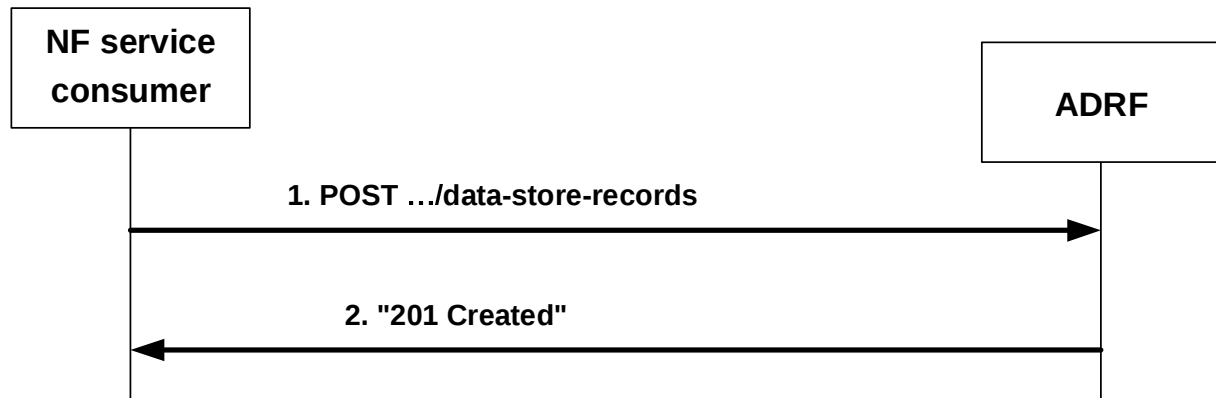


Figure 4.2.2.2.2-1: NF service consumer requesting to store data or analytics

The NF service consumer shall invoke the Ndrf_DataManagement_StorageRequest service operation to store data or analytics. The NF service consumer shall send an HTTP POST request with "{apiRoot}/ndrf-datamanagement/<apiVersion>/data-store-records" as Resource URI representing the "ADRF Data Store Records" resource, as shown in figure 4.2.2.2.2-1, step 1, to create an "Individual ADRF Data Store Record" according to the information in the message body. The NdrfDataStoreRecord data structure provided in the request body shall include:

- one of the following:
 - analytics subscription notification(s) within the "anaNotifications" attribute together with the corresponding subscription information within the "anaSub" attribute;
 - data subscription notification within the "dataNotif" attribute together with the corresponding subscription information within the "dataSub" attribute.

and may include:

- storage handling information within the "storeHandl" attribute, if the "EnhDataMgmt" feature is supported.
- a data set tag within the "dataSetTag" attribute, if the "EnhDataMgmt" feature is supported;
- data synthesis and compression information within the "dsc" attribute, if the "EnhDataMgmt" feature is supported.

NOTE: The data synthesis and compression information can include an indication that the data have been generated using a data synthesis tool, an indication that the data have been generated using a data compression tool, and information about the data synthesis and/or compression technique.

Upon the reception of an HTTP POST request with "{apiRoot}/ndrf-datamanagement/<apiVersion>/data-store-records" as Resource URI and NdrfDataStoreRecord data structure as request body, the ADRF shall:

- create a new data store record;
- assign a storeTransId;
- store the data or analytics.

NOTE 1: If the data and/or analytics is already stored or being stored in the ADRF, the ADRF will still create a new "Individual ADRF Data Store Record" resource and assign a new storeTransId if the ADRF intends to not really store the data again in the memory again based on the implementation.

If the ADRF created an "Individual ADRF Data Store Record" resource, the ADRF shall respond with "201 Created" with the message body containing a representation of the created record, as shown in figure 4.2.2.2-1, step 2. The ADRF shall include a Location HTTP header field. The Location header field shall contain the URI of the created record i.e. "{apiRoot}/nadrif-datamanagement/<apiVersion>/data-store-records/{storeTransId}".

If the ADRF receives storage handling information in the request but determines (e.g. based on local policy) that a different storage approach shall be followed, it indicates the determined storage approach to the consumer by setting accordingly the "storeHandl" attribute (e.g. providing a different lifetime, or omitting the deletion notification URI to indicate that no deletion alerts will be sent) in the message body of the response. When more than one consumer has requested storage lifetime for the same data or analytics, the storage approach should be based on the longest requested storage lifetime.

NOTE 2: The default operator policy for how long data or analytics are to be stored can be longer or shorter than the lifetime requested by the consumer. A default operator policy can for example accept only consumer requested lifetimes that are shorter or longer than the default policy.

If an error occurs when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.3 Nadrf_DataManagement_StorageSubscriptionRequest service operation

4.2.2.3.1 General

The Nadrf_DataManagement_StorageSubscriptionRequest service operation is used by an NF service consumer to request that the ADRF creates a subscription to data or analytics and subsequently stores notified data or analytics in the ADRF.

4.2.2.3.2 Requesting subscription and storage of data or analytics

Figure 4.2.2.3.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to subscribe for data or analytics to be stored in the ADRF.

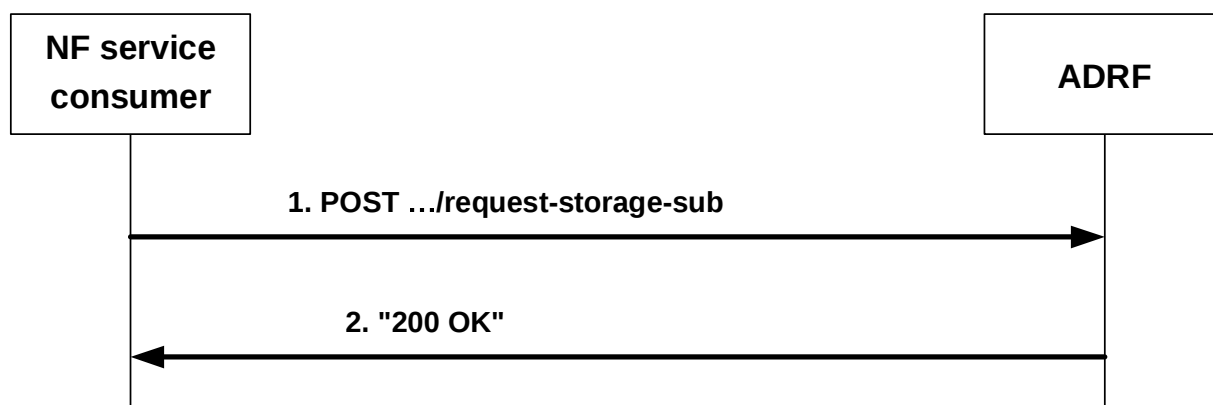


Figure 4.2.2.3.2-1: NF service consumer requesting that the ADRF subscribes to and subsequently stores data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_StorageSubscriptionRequest service operation to request the ADRF to subscribe to data or analytics. The NF service consumer shall send an HTTP POST request with "{apiRoot}/nadrif-datamanagement/<apiVersion>/request-storage-sub" as URI, as shown in figure 4.2.2.3.2-1, step 1. The NadrfDataStoreSubscription data structure provided in the request body shall include:

- one of the following subscription attributes:
 - analytics subscription information within the "anaSub" attribute;

- data subscription information within the "dataSub" attribute;
- one of the following target identifiers:
 - DCCF or NWDAF instance identifier within the "targetNfId" attribute;
 - DCCF or NWDAF NF set identifier within the "targetNfSetId" attribute;

and may include:

- formatting instructions within the "formatInstruct" attribute;
- processing instructions within the "procInstruct" attribute or the "multiProcInstructs" attribute if the "MultiProcessingInstruction" feature is supported.

NOTE 1: The parameters provided by the NF service consumer, including Formatting and Processing Instructions (if provided) are used by the ADRF when subscribing to a DCCF or NWDAF for Data or Analytics to be stored.

- storage handling information within the "storeHandl" attribute, if the "EnhDataMgmt" feature is supported.
- a data set tag to be associated with this subscription and with the data or analytics collected based on this subscription within the "dataSetTag" attribute, if the "EnhDataMgmt" feature is supported.

Upon the reception of an HTTP POST request with "{apiRoot}/nadrfdatamanagement/<apiVersion>/request-storage-sub" as URI and NadrfdataStoreSubscription data structure as request body, the ADRF shall assign a transaction reference identifier to this request and, if the request is successfully processed and accepted, the ADRF shall respond with "200 OK" as shown in figure 4.2.2.3.2-1 step 2, with the message body containing an NadrfdataStoreSubscriptionRef data structure, which shall include the assigned transaction reference identifier as "transRefId" attribute.

NOTE 2: If the data and/or analytics is already stored or being stored in the ADRF, the ADRF will still assign a new transaction reference identifier if the ADRF intends to not really store the data again in the memory again based on the implementation.

If an error occurs when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

If the ADRF receives storage handling information in the request but determines (e.g. based on local policy) that a different storage approach shall be followed, it indicates the determined storage approach to the consumer by setting accordingly the "storeHandl" attribute (e.g. providing a different lifetime, or omitting the deletion notification URI to indicate that no deletion alerts will be sent) in the message body of the response. When more than one consumer has requested storage lifetime for the same data or analytics, the storage approach should be based on the longest requested storage lifetime.

NOTE 3: The default operator policy for how long data or analytics are to be stored can be longer or shorter than the lifetime requested by the consumer. A default operator policy can for example accept only consumer requested lifetimes that are shorter or longer than the default policy.

In the case of a successful response, the ADRF may subsequently create a data or analytics subscription (according to inputs that had been received in the NadrfdataStoreSubscription data structure; this is not performed if the ADRF determines that the data is already being stored based on an existing subscription) with a DCCF as described in 3GPP TS 29.574 [23] or with an NWDAF as described in 3GPP TS 29.520 [15], and create a mapping between the previously assigned and returned transaction reference identifier and the subscription that is used to serve the transaction.

4.2.2.4 Nadrfdatamanagement_storageSubscriptionRemoval service operation

4.2.2.4.1 General

The Nadrfdatamanagement_storageSubscriptionRemoval service operation is used by an NF service consumer to request the ADRF to remove a subscription for data or analytics.

4.2.2.4.2 Requesting removal of subscription of data or analytics

Figure 4.2.2.4.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to unsubscribe for storage of data or analytics.

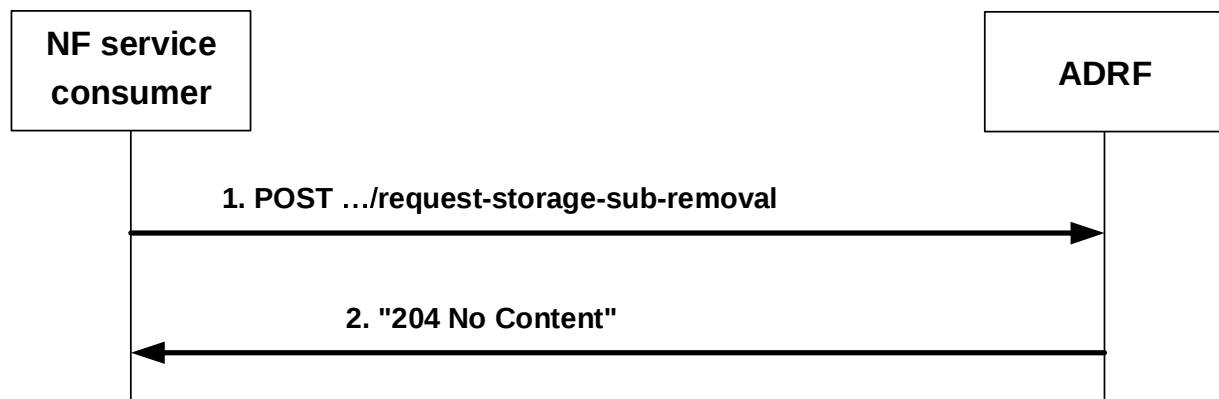


Figure 4.2.2.4.2-1: NF service consumer requesting the removal of subscription(s) to storage of data or analytics

The NF service consumer shall invoke the `Nadrf_DataManagement_StorageSubscriptionRemoval` service operation to request the ADRF to remove subscription(s) to data or analytics that are stored in the ADRF. The NF service consumer shall send an HTTP POST request with "{apiRoot}/nadrf-datamanagement/<apiVersion>/request-storage-sub-removal" as URI, as shown in figure 4.2.2.4.2-1, step 1. The POST request body shall contain an `NadrfDataStoreSubscriptionRef` data structure, which shall include a transaction reference identifier as "transRefId" attribute or, if the "EnhDataMgmt" feature is supported, a data set identifier as "dataSetId" attribute.

Upon the reception of an HTTP POST request with "{apiRoot}/nadrf-datamanagement/<apiVersion>/request-storage-sub-removal" as URI, if the ADRF successfully processed and accepted the received HTTP POST request, the ADRF shall respond with HTTP "204 No Content" status. Subsequently, the ADRF shall remove the (DCCF or NWDAF) subscription that had been created and mapped to the received transaction reference identifier or the (DCCF or NWDAF) subscription(s) associated to the received data set identifier as described in clause 4.2.2.3, unless this subscription is mapped to further transaction reference identifier(s) (of transactions that are still active) or associated with further data set identifier(s).

If errors occur when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.5 Nadrf_DataManagement_RetrievalRequest service operation

4.2.2.5.1 General

The `Nadrf_DataManagement_RetrievalRequest` service operation is used by an NF service consumer to retrieve stored data or analytics.

NOTE: If the data is to be collected for a user, i.e. SUPI or GPSI, the consumer needs to check the user consent by retrieving the user consent information from the UDM as described in clause 5.5 of 3GPP TS 29.552 [28] before invoking this service operation.

4.2.2.5.2 Request and get stored data or analytics from ADRF Data Store

Figure 4.2.2.5.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to retrieve stored data or analytics.

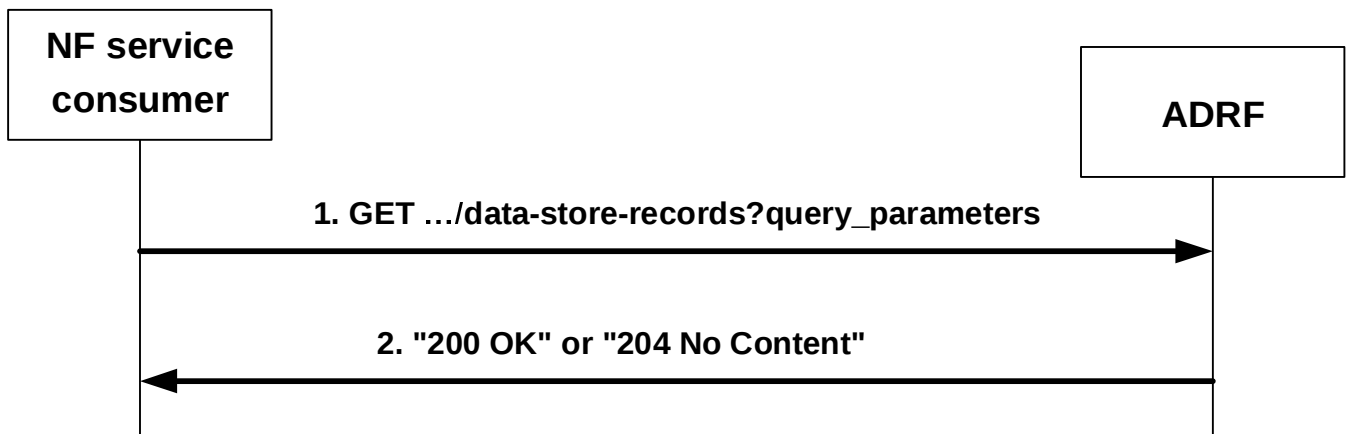


Figure 4.2.2.5.2-1: NF service consumer requesting to retrieve stored data or analytics

The NF service consumer shall invoke the `Nadrf_DataManagement_RetrievalRequest` service operation to retrieve stored data or analytics. The NF service consumer shall send an HTTP GET request with "{apiRoot}/nadrf-datamanagement/<apiVersion>/data-store-records" as Resource URI representing the "ADRF Data Store Records" resource, as shown in figure 4.2.2.5.2-1, step 1, to request ADRF data store records according to the query parameter value of the store transaction identifier within the "store-trans-id" attribute, the query parameter value of the fetch correlation identifier(s) within the "fetch-correlation-ids" attribute, or, if the "EnhDataMgmt" feature is supported, the query parameter value of the data set identifier within the "data-set-id" attribute.

Upon the reception of the HTTP GET request, the ADRF shall:

- find the data or analytics according to the requested parameters.

If the requested data or analytics is found, the ADRF shall respond with "200 OK" status code with the message body containing the `NadrfDataStoreRecord` data structure. The `NadrfDataStoreRecord` data structure in the response body shall include:

- one of the following:
 - information about network analytics function events that occurred in the "anaNotifications" attribute together with the corresponding subscription information within the "anaSub" attribute;
 - information about data event within the "dataNotif" attribute together with the corresponding subscription information within the "dataSub" attribute.

and may include:

- a data set tag within the "dataSetTag" attribute, if the "EnhDataMgmt" feature is supported.
- data synthesis and compression information within the "dsc" attribute, if the "EnhDataMgmt" feature is supported.

NOTE: The data synthesis and compression information can include an indication that the data have been generated using a data synthesis tool, an indication that the data have been generated using a data compression tool, and information about the data synthesis and/or compression technique.

If the requested analytics or data does not exist, the ADRF shall respond with "204 No Content". If an error occurs when processing the HTTP GET request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.6 Nadrf_DataManagement_RetrievalSubscribe service operation

4.2.2.6.1 General

The Nadrf_DataManagement_RetrievalSubscribe service operation is used by an NF service consumer to subscribe to the ADRF to retrieve via notifications data or analytics that is stored in the ADRF and to receive future notifications with data or analytics when they are received by the ADRF.

NOTE: If the data is to be collected for a user, i.e. SUPI or GPSI, the consumer needs to check the user consent by retrieving the user consent information from the UDM as described in clause 5.5 of 3GPP TS 29.552 [28] before invoking this service operation.

4.2.2.6.2 Requesting retrieval and subscription of data or analytics

Figure 4.2.2.6.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to retrieve and subscribe to data or analytics.

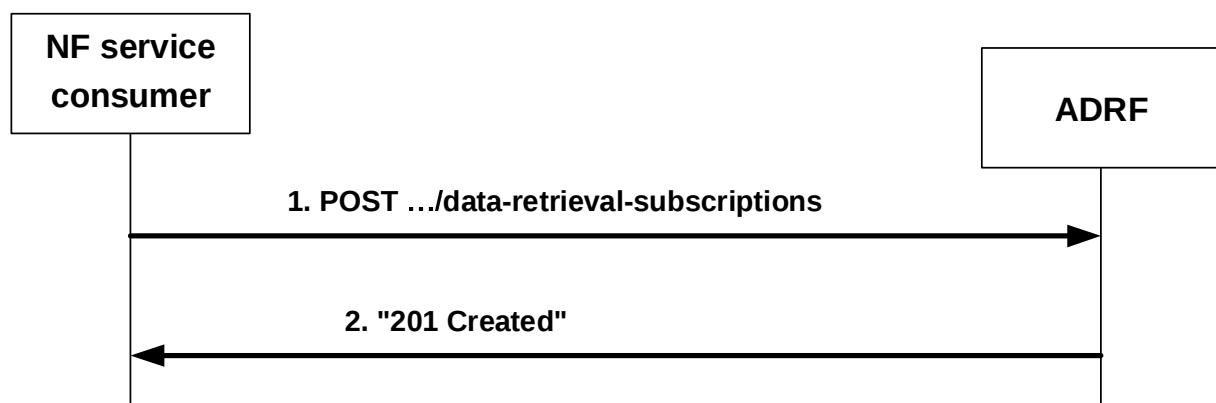


Figure 4.2.2.6.2-1: NF service consumer requesting to retrieve and subscribe to data or analytics

The NF service consumer shall invoke the Nadrf_DataManagement_RetrievalSubscribe service operation to retrieve and subscribe to data or analytics. The NF service consumer shall send an HTTP POST request with "{apiRoot}/nadrf-datamanagement/<apiVersion>/data-retrieval-subscriptions" as Resource URI representing the "ADRF Data Retrieval Subscriptions" resource, as shown in figure 4.2.2.6.2-1, step 1, to create an "Individual ADRF Data Retrieval Subscription" according to the information in the message body. The NadrfDataRetrievalSubscription data structure provided in the request body shall include:

- notification correlation identifier within the "notifCorrId" attribute;
- one of the following:
 - analytics subscription information within the "anaSub" attribute;
 - data subscription information within the "dataSub" attribute;
 - data set identifier within the "dataSetId" attribute, if the "EnhDataMgmt" feature is supported;
- a notification target address within the "notificationURI" attribute;
- a time window for the data retrieval and subscription within the "timePeriod" attribute;

and may include:

- a Consumer triggered Notification indication within the "consTrigNotif" attribute.

Upon the reception of an HTTP POST request with "{apiRoot}/nadrf-datamanagement/<apiVersion>/data-retrieval-subscriptions" as Resource URI and NadrfDataRetrievalSubscription data structure as request body, the ADRF shall:

- create a new subscription;
- assign a subscriptionId;

- store the subscription.

If the ADRF created an "Individual ADRF Data Retrieval Subscription" resource, the ADRF shall respond with "201 Created" with the message body containing a representation of the created subscription, as shown in figure 4.2.2.6.2-1, step 2. The ADRF shall include a Location HTTP header field. The Location header field shall contain the URI of the created record i.e. "{apiRoot}/nadr-f-datamanagement/<apiVersion>/data-retrieval-subscriptions/{subscriptionId}".

If an error occurs when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.2.2.7 Nadr-f_DataManagement_RetrievalUnsubscribe service operation

4.2.2.7.1 General

The Nadr-f_DataManagement_RetrievalUnsubscribe service operation is used by an NF service consumer to remove a retrieval subscription to data or analytics.

4.2.2.7.2 Requesting removal of retrieval subscription for data or analytics

Figure 4.2.2.7.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to remove a retrieval subscription for data or analytics.

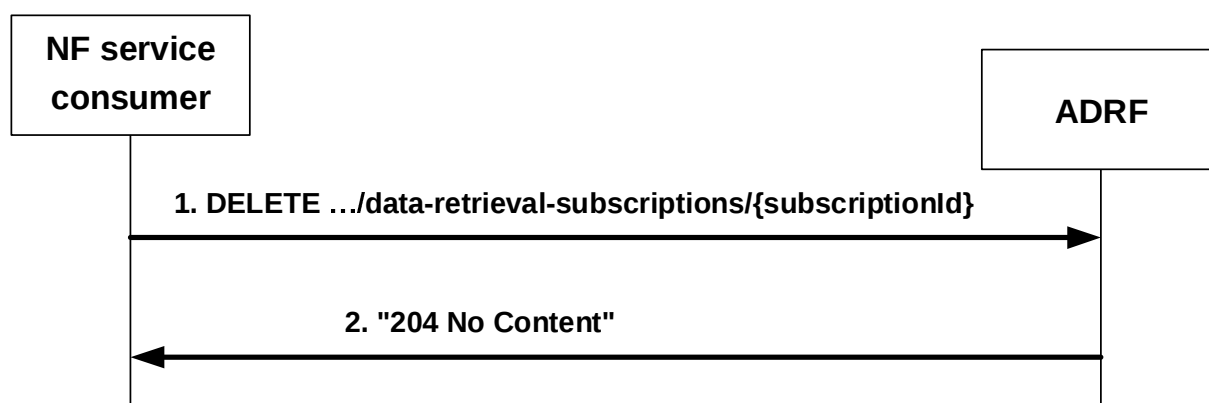


Figure 4.2.2.7.2-1: NF service consumer requesting to remove retrieval subscription for data or analytics

The NF service consumer shall invoke the Nadr-f_DataManagement_RetrievalUnsubscribe service operation to remove a retrieval subscription for data or analytics. The NF service consumer shall send an HTTP DELETE request with "{apiRoot}/nadr-f-datamanagement/<apiVersion>/data-retrieval-subscriptions/{subscriptionId}" as Resource URI representing an "Individual ADRF Data Retrieval Subscription" resource, as shown in figure 4.2.2.7.2-1, step 1, where "{subscriptionId}" is the identifier of the existing data retrieval subscription that is to be deleted.

Upon the reception of an HTTP DELETE request with "{apiRoot}/nadr-f-datamanagement/<apiVersion>/data-retrieval-subscriptions/{subscriptionId}" as Resource URI, if the ADRF successfully processed and accepted the received HTTP DELETE request, the ADRF shall:

- remove the corresponding subscription;
- respond with HTTP "204 No Content" status.

If errors occur when processing the HTTP DELETE request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

If the ADRF determines the received HTTP DELETE request needs to be redirected, the ADRF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.8 Ndrf_DataManagement_RetrievalNotify service operation

4.2.2.8.1 General

The Ndrf_DataManagement_RetrievalNotify service operation is used by ADRF to notify NF service consumers about subscribed events related to data or analytics and about data or analytics that are about to be deleted.

4.2.2.8.2 Notification about subscribed data or analytics

Figure 4.2.2.8.2-1 shows a scenario where the ADRF sends a request to the NF service consumer to notify it about data or analytics events.

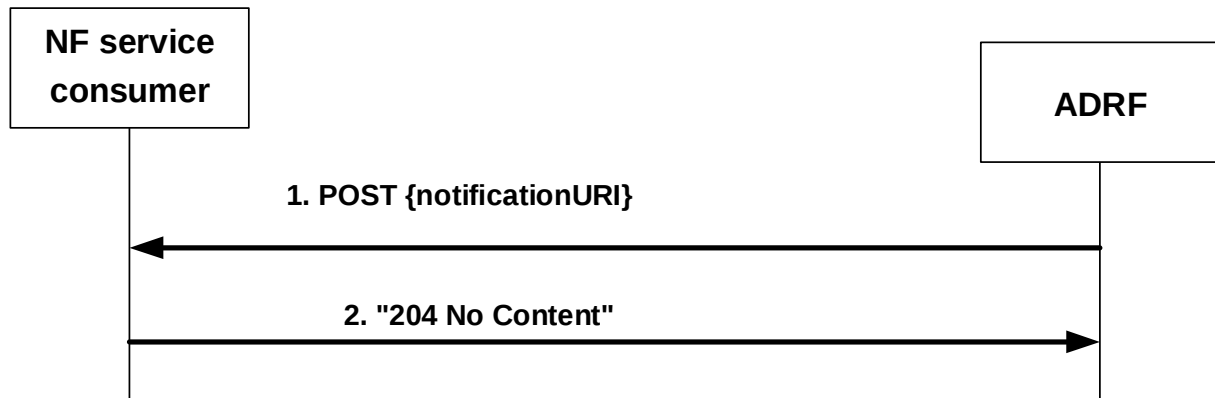


Figure 4.2.2.8.2-1: ADRF notifies the NF service consumer about subscribed data or analytics

The ADRF shall invoke the Ndrf_DataManagement_RetrievalNotify service operation to notify about subscribed data or analytics events. The ADRF shall send an HTTP POST request to the "{notificationURI}" received in the subscription (see clause 5.1.5 for the definition of this notificationURI), as shown in figure 4.2.2.8.2-1, step 1. The NdrfDataRetrievalNotification data structure provided in the request body shall include:

- notification correlation Id within the "notifCorrId" attribute;
- the time stamp which represents the time when ADRF completes preparation of the requested data or analytics within the "timeStamp" attribute;
- one of the following:
 - information about network data analytics function events that occurred in the "anaNotifications" attribute;
 - data collected from data sources (e.g. SMF, NEF) in the "dataNotif" attribute;
 - information for fetching the data or analytics in the "fetchInstruct" attribute.

NOTE: The fetch correlation identifiers included in the fetch instructions of the "fetchInstruct" attribute can be used to fetch data or analytics using the Ndrf_DataManagement_RetrievalRequest service operation as described in clause 4.2.2.5.2. The (mandatory) fetch URI included in the fetch instructions of the "fetchInstruct" attribute is expected to be in line with the standard resource URI defined for the Ndrf_DataManagement_RetrievalRequest service operation, i.e. {apiRoot}/ndrf-datamanagement/<apiVersion>/data-store-records, but it can be anything because it is actually not needed by the NF service consumer in this case.

The NdrfDataRetrievalNotification data structure provided in the request body may include:

- a termination request provided by the ADRF within the "terminationReq" attribute.
- data synthesis and compression information within the "dsc" attribute, if the "EnhDataMgmt" feature is supported.

NOTE: The data synthesis and compression information can include an indication that the data have been generated using a data synthesis tool, an indication that the data have been generated using a data compression tool, and information about the data synthesis and/or compression technique.

Upon the reception of an HTTP POST request with "{notificationURI}" as Resource URI and NadrDataRetrievalNotification data structure as request body, if the NF service consumer successfully processed and accepted the received HTTP POST request, the NF Service Consumer shall:

- store the notification;
- respond with HTTP "204 No Content" status code.

If errors occur when processing the HTTP POST request, the NF service consumer shall send an HTTP error response as specified in clause 5.1.7.

If the NF service consumer determines the received HTTP POST request needs to be redirected, the NF service consumer shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

After the successful processing of the HTTP POST request, if the ADRF requests the NF service consumer to retrieve the data or analytics with the "fetchInstruct" attribute, the NF service consumer may invoke the NadrDataManagement_RetrievalRequest service operation to retrieve the notified data or analytics as defined in clause 4.2.2.5.

4.2.2.8.3 Notification about data or analytics that are about to be deleted

Figure 4.2.2.8.3-1 shows a scenario where the ADRF sends a request to the NF service consumer to notify it about data or analytics that are about to be deleted.

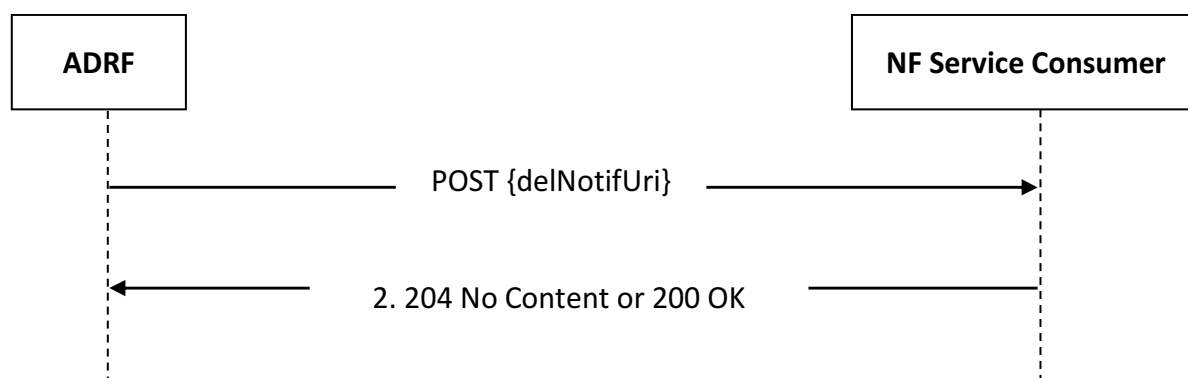


Figure 4.2.2.8.3-1: ADRF notifies the NF service consumer about data or analytics that are about to be deleted.

In order to notify about data or analytics that are about to be deleted, the ADRF shall invoke the NadrDataManagement_RetrievalNotification service operation. The ADRF shall send an HTTP POST request to the "{delNotifUri}" received in a storage request as defined in clause 4.2.2.2.2 or in a storage subscription request as defined in clause 4.2.2.3.2, as shown in figure 4.2.2.8.3-1, step 1. The NadrAlertNotification data structure provided in the request body shall include:

- a notification correlation identifier within the "delNotifCorrId" attribute;
- a storage transaction identifier, which may be used by the NF service consumer to retrieve the data, within the "alertStorTransId" attribute;

NOTE: The "alertStorTransId" attribute, which is used for retrieving data prior to deletion, does not have to be the same with or related to the "storeTransId" attribute that is assigned and returned during the storage of the data.

Upon the reception of an HTTP POST request with "{delNotifUri}" as Resource URI and NadrAlertNotification data structure as request body, if the NF service consumer successfully processed and accepted the received HTTP POST request, the NF Service Consumer shall either respond with HTTP "204 No Content" status code or with HTTP "200 OK" status code and the NadrAlertNotificationResponse data structure in the message body.

If errors occur when processing the HTTP POST request, the NF service consumer shall send an HTTP error response as specified in clause 5.1.7.

If the NF service consumer determines the received HTTP POST request needs to be redirected, the NF service consumer shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

After the successful processing of the HTTP POST request, the NF service consumer may invoke the Nadrif_DataManagement_RetrievalRequest service operation as defined in clause 4.2.2.5, using the storage transaction identifier received within the "alertStorTransId" attribute of the NadrifAlertNotification, in order to retrieve the data or analytics that are about to be deleted.

4.2.2.9 Nadrif_DataManagement_Delete service operation

4.2.2.9.1 General

The Nadrif_DataManagement_Delete service operation is used by an NF service consumer to delete stored data or analytics.

4.2.2.9.2 Requesting removal of stored data or analytics

Figure 4.2.2.9.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to delete stored data or analytics.

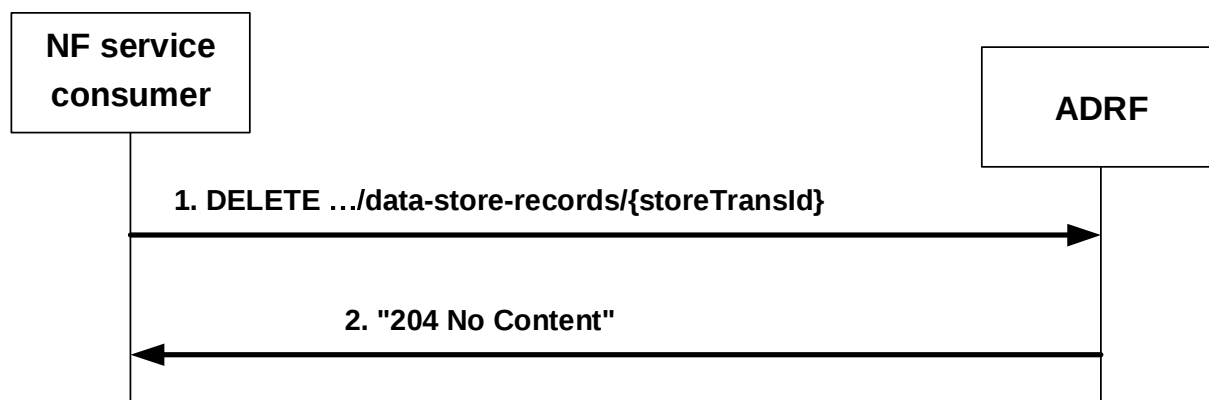


Figure 4.2.2.9.2-1: NF service consumer requesting to remove stored data or analytics

The NF service consumer shall invoke the Nadrif_DataManagement_Delete service operation to remove stored data or analytics. The NF service consumer shall send an HTTP DELETE request with "{apiRoot}/nadrif-datamanagement/<apiVersion>/data-store-records/{storeTransId}" as Resource URI representing an "Individual ADRF Data Store Record" resource, as shown in figure 4.2.2.9.2-1, step 1, where "{storeTransId}" is the transaction identifier of the stored record that is to be deleted.

Upon the reception of an HTTP DELETE request with "{apiRoot}/nadrif-datamanagement/<apiVersion>/data-store-records/{storeTransId}" as Resource URI, if the ADRF successfully processed and accepted the received HTTP DELETE request, the ADRF shall:

- remove the corresponding stored record;
- respond with HTTP "204 No Content" status code.

If errors occur when processing the HTTP DELETE request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

If the ADRF determines the received HTTP DELETE request needs to be redirected, the ADRF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.2.2.9.3 Requesting removal of stored data or analytics using data or analytics specification

Figure 4.2.2.9.3-1 shows a scenario where the NF service consumer sends a request to the ADRF to delete stored data or analytics based on a data or analytics specification.

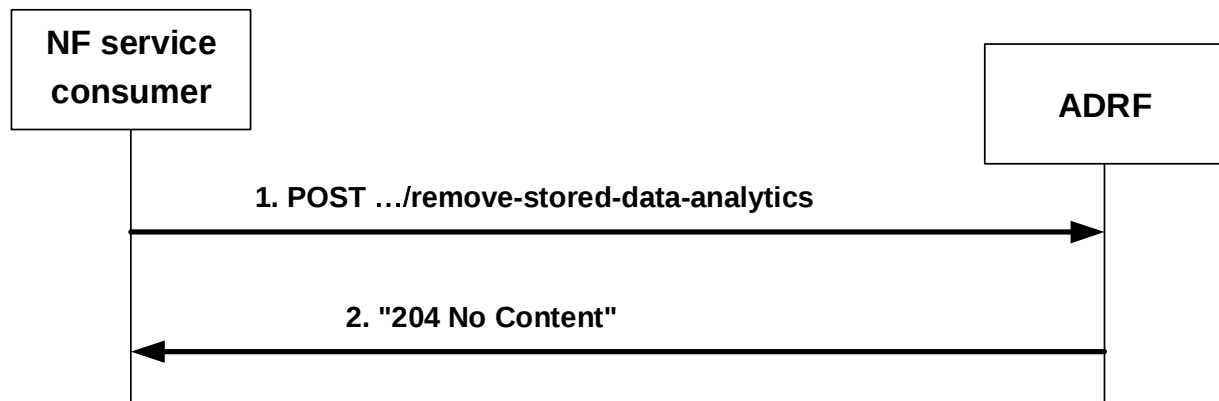


Figure 4.2.2.9.3-1: NF service consumer requesting to remove stored data or analytics

The NF service consumer shall invoke the `Nadrf_DataManagement_Delete` service operation to remove stored data or analytics based on a data or analytics specification. The NF service consumer shall send an HTTP POST request with "{apiRoot}/nadrf-datamanagement/<apiVersion>/remove-stored-data-analytics" as URI, as shown in figure 4.2.2.9.3-1, step 1. The POST request body shall contain an `NadrfStoredDataSpec` data structure. The `NadrfStoredDataSpec` data structure provided in the request body shall include:

- a time window in which the data to be deleted was collected in the "timePeriod" attribute; and
- one of the following:
 - a data specification in the "dataSpec" attribute;
 - an analytics specification in the "anaSpec" attribute;
 - a data set identifier within the "dataSetId" attribute, if the "EnhDataMgmt" feature is supported.

Upon the reception of an HTTP POST request with "{apiRoot}/nadrf-datamanagement/<apiVersion>/remove-stored-data-analytics" as URI, if the ADRF successfully processed and accepted the received HTTP POST request, the ADRF shall respond with HTTP "204 No Content" status. The ADRF shall remove any stored analytics or data that match the analytics specification, the data specification, or the data set identifier received in the request.

If errors occur when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.1.7.

4.3 Nadrf_MLModelManagement Service

4.3.1 Service Description

4.3.1.1 Overview

The `Nadrf_MLModelManagement` service as defined in 3GPP TS 23.288 [14], is provided by the Analytics Data Repository Function (ADRF).

This service:

- allows NF service consumers to store ML model(s) in the ADRF;
- allows NF service consumers to retrieve ML model(s) from an ADRF; and
- allows NF service consumers to delete ML model(s) from an ADRF.

NOTE: In this specification, the storage of the ML model includes the storage of ML model and ML model address; the retrieval of the ML model includes the retrieval of the ML model address; and the removal of the ML model includes the removal of ML model and ML model address.

4.3.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Network Data Analytics Exposure architecture is defined in 3GPP TS 23.288 [14].

The Ndrf_MLModelManagement service is part of the Ndrf service-based interface exhibited by the Analytics Data Repository Function (ADRF).

Known consumers of the Ndrf_MLModelManagement service are:

- Network Data Analytics Function (NWDAF)
- Location Management Function (LMF)

The Ndrf_MLModelManagement service is provided by the ADRF and consumed by the NF service consumers as shown in figure 4.3.1.2-1 for the SBI representation model and in figure 4.3.1.2-2 for the reference point representation model.

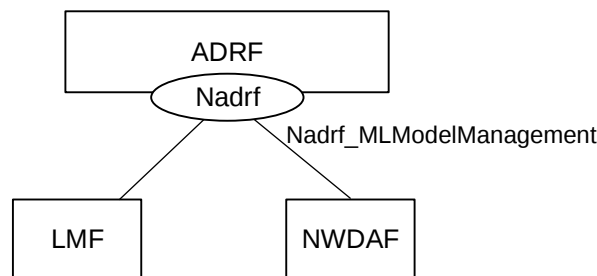


Figure 4.3.1.2-1: Reference Architecture for the Ndrf_MLModelManagement Service; SBI representation

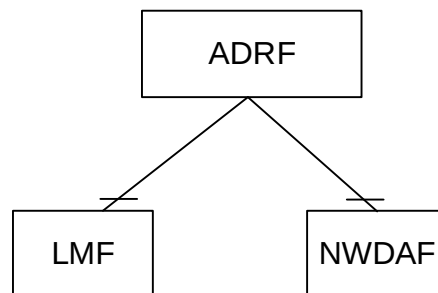


Figure 4.3.1.2-2: Ndrf_MLModelManagement service architecture, reference point representation

4.3.1.3 Network Functions

4.3.1.3.1 Analytics Data Repository Function (ADRF)

The Analytics Data Repository Function (ADRF) provides the functionality to allow NF service consumers to store, retrieve, and remove ML model(s) from the ADRF.

4.3.1.3.2 NF Service Consumers

The NWDAF:

- supports storing of ML model(s) in the ADRF;

- supports retrieving of ML model(s) from an ADRF; and
- supports deletion of ML model(s) from an ADRF.

The LMF:

- supports retrieving of ML model(s) from the ADRF.

4.3.2 Service Operations

4.3.2.1 Introduction

Table 4.3.2.1-1: Operations of the Nadrf_MLModelManagement Service

Service operation name	Description	Initiated by
Nadrf_MLModelManagement_StorageRequest	This service operation is used by an NF to request the ADRF to store or update ML model(s).	NF service consumer (NWDAF)
Nadrf_MLModelManagement_RetrieveRequest	This service operation is used by an NF to retrieve stored ML model(s) from the ADRF.	NF service consumer (NWDAF, LMF)
Nadrf_MLModelManagement_Delete	This service operation is used by an NF to delete stored ML model(s) in the ADRF.	NF service consumer (NWDAF)

4.3.2.2 Nadrf_MLModelManagement_StorageRequest service operation

4.3.2.2.1 General

The Nadrf_MLModelManagement_StorageRequest service operation is used by an NF service consumer to store ML model(s).

4.3.2.2.2 Request Storage of ML model(s)

Figure 4.3.2.2.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to store ML model(s).

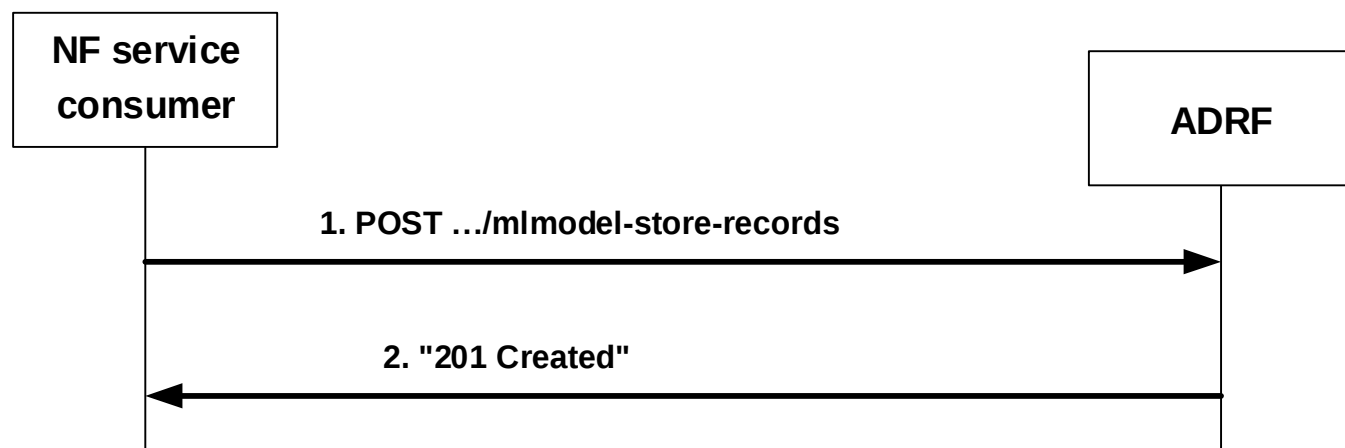


Figure 4.3.2.2.2-1: NF service consumer requesting to store ML model(s)

The NF service consumer shall invoke the Nadrf_MLModelManagement_StorageRequest service operation to store ML model(s). The NF service consumer shall send an HTTP POST request with "{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/mlmodel-store-records" as Resource URI representing the "ADRF ML Model Store Records" resource, as shown in figure 4.3.2.2.2-1, step 1, to create an "Individual ADRF ML Model Store Record" according to the information in the NadrfMLModelStoreRecord data structure provided in the request body as described in clause 5.2.3.2.3.1 and clause 5.2.6.2.2.

Upon the reception of an HTTP POST request with "{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/mlmodel-store-records" as Resource URI and NadrfMLModelStoreRecord data structure as request body, the ADRF shall:

- create a new ML model store record;
- assign a storeTransId;
- download the ML model(s) if needed; and
- store the ML model(s).

NOTE 1: If the ML model(s) are already stored or being stored in the ADRF, the ADRF will still create a new "Individual ADRF ML Model Store Record" resource and assign a new storeTransId if the ADRF intends to not really store the ML model(s) in the memory again based on the implementation.

If the ADRF created an "Individual ADRF ML Model Store Record" resource, the ADRF shall respond with "201 Created" with the message body containing a representation of the created ML model record, as shown in figure 4.3.2.2.2-1, step 2. If the storage of the ML models provided in the "mlModelInfo" attribute or "mlModels" attribute of the request partially failed, the ADRF may include the ML model storage result within the "modelStoreResult" attribute or "modelStoreResults" attribute if the "EnModelMgmt" feature is supported in the response. The ADRF shall include a Location HTTP header field, which shall contain the URI of the created record i.e. "{apiRoot}/nadr- mlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}".

If the storage of all the ML models provided in the "mlModelInfo" attribute or "mlModels" attribute of the request failed for the same reason, then:

- if the ML model file address(es) was/were not found, the ADRF shall send an HTTP "404 Not Found" status code with the response body containing a ProblemDetails data structure with the "cause" attribute including the "ML_MODEL_FILE_ADDRESS_NOT_FOUND" application error response as specified in clause 5.2.7; or
- if the ML model file(s) download failed, the ADRF shall send an HTTP "500 Internal Server Error" status code with the response body containing a ProblemDetails data structure with the "cause" attribute including the "ML_MODEL_FILE_DOWNLOAD_FAILED" application error response as specified in clause 5.2.7.

If an error occurs when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.2.7.

4.3.2.2.3 Update Storage of ML model(s)

Figure 4.3.2.2.3-1 shows a scenario where the NF service consumer sends a request to the ADRF to update ML model(s).

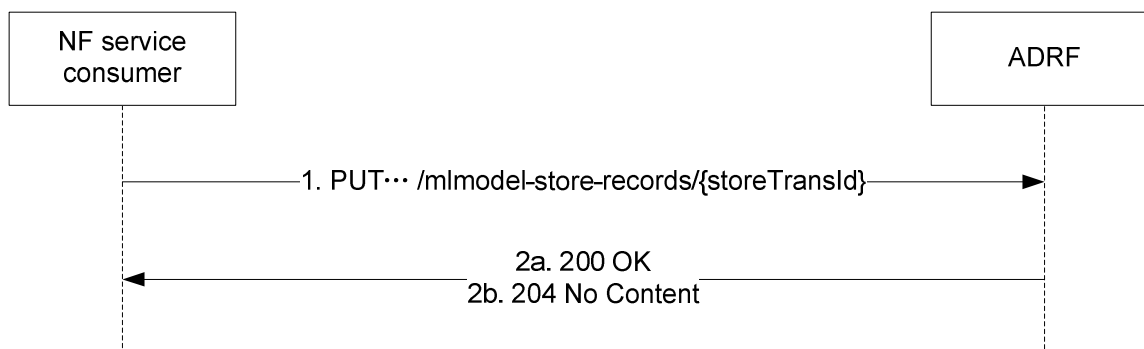


Figure 4.3.2.2.3-1: NF service consumer requesting to update ML model(s)

The NF service consumer shall invoke the Nadr-MLModelManagement_StorageRequest service operation to update ML model(s). The NF service consumer shall send an HTTP PUT request with "{apiRoot}/nadr-mlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}" as Resource URI representing an "Individual ADRF ML Model Store Record" resource, as shown in figure 4.3.2.2.3-1, step 1, to update that resource according to the information in the Nadr-MLModelStoreRecord data structure provided in the request body as described in clause 5.2.3.3.3.2 and clause 5.2.6.2.2.

Upon the reception of an HTTP PUT request with "{apiRoot}/nadr-mlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}" as Resource URI and Nadr-MLModelStoreRecord data structure as request body, the ADRF shall:

- download the ML model(s) if needed;
- update the ML model store record;

and shall respond with:

- a) HTTP "200 OK" status code with the message body containing a representation of updated ML model record, as shown in figure 4.3.2.2.3-1, step 2a. or
- b) HTTP "204 No Content" status code, as shown in figure 4.3.2.2.3-1, step 2b.

If the storage of the ML models provided in the "mlModelInfo" attribute or "mlModels" attribute of the request partially failed, the ADRF may include the ML model storage result within the "modelStoreResult" attribute or "modelStoreResults" attribute if the "EnModelMgmt" feature is supported in the response.

If the storage of all the ML models provided in the "mlModelInfo" attribute or "mlModels" attribute of the request failed for the same reason, then:

- if the ML model file address(es) was/were not found, the ADRF shall send an HTTP "404 Not Found" status code with the response body containing a ProblemDetails data structure with the "cause" attribute including the "ML_MODEL_FILE_ADDRESS_NOT_FOUND" application error response as specified in clause 5.2.7; or
- if the ML model file(s) download failed, the ADRF shall send an HTTP "500 Internal Server Error" status code with the response body containing a ProblemDetails data structure with the "cause" attribute including the "ML_MODEL_FILE_DOWNLOAD_FAILED" application error response as specified in clause 5.2.7.

If an error occurs when processing the HTTP PUT request, the ADRF shall send an HTTP error response as specified in clause 5.2.7.

If the ADRF determines the received HTTP PUT request needs to be redirected, the ADRF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.3.2.3 Ndrf_MLModelManagement_RetrievalRequest service operation

4.3.2.3.1 General

The Ndrf_MLModelManagement_RetrievalRequest service operation is used by an NF service consumer to retrieve stored ML model(s).

4.3.2.3.2 Request and get stored ML model(s) from ADRF ML Model Store

Figure 4.3.2.3.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to retrieve stored ML model(s).

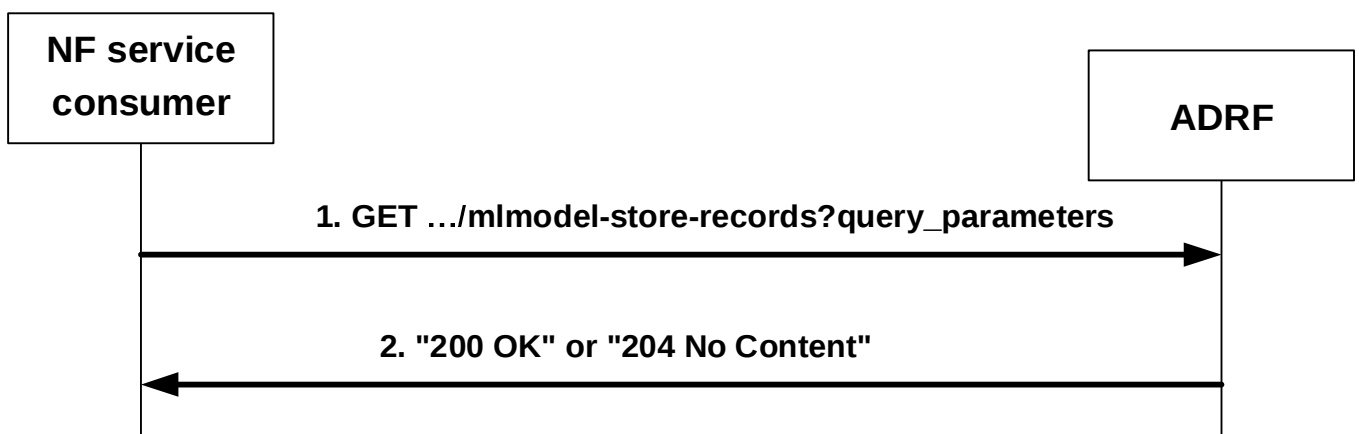


Figure 4.3.2.3.2-1: NF service consumer requesting to retrieve stored ML model(s)

The NF service consumer shall invoke the `Nadrf_MLModelManagement_RetrievalRequest` service operation to retrieve stored ML model(s). The NF service consumer shall send an HTTP GET request with "{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/mlmodel-store-records" as Resource URI representing the "ADRF ML Model Store Records" resource, as shown in figure 4.3.2.3.2-1, step 1, to request ADRF ML model store records according to the storage transaction identifier within the "store-trans-id" query parameter or the unique ML model identifier(s) within the "model-unique-ids" query parameter.

Upon the reception of the HTTP GET request, the ADRF shall:

- find the ML model(s) according to the requested parameters.

If one or more of the requested ML model(s) are found, the ADRF shall respond with "200 OK" status code with the message body containing the `NadrfMLModelStoreRecord` data structure. The `NadrfMLModelStoreRecord` data structure in the response body shall include the `MLModelInfo` data structure in the "mlModelInfo" attribute with the unique ML model identifier in the "modelUniqueId" attribute and the address of the ML model file stored in the ADRF in the "mlFileAddr" attribute. When the "EnhModelMgmt" feature is supported, if the retrieval of the ML models provided in the "store-trans-id" or "model-unique-ids" query parameters of the request partially failed, the ADRF may include information about the models that failed to be retrieved within the "modelStoreResult" attribute in the response.

If the retrieval of all the ML models provided in the "mlModelInfo" attribute or "mlModels" attribute of the request failed:

- if the NF Service Consumer is not included in the allowed NF consumer list for the ML model and/or is not same as the NF of the NWDAF containing MTLF that stored the model, the ADRF shall send an HTTP "403 Forbidden" error response including the "cause" attribute set to "RETRIEVAL_ML_MODEL_NOT_ALLOWED".

If none of the requested ML model(s) exist, the ADRF shall respond with "204 No Content". If an error occurs when processing the HTTP GET request, the ADRF shall send an HTTP error response as specified in clause 5.2.7.

4.3.2.4 Nadrf_MLModelManagement_Delete service operation

4.3.2.4.1 General

The `Nadrf_MLModelManagement_Delete` service operation is used by an NF service consumer to delete stored ML model(s).

4.3.2.4.2 Requesting removal of stored ML model(s)

Figure 4.3.2.4.2-1 shows a scenario where the NF service consumer sends a request to the ADRF to delete stored ML model(s).

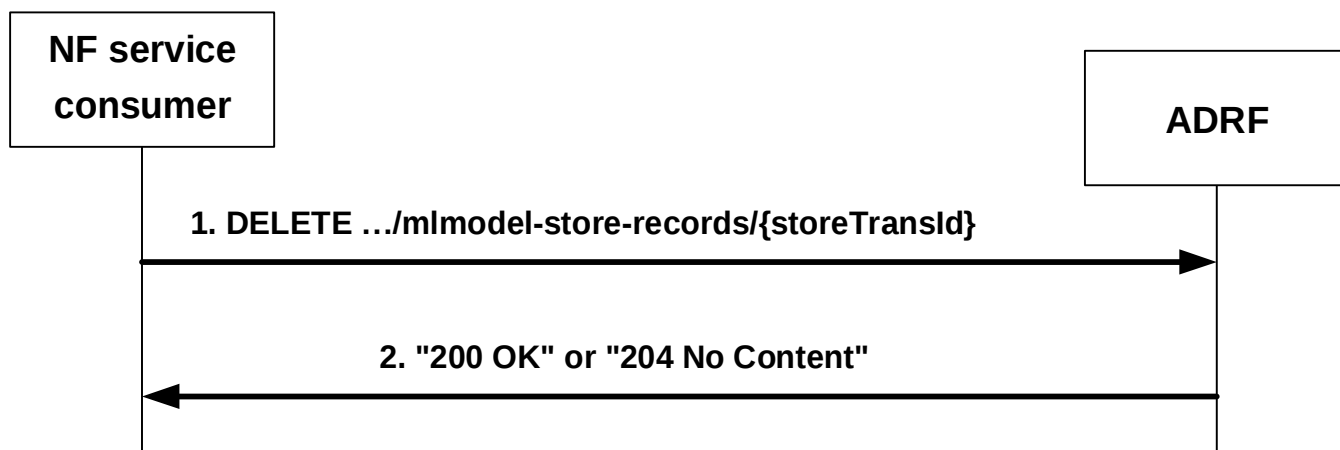


Figure 4.3.2.4.2-1: NF service consumer requesting to remove stored ML model(s)

The NF service consumer shall invoke the `Nadrf_MLModelManagement_Delete` service operation to remove the ML model(s) that are stored in the corresponding storage transaction. The NF service consumer shall send an HTTP DELETE request with "{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}" as Resource URI representing an "Individual ADRF ML Model Store Record" resource, as shown in figure 4.3.2.4.2-1, step 1, where "{storeTransId}" is the transaction identifier of the stored record that is to be deleted.

Upon the reception of an HTTP DELETE request with "{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}" as Resource URI, if the ADRF successfully processed and accepted the received HTTP DELETE request, the ADRF shall:

- remove the storage transaction corresponding stored ML model record;
- respond with HTTP "204 No Content" status code, or with HTTP "200 OK" status code with the message body containing, for each of the ML Models that had been stored under the given storage transaction identifier, the `MLModelDelResult` data structure with the unique ML model identifier in the "modelUniqueId" attribute and the result in the "deleteResult" attribute.

If the deletion of all the ML models that had been stored under the given storage transaction identifier failed for the same reason, then:

- if the ML model(s) was/were not found the ADRF shall send an HTTP "404 Not Found" status code with the response body containing a `ProblemDetails` data structure with the "cause" attribute including the "ML_MODEL_NOT_FOUND" application error response as specified in clause 5.2.7; or
- if the ML model(s) was/were found but not deleted the ADRF shall send an HTTP "500 Internal Server Error" status code with the response body containing a `ProblemDetails` data structure with the "cause" attribute including the "ML_MODEL_FOUND_BUT_NOT_DELETED" application error response as specified in clause 5.2.7.

If errors occur when processing the HTTP DELETE request, the ADRF shall send an HTTP error response as specified in clause 5.2.7.

If the ADRF determines the received HTTP DELETE request needs to be redirected, the ADRF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

4.3.2.4.3 Requesting removal of stored ML model(s) using unique ML model identifier

Figure 4.3.2.4.3-1 shows a scenario where the NF service consumer sends a request to the ADRF to delete stored ML model(s) based on the unique ML model identifier.

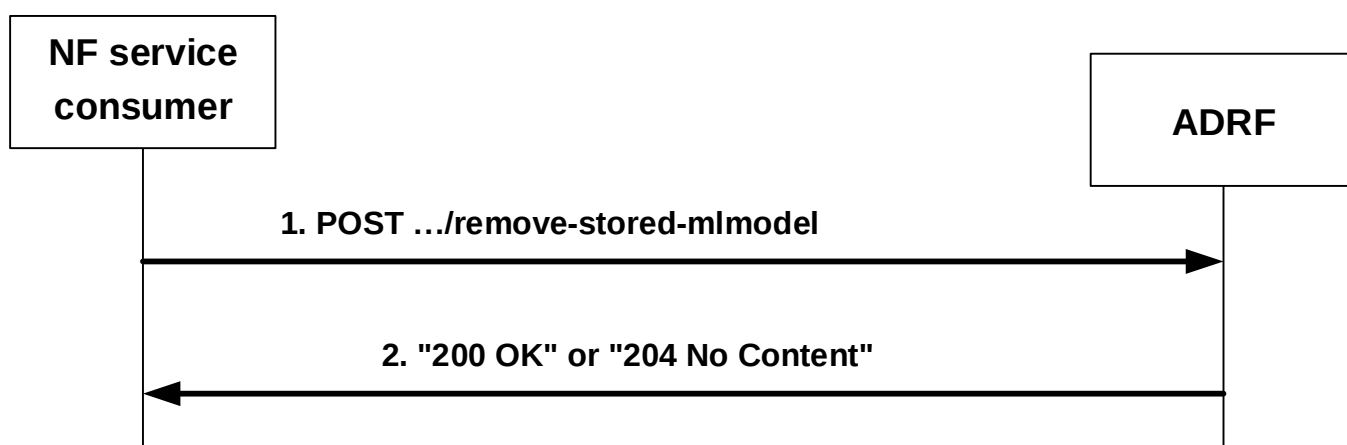


Figure 4.3.2.4.3-1: NF service consumer requesting to remove stored ML model(s)

The NF service consumer shall invoke the `Nadrf_MLModelManagement_Delete` service operation to remove stored ML model(s) based on the unique ML model identifier. The NF service consumer shall send an HTTP POST request with "{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/remove-stored-mlmodel" as URI, as shown in figure 4.3.2.4.3-1, step 1. The POST request body shall contain the list of ML model identifiers of the ML models that are to be deleted as described in clause 5.2.4.4.

Upon the reception of an HTTP POST request with "{apiRoot}/nadr-f-mlmodelmanagement/<apiVersion>/remove-stored-mlmodel" as URI, if the ADRF successfully processed and accepted the received HTTP POST request, the ADRF shall remove any stored ML model(s) that match the unique ML model identifier(s) received in the request and respond with HTTP "204 No Content" status if all deletions were successful or with HTTP "200 OK" status with the message body containing the MLModelDelResult data structure if the deletion was partially successful.

If the deletion of all the ML models identified by the unique ML model identifier in the "modelUniqueId" attribute of the request failed for the same reason, then:

- if the ML model(s) was/were not found the ADRF shall send an HTTP "404 Not Found" status code with the response body containing a ProblemDetails data structure with the "cause" attribute including the "ML_MODEL_NOT_FOUND" application error response as specified in clause 5.2.7; or
- if the ML model(s) was/were found but not deleted the ADRF shall send an HTTP "500 Internal Server Error" status code with the response body containing a ProblemDetails data structure with the "cause" attribute including the "ML_MODEL_FOUND_BUT_NOT_DELETED" application error response as specified in clause 5.2.7.

If errors occur when processing the HTTP POST request, the ADRF shall send an HTTP error response as specified in clause 5.2.7.

5 API Definitions

5.1 Nadr-f_DataManagement Service API

5.1.1 Introduction

The Nadr-f_DataManagement service shall use the Nadr-f_DataManagement API.

The API URI of the Nadr-f_DataManagement API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nadr-f-datamanagement".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 5.1.3.

5.1.2 Usage of HTTP

5.1.2.1 General

HTTP/2, IETF RFC 9113 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nadr-f_DataManagement API is contained in Annex A.

5.1.2.2 HTTP standard headers

5.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

5.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 9457 [13].

5.1.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

5.1.3 Resources

5.1.3.1 Overview

This clause describes the structure for the Resource URIs, the resources and methods used for the service.

Figure 5.1.3.1-1 depicts the resource URIs structure for the Nadrif_DataManagement API.

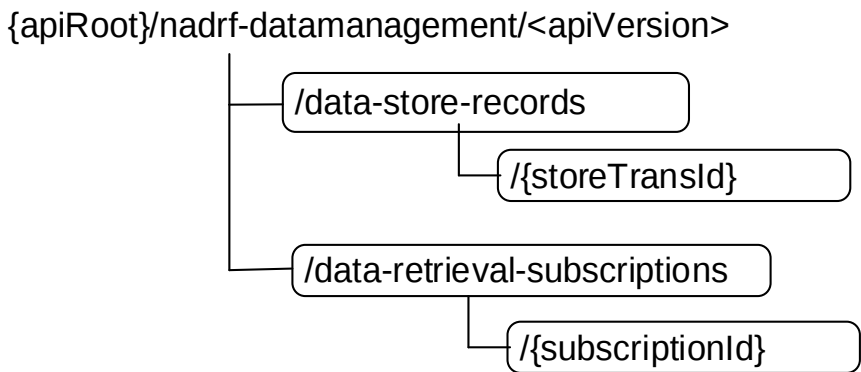


Figure 5.1.3.1-1: Resource URI structure of the Nadrif_DataManagement API

Table 5.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.1.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
ADRF Data Store Records	/data-store-records	GET	Retrieve the stored data or analytics
		POST	Create a new Individual Data Store Record resource.
Individual ADRF Data Store Record	/data-store-records/{storeTransId}	DELETE	Delete an individual ADRF Data Store Record identified by {storeTransId}.
ADRF Data Retrieval Subscriptions	/data-retrieval-subscriptions	POST	Create a new Individual ADRF Data Retrieval Subscription resource.
Individual ADRF Data Retrieval Subscription	/data-retrieval-subscriptions/{subscriptionId}	DELETE	Delete an individual ADRF Data Retrieval Subscription identified by {subscriptionId}.

5.1.3.2 Resource: ADRF Data Store Records

5.1.3.2.1 Description

The ADRF Data Store Records resource represents all data storage records to the NadrF_DataManagement Service at a given ADRF. The resource allows an NF service consumer to create a new Individual ADRF Data Store Record resource and to retrieve Individual ADRF Data Store Record resources that fulfil certain criteria.

5.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nadrF-datamanagement/<apiVersion>/data-store-records

The <apiVersion> shall be set as described in clause 5.1.1.

This resource shall support the resource URI variables defined in table 5.1.3.2.2-1.

Table 5.1.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1

5.1.3.2.3 Resource Standard Methods

5.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.1.3.2.3.1-1.

Table 5.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.2.3.1-2 and the response data structures and response codes specified in table 5.1.3.2.3.1-3.

Table 5.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrFDataStoreRecord	M	1	New individual Data Store Record to be created

Table 5.1.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfDataStoreRecord	M	1	201 Created	The creation of an Individual Data Store Record resource is confirmed, and a representation of that resource is returned.
NOTE: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				

Table 5.1.3.2.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nadrf-datamanagement/<apiVersion>/data-store-records/{storeTransId}

5.1.3.2.3.2 GET

This method shall support the URI query parameters specified in table 5.1.3.2.3.2-1.

Table 5.1.3.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
store-trans-id	string	O	0..1	Identifies the "Storage Transaction Identifier" of data store record in ADRF. (NOTE)
fetch-correlation-ids	array(string)	O	1..N	Identifies fetch correlation identifiers received as part of fetch instruction. (NOTE)
data-set-id	string	O	0..1	Identifies a data set, i.e. the data or analytics records that contain the same value in the data set identifier of their data set tag. It may only be provided if the "EnhDataMgmt" feature is supported.
NOTE: Exactly one of "store-trans-id", "fetch-correlation-ids", and "data-set-id" shall be provided.				

This method shall support the request data structures specified in table 5.1.3.2.3.1-2 and the response data structures and response codes specified in table 5.1.3.2.3.1-3.

Table 5.1.3.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.1.3.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfDataStoreRecord	M	1	200 OK	Data Store record.
n/a			204 No Content	If the request ADRF Data Store Record does not exist, the ADRF shall respond with "204 No Content".
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the HTTP GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.3.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

Table 5.1.3.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

5.1.3.2.4 Resource Custom Operations

None.

5.1.3.3 Resource: Individual ADRF Data Store Record

5.1.3.3.1 Description

The Individual ADRF Data Store Record resource represents data or analytics stored via the Nadrf_DataManagement_StorageRequest in ADRF.

5.1.3.3.2 Resource Definition

Resource URI: {apiRoot}/nadrf-datamanagement/<apiVersion>/data-store-records/{storeTransId}

The <apiVersion> shall be set as described in clause 5.1.1.

This resource shall support the resource URI variables defined in table 5.1.3.3.2-1.

Table 5.1.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1.
storeTransId	string	Identifies an individual data store record.

5.1.3.3.3 Resource Standard Methods

5.1.3.3.3.1 DELETE

This method shall support the URI query parameters specified in table 5.1.3.3.3.1-1.

Table 5.1.3.3.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.3.3.1-2 and the response data structures and response codes specified in table 5.1.3.3.3.1-3.

Table 5.1.3.3.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.1.3.3.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual ADRF Data Store Record resource was deleted successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual ADRF Data Store Record deletion. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual ADRF Data Store Record deletion. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the HTTP DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target ADRF (service) instance towards which the request is redirected.

Table 5.1.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target ADRF (service) instance towards which the request is redirected.

5.1.3.3.4 Resource Custom Operations

None in this release of the specification.

5.1.3.4 Resource: ADRF Data Retrieval Subscriptions

5.1.3.4.1 Description

The ADRF Data Retrieval Subscriptions resource represents all data retrieval subscriptions to the Nadrif_DataManagement Service at a given ADRF. The resource allows an NF service consumer to create a new Individual ADRF Data Retrieval Subscription resource.

5.1.3.4.2 Resource Definition

Resource URI: **{apiRoot}/nadrif-datamanagement/<apiVersion>/data-retrieval-subscriptions**

The <apiVersion> shall be set as described in clause 5.1.1.

This resource shall support the resource URI variables defined in table 5.1.3.4.2-1.

Table 5.1.3.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1

5.1.3.4.3 Resource Standard Methods

5.1.3.4.3.1 POST

This method shall support the URI query parameters specified in table 5.1.3.4.3.1-1.

Table 5.1.3.4.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.4.3.1-2 and the response data structures and response codes specified in table 5.1.3.4.3.1-3.

Table 5.1.3.4.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrifDataRetrievalSubscription	M	1	Individual ADRF Data Retrieval Subscription resource to be created.

Table 5.1.3.4.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrifDataRetrievalSubscription	M	1	201 Created	The creation of an Individual ADRF Data Retrieval Subscription resource is confirmed and a representation of that resource is returned.
NOTE: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				

Table 5.1.3.4.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nadrfdatamanagement/<apiVersion>/data-retrieval-subscriptions/{subscriptionId}

5.1.3.4.4 Resource Custom Operations

None in this release of the specification.

5.1.3.5 Resource: Individual ADRF Data Retrieval Subscription

5.1.3.5.1 Description

The Individual ADRF Data Retrieval Subscription resource represents single ADRF data retrieval subscription to the Nadrfdatamanagement Service at a given ADRF. The resource allows an NF service consumer to delete Individual ADRF Data Retrieval Subscription resource.

5.1.3.5.2 Resource Definition

Resource URI: {apiRoot}/nadrfdatamanagement/<apiVersion>/data-retrieval-subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.1.3.5.2-1.

Table 5.1.3.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.1.1
subscriptionId	string	Identifies a subscription to the Nadrfdatamanagement service.

5.1.3.5.3 Resource Standard Methods

5.1.3.5.3.1 DELETE

This method shall support the URI query parameters specified in table 5.1.3.5.3.1-1.

Table 5.1.3.5.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.5.3.1-2 and the response data structures and response codes specified in table 5.1.3.5.3.1-3.

Table 5.1.3.5.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.1.3.5.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual ADRF Data Retrieval Subscription resource was deleted successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual ADRF Data Retrieval Subscription deletion. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual ADRF Data Retrieval Subscription deletion. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the HTTP DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.3.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target ADRF (service) instance towards which the request is redirected.

Table 5.1.3.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target ADRF (service) instance towards which the request is redirected.

5.1.3.5.4 Resource Custom Operations

None in this release of the specification.

5.1.4 Custom Operations without associated resources

5.1.4.1 Overview

The structure of the custom operation URIs of the Nadrif_DataManagement service is shown in Figure 5.1.4.1-1.

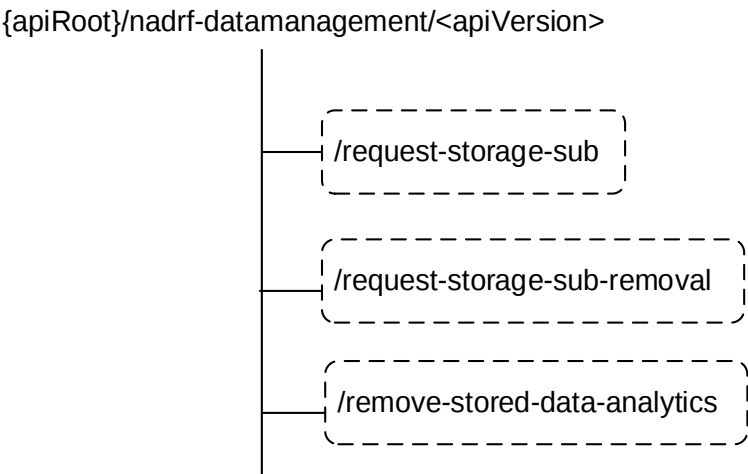


Figure 5.1.4.1-1: Custom operation URI structure of the Nadrf_DataManagement API

Table 5.1.4.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 5.1.4.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/nadrf-datamanagement/<apiVersion>/request-storage-sub	POST	Request the ADRF to create a subscription for data or analytics and then store the received data or analytics in the ADRF.
{apiRoot}/nadrf-datamanagement/<apiVersion>/request-storage-sub-removal	POST	Request the ADRF to remove a subscription for data or analytics.
{apiRoot}/nadrf-datamanagement/<apiVersion>/remove-stored-data-analytics	POST	Request the ADRF to remove already stored data or analytics.

5.1.4.2 Operation: request-storage-sub

5.1.4.2.1 Description

The operation is used by the NF service consumer to request the ADRF to create a subscription for data or analytics and then store the received data or analytics in the ADRF.

5.1.4.2.2 Operation Definition

This operation shall support the request data structures shown in Table 5.1.4.2.2-1 and the response data structures and error codes specified in Tables 5.1.4.2.2-2.

Table 5.1.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrfDataStoreSubscription	M	1	Information about the storage subscription that the ADRF shall create.

Table 5.1.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfDataStoreSubscriptionRef	M	1	200 OK	Successful request to trigger the creation of a subscription for data or analytics at the ADRF. A reference is provided.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.4.2.2-3: Headers supported by the 307 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

Table 5.1.4.2.2-4: Headers supported by the 308 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

5.1.4.3 Operation: request-storage-sub-removal

5.1.4.3.1 Description

The operation is used by the NF service consumer to request the ADRF to remove a subscription for data or analytics which was used to store the received data or analytics in the ADRF.

5.1.4.3.2 Operation Definition

This operation shall support the request data structures shown in Table 5.1.4.3.2-1 and the response data structures and error codes specified in Tables 5.1.4.3.2-2.

Table 5.1.4.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrfDataStoreSubscriptionRef	M	1	Reference used to identify the subscription that the ADRF shall remove.

Table 5.1.4.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful request to trigger the removal of a subscription for data or analytics at the ADRF.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.4.3.2-3: Headers supported by the 307 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

Table 5.1.4.3.2-4: Headers supported by the 308 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

5.1.4.4 Operation: remove-stored-data-analytics

5.1.4.4.1 Description

The operation is used by the NF service consumer to request the ADRF to remove stored data or analytics based on a data or analytics specification.

5.1.4.4.2 Operation Definition

This operation shall support the request data structures shown in Table 5.1.4.4.2-1 and the response data structures and error codes specified in Tables 5.1.4.4.2-2.

Table 5.1.4.4.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrfStoredData Spec	M	1	Information about the specification of data or analytics stored in ADRF.

Table 5.1.4.4.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful request to remove data or analytics at the ADRF based on a data or analytics specification.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.4.4.2-3: Headers supported by the 307 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

Table 5.1.4.4.2-4: Headers supported by the 308 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

5.1.5 Notifications

5.1.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

Table 5.1.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Retrieval Notification	{notificationURI}	POST	Report data or analytics from ADRF.
ADRF Alert Notification	{delNotifUri}	POST	Notify about data or analytics that are about to be deleted.

5.1.5.2 Retrieval Notification

5.1.5.2.1 Description

The Retrieval Notification is used by the NF service producer to report one or several data retrieval events to an NF service consumer that has subscribed to such notifications.

5.1.5.2.2 Target URI

The Callback URI "{**notificationURI**}" shall be used with the callback URI variables defined in table 5.1.5.2.2-1.

Table 5.1.5.2.2-1: Callback URI variables

Name	Definition
notificationURI	String formatted as URI with the Callback Uri

5.1.5.2.3 Standard Methods

5.1.5.2.3.1 POST

This method shall support the request data structures specified in table 5.1.5.2.3.1-1 and the response data structures and response codes specified in table 5.1.5.2.3.1-2.

Table 5.1.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
NadrfDataRetrievalNotification	M	1	Provides information about observed data or analytics.

Table 5.1.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the Notification is acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during the retrieval notification. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during the retrieval notification. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.5.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF service consumer (service) instance towards which the notification request is redirected.

Table 5.1.5.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF service consumer (service) instance towards which the notification request is redirected.

5.1.5.3 ADRF Alert Notification

5.1.5.3.1 Description

The ADRF Alert Notification is used by the NF service producer to notify an NF service consumer about data or analytics that are about to be deleted.

5.1.5.3.2 Target URI

The Callback URI "{delNotifUri}" shall be used with the callback URI variables defined in table 5.1.5.3.2-1.

Table 5.1.5.3.2-1: Callback URI variables

Name	Definition
delNotifUri	String formatted as URI with the Callback Uri

5.1.5.3.3 Standard Methods

5.1.5.3.3.1 POST

This method shall support the request data structures specified in table 5.1.5.3.3.1-1 and the response data structures and response codes specified in table 5.1.5.3.3.1-2.

Table 5.1.5.3.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
NadrfAlertNotification	M	1	Contains information about data or analytics that are about to be deleted.

Table 5.1.5.3.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
NadrfAlertNotificationResponse	M	1	200 OK	The receipt of the Notification is acknowledged and a response with information about the planned action is provided.
n/a			204 No Content	The receipt of the Notification is acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.1.5.3.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative NF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

Table 5.1.5.3.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative NF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

5.1.6 Data Model

5.1.6.1 General

This clause specifies the application data model supported by the Ndrf_DataManagement API.

Table 5.1.6.1-1 specifies the data types defined for the Ndrf_DataManagement service based interface protocol.

Table 5.1.6.1-1: Nadrif_DataManagement specific Data Types

Data type	Clause defined	Description	Applicability
DataNotification	5.1.6.2.9	Represents a data subscription notification of one of various possible data sources.	
DataSetTag	5.1.6.2.13	Contains an identifier and a description of associated data or analytics records.	EnhDataMgmt
DataSubscription	5.1.6.2.8	Contains information about Data specification.	
NadrifAlertNotification	5.1.6.2.11	Contains information about data or analytics that are about to be deleted.	EnhDataMgmt
NadrifAlertNotificationResponse	5.1.6.2.12	Contains information about the planned action upon receiving an alert.	EnhDataMgmt
NadrifDataRetrievalNotification	5.1.6.2.5	Represents a notification that corresponds with an Individual ADRF Data Retrieval Subscription resource.	
NadrifDataRetrievalSubscription	5.1.6.2.4	Represents an Individual ADRF Data Retrieval Subscription resource.	
NadrifDataStoreRecord	5.1.6.2.2	Represents an Individual ADRF Data Store Record resource.	
NadrifDataStoreSubscription	5.1.6.2.3	Contains information to be used by the ADRF to create a Data or Analytics subscription.	
NadrifDataStoreSubscriptionRef	5.1.6.2.6	Contains a reference to a request for a Data or Analytics subscription.	
NadrifStoredDataSpec	5.1.6.2.7	Contains information about Data or Analytics specification.	
StorageHandlingInfo	5.1.6.2.10	Contains storage handling information for data or analytics.	EnhDataMgmt

Table 5.1.6.1-2 specifies data types re-used by the Nadrif_DataManagement service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nadrif_DataManagement service based interface.

Table 5.1.6.1-2: Nadrif_DataManagement re-used Data Types

Data type	Reference	Comments	Applicability
AfEventExposureNotif	3GPP TS 29.517 [20]	Represents notifications on AF event(s) that occurred for an Individual AF Event Subscription resource.	
AfEventExposureSubsc	3GPP TS 29.517 [20]	Represents AF event subscription.	
AmfEventNotification	3GPP TS 29.518 [18]	Represents notifications on AMF event(s) that occurred for an Individual AMF Event Subscription resource.	
AmfEventSubscription	3GPP TS 29.518 [18]	Represents AMF event subscription.	
DurationSec	3GPP TS 29.571 [16]	Unsigned integer identifying a period of time in units of seconds.	EnhDataMgmt
DateTime	3GPP TS 29.571 [16]	Identifies the time.	
EeSubscription	3GPP TS 29.503 [19]	Represents UDM event subscription.	
EventNotifyData	3GPP TS 29.515 [27]	Represents GMLC event notification.	LocEvents
FetchInstruction	3GPP TS 29.576 [24]	The fetch instruction indicates that the data or analytics can be fetched by the consumer.	
FormattingInstruction	3GPP TS 29.574 [23]	DCCF formatting Instructions.	
InputData	3GPP TS 29.515 [27]	Represents GMLC event subscription.	LocEvents
LmfDataExposureNotification	3GPP TS 29.572 [29]	Represents an LMF data exposure event notification.	LmfEvents
LmfDataExposureSubscription	3GPP TS 29.572 [29]	Represents an LMF data exposure subscription.	LmfEvents
MonitoringReport	3GPP TS 29.503 [19]	UDM Monitoring Report.	
NefEventExposureNotif	3GPP TS 29.591 [21]	Represents notifications on network exposure event(s) that occurred for an Individual Network Exposure Event Subscription resource.	
NefEventExposureSubsc	3GPP TS 29.591 [21]	Represents NEF event subscription.	
NfInstanceId	3GPP TS 29.571 [16]	NF instance identifier.	
NfSetId	3GPP TS 29.571 [16]	NF set identifier.	
NnwdafEventsSubscription	3GPP TS 29.520 [15]	Represents an NWDAF analytics subscription.	
NnwdafEventsSubscriptionNotification	3GPP TS 29.520 [15]	Represents an NWDAF analytics subscription notification.	
NotificationData	3GPP TS 29.510 [10]	Represents an NRF event notification.	
NotificationData	3GPP TS 29.564 [26]	Represents a UPF event notification.	UpEvents
NsmfEventExposure	3GPP TS 29.508 [17]	Represents an SMF event subscription.	
NsmfEventExposureNotification	3GPP TS 29.508 [17]	Represents an SMF event notification.	
PcEventExposureNotif	3GPP TS 29.523 [30]	Represents a PCF event notification.	PcfEvents
PcEventExposureSubsc	3GPP TS 29.523 [30]	Represents a PCF event subscription.	PcfEvents
ProcessingInstruction	3GPP TS 29.574 [23]	DCCF processing Instructions.	
SACEventReport	3GPP TS 29.536 [25]	Represents an NSACF event notification.	

SACEventSubscription	3GPP TS 29.536 [25]	Represents an NSACF event subscription.	
SubscriptionData	3GPP TS 29.510 [10]	Represents an NRF event subscription.	
SupportedFeatures	3GPP TS 29.571 [16]	Used to negotiate the applicability of the optional features defined in table 5.1.8-1.	
TimeWindow	3GPP TS 29.122 [22]	Represents a time window.	
UpfEventSubscription	3GPP TS 29.564 [26]	Represents a UPF event subscription.	UpEvents
Uri	3GPP TS 29.571 [16]	URI.	

5.1.6.2 Structured data types

5.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

5.1.6.2.2 Type: NadrDataStoreRecord

Table 5.1.6.2.2-1: Definition of type NadrDataStoreRecord

Attribute name	Data type	P	Cardinality	Description	Applicability
dataNotif	DataNotification	C	0..1	Data subscription notification. (NOTE 1) (NOTE 4)	
anaNotifications	array(NnwdafEventsSubscriptionNotification)	C	1..N	List of analytics subscription notifications. (NOTE 1) (NOTE 4)	
anaSub	array(NnwdafEventsSubscription)	C	1..N	Represents the subscription information of the corresponding analytics notification. Shall be present if the "anaNotifications" attribute is provided. (NOTE 2) (NOTE 4)	
dataSetTag	DataSetTag	O	0..1	Data set tag of the stored data or analytics.	EnhDataMgmt
dsc	string	O	0..1	Data synthesis and compression information. (NOTE 3)	EnhDataMgmt
dataSub	array(DataSubscription)	C	1..N	Represents the subscription information of the corresponding data notification. Shall be present if the "dataNotif" attribute is provided. (NOTE 2) (NOTE 4)	
storeHandl	StorageHandlingInfo	O	0..1	Contains storage handling information for the data or analytics that are being stored.	EnhDataMgmt
suppFeat	SupportedFeatures	C	0..1	Contains the list of supported features among the ones defined in clause 5.1.8. This attribute shall be provided only when feature negotiation needs to take place.	

NOTE 1: Exactly one of the attributes "anaNotifications" and "dataNotif" shall be provided.

NOTE 2: Exactly one of the attributes "anaSub" and "dataSub" shall be provided.

NOTE 3: The format and the contents of this attribute are up to the implementation.

NOTE 4: When the "dataSub" attribute is provided, only one element should be included to map with the "dataNotif" attribute which shall also be provided. When the "anaSub" attribute is provided, the array elements of the "anaSub" attribute match in sequence with the array elements in the "anaNotifications" attribute which shall also be provided.

5.1.6.2.3 Type: NdrfDataStoreSubscription

Table 5.1.6.2.3-1: Definition of type NdrfDataStoreSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
anaSub	NnwdafeventsSubscription	C	0..1	Subscribed analytics events. (NOTE 1)	
dataSetTag	DataSetTag	O	0..1	Data set tag of the stored data or analytics.	EnhDataMgmt
dataSub	DataSubscription	C	0..1	Represents requested Events subscription. (NOTE 1)	
targetNfId	NfInstanceId	C	0..1	DCCF or NWDAF NF instance identifier to which the ADRF shall create the requested subscription. (NOTE 2)	
targetNfSetId	NfSetId	C	0..1	DCCF or NWDAF NF set identifier to which the ADRF shall create the requested subscription. (NOTE 2)	
formatInstruct	FormattingInstruction	O	0..1	Formatting instructions to be used for sending event notifications.	
procInstruct	ProcessingInstruction	O	0..1	Processing instructions to be used for sending event notifications. (NOTE 3)	
multiProcInstructs	array(ProcessingInstruction)	O	1..N	Processing instructions to be used for sending event notifications. (NOTE 3)	MultiProcessingInstruction
storeHandl	StorageHandlingInfo	O	0..1	Contains storage handling information for the data or analytics that will be collected and stored based on the requested subscription.	EnhDataMgmt
suppFeat	SupportedFeatures	C	0..1	Contains the list of supported features among the ones defined in clause 5.1.8. This attribute shall be provided only when feature negotiation needs to take place.	

NOTE 1: Exactly one of these attributes shall be provided.

NOTE 2: One of "targetNfId" and "targetNfSetId" shall be provided.

NOTE 3: The "multiProcInstructs" attribute shall be used instead of the "procInstruct" attribute when the "MultiProcessingInstruction" feature is supported.

5.1.6.2.4 Type: NadrDataRetrievalSubscription

Table 5.1.6.2.4-1: Definition of type NadrDataRetrievalSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
anaSub	NnwdaEventsSubscription	C	0..1	Subscribed analytics events. (NOTE 1)	
dataSetId	string	C	0..1	Data set identifier of stored data or analytics records. (NOTE 1)	EnhDataMgmt
dataSub	DataSubscription	C	0..1	Represents requested Events subscription. (NOTE 1)	
notificationURI	Uri	M	1	Notification target address.	
timePeriod	TimeWindow	M	1	Represents a start time and a stop time during which the requested data is collected and/or will be collected at the data source.	
notifCorrId	string	M	1	Notification correlation identifier provided by the NF service consumer to be used later by the ADRF in the notifications that correspond with this subscription. The value of this attribute shall be unique per subscription for a given NF service consumer.	
constTrigNotif	boolean	O	0..1	If provided and set to "true", it indicates that notifications shall be buffered (sending only fetch instructions to the NF service consumer) until the NF service consumer requests their delivery using NadrDataManagement Service. The default value is "false".	
supFeat	SupportedFeatures	C	0..1	Contains the list of supported features among the ones defined in clause 5.1.8. This attribute shall be provided only when feature negotiation needs to take place.	

NOTE 1: Exactly one of these attributes shall be provided.

5.1.6.2.5 Type: NadrDataRetrievalNotification

Table 5.1.6.2.5-1: Definition of type NadrDataRetrievalNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
notifCorrId	string	M	1	This attribute indicates the notification correlation identifier provided by the NF service consumer during the data retrieval subscription. This parameter can be useful if the NF service consumer uses a common callback URI for multiple subscriptions.	
anaNotifications	array(NnwdaEventsSubscriptionNotification)	C	1..N	List of analytics subscription notifications. (NOTE 1)	
dataNotif	DataNotification	C	0..1	Data subscription notification. (NOTE 1)	
fetchInstruct	FetchInstruction	C	0..1	The fetch instruction indicates that the data or analytics can be fetched by the consumer. (NOTE 1)	
terminationReq	boolean	O	0..1	If provided and set to "true", it indicates that the subscription is requested to be terminated, i.e. no further notifications related to this subscription will be provided. The default value is "false".	
dsc	string	O	0..1	Data synthesis and compression information. (NOTE 2)	EnhDataMgmt
timeStamp	DateTime	M	1	It represents the time when ADRF completed preparation of the requested data or analytics.	

NOTE 1: Exactly one of these attributes shall be provided.

NOTE 2: The format and the contents of this attribute are up to the implementation.

5.1.6.2.6 Type: NadrDataStoreSubscriptionRef

Table 5.1.6.2.6-1: Definition of type NadrDataStoreSubscriptionRef

Attribute name	Data type	P	Cardinality	Description	Applicability
transRefId	string	C	0..1	Transaction reference identifier. (NOTE)	
dataSetId	string	C	0..1	Data set identifier associated with a storage subscription. (NOTE)	EnhDataMgmt
suppFeat	SupportedFeatures	C	0..1	Contains the list of supported features among the ones defined in clause 5.1.8. This attribute shall be provided only when feature negotiation needs to take place.	

NOTE: One of the "transRefId" and "dataSetId" attributes shall be provided.

5.1.6.2.7 Type: NadrfStoredDataSpec

Table 5.1.6.2.7-1: Definition of type NadrfStoredDataSpec

Attribute name	Data type	P	Cardinality	Description	Applicability
dataSpec	DataSubscription	C	0..1	Represents data specification. (NOTE)	
anaSpec	NnwdafEventsSubscription	C	0..1	Represents analytics specification. (NOTE)	
timePeriod	TimeWindow	M	1	Represents a start time and a stop time during which the requested data to be removed was collected at the data source.	
dataSetId	string	C	0..1	Data set identifier of stored data or analytics records. (NOTE)	EnhDataMgmt
NOTE: Exactly one of these attributes shall be provided.					

5.1.6.2.8 Type: DataSubscription

Table 5.1.6.2.8-1: Definition of type DataSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
amfDataSub	AmfEventSubscription	C	0..1	Represents requested AMF Events subscription. (NOTE)	
smfDataSub	NsmfEventExposure	C	0..1	Represents requested SMF Events subscription. (NOTE)	
udmDataSub	EeSubscription	C	0..1	Represents requested UDM Events subscription. (NOTE)	
nefDataSub	NefEventExposureSubsc	C	0..1	Represents requested NEF Events subscription. (NOTE)	
afDataSub	AfEventExposureSubsc	C	0..1	Represents requested AF Events subscription. (NOTE)	
nrfDataSub	SubscriptionData	C	0..1	Represents requested NRF Events subscription. (NOTE)	
nsacfDataSub	SACEventSubscription	C	0..1	Represents requested NSACF Events subscription. (NOTE)	
upfDataSub	UpfEventSubscription	C	0..1	Represents requested UPF Events subscription. (NOTE)	UpEvents
gmlcDataSub	InputData	C	0..1	Represents requested GMLC Events subscription. (NOTE)	LocEvents
lmfDataSub	LmfDataExposureSubscription	C	0..1	Represents requested LMF Events subscription. (NOTE)	LmfEvents
pcfDataSub	PcEventExposureSubsc	C	0..1	Represents requested PCF Events subscription. (NOTE)	PcfEvents
NOTE: Exactly one of these attributes shall be provided.					

5.1.6.2.9 Type: DataNotification

Table 5.1.6.2.9-1: Definition of type DataNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
afEventNotifs	array(AfEventExposureNotif)	C	1..N	List of notifications on AF event(s). (NOTE 1)	
amfEventNotifs	array(AmfEventNotification)	C	1..N	List of notifications on AMF event(s). (NOTE 1)	
gmlcEventNotifs	array(EventNotifyData)	C	1..N	List of notifications on GMLC event(s). (NOTE 1)	LocEvents
smfEventNotifs	array(NsmfEventExposureNotification)	C	1..N	List of notifications on SMF event(s). (NOTE 1)	
udmEventNotifs	array(MonitoringReport)	C	1..N	List of monitoring reports containing information about UDM event(s). (NOTE 1)	
nefEventNotifs	array(NefEventExposureNotif)	C	1..N	List of notifications on network exposure event(s). (NOTE 1)	
nrfEventNotifs	array(NotificationData)	C	1..N	List of notifications on NRF event(s) as defined in 3GPP TS 29.510 [10]. (NOTE 1)	
nsacfEventNotifs	array(SACEventReport)	C	1..N	List of notifications on NSACF event(s). (NOTE 1)	
upfEventNotifs	array(NotificationData)	C	1..N	List of notifications on UPF event(s) as defined in 3GPP TS 29.564 [26]. (NOTE 1)	UpEvents
lmfEventNotifs	array(LmfDataExposureNotification)	C	1..N	List of notifications on LMF event(s). (NOTE 1)	LmfEvents
pcfEventNotifs	array(PcEventExposureNotif)	C	1..N	List of notifications on PCF event(s). (NOTE 1)	PcfEvents
timeStamp	DateTime	O	0..1	Indicates the timestamp for the event(s). (NOTE 2)	
NOTE 1: Exactly one of these attributes shall be provided.					
NOTE 2: The "timeStamp" attribute within the DataNotification data type may be provided in the case of NRF events or if any of the "timeStamp" attribute within AfEventNotification contained in the AfEventExposureNotif, or within AmfEventReport contained in the AmfEventNotification, or within EventNotification contained in the NsmfEventExposureNotification, or within MonitoringReport, or within NefEventNotification contained in the NefEventExposureNotif, or within SACEventReportItem contained in the SACEventReport, or, if the UpEvents feature is supported, within the NotificationItem contained in the NotificationData data type, or, if the PcfEvents feature is supported, within the PcEventNotification contained in the PcEventExposureNotif data type, or, if the LocEvents feature is supported, the "timestampOfLocationEstimate" attribute within EventNotifyData, or, if the LmfEvents feature is supported, the "timeStamp" attribute within the LmfDataExposureNotification, is not provided.					

5.1.6.2.10 Type: StorageHandlingInfo

Table 5.1.6.2.10-1: Definition of type StorageHandlingInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
lifetime	DurationSec	O	0..1	Indicates the lifetime of the provided data or analytics as a duration in seconds.	
delNotifUri	Uri	O	0..1	Notification Uri for receiving deletion alerts. Its presence indicates that the NF service consumer wants to receive such notifications.	
delNotifCorrId	string	C	0..1	Notification correlation identifier for the deletion alerts. It shall be provided if the "delNotifUri" attribute is provided.	

5.1.6.2.11 Type: NadrAlertNotification

Table 5.1.6.2.11-1: Definition of type NadrAlertNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
alertStorTransId	string	M	1	Storage transaction identifier that can be used to retrieve the data or analytics that are about to be deleted.	
delNotifCorrId	string	M	1	Notification correlation identifier for the alert.	

5.1.6.2.12 Type: NadrAlertNotificationResponse

Table 5.1.6.2.12-1: Definition of type NadrAlertNotificationResponse

Attribute name	Data type	P	Cardinality	Description	Applicability
retrievalInd	boolean	M	1	If the NF service consumer had received a Data or Analytics Deletion Alert in the notification and determined to retrieve stored data or analytics prior to deletion, it shall be set to "true". Otherwise, it shall be set to "false".	

5.1.6.2.13 Type: DataSetTag

Table 5.1.6.2.13-1: Definition of type DataSetTag

Attribute name	Data type	P	Cardinality	Description	Applicability
dataSetId	string	M	1	Data set identifier of data or analytics records.	
dataSetDesc	string	O	0..1	Human-readable data set description of data or analytics records.	

5.1.6.3 Simple data types and enumerations

None.

5.1.6.4 Data types describing alternative data types or combinations of data types

None.

5.1.7 Error Handling

5.1.7.1 General

For the Ndrf_DataManagement API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Ndrf_DataManagement API.

5.1.7.2 Protocol Errors

No specific procedures for the Ndrf_DataManagement service are specified.

5.1.7.3 Application Errors

The application errors defined for the Ndrf_DataManagement service are listed in Table 5.1.7.3-1.

Table 5.1.7.3-1: Application errors

Application Error	HTTP status code	Description

5.1.8 Feature negotiation

The optional features in table 5.1.8-1 are defined for the Ndrf_DataManagement API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 5.1.8-1: Supported Features

Feature number	Feature Name	Description
1	MultiProcessingInstruction	Indicates the support of multiple processing instructions.
2	UpEvents	Indicates the support of UPF events.
3	EnhDataMgmt	Indicates the support of enhanced data management mechanisms.
4	LocEvents	This feature indicates the support of location events.
5	LmfEvents	This feature indicates the support of LMF data exposure events.
6	PcfEvents	This feature indicates the support of PCF event exposure events.

5.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Ndrf_DataManagement API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Ndrf_DataManagement API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Ndrf_DataManagement service.

The Ndrf_DataManagement API defines the following scopes for OAuth2 authorization as described in 3GPP TS 29.501 [5], clause 4.10.

Table 5.1.9-1: OAuth2 scopes defined in Ndrf_DataManagement API

Scope	Description
"ndrf-datamanagement"	Access to the Ndrf_DataManagement API
"ndrf-datamanagement:storage-read-delete-subs"	Access to service operations applying to Ndrf_DataManagement_StorageSubscriptionRequest, Ndrf_DataManagement_StorageSubscriptionRemoval, Ndrf_DataManagement_RetrievalRequest, Ndrf_DataManagement_RetrievalSubscribe, Ndrf_DataManagement_RetrievalUnsubscribe, Ndrf_DataManagement_RetrievalNotify, Ndrf_DataManagement_Delete service operations.

5.2 Ndrf_MLModelManagement Service API

5.2.1 Introduction

The Ndrf_MLModelManagement service shall use the Ndrf_MLModelManagement API.

The API URI of the Ndrf_MLModelManagement API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "ndrf-mlmodelmanagement".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 5.2.3.

5.2.2 Usage of HTTP

5.2.2.1 General

HTTP/2, IETF RFC 9113 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Ndrf_MLModelManagement API is contained in Annex A.

5.2.2.2 HTTP standard headers

5.2.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

5.2.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 9457 [13].

5.2.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

5.2.3 Resources

5.2.3.1 Overview

This clause describes the structure for the Resource URIs, the resources and methods used for the service.

Figure 5.2.3.1-1 depicts the resource URIs structure for the Nadr_f_MLModelManagement API.

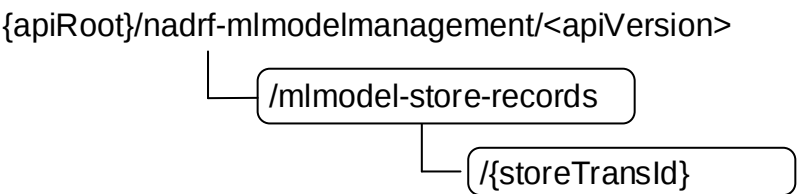


Figure 5.2.3.1-1: Resource URI structure of the Nadr_f_MLModelManagement API

Table 5.2.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.2.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
ADRF ML Model Store Records	/mlmodel-store-records	GET	Retrieve the stored ML model(s).
		POST	Create a new Individual ADRF ML Model Store Record resource.
Individual ADRF ML Model Store Record	/mlmodel-store-records/{storeTransId}	DELETE	Delete an Individual ADRF ML Model Store Record identified by {storeTransId}.
		PUT	Modify an Individual ADRF ML Model Store Record identified by {storeTransId}.

5.2.3.2 Resource: ADRF ML Model Store Records

5.2.3.2.1 Description

The ADRF ML Model Store Records resource represents all ML model storage records to the Nadrf_MLModelManagement Service at a given ADRF. The resource allows an NF service consumer to create a new Individual ADRF ML Model Store Record resource and to retrieve Individual ADRF ML Model Store Record resources that fulfil certain criteria.

5.2.3.2.2 Resource Definition

Resource URI: **{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/mlmodel-store-records**

The <apiVersion> shall be set as described in clause 5.2.1.

This resource shall support the resource URI variables defined in table 5.2.3.2.2-1.

Table 5.2.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.2.1

5.2.3.2.3 Resource Standard Methods

5.2.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.2.3.2.3.1-1.

Table 5.2.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.2.3.2.3.1-2 and the response data structures and response codes specified in table 5.2.3.2.3.1-3.

Table 5.2.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NadrfMLModelStoreRecord	M	1	New individual ML Model Store Record to be created

Table 5.2.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfMLModelStoreRecord	M	1	201 Created	The creation of an Individual ADRF ML Model Store Record resource is confirmed, and a representation of that resource is returned.
ProblemDetails	O	0..1	404 Not Found	NOTE 2
ProblemDetails	O	0..1	500 Internal Server Error	NOTE 2
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: Failure cases are described in clause 5.2.7.3.				

Table 5.2.3.2.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}

5.2.3.2.3.2 GET

This method shall support the URI query parameters specified in table 5.2.3.2.3.2-1.

Table 5.2.3.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
store-trans-id	string	C	0..1	Identifies the "Storage Transaction Identifier" of ML model store record in ADRF. (NOTE)
model-unique-ids	array(Uinteger)	C	0..N	Identifies the unique ML model identifiers of the ML models stored in ADRF. (NOTE)
supported-features	SupportedFeatures	O	0..1	The features supported by the NF service consumer.
NOTE: Exactly one of the "store-trans-id" and "model-unique-ids" query parameters shall be provided.				

This method shall support the request data structures specified in table 5.2.3.2.3.2-2 and the response data structures and response codes specified in table 5.2.3.2.3.2-3.

Table 5.2.3.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.3.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfMLModelStoreRecord	M	1	200 OK	ML Model Store record.
n/a			204 No Content	If the request ADRF ML Model Store Record does not exist, the ADRF shall respond with "204 No Content".
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 3)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 3)
ProblemDetails	O	0..1	403 Forbidden	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the HTTP GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] shall also apply.				
NOTE 2: Failure cases are described in clause 5.2.7.				
NOTE 3: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.2.3.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

Table 5.2.3.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

5.2.3.2.4 Resource Custom Operations

None.

5.2.3.3 Resource: Individual ADRF ML Model Store Record

5.2.3.3.1 Description

The Individual ADRF ML Model Store Record resource represents ML model(s) stored via the Nadrf_MLModelManagement_StorageRequest in ADRF.

5.2.3.3.2 Resource Definition

Resource URI: {apiRoot}/nadr-f-mlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}

The <apiVersion> shall be set as described in clause 5.2.1.

This resource shall support the resource URI variables defined in table 5.2.3.3.2-1.

Table 5.2.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.2.1.
storeTransId	string	Identifies an individual data store record.

5.2.3.3.3 Resource Standard Methods

5.2.3.3.3.1 DELETE

This method shall support the URI query parameters specified in table 5.2.3.3.3.1-1.

Table 5.2.3.3.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.2.3.3.3.1-2 and the response data structures and response codes specified in table 5.2.3.3.3.1-3.

Table 5.2.3.3.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.3.3.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Individual ADRF ML Model Store Record resource was deleted successfully.
array(MLModelDelResult)	M	1..N	200 OK	Attempted to remove ML model(s) in the Individual ADRF ML Model Store Record resource. A representation of ML Model delete result information is returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual ADRF ML Model Store Record deletion. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual ADRF ML Model Store Record deletion. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	NOTE 3
ProblemDetails	O	0..1	500 Internal Server Error	NOTE 3
NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				
NOTE 3: Failure cases are described in clause 5.2.7.3.				

Table 5.2.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target ADRF (service) instance towards which the request is redirected.

Table 5.2.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative ADRF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target ADRF (service) instance towards which the request is redirected.

5.2.3.3.3.2 PUT

This method shall support the URI query parameters specified in table 5.2.3.3.3.2-1.

Table 5.2.3.3.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.2.3.3.3.2-2 and the response data structures and response codes specified in table 5.2.3.3.3.2-3.

Table 5.2.3.3.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
NadrfMLModelStoreRecord	M	1	Parameters to replace an individual ML Model Store Record.

Table 5.2.3.3.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NadrfMLModelStoreRecord	M	1	200 OK	The Individual ADRF ML Model Store Record resource was modified successfully and a representation of that resource is returned.
n/a			204 No Content	The Individual ADRF ML Model Store Record resource was modified successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during Individual ADRF ML Model Store Record modification. (NOTE 3)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during Individual ADRF ML Model Store Record modification. (NOTE 3)
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)
ProblemDetails	O	0..1	500 Internal Server Error	(NOTE 2)
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: Failure cases are described in clause 5.2.7.3.				
NOTE 3: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

5.2.3.3.4 Resource Custom Operations

None in this release of the specification.

5.2.4 Custom Operations without associated resources

5.2.4.1 Overview

The structure of the custom operation URIs of the Nadrf_MLModelManagement service is shown in Figure 5.2.4.1-1.

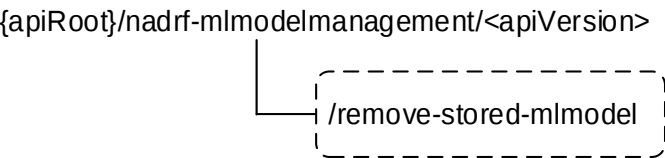


Figure 5.2.4.1-1: Custom operation URI structure of the Nadrf_MLModelManagement API

Table 5.2.4.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 5.2.4.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/nadrf-mlmodelmanagement/<apiVersion>/remove-stored-mlmodel	POST	Request the ADRF to remove already stored ML model.

5.2.4.4 Operation: remove-stored-mlmodel

5.2.4.4.1 Description

The operation is used by the NF service consumer to request the ADRF to remove stored ML model(s) based on a unique ML model identifier.

5.2.4.4.2 Operation Definition

This operation shall support the request data structures shown in Table 5.2.4.4.2-1 and the response data structures and error codes specified in Tables 5.2.4.4.2-2.

Table 5.2.4.4.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
array(Integer)	M	1..N	Unique ML model identifier(s) of the ML model(s) stored in ADRF.

Table 5.2.4.4.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The ML model(s) of all provided ML model identifiers have been successfully deleted.
array(MLModelDelResult)	M	1..N	200 OK	Attempted to remove ML model(s) in the ADRF based on the unique ML model identifier. A representation of ML Model delete result information is returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 3)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 3)
ProblemDetails	O	0..1	404 Not Found	NOTE 2
ProblemDetails	O	0..1	500 Internal Server Error	NOTE 2
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: Failure cases are described in clause 5.2.7.3.				
NOTE 3: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of 3GPP TS 29.500 [4]).				

Table 5.2.4.4.2-3: Headers supported by the 307 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

Table 5.2.4.4.2-4: Headers supported by the 308 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative ADRF (service) instance towards which the request should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of 3GPP TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Contains the identifier of the target ADRF (service) instance towards which the request should be redirected.

5.2.5 Notifications

None in this release of the specification.

5.2.6 Data Model

5.2.6.1 General

This clause specifies the application data model supported by the Nadrf_MLModelManagement API.

Table 5.2.6.1-1 specifies the data types defined for the Nadrf_MLModelManagement service based interface protocol.

Table 5.2.6.1-1: Nadrf_MLModelManagement specific Data Types

Data type	Clause defined	Description	Applicability
AllowedConsumer	5.2.6.2.6	Contains the identifier of NF instance and NF set.	
DeleteResult	5.2.6.3.1	Indicates the result of the delete operation.	
NadrfMLModelStoreRecord	5.2.6.2.2	Represents an Individual ADRF ML Model Store Record resource.	
MLModel	5.2.6.2.4	Represents an ML model.	
MLModelDelResult	5.2.6.2.5	Represents information provided in the response to the Nadrf_MLModelManagement Delete service operation.	
MLModelInfo	5.2.6.2.3	Represents information of the ML Model.	
ModelStoreResult	5.2.6.2.7	Contains information about ML model storage/retrieval result.	
StoreResult	5.2.6.3.2	Indicates the result of the store/retrieval operation.	

Table 5.2.6.1-2 specifies data types re-used by the Nadrf_MLModelManagement service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nadrf_MLModelManagement service based interface.

Table 5.2.6.1-2: Nadrf_MLModelManagement re-used Data Types

Data type	Reference	Comments	Applicability
Binary	3GPP TS 29.571 [16]	String with format "binary".	
MLModelAddr	3GPP TS 29.520 [15]	Address of ML model file	
NfInstanceId	3GPP TS 29.571 [16]	NF instance identifier.	
NfSetId	3GPP TS 29.571 [16]	NF set identifier.	
SupportedFeatures	3GPP TS 29.571 [16]	Used to negotiate the applicability of the optional features defined in table 5.2.8-1.	
UInteger	3GPP TS 29.571 [16]	Unsigned Integer, i.e. only value 0 and integers above 0 are permissible.	

5.2.6.2 Structured data types

5.2.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

5.2.6.2.2 Type: NadrMLModelStoreRecord

Table 5.2.6.2.2-1: Definition of type NadrMLModelStoreRecord

Attribute name	Data type	P	Cardinality	Description	Applicability
nfInstancelId	NfInstancelId	C	0..1	NF instance Identifier of the NWDAF containing MTLF. (NOTE 1)	
nfSetId	NfSetId	C	0..1	NF set identifier of the NWDAF containing MTLF. (NOTE 1)	
mlModelInfo	array(MLModelInfo)	C	1..N	ML Model information. (NOTE 2)	
mlModels	array(MLModel)	C	1..N	Each element represents an ML model. (NOTE 2)	
modelStoreResult	ModelStoreResult	O	0..1	Indicates the result of the store operation. If the "EnModelMgmt" feature is supported, the attribute also indicates the failure cause of the retrieval operation. (NOTE 3)	
modelStoreResults	array(ModelStoreResult)	O	1..N	Indicates the result of the store operation. (NOTE 3)	EnModelMgmt
supFeat	SupportedFeatures	C	0..1	Contains the list of supported features among the ones defined in clause 5.2.8. This attribute shall be provided only when feature negotiation needs to take place.	
NOTE 1: One of "nfInstancelId" and "nfSetId" attributes shall be provided. NOTE 2: Any of the "mlModelInfo" and "mlModels" attributes shall be provided. NOTE 3: The "modelStoreResult" and "modelStoreResults" attributes are only applicable to the response to an NadrMLModelManagement_StorageRequest service operation. The "modelStoreResults" attribute shall be used instead of the "modelStoreResult" attribute when the "EnModelMgmt" feature is supported. If the "EnModelMgmt" feature is supported, this attribute is also applicable to the response to an NadrMLModelManagement_RetrievalRequest service operation.					

5.2.6.2.3 Type: MLModelInfo

Table 5.2.6.2.3-1: Definition of type MLModelInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
modelUniqueid	UInteger	M	1	Unique ML Model identifier	
mlFileAddr	MLModelAddr	M	1	Address (e.g. a URL or an FQDN) of the ML model file.	
mlStorageSize	UInteger	M	1	Storage size in octets required for each of the ML model.	
allowConsumerList	array(AllowedConsumer)	O	1..N	The allowed NF consumer list for the ML model.	

5.2.6.2.4 Type: MLModel

Table 5.2.6.2.4-1: Definition of type MLModel

Attribute name	Data type	P	Cardinality	Description	Applicability
modelUniqueld	UInteger	M	1	Unique ML Model identifier	
mlModel	Binary	M	1	Represents an ML model. The value is out of 3GPP.	
allowConsumerList	array(AllowedConsumer)	O	1..N	The allowed NF consumer list for the ML model.	EnModelMgmt

5.2.6.2.5 Type: MLModelDelResult

Table 5.2.6.2.5-1: Definition of type MLModelDelResult

Attribute name	Data type	P	Cardinality	Description	Applicability
modelUniqueld	UInteger	M	1	Unique ML Model identifier	
deleteResult	DeleteResult	M	1	Indicates the result of the delete operation	

5.2.6.2.6 Type: AllowedConsumer

Table 5.2.6.2.6-1: Definition of type AllowedConsumer

Attribute name	Data type	P	Cardinality	Description	Applicability
nfInstanceld	NfInstanceld	C	0..1	Identification of NF instance.	
nfSetId	NfSetId	C	0..1	Identification of NF instance set.	
NOTE: One of "nfInstanceld" and "nfSetId" attributes shall be provided.					

5.2.6.2.7 Type: ModelStoreResult

Table 5.2.6.2.7-1: Definition of type ModelStoreResult

Attribute name	Data type	P	Cardinality	Description	Applicability
modelUniqueld	UInteger	M	1	Unique ML Model identifier of the ML Model.	
storeResult	StoreResult	M	1	Storage result information.	

5.2.6.3 Simple data types and enumerations

5.2.6.3.1 Enumeration: DeleteResult

Table 5.2.6.3.1-1: Enumeration DeleteResult

Attribute name	Description	Applicability
ML_MODEL_DELETED	Indicates that the ML model was deleted in ADRF.	
ML_MODEL_NOT_FOUND	Indicates that the ML model was not found in ADRF.	
ML_MODEL_FOUND_BUT_NOT_DELETED	Indicates that the ML model was found in ADRF but not deleted.	

5.2.6.3.2 Enumeration: StoreResult

Table 5.2.6.3.2-1: Enumeration StoreResult

Attribute name	Description	Applicability
ML_MODEL_FILE_STORED_IN_ADRF	Indicates that the ML model was successfully stored in ADRF.	
ML_MODEL_FILE_ADDRESS_NOT_FOUND	Indicates the failure cause of ML model storage is because the ML model file address was not found.	
ML_MODEL_FILE_DOWNLOAD_FAILED	Indicates the failure cause of ML model storage is because the download of the ML model file failed.	
RETRIEVAL_ML_MODEL_NOT_ALLOWED	Indicates the failure cause of ML model retrieval is because the retrieval of the ML model is not allowed.	EnModelMgmt

5.2.6.4 Data types describing alternative data types or combinations of data types

None.

5.2.7 Error Handling

5.2.7.1 General

For the Nadr_f_MLModelManagement API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nadr_f_MLModelManagement API.

5.2.7.2 Protocol Errors

No specific procedures for the Nadr_f_MLModelManagement service are specified.

5.2.7.3 Application Errors

The application errors defined for the Nadr_f_MLModelManagement service are listed in Table 5.2.7.3-1.

Table 5.2.7.3-1: Application errors

Application Error	HTTP status code	Description
RETRIEVAL_ML_MODEL_NOT_ALLOWED	403 Forbidden	Indicates that the retrieval of the ML model is not allowed.
ML_MODEL_FILE_ADDRESS_NOT_FOUND	404 Not Found	Indicates in the response to a storage request that the ML model file address was not found.
ML_MODEL_FILE_DOWNLOAD_FAILED	500 Internal Server Error	Indicates in the response to a storage request that the download of the ML model file failed.
ML_MODEL_NOT_FOUND	404 Not Found	Indicates in the response to a delete request that the ML model was not found in ADRF.
ML_MODEL_FOUND_BUT_NOT_DELETED	500 Internal Server Error	Indicates in the response to a delete request that the ML model was found in ADRF but not deleted.

5.2.8 Feature negotiation

The optional features in table 5.2.8-1 are defined for the Nadr_f_MLModelManagement API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 5.2.8-1: Supported Features

Feature number	Feature Name	Description
1	EnModelMgmt	This feature indicates the enhancement of ML model management, including: - supporting allowed NF consumer list for the ML model (not downloaded by the ADRF). - supporting multiple model storage results. - supporting partial failure for ML models retrieval.

5.2.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nadr_f_MLModelManagement API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nadr_f_MLModelManagement API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nadr_f_MLModelManagement service.

The Nadr_f_MLModelManagement API defines a single scope "nadr-f-mlmodelmanagement" for the entire service, and it does not define any additional scopes at resource or operation level.

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the formal definition of the API(s) defined in the present specification. It consists of OpenAPI 3.0.0 specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 1: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see 3GPP TS 29.501 [5] clause 5.3.1 and 3GPP TR 21.900 [7] clause 5B).

A.2 NadrF_DataManagement API

```
openapi: 3.0.0
info:
  version: 1.2.2
  title: NadrF_DataManagement
  description: |
    ADRF Data Management Service.
    © 2026, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  externalDocs:
    description: 3GPP TS 29.575 V19.7.0; 5G System; Analytics Data Repository Services; Stage 3.
    url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.575/'
#
servers:
- url: '{apiRoot}/nadrF-datamanagement/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501.
#
security:
- oAuth2ClientCredentials:
  - nadrF-datamanagement
- {}
#
paths:
  /data-store-records:
    post:
      summary: Creates a new Individual Data Store Record resource.
      operationId: CreateADRFDataStoreRecord
      tags:
        - ADRF Data Store Records (Collection)
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NadrFDataStoreRecord'
            required: true
            description: ADRF data store record to be stored.
      responses:
        '201':
          description: Successful creation of new Individual ADRF Data Store Record resource.
          headers:
            Location:
              description: >
                Contains the URI of the newly created resource, according to the structure
                {apiRoot}/nadrF-datamanagement/<apiVersion>/data-store-records/{storeTransId}
```

```
      required: true
      schema:
        type: string
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NadrfDataStoreRecord'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  storageAlertNotification:
    '{$request.body#/delNotifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NadrfAlertNotification'
  responses:
    '200':
      description: The alert receipt is acknowledged and a planned action is provided.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NadrfAlertNotificationResponse'
    '204':
      description: The alert receipt is acknowledged.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '502':
      $ref: 'TS29571_CommonData.yaml#/components/responses/502'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
```

```

get:
  summary: Retrieves existing Individual ADRF Data Store Records.
  operationId: GetAdrfDataStoreRecords
  tags:
    - ADRF Data Store Records (Collection)
  security:
    - {}
    - OAuth2ClientCredentials:
        - nadrf-datamanagement
    - OAuth2ClientCredentials:
        - nadrf-datamanagement
        - nadrf-datamanagement:storage-read-delete-subs
  parameters:
    - name: store-trans-id
      description: A storage transaction identifier of a data store record in ADRF.
      in: query
      required: false
      schema:
        type: string
    - name: fetch-correlation-ids
      description: Fetch correlation identifiers received as part of fetch instruction.
      in: query
      required: false
      style: form
      explode: false
      schema:
        type: array
        items:
          type: string
        minItems: 1
    - name: data-set-id
      description: The data set identifier.
      in: query
      required: false
      schema:
        type: string
  responses:
    '200':
      description: Data store records are returned.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NadrfDataStoreRecord'
    '204':
      description: No matching ADRF data were found.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29571_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '502':
      $ref: 'TS29571_CommonData.yaml#/components/responses/502'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-store-records/{storeTransId}:
  delete:
    summary: Delete an existing Individual ADRF Data Store Record.
    operationId: DeleteADRFDataStoreRecord
    tags:
      - Individual ADRF Data Store Record (Document)
    security:
      - {}
      - OAuth2ClientCredentials:

```

```

    - nadrf-datamanagement
    - oAuth2ClientCredentials:
      - nadrf-datamanagement
      - nadrf-datamanagement:storage-read-delete-subs
  parameters:
    - name: storeTransId
      in: path
      description: String identifying a Data Store Record in ADRF.
      required: true
      schema:
        type: string
  responses:
    '204':
      description: >
        No Content. The Individual ADRF Data Store Record resource matching the
        storeTransId was deleted.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '502':
      $ref: 'TS29571_CommonData.yaml#/components/responses/502'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-retrieval-subscriptions:
  post:
    summary: Creates a new Individual ADRF Data Retrieval Subscription resource.
    operationId: CreateADRFDDataRetrievalSubscription
    tags:
      - ADRF Data Retrieval Subscriptions (Collection)
    security:
      - {}
      - oAuth2ClientCredentials:
        - nadrf-datamanagement
      - oAuth2ClientCredentials:
        - nadrf-datamanagement
      - nadrf-datamanagement:storage-read-delete-subs
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NadrfDataRetrievalSubscription'
          required: true
      description: Individual ADRF Data Retrieval Subscription resource to be created.
    responses:
      '201':
        description: Created a new Individual ADRF Data Retrieval Subscription resource.
        headers:
          Location:
            description: >
              Contains the URI of the newly created resource, according to the structure
              {apiRoot}/nadrf-datamanagement/<apiVersion>/data-retrieval-
              subscriptions/{subscriptionId}
            required: true
            schema:
              type: string
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NadrfDataRetrievalSubscription'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'

```

```

'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'502':
  $ref: 'TS29571_CommonData.yaml#/components/responses/502'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  adrfDataRetrievalNotification:
    '{$request.body#/notificationURI}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NadrfDataRetrievalNotification'
        responses:
          '204':
            description: The receipt of the Notification is acknowledged.
          '307':
            $ref: 'TS29571_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29571_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '502':
            $ref: 'TS29571_CommonData.yaml#/components/responses/502'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/data-retrieval-subscriptions/{subscriptionId}:
  delete:
    summary: Delete an existing Individual ADRF Data Retrieval Subscription resource.
    operationId: DeleteADRFDataRetrievalSubscription
    tags:
      - Individual ADRF Data Retrieval Subscription (Document)
    security:
      - {}
      - OAuth2ClientCredentials:
          - nadrf-datamanagement
      - OAuth2ClientCredentials:
          - nadrf-datamanagement
          - nadrf-datamanagement:storage-read-delete-subs
    parameters:
      - name: subscriptionId
        in: path
        description: >

```

```

        String identifying a data retrieval subscription to the Ndrf_DataManagement
        Service.
        required: true
        schema:
          type: string
      responses:
        '204':
          description: >
            No Content. The Individual ADRF Data Retrieval Subscription resource matching
            the subscriptionId was deleted.
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  /request-storage-sub:
    post:
      summary: Triggers the creation of a new ADRF Storage Subscription.
      operationId: CreateADRFStorageSubscription
      tags:
        - ADRF Storage Subscriptions
      security:
        - {}
        - oAuth2ClientCredentials:
            - nadrf-datamanagement
        - oAuth2ClientCredentials:
            - nadrf-datamanagement
            - nadrf-datamanagement:storage-read-delete-subs
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NdrfDataStoreSubscription'
        required: true
      responses:
        '200':
          description: >
            Successful response with reference used to identify the subscription at the ADRF.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NdrfDataStoreSubscriptionRef'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  storageSubAlertNotification:
    '{$request.body#/delNotifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NadrfAlertNotification'
        responses:
          '200':
            description: The alert receipt is acknowledged and a planned action is provided.
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/NadrfAlertNotificationResponse'
          '204':
            description: The alert receipt is acknowledged.
          '307':
            $ref: 'TS29571_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29571_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '502':
            $ref: 'TS29571_CommonData.yaml#/components/responses/502'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/request-storage-sub-removal:
  post:
    summary: Triggers the removal of ADRF storage subscription.
    operationId: DeleteADRFStorageSubscription
    tags:
      - ADRF Storage Subscriptions
    security:
      - {}
      - oAuth2ClientCredentials:
          - nadrf-datamanagement
      - oAuth2ClientCredentials:
          - nadrf-datamanagement
          - nadrf-datamanagement:storage-read-delete-subs
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NadrfDataStoreSubscriptionRef'
      required: true
    responses:
      '204':
        description: >

```

```

    No Content. The ADRF Storage Subscription matching the provided reference was deleted.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/remove-stored-data-analytics:
  post:
    summary: Remove ADRF data based on data or analytics specification.
    operationId: DeleteADRFDData
    tags:
      - ADRF Stored Data
    security:
      - {}
      - OAuth2ClientCredentials:
          - nadrf-datamanagement
      - OAuth2ClientCredentials:
          - nadrf-datamanagement
          - nadrf-datamanagement:storage-read-delete-subs
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NadrfStoredDataSpec'
      required: true
    responses:
      '204':
        description: No Content. The ADRF data matching the provided specification is deleted.
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
#
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nadrf-datamanagement: Access to the nadrf-datamanagement API
            nadrf-datamanagement:storage-read-delete-subs: >
              Access to service operations applying to
              Nadrf_DataManagement_StorageRequest Nadrf_DataManagement_StorageSubscriptionRequest,
              Nadrf_DataManagement_StorageSubscriptionRemoval,
              Nadrf_DataManagement_RetrievalRequest,
              Nadrf_DataManagement_RetrievalSubscribe, Nadrf_DataManagement_RetrievalUnsubscribe,
              Nadrf_DataManagement_RetrievalNotify, Nadrf_DataManagement_Delete service operations
#
  schemas:
#
    NadrfDataStoreRecord:
      description: Represents an Individual ADRF Data Store Record.
      type: object
      oneOf:
        - allOf:
            - required: [anaSub]
            - required: [anaNotifications]
        - allOf:
            - required: [dataSub]
            - required: [dataNotif]
      properties:
        dataNotif:
          $ref: '#/components/schemas/DataNotification'
        anaNotifications:
          type: array
          items:
            $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscriptionNotification'
          minItems: 1
          description: List of analytics subscription notifications.
        anaSub:
          type: array
          items:
            $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscription'
          minItems: 1
          description: >
            Represents the subscription information of the corresponding analytics notification.
        dataSub:
          type: array
          items:
            $ref: '#/components/schemas/DataSubscription'
          minItems: 1
          description: >
            Represents the subscription information of the corresponding data notification.
        storeHandl:
          $ref: '#/components/schemas/StorageHandlingInfo'
        dataSetTag:
          $ref: '#/components/schemas/DataSetTag'
        dsc:
          type: string
          description: Data synthesis and compression information.
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
#
    NadrfDataStoreSubscription:
      description: >
        Contains information to be used by the ADRF to create a Data or Analytics subscription.
      type: object
      allOf:
        - oneOf:
            - required: [anaSub]
            - required: [dataSub]
        - oneOf:
            - required: [targetNfId]
            - required: [targetNfSetId]
      properties:

```

```

    anaSub:
      $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscription'
    dataSetTag:
      $ref: '#/components/schemas/DataSetTag'
    dataSub:
      $ref: '#/components/schemas/DataSubscription'
    targetNfId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
    targetNfSetId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
    formatInstruct:
      $ref: 'TS29574_Ndccf_DataManagement.yaml#/components/schemas/FormattingInstruction'
    procInstruct:
      $ref: 'TS29574_Ndccf_DataManagement.yaml#/components/schemas/ProcessingInstruction'
    multiProcInstructs:
      type: array
      items:
        $ref: 'TS29574_Ndccf_DataManagement.yaml#/components/schemas/ProcessingInstruction'
      minItems: 1
      description: Processing instructions to be used for sending event notifications.
    storeHandle:
      $ref: '#/components/schemas/StorageHandlingInfo'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
#

```

NadrfDataRetrievalSubscription:

description: Represents an Individual ADRF Data Retrieval Subscription.

type: object

required:

- notifCorrId
- notificationURI
- timePeriod

oneOf:

- required: [anaSub]
- required: [dataSub]
- required: [dataSetId]

properties:

anaSub:

\$ref:

```

'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscription'

```

dataSetId:

type: string

description: data set identifier of the data or analytics that are subscribed.

dataSub:

\$ref: '#/components/schemas/DataSubscription'

notificationURI:

\$ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'

timePeriod:

\$ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'

notifCorrId:

type: string

description: Notification correlation identifier.

consTrigNotif:

type: boolean

description: >

It indicates that notifications shall be buffered (sending only fetch instructions to the NF service consumer) until the NF service consumer requests their delivery using Nadrf_DataManagement Service.

suppFeat:

\$ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

#

NadrfDataRetrievalNotification:

description: >

Represents a notification that corresponds with an Individual ADRF Data Retrieval Subscription.

type: object

required:

- notifCorrId
- timeStamp

oneOf:

- required: [anaNotifications]
- required: [dataNotif]
- required: [fetchInstruct]

properties:

notifCorrId:

type: string

description: Notification correlation identifier.

```

    anaNotifications:
      type: array
      items:
        $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscriptionNotification'
      minItems: 1
      description: List of analytics subscription notifications.
    dataNotif:
      $ref: '#/components/schemas/DataNotification'
    fetchInstruct:
      $ref: 'TS29576_Nmfaf_3caDataManagement.yaml#/components/schemas/FetchInstruction'
    terminationReq:
      type: boolean
      description: >
        It indicates the termination of the data management subscription that requested by the
        ADRF.
    dsc:
      type: string
      description: Data synthesis and compression information.
    timeStamp:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
#
NadrfDataStoreSubscriptionRef:
  description: Contains a reference to a request for a Data or Analytics subscription.
  type: object
  oneOf:
    - required: [transRefId]
    - required: [dataSetId]
  properties:
    transRefId:
      type: string
      description: Transaction reference identifier.
    dataSetId:
      type: string
      description: data set identifier of data or analytics.
#
NadrfStoredDataSpec:
  description: Contains information about Data or Analytics specification.
  type: object
  required:
    - timePeriod
  oneOf:
    - required: [dataSpec]
    - required: [anaSpec]
    - required: [dataSetId]
  properties:
    dataSpec:
      $ref: '#/components/schemas/DataSubscription'
    anaSpec:
      $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscription'
    timePeriod:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
    dataSetId:
      type: string
      description: Data set identifier of stored data or analytics records.
#
DataSubscription:
  description: Contains a data specification.
  type: object
  oneOf:
    - required: [amfDataSub]
    - required: [smfDataSub]
    - required: [udmDataSub]
    - required: [nefDataSub]
    - required: [afDataSub]
    - required: [nrfDataSub]
    - required: [nsacfDataSub]
    - required: [upfDataSub]
    - required: [gmlcDataSub]
    - required: [lmfDataSub]
    - required: [pcfDataSub]
  properties:
    amfDataSub:
      $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/AmfEventSubscription'
    smfDataSub:
      $ref: 'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NsmfEventExposure'
    udmDataSub:

```

```

    $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/EeSubscription'
  afDataSub:
    $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
  nefDataSub:
    $ref: 'TS29591_Nnef_EventExposure.yaml#/components/schemas/NefEventExposureSubsc'
  nrfDataSub:
    $ref: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/SubscriptionData'
  nsacfDataSub:
    $ref: 'TS29536_Nnsacf_SliceEventExposure.yaml#/components/schemas/SACEventSubscription'
  upfDataSub:
    $ref: 'TS29564_Nupf_EventExposure.yaml#/components/schemas/UpfEventSubscription'
  gmlcDataSub:
    $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/InputData'
  lmfDataSub:
    $ref: 'TS29572_Nlmf_DataExposure.yaml#/components/schemas/LmfDataExposureSubscription'
  pcfDataSub:
    $ref: 'TS29523_Npcf_EventExposure.yaml#/components/schemas/PcEventExposureSubsc'
#

```

DataNotification:

description: Represents a Data Subscription Notification.

type: object

oneOf:

- required: [amfEventNotifs]
- required: [smfEventNotifs]
- required: [udmEventNotifs]
- required: [nefEventNotifs]
- required: [afEventNotifs]
- required: [nrfEventNotifs]
- required: [nsacfEventNotifs]
- required: [upfEventNotifs]
- required: [gmlcEventNotifs]
- required: [lmfEventNotifs]
- required: [pcfEventNotifs]

properties:

amfEventNotifs:

type: array

items:

\$ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/AmfEventNotification'

minItems: 1

description: List of notifications of AMF events.

smfEventNotifs:

type: array

items:

\$ref:

'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NsmfEventExposureNotification'

minItems: 1

description: List of notifications of SMF events.

udmEventNotifs:

type: array

items:

\$ref: 'TS29503_Nudm_EE.yaml#/components/schemas/MonitoringReport'

minItems: 1

description: List of notifications of UDM events.

nefEventNotifs:

type: array

items:

\$ref: 'TS29591_Nnef_EventExposure.yaml#/components/schemas/NefEventExposureNotif'

minItems: 1

description: List of notifications of NEF events.

afEventNotifs:

type: array

items:

\$ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureNotif'

minItems: 1

description: List of notifications of AF events.

nrfEventNotifs:

type: array

items:

\$ref: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/NotificationData'

minItems: 1

description: List of notifications of NRF events.

nsacfEventNotifs:

type: array

items:

\$ref: 'TS29536_Nnsacf_SliceEventExposure.yaml#/components/schemas/SACEventReport'

minItems: 1

description: List of notifications of NSACF events.

upfEventNotifs:

```

    type: array
    items:
      $ref: 'TS29564_Nupf_EventExposure.yaml#/components/schemas/NotificationData'
    minItems: 1
    description: List of notifications of UPF events.
  gmlcEventNotifs:
    type: array
    items:
      $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/EventNotifyData'
    minItems: 1
    description: List of notifications of GMLC events.
  lmfEventNotifs:
    type: array
    items:
      $ref: 'TS29572_Nlmf_DataExposure.yaml#/components/schemas/LmfDataExposureNotification'
    minItems: 1
    description: List of notifications of LMF events.
  pcfEventNotifs:
    type: array
    items:
      $ref: 'TS29523_Npcf_EventExposure.yaml#/components/schemas/PcEventExposureNotif'
    minItems: 1
    description: List of notifications of PCF events.
  timeStamp:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'

```

#

```

StorageHandlingInfo:
  description: Contains storage handling information about data or analytics.
  type: object
  properties:
    lifetime:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    delNotifUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    delNotifCorrId:
      type: string
      description: Notification correlation identifier for deletion alerts.

```

#

```

NadrfAlertNotification:
  description: Contains information about data or analytics that are about to be deleted.
  type: object
  properties:
    alertStorTransId:
      type: string
      description: >
        Storage transaction identifier that can be used to retrieve data or analytics.
    delNotifCorrId:
      type: string
      description: Notification correlation identifier.
  required:
    - alertStorTransId
    - delNotifCorrId

```

#

```

NadrfAlertNotificationResponse:
  description: >
    Contains information about planned actions related to data or analytics
    that are about to be deleted.
  type: object
  properties:
    retrievalInd:
      type: boolean
      description: >
        Indicates if the NF service consumer has determined to retrieve the data
        or analytics that are about to be deleted.
  required:
    - retrievalInd

```

#

```

DataSetTag:
  description: Contains an identifier and a description of associated records.
  type: object
  required:
    - dataSetId
  properties:
    dataSetId:
      type: string
      description: Data set identifier of data or analytics records.
    dataSetDesc:

```

```

type: string
description: Data set description of data or analytics records.

```

#

A.3 Nadrf_MLModelManagement API

```
openapi: 3.0.0
```

```
info:
```

```
  version: 1.1.0
```

```
  title: Nadrf_MLModelManagement
```

```
  description: |
```

```
    ADRF ML Model Management Service.
```

```
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
```

```
    All rights reserved.
```

```
externalDocs:
```

```
  description: 3GPP TS 29.575 V19.5.0; 5G System; Analytics Data Repository Services; Stage 3.
```

```
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.575/'
```

#

```
servers:
```

```
  - url: '{apiRoot}/nadrflmlmodelmanagement/v1'
```

```
    variables:
```

```
      apiRoot:
```

```
        default: https://example.com
```

```
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501.
```

#

```
security:
```

```
  - {}
```

```
  - oAuth2ClientCredentials:
```

```
    - nadrf-mlmodelmanagement
```

#

```
paths:
```

```
  /mlmodel-store-records:
```

```
    post:
```

```
      summary: Creates a new Individual ADRF ML Model Store Record resource.
```

```
      operationId: CreateADRfMLModelStoreRecord
```

```
      tags:
```

```
        - ADRF ML Model Store Records (Collection)
```

```
      requestBody:
```

```
        content:
```

```
          application/json:
```

```
            schema:
```

```
              $ref: '#/components/schemas/NadrflMLModelStoreRecord'
```

```
            required: true
```

```
            description: ADRF ML model store record to be stored.
```

```
      responses:
```

```
        '201':
```

```
          description: Successful creation of new Individual ADRF ML Model Store Record resource.
```

```
          headers:
```

```
            Location:
```

```
              description: >
```

```
                Contains the URI of the newly created resource, according to the structure
```

```
                {apiRoot}/nadrflmlmodelmanagement/<apiVersion>/mlmodel-store-records/{storeTransId}
```

```
                required: true
```

```
                schema:
```

```
                  type: string
```

```
            content:
```

```
              application/json:
```

```
                schema:
```

```
                  $ref: '#/components/schemas/NadrflMLModelStoreRecord'
```

```
        '400':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
```

```
        '401':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
```

```
        '403':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
```

```
        '404':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
```

```
        '411':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
```

```
        '413':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
```

```
        '415':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
```

```
        '429':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
```

```
        '500':
```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
get:
  summary: Retrieves existing Individual ADRF ML Model Store Record.
  operationId: GetAdrfMLModelStoreRecord
  tags:
    - ADRF ML Model Store Records (Collection)
  parameters:
    - name: store-trans-id
      description: A storage transaction identifier of a ML model store record in ADRF.
      in: query
      required: false
      schema:
        type: string
    - name: model-unique-ids
      description: Unique Model identifier of a ML model.
      in: query
      required: false
      schema:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    - name: supported-features
      description: The features supported by the NF service consumer.
      in: query
      required: false
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  responses:
    '200':
      description: ML model store records are returned.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NadrfMLModelStoreRecord'
    '204':
      description: No matching ADRF ML Model were found.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29571_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '502':
      $ref: 'TS29571_CommonData.yaml#/components/responses/502'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/mlmodel-store-records/{storeTransId}:
delete:
  summary: Delete an existing Individual ADRF ML Model Store Record.
  operationId: DeleteAdrfMLModelStoreRecord
  tags:
    - Individual ADRF ML Model Store Record (Document)
  parameters:
    - name: storeTransId
      in: path
      description: String identifying a ML Model Store Record in ADRF.
      required: true
      schema:

```

```

      type: string
    responses:
      '200':
        description: >
          Attempted to remove ML model(s) in the Individual ADRF ML Model Store Record resource.
          The result is returned.
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: '#/components/schemas/MLModelDelResult'
              minItems: 1
      '204':
        description: >
          No Content. The Individual ADRF ML Model Store Record resource matching the
          storeTransId was deleted.
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29571_CommonData.yaml#/components/responses/default'
    put:
      summary: Update an existing Individual ADRF ML Model Store Record
      operationId: UpdateADRFMLModelStoreRecord
      tags:
        - Individual ADRF ML Model Store Record (Document)
      parameters:
        - name: storeTransId
          in: path
          description: String identifying a ML Model Store Record in ADRF.
          required: true
          schema:
            type: string
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NadrfMLModelStoreRecord'
        required: true
      responses:
        '200':
          description: >
            The Individual ADRF ML Model Store Record resource was modified successfully
            and a representation of that resource is returned.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NadrfMLModelStoreRecord'
        '204':
          description: The Individual ADRF ML Model Store Record resource was modified successfully.
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'

```

```

'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'502':
  $ref: 'TS29571_CommonData.yaml#/components/responses/502'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/remove-stored-mlmodel:
  post:
    summary: Remove stored ML model based on unique ML model identifier.
    operationId: DeleteADRFMLModel
    tags:
      - ADRF Stored ML Model
    requestBody:
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
            minItems: 1
          required: true
    responses:
      '200':
        description: >
          The ADRF ML model matching the provided unique ML model identifier
          was attempted to be deleted. The result is returned.
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: '##/components/schemas/MLModelDelResult'
              minItems: 1
      '204':
        description: >
          No Content. The ML models matching all identifiers provided in the request body
          were deleted.
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29571_CommonData.yaml#/components/responses/default'
#

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nadrf-mlmodelmanagement: Access to the nadrf-mlmodelmanagement API
#
# schemas:
#
NadrfMLModelStoreRecord:
  description: Represents an Individual ADRF ML Model Store Record.
  type: object
  allof:
    - oneOf:
      - required: [nfInstanceId]
      - required: [nfSetId]
    - anyOf:
      - required: [mlModelInfo]
      - required: [mlModels]
  properties:
    nfInstanceId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
    nfSetId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
    mlModelInfo:
      type: array
      items:
        $ref: '#/components/schemas/MLModelInfo'
      minItems: 1
      description: List of ML Model Information.
    mlModels:
      type: array
      items:
        $ref: '#/components/schemas/MLModel'
      minItems: 1
      description: Represents ML Model(s).
    modelStoreResult:
      $ref: '#/components/schemas/ModelStoreResult'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    modelStoreResults:
      type: array
      items:
        $ref: '#/components/schemas/ModelStoreResult'
      minItems: 1
      description: Indicates the multiple model storage results.
#
MLModelInfo:
  description: Represents information of the ML Model.
  type: object
  allof:
    - required: [modelUniqueId]
    - required: [mlFileAddr]
    - required: [mlStorageSize]
  properties:
    modelUniqueId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    mlFileAddr:
      $ref: 'TS29520_Nnwdaf_MLModelProvision.yaml#/components/schemas/MLModelAddr'
    mlStorageSize:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    allowConsumerList:
      type: array
      items:
        $ref: '#/components/schemas/AllowedConsumer'
      minItems: 1
      description: The allowed consumer list of the ML Model.
#
AllowedConsumer:
  description: Represents information of the allowed consumer list of the ML Model.
  type: object
  properties:
    nfInstanceId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'

```

```

    nfSetId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
  oneOf:
    - required: [nfInstanceId]
    - required: [nfSetId]
#
MLModelDelResult:
  description: Represents information of the ML Model.
  type: object
  allOf:
    - required: [modelUniqueId]
    - required: [deleteResult]
  properties:
    modelUniqueId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    deleteResult:
      $ref: '#/components/schemas/DeleteResult'
#
MLModel:
  description: Represents an ML Model.
  type: object
  allOf:
    - required: [modelUniqueId]
    - required: [mlModel]
  properties:
    modelUniqueId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    mlModel:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Binary'
    allowConsumerList:
      type: array
      items:
        $ref: '#/components/schemas/AllowedConsumer'
      minItems: 1
      description: The allowed consumer list of the ML Model.
#
ModelStoreResult:
  description: Contains information about ML Model storage result.
  type: object
  allOf:
    - required: [modelUniqueId]
    - required: [storeResult]
  properties:
    modelUniqueId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    storeResult:
      $ref: '#/components/schemas/StoreResult'
#
# ENUMERATIONS DATA TYPES
#
DeleteResult:
  anyOf:
    - type: string
      enum:
        - ML_MODEL_DELETED
        - ML_MODEL_NOT_FOUND
        - ML_MODEL_FOUND_BUT_NOT_DELETED
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
      description: |
        Represents the store result type.
        Possible values are:
        - ML_MODEL_DELETED: Indicates that the ML model was deleted in ADRF.
        - ML_MODEL_NOT_FOUND: Indicates that the ML model was not found in ADRF.
        - ML_MODEL_FOUND_BUT_NOT_DELETED: Indicates that the ML model was found in ADRF but not
          deleted.
#
StoreResult:
  anyOf:
    - type: string
      enum:
        - ML_MODEL_FILE_STORED_IN_ADRF
        - ML_MODEL_FILE_ADDRESS_NOT_FOUND
        - ML_MODEL_FILE_DOWNLOAD_FAILED

```

- RETRIEVAL_ML_MODEL_NOT_ALLOWED

- type: string

description: >

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |

Represents the store result type.

Possible values are:

- ML_MODEL_FILE_STORED_IN_ADRF: Indicates that the ML model was successfully stored in ADRF.
- ML_MODEL_FILE_ADDRESS_NOT_FOUND: Indicates the failure cause of ML model storage is because the ML model file address was not found.
- ML_MODEL_FILE_DOWNLOAD_FAILED: Indicates the failure cause of ML model storage is because the download of the ML model file failed.
- RETRIEVAL_ML_MODEL_NOT_ALLOWED: Indicates the failure cause of ML model retrieval is because the retrieval of the ML model is not allowed.

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-06	CT3#116e					TS skeleton of Analytics Data Repository Services specification	0.0.0
2021-06	CT3#116e	C3-213501				Inclusion of documents agreed in CT3#116e C3-213537.	0.1.0
2021-08	CT3#117e	C3-214579				Inclusion of documents agreed in CT3#117e C3-214478.	0.2.0
2021-11	CT3#119e	C3-216521				Inclusion of documents agreed in CT3#119e C3-216443, C3-216455, C3-216456, C3-216457, C3-216458, C3-216459, C3-216460, C3-216462, C3-216469, C3-216591, C3-216592, C3-216593.	0.3.0
2022-01	CT3#119bis-e	C3-220454				Inclusion of documents agreed in CT3#119bis-e C3-220500, C3-220512, C3-220513, C3-220440, C3-220441, C3-220369.	0.4.0
2022-02	CT3#120	C3-221516				Inclusion of documents agreed in CT3#120-e C3-221091, C3-221288, C3-221620, C3-221621.	0.5.0
2022-03	CT#95e	CP-220160				Presentation to TSG CT for approval	1.0.0
2022-03	CT#95e	CP-220160				Approved by TSG CT	17.0.0
2022-06	CT#96	CP-221132	0001	1	F	Adding 3XX response handling support for ADRF services	17.1.0
2022-06	CT#96	CP-221136	0002	3	B	Cleanup of Nadr_ DataManagement data model	17.1.0
2022-06	CT#96	CP-221132	0003	1	F	Corrections in the Nadr_ DataManagement data model	17.1.0
2022-06	CT#96	CP-221129	0004		F	Correct the Cardinality of some attributes	17.1.0
2022-06	CT#96	CP-221134	0005	3	B	Support removal of stored analytics and data from ADRF according to Analytics and Data Specification	17.1.0
2022-06	CT#96	CP-221132	0006	1	B	Support carrying Fetch Instructions in Nadr_ DataManagement_RetrievalNotify service operation	17.1.0
2022-06	CT#96	CP-221133	0008	2	F	Formatting of description fields	17.1.0
2022-06	CT#96	CP-221130	0009		F	Responses on DELETE method	17.1.0
2022-06	CT#96	CP-221133	0011	2	F	Clarification on duplicated data or analytics storage	17.1.0
2022-06	CT#96	CP-221131	0012	1	F	Correction on Nadr_ DataManagement_StorageRequest service operation	17.1.0
2022-06	CT#96	CP-221133	0014		F	Removal of repetitive description in HTTP error response	17.1.0
2022-06	CT#96	CP-221135	0016	1	F	Update inputs of Nadr_ DataManagement_RetrievalNotify service	17.1.0
2022-06	CT#96	CP-221134	0017		F	corrections to Abbreviations and Introduction	17.1.0
2022-06	CT#96	CP-221134	0018		F	correction to time period	17.1.0
2022-06	CT#96	CP-221155	0019	1	F	Update the apiVersion placeholder	17.1.0
2022-06	CT#96	CP-221152	0020		F	Update of info and externalDocs fields	17.1.0
2022-09	CT#97e	CP-222104	0021	1	F	Update inputs of Nadr_ DataManagement_RetrievalNotify service	17.2.0
2022-09	CT#97e	CP-222103	0022	1	F	Corrections in descriptions of the Nadr_ DataManagement_RetrievalRequest operation	17.2.0
2022-09	CT#97e	CP-222103	0023	1	F	ADRF data retrieval notification data model updates	17.2.0
2022-09	CT#97e	CP-222103	0024	1	F	Adding NRF and NSACF as data sources	17.2.0
2022-09	CT#97e	CP-222121	0027		F	Update of info and externalDocs fields	17.2.0
2022-12	CT#98e	CP-223173	0028	1	F	ADRF Retrieval Request inputs	17.3.0
2022-12	CT#98e	CP-223172	0029		F	ADRF Storage Subscription Request handling inconsistencies	17.3.0
2022-12	CT#98e	CP-223173	0035	1	F	The time stamp of data notification	17.3.0
2022-12	CT#98e	CP-223173	0036	1	F	Miscellaneous corrections	17.3.0
2022-12	CT#98e	CP-223192	0038	1	F	Update the apiVersion in the specification	17.3.0
2022-12	CT#98e	CP-223188	0043		F	Update of info and externalDocs fields	17.3.0
2022-12	CT#98e	CP-223191	0031		F	Adding the mandatory error code 502 Bad Gateway	18.0.0
2022-12	CT#98e	CP-223176	0032	1	F	Removal of non-sense statement for notificationURI	18.0.0
2022-12	CT#98e	CP-223176	0033	1	F	adding Consumer triggered Notification indication for Nadr_ DataManagement_RetrievalSubscribe	18.0.0
2022-12	CT#98e	CP-223176	0034	1	F	Correction of data type of proclnstruct	18.0.0
2022-12	CT#98e	CP-223190	0044		F	Update of info and externalDocs fields	18.0.0
2023-03	CT#99	CP-230149	0045	1	B	Adding Supported Features for data storage and retrieval subscriptions	18.1.0
2023-03	CT#99	CP-230149	0046	1	F	Handling of fetch Instruction	18.1.0
2023-03	CT#99	CP-230162	0048		F	Update of info and externalDocs fields	18.1.0
2023-06	CT#100	CP-231157	0049	1	B	Adding UPF to the possible data sources for analytics	18.2.0
2023-06	CT#100	CP-231132	0050	3	B	OAuth2 scopes in Nadr_ DataManagement API	18.2.0
2023-06	CT#100	CP-231126	0051	1	B	Adding Storage Handling Information in ARDF Data Management requests	18.2.0
2023-06	CT#100	CP-231126	0052	1	B	Sending ADRF Deletion Alerts	18.2.0
2023-06	CT#100	CP-231125	0053		B	Using DataSetTag in ADRF requests	18.2.0
2023-06	CT#100	CP-231126	0054	1	B	Using DataSetTag in ADRF subscriptions	18.2.0
2023-06	CT#100	CP-231132	0055	1	F	Corrections to the redirection mechanism description	18.2.0
2023-06	CT#100	CP-231141	0056		F	Update of info and externalDocs fields	18.2.0

2023-09	CT#101	CP-232081	0057		B	Location Accuracy data sources	18.3.0
2023-09	CT#101	CP-232081	0058		B	Data Synthesis and Compression	18.3.0
2023-09	CT#101	CP-232098	0059	1	F	Editor Note removal for Nadrf_DataManagement API OAuth2 scope.	18.3.0
2023-09	CT#101	CP-232081	0060	1	B	Storage of ML models in ADRF	18.3.0
2023-09	CT#101	CP-232085	0061		F	Update of info and externalDocs fields	18.3.0

2023-12	CT#102	CP-233225	0062	2	B	Update the Nadr_f_MLModelManagement_RetrievalRequest service	18.4.0
2023-12	CT#102	CP-233246	0063	1	B	Support of the storage of user consent	18.4.0
2023-12	CT#102	CP-233224	0064	1	F	Correction to MLModelManagement_Delete service operation	18.4.0
2023-12	CT#102	CP-233224	0065		F	Fixing wrong reference to 29.500	18.4.0
2023-12	CT#102	CP-233225	0067	1	B	Updates to Nadr_f_MLModelManagement_Delete Service Operation	18.4.0
2023-12	CT#102	CP-233225	0068	1	B	Updates to Nadr_f_MLModelManagement API for StorageRequest	18.4.0
2023-12	CT#102	CP-233225	0069	1	F	Updates to Nadr_f_MLModelManagement_RetrievalRequest Service Operation	18.4.0
2023-12	CT#102	CP-233227	0071	1	F	Correction to MLModelManagement_StorageRequest service operation	18.4.0
2023-12	CT#102	CP-233229	0072	1	F	IETF RFC 7540, RFC 7807 obsoleted by RFC 9113 and RFC 9457 respectively	18.4.0
2023-12	CT#102	CP-233237	0073		F	Update of info and externalDocs fields	18.4.0
2024-03	CT#103	CP-240177	0074		B	Clarification for user consent for retrieving data stored in the ADRF	18.5.0
2024-03	CT#103	CP-240161	0075		F	Several corrections in Nadr_f_MLModelManagement API	18.5.0
2024-03	CT#103	CP-240162	0076	1	B	Support for Application errors in Delete and Storage operation	18.5.0
2024-03	CT#103	CP-240161	0077	1	F	Corrections to ADRF APIs	18.5.0
2024-03	CT#103	CP-240167	0078		F	Update of info and externalDocs fields	18.5.0
2024-06	CT#104	CP-241093	0079	2	F	Correction to the OAuth2 scope in Nadr_f_DataManagement API	18.6.0
2024-06	CT#104	CP-241079	0082	1	F	Nadr_f_MLModelManagement service operation description correction	18.6.0
2024-06	CT#104	CP-241079	0083	1	B	Support of ML Models update	18.6.0
2024-06	CT#104	CP-241093	0084		F	Corrections to the 3xx based 3GPP SBI redirection mechanism	18.6.0
2024-06	CT#104	CP-241093	0085		F	Corrections to the support of the HTTP custom headers	18.6.0
2024-06	CT#104	CP-241078	0086		F	Corrections on Nadr_f_MLModelManagement API	18.6.0
2024-06	CT#104	CP-241086	0087		F	Update of info and externalDocs fields	18.6.0
2024-09	CT#105	CP-242119	0088	1	F	Correction to security of Nadr_f_MLModelManagement API	18.7.0
2024-09	CT#105	CP-242119	0093	1	F	Corrections on 204 No Content status code of GET and resource name	18.7.0
2024-09	CT#105	CP-242119	0094		F	Corrections on the attribute name and enumeration in the Nadr_f_MLModelManagement OpenAPI	18.7.0
2024-09	CT#105	CP-242120	0095		F	Update of info and externalDocs fields	18.7.0
2024-09	CT#105	CP-242118	0089	1	F	Completion of Introduction tables	19.0.0
2024-09	CT#105	CP-242124	0090		F	Correction to security of Nadr_f_DataManagement API	19.0.0
2024-09	CT#105	CP-242124	0091		F	Support of feature negotiation at ML Model retrieval from ADRF	19.0.0
2024-09	CT#105	CP-242124	0092		F	ADRF API corrections	19.0.0
2024-09	CT#105	CP-242113	0096		F	Update of info and externalDocs fields	19.0.0
2024-12	CT#106	CP-243088	0097	1	B	Adding allowConsumerList for ML model	19.1.0
2024-12	CT#106	CP-243088	0098		F	Corretion of resource name	19.1.0
2024-12	CT#106	CP-243090	0099		F	Naming misspelling for ADRF Data Management	19.1.0
2024-12	CT#106	CP-243090	0100		F	Naming misspelling for ADRF ML Model Management	19.1.0
2024-12	CT#106	CP-243095	0101	1	B	Adding LMF as LM model training and performance monitoring data source	19.1.0
2024-12	CT#106	CP-243147	0102		F	Update of info and externalDocs fields	19.1.0
2025-03	CT#107	CP-250083	0103	1	B	Adding PCF as data source	19.2.0
2025-03	CT#107	CP-250083	0104	1	B	Adding LMF as consumer of Nadr_f_MLModelManagement_RetrievalRequest service operation	19.2.0
2025-03	CT#107	CP-250130	0107		F	Update of info and externalDocs fields	19.2.0
2025-06	CT#108	CP-251088	0108	1	B	Support of multiple model storage results	19.3.0
2025-06	CT#108	CP-251088	0109	1	B	failure case for ML model update	19.3.0
2025-06	CT#108	CP-251088	0110	1	B	partial failure for ML model retrieval	19.3.0
2025-06	CT#108	CP-251086	0111		B	Enhancements on the consumers of Nadr_f_MLModelManagement Service	19.3.0
2025-06	CT#108	CP-251089	0112	2	F	Enhancement on the ML model Storage service description	19.3.0
2025-06	CT#108	CP-251232	0115		F	Update of info and externalDocs fields	19.3.0
2025-09	CT#109	CP-252114	0117		F	Update of info and externalDocs fields	19.4.0
2025-12	CT#110	CP-253029	0118	1	F	TS reference correction	19.5.0
2025-12	CT#110	CP-253029	0119		F	Corrections to Supported Features	19.5.0
2025-12	CT#110	CP-253065	0122		F	Update of info and externalDocs fields	19.5.0
2026-03	CT#111	CP-260054	0125	1	A	Corrections to Nadr_f_DataManagement API	19.6.0
2026-03	CT#111	CP-260081	0128		F	Update of info and externalDocs fields	19.6.0
2026-06	CT#112	CP-261250	0132		F	Update of info and externalDocs fields	19.7.0

History

Version	Date	Status
V19.4.0	January 2026	Publication
V19.5.0	February 2026	Publication
V19.6.0	March 2026	Publication
V19.7.0	July 2026	Publication