ETSI TS 132 382 V19.0.0 (2025-10)



Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE;

Telecommunication management;
Partial Suspension of Itf-N Integration Reference Point (IRP);
Information Service (IS)
(3GPP TS 32.382 version 19.0.0 Release 19)



Reference RTS/TSGS-0532382vj00 Keywords GSM,LTE,UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the ETSI Search & Browse Standards application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on ETSI deliver repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the Milestones listing.

If you find errors in the present document, please send your comments to the relevant service listed under <u>Committee Support Staff</u>.

If you find a security vulnerability in the present document, please report it through our Coordinated Vulnerability Disclosure (CVD) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025. All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for ETSI members and non-members, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI IPR online database.

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECTTM, **PLUGTESTS**TM, **UMTS**TM and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP**TM, **LTE**TM and **5G**TM logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M**TM logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**[®] and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at 3GPP to ETSI numbering cross-referencing.

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

Contents

Intelle	ectual Property Rights	2
Legal	Notice	2
Moda	l verbs terminology	2
Forew	vord	5
Introd	luction	5
1	Scope	
2	References	
3 3.1	Definitions and abbreviations. Definitions	
3.2	Abbreviations	
4	System overview	8
4.1	System context	8
5	Information Object Classes	9
5.1	Information entities imported and local labels	9
5.2	Class diagram	
5.2.1	Attributes and relationships	9
5.2.2	Inheritance	10
5.3	Information Object Classes definition	10
5.3.1	partialSuspendedOfItfN	
5.3.1.1	1	
5.3.1.2		
5.3.2	partialSuspensionOfItfNIRP	
5.3.2.1		
5.4	Information relationships definition	
5.4.1	relation-partialSuspensionOfItfNIRP-partialSuspensionOfItfN (M)	
5.4.1.1		
5.4.1.2		
5.4.1.3		
5. 1.1.3 5.5	Information attributes definition.	
5.5.1	Definitions and legal values	
	<u> </u>	
6	Interface definition	
6.1	Class diagram representing interfaces	
6.2	Generic rules	12
6.3	partialSuspension Interface (M)	
6.3.1	Operation setPartialSuspensionOfItfN (M)	13
6.3.1.1	Definition	13
6.3.1.2	2 Input parameters	13
6.3.1.3	3 Output parameters	14
6.3.1.4	Pre-condition	14
6.3.1.5		
6.3.1.6		
6.3.2	Operation removePartialSuspensionOfItfN (M)	
6.3.2.1		
6.3.2.2		
6.3.2.3		
6.3.2.4		
6.3.2.5		
6.3.2.6		
6.3.2.0	Operation readActivePartialSuspensionsOfItfN (O)	
o.s.s 6.3.3.1		
6.3.3.1		
	* *	
6.3.3.3	3 Output parameters	10

6.3.3.4			
6.3.3.5			
6.3.3.6	Exceptions		16
6.3.4	Notification notif	ChangeOfPartialSuspensionOfItfN (M)	17
6.3.4.1			
6.3.4.2		ers	
6.3.4.3		ent	
6.3.4.3.1			
6.3.4.3.2	To-state		18
Annex A (ii	nformative):	Change history	19
History			20

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

- 32.381: Partial Suspension of Itf-N Integration Reference Point (IRP); Requirements.
- 32.382: Partial Suspension of Itf-N Integration Reference Point (IRP); Information Service (IS).
- 32.386: Partial Suspension of Itf-N Integration Reference Point (IRP); Solution Set (SS) definitions.

The Itf-N interface is built up by a number of IRPs and a related Name Convention, which realise the functional capabilities over this interface. The basic structure of the IRPs is defined in 3GPP TS 32.101 [1] and 3GPP TS 32.102 [2].

Information of an event is carried in a notification. An IRPAgent (typically an EM or a NE) emits notifications (see 3GPP TS 32.302 [3]. The IRPManager (typically a Network Management System) receives notifications. In certain scenarios floods of unwanted notifications including alarms would be sent to the IRP manager by network object instances. Thereby the interface and the management systems bear unnecessary load. Even worse: the Operator's awareness is drawn away from really urgent events.

1 Scope

The purpose of Partial Suspension of Itf-N IRP is to define an interface through which an IRPManager can suspend the forwarding of notifications via Itf-N which were generated in parts of the managed systems.

The present document is the Information Service of Partial Suspension of Itf-N IRP. It defines, for the purpose of suspending generally the forwarding of notifications, the information observable and controlled by management system's client and it also specifies the semantics of the interactions used to carry this information.

2 References

The following documents contain provisions that, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document in the same Release as the present document.
- Release as the present document.

 [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".

 [2] 3GPP TS 32.102: "Telecommunication management; Architecture".

 [3] 3GPP TS 32.302: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Information Service (IS)".

 [4] 3GPP TS 32.381: "Telecommunication management; Partial Suspension of Itf-N Integration Reference Point (IRP); Requirements".

 [5] 3GPP TS 32.150: "Telecommunication management; Integration Reference Point (IRP) Concept and definitions".
- [6] 3GPP TS 32.622: "Telecommunication management; Configuration Management (CM); Generic network resources Integration Reference Point (IRP); Network Resource Model (NRM)".
- [7] 3GPP TS 32.312: "Telecommunication management; Generic Integration Reference Point (IRP) management; Information Service (IS)".
- [8] 3GPP TS 32.602: "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP); Information Service (SS)".
- [9] 3GPP TS 32.662: "Telecommunication management; Configuration Management (CM); Kernel CM; Information Service (IS)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

IRP: See 3GPP TS 32.101 [1].

IRPAgent: See 3GPP TS 32.102 [2].

IRPManager: See 3GPP TS 32.102 [2].

Suspended notification: See 3GPP TS 32.381 [4].

Itf-N suspended managed instance: See 3GPP TS 32.381 [4].

Partial suspension of Itf-N: See 3GPP TS 32.381 [4].

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CM Configuration Management

EM Element Manager
IOC Information Object Class
IRP Integration Reference Point

IS Information Service (see 3GPP TS 32.101 [1])

Itf-N Interface N

MIB Management Information Base

NE Network Element

4 System overview

4.1 System context

The general definition of the System Context for the present IRP is found in 3GPP TS 32.150 [5], clause 4.7.

In addition, the set of related IRP(s) relevant to the present IRP is shown in figures 4.1-1 and 4.1-2.

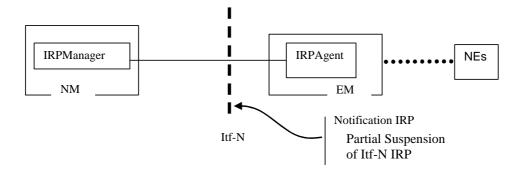


Figure 4.1-1: System Context A




Figure 4.1-2: System Context B

5 Information Object Classes

5.1 Information entities imported and local labels

Label reference	Local label
3GPP TS 32.622 [6], information object class, Top	Тор
3GPP TS 32.312 [7], information object class, managedGenericIRP	managedGenericIRP
3GPP TS 32.622 [6], information object class, IRPAgent	IRPAgent

5.2 Class diagram

5.2.1 Attributes and relationships

This clause depicts the set of IOCs that encapsulate information within the partial suspension of Itf-N IRP. The intent is to identify the information required for the partial suspension of Itf-N IRP implementation of its operations and notification emission. This clause provides the overview of all Information Object Classes in UML. Subsequent clauses provide more detailed specification of various aspects of these information object classes.

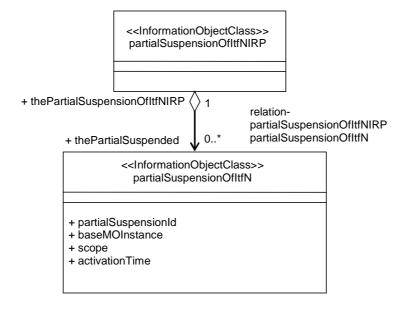


Figure 5.2.1-1: Class Diagram

5.2.2 Inheritance

This clause depicts the inheritance relationships that exist between Information Object Classes.




Figure 5.2.2-1: Inheritance Diagram

5.3 Information Object Classes definition

5.3.1 partialSuspendedOfItfN

5.3.1.1 Definition

This information object represents a partial suspension object instance.

A partialSuspensionOfItfN is fully identified by its distinguished name.

A partialSuspensionOfItfN can represent a group of suspended instances depending on its scope.

It inherits from IOC Top.

5.3.1.2 Attributes

Attribute name	Visibility	Support Qualifier	Read Qualifier	Write Qualifier
partialSuspensionId	+	M	M	-
baseMOInstance	+	0	M	-
scope	+	0	M	-
activationTime	+	0	M	-

5.3.2 partialSuspensionOfItfNIRP

5.3.2.1 Definition

This information object represents a partial suspension of Itf-N IRP. It inherits from IOC managedGenericIRP.

5.4 Information relationships definition

5.4.1 relation-partialSuspensionOfItfNIRP-partialSuspensionOfItfN (M)

5.4.1.1 Definition

This relationship defines the relationship between a partialSuspensionOfItfNIRP and the current partially suspended instances.

5.4.1.2 Roles

Name	Definition	
thePartiallySuspended	This role represents the one who is partially suspended. It can be played by instances	
	of IOC partialSuspensionOfItfN	
thePartialSuspensionOfItfNIRP	This role represents the partial suspension of ltf-N IRP which an IRPManager uses. It	
_	is played by instances of IOC partialSuspensionOfItfNIRP	

5.4.1.3 Constraints

None

5.5 Information attributes definition

This clause defines the semantics of the Attributes used in Information Object Classes.

5.5.1 Definitions and legal values

Attribute Name	Definition	Legal Values
baseMOInstance	This attribute identifies uniquely a partially suspended base object instance	N/A
scope	This attribute indicates the managed object scope of the partial suspension.	N/A
partialSuspensionId	This attribute identifies uniquely a partial suspension requested by an IRPManager	N/A
activationTime	This attribute identifies the time from which onwards the partial suspension shall be	N/A
	active.	

6 Interface definition

6.1 Class diagram representing interfaces




Figure 6.1-1: Class Diagram for AlarmIRPOperation_6 Interface

6.2 Generic rules

- **Rule 1:** Each operation with at least one input parameter supports a pre-condition valid_input_parameter which indicates that all input parameters shall be valid with regards to their information type. Additionally, each such operation supports an exception operation_failed_invalid_input_parameter which is raised when pre-condition valid_input_parameter is false. The exception has the same entry and exit state.
- Rule 2: Each operation with at least one optional input parameter supports a set of pre-conditions supported_optional_input_parameter_xxx where "xxx" is the name of the optional input parameter and the pre-condition indicates that the operation supports the named optional input parameter. Additionally, each such operation supports an exception operation_failed_unsupported_optional_input_parameter_xxx which is raised when (a) the pre-condition supported_optional_input_parameter_xxx is false and (b) the named optional input parameter is carrying information. The exception has the same entry and exit state.
- **Rule 3:** Each operation shall support a generic exception operation_failed_internal_problem which is raised when an internal problem occurs and that the operation cannot be completed. The exception has the same entry and exit state.

6.3 partialSuspension Interface (M)

This interface defines methods for the IRPManager to request from the IRPAgent to generally suspend the forwarding of notifications via the Itf-N for a scope of managed object instances and all other notifications not related to managed NRM IOC instances. For the definition of partial suspension see the requirements document 3GPP TS 32.381 [4].

6.3.1 Operation setPartialSuspensionOfItfN (M)

6.3.1.1 Definition

This operation allows an IRPManager to suspend the forwarding via Itf-N of notifications generated by scoped managed object instances and all other notifications not related to managed NRM IOC instances.

It is the IRPAgent's decision whether or not the suspended notifications are logged, whether or not they go into the AlarmList.

The IRPAgent may apply a time delay before activation of the partial suspension and inform about it in the optional output parameter activationTime of this operation and notification notifyChangeOfPartialSuspensionOfItfN (this allows intervention of other IRPManagers in multi-manager scenarios).

6.3.1.2 Input parameters

Parameter Name	Qualifier	Information type	Comment
managerReference	M	See 3GPP TS 32.302 [3]	
baseMOInstance	0		If this parameter is not present, then all instances under the control of the IRPAgent are suspended.
scope	CM	See 3GPP TS 32.662 [9]	Condition: baseMOInstance is present

6.3.1.3 Output parameters

Parameter Name	Qualifie	Matching Information	Comment
partialSuspensionId	CM	INTEGER	Condition: status==Success. It uniquely identifies the new suspension in the IRPAgent.
conflictingPartialSuspensio nList	СМ	LIST OF PartialSuspension STRUCT (partialSuspensionId, [partialSuspensionParameterLis t] LIST OF partialSuspensionParameter STRUCT ([baseObjectInstance, scope,] [activationTime]))	Condition: failure reason is AtLeastOneInstanceAlready- Suspended. It contains the corresponding partialSuspensionId of instances which are already suspended. [] signifies optional parts of the output parameter. activationTime can be omitted if it is has already expired or if it was not used. partialSuspensionParameterList is absent if no scoping was applied at activationTime is not present, i.e. the list would be empty.
activationTime	0	GeneralizedTime	This is the IRPAgent's time, when this partial suspension will become active.
status	М	ENUM (Success, Failure)	Failure reasons are: AtLeastOneInstanceAlreadySuspende d, TooBusy and other unspecified reasons.

6.3.1.4 Pre-condition

 $base MOIn stance Exists\ AND\ instances Not Yet Suspended$

Assertion Name	Definition
baseMOInstance Exists	The specified baseMOInstance does exist.
instancesNotYet- Suspended	None of the scoped instances is already suspended.

6.3.1.5 Post-condition

partial Suspension Is Applied

Assertion Name	Definition
partialSuspensionIsApplied	The requested partial suspension of Itf-N is applied by the IRPAgent.

6.3.1.6 Exceptions

Name	Properties		
operation_failed	Condition: the pre-condition is false or the post-condition is false.		
	Returned Information: The output parameter status.		
	Exit state: Entry state.		

6.3.2 Operation removePartialSuspensionOfItfN (M)

6.3.2.1 Definition

This operation allows any IRPManager to remove a previously defined partial suspension of Itf-N.

6.3.2.2 Input parameters

Parameter Name	Qualifier	Information type	Comment
managerReference	M	See 3GPP TS 32.302 [3]	See 3GPP TS 32.302 [3]
partialSuspensionId	М	See clause 6.3.1.3	= output of an earlier setPartialSuspensionOfItfN
			operation

6.3.2.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
status	M	ENUM (Success, Failure)	

6.3.2.4 Pre-condition

partialSuspensionIdExists

Assertion Name	Definition
partialSuspensionIdExists	The specified suspension does exist in the IRPAgent.

6.3.2.5 Post-condition

partial Suspension Is Removed

Assertion Name	Definition
partialSuspensionIsRemoved	The specified partial suspension is not applied anymore.

6.3.2.6 Exceptions

Name	Properties
operation_failed	Condition: the pre-condition is false or the post-condition is false.
	Returned Information: The output parameter status.
	Exit state: Entry state.

6.3.3 Operation readActivePartialSuspensionsOfItfN (O)

6.3.3.1 Definition

This operation allows an IRPManager to determine which partial suspensions are active in the IRPAgent, independently of the IRPManagers which requested the suspensions.

6.3.3.2 Input parameters

None.

6.3.3.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
activePartialSuspension- List		LIST OF PartialSuspension STRUCT (partialSuspensionId, [partialSuspensionParameterList] LIST OF partialSuspensionParameter STRUCT (baseObjectInstance, scope, [activationTime]))	If the IRPAgent does not detect an active suspension, then status==Success and activePartialSuspensionList is empty. A partial suspension whose activationTime is not yet reached shall also be in this activePartialSuspensionList. Condition: Present if and only if status==Success activationTime can be omitted if it is has already expired or if it was not used. partialSuspensionParameterList is absent if no scoping was applied at activationTime is not present, i.e. the list would be empty.
status	M	ENUM (Success, Failure)	

6.3.3.4 Pre-condition

at Least One Partial Suspension Is Active

Assertion Name	Definition
atLeastOnePartialSuspensionIsActive	There is at least one suspension in the IRPAgent.

6.3.3.5 Post-condition

all Active Partial Suspensions Are Delivered

Assertion Name	Definition	
allActivePartialSuspensionsAreDelivered	All partial suspensions which are active are listed in the output.	

6.3.3.6 Exceptions

Name	Properties
operation_failed	Condition: the pre-condition is false or the post-condition is false.
	Returned Information: The output parameter status.
	Exit state: Entry state.

6.3.4 Notification notifyChangeOfPartialSuspensionOfItfN (M)

6.3.4.1 Definition

This notification is sent:

- after the IRPAgent has successfully performed a setPartialSuspensionOfItfN request and possibly (if this is supported) before the activationTime of this partial suspension;
- after the IRPAgent has successfully performed a removePartialSuspensionOfItfN request.

IRPManagers should be aware that the IRPAgent can not deliver reliable results for some operations while partial suspension is active. Therefore the IRPManager should not use such operations, e.g. CM and FM or TM etc. operations in the scoped branch of the MIB, which is suspended.

This notification can also be sent to an IRPManager who nevertheless requested an operation for an instance whose notification forwarding is suspended.

6.3.4.2 Input Parameters

Parameter Name	Qualifier	Matching Information	Comment
objectClass	M, Y		Notification header - see 3GPP TS 32.302 [3]: it
			shall carry the PartialSuspensionOfltfNIRP class name
objectInstance	M, Y		Notification header - see 3GPP TS 32.302 [3]: it shall carry the DN of the PartialSuspensionOfItfNIRP instance.
notificationId	M, N		Notification header - see 3GPP TS 32.302 [3]
eventTime	M, Y		Notification header - see 3GPP TS 32.302 [3]
notificationType	M, Y	"notifyPartialSuspensionOfItfN"	Notification header - see 3GPP TS 32.302 [3]
systemDN	C, Y	IRPAgent.systemDN.	Notification header - see 3GPP TS 32.302 [3]
typeOfChange	M, Y	ENUM(SetPartialSuspension, RemovePartialSuspension)	
partialSuspensionId	M, Y	partialSuspensionIRP.partialSuspensionId	See clause 6.3.1.3
managerReference	M, Y	partialSuspensionIRP.managerReference	See clause 6.3.1.2
baseMOInstance	CO, Y	partialSuspensionIRP.baseMOInstance, see clause 6.3.1.2	Condition: scoping was used at activation of this partial suspension
scope	CM, Y	partialSuspensionIRP.scope, see clause 6.3.1.2	Condition: scoping was used at activation of this partial suspension
activationTime	CO, N	Same type as eventTime	Condition: typeOfChange== SetPartialSuspension

6.3.4.3 Triggering Event

6.3.4.3.1 From-state

aPartialSuspensionWasSetOrRemoved

Assertion Name	Definition		
aPartialSuspensionWasSetOrRemoved	The IRPAgent has successfully set or removed a partial suspension.		

6.3.4.3.2 To-state

 $\verb|subcribedManagersInformedAboutChangeInSuspension| \\$

Assertion Name	Definition
_	All subscribed IRPManagers are informed about the change in the suspension.
AboutSuspension	

Annex A (informative): Change history

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Cat	Old	New
Jun 2006	SA_32	SP- 060255			Submitted to SA#32 for Information		1.0.0	
Jun 2006					History box clean-up		1.0.0	1.0.1
Mar 2007	SA_35	SP- 070059			Submitted to SA#35 for Approval		2.0.0	7.0.0
Jun 2008	SA_40	SP- 080328	0001		Correct operation name	F	7.0.0	7.1.0
Dec 2008	SA_42				Upgrade to Release 8		7.1.0	8.0.0
Dec 2009	-	-	-	-	Update to Rel-9 version (MCC)		8.0.0	9.0.0
2011-03	-	-	-	-	Update to Rel-10 version (MCC)	-	9.0.0	10.0.0
2012-09	-	-	-	-	Update to Rel-11 version (MCC)		10.0.0	11.0.0
2014-10	-	-	-	-	Update to Rel-12 version (MCC)		11.0.0	12.0.0
2016-01	-	-	-	-	Update to Rel-13 version (MCC)		12.0.0	13.0.0
2017-03	SA#75	-	-	-	Promotion to Release 14 without technical change		13.0.0	14.0.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2018-06						Update to Rel-15 version (MCC)	15.0.0
2020-07	-	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0
2022-04	-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0
2024-04	-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0
2025-09	SA#109	-	-	-	-	Update to Rel-19 version (MCC)	19.0.0

History

Document history							
V19.0.0	October 2025	Publication					