

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Short Range Devices (SRD);
Radio equipment in the frequency range
9 kHz to 25 MHz and inductive loop systems
in the frequency range 9 kHz to 30 MHz;
Part 2: Harmonized EN under article 3.2
of the R&TTE Directive**



Reference

REN/ERM-RP08-0405-2

Keywords

radio, regulation, SRD, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword	4
Introduction	5
1 Scope	7
2 References	8
3 Definitions, symbols and abbreviations	8
3.1 Definitions	8
3.2 Symbols	8
3.3 Abbreviations	8
4 Technical requirements specifications	9
4.1 Transmitter requirements	9
4.1.1 Radiated field strength or power	9
4.1.1.1 Radiated H-field	9
4.1.1.2 RF carrier current	9
4.1.1.3 Radiated E-field	9
4.1.2 Permitted range of operating frequencies	9
4.1.2 a Spurious emissions	9
4.1.2.1 Conducted spurious emissions below 30 MHz	9
4.1.2.2 Conducted spurious emissions above 30 MHz	9
4.1.2.3 Radiated spurious emissions below 30 MHz	9
4.1.2.4 Radiated spurious power above 30 MHz	9
4.1.3 Duty cycle	10
4.2 Receiver requirements	10
4.2.1 Adjacent channel selectivity - in band	10
4.2.2 Blocking or desensitization	10
4.2.3 Receiver spurious radiations	10
4.2.3.1 Radiated emissions below 30 MHz	10
4.2.3.2 Radiated emissions above 30 MHz	10
5 Testing for compliance with technical requirements	10
5.1 Essential radio test suites	10
5.1.2 Normal and extreme test-conditions	10
5.1.3 Test power source	10
5.1.3a Choice of samples for test suites	11
5.1.4 Transmitter test suites	11
5.1.4.1 Effective radiated H-field, carrier current or radiated power	11
5.1.4.2 Permitted frequency range of the modulation bandwidth	11
5.1.4.3 Spurious emissions	11
5.2 Other test specifications	11
5.2.1 Receiver test suites	12
5.2.2 Spurious radiations	12
6 Interpretation of measurement results	12
History	13

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Vote phase of the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [5] laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC are given in annex A.

The present document is part 2 of a multi-part deliverable covering the Short Range Devices (SRD); Radio equipment in the frequency range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz, as identified below:

Part 1: "Technical characteristics and test methods";

Part 2: "Harmonized EN under article 3.2 of the R&TTE Directive".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive [1]. Each standard is a module in the structure. The modular structure is shown in figure 1.

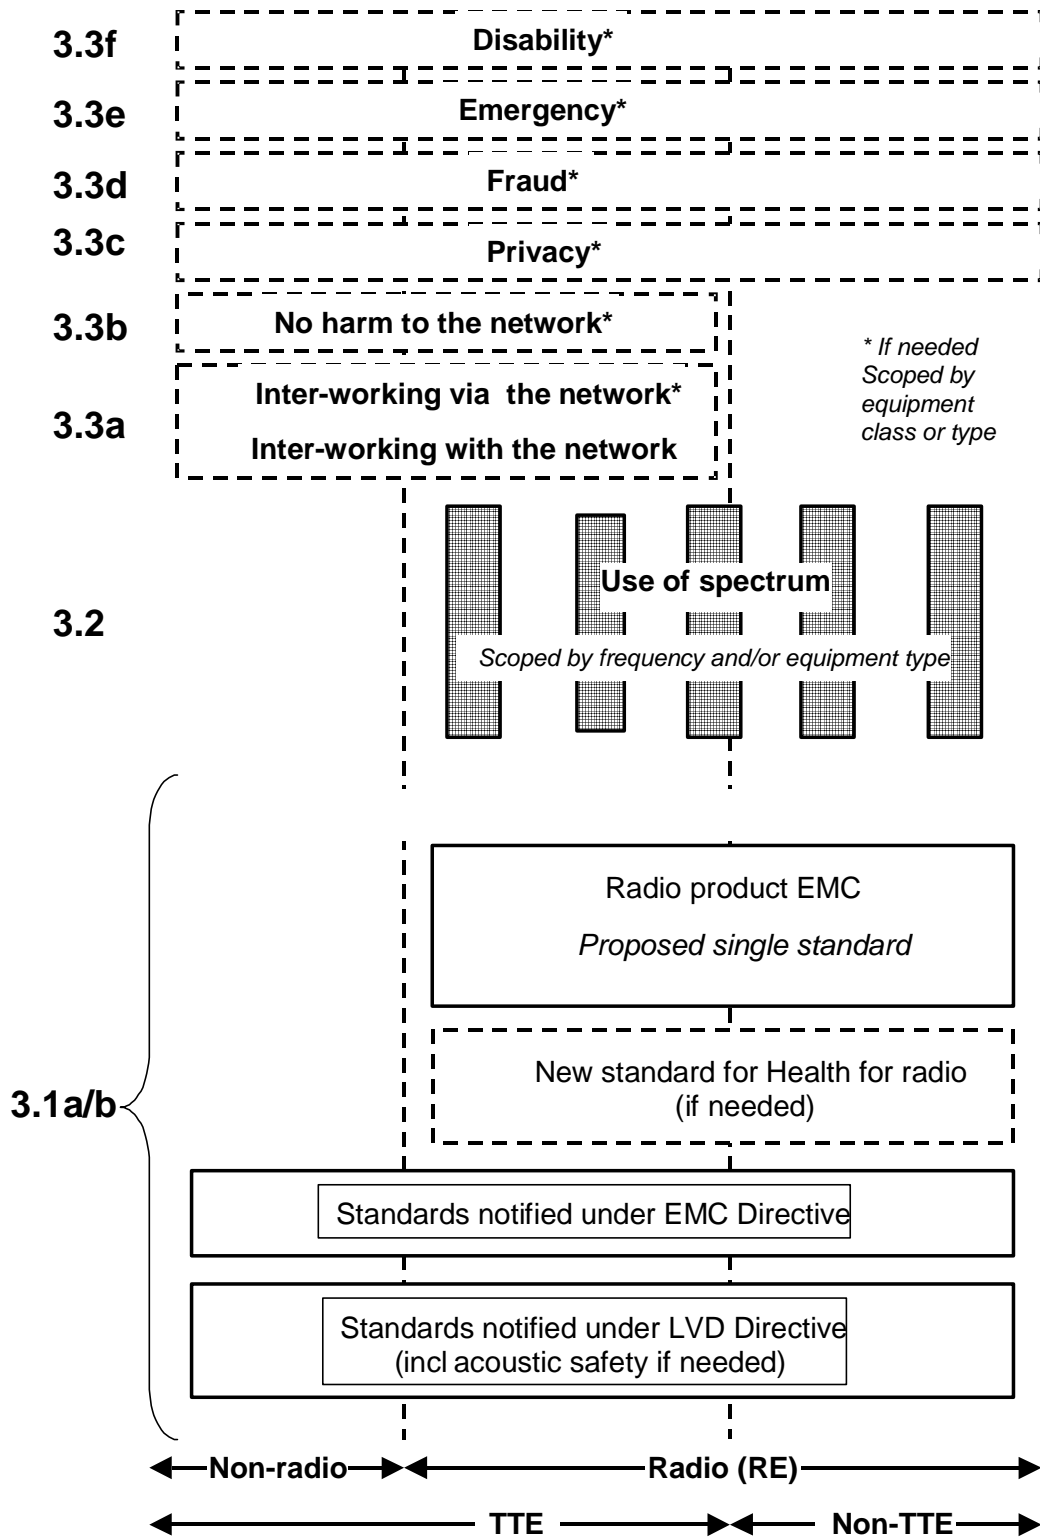


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure shows the different clauses of article 3 of the Directive.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.3 various horizontal boxes are shown. Their dotted lines indicate that essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. The General Standard will always apply to it, and a radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement is adopted by the Commission and if the equipment in question lies within the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the Directive may be covered in just the General Standard or in a set of standards that includes the General Standard.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards under articles 3.2 and 3.3 to be added when new frequency bands are agreed or when the Commission takes decisions under article 3 without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

1 Scope

The present document applies to Short Range Devices (SRDs) transmitters and receivers:

- transmitters operating in the range from 9 kHz to 25 MHz and inductive loop transmitters operating from 9 kHz to 30 MHz;
- receivers operating in the range from 9 kHz to 30 MHz.

The present document applies to SRDs:

- either with a Radio Frequency (RF) output connection and specified antenna, or with an integral antenna;
- for alarms, identification systems, radio-determination, telecommand, telemetry etc. applications;
- for all types of modulation;
- with or without speech.

The present document covers fixed stations, mobile stations and portable stations. If a system includes transponders, these are measured together with the transmitter.

All types of modulation for radio devices are covered by the present document, provided the requirements of clause 4.1.2 is met.

The radio equipment, covered by the classification SRD is divided into several power classes based on maximum radiated field strength or power (see table 1). The power class designation is based on CEPT/ERC Recommendation 70-03 [3] or relevant ERC Decisions.

Table 1: Maximum radiated H-field or power (e.i.r.p)

Power Class	Radiated H-field or power level
1	7 dBμA/m at 10 m
2	42 dBμA/m at 10 m
3	72 dBμA/m at 10 m (at 9 kHz to 30 kHz, descending 3 dB/octave from 30 kHz to 135 kHz)
4	37,7 dBμA/m at 10 m (at 135 kHz, descending 3 dB/octave from 135 kHz to 1 MHz)
	29 dBμA/m at 10 m (at 1,0 MHz descending 9 dB/oct from 1 MHz to 4,642 MHz)
5	9 dBμA/m at 10 m (4,642 MHz to 30 MHz)

On non-harmonized parameters, national administrations may impose conditions on the type of modulation, frequency, channel/frequency separations, maximum transmitter output power/effective radiated power, duty cycle, equipment marking and the inclusion of an automatic transmitter shut-off facility, as a condition for the issue of an individual or general licence, or as a condition for use under licence exemption.

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the manufacturer. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

The present document is intended to cover the provisions of article 3.2 of Directive 1999/5/EC (R&TTE Directive) [1] article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site: <http://www.newapproach.org/>.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] ETSI EN 300 330-1 (V1.3.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short Range Devices (SRD); Radio equipment in the frequency range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz; Part 1: Technical characteristics and test methods".
- [3] CEPT/ERC Recommendation 70-03 (1997): "Relating to the use of Short Range Devices (SRD)".
- [4] ETSI ETR 028: "Radio Equipment and Systems (RES); Uncertainties in the measurement of mobile radio equipment characteristics".
- [5] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [1], and EN 300 330-1 [2] apply.

3.2 Symbols

For the purposes of the present document, the symbols given in EN 300 330-1 [2] apply.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in EN 300 330-1 [2] apply.

4 Technical requirements specifications

4.1 Transmitter requirements

4.1.1 Radiated field strength or power

4.1.1.1 Radiated H-field

The radiated H-field, as defined in EN 300 330-1 [2], clause 7.2.1.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.2.1.3, table 4.

This requirement applies to transmitters with an integral or dedicated antenna.

4.1.1.2 RF carrier current

The RF carrier current, as defined in EN 300 330-1 [2], clause 7.2.2.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.2.2.3, table 5.

4.1.1.3 Radiated E-field

The radiated E-field, as defined in EN 300 330-1 [2], clause 7.2.3.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.2.3.3.

4.1.2 Permitted range of operating frequencies

The permitted range of operation frequencies, as defined in EN 300 330-1 [2], clause 7.3.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.3.3.

4.1.2 a Spurious emissions

4.1.2.1 Conducted spurious emissions below 30 MHz

The conducted spurious emissions below 30 MHz, as defined in EN 300 330-1 [2], clause 7.4.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.4.2.2.

4.1.2.2 Conducted spurious emissions above 30 MHz

The conducted spurious emissions above 30 MHz, as defined in EN 300 330-1 [2], clause 7.4.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.4.2.4, table 6.

4.1.2.3 Radiated spurious emissions below 30 MHz

The radiated spurious emissions below 30 MHz, as defined in EN 300 330-1 [2], clause 7.4.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.4.3.2, table 7.

This requirement applies to all transmitters.

4.1.2.4 Radiated spurious power above 30 MHz

The radiated spurious emissions above 30 MHz, as defined in EN 300 330-1 [2], clause 7.4.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.4.4.2, table 8.

This requirement applies to all transmitters.

4.1.3 Duty cycle

The duty cycle, as defined in EN 300 330-1 [2], clause 7.5.1, shall not exceed the limits in EN 300 330-1 [2], clause 7.5.3, table 9.

This requirement applies to all transmitters.

4.2 Receiver requirements

4.2.1 Adjacent channel selectivity - in band

The adjacent channel selectivity in-band, as defined in EN 300 330-1 [2], clause 8.1.1, shall not be less than the limits in EN 300 330-1 [2], clause 8.1.3, table 10.

This requirement applies to equipment class 1 receivers, when invoked, as defined in EN 300 330-1 [2], clauses 4.1.1 and 8.1.

4.2.2 Blocking or desensitization

The blocking or desensitization, as defined in EN 300 330-1 [2], clause 8.2.1, shall not be less than the limits in EN 300 330-1 [2], clause 8.2.3, table 11.

This requirement applies to equipment class 1 and equipment class 2 receivers, when invoked, as defined in EN 300 330-1 [2], clause 4.1.1.

4.2.3 Receiver spurious radiations

4.2.3.1 Radiated emissions below 30 MHz

The spurious radiations below 30 MHz, as defined in EN 300 330-1 [2], clause 8.3.1, shall not exceed the limits in EN 300 330-1 [2], clause 8.3.3.1, table 12.

This requirement applies to all receivers.

4.2.3.2 Radiated emissions above 30 MHz

The spurious radiations above 30 MHz, as defined in EN 300 330-1 [2], clause 8.3.1, shall not exceed the limits in EN 300 330-1 [2], clause 8.3.3.2.

5 Testing for compliance with technical requirements

5.1 Essential radio test suites

The test conditions shall be as declared by the manufacturer.

5.1.2 Normal and extreme test-conditions

The test procedures shall be as specified in EN 300 330-1 [2] clauses 5.3, 5.4.1.1 and 5.4.2.

5.1.3 Test power source

The test power source shall meet the requirements of EN 300 330-1 [2], clause 5.2.

5.1.3a Choice of samples for test suites

Measurement shall be performed, according to the present document, on samples of equipment defined in EN 300 330-1 [2], clauses 4.2.1 to 4.2.4.

5.1.4 Transmitter test suites

5.1.4.1 Effective radiated H-field, carrier current or radiated power

Either:

- The test specified in EN 300 330-1 [2], clause 7.2.1.2, shall be carried out.

This test suite applies for class 1 transmitters with an integral or dedicated antenna and class 2 transmitters with a customized antenna.

or

- The test specified in EN 300 330-1 [2], clause 7.2.2.2, shall be carried out.

This test suite applies for class 3 transmitters supplied without antenna.

or

- The test specified in EN 300 330-1 [2], clause 7.2.3.2, shall be carried out.

This test suite applies for class 4 transmitters with an integral or dedicated antenna.

5.1.4.2 Permitted frequency range of the modulation bandwidth:

- The test specified in EN 300 330-1 [2], clause 7.3.2, shall be carried out.

This test suite applies to all transmitters.

5.1.4.3 Spurious emissions

Either:

- The tests specified in EN 300 330-1 [2], clauses 7.4.2.1, 7.4.2.3 and 7.4.4.1, shall be carried out;

or

- The test specified in EN 300 330-1 [2], clauses 7.4.3.1 and 7.4.4.1, shall be carried out.

This test suite applies to all transmitters.

5.2 Other test specifications

The requirements in clause 4.2 have been set on the assumption that the test specifications in table 2 will be used to verify the performance of equipment.

Table 2: Receiver test specifications

Clause	Performance requirement	Clause of EN 300 330-1 [2] containing the test method
4.2.3	Spurious radiations	8.3.2
4.2.1	Adjacent channel selectivity - in band	8.1.2
4.2.3	Blocking or desensitization	8.2.2

5.2.1 Receiver test suites

5.2.2 Spurious radiations

The tests specified in EN 300 330-1 [2], clause 8.3.2, shall be carried out. This test suite applies to all receivers.

6 Interpretation of measurement results

The interpretation of the results recorded in the test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit shall be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be separately included in the test report;
- the value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 3.

Table 3: Measurement uncertainty

RF frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1 dB
Conducted emission of receivers	± 1 dB
Radiated emission of transmitter	± 6 dB
Radiated emission of receiver	± 6 dB
Temperature	± 1 degree
Humidity	± 5 %

For the test methods, according to the present document the uncertainty figures shall be calculated according to the methods described in the ETR 028 [4] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 3 is based on such expansion factors.

The particular expansion factor used for the evaluation of the measurement uncertainty shall be stated.

History

Document history			
V1.1.1	July 2000	Public Enquiry	PE 20001117: 2000-07-19 to 2000-11-17
V1.1.1	April 2001	Vote	V 20010615: 2001-04-16 to 2001-06-15