

ETSI EN 301 126-3-2 V1.1.1 (2001-03)

European Standard (Telecommunications series)

Fixed Radio Systems; Conformance testing; Part 3-2: Point-to-Multipoint antennas - Definitions, general requirements and test procedures



Reference

DEN/TM-04071

Keywords

antenna, DRRS, multipoint, testing, transmission

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

| | |
|---|-----------|
| Intellectual Property Rights | 5 |
| Foreword..... | 5 |
| 1 Scope..... | 6 |
| 2 References..... | 6 |
| 3 Definitions, symbols and abbreviations | 7 |
| 3.1 Definitions | 7 |
| 3.2 Symbols..... | 9 |
| 3.3 Abbreviations..... | 9 |
| 4 Requirements related to antennas conformance test..... | 10 |
| 4.1 General requirements..... | 10 |
| 4.2 Implementation under test (IUT)..... | 11 |
| 5 Supplier's declaration..... | 11 |
| 5.1 General characteristics..... | 11 |
| 5.1.1 Frequency range..... | 11 |
| 5.1.1.1 Frequency Band..... | 11 |
| 5.1.2 Class of antenna RPE..... | 12 |
| 5.1.3 Sector Angle..... | 12 |
| 5.1.4 Gain..... | 12 |
| 5.1.5 Environmental characteristics..... | 12 |
| 5.1.6 Antenna stability..... | 12 |
| 5.1.7 Antenna input connector | 12 |
| 5.1.8 RL/VSWR | 12 |
| 5.1.9 Inter-port isolation | 12 |
| 6 Test procedures for essential requirements | 13 |
| 6.1 Radiation pattern envelope (RPE)..... | 13 |
| 6.2 Antenna gain..... | 14 |
| 6.3 Other antenna characteristics | 16 |
| 6.3.1 Passive intermodulation, VSWR and inter-port isolation..... | 16 |
| Annex A (normative): Supplier's Declaration | 17 |
| A.1 Supplier's Declaration against the Essential Parameters..... | 17 |
| A.2 Supplier's Declaration against the Complementary/Optional Parameters..... | 18 |
| A.2.1 Environmental characteristics | 18 |
| A.2.1.1 Temperature range..... | 18 |
| A.2.1.2 Wind survival | 18 |
| A.2.2 Antenna stability | 18 |
| A.2.3 Antenna input connectors | 18 |
| A.2.4 RL / VSWR..... | 19 |
| A.2.5 Inter-port isolation..... | 19 |
| A.3 Supplementary information (if applicable) | 19 |
| Annex B (normative): Test report..... | 20 |
| B.1 Test results | 20 |
| B.1.1 Summary of tests..... | 20 |
| B.1.2 General information about the tests..... | 20 |
| B.1.3 Test result forms..... | 21 |
| B.1.3.1 Radiation Pattern Envelope (RPE)..... | 21 |
| B.1.3.1.1 Azimuth co-polar radiation patterns | 21 |
| B.1.3.1.2 Azimuth cross-polar radiation patterns..... | 22 |
| B.1.3.1.3 Elevation co-polar radiation patterns | 23 |

| | | |
|---|--|-----------|
| B.1.3.1.4 | Elevation cross-polar radiation patterns | 24 |
| B.1.3.2 | Antenna gain..... | 24 |
| B.1.3.3 | Environmental conditions during the test..... | 24 |
| B.1.4 | Measurement Accuracy | 25 |
| B.1.4.1 | Gain measurement accuracy | 25 |
| B.1.4.2 | Co-polar and cross-polar radiation patterns measurement accuracy | 25 |
| Annex C (informative): Test site description | | 26 |
| C.1 | Test equipment used for tests | 27 |
| C.2 | Supplementary information (if applicable) | 27 |
| Annex D (informative): Bibliography..... | | 28 |
| History | | 29 |

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Environmental Engineering (EE).

The present document defines the type approval testing requirements for the antenna specific parameters, required directly by the relevant radio relay or antenna standard. Harmonized test methods and test report format, for these parameters, are also contained, herein.

In addition to the main body of the present document there are two annexes, namely the Supplier's Declaration (annex A) and the Test Report (annex B). The parameters in the two annexes are according to the main body of the present document.

The present document is part 3-2 of a multi-part deliverable covering the Fixed Radio System; Conformance testing, as identified below:

- Part 1: "Point-to-point equipment - Definitions, general requirements and test procedures";
- Part 2-1: "Point-to-Multipoint equipment; Definitions and general requirements";
- Part 2-2: "Point-to-Multipoint equipment; Test procedures for FDMA systems";
- Part 2-3: "Point-to-Multipoint equipment; Test procedures for TDMA systems";
- Part 2-4: "Point-to-Multipoint equipment; Test procedures for FH-CDMA systems";
- Part 2-5: "Point-to-Multipoint equipment; Test procedures for DS-CDMA systems";
- Part 3-1: "Point-to-Point antennas; Definitions, general requirements and test procedures";
- Part 3-2: "Point-to-Multipoint antennas - Definitions, general requirements and test procedures".**

| National transposition dates | |
|--|------------------|
| Date of adoption of this EN: | 9 March 2001 |
| Date of latest announcement of this EN (doa): | 30 June 2001 |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 31 December 2001 |
| Date of withdrawal of any conflicting National Standard (dow): | 31 December 2001 |

1 Scope

The present document details standardized procedures for conformance testing of antennas for point-to-multipoint radio relay systems [1], [2], and [3] in order to achieve the approval by the Type Approval Authority.

The procedure for dealing with established products is outside the scope of the present document.

Standardized procedures are required in order to fulfil CEPT/ERC/DEC/(97)10 [4] on the mutual recognition, within CEPT, of conformance test of antennas carried out in individual CEPT Countries.

The present document is intended to be applied in conjunction with the individual antenna standards and will enable commonality in the presentation of test results, irrespective of the Suppliers/accredited laboratory carrying out the test.

NOTE: The recent draft Directive by the EEC [97-149 (COD)] and parallel work within CEPT ERC on mutual recognition, proposes that type approval against essential requirements can be carried out at manufacturers' or third party premises. The level of accreditation required needs to be clarified by CEPT.

The conformance tests described in the present document are related to antenna specific parameters required directly by the relevant antenna standards [1], [2], and [3].

The present document applies to both those antennas that are separate and those that are in some manner partially or fully integrated with the outdoor equipment. In all cases, whilst facilitating access to the appropriate antenna port, testing shall preserve the electro-magnetic environment i.e. be representative of the outdoor unit enclosure / electronics used in the typical (manufacturers' recommended) configuration. This need to maintain consistency with the manufacturer's recommended configuration is particularly important for less directional antennas (commonly with less than 25 dBi gain, although this value will depend on the specific ETS/EN parameters for that class, type etc).

It is noted that antennas intended for point-to-point (P-P) use are similarly the subjects of separate standards covering their characteristics and conformance testing [5], [6], and [7]. In some cases, particularly for the higher gains and frequencies, such P-P antennas may be appropriate for P-MP usage at the discretion of the regulatory authority. In such cases the regulatory authority will also define the applicable antenna and conformance-testing standard.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] ETSI EN 301 525 (V1.1.1): "Fixed Radio Systems; Point-to-Multipoint Antennas; Antennas for Point-to-Multipoint fixed radio systems in the 1 GHz to 3 GHz band".
- [2] ETSI EN 302 085 (V1.1.1): "Fixed Radio Systems; Point-to-Multipoint Antennas; Antennas for point-to-multipoint fixed radio systems in the 3 GHz to 11 GHz band".
- [3] ETSI EN 301 215: "Fixed Radio Systems; Point to Multipoint Antennas; Antennas for point-to-multipoint fixed radio systems in the 11 GHz to 60 GHz band".
- [4] CEPT/ERC/DEC/(97)10: "ERC Decision of 30 June 1997 on the mutual recognition of conformity assessment procedures including marking of radio equipment and radio terminal equipment".
- [5] ETSI EN 300 631 (V1.2.1): "Fixed Radio Systems; Point-to-Point Antennas; Antennas for point-to-point fixed radio systems in the 1 GHz to 3 GHz band".
- [6] ETSI EN 300 833 (V1.2.1): "Fixed Radio Systems; Point-to-point Antennas; Antennas for point-to-point fixed radio systems operating in the frequency band 3 GHz to 60 GHz".

- [7] ETSI EN 301 126-3-1 (V1.1.1): "Fixed radio systems; Conformance testing; Part 3-1: Point-to-Point antennas; Definitions, general requirements and test procedures".
- [8] ISO Guide 25, 28: "General requirements for the competence of calibration and testing laboratories and General rules for a model third-party certification system for product".
- [9] EN 45001: "General criteria for the operation of testing laboratories".
- [10] EN 45002: "General criteria for the assessment of testing laboratories".
- [11] ISO 9001 (1994): "Quality systems - Model for quality assurance in design, development, production, installation and servicing".
- [12] IEC 60835-2-2 (1994-05): "Methods of measurement for equipment used in digital microwave transmission systems - Part 2: Measurements on terrestrial radio-relay systems - Section 2: Antenna".
- [13] ISO/IEC 15485 (1997): "Information technology - Data interchange on 120 mm optical disk cartridges using phase change PD format - Capacity: 650 Mbytes per cartridge".
- [14] IEC 60169: "Radio-frequency connectors".
- [15] Council Directive 91/263/EEC of 29 April 1991 on the approximation of the laws of the Member States concerning telecommunications terminal equipment, including the mutual recognition of their conformity.
- [16] Directive 98/13/EC of the European Parliament and of the Council of 12 February 1998 relating to telecommunications terminal equipment and satellite earth station equipment, including the mutual recognition of their conformity.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purpose of the present document, the following terms and definitions apply:

accreditation: Formal recognition that a testing laboratory is competent to carry out specific tests or specific types of test.

accreditation body: Body that conducts and administers a laboratory accreditation system and grants accreditation.

accreditation system: System that has its own rules of procedure and management for carrying out laboratory accreditation.

accredited laboratory: Testing laboratory which accreditation has been granted in accordance with the ISO guides 25 and 28 [8] or EN 45001 [9] and EN 45002 [10].

antennas: That part of the transmitting or receiving system that is designed to radiate and/or receive electromagnetic waves.

approval testing: Approval testing is required for approval of the Implementation Under Test (IUT) by the appropriate authority for regulatory purposes. In this context approval implies that the IUT has met the essential requirements of the ETS/EN against which it has been tested.

complementary requirements: In an ETS/EN all those requirements not part of the essential requirements are complementary requirements.

conformance testing: Conformance testing is the type testing process to verify to what extent the IUT conforms to the ETS/EN.

essential requirements: Basic set of parameters and functions which are necessary to meet any regulatory obligations imposed for radio frequency co-ordination.

full conformance: Full conformance is the status of the IUT when it has successfully passed all the requirements of the conformance testing process and therefore meets all the mandatory requirements of the ETS/EN.

Implementation Under Test: Representative sample of the equipment to be tested.

mandatory requirements: A mandatory requirement is defined as one which the IUT (implementation under test) shall meet. To achieve full conformance all ETS/EN requirements are mandatory.

optional requirements: The term "optional" is used in ETS/EN with two different meanings:

- Optional in the sense that the parameter or function itself is mandatory but there is more than one possible value or configuration which may be chosen (e.g. class of Antenna RPE, frequency band(s), etc.). Once an option is selected it becomes mandatory;
- Optional in the sense that the feature is not mandatory (e.g. antenna input connector etc.). However, once such an option has been implemented it becomes mandatory that it conforms to the requirements of the ETS/EN.

supplier: Organization requesting the approval.

supplier's declaration: Procedure by which a supplier gives written assurance that a parameter or function conforms to the ETS/EN.

type approval authority: National Regulatory/Licensing Authority.

type approval testing: Type approval testing is the process of type testing for approval. A type test is to be carried out successfully in order to achieve approval.

type testing: Type testing is where a representative sample of the equipment is tested. The test result is considered to be applicable and representative for all subsequent units of the same type. Any changes that could potentially affect the three essential requirements shall be notified to the Type Approval Authority.

antenna: That part of the transmitting or receiving system that is designed to transmit or receive electromagnetic radiation.

boresight: The axis of the main beam in a directional antenna.

central station: Base station which communicates each way with many terminal stations and, in many cases, repeater stations.

co-polar pattern: Diagram representing the radiation pattern of a test antenna when the reference antenna is similarly polarized, scaled in dBi or dB relative to the measured antenna gain.

cross-polar pattern: Diagram representing the radiation pattern of a test antenna when the reference antenna is orthogonally polarized, scaled in dBi, or dB relative to the measured antenna gain.

fixed beam: The radiation pattern in use is fixed relative to a defined mechanical reference plane.

gain: Ratio of the radiation intensity in a given direction to the radiation intensity that would be obtained if the power accepted by the antenna were radiated isotropically.

half power beamwidth: Angle, relative to the main beam axis, between the two directions at which the measured co-polar pattern is 3dB below the value on the main beam axis.

inter-port isolation: Ratio in dB of the power level applied to one port of a multi-port antenna to the power level received in any other port of the same antenna as a function of frequency.

isotropic radiator: Hypothetical, lossless antenna having equal radiation intensity in all directions.

input port(s): Flange(s) or connector(s) through which access to the antenna is provided.

main beam axis: Direction for which the radiation intensity is a maximum.

main beam: Radiation lobe containing the direction of maximum radiation.

mechanical tilt: Fixed angular shift in elevation of the antenna main beam axis by a change to the physical mounting.

radiation pattern: Envelope within which the radiation pattern shall fit.

envelope (RPE): Envelope below which the *RADIATION PATTERN* shall fit.

radiation pattern: Diagram relating power flux density at a constant distance from the antenna to the direction relative to the notional antenna main beam axis. Specifically referenced in the present document to the zero degree reference direction.

radome: Cover, of dielectric material, intended for protecting an antenna from the effects of its physical environment.

repeater station: Radio station providing the connection via the air to both the central station and the terminal station(s). The remote station may also provide the interfaces to the subscriber equipment, if applicable.

sector angle: Declared angle of coverage in azimuth of a sectored antenna, defined as 2α in the present document.

terminal station: Remote (out) station which communicates with a central station.

tilt: Fixed, angular shift of the antenna main beam axis (boresight) in the elevation plane by either electrical, electronic or mechanical means.

zero degree: Declared direction as referenced to the antenna.

reference direction: Mechanical characteristics, used as reference for the RPE.

integrated antenna: The antenna is considered to be integral to the product if either the antenna forms a component of the enclosure or the antenna is contained within the overall enclosure of the product.

Some of the definitions do not necessarily correspond precisely to those used in referenced documents from other bodies.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

| | |
|-----------------|---|
| dB _i | decibel relative to an isotropic radiator |
| dB _m | decibel relative to milli-Watt |
| dB | decibel |
| 2α | sector angle, (twice alpha) |
| GHz | Gigahertz |
| MHz | Megahertz |

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|------|-----------------------------|
| CR | Complementary Requirement |
| ER | Essential Requirement |
| Ext | Extreme conditions |
| IUT | Implementation Under Test |
| OR | Optional Requirement |
| Ref | Reference Conditions |
| SD | Supplier's Declaration |
| TR | Test Required |
| RPE | Radiation Pattern Envelope |
| CS | Central Station |
| TS | Terminal Station |
| RL | Return Loss |
| RS | Repeater Station |
| P-MP | Point-to-MultiPoint |
| VSWR | Voltage Standing Wave Ratio |

4 Requirements related to antennas conformance test

P-MP antennas may be designed for Central Station (CS), Repeater Station (RS) or Terminal Station (TS) use, and may be categorized in the corresponding standard by means of Type, Class and Range, as required [1], [2] and [3].

Some P-MP antennas require definition of the antenna zero degree reference, which is defined as the declared direction as referenced to the antenna mechanical characteristics, and this is used as reference for the RPE.

Although the RPE limits for TS and some RS antennas are generally identical for azimuth and elevation, the actual patterns should not be assumed to be symmetric.

4.1 General requirements

In Table 1 the generic clauses and parameters are classified, for conformance test purposes, in terms of the various categories. The table also provides for defining the climatic conditions applicable during testing of the parameters.

Table 1: "Generic requirements" classification

| Function or Parameter Description | Status for conformance | | | Requirement for conformance test | | | Power supply conditions | | Climatic conditions for test | | Limiting values | Test methods | |
|---|------------------------|----|----|----------------------------------|----|---------|-------------------------|-----------|------------------------------|-----------|-----------------|--------------|---|
| | ER | CR | OR | SD (see note 1) | TR | SD + TR | Ref | Ref + Ext | Ref (see note 2) | Ref + Ext | | Clause Ref. | IEC 835 [12] or other references.(see note 3) |
| Frequency range | | X | X | X | | | | | | | | | |
| Frequency band(s) | | X | X | X | | | | | | | | | |
| Class of antenna RPE | | X | X | X | | | | | | | | | |
| Radiation pattern envelope (RPE) | X | | X | | | X | | | X | | X | | IEC 835-2-2 [12] |
| Sector angle (see note 4) (2α) | | X | X | X | | | | | | | | | |
| Antenna gain | X | | X | | | X | | | X | | X | | IEC 835-2-2 [12] |
| Environmental characteristics | | X | X | X | | | | | | | | | |
| Antenna stability | | X | X | X | | | | | | | | | |
| Antenna input connectors | | X | X | X | | | | | | | | | |
| Return loss / VSWR | | X | | X | | | | | | | | | IEC 835-2-2 [12] |
| Inter-port isolation | | X | | X | | | | | | | | | IEC 835-2-2 [12] |

ER = essential requirement SD = supplier's declaration

CR = complementary req. TR = test required

OR = optional req

NOTE 1: SD is intended for proper selection among provided options or for information necessary to carry out the Test.

NOTE 2: The environmental conditions at the time of test would be recorded in the Test Report. This declaration will also guarantee that the essential requirements shall be met for the environmental conditions given in Clause 5.1.5 and Clause 5.1.6.

NOTE 3: Alternative test methods may be agreed prior to testing.

NOTE 4: CS only.

Clear distinction is made between "Essential Requirements (ER)" which require "Approval Testing" for regulatory purpose and "Complementary Requirements" (CR) or Optional Requirements (OR) which fulfil the "Conformance Testing" against the relevant standards.

The Type Approval Authority shall require the Supplier's declaration which encompasses the test report demonstrating essential requirements (radiation pattern and gain), accompanied by evidence of accreditation to an internationally recognized Quality Standard, e.g. at least ISO 9001 [11].

The supplier shall be considered legally responsible for any statement in the declaration.

Annex A contains the Supplier's Declaration template for all the parameters in Table 1. Annex B contains the Test Report template for the essential requirements listed in Table 1.

Test methods adopted should be in general accordance with IEC 835 [12], although suitable alternative test methods may be agreed between the Supplier and the Type Approval Authority prior to testing. A description of the test method is to be included in the test report, including test configuration.

4.2 Implementation under test (IUT)

The IUT presented for Type Approval shall be representative of a production model.

The present document applies to both integrated and non-integrated antennas.

In the case of an antenna separate from the radio equipment, testing shall be conducted at point D (D') in Figure 1.

An appropriate adapter shall be used if required to connect the antenna to the test equipment and the effects of the adapter upon the test results shall be taken into account and declared.

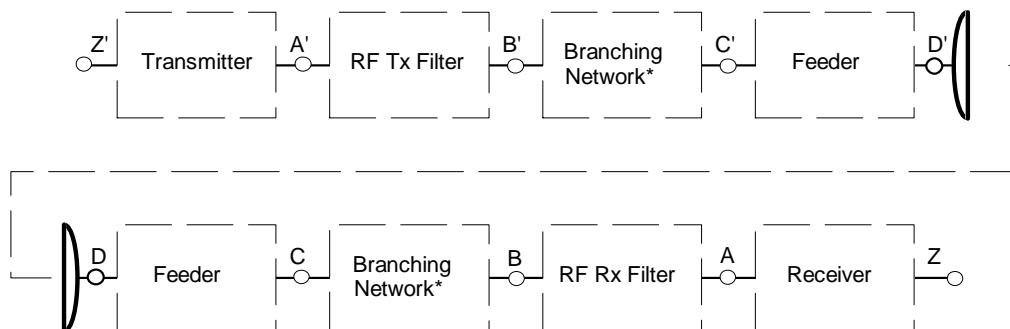


Figure 1: PMP system block diagram

Figure 1 is consistent with that used in many P-MP and P-P equipment standards. However, some P-MP systems use various types of diversity or bistatic / multi-antenna schemes. In all cases the supplier shall identify and define the appropriately accessible antenna ports. In some arrangements (monostatic), receive and transmit functions use the same antenna port.

5 Supplier's declaration

5.1 General characteristics

5.1.1 Frequency range

The frequency range from those quoted in the relevant standard shall be stated.

5.1.1.1 Frequency Band

The operational frequency band of the antenna shall be stated and measurements shall be carried out as a minimum at the lowest, middle and highest frequency of the relevant band.

5.1.2 Class of antenna RPE

The class of antenna RPE from within the declared frequency range of the relevant antenna standard shall be stated.

5.1.3 Sector Angle

For a sectored antenna, the sector angle shall be stated.

5.1.4 Gain

The minimum gain from within the declared frequency range of the relevant antenna standard shall be stated.

Where appropriate the gain category from within the declared frequency range of the relevant antenna standard shall be stated.

5.1.5 Environmental characteristics

The supplier shall declare the temperature range and the wind survival rating of the antenna. Guidance information on antenna environmental characteristics may be found in the relevant antenna standard.

5.1.6 Antenna stability

The supplier shall declare the operational conditions under which the antenna shall remain stable. Guidance information on antenna stability may be found in the relevant antenna standard.

5.1.7 Antenna input connector

The supplier shall declare that the antenna input connector(s) conforms to ISO/IEC 15485 [13], IEC 169 [14] and/or other manufacturers' proprietary connection designs. See also clause A.2 of the corresponding standard, especially for integrated antennas.

5.1.8 RL/VSWR

The supplier shall declare the maximum return loss value and/or the minimum VSWR over the operational frequency band.

The supplier shall declare the configuration used during the test. See also Clause 4.2 of the present document and Clause A.2 of the corresponding standard, especially for integrated antennas.

5.1.9 Inter-port isolation

For antennas with two or more input ports the supplier shall declare the minimum inter-port isolation over the operational frequency band.

6 Test procedures for essential requirements

Where necessary, for better understanding of the application of test methods, reference is made to IEC 835-2-2 [12] (Test methods).

Alternative test methods, among them compact antenna test ranges or near-field scan, may be agreed between the Supplier and the Type Approval Authority prior to testing.

6.1 Radiation pattern envelope (RPE)

Objective:

To verify that the antenna radiation pattern, for the declared class and frequency range, is contained within the limits of the stated RPE from the relevant standard. This covers both azimuth and elevation, as applicable.

Test instruments and set-up:

Figure 2 shows a typical test set-up.

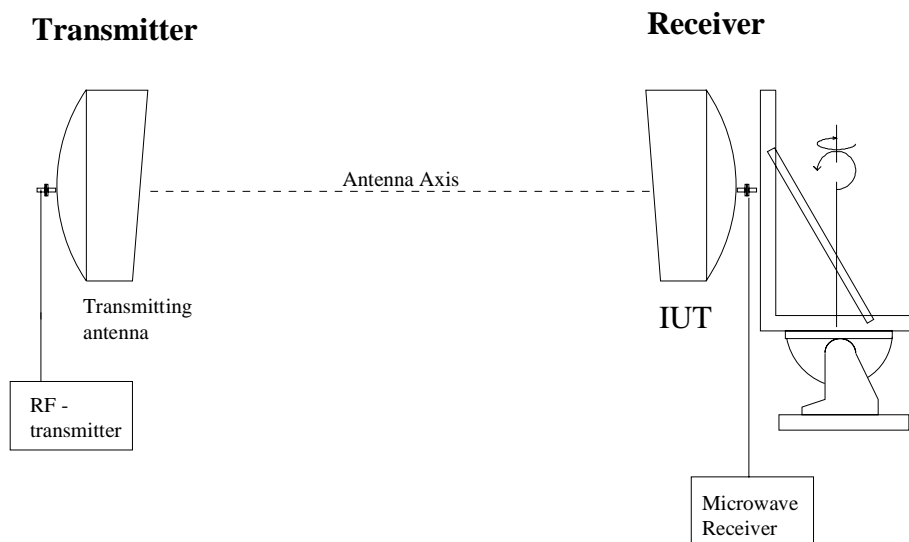


Figure 2: Example of arrangement for the measurement of the radiation pattern

Test procedure:

The test methods described in IEC 835-2-2 [12] are generally applicable. The antenna shall be measured as a minimum at the lowest, middle and highest of the declared frequency band.

The cross-polar radiation patterns shall be recorded after an alignment procedure based on the minimization of the cross-polar level in the frequency band of the antenna. This mechanical setting shall be maintained for all the cross-polar measurements at all frequencies.

Test procedure example (alternative test procedures could be used):

- a) Initial alignments are made at the centre frequency of the declared frequency band.
- b) Adjust the polarization of the IUT to be parallel or perpendicular to the azimuth plane containing the transmission axis.
- c) Align the azimuth and elevation of the transmitting antenna and the IUT for maximum co-polar signal.
- d) Change the polarization of the transmitting antenna to cross-polar.
- e) Adjust the polarization of the transmitting antenna to the minimum cross-polar level.
- f) Change the polarization of the transmitting antenna back to co-polar.

- g) Perform co and cross-polar pattern measurements at the middle frequency of the declared frequency band. In the case of single polarized antenna the alignment has to be repeated for the other polarization.
- h) Repeat the co and cross-polar pattern measurements for the lowest and highest frequency limits in the declared frequency band while maintaining the initial mechanical alignment determined for the middle frequency measurement.

Only in the event of changes to the mechanical settings of the antenna (e.g. changing the measuring plane) shall the initial alignment a) to h) be repeated.

6.2 Antenna gain

Objective:

To verify that the measured gain, for the declared class, category gain and frequency range, satisfies the minimum gain stated in the relevant standard and to use the measured gain to normalize the RPE.

Test instruments and set-up:

Figures 3 and 4 show typical examples of gain measurement test set-ups; in these examples the antenna is taken as having a coaxial or waveguide port respectively.

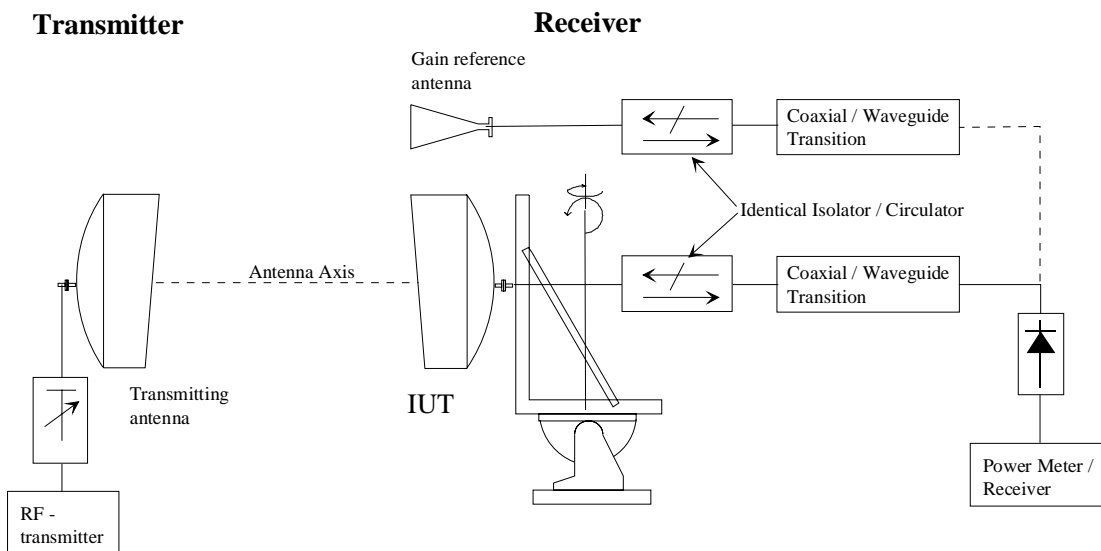


Figure 3a: Test set-up for gain measurement by comparison with a gain reference antenna, using coaxial cables

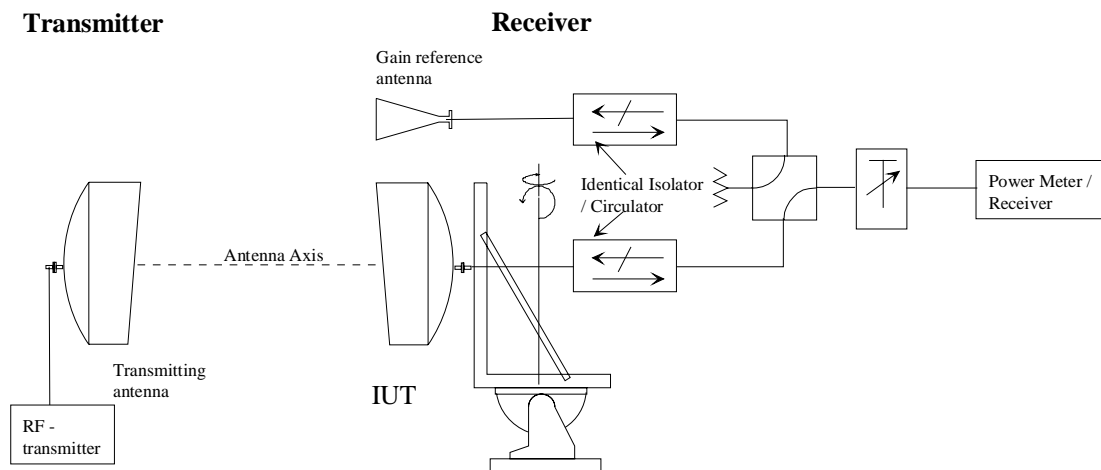


Figure 3b: Test set-up for gain measurement by comparison with a gain reference antenna, using waveguides

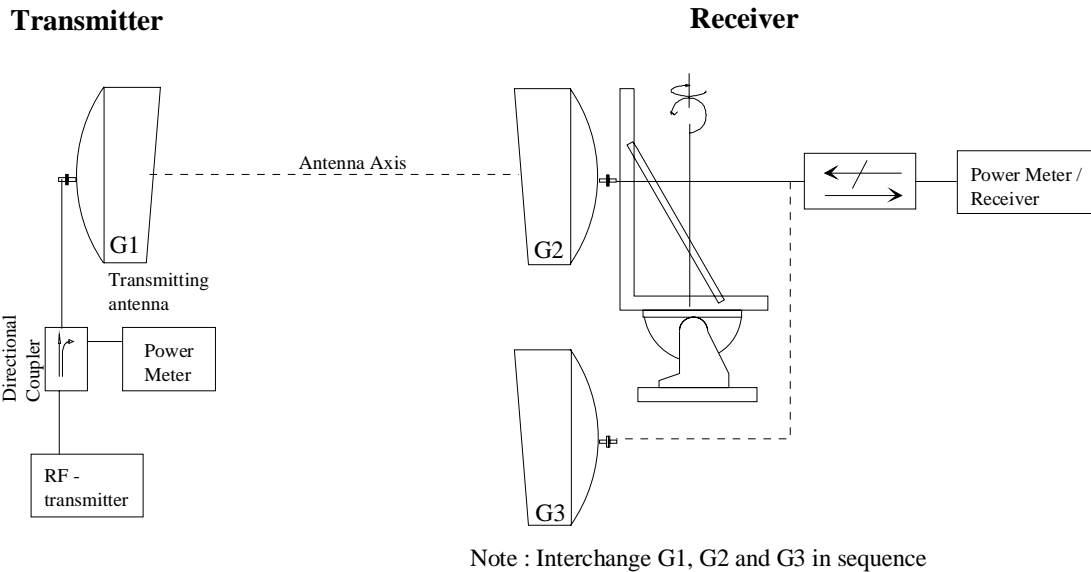


Figure 4a: Test set-up for gain measurement with three-antenna method

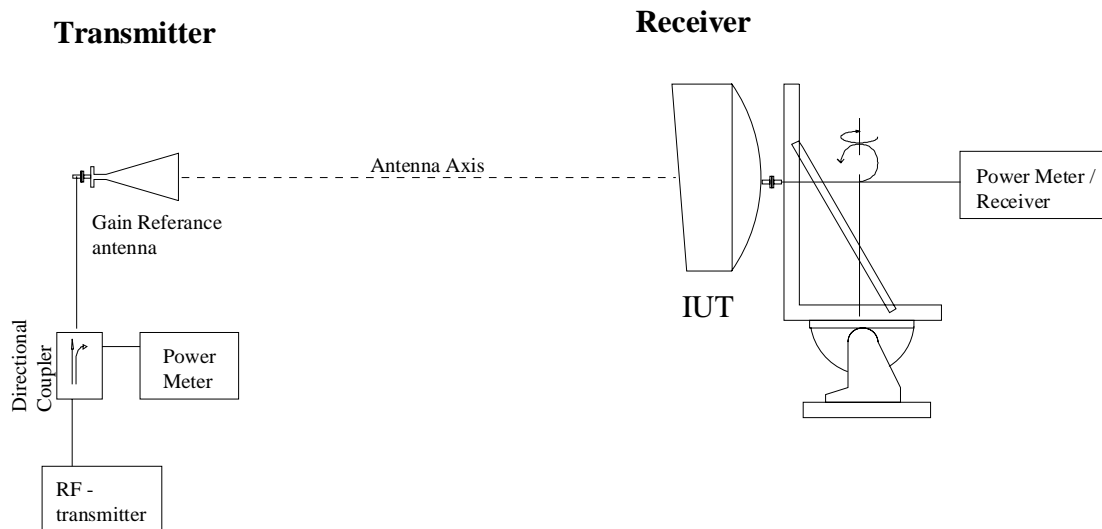


Figure 4b: Test set-up for gain measurement with direct method

Test procedure (alternative test procedures could be used):

The test methods described in IEC 835-2-2 [12] are generally applicable. The antenna gain shall be measured as a minimum at the lowest, middle and highest of the declared frequency band.

The following test procedure is suggested for sectorized antennas, which reflects the technical differences from the highly directional PP and TS antennas:

- a) initial alignments are made at the centre frequency of the declared frequency band. b) adjust the polarization of the IUT to be parallel or perpendicular to the azimuth plane containing the transmission axis;
- b) align the transmitting antenna and the IUT to the defined azimuth and elevation zero degree reference direction;
- c) perform the gain measurement at the centre frequency;
- d) repeat the gain measurements for the lowest and highest frequency while maintaining the mechanical alignment determined for the middle frequency.

The boresight gain can be calculated by normalizing the radiation pattern to the measured gain at the reference direction stated in the standard, as shown in the figures.

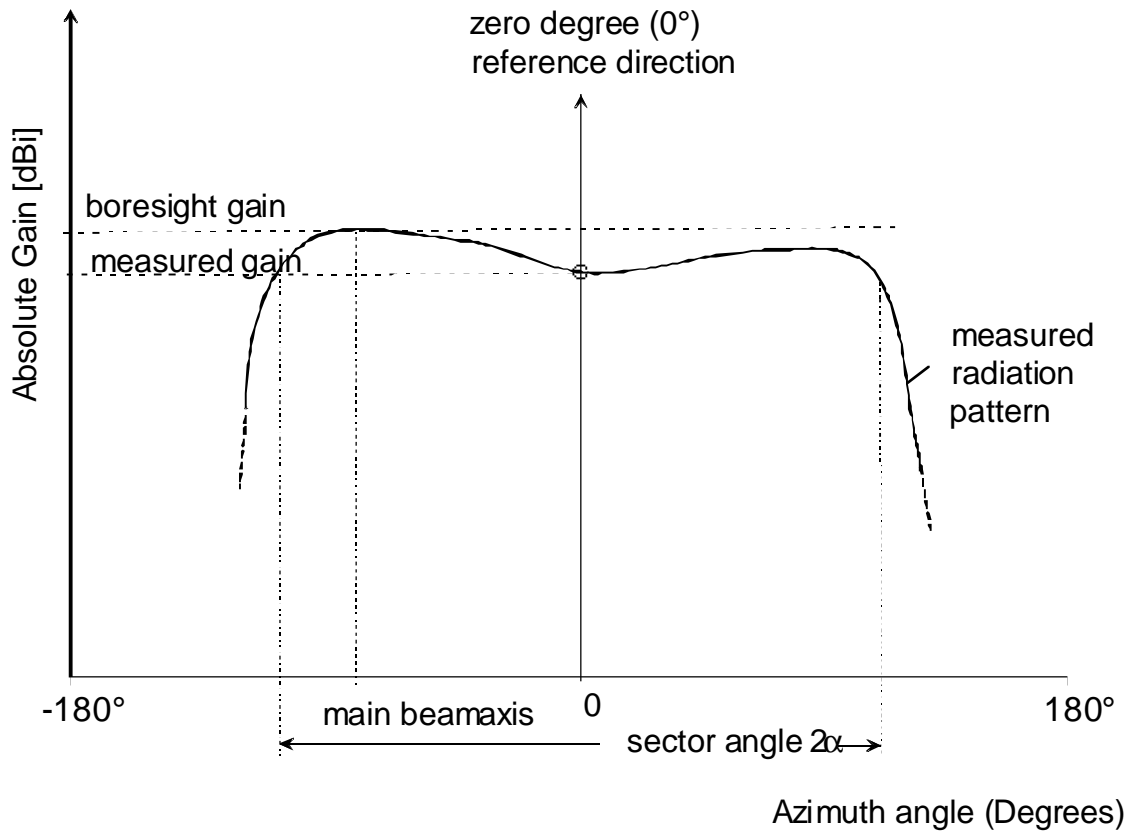


Figure 5: Example of sectored antenna gain measurement

6.3 Other antenna characteristics

6.3.1 Passive intermodulation, VSWR and inter-port isolation

The above parameters are not required by the normative parts of the current antenna standards.

Passive intermodulation is important for some P-MP systems, but there is no standard procedure for this measurement.

Active antennas are specifically not covered in the current standards.

Annex A (normative): Supplier's Declaration

A.1 Supplier's Declaration against the Essential Parameters

The Supplier's Declaration is not complete without the inclusion of the "place and date of issue "and the "name and signature or equivalent marking of authorized person".

Hereby We

.....

(company name)

.....

.....

.....

(company address)

declare under our sole responsibility that the product

.....

(detailed description, including name, type model and frequency band)

is produced under the conditions of a full quality system with the registration number:

.....

(registration number)

and it is in conformity with the following standard(s) (ETS/EN) or other normative document(s):

.....

(ETS/EN number): Frequency range

.....

(Frequency band)

.....

(RPE class)

.....

(Sector angle, if applicable)

.....

(Minimum gain / gain category)

following the provisions of Directives 91/263/EEC and 98/13/EC.

.....

(if applicable) following the provisions ofDirective

A.2 Supplier's Declaration against the Complementary/Optional Parameters

We also declare that the product is in conformance with the following general characteristics. No test data or other evidence is supplied for these parameters in the Conformance Test Report.

A.2.1 Environmental characteristics

A.2.1.1 Temperature range

The antenna has been designed to provide useful performance over the following temperature range:

| | |
|----------------|--|
| -33°C to +40°C | |
| -45°C to +45°C | |
| Other | |

A.2.1.2 Wind survival

One of the following wind survival ratings should be declared for the antenna under test:

| Antenna type | Wind velocity m/s (km/h) | Ice load (density 7 kN/m ³) | |
|--------------|--------------------------|---|--|
| Normal duty | 55 (200) | 25 mm radial ice | |
| Heavy duty | 70 (252) | 25 mm radial ice | |
| Other | | | |

A.2.2 Antenna stability

One of the following stability ratings should be declared for the antenna under test:

| Antenna type | Wind velocity m/s (km/h) | Ice load (density 7 kN/m ³) | |
|--------------|--------------------------|---|--|
| Normal duty | 30 (110) | 25 mm radial ice | |
| Heavy duty | 45 (164) | 25 mm radial ice | |
| Other | | | |

A.2.3 Antenna input connectors

The type of antenna input connector is as follows:

| System Type | Y / N |
|----------------|-------|
| integrated | |
| non-integrated | |

| | |
|---------------------------------------|--|
| Antenna input connector type(specify) | |
| Standard – coaxial - waveguide | |
| Proprietary - coaxial - waveguide | |

A.2.4 RL / VSWR

The RL/VSWR limit is as follows:

| | |
|----------------|--|
| RLMaximum [dB] | |
| VSWR minimum | |

A.2.5 Inter-port isolation

The inter-port isolation limit, if applicable, is as follows:

| | |
|-----------------------------------|--|
| Inter-port isolation minimum [dB] | |
|-----------------------------------|--|

.....
(place and date of issue)

.....
(name and signature or equivalent marking of authorized person)

| | |
|--|--|
| Conformance Test Report reference (insert doc. reference) | |
|--|--|

A.3 Supplementary information (if applicable)

For example (as requested by some regulatory authorities):

.....
(Nominal gain)

(Other)

End of the Supplier's Declaration

Annex B (normative): Test report

B.1 Test results

B.1.1 Summary of tests

| Parameter | C | NC | Reference to remark |
|---|---|----|---------------------|
| Radiation pattern envelope (RPE) | | | |
| Antenna gain | | | |
| C: | The parameter is Compliant with the requirements. | | |
| NC: | The parameter is Not Compliant with the requirements. | | |

B.1.2 General information about the tests

General information about the tests shall be given below.

| | |
|---|--|
| Name of Laboratory carrying out the tests | |
| Test report reference number | |
| Standard applied | |
| Dates of test (from - to) | |
| Name of manufacturer | |
| Antenna Model Type number (s) | |
| Antenna Module Description: | Type and serial number (if applicable) |
| Reflector (if applicable) | |
| Feed horn (if applicable) | |
| Radome (if applicable) | |
| RF connector / flange | |
| Other | |
| | |
| | |
| | |
| | |
| | |
| | |

Brief description of the configuration used under test.

.....


B.1.3 Test result forms

B.1.3.1 Radiation Pattern Envelope (RPE)

B.1.3.1.1 Azimuth co-polar radiation patterns

The co-polar radiation patterns measured as a minimum at the lowest, middle and highest of the declared frequency band shall be provided.

Co-polar radiation pattern

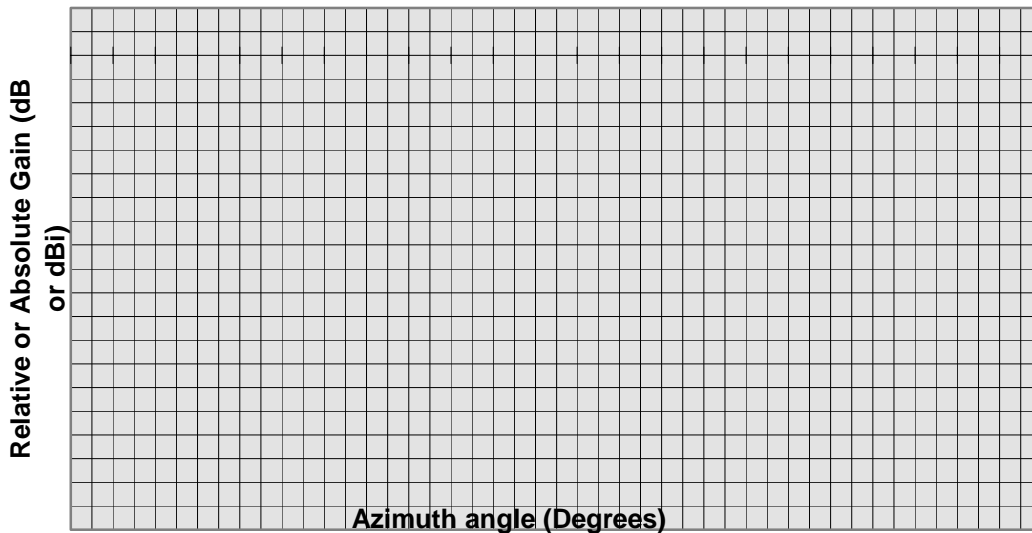

-180°

180°

| | |
|---------------------------|--|
| Antenna model type number | |
| Frequency | |
| Polarization | |

The radiation patterns shall be provided on separate graphs for clarification. The option for overlaying the RPEs, as detailed in the relevant standard, could be adopted.


If necessary for clarification, an appropriate enlarged scale should be used to present the test results.

As a guide the plots should be provided on a minimum of 80 % of A4.

B.1.3.1.2 Azimuth cross-polar radiation patterns

The cross-polar radiation patterns measured as a minimum at the lowest, middle and highest of the declared frequency band shall be provided.

Cross-polar radiation pattern

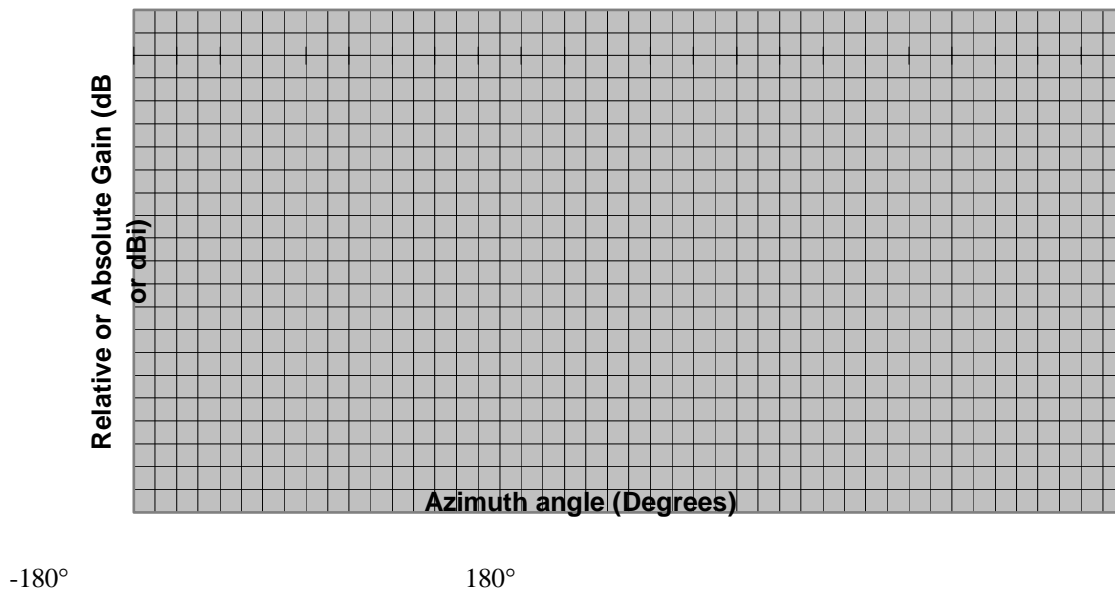

| | |
|---------------------------|--|
| Antenna model type number | |
| Frequency | |
| Polarization | |

The radiation patterns shall be provided on separate graphs for clarification. The option for overlaying the RPEs, as detailed in the relevant standard, could be adopted.


If necessary for clarification an appropriate enlarged scale should be used to present the test results.

As a guide the plots should be provided on a minimum of 80 % of A4.

B.1.3.1.3 Elevation co-polar radiation patterns

The co-polar radiation patterns measured as a minimum at the lowest, middle and highest of the declared frequency band shall be provided.

Co-polar radiation pattern

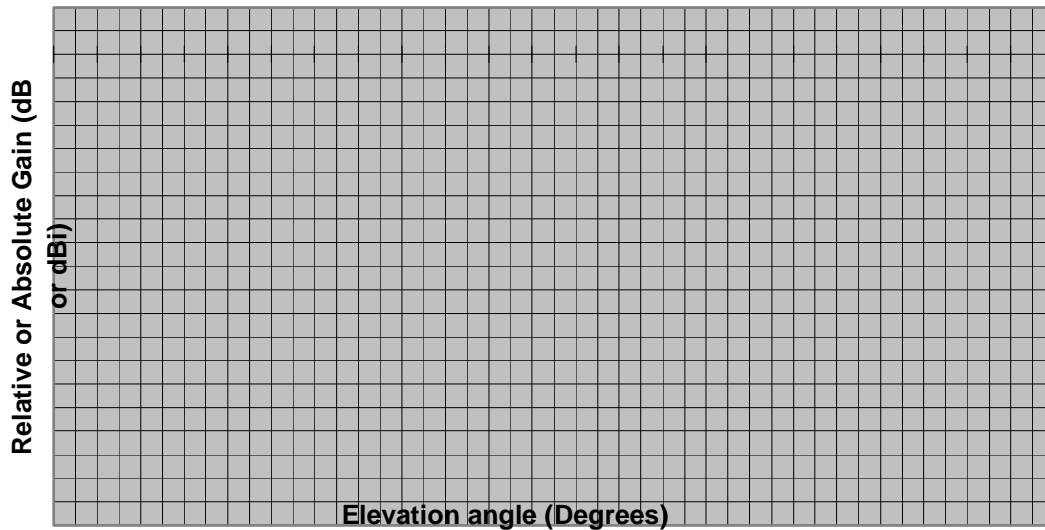

-180°

180°

| | |
|---------------------------|--|
| Antenna model type number | |
| Frequency | |
| Polarization | |

The radiation patterns shall be provided on separate graphs for clarification. The option for overlaying the RPEs, as detailed in the relevant standard, could be adopted.


If necessary for clarification, an appropriate enlarged scale should be used to present the test results.

As a guide the plots should be provided on a minimum of 80 % of A4.

B.1.3.1.4 Elevation cross-polar radiation patterns

The cross-polar radiation patterns measured as a minimum at the lowest, middle and highest of the declared frequency band shall be provided.

Cross-polar radiation pattern

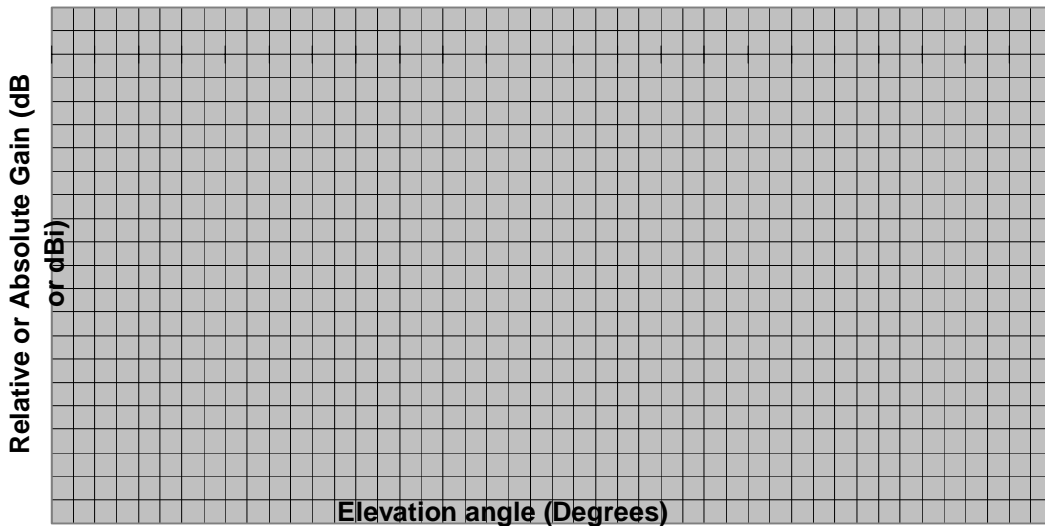

-180°

180°

| | |
|---------------------------|--|
| Antenna model type number | |
| Frequency | |
| Polarization | |

The radiation patterns shall be provided on separate graphs for clarification. The option for overlaying the RPEs, as detailed in the relevant standard, could be adopted.

If necessary for clarification, an appropriate enlarged scale should be used to present the test results.

As a guide the plots should be provided on a minimum of 80 % of A4.

B.1.3.2 Antenna gain

As a minimum the antenna gain shall be recorded for the lowest, middle and highest of (the declared frequency band).

| Frequency [GHz] | Lowest frequency | Middle frequency | Highest frequency |
|--------------------|------------------|------------------|-------------------|
| Antenna gain [dBi] | | | |

In the case of dual polarized antennas a clear indication of the polarization of the input port shall be stated.

The method used in the gain measurement shall be declared.

B.1.3.3 Environmental conditions during the test

The environmental conditions during the test shall be recorded. If the environmental conditions cause the test results to be affected then this is to be stated.

B.1.4 Measurement Accuracy

The radiation pattern measurements must be performed at test sites where attempts are made to suppress the effects of reflected signals from the surroundings and eventual radio interference is controlled [6].

The level of the reflections has to be used in the declaration of the uncertainty of the measurements.

In the event the measurement is significantly affected by reflections or interference, this shall be clearly detailed in the Test Report. The latter may include the level of reflections as determined from special verification(s) undertaken with reference antennas, time gating or other techniques. Guidance material may be found in annex C.

The two parameters to be considered in the measurements of antennas are:

- 1) the amplitude of the received signal (expressed in dB);
- 2) the angular position of the antenna under test, generally referred to the main beam axis.

As guideline, for the calculation of the accuracy, see the document Standard ISO TAG4 (see bibliography).

B.1.4.1 Gain measurement accuracy

Where substitution techniques are used particular attention to the following parameters should be noted.

With respect to the amplitude, the measurement accuracy shall be derived over the complete dynamic range, and in particular the following parameters should be taken into account:

- receiver linearity (between the IUT and the reference antenna measured levels);
- receiver sensitivity;
- reflectivity of the test set-up;
- mismatch between the antennas (IUT and reference one) and the measurement port of the set-up;
- accuracy of the calibration of the reference antenna;
- misalignment of the IUT and reference antenna.

B.1.4.2 Co-polar and cross-polar radiation patterns measurement accuracy

With respect to the amplitude, the measurement accuracy shall be derived over the complete dynamic range and in particular the following parameters should be taken into account:

- receiver linearity;
- receiver sensitivity;
- reflectivity of the test set-up.

In the comparison with the mask of the relevant standard the overall accuracy of the measured radiation pattern shall also include the gain accuracy.

Annex C (informative): Test site description

It may be necessary to provide a sketch of the test site as part of the Test Report, showing possible sources of reflections and terrain details, i.e. side profile and overall view. The critical angles in the test site should be clearly identified to guarantee the accuracy of the measurements.

Example of test site description:

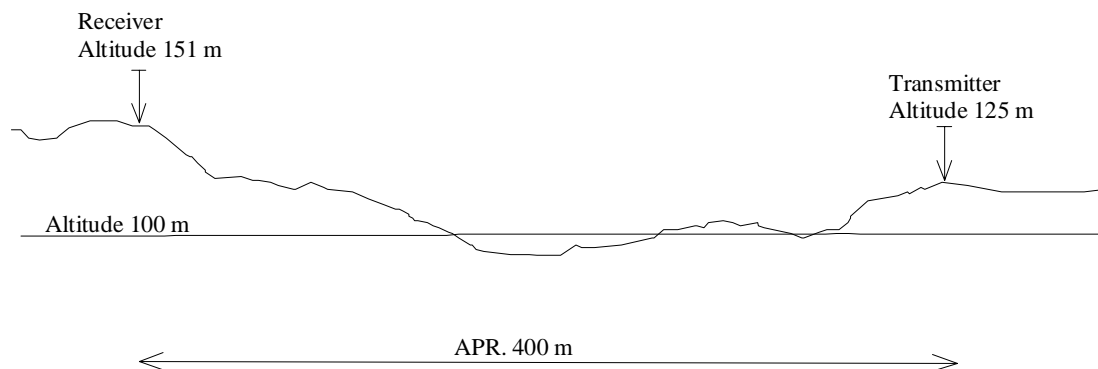


Figure C.1: Terrain profile

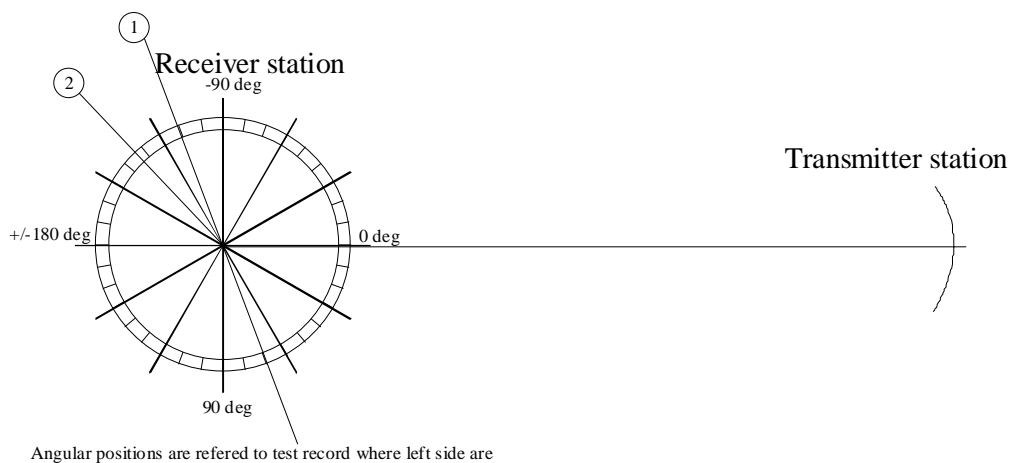


Figure C.2: Typical interference chart with reflections from buildings and structures or radio interferences

Table C.1: Example of table of interference

| No. | Interference type | Interference source | Distance to source | Additional information |
|-----|-------------------|---------------------|--------------------|------------------------|
| 1 | Radio link | | 23 km | |
| 2 | Reflection | Tree | 120 m | |

C.1 Test equipment used for tests

In the following table the test equipment used for the test shall be listed by the test laboratory.

In each separate part of the test report the used test equipment shall be stated. The instruments are then identified by a number which refers to the table below.

| No. | Test equipment | Type | Manufacturer | Reference number | Calibration due day |
|-----|----------------|------|--------------|------------------|---------------------|
| 01 | | | | | |
| 02 | | | | | |
| 03 | | | | | |
| 04 | | | | | |
| 05 | | | | | |
| 06 | | | | | |
| 07 | | | | | |
| 08 | | | | | |
| 09 | | | | | |
| 10 | | | | | |

C.2 Supplementary information (if applicable)

Remarks:

.....

.....

Annex D (informative): Bibliography

- EN 45014 (1989): "General criteria for suppliers declaration of conformity".
- ISO TAG4 WG3 1992: "Guide to the Expression of Uncertainty in measurement".

History

| Document history | | | |
|-------------------------|--------------|----------------|---------------------------------------|
| V1.1.1 | July 2000 | Public Enquiry | PE 20001117: 2000-07-19 to 2000-11-17 |
| V1.1.1 | January 2001 | Vote | V 20010309: 2001-01-08 to 2001-03-09 |
| V1.1.1 | March 2001 | Publication | |
| | | | |
| | | | |