

# ETSI EN 301 744 V1.2.1 (2001-02)

---

*European Standard (Telecommunications series)*

**Fixed Radio Systems;  
Point-to-multipoint equipment;  
Direct Sequence Code Division/  
Time Division Multiple Access (DS-CD/TDMA);  
Point-to-multipoint digital packet radio systems  
in frequency bands in the range 3 GHz to 11 GHz**

---



---

**Reference**

REN/TM-04111-26

---

**Keywords**

CDMA, DRRS, multipoint, TDMA, transmission

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

---

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
editor@etsi.fr

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.  
All rights reserved.

# Contents

Intellectual Property Rights .....	5
Foreword .....	5
Introduction .....	5
1 Scope .....	7
1.1 Applications .....	7
1.2 Frequencies .....	7
1.3 Access method .....	7
1.4 Compatibility .....	7
2 References .....	8
3 Definitions, symbols and abbreviations .....	8
3.1 Definitions .....	8
3.2 Symbols .....	9
3.3 Abbreviations .....	9
4 General system architecture .....	10
4.1 Sub-system types .....	10
4.2 System characteristics .....	11
4.2.1 Transparency .....	11
5 Radio characteristics .....	11
5.1 Frequency bands .....	11
5.2 Channel arrangement .....	11
5.2.1 System loading .....	12
5.3 Transmitter characteristics .....	12
5.3.1 Tx power range .....	12
5.3.1.1 Automatic Transmit Power Control (ATPC) .....	12
5.3.1.2 Remote Transmit Power Control (RTPC) .....	12
5.3.2 Spectrum mask .....	13
5.3.2.1 Spectrum density mask .....	13
5.3.2.2 Discrete CW components exceeding the spectrum mask limit (all stations) .....	13
5.3.3 Transmitter spurious emissions .....	14
5.3.4 Radio frequency tolerance .....	14
5.4 Receiver characteristics .....	15
5.4.1 Dynamic range .....	15
5.4.2 Broadband CW interference rejection capability .....	15
5.4.3 Spurious emissions .....	15
5.4.4 BER performance .....	15
5.4.4.1 Single Signal performance .....	15
5.4.4.2 Loaded BER performance .....	15
5.4.4.3 Maximum system loading .....	15
5.4.5 Interference sensitivity .....	16
5.4.5.1 Co-channel interference sensitivity .....	16
5.4.5.2 First offset channel interference sensitivity .....	16
5.4.5.3 Second offset channel interference sensitivity .....	16
5.4.5.4 Adjacent channel interference sensitivity .....	17
5.5 Antenna port characteristics .....	17
5.5.1 RF interface .....	17
5.5.2 Return loss .....	17
6 Types of subscriber equipment and network router interface .....	17
7 Power supply and environmental characteristics .....	18
7.1 Power supply .....	18
7.2 Environmental conditions .....	18
7.2.1 Equipment within weather-protected locations .....	18

7.2.2	Equipment for non weather-protected locations .....	18
7.3	Electromagnetic compatibility conditions.....	18
<b>Annex A (informative):</b>	<b>Bibliography.....</b>	<b>19</b>
History .....		20

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Transmission and Multiplexing (TM).

<b>National transposition dates</b>	
Date of adoption of this EN:	16 February 2001
Date of latest announcement of this EN (doa):	31 May 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 November 2001
Date of withdrawal of any conflicting National Standard (dow):	30 November 2001

---

## Introduction

The main field of application of Point-to-Multipoint (P-MP) Systems is to provide access to both public and private networks (PSTN, PDN, ...). By means of P-MP systems the network service area may be extended to cover both distant and scattered subscriber locations; and the systems may be applied to build new access networks covering both urban and rural areas.

Subscribers are offered the full range of services by the particular public or private network. Subscribers have access to these services by means of a standard data port, e.g. Ethernet.

P-MP systems provide standard network interfaces and transparently connect subscribers to the appropriate network node. These systems allow a service to be connected to a number of subscribers ranging from a few users to several thousand, and over a wide range of distances.

Point-to-Multipoint systems are generally configured as Pre-Assigned Multiple Access (PAMA) Systems or as Demand-Assigned Multiple Access (DAMA) Radio Systems.

The essential features of a typical P-MP DAMA Radio Systems are:

- efficient use of the radio spectrum;
- concentration;
- and transparency.

Radio is often the ideal way of obtaining communications at low cost, almost independent of distance and difficult topography. Moreover, a small number of sites is required for these installations, thus facilitating rapid implementation and minimizing maintenance requirements of the systems.

Concentration in a packet radio system means that subscribers can share the radio resource by sequential allocation of time to each subscriber. Slowing of the system performance can be minimized by adaptive time allocation, whereby subscribers with no recent transactions are not polled as frequently as currently active subscribers.

Concentration requires the use of distributed intelligent control which in turn allows many other operation and maintenance functions to be added.

Transparency means that the exchange or router and the subscriber equipment communicate with each other without being aware of the radio link.

---

# 1 Scope

## 1.1 Applications

The present document covers the following typical point-to-multipoint data applications.

- Wide Area Networks;
- Internet data;
- Voice over IP;
- Data.

## 1.2 Frequencies

The present document covers fixed service allocations in the 3 GHz to 11 GHz band. Bands identified by CEPT for P-MP applications between 3 GHz and 11 GHz are:

- 3 410 MHz to 3 600 MHz [5];
- 3 600 MHz to 3 800 MHz [6]; and
- 10,15 GHz to 10,3 GHz paired with 10,5 GHz to 10,65 GHz [7].

## 1.3 Access method

The standard covers DS-CD/TDMA systems.

The dual definition of the access method arises from the particular features of this system, whereby multiple access is available firstly through the code division, which allows multiple carriers within the channel, and then by sequential time allocation to individual users. The multiple carriers are not co-channel, but are offset from each other by up to half the channel spacing, so packet data systems employing DS-CDMA for multiple co-channel bearers are not within the scope of the present document.

## 1.4 Compatibility

There shall be no requirement to operate Central Station (CS) equipment from one manufacturer with Terminal Station (TS) or Repeater Station (RS) equipment from another manufacturer.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] ETSI EN 300 019: "Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment".
- [2] ETSI EN 300 385: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment".
- [3] ETSI ETS 300 132: "Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment".
- [4] ITU-R Radio Regulations Part 1.
- [5] CEPT/ERC/Recommendation 14-03: "Harmonized radio frequency channel arrangements for low and medium capacity systems in the band 3 400 MHz to 3 600 MHz".
- [6] CEPT/ERC/Recommendation 12-08: "Harmonized radio frequency channel arrangements and block allocations for low, medium and high capacity systems in the band 3 600 MHz to 4 200 MHz".
- [7] CEPT/ERC/Recommendation 12-05: "Harmonized radio frequency channel arrangements for digital terrestrial fixed systems operating in the band 10,0 GHz to 10,68 GHz".
- [8] CEPT/ERC/Recommendation 74-01: "Spurious emissions".
- [9] ISO/IEC 8802-3 (1996): "Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications".
- [10] ITU-T Recommendation X.21 (1992): "Interface between Data Terminal Equipment and Data Circuit-terminating Equipment for synchronous operation on public data networks".

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**chip:** unit of modulation used in Direct Sequence Spread Spectrum modulation.

**chip rate:** number of chips per second e.g. Mchip/s.

**chip sequence:** sequence of chips with defined length and chip polarities.

**direct sequence spread spectrum modulation:** form of modulation whereby a combination of data to be transmitted and a fixed code sequence (chip sequence) is used to directly modulate a carrier, e.g. by phase shift keying.

**single DS-CD/TDMA signal:** single traffic channel and any associated signalling and synchronization overhead.

**system loading:** total payload data rate on a single RF channel.



**maximum system loading:** maximum possible payload data rate on a single RF channel.

**offset channel:** radio channel at a frequency other than co-channel but closer than half the adjacent channel spacing.

## 3.2 Symbols

For the purposes of the present document, the following symbols apply:

dB	decibel
dBm	decibels relative to one milliwatt
kbit/s	kilobits per second
Mbit/s	megabits per second

## 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BER	Bit Error Rate
BW	Bandwidth
CCS	Central Controller Station
CRS	Central Radio Station
CS	Central Station
Csmin	minimum practical Channel Separation (for a given radio-frequency channel arrangement)
CW	Continuous Wave
DS-CD/TDMA	Direct Sequence Code Division/Time Division Multiple Access
RF	Radio Frequency
RS	Repeater Station
RSL	Received Signal Level
Rx	Receiver
TE	Terminal Equipment
TS	Terminal Station
Tx	Transmitter

## 4 General system architecture

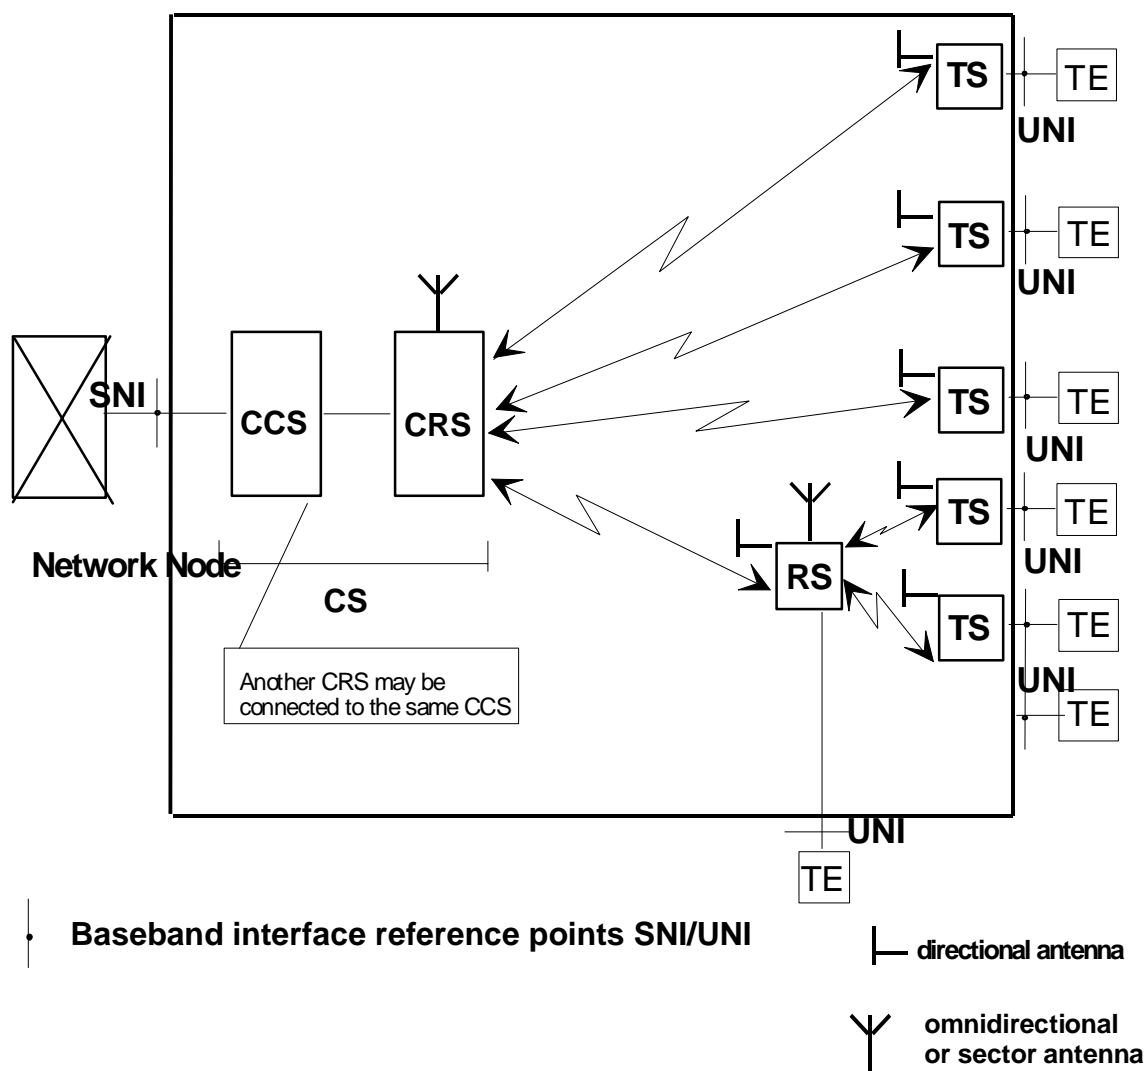


Figure 1: General System Architecture

### 4.1 Sub-system types

CS Central Station which may be subdivided into two units:

CCS: Central Controller Station which provides the interface to the network node;

CRS: Central Radio Station which is the central base station containing at least the radio transceiver equipment providing the interface to the terminal station via the air. Each transceiver is connected to a separate antenna. This is used e.g. if sectored cells are applied to increase the capacity of each cell;

TS: Terminal station which provides the interfaces to the subscriber equipment;

RS: Repeater Station which may also provide the interfaces to the subscriber, if applicable. An RS may serve one or more TSs;

SNI: Service Network Interface;

UNI: User Network Interface;

TE: Terminal (Subscriber) Equipment.

NOTE 1: Central Controller Station (CCS) may control more than one Central Radio Station (CRS).

NOTE 2: A TS may serve more than one TE.

The central station performs the interconnection with the network node (local router or Ethernet switch) carrying out a concentration function by sharing the total number of available channels in the system. The central station is linked by microwave transmission paths to each Terminal Station (TS) either directly or via one or more Repeater Stations (RS).

Whenever an existing digital transmission link is available, the network implementation can be optimized by separating the CCS, installed at the exchange/router site, and the CRS.

The general characteristics which are typical for point-to-multipoint systems are considered in the present document. These characteristics have been categorized under four headings:

1. system characteristics;
2. radio characteristics;
3. types of subscriber equipment and network router interface;
4. power supply and environmental characteristics.

## 4.2 System characteristics

### 4.2.1 Transparency

The system should be fully transparent: the router and the subscriber equipment (points F and G in figure 1) communicate with each other without being aware of the radio link.

## 5 Radio characteristics

### 5.1 Frequency bands

The present document is intended to be generic and does not contain specific frequency plans. It may be applied to fixed service allocations in the range 3 GHz to 11 GHz. Bands identified by CEPT for P-MP applications between 3 GHz and 11 GHz are:

- 3 410 MHz to 3 600 MHz [5];
- 3 600 MHz to 3 800 MHz [6]; and
- 10,15 GHz to 10,3 GHz paired with 10,5 GHz to 10,65 GHz [7].

National Authorities may allocate specific bands for P-MP systems on a national / geographic basis.

### 5.2 Channel arrangement

In DS-CD/TDMA systems the required channel spacing is determined by the chip rate as well as the data rate. The following channel spacings have currently been identified (see table 1). Future developments may require different channel spacings.

**Table 1: Channel spacing**

Channel Spacing (MHz)	24,0		
-----------------------	------	--	--

Further channel spacings are available by scaling proportionally all channel-related parameters in the present document.

## 5.2.1 System loading

Due to particular features of the polling system used to access users, there is no limit to system loading. In practice, operational requirements will determine the maximum acceptable system loading.

## 5.3 Transmitter characteristics

### 5.3.1 Tx power range

Maximum averaged output power shall not exceed 43 dBm (27 dBm in the band 10,6 GHz to 10,65 GHz [4]) at point C' of the RF block diagram (see figure 2). For channel spacings of 10 MHz or greater, in the bands below 10,6 GHz the maximum averaged output power shall not exceed 46 dBm.

An internal or external means of adjustment shall be provided.

The transmitted output power means the value measured where the output is connected to a dummy load, e.g. power meter or spectrum analyser. The transmitter is modulated with a test data signal to simulate traffic.

NOTE: Points B & C and B' & C' will coincide if branching networks are not used.

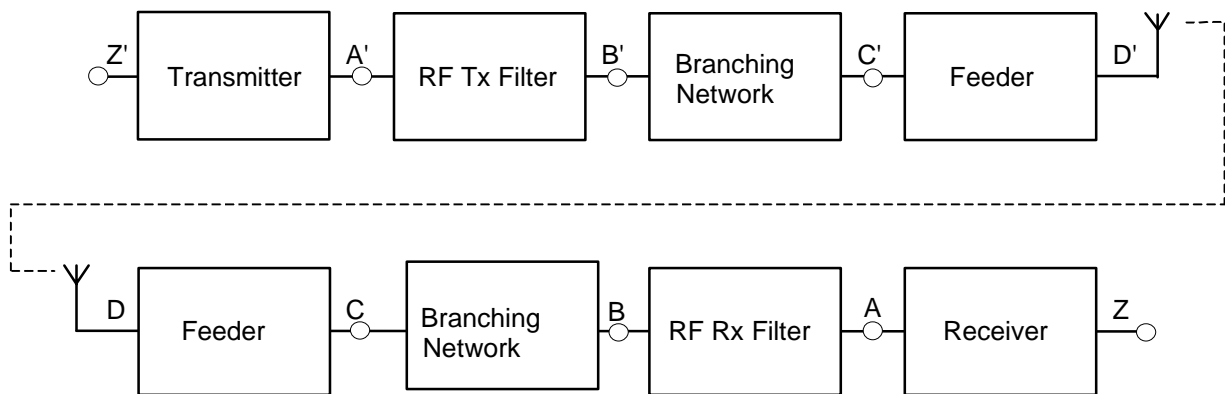


Figure 2: RF system block diagram

#### 5.3.1.1 Automatic Transmit Power Control (ATPC)

Equipment with ATPC will be subject to manufacturer declaration of the ATPC range and related tolerances. Testing shall be carried out with output level corresponding to:

- ATPC set manually to a fixed value for system performance;
- ATPC set at maximum provided output power for Tx performance.

#### 5.3.1.2 Remote Transmit Power Control (RTPC)

Equipment with RTPC will be subject to manufacturer declaration of the RTPC range and related tolerances. Testing shall be carried out with output level corresponding to:

- RTPC set manually to the maximum and to the minimum values for System performance;
- RTPC set at maximum provided output power for Tx performance.

RF spectrum mask will be verified at three points (lower, medium and upper part of the frequency band envisaged), if applicable.

## 5.3.2 Spectrum mask

### 5.3.2.1 Spectrum density mask

The spectrum mask is given in figure 3. No allowance is made for frequency tolerance.


The transmitted output power spectrum is defined as the spectrum when modulated with a test data signal that simulates a system operating under maximum system loading conditions. In case of multiple carrier operation, each individual DS-CD/TDMA carrier is defined by the mask.

The spectrum measurement at point C' of the RF system block diagram figure 2 shall be performed with the max. hold function on the spectrum analyser selected.

The reference level of the output spectrum means that the 0 dB level is the top of the modulated spectrum, disregarding residual carrier.

**Table 2: Spectrum Analyser Settings**

Res. BW	Video BW	Sweep time
30 kHz	300 Hz	10 s

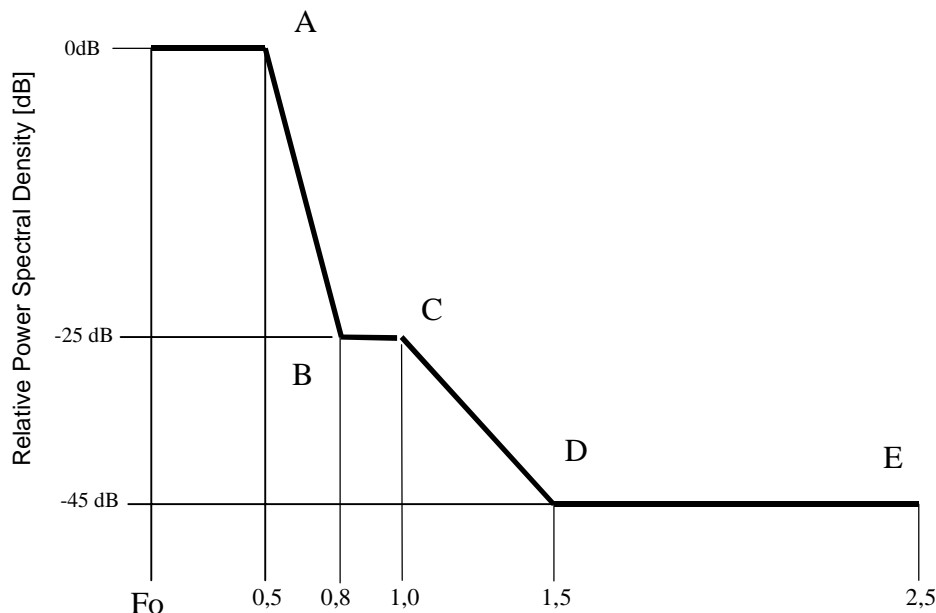

**Figure 3: DS-CD/TDMA spectrum mask normalized for channel spacing**

**Table 3: Channel spacing against spectrum mask reference points**

Relative Level→	Point A 0 dB	Point B -25 dB	Point C -25 dB	Point D -45 dB	Point E -45 dB
Channel Spacing MHz↓	0,5 x Channel Spacing	0,8 x Channel Spacing	1,0 x Channel Spacing	1,5 x Channel Spacing	2,5 x Channel Spacing
24	12 MHz	19,2 MHz	24 MHz	36 MHz	60 MHz

### 5.3.2.2 Discrete CW components exceeding the spectrum mask limit (all stations)

In case some CW components exceed the spectrum mask, an additional allowance is given.

Those lines shall not:

- exceed the mask by a factor more than  $\{10 \log (C_{\text{min}}/IF_{\text{bw}}) - 10\}$  dB (Note);

- be spaced each other in frequency by less than  $C_{\text{min}}$ .

Where:


$$C_{\text{min}} = 500 \text{ kHz for 3,5 and 3,7 GHz bands}$$

$$C_{\text{min}} = 1\,500 \text{ kHz for 10,5 GHz band}$$

IFbw is the recommended resolution bandwidth, expressed in kHz reported in table 2.

NOTE: In case the calculation of the allowance factor will result in a negative value, no additional allowance is then permitted.

Figure 4 shows a typical example of this requirement.

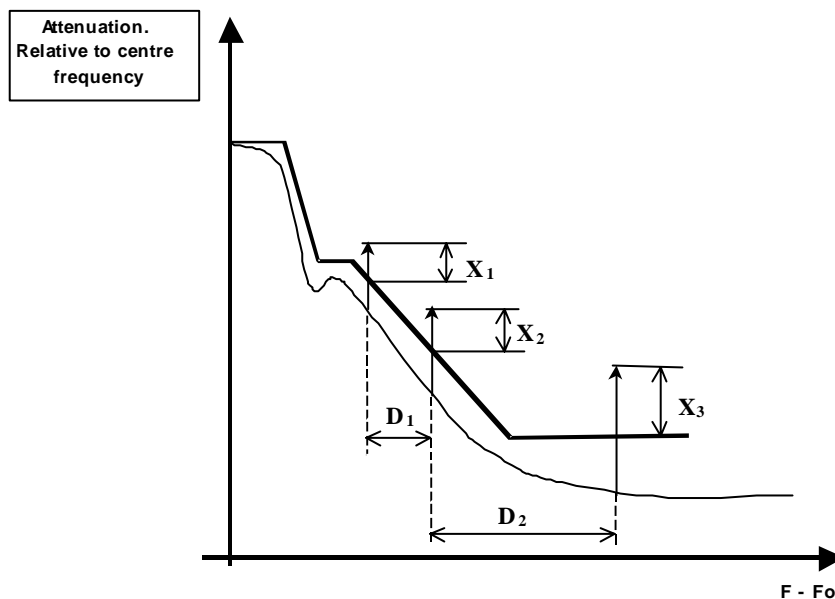

$$X_1, X_2, X_3 \text{ [dB]} \leq 10 \log(C_{\text{min}}/IF_{\text{bw}}) - 10$$

$$D_1, D_2 \geq C_{\text{min}}$$

Figure 4: CW lines exceeding the spectrum mask (typical example)

### 5.3.3 Transmitter spurious emissions

Outside the frequency range  $\pm 250\%$  of the relevant channel spacing, across the nominal centre frequency, CEPT/ERC Recommendation 74-01 [8] shall apply.

### 5.3.4 Radio frequency tolerance

Maximum radio frequency tolerance shall not exceed 20 ppm. This limit includes both short-term factors and long-term ageing effects. For the purpose of type-testing the manufacturer shall state the guaranteed short-term part and the expected ageing part.

## 5.4 Receiver characteristics

### 5.4.1 Dynamic range

Table 4 defines, for the appropriate receiver type and a single DS-CD/TDMA signal, the dynamic range above the receiver threshold level defined in table 5, for which the BER shall be  $10^{-3}$  or less.

NOTE: The dynamic range for receivers facing terminal stations is lower because of the use of automatic transmitter power control.

**Table 4: Dynamic range**

Terminal Station	60 dB
Repeater Station (facing Central Station)	60 dB
Repeater Station (facing Terminal Station)	20 dB
Central Station	20 dB

### 5.4.2 Broadband CW interference rejection capability

For a receiver operating at the RSL specified in clause 5.4.4.1 for  $10^{-6}$  BER threshold, the introduction of a CW interferer at a level of +30dB with respect to the wanted signal and at any frequency up to 26 GHz, excluding frequencies either side of the wanted frequency up to 450 % of the channel spacing, shall not result in a BER greater than  $10^{-5}$ . This is considered equivalent to a 1dB degradation of the  $10^{-6}$  BER threshold.

### 5.4.3 Spurious emissions

CEPT/ERC Recommendation 74-01 [8] shall apply.

### 5.4.4 BER performance

#### 5.4.4.1 Single Signal performance

For a single DS-CD/TDMA signal receiver BER thresholds (dBm) referred to point C of the RF block diagram (figure 2) for a BER of  $10^{-3}$  and  $10^{-6}$  shall be equal to or lower than those stated in table 5. These values do not include any contribution due to the necessary signalling and synchronization overhead.

**Table 5: BER performance thresholds**

User Bit Rate (kbit/s)	RSL for BER $10^{-3}$ (dBm)	RSL for BER $10^{-6}$ (dBm)
4 500	-85	-83

#### 5.4.4.2 Loaded BER performance

Radio traffic is sequential and loading imposes no penalty upon BER threshold. The thresholds given in table 5 apply to the total bit rate.

#### 5.4.4.3 Maximum system loading

There is no limit to the system loading. Net throughput per user is inversely proportional to loading and maximum loading is a matter of operational choice.

## 5.4.5 Interference sensitivity

### 5.4.5.1 Co-channel interference sensitivity

All receive signal levels and interference level measurements are referred to point C of the system block diagram, given in figure 2.

The limits of co-channel interference for uncorrelated, like-modulated signals shall be as in table 6.

For a signal applied to the receiver at a level greater by 1 dB or 3 dB than the relevant level specified in table 5 an applied additional co-channel interferer with uncorrelated, like modulation in the same bandwidth at the relevant level specified in table 6 shall not cause the BER to exceed the relevant specified figure.

**Table 6: Co-channel Sensitivity**

Threshold Degradation→	BER 10 <sup>-6</sup>	
	1 dB	3 dB
Channel Spacing MHz ↓	Interference level (dBm)	Interference level (dBm)
24	-105	-103

### 5.4.5.2 First offset channel interference sensitivity

All receive signal levels and interference level measurements are referred to point C of the system block diagram, given in figure 2.

The limits of first offset channel interference for an uncorrelated, like-modulated signal shall be as in table 7.

**Table 7: First Offset Channel Sensitivity**

Threshold Degradation→	Offset MHz	BER 10 <sup>-6</sup>	
		1 dB	3 dB
Channel Spacing MHz ↓	Interference level (dBm)	Interference level (dBm)	
24	5,5	-97	-95

### 5.4.5.3 Second offset channel interference sensitivity

All receive signal levels and interference level measurements are referred to point C of the system block diagram, given in figure 2.

The limits of second offset channel interference for an uncorrelated, like-modulated signal shall be as in table 8.

**Table 8: Second Offset Channel Sensitivity**

Threshold Degradation→	Offset MHz	BER 10 <sup>-6</sup>	
		1 dB	3 dB
Channel Spacing MHz ↓	Interference level (dBm)	Interference level (dBm)	
24	11,0	-93	-91



#### 5.4.5.4 Adjacent channel interference sensitivity

All receive signal levels and interference level measurements are referred to point C of the system block diagram, given in figure 2.

The limits of adjacent channel interference for an uncorrelated, like-modulated signal shall be as in table 9.

**Table 9: Adjacent Channel Sensitivity**

	BER $10^{-6}$	
	1 dB	3 dB
Threshold Degradation→		
Channel Spacing MHz ↓	Interference level (dBm)	Interference level (dBm)
24	-82	-80

## 5.5 Antenna port characteristics

### 5.5.1 RF interface

For equipment without an integral antenna, the RF interface at reference points C and C' of the system block diagram, figure 2 shall be either coaxial 50 Ohms or an appropriate waveguide flange.

### 5.5.2 Return loss

For equipment without an integral antenna, the return loss at reference points C and C' of the RF system block diagram (figure 2) shall be more than 10 dB at the reference impedance.

---

## 6 Types of subscriber equipment and network router interface

The equipment covered by the present document shall use one or more of the standardized interfaces given in table 10.

**Table 10: Types of interface**

Subscriber and Network Router Equipment Interfaces	
Ethernet	ISO/IEC 8802-3 [9]
X21	[10]

Other standard data interfaces may also be implemented.

## 7 Power supply and environmental characteristics

### 7.1 Power supply

The equipment shall operate from one or more of the power supplies within the ranges specified in tables 11 and 12.

**Table 11: Power Supplies - DC**

Nominal voltage	Voltage range
12	10,8 to 13,6
24	21,8 to 28,1 ETS 300 132 [3]
48	40,5 to 57,0 ETS 300 132 [3]
60	50,0 to 72,0

**Table 12: Power Supplies - AC**

For 110 V AC nominal	99 to 121 V	60 Hz $\pm$ 2 Hz
For 230 V AC nominal	207 to 253 V	50 Hz $\pm$ 2 Hz ETS 300 132 [3]

### 7.2 Environmental conditions

The equipment shall meet the environmental conditions set out in EN 300 019 [1] which defines weather-protected and non weather-protected location classes and test severity.

#### 7.2.1 Equipment within weather-protected locations

Equipment intended for operation in temperature-controlled locations or partially temperature-controlled locations shall meet the requirements of EN 300 019 [1] classes 3.1 and 3.2 respectively.

Optionally, the more stringent requirements of EN 300 019 [1] classes 3.3 (Non temperature controlled locations), 3.4 (Sites with heat trap) and 3.5 (Sheltered locations) may be applied.

#### 7.2.2 Equipment for non weather-protected locations

Equipment intended for operation within non weather-protected locations shall meet the requirements of EN 300 019 [1], class 4.1 or 4.1E.

Class 4.1 applies to many ETSI countries and class 4.1E applies to all ETSI countries.

Weather-protected equipment conforming to class 3.3, 3.4 or 3.5 together with an enclosure or cabinet may fulfil the requirements for operating in a non weather-protected environment but this is outside the scope of the present document.

### 7.3 Electromagnetic compatibility conditions

The equipment shall operate under the conditions of EN 300 385 [2].

---

## Annex A (informative): Bibliography

ITU-T Recommendation G.773: "Protocol suites for Q-interfaces for management of transmission systems".

ITU-R Recommendation SM.329-7: "Spurious emissions".

---

## History

<b>Document history</b>		
V1.1.1	October 2000	Publication
V1.2.1	October 2000	One-step Approval Procedure OAP 20010216: 2000-10-18 to 2001-02-16
V1.2.1	February 2001	Publication