

Final draft **ETSI EN 301 908-15** V4.1.2 (2009-12)

Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Base Stations (BS), Repeaters and User Equipment (UE)
for IMT-2000 Third-Generation cellular networks;
Part 15: Harmonized EN for IMT-2000,
Evolved Universal Terrestrial Radio Access (E-UTRA)
(FDD Repeaters) covering the essential requirements
of article 3.2 of the R&TTE Directive**



Reference

DEN/ERM-TFES-002-15

Keywords

3G, 3GPP, cellular, digital, IMT-2000, mobile,
radio, regulation, repeater, UMTS, WCDMA

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009.
All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTETM is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM[®] and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Introduction	6
1 Scope	7
2 References	7
2.1 Normative references	8
2.2 Informative references.....	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions	9
3.2 Symbols.....	10
3.3 Abbreviations	10
4 Technical requirements specifications	11
4.1 Environmental profile.....	11
4.2 Conformance requirements	11
4.2.1 Introduction.....	11
4.2.2 Operating band unwanted emissions	11
4.2.2.1 Definition	11
4.2.2.2 Limit.....	12
4.2.2.2.1 General operating band unwanted emissions.....	12
4.2.2.2.2 Protection of the BS receiver in the operating band	15
4.2.2.3 Conformance.....	15
4.2.3 Spurious emissions	15
4.2.3.1 Definition	15
4.2.3.2 Limit.....	16
4.2.3.2.1 Spurious emissions	16
4.2.3.2.2 Co-existence with other systems in the same geographical area	16
4.2.3.3 Conformance.....	17
4.2.4 Maximum output power.....	18
4.2.4.1 Definition	18
4.2.4.2 Limit.....	18
4.2.4.3 Conformance.....	18
4.2.5 Input intermodulation	18
4.2.5.1 Definition	18
4.2.5.2 Limit.....	19
4.2.5.2.1 General input intermodulation requirement.....	19
4.2.5.2.2 Co-existence with other systems	19
4.2.5.3 Conformance.....	20
4.2.6 Out of band gain	20
4.2.6.1 Definition	20
4.2.6.2 Limits	20
4.2.6.3 Conformance.....	20
4.2.7 Adjacent Channel Rejection Ratio.....	21
4.2.7.1 Definition	21
4.2.7.2 Limit.....	21
4.2.7.2.1 ACRR	21
4.2.7.2.2 Co-existence with UTRA	21
4.2.7.3 Conformance.....	21
4.2.8 Output intermodulation.....	21
4.2.8.1 Definition	21
4.2.8.2 Limit.....	22
4.2.8.3 Conformance.....	22
5 Testing for compliance with technical requirements.....	22
5.1 Environmental conditions for testing	22

5.2	Interpretation of the measurement results	22
5.3	Essential radio test suites.....	24
5.3.1	Operating band unwanted emissions	24
5.3.1.1	Initial conditions	24
5.3.1.2	Procedures.....	24
5.3.2	Spurious emissions	25
5.3.2.1	Initial conditions	25
5.3.2.2	Procedures.....	25
5.3.3	Maximum output power.....	26
5.3.3.1	Initial conditions	26
5.3.3.2	Procedures.....	26
5.3.4	Input intermodulation	26
5.3.4.1	Initial conditions	26
5.3.4.2	Procedures.....	27
5.3.5	Out of band gain	27
5.3.5.1	Initial conditions	27
5.3.5.2	Procedures.....	27
5.3.6	Adjacent Channel Rejection Ratio.....	27
5.3.6.1	Initial conditions	27
5.3.6.2	Procedures.....	28
5.3.7	Output intermodulation.....	28
5.3.7.1	Initial conditions	28
5.3.7.2	Procedures.....	28
Annex A (normative):	HS Requirements and conformance Test specifications Table (HS-RTT).....	30
Annex B (normative):	Repeater configurations	32
B.1	Power supply	32
B.2	Power supply options	32
B.3	Combining of Repeaters.....	32
Annex C (normative):	Repeater stimulus signal spectral purity requirements.....	33
Annex D (informative):	Environmental profile specification	34
Annex E (informative):	The EN title in the official languages	35
Annex F (informative):	Bibliography.....	36
History		37

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Vote phase of the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [i.1] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [i.2] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC [i.2] are given in annex A.

The present document is part 15 of a multi-part deliverable covering the Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks, as identified below:

- Part 1: "Harmonized EN for IMT-2000, introduction and common requirements, covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 2: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 3: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 4: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) and Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 5: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) and Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 6: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD and E-UTRA TDD) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 7: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD and E-UTRA TDD) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 8: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 9: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";

- Part 10: "Harmonized EN for IMT-2000, FDMA/TDMA (DECT) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 11: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 12: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 13: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 14: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 15: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (FDD Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";**
- Part 16: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 17: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive [i.2]. The modular structure is shown in EG 201 399 [i.3].

1 Scope

The present document applies to the following radio equipment types:

- Repeaters for Evolved Universal Terrestrial Radio Access (E-UTRA) (FDD).

These radio equipment types are capable of operating in all or any part of the operating bands given in table 1-1.

Table 1-1: E-UTRA Repeater operating bands

E-UTRA FDD band	Direction of transmission	E-UTRA Repeater operating bands
1	Downlink	2 110 MHz to 2 170 MHz
	Uplink	1 920 MHz to 1 980 MHz
3	Downlink	1 805 MHz to 1 880 MHz
	Uplink	1 710 MHz to 1 785 MHz
7	Downlink	2 620 MHz to 2 690 MHz
	Uplink	2 500 MHz to 2 570 MHz
8	Downlink	925 MHz to 960 MHz
	Uplink	880 MHz to 915 MHz

The present document covers requirements for E-UTRA Repeaters for Release 8.

The present document is intended to cover the provisions of Directive 1999/5/EC [i.2] (R&TTE Directive), Article 3.2, which states that "..... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [i.2] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org>.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI EN 301 908-1 (V4.1.2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 1: Harmonized EN for IMT-2000, introduction and common requirements, covering the essential requirements of article 3.2 of the R&TTE Directive".
- [2] ETSI TS 136 143 (V8.2.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); FDD repeater conformance testing (3GPP TS 36.143 version 8.2.0 Release 8)".
- [3] Void.
- [4] ITU-R Recommendation SM.329-10 (2003): "Unwanted emissions in the spurious domain".
- [5] IEC 60068-2-1 (2007): "Environmental testing - Part 2-1: Tests - Test A: Cold".
- [6] IEC 60068-2-2 (2007): "Environmental testing - Part 2-2: Tests - Test B: Dry heat".
- [7] ETSI EN 301 908-11 (V4.1.2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 11: Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive".
- [8] ETSI TS 136 141 (V8.4.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) conformance testing (3GPP TS 36.141 version 8.4.0 Release 8)".
- [9] ETSI TS 125 141 (V8.8.0): "Universal Mobile Telecommunications System (UMTS); Base Station (BS) conformance testing (FDD) (3GPP TS 25.141 version 8.8.0 Release 8)".

2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [i.2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [i.3] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".
- [i.4] ETSI TR 102 215 (V1.3.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Recommended approach, and possible limits for measurement uncertainty for the measurement of radiated electromagnetic fields above 1 GHz".
- [i.5] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

carrier: modulated waveform conveying the E-UTRA or UTRA (WCDMA) physical channels

channel bandwidth: RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell

NOTE: The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

channel edge: lowest and highest frequency of the E-UTRA carrier, separated by the channel bandwidth

donor coupling loss: coupling loss between the repeater and the donor Base Station

downlink: signal path where Base Station transmits and mobile receives

downlink operating band: part of the operating band designated for downlink

nominal passband edge: lowest and highest frequency of the pass band of the repeater

operating band: frequency range in which E-UTRA FDD operates, that is defined with a specific set of technical requirements

NOTE 1: The operating band(s) for an E-UTRA Repeater is declared by the manufacturer according to the designations in clause 1, table 1-1.

NOTE 2: Unless specified, operating band refers to the uplink operating band and downlink operating band.

output power, P_{out}: mean power of one carrier at maximum repeater gain delivered to a load with resistance equal to the nominal load impedance of the transmitter

pass band: repeater can have one or several pass bands

NOTE: The pass band is the frequency range that the repeater operates in with operational configuration. This frequency range can correspond to one or several consecutive nominal channels. If they are not consecutive each subset of channels is considered as an individual pass band.

rated output power: rated output power of the repeater is the mean power level per carrier that the manufacturer has declared to be available at the antenna connector

repeater: device that receives, amplifies and transmits the radiated or conducted RF carrier both in the downlink direction (from the Base Station to the mobile area) and in the uplink direction (from the mobile to the Base Station)

transmission bandwidth: bandwidth of an instantaneous transmission from a UE or BS, measured in Resource Block units

transmission bandwidth configuration: highest transmission bandwidth allowed for uplink or downlink in a given channel bandwidth, measured in Resource Block units

uplink: signal path where mobile transmits and Base Station receives

uplink operating band: part of the operating band designated for uplink

3.2 Symbols

For the purposes of the present document, the following symbols apply:

Δf	The separation between the nominal pass band edge frequency and the nominal -3 dB point of the measuring filter closest to the carrier frequency
Δf_{\max}	The largest value of Δf used for defining the requirement
BW_{Channel}	Channel bandwidth
BW_{Config}	Transmission bandwidth configuration, expressed in MHz, where $BW_{\text{Config}} = N_{\text{RB}} \times 180$ kHz in the uplink and $BW_{\text{Config}} = 15$ kHz + $N_{\text{RB}} \times 180$ kHz in the downlink
BW_{Meas}	Measurement bandwidth
$BW_{\text{Pass band}}$	Bandwidth of the repeater pass band
$f_{\text{offset}_{\max}}$	The largest value of f_{offset} used for defining the requirement
$F_{\text{DL}_{\text{low}}}$	The lowest frequency of the downlink operating band
$F_{\text{DL}_{\text{high}}}$	The highest frequency of the downlink operating band
$F_{\text{UL}_{\text{low}}}$	The lowest frequency of the uplink operating band
$F_{\text{UL}_{\text{high}}}$	The highest frequency of the uplink operating band
N_{DL}	Downlink EARFCN
$N_{\text{Offs-DL}}$	Offset used for calculating downlink EARFCN
$N_{\text{Offs-UL}}$	Offset used for calculating uplink EARFCN
N_{RB}	Transmission bandwidth configuration, expressed in units of resource blocks
N_{UL}	Uplink EARFCN
P_{\max}	Maximum output power
P_{out}	Output power

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACLR	Adjacent Channel Leakage Ratio
ACRR	Adjacent Channel Rejection Ratio
BS	Base Station
BW	Bandwidth
CW	Continuous Wave
EARFCN	E-UTRA Absolute Radio Frequency Channel Number
E-TM	E-UTRA Test Model
E-UTRA	Evolved UTRA
FDD	Frequency Division Duplex
PCCPCH	Primary Common Control Physical Channel
RF	Radio Frequency
RMS	Root Mean Square (value)
RRC	Root Raised Cosine
SCCPCH	Secondary Common Control Physical Channel
TDD	Time Division Duplex
UMB	Ultra Mobile Broadband
UTRA	UMTS Terrestrial Radio Access

4 Technical requirements specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

For guidance on how a supplier can declare the environmental profile, see annex C.

4.2 Conformance requirements

The requirements in the present document are based on the assumption that the operating band (e.g. bands 1, 3, 7 and 8) is shared between systems of the IMT-2000 family (for band 3 and 8 also GSM) or systems having compatible characteristics.

4.2.1 Introduction

To meet the essential requirement under article 3.2 of Directive 1999/5/EC [i.2] (R&TTE Directive) for IMT-2000 Repeaters five essential parameters in addition to those in EN 301 908-1 [1] have been identified. Table 4.2.1-1 provides a cross reference between these five essential parameters and the corresponding seven technical requirements for equipment within the scope of the present document.

Table 4.2.1-1: Cross references

Essential parameter	Corresponding technical requirements
Spectrum emissions mask	4.2.2 Operating band unwanted emissions
Conducted spurious emissions from the antenna connector	4.2.3 Spurious emissions
Accuracy of maximum output power	4.2.4 Maximum output power
Receiver immunity	4.2.5 Input intermodulation
	4.2.6 Out of band gain
	4.2.7 Adjacent Channel Rejection Ratio
Intermodulation attenuation of the output	4.2.8 Output intermodulation

4.2.2 Operating band unwanted emissions

4.2.2.1 Definition

Unwanted emissions consist of out-of-band emissions and spurious emissions (ITU-R Recommendation SM.329-10 [4]). Out of band emissions are emissions immediately outside the pass band bandwidth resulting from the modulation process and non-linearity in the transmitter, but excluding spurious emissions. Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

The out-of-band emissions requirement for repeater is specified both in terms operating band unwanted emissions and protection of the BS receiver in the uplink operating band. The operating band unwanted emissions define all unwanted emissions in the repeater operating band plus the frequency ranges 10 MHz above and 10 MHz below that band. Unwanted emissions outside of this frequency range are limited by a spurious emissions requirement.

4.2.2.2 Limit

Emissions shall not exceed the maximum levels specified in the tables below, where:

- Δf is the separation between the nominal pass band edge frequency and the nominal -3 dB point of the measuring filter closest to the carrier frequency.
- Nominal passband edge is the lowest and highest frequency of the pass band of the repeater.
- BW_{Meas} is the measurement bandwidth.
- $BW_{Pass\ band}$ is the bandwidth of the repeaters pass band.
- f_{offset} is the separation between the nominal pass band edge frequency and the centre of the measuring filter.
- $f_{offset_{max}}$ is the offset to the frequency 10 MHz outside the repeater operating band.
- Δf_{max} is equal to $f_{offset_{max}}$ minus half of the bandwidth of the measuring filter.

Unless otherwise stated, all requirements are measured as mean power (RMS).

This requirement applies to the uplink and downlink of the repeater, at maximum gain, and with the following input signals:

- without E-UTRA input signal;
- with E-UTRA input signals in the pass band of the repeater, at levels that produce the maximum rated power output per channel;
- with 10 dB increased E-UTRA input signals in all channels in the pass band, compared to the input level producing the maximum rated output power.

4.2.2.2.1 General operating band unwanted emissions

For E-UTRA FDD repeater operating in bands 3 or 8 emissions shall not exceed the maximum levels specified in tables 4.2.2.2.1-1 and 4.2.2.2.1-2. The measurements shall apply to both paths uplink and downlink of the Repeater.

Table 4.2.2.2.1-1: General operating band unwanted emission limits for repeater pass band lower than 5 MHz for (E-UTRA band 3 and 8)

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Test requirement	Measurement bandwidth
$0\text{ MHz} \leq \Delta f < 0,2\text{ MHz}$	$0,015\text{ MHz} \leq f_{offset} < 0,215\text{ MHz}$	-12,5 dBm	30 kHz
$0,2\text{ MHz} \leq \Delta f < 1\text{ MHz}$	$0,215\text{ MHz} \leq f_{offset} < 1,015\text{ MHz}$	$-12,5\text{ dBm} - 15 * \left(\frac{f_{offset}}{\text{MHz}} - 0,215 \right) \text{ dB}$	30 kHz
	$1,015\text{ MHz} \leq f_{offset} < 1,5\text{ MHz}$	-24,5 dBm	30 kHz
$1\text{ MHz} \leq \Delta f < 2 \times BW_{Pass\ band}$	$1,5\text{ MHz} \leq f_{offset} < 2 \times BW_{Pass\ band} + 0,5\text{ MHz}$	-11,5 dBm	1 MHz
$2 \times BW_{Pass\ band} \leq \Delta f \leq \Delta f_{max}$	$2 \times BW_{Pass\ band} + 0,5\text{ MHz} \leq f_{offset} < f_{offset_{max}}$	-15 dBm	1 MHz

NOTE 1: Frequencies and bandwidth are given in MHz.

NOTE 2: If the repeater input signal consists of E-UTRA signals with a channel bandwidth of 1,4 MHz or 3 MHz placed so that the channel edge is less than 200 kHz from the pass band edge, the requirements in table 4.2.2.2.1-3 supersede table 4.2.2.2.1-1 for applicable frequency offsets.

Table 4.2.2.1-2: General operating band unwanted emission limits for repeater pass band 5 MHz and above for (E-UTRA band 3 and 8)

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Test requirement	Measurement bandwidth
$0 \text{ MHz} \leq \Delta f < 0,2 \text{ MHz}$	$0,015 \text{ MHz} \leq f_{\text{offset}} < 0,215 \text{ MHz}$	-12,5 dBm	30 kHz
$0,2 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	$0,215 \text{ MHz} \leq f_{\text{offset}} < 1,015 \text{ MHz}$	$-12,5 \text{ dBm} - 15 \cdot \left(\frac{f_{\text{offset}}}{\text{MHz}} - 0,215 \right) \text{ dB}$	30 kHz
	$1,015 \text{ MHz} \leq f_{\text{offset}} < 1,5 \text{ MHz}$	-24,5 dBm	30 kHz
$1 \text{ MHz} \leq \Delta f < 10 \text{ MHz}$	$1,5 \text{ MHz} \leq f_{\text{offset}} < 10,5 \text{ MHz}$	-11,5 dBm	1 MHz
$10 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$10,5 \text{ MHz} \leq f_{\text{offset}} < f_{\text{offset}_{\text{max}}}$	-15 dBm	1 MHz

NOTE 1: Frequencies and bandwidth are given in MHz.
 NOTE 2: If the repeater input signal consists of E-UTRA signals with a channel bandwidth of 1,4 MHz or 3 MHz placed so that the channel edge is less than 200 kHz from the pass band edge, the requirements in table 4.2.2.1-3 supersede table 4.2.2.1-2 for applicable frequency offsets.

Table 4.2.2.1-3: Conditional operating band unwanted emission limits for (E-UTRA band 3 and 8)

Frequency offset of measurement filter -3 dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Test requirement	Measurement bandwidth
$0 \text{ MHz} \leq \Delta f < 0,05 \text{ MHz}$	$0,015 \text{ MHz} \leq f_{\text{offset}} < 0,065 \text{ MHz}$	$6,5 \text{ dBm} - 60 \cdot \left(\frac{f_{\text{offset}}}{\text{MHz}} - 0,015 \right) \text{ dB}$	30 kHz
$0,05 \text{ MHz} \leq \Delta f < 0,15 \text{ MHz}$	$0,065 \text{ MHz} \leq f_{\text{offset}} < 0,165 \text{ MHz}$	$3,5 \text{ dBm} - 160 \cdot \left(\frac{f_{\text{offset}}}{\text{MHz}} - 0,065 \right) \text{ dB}$	30 kHz
$0,15 \text{ MHz} \leq \Delta f < 0,2 \text{ MHz}$	$0,165 \text{ MHz} \leq f_{\text{offset}} < 0,215 \text{ MHz}$	-12,5 dBm	30 kHz

NOTE: Frequencies and bandwidth are given in MHz.

For E-UTRA FDD repeater operating in bands 1 and 7 emissions shall not exceed the maximum levels specified in tables 4.2.2.2.1-3 and 4.2.2.2.1-4. The measurements shall apply to both paths uplink and downlink of the Repeater.

Table 4.2.2.2.1-4: General operating band unwanted emission limits for repeater pass band lower than 5 MHz (E-UTRA bands 1 and 7)

Frequency offset of measurement filter -3 dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Test requirement	Measurement bandwidth
$0 \text{ MHz} \leq \Delta f < BW_{\text{Pass band}}$	$BW_{\text{Meas}}/2 \leq f_{\text{offset}} < BW_{\text{Pass band}} + BW_{\text{Meas}}/2$	$Max[-2,5 * BW_{\text{Passband}} + 2,5; -1 * BW_{\text{Passband}} - 2] \text{ dBm} + \frac{Max[-10; 1,5 * BW_{\text{Passband}} - 14,5]}{BW_{\text{Passband}}} * \left(f_{\text{offset}} - \frac{BW_{\text{meas}}}{2} \right) \text{ dB} + 1,5 \text{ dB}$	100 kHz
$BW_{\text{Pass band}} \leq \Delta f < 2 * BW_{\text{Pass band}}$	$BW_{\text{Meas}}/2 \leq f_{\text{offset}} < 2 * BW_{\text{Pass band}} + BW_{\text{Meas}}/2$	$Max[-2,5 * BW_{\text{Passband}} - 7,5; 0,5 * BW_{\text{Passband}} - 16,5] \text{ dBm} + 1,5 \text{ dB}$	100 kHz
$2 * BW_{\text{Pass band}} \leq \Delta f \leq \Delta f_{\text{max}}$	$2 * BW_{\text{Pass band}} + BW_{\text{Meas}}/2 \leq f_{\text{offset}} \leq f_{\text{offset}_{\text{max}}}$	-15 dBm	1 MHz

NOTE 1: Frequencies and bandwidth are given in MHz.
 NOTE 2: If the repeater input signal consists of E-UTRA signals with a channel bandwidth of 1,4 MHz placed so that the channel edge is less than 200 kHz from the pass band edge, the requirements in table 4.2.2.2.1-6 supersede table 4.2.2.2.1-4 and table 4.2.2.2.1-5 for applicable frequency offsets.
 NOTE 3: If the repeater input signal consists of E-UTRA signals with a channel bandwidth of 3 MHz placed so that the channel edge is less than 200 kHz from the pass band edge, the requirements in table 4.2.2.2.1-7 supersede table 4.2.2.2.1-4 and table 4.2.2.2.1-5 for applicable frequency offsets.

Table 4.2.2.2.1-5: General operating band unwanted emission limits for repeater pass band 5 MHz and above (E-UTRA bands 1 and 7)

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Test requirement	Measurement bandwidth
$0 \text{ MHz} \leq \Delta f < 5 \text{ MHz}$	$0,05 \text{ MHz} \leq f_{\text{offset}} < 5,05 \text{ MHz}$	$-5,5 \text{ dBm} - \frac{7}{5} * \left(\frac{f_{\text{offset}}}{\text{MHz}} - 0,05 \right) \text{ dB}$	100 kHz
$5 \text{ MHz} \leq \Delta f < 10 \text{ MHz}$	$5,05 \text{ MHz} \leq f_{\text{offset}} < 10,05 \text{ MHz}$	-12,5 dBm	100 kHz
$10 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$10,5 \text{ MHz} \leq f_{\text{offset}} < f_{\text{offset}_{\text{max}}}$	-15 dBm	1 MHz

NOTE 1: Frequencies and bandwidth are given in MHz.
 NOTE 2: If the repeater input signal consists of E-UTRA signals with a channel bandwidth of 1,4 MHz placed so that the channel edge is less than 200 kHz from the pass band edge, the requirements in table 4.2.2.2.1-6 supersede table 4.2.2.2.1-4 and table 4.2.2.2.1-5 for applicable frequency offsets.
 NOTE 3: If the repeater input signal consists of E-UTRA signals with a channel bandwidth of 3 MHz placed so that the channel edge is less than 200 kHz from the pass band edge, the requirements in table 4.2.2.2.1-7 supersede table 4.2.2.2.1-4 and table 4.2.2.2.1-5 for applicable frequency offsets.

Table 4.2.2.2.1-6: Conditional operating band unwanted emission limits for repeater input signal bandwidth of 1,4 MHz

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Test requirement	Measurement bandwidth
$0 \text{ MHz} \leq \Delta f < 1,05 \text{ MHz}$	$0,05 \text{ MHz} \leq f_{\text{offset}} < 1,1 \text{ MHz}$	$+0,5 \text{ dBm} - \frac{10}{1,4} * \left(\frac{f_{\text{offset}}}{\text{MHz}} - 0,05 \right) \text{ dB}$	100 kHz

Table 4.2.2.2.1-7: Conditional operating band unwanted emission limits for repeater input signal bandwidth of 3 MHz

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Test requirement	Measurement bandwidth
$0 \text{ MHz} \leq \Delta f < 1,05 \text{ MHz}$	$0,05 \text{ MHz} \leq f_{\text{offset}} < 1,1 \text{ MHz}$	$-3,5 \text{ dBm} - \frac{10}{3} \cdot \left(\frac{f_{\text{offset}}}{\text{MHz}} - 0,05 \right) \text{ dB}$	100 kHz

4.2.2.2.2 Protection of the BS receiver in the operating band

This requirement shall be applied for the protection of E-UTRA FDD BS receiver in geographic areas in which E-UTRA-FDD Repeater and E-UTRA-FDD BS are deployed.

The requirement applies at frequencies that are more than 10 MHz below or more than 10 MHz above the repeater pass band.

This requirement applies to the uplink of the repeater, at maximum gain.

The power of any operating band unwanted emission shall not exceed the limits in table 4.2.2.2.2-1.

Table 4.2.2.2.2-1: Uplink operating band unwanted emissions limits for protection of the BS receiver

Maximum level	Measurement bandwidth	Note
-53 dBm	100 kHz	
NOTE 1: These requirements in table 4.2.2.2.2-1 for the uplink direction of the Repeater reflect what can be achieved with present state of the art technology and are based on a coupling loss of 73 dB between a Repeater and an E-UTRA FDD BS receiver.		
NOTE 2: The requirements shall be reconsidered when the state of the art technology progresses.		

4.2.2.3 Conformance

Conformance tests described in clause 5.3.1 shall be carried out.

4.2.3 Spurious emissions

4.2.3.1 Definition

Unwanted emissions consist of out-of-band emissions and spurious emissions (ITU-R Recommendation SM.329-10 [4]). Out of band emissions are emissions immediately outside the pass band bandwidth resulting from the modulation process and non-linearity in the transmitter, but excluding spurious emissions. Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

The spurious emission limits apply from 9 kHz to 12,75 GHz, excluding the frequency range from 10 MHz below the lowest frequency of the repeaters operating band up to 10 MHz above the highest frequency of the repeaters operating band.

The requirements shall apply whatever the type of repeater considered (one or several pass bands). It applies for all configurations foreseen by the manufacturer's specification. The measurements shall apply to both paths uplink and downlink of the Repeater.

Unless otherwise stated, all requirements are measured as mean power (RMS).

4.2.3.2 Limit

The requirements apply to the uplink and downlink of the repeater, at maximum gain, and with the following input signals:

- without E-UTRA input signal;
- with E-UTRA input signals in the pass band of the repeater, at levels that produce the maximum rated power output per channel;
- with 10 dB increased E-UTRA input signals in all channels in the pass band, compared to the input level producing the maximum rated output power.

4.2.3.2.1 Spurious emissions

The power of any spurious emission shall not exceed the limits in table 4.2.3.2.1-1.

Table 4.2.3.2.1-1: Uplink and downlink: General spurious emissions limits, Category B

Frequency range	Maximum level	Measurement bandwidth	Note
9 kHz ↔ 150 kHz	-36 dBm	1 kHz	Note 1
150 kHz ↔ 30 MHz	-36 dBm	10 kHz	Note 1
30 MHz ↔ 1 GHz	-36 dBm	100 kHz	Note 1
1 GHz ↔ 12,75 GHz	-30 dBm	1 MHz	Note 2
NOTE 1: Bandwidth as in ITU-R Recommendation SM.329-10 [4], section 4.1.			
NOTE 2: Bandwidth as in ITU-R Recommendation SM.329-10 [4], section 4.1. Upper frequency as in ITU-R Recommendation SM.329-10 [4], section 2.5, table 1.			

4.2.3.2.2 Co-existence with other systems in the same geographical area

These requirements may be applied for the protection of UE, MS and/or BS operating in other frequency bands in the same geographical area. The requirements may apply in geographic areas in which both E-UTRA-FDD Repeater and a system operating in another frequency band than the E-UTRA operating band are deployed. The system operating in the other frequency band may be GSM900, DCS1800, UTRA FDD/TDD and/or E-UTRA.

The power of any spurious emission shall not exceed the limits of table 4.2.3.2.2-1 for an E-UTRA Repeater where requirements for co-existence with the system listed in the first column apply.

Table 4.2.3.2.2-1: Spurious emissions limits for E-UTRA-FDD repeater in geographic coverage area of systems operating in other frequency bands

Protected system	Frequency range for co-existence requirement	Maximum Level	Measurement Bandwidth	Note
GSM900	921 MHz to 960 MHz	-57 dBm	100 kHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 8.
	876 MHz to 915 MHz	-61 dBm	100 kHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 8, since it is already covered by the requirement in clause 4.2.2.2.2.
DCS1800	1 805 MHz to 1 880 MHz	-47 dBm	100 kHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 3.
	1 710 MHz to 1 785 MHz	-61 dBm	100 kHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 3, since it is already covered by the requirement in clause 4.2.2.2.2.
UTRA FDD band I or E-UTRA band 1	2 110 MHz to 2 170 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 1.
	1 920 MHz to 1 980 MHz	-49 dBm	1 MHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 1, since it is already covered by the requirement in clause 4.2.2.2.2.
UTRA FDD band III or E-UTRA band 3	1 805 MHz to 1 880 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 3.
	1 710 MHz to 1 785 MHz	-49 dBm	1 MHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 3, since it is already covered by the requirement in clause 4.2.2.2.2.
UTRA FDD band VII or E-UTRA band 7	2 620 MHz to 2 690 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 7.
	2 500 MHz to 2 570 MHz	-49 dBm	1 MHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 7, since it is already covered by the requirement in clause 4.2.2.2.2.
UTRA FDD band VIII or E-UTRA band 8	925 MHz to 960 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 8.
	880 MHz to 915 MHz	-49 dBm	1 MHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 8, since it is already covered by the requirement in clause 4.2.2.2.2.
UTRA TDD in band a) or E-UTRA band 33	1 900 MHz to 1 920 MHz	-52 dBm	1 MHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 1.
		-53 dBm	100 kHz	This requirement is applied only to the uplink of E-UTRA FDD Repeater operating in band 1.
UTRA TDD in band a) or E-UTRA band 34	2 010 MHz to 2 025 MHz	-52 dBm	1 MHz	
UTRA TDD in band d) or E-UTRA band 38	2 570 MHz to 2 620 MHz	-52 dBm	1 MHz	This requirement does not apply to the uplink of E-UTRA FDD Repeater operating in band 7.
		-53 dBm	100 kHz	This requirement is applied only to the uplink of E-UTRA FDD Repeater operating in band 7.
NOTE 1: As set out in the definition in clause 4.2.3.1, the co-existence requirements in this table do not apply for the 10 MHz frequency range immediately outside the repeaters operating band frequency range of an operating band (see table 1-1). This is also the case when the repeaters operating band frequency range is adjacent to the band for the protected system in the table.				
NOTE 2: Where the table has two entries for the same or overlapping frequency ranges, both limits shall be applied.				
NOTE 3: The requirements of -53 dBm/100 kHz in this table for the uplink direction of the Repeater reflect what can be achieved with present state of the art technology and are based on a coupling loss of 73 dB between a Repeater and a UTRA TDD BS receiver.				

4.2.3.3 Conformance

Conformance tests described in clause 5.3.2 shall be carried out.

4.2.4 Maximum output power

4.2.4.1 Definition

Output power, P_{out} , of the repeater is the mean power of one carrier at maximum repeater gain delivered to a load with resistance equal to the nominal load impedance of the transmitter.

Maximum output power, P_{max} , of the Repeater is the mean power level per carrier measured at the antenna connector in specified reference condition.

This requirement applies to the uplink and downlink of the repeater, at maximum gain.

4.2.4.2 Limit

The requirements shall apply at maximum gain, with E-UTRA signals in the pass band of the repeater, at levels that produce the maximum rated output power per channel.

When the power of all signals is increased by 10 dB, compared to the power level that produce the maximum rated output power, the requirements shall still be met.

In normal conditions, the Repeater maximum output power shall remain within limits specified in table 4.2.4.2-1 relative to the rated output power.

Table 4.2.4.2-1: Repeater output power; normal conditions

Rated output power	Limit
$P \geq 31$ dBm	+2,7 dB and -2,7 dB
$P < 31$ dBm	+3,7 dB and -3,7 dB

In extreme conditions, the Repeater maximum output power shall remain within limits specified in table 4.2.4.2-2 relative to the rated output power.

Table 4.2.4.2-2: Repeater output power; extreme conditions

Rated output power	Limit
$P \geq 31$ dBm	+3,2 dB and -3,2 dB
$P < 31$ dBm	+4,7 dB and -4,7 dB

4.2.4.3 Conformance

Conformance tests described in clause 5.3.3 shall be carried out.

4.2.5 Input intermodulation

4.2.5.1 Definition

The input intermodulation is a measure of the capability of the Repeater to inhibit the generation of interference in the pass band, in the presence of interfering signals on frequencies other than the pass band.

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the Repeater to maintain the wanted frequency free of internally created interference.

The frequency separation between the two interfering signals shall be adjusted so that the 3rd order intermodulation product is positioned in the centre of the pass band.

This requirement applies to the uplink and downlink of the repeater, at maximum gain.

4.2.5.2 Limit

4.2.5.2.1 General input intermodulation requirement

The intermodulation performance should be met when the following signals are applied to the Repeater.

- f_1 offset is the offset from the channel edge frequency of the first or last channel within the pass band of the closer carrier.

Table 4.2.5.2.1-1: General input intermodulation requirement

f_1 offset	Interfering signal levels	Type of signals	Measurement bandwidth
1,0 MHz	-40 dBm	2 CW carriers	1 MHz

For the parameters specified in table 4.2.5.2.1-1, the power in the pass band shall not increase with more than the limit in table 4.2.5.2.1-2 at the output of the Repeater as measured in the centre of the pass band, compared to the level obtained without interfering signals applied.

Table 4.2.5.2.1-2: General input intermodulations limit

Limit for the increase of power in the pass band
+11,2 dB

4.2.5.2.2 Co-existence with other systems

The intermodulation performance should be met when the following signals are applied to the Repeater.

Table 4.2.5.2.2-1: Input intermodulation requirements for interfering signals in co-existing other systems

Co-existence with other systems	Frequency of interfering signals	Interfering signal levels	Type of signals	Measurement bandwidth	Note
GSM900	876 MHz to 915 MHz	-15 dBm	2 CW carriers	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 8, since it is already covered by the requirement in clause 4.2.5.2.1.
DCS1800	1 710 MHz to 1 785 MHz	-15 dBm	2 CW carriers	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 3, since it is already covered by the requirement in clause 4.2.5.2.1.
UTRA FDD band I or E-UTRA band 1	1 920 MHz to 1 980 MHz	-15 dBm	2 CW carriers	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 1, since it is already covered by the requirement in clause 4.2.5.2.1.
UTRA FDD band III or E-UTRA band 3	1 710 MHz to 1 785 MHz	-15 dBm	2 CW carriers	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 3, since it is already covered by the requirement in clause 4.2.5.2.1.
UTRA FDD band VII or E-UTRA band 7	2 500 MHz to 2 570 MHz	-15 dBm	2 CW carriers	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 7, since it is already covered by the requirement in clause 4.2.5.2.1.
UTRA FDD band VIII or E-UTRA band 8	880 MHz to 915 MHz	-15 dBm	2 CW carriers	1 MHz	This requirement does not apply to E-UTRA FDD Repeater operating in band 8, since it is already covered by the requirement in clause 4.2.5.2.1.

NOTE: The co-existence requirements in this table do not apply when the repeaters pass band frequency range is adjacent to the frequency range of the co-existence requirement in this table. The current state-of-the-art technology does not allow a single generic solution for co-existence.

For the parameters specified in table 4.2.5.2.2-1, the power in the pass band shall not increase with more than the limit in table 4.2.5.2.2-2 at the output of the Repeater as measured in the centre of the pass band, compared to the level obtained without interfering signals applied.

Table 4.2.5.2.2-2: General input intermodulations limit

Limit for the increase of power in the pass band
+11,2 dB

4.2.5.3 Conformance

Conformance tests described in clause 5.3.4 shall be carried out.

4.2.6 Out of band gain

4.2.6.1 Definition

Out of band gain refers to the gain of the Repeater immediately outside the pass band.

This requirement applies to the uplink and downlink of the Repeater, at maximum gain.

4.2.6.2 Limits

The intended use of a Repeater in a system is to amplify the in band signals and not to amplify the out of band emission of the donor Base Station.

In the intended application of the Repeater, the out of band gain is less than the donor coupling loss.

The Repeater minimum donor coupling loss shall be declared by the manufacturer. This is the minimum required attenuation between the donor BS and the Repeater for proper Repeater operation.

The gain outside the pass band shall not exceed the maximum level specified in table 4.2.6.2-1, where:

- $f_{\text{offset_CW}}$ is the offset between the outer channel edge frequency of the outerchannel in the pass band and a CW signal.

Table 4.2.6.2-1: Out of band gain limits 1

Frequency offset, $f_{\text{offset_CW}}$	Maximum gain
$0,2 \leq f_{\text{offset_CW}} < 1,0$ MHz	60,5 dB
$1,0 \leq f_{\text{offset_CW}} < 5,0$ MHz	45,5 dB
$5,0 \leq f_{\text{offset_CW}} < 10,0$ MHz	45,5 dB
$10,0$ MHz $\leq f_{\text{offset_CW}}$	35,5 dB

For $10 \text{ MHz} \leq f_{\text{offset_CW}}$ the out of band gain shall not exceed the maximum gain of table 4.2.6.2-2 or the maximum gain stated in table 4.2.6.2-2 whichever is lower.

Table 4.2.6.2-2: Out of band gain limits 2

Frequency offset, $f_{\text{offset_CW}}$	Maximum gain
$10 \text{ MHz} \leq f_{\text{offset_CW}}$	Out of band gain \leq minimum donor coupling loss

4.2.6.3 Conformance

Conformance tests described in clause 5.3.5 shall be carried out.

4.2.7 Adjacent Channel Rejection Ratio

4.2.7.1 Definition

Adjacent Channel Rejection Ratio (ACRR) is the ratio of the RRC weighted gain per carrier of the repeater in the pass band to the RRC weighted gain of the repeater on an adjacent channel outside the repeater pass band. The carrier in the pass band and in the adjacent channel shall be of the same type (reference carrier).

The requirement shall apply to the uplink and downlink of the Repeater, at maximum gain, where the donor link is maintained via antennas (over the air Repeater).

4.2.7.2 Limit

4.2.7.2.1 ACRR

There is no minimum requirement for E-UTRA signals.

4.2.7.2.2 Co-existence with UTRA

This requirement shall be applied for the protection of UTRA signals in geographic areas in which E-UTRA-FDD Repeater and UTRA BS are deployed so that they serve adjacent channels. The reference carrier is a UTRA-FDD carrier.

In normal conditions the ACRR shall be higher than the value specified in the table 4.2.7.2.2-1.

Table 4.2.7.2.2-1: Repeater ACRR

Co-existence with other systems	Repeater maximum output power	Channel offset from the centre frequency of the first or last 5 MHz channel within the pass band	ACRR limit
UTRA	$P \geq 31$ dBm	5 MHz	32,3 dB
	$P \geq 31$ dBm	10 MHz	32,3 dB
	$P < 31$ dBm	5 MHz	19,3 dB
	$P < 31$ dBm	10 MHz	19,3 dB
NOTE: Repeater maximum output power as defined in EN 301 908-11 [7].			

4.2.7.3 Conformance

Conformance tests described in clause 5.3.6 shall be carried out.

4.2.8 Output intermodulation

4.2.8.1 Definition

The output intermodulation requirement is a measure of the ability of the repeater to inhibit the generation of intermodulation products signals created by the presence of an interfering signal reaching the repeater via the output port.

The output intermodulation level is the power of the intermodulation products when an E-UTRA signal of channel bandwidth 5 MHz as an interference signal is injected into the output port at a level of 30 dB lower than that of the wanted signal. The wanted signal channel bandwidth BW_{Channel} shall be the maximum bandwidth supported by the repeater. The interfering signal centre frequency offset from wanted signal carrier centre frequency shall be according to table 4.2.8.1-1.

The requirement shall apply to the downlink of the Repeater, at maximum gain.

Table 4.2.8.1-1: Interfering and wanted signals for the output intermodulation requirement

Parameter	Value
Wanted signal	E-UTRA signal of maximum channel bandwidth BW_{Channel}
Interfering signal type	E-UTRA signal of channel bandwidth 5 MHz
Interfering signal level	Mean power level 30 dB below the mean power of the wanted signal
Interfering signal centre frequency offset from wanted signal carrier centre frequency	$-BW_{\text{Channel}}/2 - 12,5 \text{ MHz}$ $-BW_{\text{Channel}}/2 - 7,5 \text{ MHz}$ $-BW_{\text{Channel}}/2 - 2,5 \text{ MHz}$ $BW_{\text{Channel}}/2 + 2,5 \text{ MHz}$ $BW_{\text{Channel}}/2 + 7,5 \text{ MHz}$ $BW_{\text{Channel}}/2 + 12,5 \text{ MHz}$
NOTE:	Interfering signal positions that are partially or completely outside of the downlink operating band of the repeater are excluded from the requirement.

4.2.8.2 Limit

The output intermodulation level shall not exceed the operating band unwanted emissions of clause 4.2.2.2 nor the downlink spurious emission requirements clause 4.2.3.2.1.

4.2.8.3 Conformance

Conformance tests described in clause 5.3.7 shall be carried out.

5 Testing for compliance with technical requirements

5.1 Environmental conditions for testing

Tests defined in the present document shall be carried out at representative points within the boundary limits of the declared operational environmental profile.

Where technical performance varies subject to environmental conditions, tests shall be carried out under a sufficient variety of environmental conditions (within the boundary limits of the declared operational environmental profile) to give confidence of compliance for the affected technical requirements.

Normally it should be sufficient for all tests to be conducted using normal test conditions except where otherwise stated. For guidance on the use of other test conditions to be used in order to show compliance reference can be made to TS 136 143 [2], annex A.

The measurement system required for each test is described in TS 136 143 [2], annex C.

5.2 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit will be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be included in the test report;
- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 5.2-1.

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated and shall correspond to an expansion factor (coverage factor) $k = 1,96$ (which provide confidence levels of respectively 95 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Principles for the calculation of measurement uncertainty are contained in TR 100 028 [i.5] or TR 102 215 [i.4].

Table 5.2-1 is based on such expansion factors.

Table 5.2-1: Maximum measurement uncertainty

Parameter	Condition	Uncertainty
Operating band unwanted emission (except Protection of the BS receiver in the operating band)	The interference from the signal generator ACLR shall be minimum 10 dB below that of a Base Station according to TS 136 141 [8]	±1,5 dB
Protection of the BS receiver in the operating band	for results > -60 dBm for results < -60 dBm	±2,0 dB ±3,0 dB
Spurious emissions	In E-UTRA and coexistence receive bands: for results > -60 dBm for results < -60 dBm Outside above range: emission power 9 kHz < f ≤ 4 GHz f > 4 GHz The interference from the signal generator ACLR shall be minimum 10 dB below that of a Base Station according to TS 136 141 [8]	±2,0 dB ±3,0 dB ±2,0 dB ±4,0 dB
Output power		±0,7 dB
Input intermodulation characteristics	Formula: $\sqrt{(CW1_level_error)^2 + (2 \cdot CW2_level_error)^2 + (measurement_error)^2}$ RSS: CW1 level error, 2 x CW2 level error, and measurement error (using all errors = ±0,5 dB)	±1,2 dB
Out of band gain	Calibration of test set-up shall be made without DUT in order to achieve the accuracy	±0,5 dB
Output intermodulation	Operating band unwanted emission: The interference from the signal generator ACLR shall be minimum 10 dB below that of a Base Station according to TS 136 141 [8] For spurious emission: In UTRA and coexistence receive bands: for results > -60 dBm for results < -60 dBm Outside above range: emission power; 9 kHz < f ≤ 4 GHz f > 4 GHz The interference signal must have a spurious emission level at least 10 dB below the spurious levels required in clause 4.2.3.2	±2,1 dB ±2,0 dB ±3,0 dB ±2,0 dB ±4,0 dB
Adjacent Channel Rejection Ratio		±0,7 dB
NOTE 1: For RF tests it should be noted that the uncertainties in table 5.2-1 apply to the Test System operating into a nominal 50 Ω load and do not include system effects due to mismatch between the EUT and the Test System.		
NOTE 2: If the Test System for a test is known to have a measurement uncertainty greater than that specified in table 5.2-1, this equipment can still be used, provided that an adjustment is made follows: Any additional uncertainty in the Test System over and above that specified in table 5.2-1 is used to tighten the Test Requirements - making the test harder to pass (for some tests, e.g. receiver tests, this may require modification of stimulus signals). This procedure will ensure that a Test System not compliant with table 5.2-1 does not increase the probability of passing an EUT that would otherwise have failed a test if a Test System compliant with table 5.2-1 had been used.		

5.3 Essential radio test suites

This clause describes the test suites for E-UTRA (FDD).

5.3.1 Operating band unwanted emissions

5.3.1.1 Initial conditions

Test environment: normal, see TS 136 143 [2], clause A.2.

A measurement set-up is shown in TS 136 143 [2], annex C.

- 1) Connect a signal generator to the input port of the Repeater.
- 2) Detection mode: True RMS.

5.3.1.2 Procedures

- 1) Set the Repeater to maximum gain.
- 2) Set the signal generator to generate signal(s) in accordance to table 5.3.1.2-1.

Table 5.3.1.2-1: Stimulus signal for operating band unwanted emissions testing

Repeater under test link and passband bandwidth	Stimulus reference	Note
Downlink pass band BW < 2,8 MHz	Repeater stimulus signal 4	The signal is defined in TS 136 143 [2], clause D.4
Uplink pass band BW < 2,8 MHz	Repeater stimulus signal 3	The signal is defined in TS 136 143 [2], clause D.3
Downlink pass band BW ≥ 2,8 MHz	Repeater stimulus signal 2	The signal is defined in TS 136 143 [2], clause D.2
Uplink pass band BW ≥ 2,8 MHz	Repeater stimulus signal 1	The signal is defined in TS 136 143 [2], clause D.1

At centre frequencies such that the whole signal can be fitted inside the repeater pass band and at level(s) which produce the manufacturer specified maximum output power at maximum gain.

- 3) The detecting device shall be configured with a measurement bandwidth as stated in the test requirement tables.
- 4) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value. To select the table and the maximum level, use the repeater pass band and stimulus signal if necessary.
- 5) Increase the input power with 10 dB compared to the level obtained in step 2).
- 6) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value. To select the table and the maximum level, use the repeater pass band and stimulus signal if necessary.
- 7) If the pass band is wider than 2,8 MHz, repeat step 1) to 6) with a new stimulus signal of the same kind, but using different centre frequencies such that the whole signal fitted in the repeater pass band.
- 8) Switch off the input signal to the repeater.
- 9) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value. To select the table and the maximum level, use the repeater pass band.

NOTE: As a general rule the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

The results obtained shall be compared to the limits in clause 4.2.2.2 in order to prove compliance.

5.3.2 Spurious emissions

5.3.2.1 Initial conditions

Test environment: normal, see TS 136 143 [2], clause A.2.

A measurement set-up is shown in TS 136 143 [2], annex C.

- 1) Connect a signal generator to the input port of the repeater.
- 2) Detection mode: True RMS.

5.3.2.2 Procedures

- 1) Set the Repeater to maximum gain.
- 2) Set the signal generator to generate signal(s) in accordance to table 5.3.2.2-1.

Table 5.3.2.2-1: Stimulus signal for operating band unwanted emissions testing

Repeater under test link and passband bandwidth	Stimulus reference	Note
Downlink pass band BW < 2,8 MHz	Repeater stimulus signal 4	The signal is defined in TS 136 143 [2], clause D.4
Uplink pass band BW < 2,8 MHz	Repeater stimulus signal 3	The signal is defined in TS 136 143 [2], clause D.3
Downlink pass band BW ≥ 2,8 MHz	Repeater stimulus signal 2	The signal is defined in TS 136 143 [2], clause D.2
Uplink pass band BW ≥ 2,8 MHz	Repeater stimulus signal 1	The signal is defined in TS 136 143 [2], clause D.1

At centre frequencies such that the whole signal can be fitted inside the repeater pass band and at level(s) which produce the manufacturer specified maximum output power at maximum gain.

- 3) The detecting device shall be configured with a measurement bandwidth as stated in the test requirement tables.
- 4) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value.
- 5) Increase the input power with 10 dB compared to the level obtained in step 2).
- 6) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value.
- 7) If the pass band is wider than 2,8 MHz, repeat steps 1) to 6) with a new stimulus signal of the same kind, but using different centre frequencies such that the whole signal fitted in the repeater pass band in the repeaters pass band.
- 8) Switch off the input signal to the repeater.
- 9) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value.

The results obtained shall be compared to the limits in clause 4.2.3.2 in order to prove compliance.

5.3.3 Maximum output power

5.3.3.1 Initial conditions

Test environment: normal, see TS 136 143 [2], clause A.2.

A measurement set-up is shown in TS 136 143 [2], annex C.

In addition, on one UARFCN only, the test shall be performed under extreme power supply as defined in clause A.5.

NOTE: Tests under extreme power supply also test extreme temperature.

- 1) Connect the signal generator equipment to the Repeater input port.
- 2) Connect the power measuring equipment to the Repeater output port.

5.3.3.2 Procedures

- 1) Set the signal generator to transmit signal(s) in accordance to table 5.3.3.2-1.

Table 5.3.3.2-1: Stimulus signal for output power testing

Repeater under test link and pass band bandwidth	Stimulus reference	Note
Downlink	One E-TM1.1 of the widest possible bandwidth to fit into the Repeater pass band	The signal is defined in TS 136 141 [8]
Uplink pass band BW < 2,8 MHz	Repeater stimulus signal 3	The signal is defined in TS 136 143 [2], clause D.3
Uplink pass band BW ≥ 2,8 MHz	Repeater stimulus signal 1	The signal is defined in TS 136 143 [2], clause D.1

At centre frequencies such that the whole signal can be fitted inside the repeater pass band and at level(s) which produce the manufacturer specified maximum output power at maximum gain.

- 2) Adjust the input power to the Repeater to create the maximum nominal Repeater output power at maximum gain.
- 3) Measure the mean power at the RF output port over a certain slot.
- 4) Increase the power with 10 dB compare to the level obtained in step 2).
- 5) Measure the mean power at the RF output port over a certain slot.

The results obtained shall be compared to the limits in clause 4.2.4.2 in order to prove compliance.

5.3.4 Input intermodulation

5.3.4.1 Initial conditions

Test environment: normal, see TS 136 143 [2], clause A.2.

A measurement set-up is shown in TS 136 143 [2], annex C.

- 1) Set the Repeater to maximum gain.
- 2) Connect two signal generators with a combining circuit or one signal generator with the ability to generate several CW carriers to the input.
- 3) Connect a spectrum analyser to the output of the Repeater. Set the resolution bandwidth to 1 MHz in the centre of the pass band. Set averaging to 1 second or more.

5.3.4.2 Procedures

- 1) Adjust the frequency of the input signals, either below or above the pass band, so that one carrier, f_1 , is 1 MHz outside the channel edge frequency of the first or last channel in the pass band, and the lowest order intermodulation product from the two carriers is positioned in the centre of the pass band, according to clause 4.2.5.2.
- 2) Take the measurement of the rise of the output signal.
- 3) Repeat the measurement for the opposite path of the Repeater.

The results obtained shall be compared to the limits in clause 4.2.5.2 in order to prove compliance.

5.3.5 Out of band gain

5.3.5.1 Initial conditions

Test environment: normal, see TS 136 143 [2], clause A.2.

A measurement set-up is shown in TS 136 143 [2], annex C.

- 1) $f_{\text{offset_CW}}$ is the offset between the outer channel edge frequency of the outer channel in the pass band and a CW-signal.
- 2) The test shall be performed with an $f_{\text{offset_CW}}$ of 0,2 MHz, 0,5 MHz, 1 MHz, 5 MHz, 7,5 MHz, 10 MHz, 12,5 MHz, 15 MHz and 20 MHz, excluding other pass bands. In addition the test shall also be performed for all harmonic frequencies of the repeaters pass band up to 12,75 GHz.

5.3.5.2 Procedures

- 1) Set the Repeater to maximum gain.
- 2) Set the signal generator to generate a CW-signal, applied to the input port of the Repeater. The power level of the RF input signal shall be at least 5 dB below the power level which, when applied within the pass band, would produce the maximum rated output power, as declared by the manufacturer. This is to ensure that the equipment is operating in the linear output range.
- 3) The average output power in each case shall be measured using a spectrum analyser connected to the output port of the Repeater and the net gain shall be recorded and compared to tables 4.2.6.2-1 or 4.2.6.2-2 whichever is lower.
- 4) With the same input power as in step 1) set the repeater gain to the minimum specified by the manufacturer.
- 5) The average output power in each case shall be measured using a spectrum analyser connected to the output port of the repeater and the net gain shall be recorded and compared to tables 4.2.6.2-1 or 4.2.6.2-2 whichever is lower.

The results obtained shall be compared to the limits in clause 4.2.6.2 in order to prove compliance.

5.3.6 Adjacent Channel Rejection Ratio

5.3.6.1 Initial conditions

Test environment: normal, see TS 136 143 [2], clause A.2.

A measurement set-up is shown in TS 136 143 [2], annex C.

- 1) Connect a signal generator to the input port of the Repeater.
- 2) Connect a power measuring equipment to the output port of the Repeater.

- 3) The measurement device characteristics shall be:
 - measurement filter bandwidth: defined in clause 4.2.7.1;
 - detection mode: true RMS voltage or true average power.

5.3.6.2 Procedures

- 1) Set the signal generator to transmit a signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 in TS 125 141 [9] at the first or last 5 MHz channel within the pass band.
- 2) Adjust the input power to the Repeater to create the maximum nominal Repeater output power at maximum gain.
- 3) Measure the RRC filtered mean power at the RF output port over a certain slot.
- 4) Set the signal generator to transmit the same signal and the same input power at one of the channel offsets outside the repeater pass band according to table 4.2.7.2.2-1.
- 5) Measure the RRC filtered mean power at the RF output port over a certain slot.
- 6) Calculate the ratio of the measured power in the pass band to the measured power at the channel offset.
- 7) Repeat step 4) to 6) until all channel offsets in table 4.2.7.2.2-1 are measured.

The results obtained shall be compared to the limits in clause 4.2.7.2 in order to prove compliance.

5.3.7 Output intermodulation

5.3.7.1 Initial conditions

Test environment: normal, see TS 136 143 [2], clause A.2.

A measurement set-up is shown in TS 136 143 [2], annex C.

- 1) Connect a signal generator to the input port of the Repeater (wanted signal). Connect a signal generator to the circulator on the output port (interfering signal) and make sure the signal generator power is directed to the repeater output port.
- 2) Detection mode: True RMS.

5.3.7.2 Procedures

- 1) Set the Repeater to maximum gain.
- 2) Set the signal generator at the repeater input port (wanted signal) to generate a signal in accordance to test model E-TM 1.1, TS 136 141 [8], clause 6.1.1.1, with a bandwidth as defined in table 4.2.8.1-1, at the level which produce the manufacturer specified maximum output power at maximum gain.
- 3) Set the signal generator at the repeater output port (interference signal) to generate a signal in accordance to test model E-TM 1.1, TS 136 141 [8], clause 6.1.1.1, with a bandwidth, level and frequency offset as defined in table 4.2.8.1-1.
- 4) Measure the emission at the specified frequencies with specified measurement bandwidth as described in the test requirements and note that the measured value does not exceed the specified value. Measurements in the band of the interfering signal shall be excluded. The measurements can be limited to the power of all third and fifth order intermodulation products.

- 5) Repeat the test from step 3) on until all interfering signal centre frequency offsets in table 4.2.8.1-1 has been tested, but exclude interfering signal frequencies that are outside of the allocated frequency band for E-UTRA downlink specified in clause 1.

NOTE: As a general rule the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth can be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

The results obtained shall be compared to the limits in clause 4.2.8.2 in order to prove compliance.

Annex A (normative): HS Requirements and conformance Test specifications Table (HS-RTT)

The HS Requirements and conformance Test specifications Table (HS-RTT) in table A-1 serves a number of purposes, as follows:

- it provides a statement of all the requirements in words and by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it provides a statement of all the test procedures corresponding to those requirements by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it qualifies each requirement to be either:
 - Unconditional: meaning that the requirement applies in all circumstances; or
 - Conditional: meaning that the requirement is dependant on the manufacturer having chosen to support optional functionality defined within the schedule.
- in the case of Conditional requirements, it associates the requirement with the particular optional service or functionality;
- it qualifies each test procedure to be either:
 - Essential: meaning that it is included with the Essential Radio Test Suite and therefore the requirement shall be demonstrated to be met in accordance with the referenced procedures;
 - Other: meaning that the test procedure is illustrative but other means of demonstrating compliance with the requirement are permitted.

Table A-1: HS Requirements and conformance Test specifications Table (HS-RTT)

Harmonized Standard EN 301 908-15						
The following requirements and test specifications are relevant to the presumption of conformity under the article article 3.2 of the R&TTE Directive						
Requirement			Requirement Conditionality		Test Specification	
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No
1	Operating band unwanted emissions	4.2.2	U		E	5.3.1
2	Spurious emissions	4.2.3	U		E	5.3.2
3	Maximum output power	4.2.4	U		E	5.3.3
4	Input intermodulation	4.2.5	U		E	5.3.4
5	Out of band gain	4.2.6	U		E	5.3.5
6	Adjacent Channel Rejection Ratio	4.2.7	U		E	5.3.6
7	Output intermodulation	4.2.8	U		E	5.3.7

Key to columns:

Requirement:

No A unique identifier for one row of the table which may be used to identify a requirement or its test specification.

Description A textual reference to the requirement.

Clause Number Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

U/C Indicates whether the requirement is to be *unconditionally* applicable (U) or is *conditional* upon the manufacturers claimed functionality of the equipment (C).

Condition Explains the conditions when the requirement shall or shall not be applicable for a technical requirement which is classified "conditional".

Test Specification:

E/O Indicates whether the test specification forms part of the Essential Radio Test Suite (E) or whether it is one of the Other Test Suite (O).

NOTE: All tests whether "E" or "O" are relevant to the requirements. Rows designated "E" collectively make up the Essential Radio Test Suite; those designated "O" make up the Other Test Suite; for those designated "X" there is no test specified corresponding to the requirement. The completion of all tests classified "E" as specified with satisfactory outcomes is a necessary condition for a presumption of conformity. Compliance with requirements associated with tests classified "O" or "X" is a necessary condition for presumption of conformity, although conformance with the requirement may be claimed by an equivalent test or by manufacturer's assertion supported by appropriate entries in the technical construction file.

Clause Number Identification of clause(s) defining the test specification in the present document unless another document is referenced explicitly. Where no test is specified (that is, where the previous field is "X") this field remains blank.

Annex B (normative): Repeater configurations

B.1 Power supply

When extreme power supply conditions are specified for a test, the test shall be performed at the standard upper and lower limits of operating voltage defined by manufacturer's declaration for the equipment under test.

Upper voltage limit:

The equipment shall be supplied with a voltage equal to the upper limit declared by the manufacturer (as measured at the input terminals to the equipment). The tests shall be carried out at the steady state minimum and maximum temperature limits declared by the manufacturer for the equipment, to the methods described in IEC 60068-2-1 [5] Test Ab/Ad and IEC 60068-2-2 [6] Test Bb/Bd: Dry Heat.

Lower voltage limit:

The equipment shall be supplied with a voltage equal to the lower limit declared by the manufacturer (as measured at the input terminals to the equipment). The tests shall be carried out at the steady state minimum and maximum temperature limits declared by the manufacturer for the equipment, to the methods described in IEC 60068-2-1 [5] Test Ab/Ad and IEC 60068-2-2 [6] Test Bb/Bd: Dry Heat.

B.2 Power supply options

If the Repeater is supplied with a number of different power supply configurations, it may not be necessary to test RF parameters for each of the power supply options, provided that it can be demonstrated that the range of conditions over which the equipment is tested is at least as great as the range of conditions due to any of the power supply configurations.

B.3 Combining of Repeaters

If the Repeater is intended for combination with additional apparatus connected to a Repeater port and this combination is supplied as a system, the combination of Repeater together with the additional apparatus must also fulfil the Repeater requirements. E.g. if the Repeater is intended for combination such that multiple Repeaters amplify the same signals into the same ports the combination must also fulfil the Repeater requirements.

An example of such a configuration is shown in figure B.3-1.

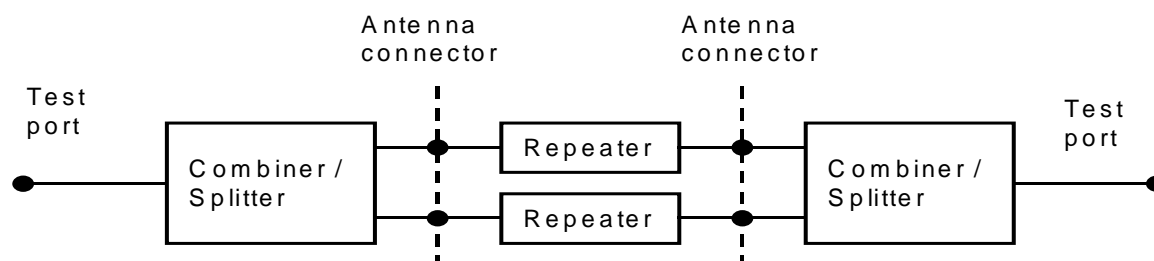


Figure B.3-1: Example of Repeater configuration

Annex C (normative): Repeater stimulus signal spectral purity requirements

The reference channels or test models constituting the repeater stimulus signal shall fulfil the spectral purity requirements defined by table C-1, where:

- the reference spectral density shall be taken 200 kHz off the carrier centre frequency with an integration bandwidth of 30 kHz;
- Δf is the separation between the channel edge frequency and the nominal -3dB point of the measuring filter closest to the carrier frequency;
- f_{offset} is the separation between the channel edge frequency and the centre of the measuring filter;
- $f_{\text{offset}_{\text{max}}}$ is the offset to the frequency 10 MHz outside the downlink operating band;
- Δf_{max} is equal to $f_{\text{offset}_{\text{max}}}$ minus half of the bandwidth of the measuring filter;
- the minimum spectral density suppression is related to the reference spectral density.

Table C-1: Repeater stimulus signal spectral purity requirements

Frequency offset of measurement filter -3dB point, Δf	Frequency offset of measurement filter centre frequency, f_{offset}	Minimum requirement	Measurement bandwidth
$0 \text{ MHz} \leq \Delta f < 0,15 \text{ MHz}$	$0,015 \text{ MHz} \leq f_{\text{offset}} < 0,165 \text{ MHz}$	$-40 + 20 \times (f_{\text{offset}} - 0,015) \text{ dBc}$	30 kHz
$0,15 \text{ MHz} \leq \Delta f < 0,2 \text{ MHz}$	$0,165 \text{ MHz} \leq f_{\text{offset}} < 0,215 \text{ MHz}$	-37 dBc	30 kHz
$0,2 \text{ MHz} \leq \Delta f < 1 \text{ MHz}$	$0,215 \text{ MHz} \leq f_{\text{offset}} < 1,015 \text{ MHz}$	$-94 \text{ dBm} - 15 * (f_{\text{offset}} - 0,215) \text{ dB}$	30 kHz
	$1,015 \text{ MHz} \leq f_{\text{offset}} < 1,5 \text{ MHz}$	-106 dBm	30 kHz
$1 \text{ MHz} \leq \Delta f < 2,8 \text{ MHz}$	$1,5 \text{ MHz} \leq f_{\text{offset}} < 2,85 \text{ MHz}$	-78 dBm	1 MHz
$2,8 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$2,85 \text{ MHz} \leq f_{\text{offset}} < f_{\text{offset}_{\text{max}}}$	-80 dBm	1 MHz

NOTE: Frequencies and bandwidth are given in MHz.

Annex D (informative): Environmental profile specification

The following environmental conditions may be declared by the supplier:

- barometric pressure: minimum and maximum;
- temperature: minimum and maximum;
- relative humidity: minimum and maximum;
- power supply: lower and upper voltage limit.

When operating outside the boundary limits of the declared operational environmental profile the equipment should not make ineffective use of the radio frequency spectrum so as to cause harmful interference.

Annex E (informative): The EN title in the official languages

The enlargement of the European Union (EU) resulted in a requirement from the EU for a larger number of languages for the translation of the titles of Harmonized Standards and mandated ENs that are to be listed in the Official Journal to support the implementation of this legislation.

For this reason the title translation concerning the present document can be consulted via the [e-approval](#) application.

Annex F (informative): Bibliography

- Directive 2004/108/EC of the European Parliament and of the Council of 15 December 2004 on the approximation of the laws of the Member States relating to electromagnetic compatibility and repealing Directive 89/336/EEC (text with EEA relevance (EMC Directive)).
- Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits (LV Directive).
- ETSI TS 125 104 (V8.8.0): "Universal Mobile Telecommunications System (UMTS); Base Station (BS) radio transmission and reception (FDD) (3GPP TS 25.104 version 8.8.0 Release 8)".
- ETSI TS 136 521-1 (V8.3.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification; Radio transmission and reception; Part 1: conformance testing (3GPP TS 36.521-1 version 8.3.0 Release 8)".

History

Document history				
V4.1.1	April 2009	Public Enquiry	PE 20090828:	2009-04-30 to 2009-08-28
V4.1.2	December 2009	Vote	V 20100219:	2009-12-21 to 2010-02-19