



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 093-1

March 1992

Source: ETSI TC-SPS

Reference: T/S 46-33D

ICS: 33.080

Key words: ISDN, supplementary service

**Integrated Services Digital Network (ISDN);
Calling Line Identification Restriction (CLIR)
supplementary service;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 1: Protocol specification**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1992. All rights reserved.

Contents

Foreword.....	5
1 Scope	7
2 Normative references	7
3 Definitions.....	8
4 Symbols and abbreviations.....	8
5 Description	9
6 Operational requirements.....	9
6.1 Provision and withdrawal	9
6.2 Requirements on the originating network side.....	9
6.3 Requirements on the destination network side.....	9
7 Coding requirements.....	9
8 State definitions	9
9 Signalling procedures at the coincident S and T reference point	9
9.1 Activation, deactivation and registration.....	9
9.2 Actions at the originating user	9
9.2.1 Normal operation.....	9
9.2.2 Exceptional procedures.....	9
9.3 Actions at the originating local exchange	10
9.3.1 Normal operation.....	10
9.3.2 Exceptional procedures.....	10
9.4 Actions at the destination local exchange	10
9.4.1 Normal operation.....	10
9.4.2 Exceptional procedures.....	10
10 Procedures for interworking with private ISDNs	10
11 Interaction with other networks.....	10
12 Interaction with other supplementary services.....	10
13 Parameter values (timers).....	10
14 Dynamic description (SDLs)	11
Annex A (informative): Signalling flows	12
Annex B (informative): Terminal interchangeability between public and private ISDNs	13
Annex C (informative): Bibliography.....	14
History	15

Blank page

Foreword

This European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS is part 1 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Calling Line Identification Restriction (CLIR) supplementary service, as described below:

- Part 1: "Protocol specification";**
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "TSS&TP specification for the network";
- Part 6: "ATS and partial PIXIT proforma specification for the network".

In accordance with CCITT Recommendation I.130, the following three level structure is used to describe the supplementary telecommunications services as provided by European public telecommunications operators under the pan-European Integrated Services Digital Network (ISDN):

- Stage 1: is an overall service description, from the user's standpoint;
- Stage 2: identifies the functional capabilities and information flows needed to support the service described in stage 1; and
- Stage 3: defines the signalling system protocols and switching functions needed to implement the service described in stage 1.

This ETS details the stage three aspects (signalling system protocols and switching functions) needed to support the Calling Line Identification Restriction (CLIR) supplementary service. The stage one and stage two aspects are detailed in ETS 300 090 (1992) and ETS 300 091 (1992), respectively.

This reprint includes all previous Corrigenda as shown in the History box at the last page.

Blank page

1 Scope

This first part of ETS 300 093 specifies the stage three of the Calling Line Identification Restriction (CLIR) supplementary service for the pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators at the T reference point or coincident S and T reference point (as defined in CCITT Recommendation I.411 [1]) by means of the Digital Subscriber Signalling System No. one (DSS1). Stage three identifies the protocol procedures and switching functions needed to support a telecommunications service (see CCITT Recommendation I.130 [2]).

In addition this standard specifies the protocol requirements at the T reference point where the service is provided to the user via a private ISDN.

This standard does not specify the additional protocol requirements where the service is provided to the user via a telecommunications network that is not an ISDN.

The CLIR supplementary service enables the calling party to prevent presentation of its ISDN number to the called party.

The CLIR supplementary service is applicable to all telecommunication services.

Further parts of this standard specify the method of testing required to identify conformance to this standard.

This standard is applicable to equipment supporting the CLIR supplementary service, to be attached at either side of a T reference point or coincident S and T reference point when used as an access to the public ISDN.

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] CCITT Recommendation I.411 (1988): "ISDN user-network interfaces Reference configurations".
- [2] CCITT Recommendation I.130 (1988): "Method for characterisation of telecommunications services supported by an ISDN and network capabilities of an ISDN".
- [3] CCITT Recommendation I.112 (1988): "Vocabulary of terms for ISDNs".
- [4] CCITT Recommendation E.164 (1988): "Numbering plan for the ISDN era".
- [5] ETS 300 102-1 (1990): "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specification for basic call control".
- [6] ETS 300 195-1: "Integrated Services Digital Network (ISDN); Supplementary service interactions; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".

- [7] ETS 300 090 (1992): "Integrated Services Digital Network (ISDN); Calling Line Identification Restriction (CLIR) supplementary service; Service description".
- [8] ETS 300 092-1 (1992): "Integrated Services Digital Network (ISDN); Calling Line Identification Presentation (CLIP) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [9] CCITT Recommendation I.210 (1988): "Principles of telecommunication services supported by an ISDN and the means to describe them".
- [10] CCITT Recommendation Z.100 (1988): "Functional Specification and Description Language (SDL)".

3 Definitions

For the purpose of this standard, the following definitions apply:

Integrated Services Digital Network (ISDN): see CCITT Recommendation I.112 [3], § 2.3, definition 308.

Service; telecommunications service: see CCITT Recommendation I.112 [3], § 2.2, definition 201.

Supplementary service: see CCITT Recommendation I.210 [9], § 2.4.

Network: the DSS1 protocol entity at the network side of the user-network interface.

User: the DSS1 protocol entity at the user side of the user-network interface.

Served user: it is the user of a particular ISDN number who has subscribed to the restriction of the calling line identification information (on a permanent or on a per-call basis) in association with outgoing calls. The served user is also known as the calling user.

Called user: it is the receiver of a call, initiated by the served user, on which the CLIR supplementary service has been activated.

ISDN number: a number conforming to the numbering plan and structure specified in CCITT Recommendation E.164 [4].

Subaddress: see CCITT Recommendation E.164 [4], § 11.2.

4 Symbols and abbreviations

CLIP	Calling Line Identification Presentation
CLIR	Calling Line Identification Restriction
DSS1	Digital Subscriber Signalling System No. one
ISDN	Integrated Services Digital Network

5 Description

The CLIR supplementary service is a supplementary service offered to the calling user. It restricts presentation of the calling user's ISDN number and subaddress to the called user.

When the CLIR supplementary service is applicable and activated, the originating network shall provide the destination network with the indication that the calling user's ISDN number and subaddress information (if provided by the calling user) are not allowed to be presented to the called user. In this case no calling user number shall be included in the call offered to the called user.

The presentation restriction function shall not influence the forwarding of the calling user number within the network as part of the basic service procedures.

6 Operational requirements

6.1 Provision and withdrawal

See ETS 300 090 [7], subclause 6.1.

6.2 Requirements on the originating network side

Any information pertaining to the CLIR supplementary service shall be inserted in the SETUP message sent as part of the basic call procedures according to ETS 300 102-1 [5], Clause 5.

6.3 Requirements on the destination network side

See subclause 9.4.

7 Coding requirements

ETS 300 102-1 [5] subclause 4.5.10 gives the coding for the calling party number information element.

8 State definitions

No specific state definitions are required.

9 Signalling procedures at the coincident S and T reference point

9.1 Activation, deactivation and registration

Not applicable.

9.2 Actions at the originating user

9.2.1 Normal operation

If the CLIR supplementary service is requested by a user on a per-call basis and the user wishes to override the default setting, the user shall include the calling party number information element in the SETUP message sent to the network, with the presentation indicator set to "presentation restricted" or "presentation allowed".

9.2.2 Exceptional procedures

Not applicable.

9.3 Actions at the originating local exchange

9.3.1 Normal operation

If the calling user has subscribed to the CLIR supplementary service permanent mode, then the network shall ignore the presentation indicator received in the SETUP message. The network shall set the presentation indicator to "presentation restricted".

The number digits, if included, shall be treated according to tables 1 and 2 of ETS 300 092-1 [8].

If the CLIR supplementary service is requested by the user on a per-call basis, and the calling party number information element containing a presentation indicator is included in the SETUP message, then the originating network shall set the presentation indicator according to that in the received calling party number information element.

If the CLIR supplementary service is requested by the user on a per-call basis, and no presentation indicator is included in the SETUP message, then the originating network shall set the presentation indicator according to the subscribed default value.

The presentation indicator shall be forwarded to the destination in association with the basic call request.

9.3.2 Exceptional procedures

Not applicable.

9.4 Actions at the destination local exchange

9.4.1 Normal operation

The actions to be performed at the destination local exchange are specified in ETS 300 092-1 [8], subclause 9.5.1.

9.4.2 Exceptional procedures

Not applicable.

10 Procedures for interworking with private ISDNs

The procedures specified in Clause 9 shall be used.

11 Interaction with other networks

On calls to or via non-ISDNs, it cannot be assured that a restriction indication can be carried to the destination network. As a network option, the originating network may restrict any information identifying the calling user from being forwarded to the destination network when the CLIR supplementary service is applicable. For further information see Clause 11 of ETS 300 092-1 [8].

12 Interaction with other supplementary services

The interaction of the CLIR supplementary service with other supplementary services shall be as specified in ETS 300 195-1 [6].

13 Parameter values (timers)

No specific timers are required.

14 Dynamic description (SDLs)

The dynamic description is specified in figure 1 according to CCITT Recommendation Z.100 [10].

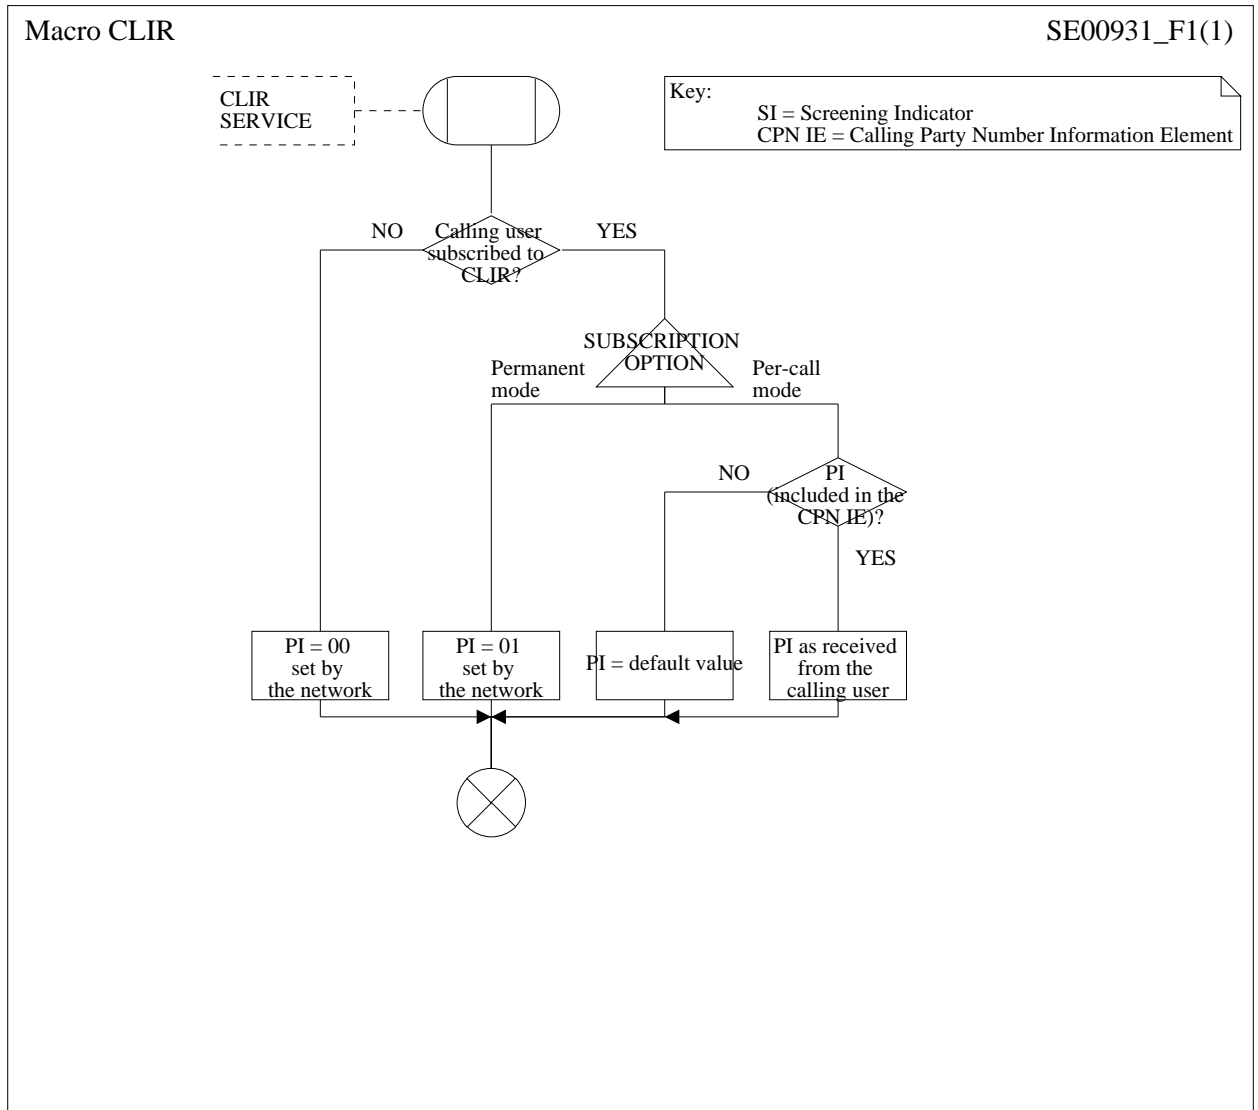


Figure 1: Originating network side dynamic description

Annex A (informative): Signalling flows

No CLIR supplementary service specific information flow is necessary in addition to basic call control according to ETS 300 102-1 [5].

Annex B (informative): Terminal interchangeability between public and private ISDNs

Terminals conforming to this standard are also compatible with private ISDNs offering interfaces conforming to the Calling Line Identification Restriction (CLIR) aspects of ETS 300 191.

NOTE: To prevent presentation of the calling user's subaddress to the called user, the terminal equipment should not include the calling party subaddress information element in the SETUP message sent to a private ISDN. Presentation of the subaddress is not subject to restrictions in a private network.

Terminals conforming to the Calling Line Identification Restriction (CLIR) supplementary service and Connected Line Identification Restriction (COLR) supplementary service aspects of ETS 300 191 are also compatible with public ISDNs offering interfaces conforming to this standard.

Annex C (informative): Bibliography

ETS 300 191: "Private Telecommunication Networks (PTN); Signalling protocol at the S-reference point; Identification supplementary services".

History

Document history	
March 1992	First Edition
April 1994	Corrigendum to First Edition: change to part 1 of a multi-part standard
March 1996	Converted into Adobe Acrobat Portable Document Format (PDF) and incorporation of all prior Corrigenda